

FCC Test Report

Report No.: AGC09477230508FE10

FCC ID	:	2AWVU-GRAVITIS
APPLICATION PURPOSE		Original Equipment
PRODUCT DESIGNATION	:	Gravitis Wireless car charger
BRAND NAME	:	Origaudio
MODEL NAME	:	X9808001007 (Black)
APPLICANT	:	Fortyfour group LLC
DATE OF ISSUE	:	May 25, 2023
STANDARD(S)	:	FCC Part 15 Subpart C
REPORT VERSION		V 1.0 V 1.0 Constance (Shenzhen) Co., Ltd
<u>Attestation of</u>	<u>GIO</u>	bar compliance (Snenznen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 25, 2023	Valid	Initial Release



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	8
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	9
3.5 LIST OF EQUIPMENTS USED	10
4.SYSTEM TEST CONFIGURATION	11
4.1 EUT CONFIGURATION	11
4.2 EUT EXERCISE	11
4.3 CONFIGURATION OF TESTED SYSTEM	11
4.4 EQUIPMENT USED IN TESTED SYSTEM	11
4.5 SUMMARY OF TEST RESULTS	12
5. DESCRIPTION OF TEST MODES	13
6. FIELD STRENGTH OF FUNDAMENTAL	14
6.1 PROVISIONS APPLICABLE	14
6.3 FIELD STRENGTH CALCULATION	16
6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	17
6.5 MEASUREMENT RESULTS	18
7. 20 DB BANDWIDTH	24
7.1 PROVISIONS APPLICABLE	24
7.2 MEASUREMENT PROCEDURE	24
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	24
7.4 MEASUREMENT RESULTS	
8. AC POWER LINE CONDUCTED EMISSION TEST	
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	

^{8.2} MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION). 26 Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



AP	PENDIX B: PHOTOGRAPHS OF TEST EUT	. 30
AP	PENDIX A: PHOTOGRAPHS OF TEST SETUP	. 30
	8.5 MEASUREMENT RESULTS	. 28
	8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 27
	8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 27



1. GENERAL INFORMATION

Applicant	Fortyfour group LLC	
Address	1770 S. 5350 W Ste 100 Salt Lake City, Utah 84104, United States	
Manufacturer	DEPO Manufacturing Corp., Ltd	
Address	Unit 7D3, 7/F, Block CD, Tian Xiang building, Chegongmiao, Futian, Shenzhen, China, 518040	
Factory	Rongmingchuang Technology Limited	
Address	5F, No.1 building, B district, The second industry zoon, xixiang, Baoan, Shenzhen	
Product Designation	Gravitis Wireless car charger	
Brand Name	Origaudio	
Test Model	X9808001007 (Black)	
Deviation from Standard	rd No any deviation from the test method	
Date of receipt of test item	May 22, 2023	
Date of Test	May 22, 2023 to May 25, 2023	
Test Result	Pass	
Test Report Form No	AGCTR-ER-FCC-WPTV1.0	

Prepared By

Jack Gui ck Gui Engineer) May 25, 2023

Jack Gui (Project Engineer)

Reviewed By

Calvin Liu (Reviewer) May 25, 2023

Approved By

Max Zhang

Max Zhang Authorized Officer

May 25, 2023



2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency	110.5KHz-205KHz
Modulation Type	FSK
Number of channels	1
Field Strength of Fundamental	76.35dBuV/m (Max)
Antenna Designation	Coil Antenna
Antenna Gain	0dBi
EUT Power Supply	DC 5V by adapter
Wireless Charging Output Power	5W (Max)
Adapter Information	N/A

2.2 TEST FREQUENCY LIST

Frequency Band	Channel Number	Frequency
110.5KHz-205KHz	01	118.3KHz



2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AWVU-GRAVITIS** filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title	
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations	
2	FCC 47 CFR Part 15	Radio Frequency Devices	
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices	

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0 dBi.



3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS			
Temperature range (°C)	15 - 35	-20 - 50			
Relative humidty range	20 % - 75 %	20 % - 75 %			
Pressure range (kPa)	86 - 106	86 - 106			
Power supply					
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.					

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 4.2 \text{ dB}$
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.8 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test Software	R&S	ES-K1 (Ver V1.71)	N/A	N/A	N/A
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025
Test Software	Tonscend	JS32-RE (Ver.2.5)	Ver.2.5	N/A	N/A



4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

Item	Equipment	Model No.	Identifier	Note
1	wireless charging load	N/A	N/A	AE
2	Adapter	HW-050200C01	N/A	AE

☑ Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	Gravitis Wireless car charger	X9808001007 (Black)	2AWVU-GRAVITIS	EUT

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



4.5 SUMMARY OF TEST RESULTS

ltem	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Radiated Spurious Emission	Pass
3	§15.215(c)	20dB Bandwidth	Pass
4	§15.205(a)	Restricted Bands of Operation	Pass
5	§15.207	AC Power Line Conducted Emission	Pass



5. DESCRIPTION OF TEST MODES

Summary table of Test Cases						
	Equipment type / Modulation					
Test Item	WPT_(TX:127KHz)/ ASK					
	Mode1: AC/DC Adapter +DUT+ Wireless Load (Full Load mode)					
Radiated&Conducted Test Cases	Mode1: AC/DC Adapter +DUT+ Wireless Load (Half Load mode)					
Test Cases	Mode1: AC/DC Adapter +DUT+ Wireless Load (Null Load mode)					
	Mode1: AC/DC Adapter +DUT+ Wireless Load (Full Load mode)					
AC Conducted Emission	Mode1: AC/DC Adapter +DUT+ Wireless Load (Half Load mode)					
	Mode1: AC/DC Adapter +DUT+ Wireless Load (Null Load mode)					
Note:						

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.



6. FIELD STRENGTH OF FUNDAMENTAL

6.1 PROVISIONS APPLICABLE

Test Requirement:		FCC Part15 C Section 15.209							
Test Method:		ANSI C63.10:2013							
Test Frequency Range:		9kHz to 1GHz							
Test site:		Measurement Distance: 3m							
		Frequency	Detector	RBW	VBW	Value			
		9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak			
Receiver setup:		150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak			
Receiver setup.		30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak			
			Peak	1MHz	3MHz	Peak			
		Above 1GHz	Peak	1MHz	10Hz	Average			
				•		-			

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark	
30MHz-88MHz	40.00	Quasi-peak Value	
88MHz-216MHz	43.50	Quasi-peak Value	
216MHz-960MHz	46.00	Quasi-peak Value	
960MHz-1GHz	54.00	Quasi-peak Value	
	54.00	Average Value	
Above 1GHz	74.00	Peak Value	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



6.2 MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



6.3 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where FS = Field Strength in dBµV/m

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF

where $FS = Field Strength in dB\mu V/m$ RR = RA - AG - AV in dB μ V LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m.

This value in dB μ V/m was converted to its corresponding level in μ V/m.

 $\begin{array}{ll} {\sf RA} = 52.0 \; d{\sf B}\mu{\sf V}/{\sf m} & \\ {\sf AF} = 7.4 \; d{\sf B}/{\sf m} & {\sf RR} = 18.0 \; d{\sf B}\mu{\sf V} \\ {\sf CF} = 1.6 \; d{\sf B} & {\sf LF} = 9.0 \; d{\sf B} \\ {\sf AG} = 29.0 \; d{\sf B} & \\ {\sf AV} = 5.0 \; d{\sf B} & \\ {\sf FS} = {\sf RR} + {\sf LF} \\ {\sf FS} = 18 + 9 = 27 \; d{\sf B}\mu{\sf V}/{\sf m} & \\ \end{array}$

Level in μ V/m = Common Antilogarithm [(27 dB μ V/m)/20] = 22.4 μ V/m

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

```
H[dB(\mu A/m)] = V[dB(\mu V)] + LC [dB] - GPA [dB] + AFH [dB(S/m)]
```

Where,

H is the magnetic field strength (to be compared with the limit), V is the voltage level measured by the receiver or spectrum analyzer, LC is the cable loss, GPA is the gain of the preamplifier (if used), and AFH is the magnetic antenna factor.

If the "electrical" antenna factor is used instead, the above equation becomes:


 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC [dB] - GPA [dB] + AFE [dB(m-1)] - 51.5 [dB\Omega]$

where AFE is the "electric" antenna factor, as provided by the antenna calibration laboratory.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

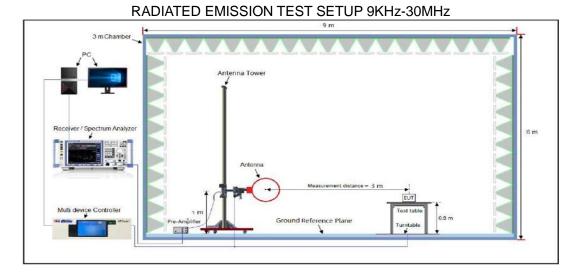

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

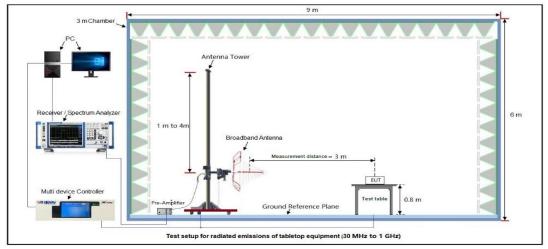


The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



6.5 MEASUREMENT RESULTS

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9KHz-150KHz

EUT	Gravitis Wireless car charger	Model Name	X9808001007 (Black)
Temperature 2	21°C	Relative Humidity	54%
Pressure 9	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Face

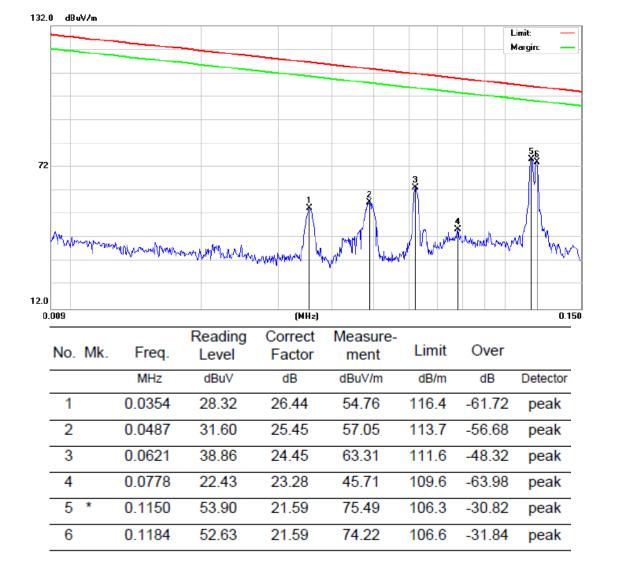

RESULT: PASS



	E	LECTRIC FIE	LD TEST IN	THE FRE		ANGE 9K	Hz-150K	Hz
EUT		Gravitis Wirel	Model Name		X980	X9808001007 (Black)		
Temperatur	e	21°C			Relative H	umidity	54%	
Pressure		960hPa			Test Volta	ge	Norm	al Voltage
Test Mode		Mode 1			Antenna		Side	
132.0) dBu∀/m							Limit: —
								Margin: —
				_	_			
-								
-								
]
								6 ×
72								-Mi
-						4		
				Ş	X	I		
-				Â			5	
	10 m a		1			Albow	5 MMW what have have a	
	WILL	my horas have been and	mannan	www.	worked has	AM TO MAR	Marken	a Marmon
-								
-								
12.0								
0.0	D09			(MHz)				0.150
-			Reading	Correct	Measure-			
	No. M	K. Freq.	Level	Factor	ment	Limit	Over	
-		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
	1	0.0234	9.98	27.34	37.32	120.0	-82.74	peak
-	2	0.0354	27.28	26.44	53.72	116.4	-62.76	peak
				20.44				peak
-		0.0493	31.32	25.41	56.73	113.6	-56.89	peak
	3	0.0495						
				24.45	61.05	111.6	50.59	neak
	4	0.0621	36.60	24.45	61.05	111.6	-50.58	peak
-				24.45 23.28	61.05 43.97	111.6 109.6	-50.58 -65.72	peak peak
-	4	0.0621	36.60					

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9KHz-150KHz

RESULT: PASS



	ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150KHZ-30MI								
EUT	G	Gravitis Wireless car charger			Model Name		X980	08001007 (Black	
Temperature	2	1°C			Relative H	lumidity	54%		
Pressure	9	60hPa			Test Volta	ge	Norm	Normal Voltage	
Test Mode	est Mode 1				Antenna		Face	9	
122.0	dBuV/m								
122.0								Limit: —	
							h	Margin: —	
	_								
62		-							
02									
		2 	2						
ł		IN S	5						
	Marrie and Marries			4 5 X X	ي فان في ا	6 X	maken intern		
ιψ.	menon with the states	in hydria	Manager Manager	white must your	linner albert a water house high	NAME OF THE OF THE OWNER	m Manahar May	4min Markan March	
ψ	menon shahada	in by here	hand the second s	unter and a second s	lime-aboyt-anight-pathips		mhanduilhtyp	44-march and an a street	
ηγ	an a	- hour		a 5 unit unit for the second se	linne Manterinitetypethike	6 	m-tamatailhtap	4man Approximation A	
2.0	**************************************	in hydrin			lana ayaya sa ayadaya daga daga daga daga daga daga		or have a with a	4prin and approximation of	
2.0 0.15	0	0.5		4 5		5	nt land a land	400000 30.000	
0.15						5			
0.15	0 0 No. Mk.			(MHz)		5	Over		
0.15			Reading	(MHz) Correct	Measure-	5			
0.15		Freq.	Reading	(MH2) Correct Factor	Measure- ment	5 Limit	Over	30.000	
0.15	No. Mk.	Freq. MHz	Reading Level dBuV	(MH₂) Correct Factor dB	Measure- ment dBuV/m	5 Limit dB/m	Over	30.000 Detector	
0.15	No. Mk.	Freq. MHz 0.1516	Reading Level dBuV 19.89	(MH₂) Correct Factor dB 21.52	Measure- ment dBuV/m 41.41	5 Limit dB/m 103.9	Over dB -62.52	30.000 Detector peak	
0.15	No. Mk. 1 2	Freq. MHz 0.1516 0.3558	Reading Level dBuV 19.89 28.82	(мн₂) Соггест Factor dB 21.52 21.15	Measure- ment dBuV/m 41.41 49.97	5 Limit dB/m 103.9 96.56	Over dB -62.52 -46.59	30.000 Detector peak peak	
0.15	No. Mk. 1 2 3	Freq. MHz 0.1516 0.3558 0.5762	Reading Level dBuV 19.89 28.82 22.47	(мн₂) Соггесt Factor dB 21.52 21.15 20.94	Measure- ment dBuV/m 41.41 49.97 43.41	5 Limit dB/m 103.9 96.56 72.39	Over dB -62.52 -46.59 -28.98	30.000 Detector peak peak peak	
0.150	No. Mk. 1 2 3 4 *	Freq. MHz 0.1516 0.3558 0.5762 1.3665	Reading Level dBuV 19.89 28.82 22.47 18.57	(мна) Соггест Factor dB 21.52 21.15 20.94 21.59	Measure- ment dBuV/m 41.41 49.97 43.41 40.16	5 Limit dB/m 103.9 96.56 72.39 64.89	Over dB -62.52 -46.59 -28.98 -24.73	Detector peak peak peak peak	

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150KHz-30MHz

RESULT: PASS



ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150KHZ-30MHZ								
EUT	Gravitis Wirel	Gravitis Wireless car charger			ne	X980	8001007 (Black)	
Temperature	21° C			Relative H	umidity	54%	54%	
Pressure	960hPa			Test Voltag	ge	Norm	al Voltage	
Test Mode	Mode 1			Antenna		Side		
122.0 dBuV/							Limit: —	
							Margin:	
62								
	2							
-	2							
× ·	a albert	3		4	. characteristic	5	Martin Martin Martin	
apple and the	Manually Mythilan	M N WWW	all the statement of the statement	when the stand and the second started	underen une a contra	freehow when we	man manage and the second	
2.0								
0.150	0.5		(MHz)		5	I	30.000	
		Reading	Correct	Measure-				
No. N	/lk. Freq.	Level	Factor	ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	
1	0.1507	21.12	21.53	42.65	103.9	-61.33	peak	
2	0.3446	29.97	21.17	51.14	96.84	-45.70	peak	
3	0.6611	17.62	21.01	38.63	71.20	-32.57	peak	
4	2.8239	17.27	22.36	39.63	69.54	-29.91	peak	
5 *	8.8691	17.28	24.07	41.35	69.54	-28.19	peak	
6	22.5353	14.72	24.86	39.58	69.54	-29.96	peak	

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150KHz-30MHz

RESULT: PASS

NOTES:

- 1. Peak detector is used for frequency below 30MHz.
- 2. Negative value in the margin column shows emission below limit.
- 3. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
- 4. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)
- 5. Loop antenna is used for the emission under 30MHz.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



	RAL	DIATED EMISSION				
EUT	Gravitis Wire	less car charger	Model Name		X9808001007 (Black	
Temperature	21° C		Relative Humidity		54%	
Pressure	960hPa		Test Voltage		Normal Voltage	
Test Mode	Mode 1		Antenna		Horizontal	
72.0 dBuV/m						
					Limit: — Margin: —	
					Ę.	
			1	5	- Aut	
32		2 4		N. merry	marphone	
	J. J.	vĩ ả mi	4 minutes of	var læde e		
when the work of the second	Man mar Martoral M	With and the second	the sharked we would be			
e new Winters		1				
-8						
	0 60 70 80	(MHz)	300 40	0 500	600 700 1000.000	
	Rea	-	leasure-	0	_	
No. Mk.	Freq. Lev	el Factor	ment Limit	Ove	r	
	MHz dB	uV dB d	iBuV/m dB/m	dB	Detector	
1 4	4.5868 6.	30 13.58	19.88 40.00	-20.1	2 peak	
2 10	0.9339 11.		26.67 43.50	-16.8	3 peak	
	0.9339 11.	55 15.12			•	
3 13	0.9339 11.	5515.127314.33	26.67 43.50	-19.4	I4 peak	
3 13 4 20	0.9339 11. 0.3789 9. 8.5803 13.	5515.127314.339312.89	26.67 43.50 24.06 43.50	-19.4 -16.6	14 peak 18 peak	

RADIATED EMISSION BELOW 1GHz

RESULT: PASS



	r	RADIATEL	D EMISSIO	N BELOW	IGHZ			
EUT	Gravitis	Wireless ca	r charger	Model	Name	X	9808001007 (Black)	
Temperature	21°C		Relative Humidity		ty 54	54%		
Pressure	960hPa			Test V	oltage	N	Normal Voltage	
Test Mode	Mode 1			Anten	na	V	ertical	
72.0 dBu∀/m							imit: —	
							largin:	
							<mark>_</mark>	
1							5 5	
32 X					4	- day (ant and a start of the start of	
\mathbb{N}	3 X	λ.		m	way and all and a second	Numan War D		
	1 minutes and	www.Maynault.	and have been and have a	Mar designation of the	(97 · 190 · · ·			
-8								
30.000 40 50	D 60 70	80	(MHz)		300 400	500 600) 700 1000.000	
No. Mk.	Freq.	Reading	Correct	Measure	- Limit	Over		
INO. IVIK.		Level	Factor	ment			Data das	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	
	1.1798	22.20	13.99	36.19	40.00	-3.81	QP	
2 43	3.3534	16.71	16.93	33.64	40.00	-6.36	peak	
3 53	3.5052	10.81	17.04	27.85	40.00	-12.15	peak	
4 443	3.2943	6.93	25.95	32.88	46.00	-13.12	peak	
5 710	6.6820	6.40	28.68	35.08	46.00	-10.92	peak	
6 93	5.5463	6.05	30.40	36.45	46.00	-9.55	peak	

RADIATED EMISSION BELOW 1GHz

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.

3. The "Factor" value can be calculated automatically by software of measurement system.



7. 20 dB BANDWIDTH

7.1 PROVISIONS APPLICABLE

N/A

7.2 MEASUREMENT PROCEDURE

Set the parameters of SPA as below:

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 300 Hz and the video bandwidth of 1 kHz were used.
- 4. Span: 3kHz, Sweep time: Auto
- 5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and Reported.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)



Spectrum Analyzer



7.4 MEASUREMENT RESULTS

	Tes	t Data of Occupied Bandwi	dth and -20dB Bandwic	ith	
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (MHz)	Pass or Fail
ASK	0.1183	0.783	0.871	N/A	Pass

Test Graphs of Occupied Bandwidth&-20dB Bandwidth

Agilent Spectrum Analyzer - Occupied BW UX R RF SO AC Center Freq 118.290 kHz #I	Cente Trig: I	ENSE:PULSE er Freq: 118.290 kHz Free Run Avg f 1:30 dB	ALIGNAUTO Hold:>10/10	11:38:43 AM May 24, 2023 Radio Std: None Radio Device: BTS	Frequency
10 dB/div Ref 10.00 dBm					
-10.0					Center Freq 118.290 kHz
-20.0					
-50.0					
-70.0					
Center 118.3 kHz #Res BW 300 Hz	#	VBW 1 kHz		Span 3 kHz Sweep 40.87 ms	CF Step 300 Hz
Occupied Bandwidth	783 Hz	Total Power	-7.61	dBm	<u>Auto</u> Man Freg Offset
Transmit Freq Error	64 Hz	OBW Power	99	0.00 %	0 Hz
x dB Bandwidth	871 Hz	x dB	-20.	00 dB	
MSG			STATUS	3	



8. AC POWER LINE CONDUCTED EMISSION TEST

8.1 LIMITS OF LINE CONDUCTED EMISSION TEST


Fragmenta	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

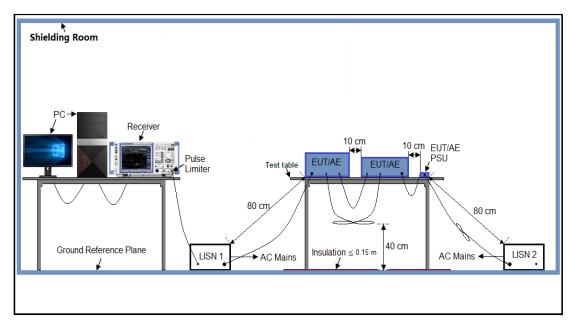



8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



8.5 MEASUREMENT RESULTS

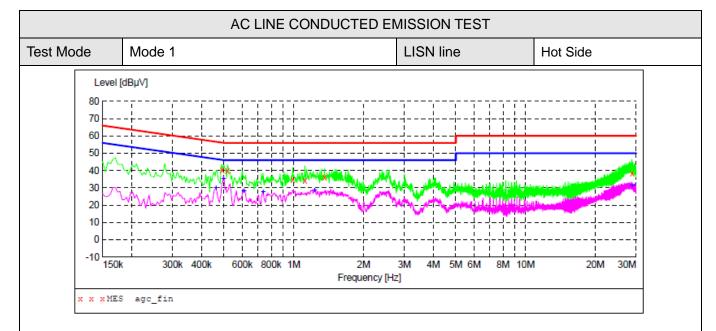

MEASUREMENT RESULT: "agc_fin"

2023/5/23	14:08					
Frequenc MH	-	Transd dB	Limit dBuV	Margin dB	Detector	Line
Pitt	12 αθμν	ав	αbμv	uв		
0.49000	0 40.40	6.2	56	15.8	QP	ь1
0.51800	0 39.80	6.2	56	16.2	QP	ь1
0.99000	0 34.60	6.3	56	21.4	QP	ь1
1.11800	0 34.40	6.3	56	21.6	QP	ь1
1.35800	0 35.90	6.3	56	20.1	QP	L1
28.79800	38.40	9.1	60	21.6	QP	L1

MEASUREMENT RESULT: "agc fin2"


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.462000	29.90	6.2	47	16.8	AV	L1
0.498000	35.20	6.2	46	10.8	AV	L1
0.610000	28.10	6.2	46	17.9	AV	L1
0.738000	27.50	6.3	46	18.5	AV	L1
1.230000	28.50	6.3	46	17.5	AV	L1
28.798000	31.20	9.1	50	18.8	AV	L1

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



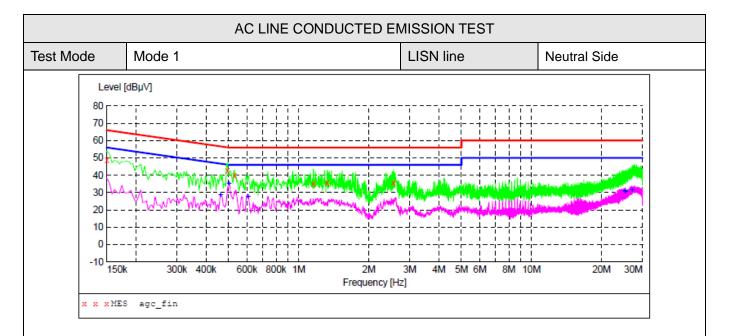

MEASUREMENT RESULT: "agc_fin"

2023/5/23 14:01

023/3/23 14.	01					
Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
0.150000	48.90	6.2	66	17.1	QP	N
0.494000	42.80	6.2	56	13.3	QP	N
0.530000	39.90	6.2	56	16.1	QP	N
1.158000	34.90	6.3	56	21.1	QP	N
1.326000	35.50	6.3	56	20.5	QP	N
2.558000	35.50	6.4	56	20.5	QP	Ν

MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.462000	28.70	6.2	47	18.0	AV	N
0.502000	35.00	6.2	46	11.0	AV	Ν
0.606000	27.60	6.2	46	18.4	AV	Ν
25.094000	31.10	8.6	50	18.9	AV	Ν
25.318000	30.30	8.7	50	19.7	AV	Ν
27.018000	31.30	8.9	50	18.7	AV	Ν

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC09477230508AP01

APPENDIX B: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC09477230508AP02

-----END OF REPORT-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.