

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No...... : **MAX250329010P01-R01**

FCC ID..... : **2AKLL-AD5X**

Compiled by
(position+printed name+signature)... : Engineer/ Cindy Zheng

Cindy Zheng

Supervised by
(position+printed name+signature)... : Manager/Haley Wen

Haley Wen

Approved by
(position+printed name+signature)... : RF Manager/ Vivian Jiang

Vivian Jiang

Date of issue..... : April 17, 2025

Testing Laboratory Name..... : **MAX Testing Co.,Ltd.**

Address..... : 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

Applicant's name..... : **Zhejiang Flashforge 3D Technology CO., Ltd.**

Address..... : No. 518, Xianyuan Road, Jinhua, Zhejiang, China

Test specification..... :

FCC CFR Title 47 Part 15 Subpart C Section 15.407

Standard..... : **ANSI C63.10:2020**

KDB 789033 D02 v02r01

MAX Testing Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the MAX Testing Co.,Ltd. is acknowledged as copyright owner and source of the material. MAX Testing Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : **3D Printer**

Trade Mark..... :  **FLASHFORGE**

Manufacturer..... : Dongguan Flashforge 3d Technology Co., Ltd.

Model/Type reference..... : AD5X

Listed Models : N/A

Modulation Type..... : OFDM

Operation Frequency..... : From 5180MHz-5240MHz, 5745MHz-5825MHz

Rating..... : AC100~120V/200~240V, 50-60Hz, 650W

Result..... : **PASS**

TEST REPORT

Equipment under Test : **3D Printer**

Model /Type : **AD5X**

Series Model No. **N/A**

Model Declaration : **N/A**

Applicant : **Zhejiang Flashforge 3D Technology CO., Ltd.**

Address : **No. 518, Xianyuan Road, Jinhua, Zhejiang, China**

Manufacturer : **Dongguan Flashforge 3d Technology Co., Ltd.**

Address : **Room 304, Building 2, No. 1 Jianlang Road, Tangxia Town,
Dongguan City, Guangdong China**

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks.....	5
2.2 Product Description.....	5
2.3 Equipment Under Test.....	6
2.4 Short description of the Equipment under Test (EUT).....	6
2.5 EUT operation mode.....	6
2.6 Block Diagram of Test Setup.....	6
2.7 Related Submittal(s) / Grant (s).....	6
2.8 Modifications.....	6
3 TEST ENVIRONMENT	7
3.1 Address of the test laboratory.....	7
3.2 Test Facility.....	7
3.3 Environmental conditions.....	7
3.4 Test Description.....	8
3.5 Statement of the measurement uncertainty.....	8
3.6 Equipments Used during the Test.....	10
4 TEST CONDITIONS AND RESULTS	12
4.1 AC Power Conducted Emission.....	12
4.2 Radiated Emission.....	21
4.3 Maximum Peak Conducted Output Power.....	38
4.4 Power Spectral Density.....	41
4.5 Emission Bandwidth (26dBm Bandwidth).....	48
4.6 Minimum Emission Bandwidth (6dBm Bandwidth).....	55
4.7 Conducted Out Of Band Emission.....	59
4.8 SPURIOUS RF CONDUCTED EMISSIONS.....	78
4.9 Frequency Stability.....	79
4.10 Antenna Requiremen.....	81
5 TEST SETUP PHOTOS OF THE EUT	82
6 PHOTOS OF THE EUT	83

1 TEST STANDARDS

The tests were performed according to following standards:

[CC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v02r01

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	March 27, 2025
Testing commenced on	:	March 27, 2025
Testing concluded on	:	April 15, 2025

2.2 Product Description

Product Name:	3D Printer			
Model/Type reference:	AD5X			
Power supply:	AC100~120V/200~240V, 50-60Hz, 650W			
Adapter information	N/A			
testing sample ID:	MAX250329010P01-R01-1# (Engineer sample), MAX250329010P01-R01-2# (Normal sample)			
Hardware version:	V1.0			
Software version:	V1.0			
Built-in power supply 1:	A-150FGZ-24			
Built-in power supply 2:	AM150-B24			
WIFI :				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Modulation:	5180MHz-5240MHz 5745MHz-5825MHz	5190MHz-5230MHz 5755MHz-5795MHz	5210MHz 5775MHz	N/A
Operation frequency:	OFDM	OFDM	OFDM	N/A
Channel number:	9	4	2	N/A
Channel separation:	20MHz	40MHz	80MHz	N/A
Data Rate:	802.11a: 6,9,12,18,24,36,48, 54Mbps; 802.11n(HT20/HT40):MCS0-MCS7; 802.11ac(HT20): Ncc1 MCS0-Ncc1 MCS8 802.11ac(HT40/HT80):MCS0-MCS9			
Antenna type:	FPC antenna			
Antenna gain:	4.9 dBi			

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☒ 120V / 60Hz
		☐ 5 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

2.4 Short description of the Equipment under Test (EUT)

This is 3D Printer.

For more details, refer to the user's manual of the EUT.

2.5 EUT operation mode

The Applicant provides communication tools software (AT command) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.


All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825	--	--	--	--

Note: The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

2.6 Block Diagram of Test Setup

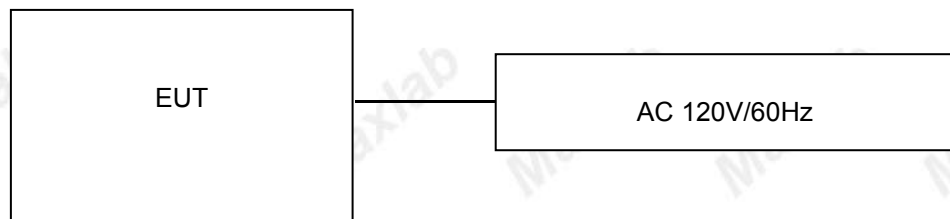

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

MAX Testing Co.,Ltd.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

3.2 Test Facility

FCC-Registration No.: 562200 Designation Number: CN1338

MAX Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 11093A CAB identifier: CN0019

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

A2LA-Lab Cert. No.: 4707.01

MAX Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

AC Power Conducted Emission

Temperature:	24 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS ^{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
15.407(b)(1)/ 15.407(b)(2) 15.407(b)(3)/ 15.407(b)(4)	Band Edge	PASS
15.407(b)	Spurious Emissions at Antenna Terminals	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A ^{Note 3}
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS
FCC Part 15.407(c)	Automatically discontinue transmission	PASS ^{Note4}

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Note 4: While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (Manufacturer declare)

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
MMaximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz),11ac(20MHz)/OFDM	7.2 Mbps
	11n(40MHz),11ac(40MHz)/OFDM	15.0Mbps
	11ac(80MHz)/OFDM	65.0Mbps

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the MAX Testing Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for MAX Testing Co.,Ltd.

Test item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB(10 MHz $\leq$ f < 3.6 GHz);
	1.38 dB(3.6 GHz $\leq$ f < 8 GHz)
Peak Output Power (Conducted)(Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB(10 MHz $\leq$ f < 3.6 GHz);
	1.38 dB(3.6 GHz $\leq$ f < 8 GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	5.5x 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB(10 MHz $\leq$ f < 3.6 GHz);
	1.40 dB(3.6 GHz $\leq$ f < 8 GHz)
	1.66 dB (8 GHz $\leq$ f < 26.5 GHz)
Uncertainty for radio frequency (RBW <20 kHz)	3x10 ⁻⁸
Temperature	0.4℃
Humidity	2%
Uncertainty for Radiation Emission test (9 kHz-30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz-1GHz)	4.70 dB (Antenna Polarize:V)
	4.84 dB(Antenna Polarize:H)
Uncertainty for Radiation Emission test (1GHz-40GHz)	4.10 dB(1-6 GHz)
	4.40 dB(6 GHz- 18 GHz)
	3.54 dB(18 GHz- 26 GHz)
	4.30 dB(26 GHz-40 GHz)
Uncertainty for Power line conduction emission test	3.34dB(150KHz-30MHz)
	3.72dB(9KHz-150KHz)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test

Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	MAX252	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	MAX552	2024-10-27	2025-10-26
Coaxial Switch	ANRITSU CORP	MP59B	MAX225	2024-10-27	2025-10-26
ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	MAX226	2024-10-27	2025-10-26
Coaxial Cable	MAX	N/A	MAX227	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Thermo meter	KTJ	TA328	MAX233	2024-10-27	2025-10-26
Absorbing clamp	Elektronik-Feinmechanik	MDS21	MAX229	2024-10-27	2025-10-26
LISN	R&S	ENV216	308	2024-10-27	2025-10-26
LISN	R&S	ENV216	314	2024-10-27	2025-10-26

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	MAX250	2024-10-27	2025-10-26
Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	MAX251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	MAX203	2024-10-27	2025-10-26
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	MAX214	2024-10-27	2025-10-26
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	MAX208	2024-10-27	2025-10-26
Horn Antenna	ETS-LINDGREN	3160	MAX217	2024-10-27	2025-10-26
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Coaxial Cable	MAX	N/A	MAX213	2024-10-27	2025-10-26
Coaxial Cable	MAX	N/A	MAX211	2024-10-27	2025-10-26
Coaxial cable	MAX	N/A	MAX210	2024-10-27	2025-10-26
Coaxial Cable	MAX	N/A	MAX212	2024-10-27	2025-10-26
Amplifier(100kHz-3GHz)	HP	8347A	MAX204	2024-10-27	2025-10-26
Amplifier(2GHz-20GHz)	HP	84722A	MAX206	2024-10-27	2025-10-26
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	MAX218	2024-10-27	2025-10-26
Band filter	Amindeon	82346	MAX219	2024-10-27	2025-10-26
Power Meter	Anritsu	ML2495A	MAX540	2024-10-27	2025-10-26
Power Sensor	Anritsu	MA2411B	MAX541	2024-10-27	2025-10-26
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	MAX575	2024-10-27	2025-10-26


Splitter	Agilent	11636B	MAX237	2024-10-27	2025-10-26
Loop Antenna	ZHINAN	ZN30900A	MAX534	2024-10-27	2025-10-26
Breitband hornantenne	SCHWARZBECK	BBHA 9170	MAX579	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-02	MAX574	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-03	MAX576	2024-10-27	2025-10-26
PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	MAX578	2024-10-27	2025-10-26
Antenna tower	SKET	BK-4AT	MAX589	2024-10-27	2025-10-26

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	MAX566	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	MAX552	2024-10-27	2025-10-26
Spectrum Analyzer	Agilent	E4440A	MAX533	2024-10-27	2025-10-26
MXG vector Signal Generator	Agilent	N5182A	MAX567	2024-10-27	2025-10-26
ESG Analog Signal Generator	Agilent	E4428C	MAX568	2024-10-27	2025-10-26
USB RF Power Sensor	DARE	RPR3006W	MAX569	2024-10-27	2025-10-26
RF Switch Box	Shongyi	RFSW3003328	MAX571	2024-10-27	2025-10-26
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	MAX572	2024-10-27	2025-10-26

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

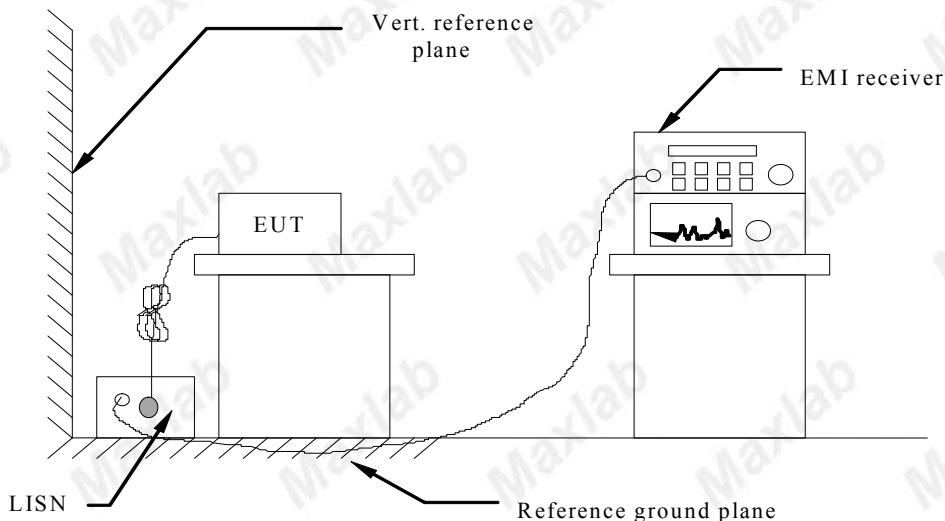

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit


For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Power supply:	AC 120V/60Hz	Polarization	L
Built-in power supply:	A-150FGZ-24	Test Mode:	TX(5.2G)

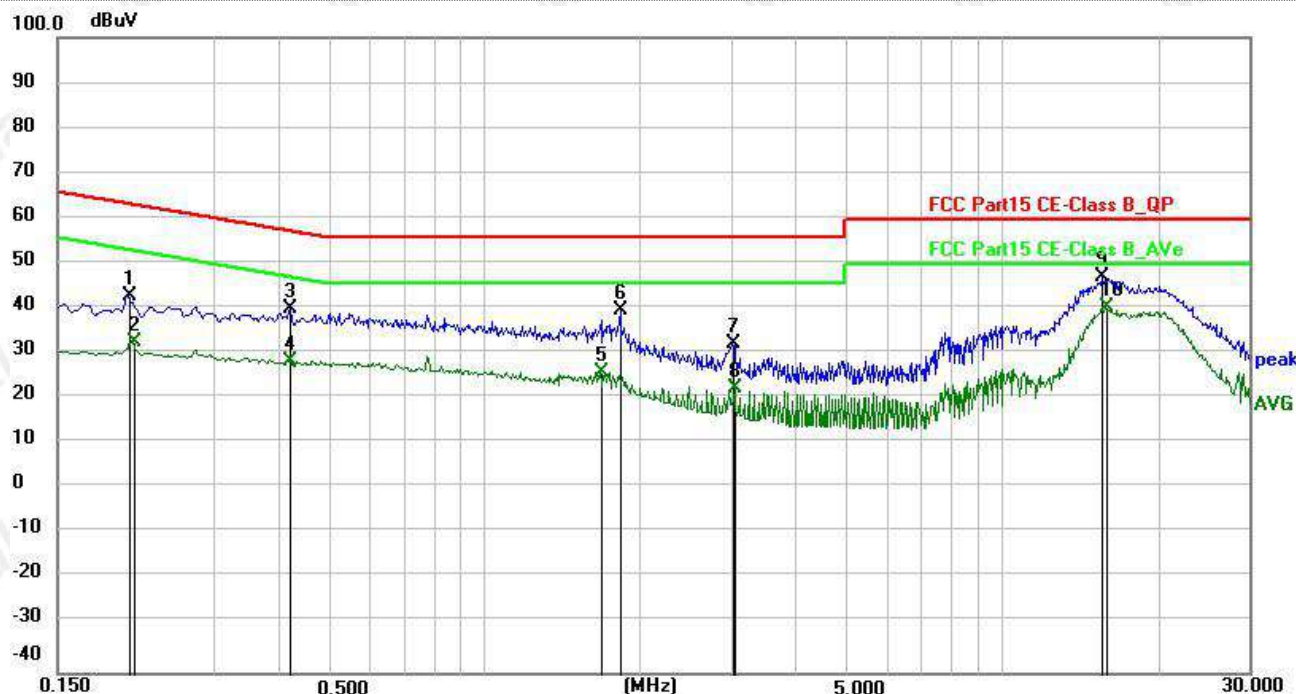


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2040	26.36	16.72	43.08	63.45	-20.37	QP	P
2	0.2085	16.15	16.72	32.87	53.26	-20.39	AVG	P
3	0.4200	23.61	16.69	40.30	57.45	-17.15	QP	P
4	0.4200	12.20	16.69	28.89	47.45	-18.56	AVG	P
5	1.6755	9.96	16.53	26.49	46.00	-19.51	AVG	P
6	1.8375	23.47	16.51	39.98	56.00	-16.02	QP	P
7	3.0210	16.22	16.34	32.56	56.00	-23.44	QP	P
8	3.0435	6.36	16.33	22.69	46.00	-23.31	AVG	P
9	15.5580	28.45	18.77	47.22	60.00	-12.78	QP	P
10 *	15.8370	21.87	18.85	40.72	50.00	-9.28	AVG	P

Note:1).Level (dBuV)= Reading (dBuV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)

Power supply:	AC 120V/60Hz	Polarization	N
Built-in power supply:	A-150FGZ-24	Test Mode:	TX(5.2G)

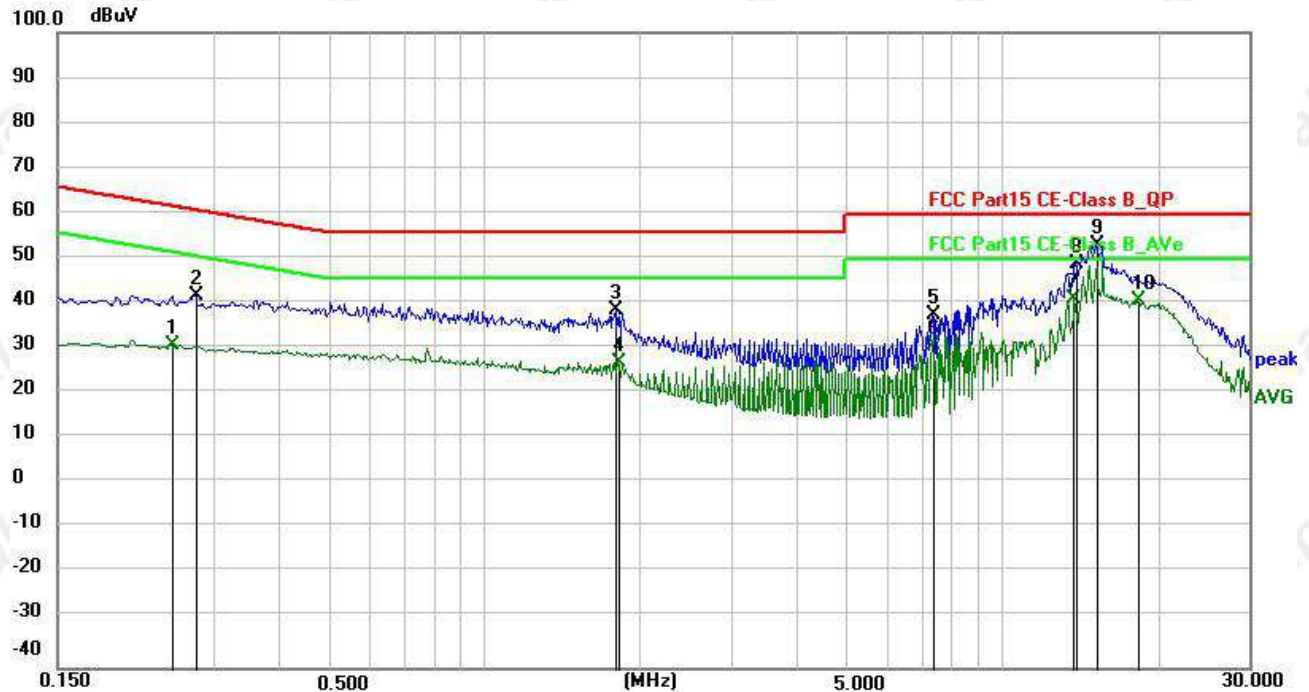


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2490	13.66	17.53	31.19	51.79	-20.60	AVG	P
2	0.2760	24.62	17.52	42.14	60.94	-18.80	QP	P
3	1.7970	21.30	17.48	38.78	56.00	-17.22	QP	P
4	1.8150	9.95	17.48	27.43	46.00	-18.57	AVG	P
5	7.3320	19.99	17.75	37.74	60.00	-22.26	QP	P
6	7.3320	13.48	17.75	31.23	50.00	-18.77	AVG	P
7	13.8390	22.83	18.72	41.55	50.00	-8.45	AVG	P
8	13.9020	30.41	18.73	49.14	60.00	-10.86	QP	P
9 *	15.2205	34.28	18.93	53.21	60.00	-6.79	QP	P
10	18.2580	21.79	19.16	40.95	50.00	-9.05	AVG	P

Note: 1). Level (dBuV) = Reading (dBuV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). Margin (dB) = Limit (dBuV) - Level (dBuV)

Power supply:	AC 120V/60Hz	Polarization	L
Built-in power supply:	A-150FGZ-24	Test Mode:	TX(5.8G)

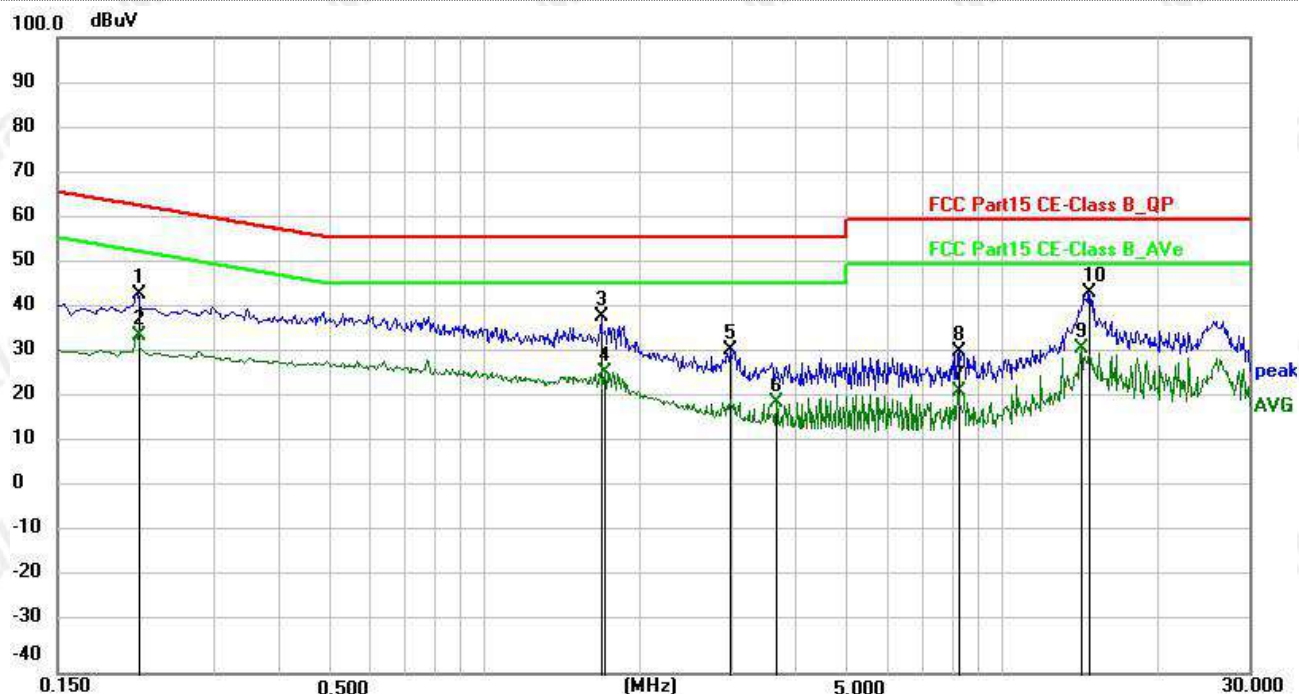


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2130	26.76	16.72	43.48	63.09	-19.61	QP	P
2	0.2130	17.54	16.72	34.26	53.09	-18.83	AVG	P
3	1.6845	21.99	16.53	38.52	56.00	-17.48	QP	P
4	1.7115	9.67	16.53	26.20	46.00	-19.80	AVG	P
5	2.9895	15.05	16.34	31.39	56.00	-24.61	QP	P
6	3.6735	3.58	16.26	19.84	46.00	-26.16	AVG	P
7	8.2005	5.38	16.77	22.15	50.00	-27.85	AVG	P
8	8.2680	14.14	16.78	30.92	60.00	-29.08	QP	P
9	14.2575	13.25	18.40	31.65	50.00	-18.35	AVG	P
10 *	14.7075	25.15	18.52	43.67	60.00	-16.33	QP	P

Note:1).Level (dBuV)= Reading (dBuV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)

Power supply:	AC 120V/60Hz	Polarization	N
Built-in power supply:	A-150FGZ-24	Test Mode:	TX(5.8G)

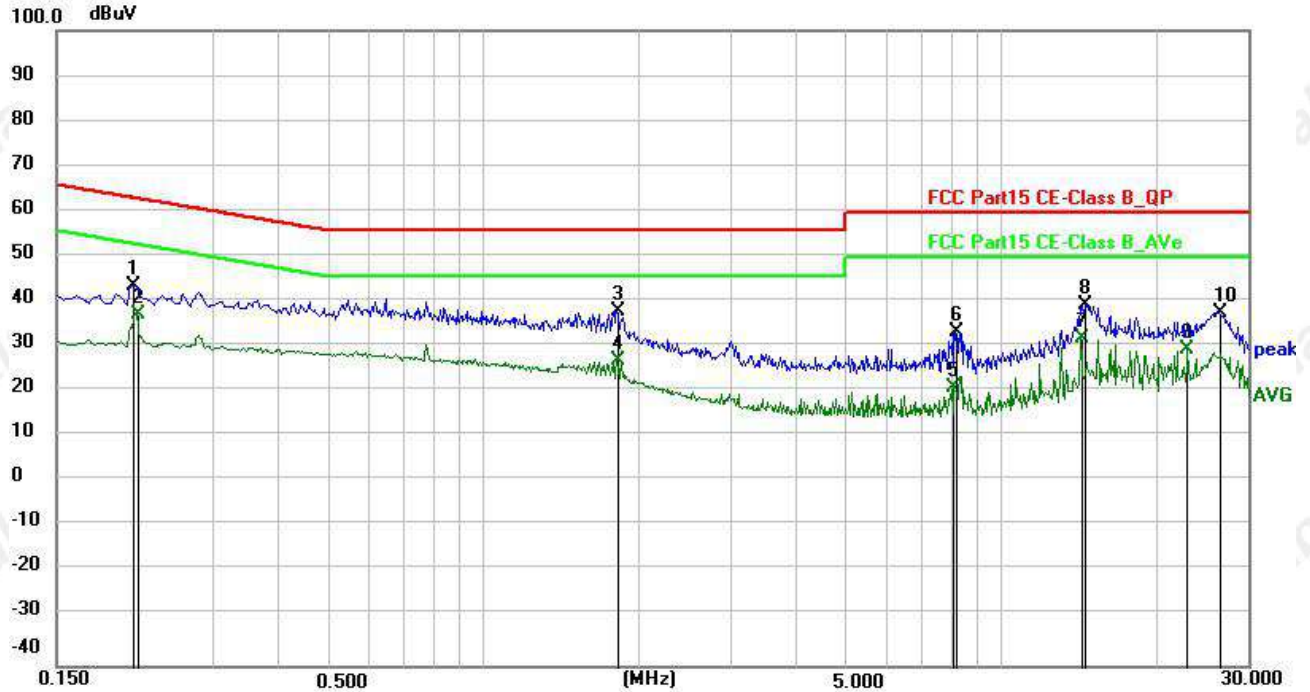


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector	P/F
1	0.2085	26.42	17.53	43.95	63.26	-19.31	QP	P
2 *	0.2130	20.06	17.53	37.59	53.09	-15.50	AVG	P
3	1.8150	20.64	17.48	38.12	56.00	-17.88	QP	P
4	1.8150	9.90	17.48	27.38	46.00	-18.62	AVG	P
5	8.1240	3.72	17.87	21.59	50.00	-28.41	AVG	P
6	8.1915	15.79	17.88	33.67	60.00	-26.33	QP	P
7	14.2485	13.41	18.79	32.20	50.00	-17.80	AVG	P
8	14.5410	20.82	18.83	39.65	60.00	-20.35	QP	P
9	22.8974	10.85	19.08	29.93	50.00	-20.07	AVG	P
10	26.3940	19.03	19.01	38.04	60.00	-21.96	QP	P

Note:1).Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:	AC 120V/60Hz	Polarization	L
Built-in power supply:	AM150-B24	Test Mode:	TX(5.2G)

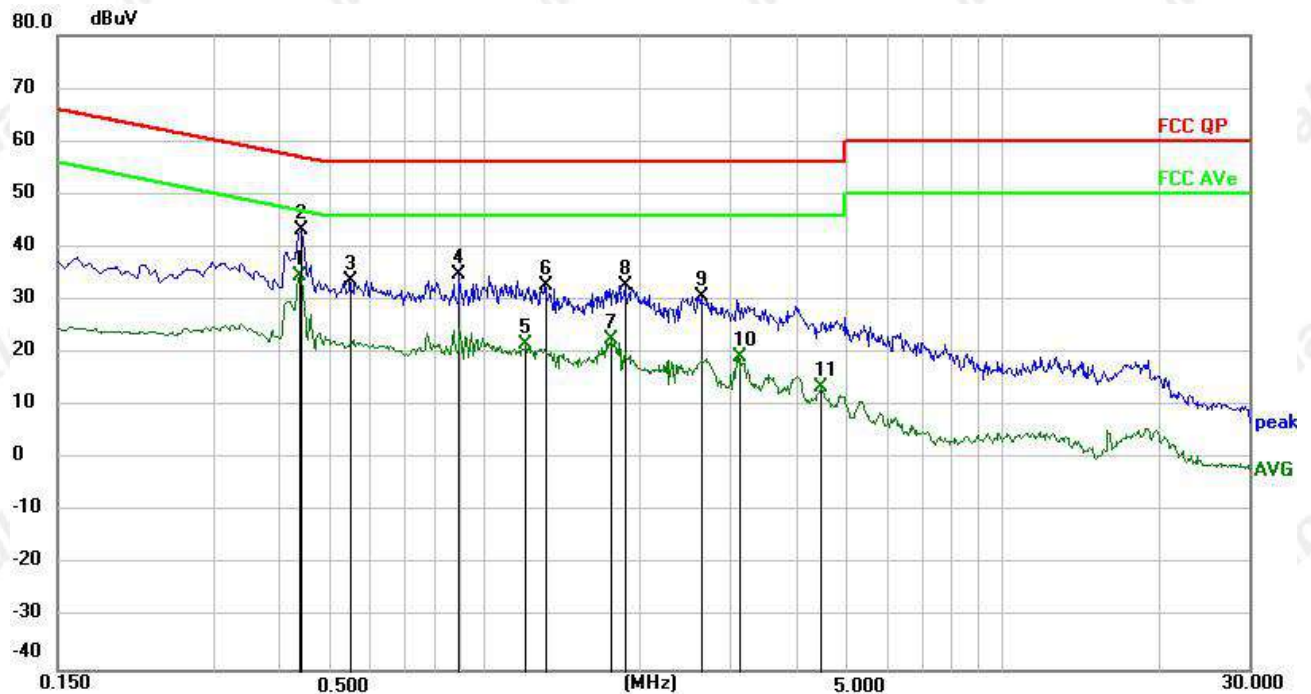


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1 *	0.4380	24.64	10.03	34.67	47.10	-12.43	AVG	P
2	0.4425	33.35	10.03	43.38	57.01	-13.63	QP	P
3	0.5505	23.74	10.03	33.77	56.00	-22.23	QP	P
4	0.8970	24.78	10.04	34.82	56.00	-21.18	QP	P
5	1.2075	11.69	10.04	21.73	46.00	-24.27	AVG	P
6	1.3110	22.74	10.04	32.78	56.00	-23.22	QP	P
7	1.7700	12.63	10.05	22.68	46.00	-23.32	AVG	P
8	1.8690	22.81	10.05	32.86	56.00	-23.14	QP	P
9	2.6295	20.74	10.05	30.79	56.00	-25.21	QP	P
10	3.1020	9.15	10.05	19.20	46.00	-26.80	AVG	P
11	4.4610	3.42	10.08	13.50	46.00	-32.50	AVG	P

Note:1).Level (dBuV)= Reading (dBuV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)


Power supply:	AC 120V/60Hz	Polarization	N
Built-in power supply:	AM150-B24	Test Mode:	TX(5.2G)

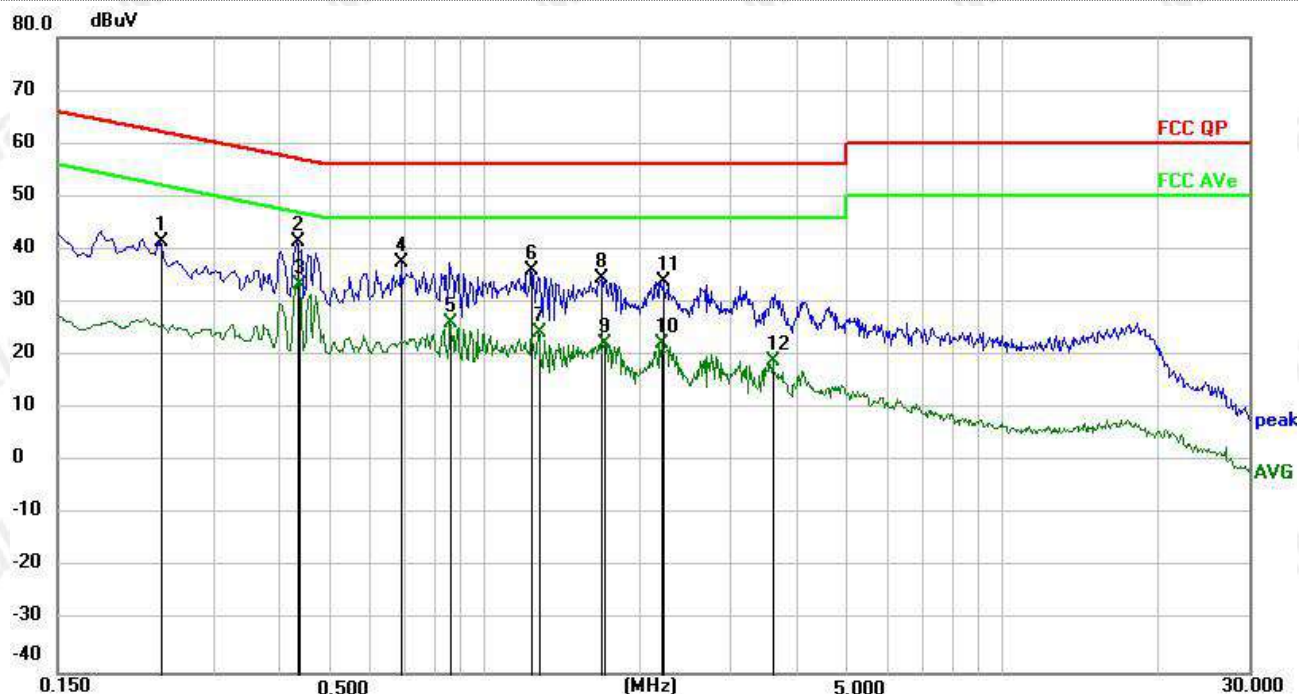

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2355	31.57	10.00	41.57	62.25	-20.68	QP	P
2	0.4335	31.52	10.00	41.52	57.19	-15.67	QP	P
3 *	0.4380	23.44	10.00	33.44	47.10	-13.66	AVG	P
4	0.6900	27.46	10.00	37.46	56.00	-18.54	QP	P
5	0.8610	16.19	10.01	26.20	46.00	-19.80	AVG	P
6	1.2345	25.98	10.01	35.99	56.00	-20.01	QP	P
7	1.2705	14.29	10.01	24.30	46.00	-21.70	AVG	P
8	1.6845	24.46	10.02	34.48	56.00	-21.52	QP	P
9	1.7115	12.14	10.02	22.16	46.00	-23.84	AVG	P
10	2.2065	12.28	10.02	22.30	46.00	-23.70	AVG	P
11	2.2244	24.06	10.02	34.08	56.00	-21.92	QP	P
12	3.6105	8.80	10.03	18.83	46.00	-27.17	AVG	P

Note: 1). Level (dBuV) = Reading (dBuV) + Factor (dB)
 2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)
 3). Margin (dB) = Limit (dBuV) - Level (dBuV)

Power supply:	AC 120V/60Hz	Polarization	L
Built-in power supply:	AM150-B24	Test Mode:	TX(5.8G)

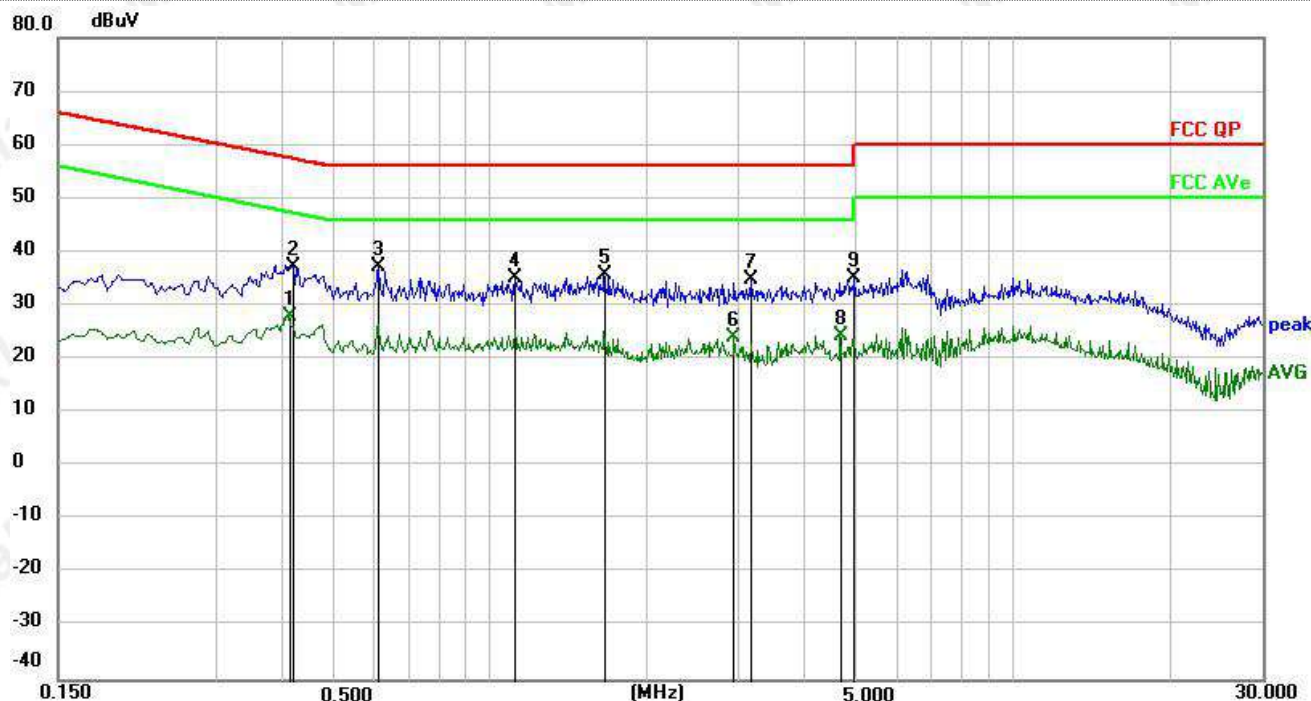


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector	P/F
1	0.4110	17.86	10.03	27.89	47.63	-19.74	AVG	P
2	0.4200	27.22	10.03	37.25	57.45	-20.20	QP	P
3 *	0.6134	27.31	10.03	37.34	56.00	-18.66	QP	P
4	1.1220	25.23	10.04	35.27	56.00	-20.73	QP	P
5	1.6620	25.64	10.05	35.69	56.00	-20.31	QP	P
6	2.9400	14.03	10.05	24.08	46.00	-21.92	AVG	P
7	3.1695	24.73	10.05	34.78	56.00	-21.22	QP	P
8	4.6860	14.33	10.08	24.41	46.00	-21.59	AVG	P
9	4.9785	25.09	10.09	35.18	56.00	-20.82	QP	P

Note:1).Level (dBμV)= Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:	AC 120V/60Hz	Polarization	N
Built-in power supply:	AM150-B24	Test Mode:	TX(5.8G)

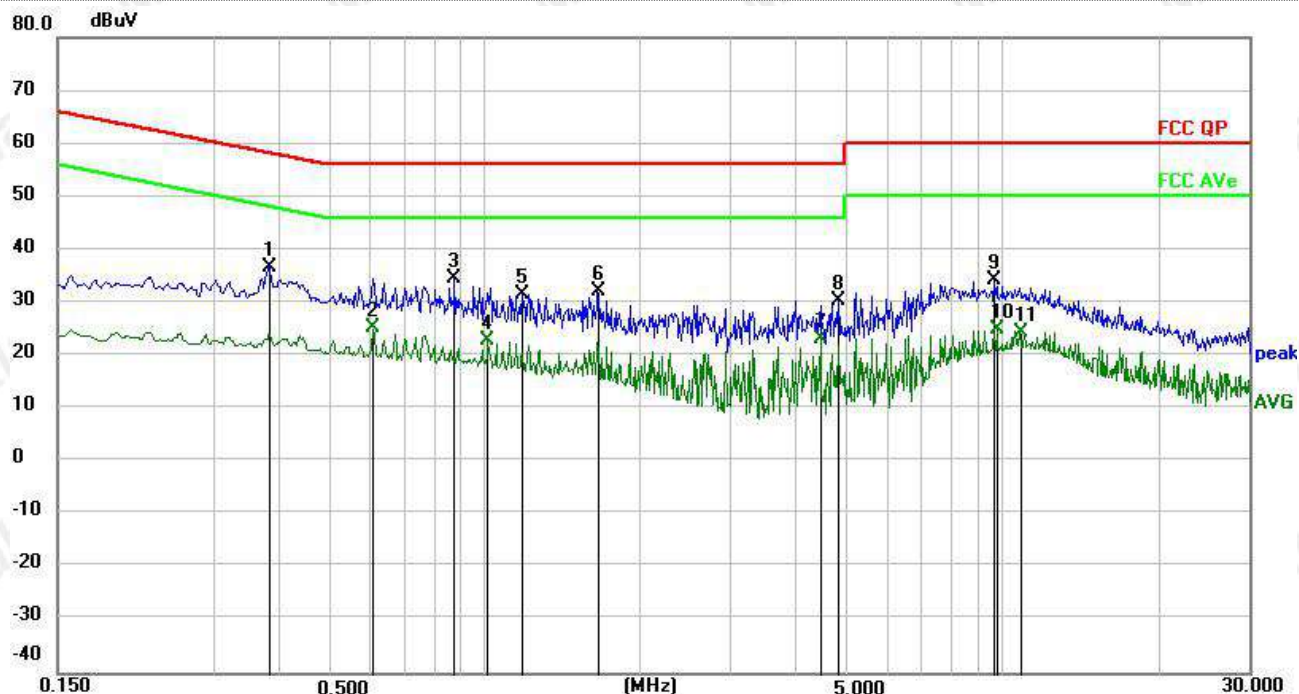

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Detector	P/F
1	0.3840	26.67	10.00	36.67	58.19	-21.52	QP	P
2 *	0.6090	15.10	10.00	25.10	46.00	-20.90	AVG	P
3	0.8790	24.64	10.01	34.65	56.00	-21.35	QP	P
4	1.0184	12.79	10.01	22.80	46.00	-23.20	AVG	P
5	1.1849	21.69	10.01	31.70	56.00	-24.30	QP	P
6	1.6620	22.05	10.02	32.07	56.00	-23.93	QP	P
7	4.4565	12.96	10.05	23.01	46.00	-22.99	AVG	P
8	4.8390	20.22	10.06	30.28	56.00	-25.72	QP	P
9	9.6765	24.01	10.10	34.11	60.00	-25.89	QP	P
10	9.8025	14.85	10.10	24.95	50.00	-25.05	AVG	P
11	10.8195	14.38	10.10	24.48	50.00	-25.52	AVG	P

Note: 1). Level (dBμV) = Reading (dBμV) + Factor (dB)
 2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)
 3). Margin (dB) = Limit (dBμV) - Level (dBμV)

4.2 Radiated Emission

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

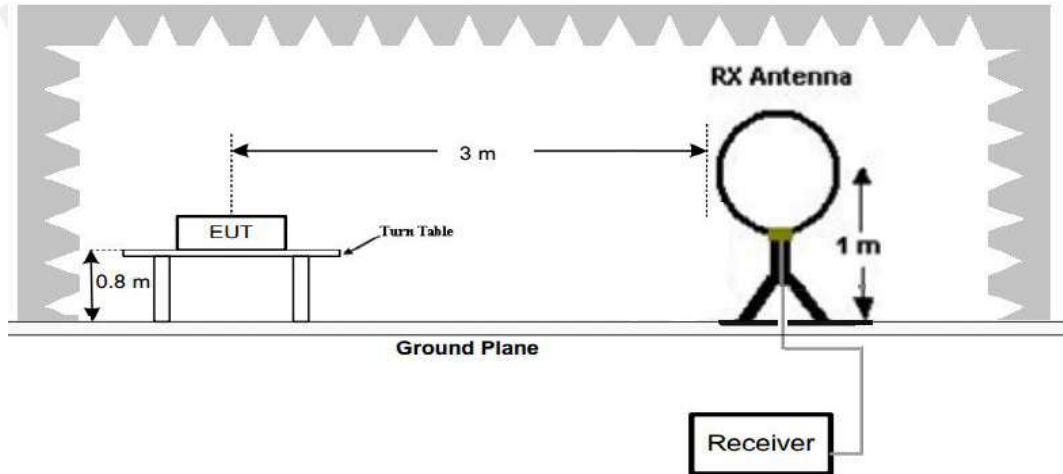

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

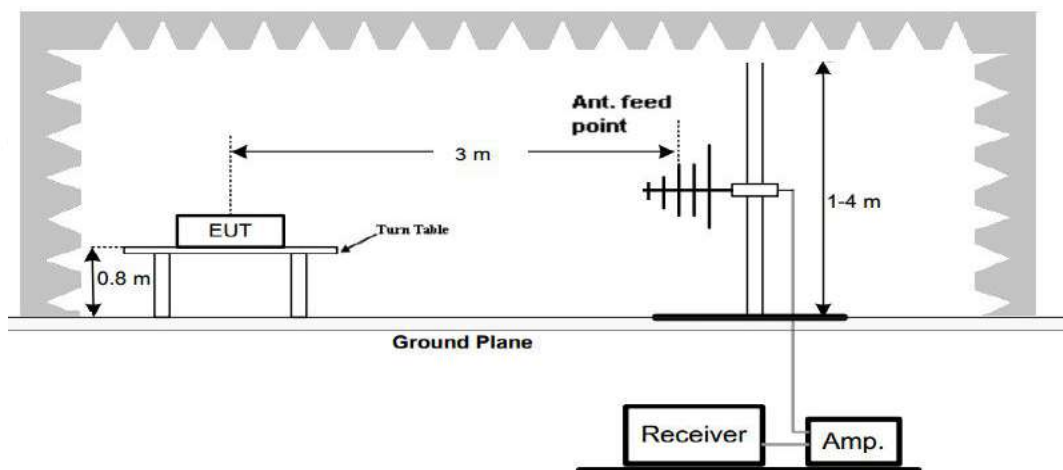

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

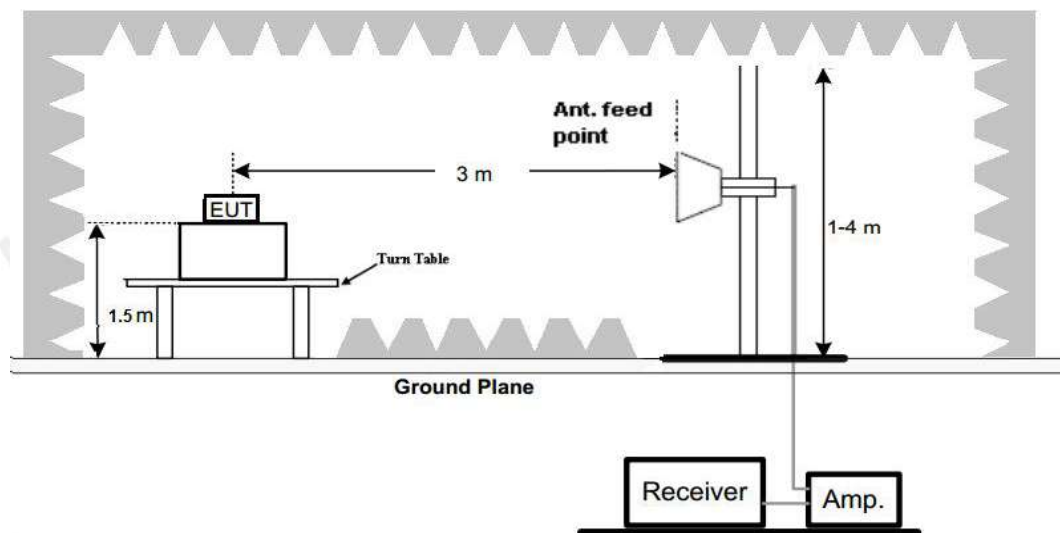

TEST PROCEDURE

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

For 30MHz-1GHz

Temperature:	25℃	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.2G)		
Built-in power supply:	A-150FGZ-24		

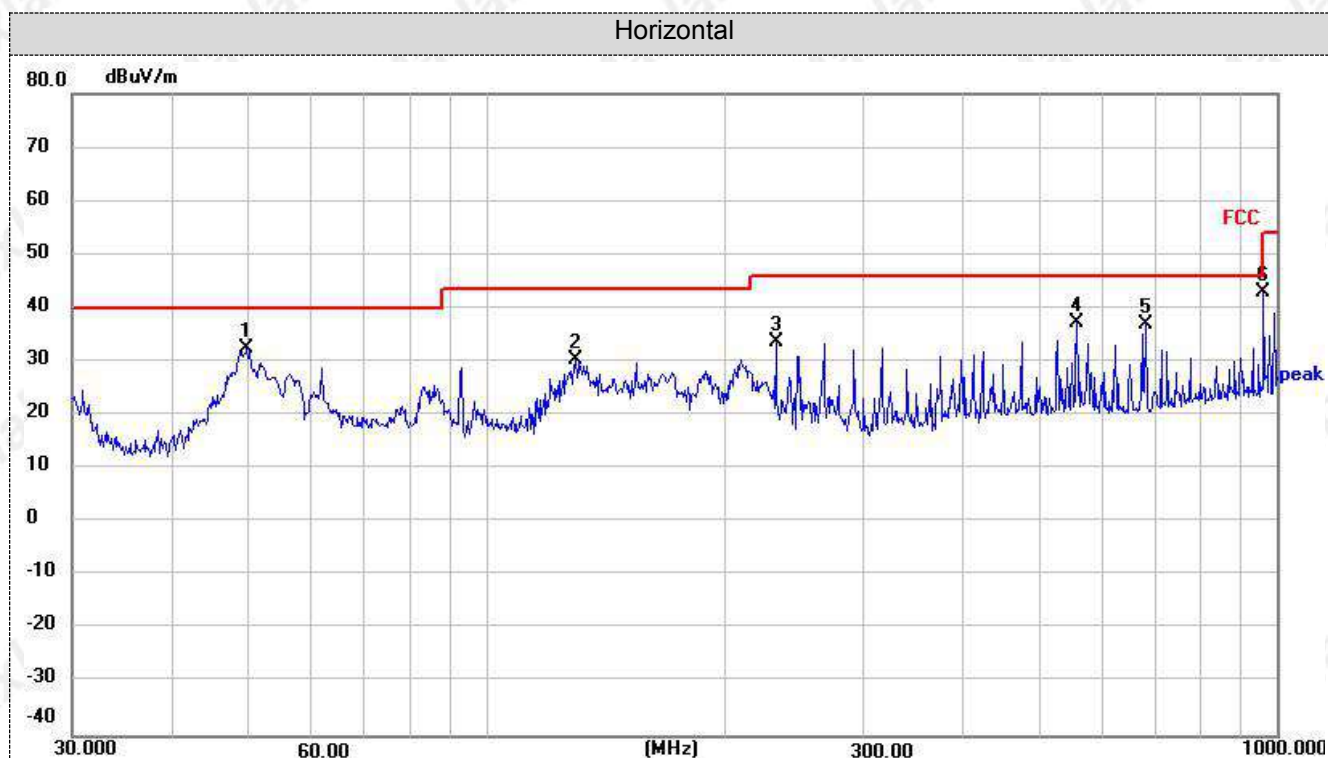


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1 *	49.8813	48.95	-16.39	32.56	40.00	-7.44	peak	100	360	P
2	129.9225	47.51	-17.21	30.30	43.50	-13.20	peak	100	360	P
3	232.5318	51.87	-18.35	33.52	46.00	-12.48	peak	100	360	P
4	558.7300	46.19	-9.05	37.14	46.00	-8.86	peak	100	360	P
5	682.3482	43.52	-6.69	36.83	46.00	-9.17	peak	100	360	P
6	962.1621	46.13	-3.07	43.06	54.00	-10.94	peak	100	360	P

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

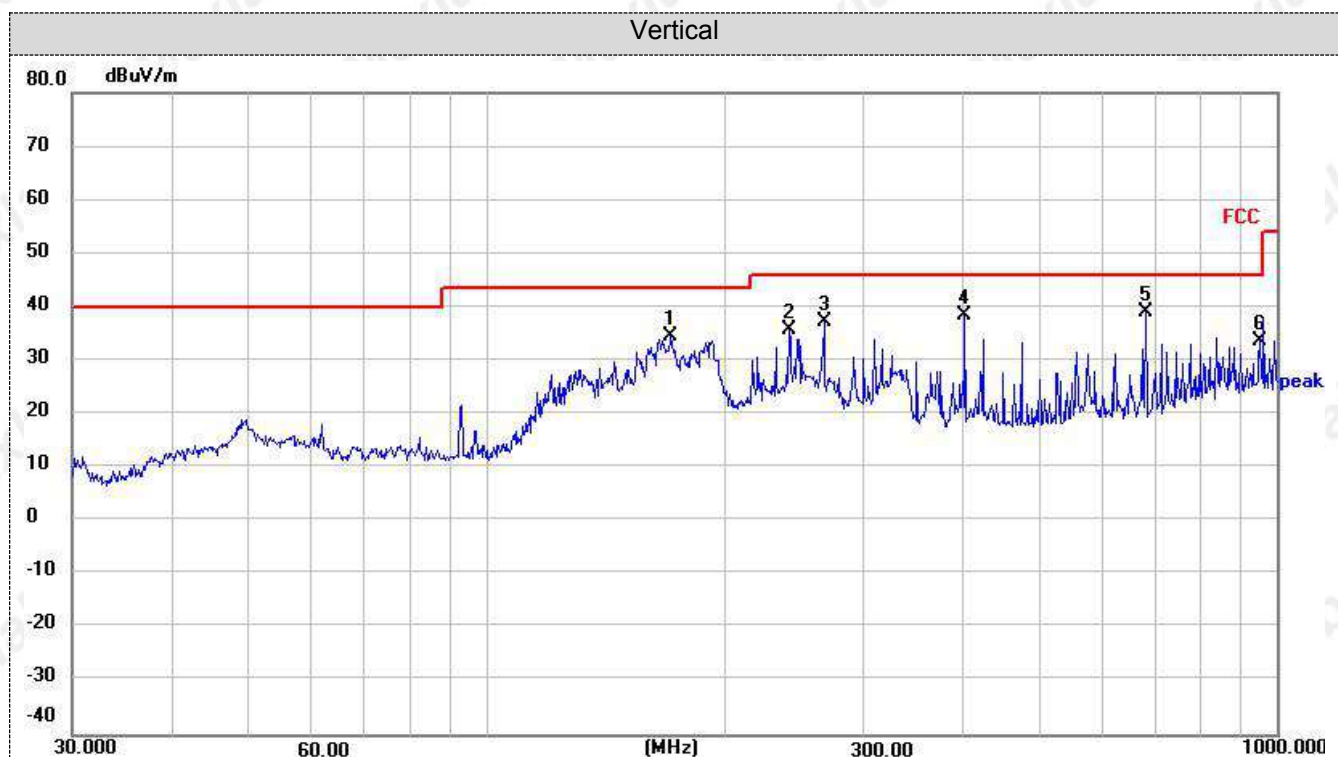


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	171.3925	50.82	-16.41	34.41	43.50	-9.09	peak	100	360	P
2	241.6759	53.41	-17.69	35.72	46.00	-10.28	peak	100	360	P
3	267.5452	53.82	-16.66	37.16	46.00	-8.84	peak	100	360	P
4	403.2500	51.40	-13.02	38.38	46.00	-7.62	peak	100	360	P
5 *	682.3482	45.67	-6.69	38.98	46.00	-7.02	peak	100	360	P
6	952.0937	36.75	-3.03	33.72	46.00	-12.28	peak	100	360	P

Note: 1). Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

Temperature:	25°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.8G)		
Built-in power supply:	A-150FGZ-24		

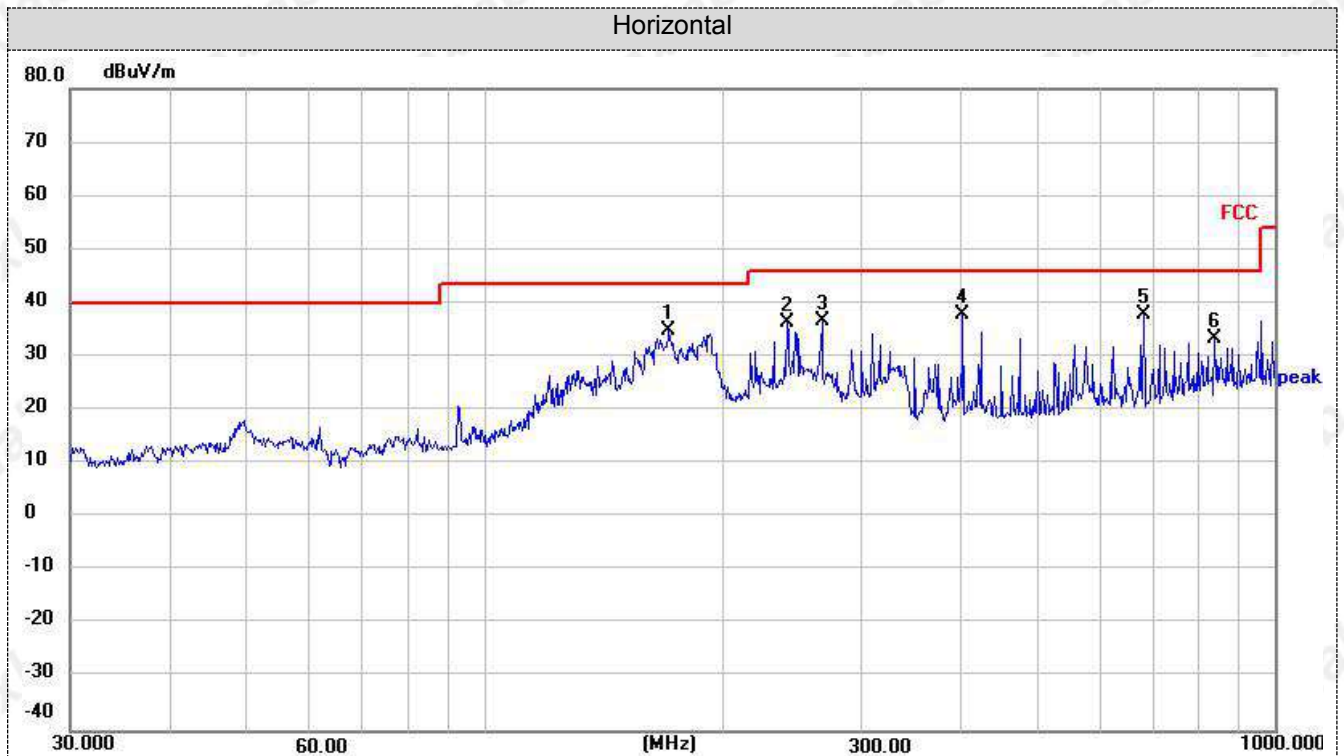


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	171.3925	51.32	-16.41	34.91	43.50	-8.59	peak	100	360	P
2	241.6759	53.91	-17.69	36.22	46.00	-9.78	peak	100	360	P
3	267.5452	53.32	-16.66	36.66	46.00	-9.34	peak	100	360	P
4	403.2500	50.90	-13.02	37.88	46.00	-8.12	peak	100	360	P
5 *	682.3482	44.67	-6.69	37.98	46.00	-8.02	peak	100	360	P
6	839.1816	37.58	-4.29	33.29	46.00	-12.71	peak	100	360	P

Note: 1). Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

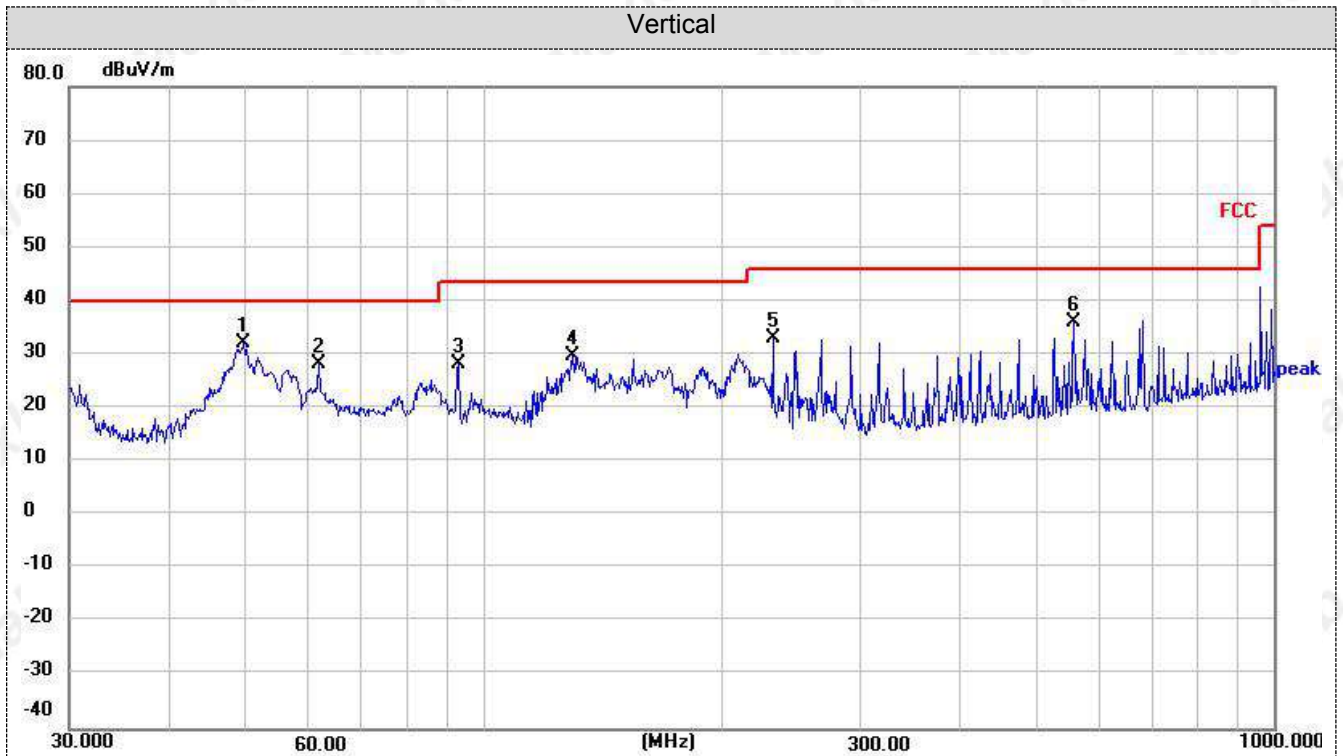


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1 *	49.8813	48.45	-16.39	32.06	40.00	-7.94	peak	100	360	P
2	61.9949	45.55	-17.35	28.20	40.00	-11.80	peak	100	360	P
3	93.1131	48.74	-20.41	28.33	43.50	-15.17	peak	100	360	P
4	129.9225	47.01	-17.21	29.80	43.50	-13.70	peak	100	360	P
5	232.5318	51.37	-18.35	33.02	46.00	-12.98	peak	100	360	P
6	558.7300	45.19	-9.05	36.14	46.00	-9.86	peak	100	360	P

Note: 1). Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

Temperature:	25°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.2G)		
Built-in power supply:	A-150FGZ-24		

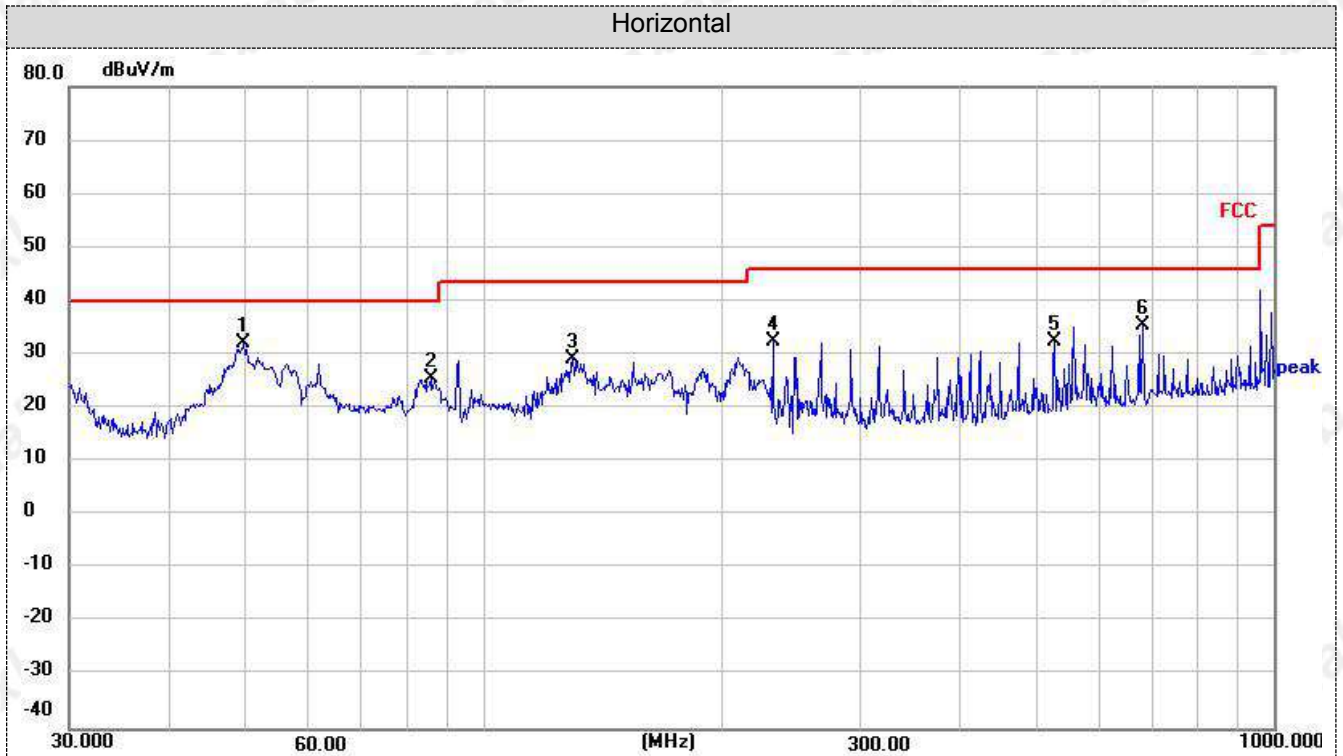


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1 *	49.8813	48.45	-16.39	32.06	40.00	-7.94	peak	100	360	P
2	85.8983	46.29	-20.64	25.65	40.00	-14.35	peak	100	360	P
3	129.9225	46.51	-17.21	29.30	43.50	-14.20	peak	100	360	P
4	232.5318	50.87	-18.35	32.52	46.00	-13.48	peak	100	360	P
5	528.2458	42.40	-9.91	32.49	46.00	-13.51	peak	100	360	P
6	682.3482	42.02	-6.69	35.33	46.00	-10.67	peak	100	360	P

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

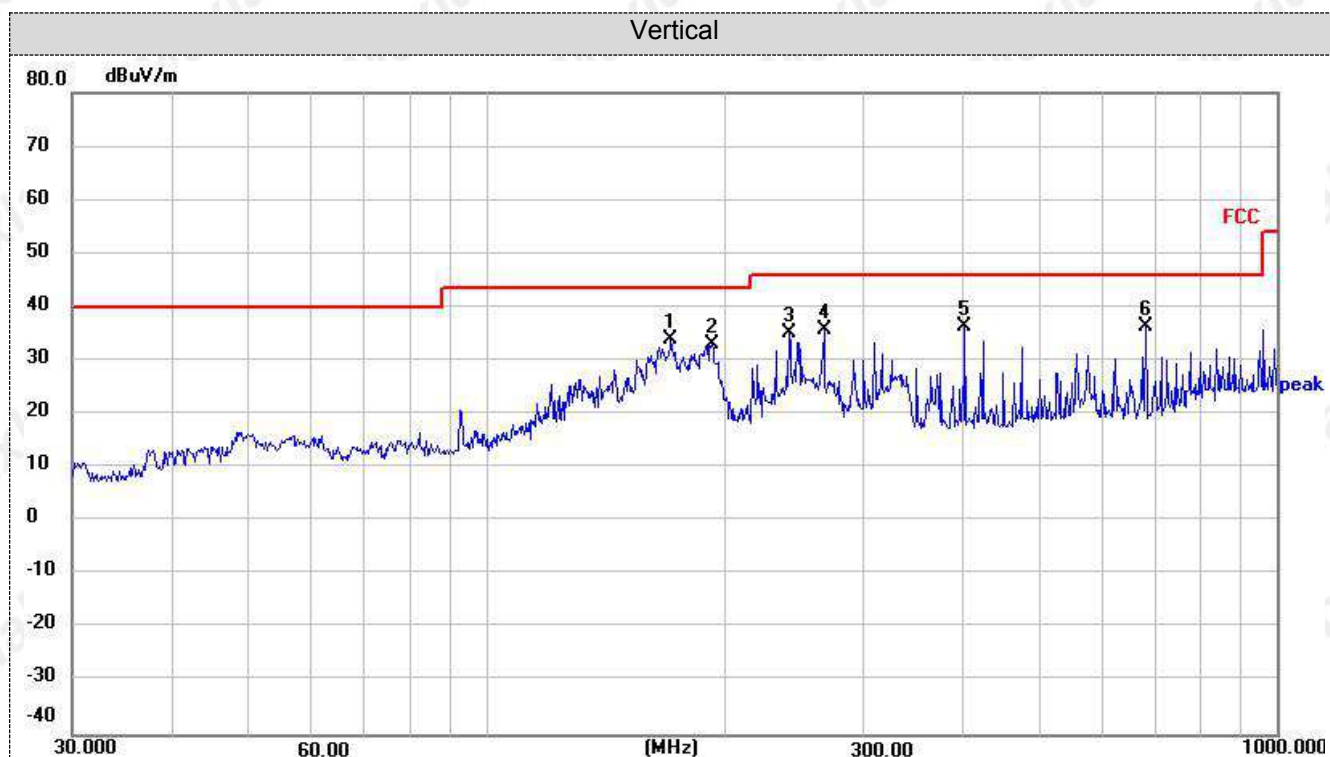


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	171.3925	50.32	-16.41	33.91	43.50	-9.59	peak	100	360	P
2	193.0944	52.13	-18.94	33.19	43.50	-10.31	peak	100	360	P
3	241.6759	52.91	-17.69	35.22	46.00	-10.78	peak	100	360	P
4	267.5452	52.32	-16.66	35.66	46.00	-10.34	peak	100	360	P
5	403.2500	49.40	-13.02	36.38	46.00	-9.62	peak	100	360	P
6 *	682.3482	43.17	-6.69	36.48	46.00	-9.52	peak	100	360	P

Note: 1). Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

Temperature:	25℃	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.8G)		
Built-in power supply:	A-150FGZ-24		

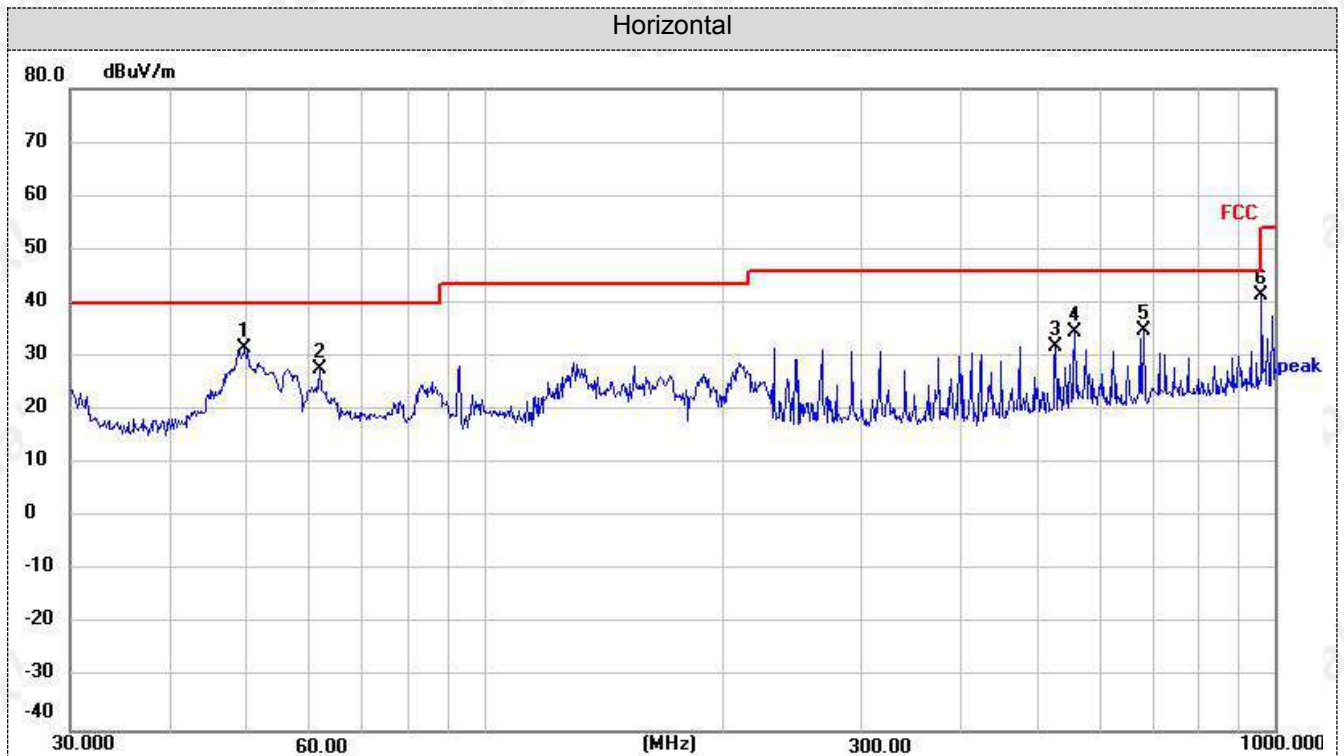


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1 *	49.8813	47.95	-16.39	31.56	40.00	-8.44	peak	100	360	P
2	61.9949	45.05	-17.35	27.70	40.00	-12.30	peak	100	360	P
3	528.2458	41.90	-9.91	31.99	46.00	-14.01	peak	100	360	P
4	558.7300	43.69	-9.05	34.64	46.00	-11.36	peak	100	360	P
5	682.3482	41.52	-6.69	34.83	46.00	-11.17	peak	100	360	P
6	962.1621	44.63	-3.07	41.56	54.00	-12.44	peak	100	360	P

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

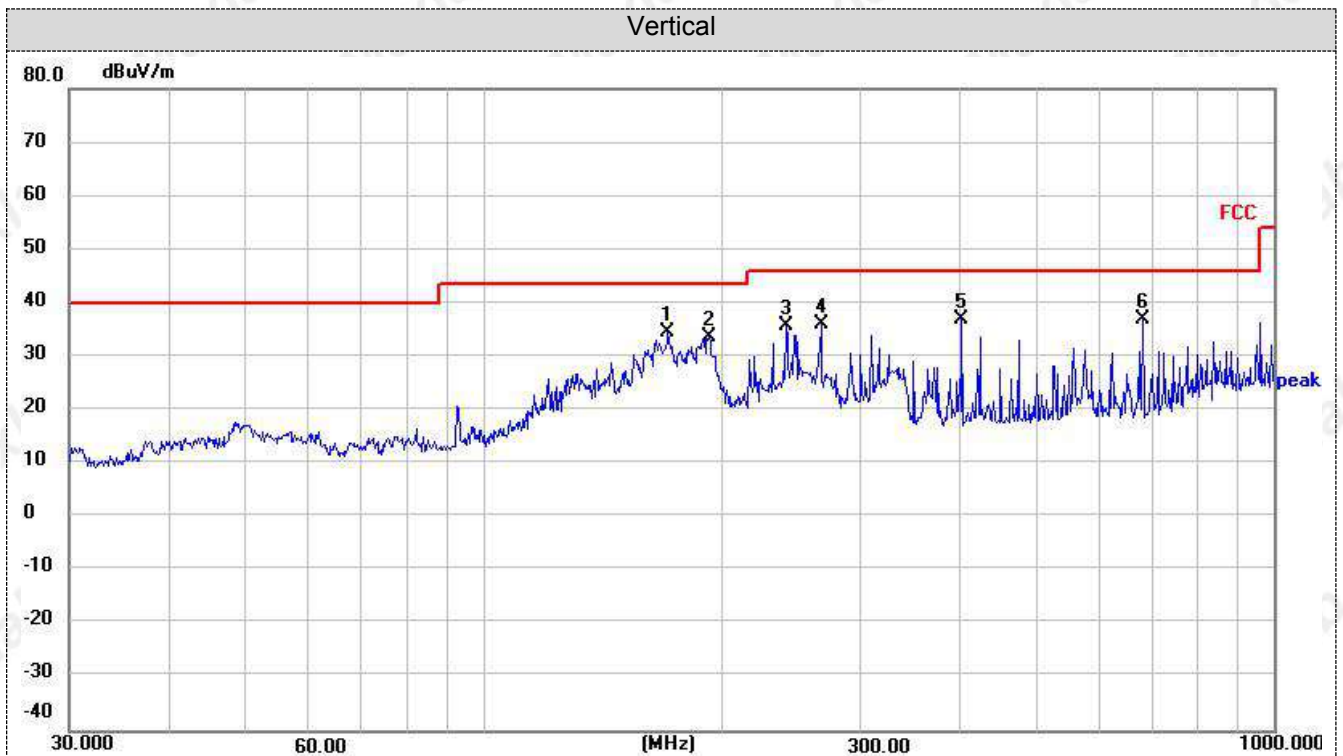


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	171.3925	50.82	-16.41	34.41	43.50	-9.09	peak	100	360	P
2	193.0944	52.63	-18.94	33.69	43.50	-9.81	peak	100	360	P
3	241.6759	53.41	-17.69	35.72	46.00	-10.28	peak	100	360	P
4	267.5452	52.82	-16.66	36.16	46.00	-9.84	peak	100	360	P
5	403.2500	49.90	-13.02	36.88	46.00	-9.12	peak	100	360	P
6 *	682.3482	43.67	-6.69	36.98	46.00	-9.02	peak	100	360	P

Note: 1). Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

Temperature:	25°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.2G)		
Built-in power supply:	AM150-B24		

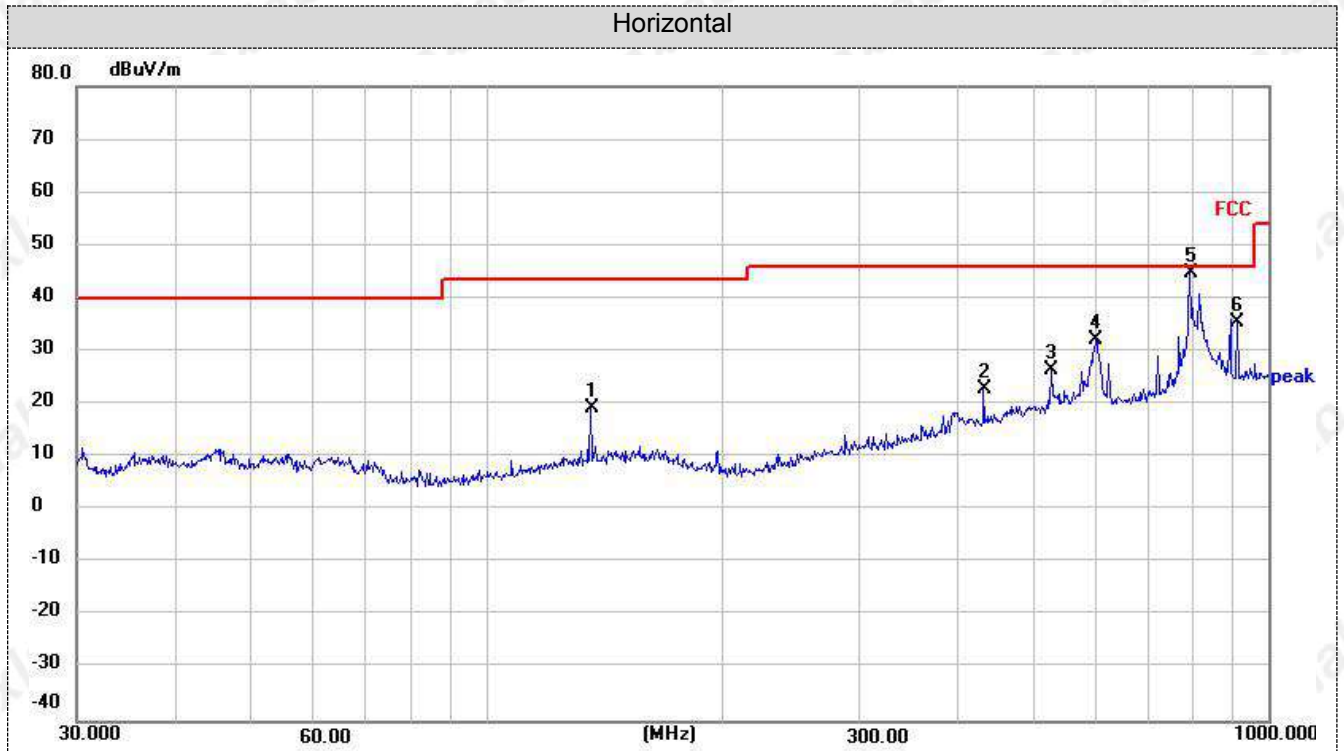


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	135.9822	36.22	-16.94	19.28	43.50	-24.22	peak	100	360	P
2	432.5457	35.02	-12.16	22.86	46.00	-23.14	peak	100	360	P
3	528.2458	36.26	-9.91	26.35	46.00	-19.65	peak	100	360	P
4	601.4265	39.89	-7.83	32.06	46.00	-13.94	peak	100	360	P
5 *	793.3960	49.45	-4.69	44.76	46.00	-1.24	peak	100	360	P
6	912.8620	38.98	-3.59	35.39	46.00	-10.61	peak	100	360	P

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

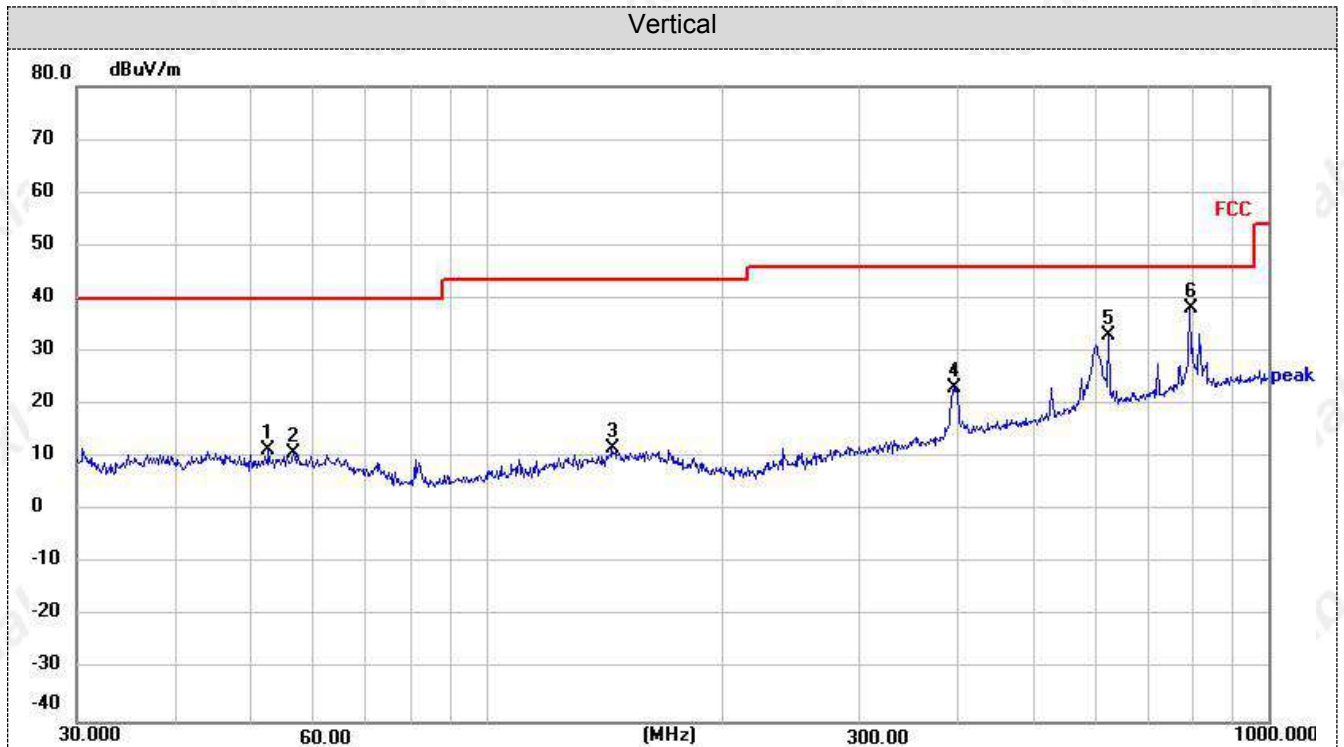


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	52.7600	28.08	-16.63	11.45	40.00	-28.55	peak	100	0	P
2	56.7917	27.64	-16.91	10.73	40.00	-29.27	peak	100	0	P
3	144.8418	28.15	-16.36	11.79	43.50	-31.71	peak	100	0	P
4	397.6334	36.25	-13.16	23.09	46.00	-22.91	peak	100	0	P
5	625.0780	40.60	-7.45	33.15	46.00	-12.85	peak	100	0	P
6 *	793.3960	42.70	-4.69	38.01	46.00	-7.99	peak	100	0	P

Note: 1). Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

Temperature:	25°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX(5.8G)		
Built-in power supply:	AM150-B24		

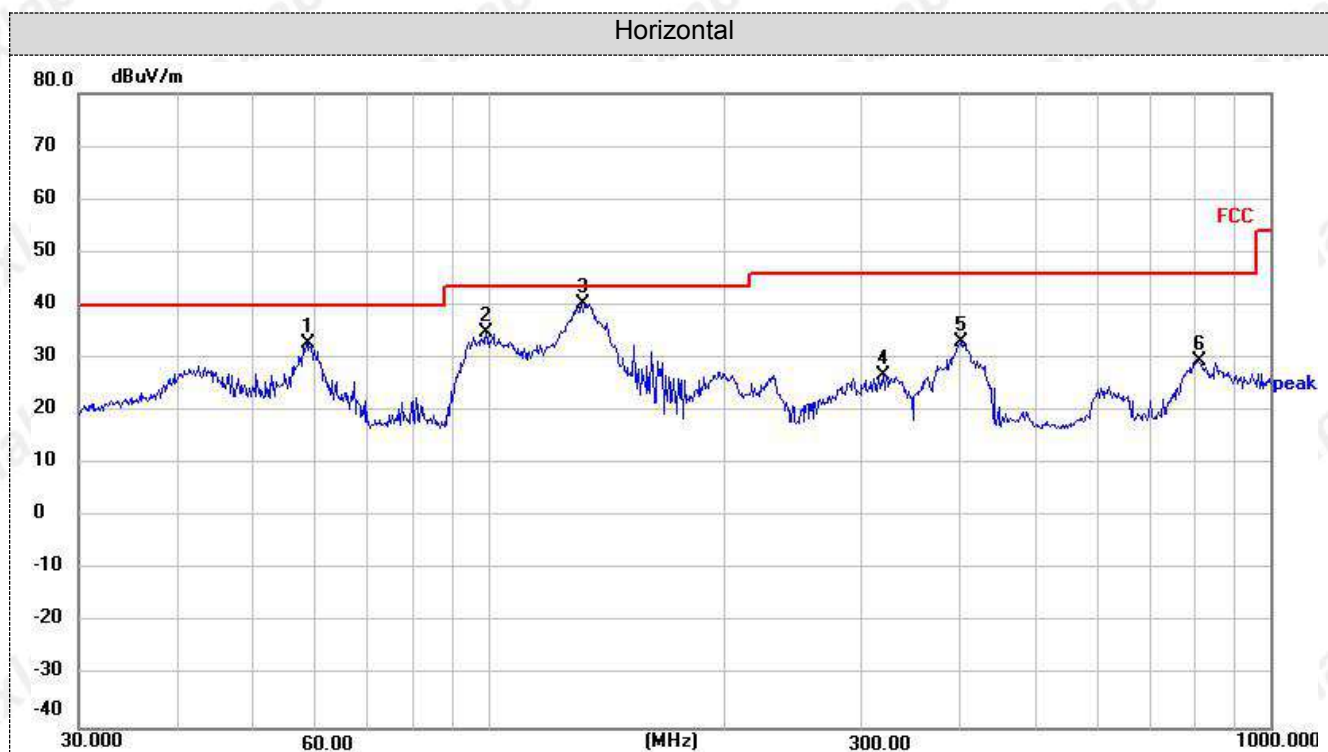


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	58.8185	49.82	-16.98	32.84	40.00	-7.16	peak
2	99.5279	54.62	-19.92	34.70	43.50	-8.80	peak
3 *	131.7576	57.43	-17.13	40.30	43.50	-3.20	peak
4	319.9368	41.87	-15.07	26.80	46.00	-19.20	peak
5	401.8383	46.15	-13.04	33.11	46.00	-12.89	peak
6	807.4289	34.00	-4.55	29.45	46.00	-16.55	peak

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBuV/m) - Level (dBuV/m)

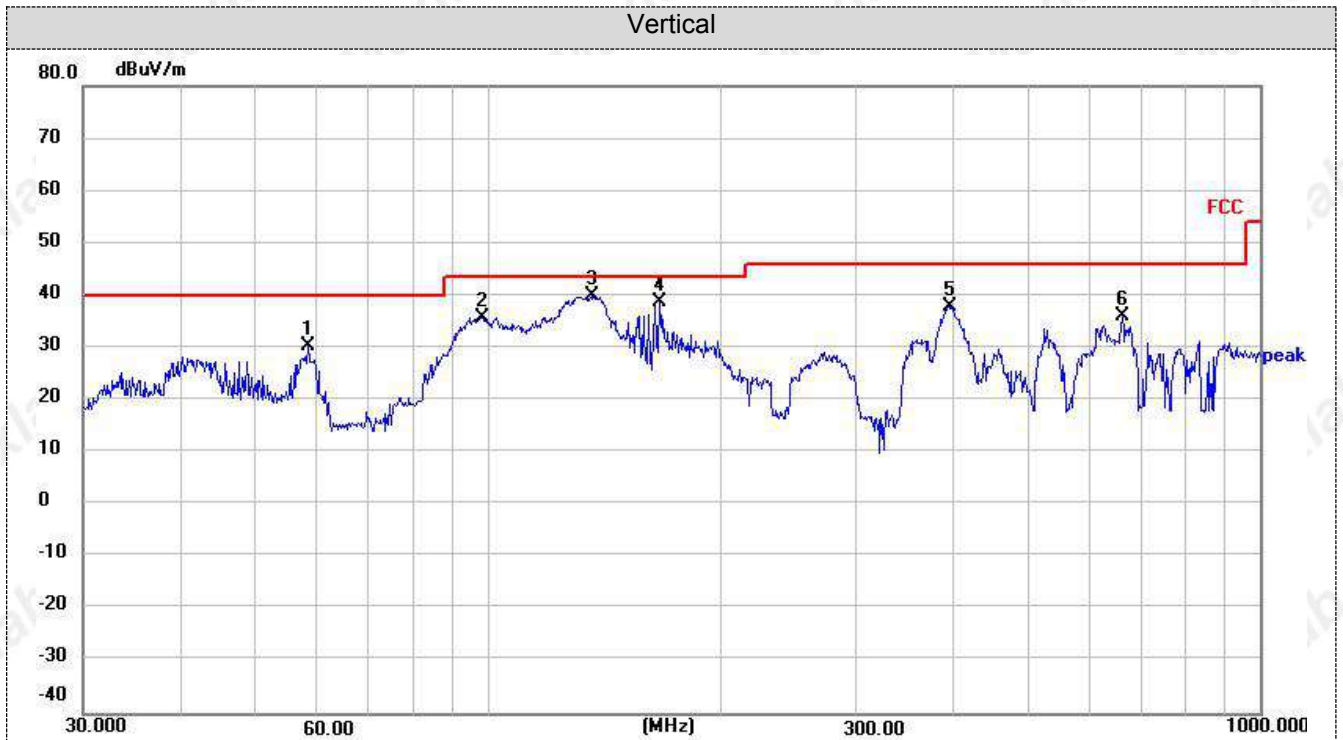

Note: 1). Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBuV/m) - Level (dBuV/m)

For 1GHz to 40GHz

Note: All 802.11a/n/ac (HT20), 802.11n/ac (HT40) and 802.11ac (HT80) modes have been tested for above 1GHz test, only the worst case 802.11a(HT20) was recorded.

U-NII 1 & 802.11a Mode (above 1GHz)

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
36 5158MHz	5150.00	53.24	PK	H	68.20	14.96	50.25	32.40	5.11	34.52	2.99
	5150.00	45.51	AV	H	54.00	8.49	42.52	32.40	5.11	34.52	2.99
	10360.00	39.72	PK	H	68.20	28.48	32.56	36.51	5.86	35.21	7.16
	--	--	--	--	--	--	--	--	--	--	--
40 5200MHz	10400.00	40.94	PK	H	68.20	27.26	33.65	36.58	5.96	35.25	7.29
	--	--	--	--	--	--	--	--	--	--	--
48 5240MHz	5350.50	39.56	PK	H	68.20	28.64	36.52	32.45	5.22	34.63	3.04
	10480.00	38.00	PK	H	68.20	30.20	30.65	36.68	6.21	35.54	7.35
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
36 5158MHz	5150.00	54.25	PK	V	68.20	13.95	51.26	32.40	5.11	34.52	2.99
	5150.00	43.35	AV	V	54.00	10.65	40.36	32.40	5.11	34.52	2.99
	10360.00	43.40	PK	V	68.20	24.80	36.24	36.51	5.86	35.21	7.16
	--	--	--	--	--	--	--	--	--	--	--
40 5200MHz	10400.00	39.85	PK	V	68.20	28.35	32.56	36.58	5.96	35.25	7.29
	--	--	--	--	--	--	--	--	--	--	--
48 5240MHz	5350.50	44.30	PK	V	68.20	23.90	41.26	32.45	5.22	34.63	3.04
	10480.00	43.77	PK	V	68.20	24.43	36.42	36.68	6.21	35.54	7.35
	--	--	--	--	--	--	--	--	--	--	--

U-NII 3 & 802.11a Mode (above 1GHz)

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
149 5745MHz	5720.00	56.06	PK	H	68.20	12.14	51.26	34.21	5.11	34.52	4.80
	5720.00	45.15	AV	H	54.00	8.85	40.35	34.21	5.11	34.52	4.80
	11490.00	44.42	PK	H	68.20	23.78	35.42	38.35	5.86	35.21	9.00
	--	--	--	--	--	--	--	--	--	--	--
157 5785MHz	11570.00	41.57	PK	H	68.20	26.63	32.25	38.61	5.96	35.25	9.32
	--	--	--	--	--	--	--	--	--	--	--
165 5825MHz	5855.00	42.78	PK	H	68.20	25.42	37.63	34.56	5.22	34.63	5.15
	11650.00	42.87	PK	H	68.20	25.33	33.42	38.78	6.21	35.54	9.45
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Limit (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
149 5745MHz	5720.00	55.67	PK	V	68.20	12.53	50.87	34.21	5.11	34.52	4.80
	5720.00	46.06	AV	V	54.00	7.94	41.26	34.21	5.11	34.52	4.80
	11490.00	43.63	PK	V	68.20	24.57	34.63	38.35	5.86	35.21	9.00
	--	--	--	--	--	--	--	--	--	--	--
157 5785MHz	11570.00	42.84	PK	V	68.20	25.36	33.52	38.61	5.96	35.25	9.32
	--	--	--	--	--	--	--	--	--	--	--
165 5825MHz	5855.00	48.41	PK	V	68.20	19.79	43.26	34.56	5.22	34.63	5.15
	11650.00	49.66	PK	V	68.20	18.54	40.21	38.78	6.21	35.54	9.45

	--	--	--	--	--	--	--	--	--	--	--
--	----	----	----	----	----	----	----	----	----	----	----

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 54Mbps at IEEE 802.11a; MCS7 at IEEE 802.11n(HT20); MCS7 at IEEE 802.11n(HT40); Ncc1 MCS8 at IEEE 802.11ac(HT20); MCS7 at IEEE 802.11ac(HT40); MCS9 at IEEE 802.11ac(HT80);

4.3 Maximum Peak Conducted Output Power

Limit

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

U-NII 1

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	8.756	23.98	Pass
	40	8.651		
	48	8.562		
802.11n(HT20)	36	7.562	23.98	Pass
	40	7.234		
	48	7.124		
802.11n(HT40)	38	5.245	23.98	Pass
	46	5.324		
802.11ac(HT20)	36	6.241	23.98	Pass
	40	6.451		
	48	6.345		
802.11ac(HT40)	38	4.652	23.98	Pass
	46	4.865		
802.11ac(HT80)	42	3.241	23.98	Pass

U-NII 3

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	149	9.652	30.00	Pass
	157	9.452		
	165	9.365		
802.11n(HT20)	149	8.541	30.00	Pass
	157	8.654		
	165	8.241		
802.11n(HT40)	151	6.562	30.00	Pass
	159	6.251		
802.11ac(HT20)	149	7.542	30.00	Pass
	157	7.245		
	165	7.631		
802.11ac(HT40)	151	5.532	30.00	Pass
	159	5.421		
802.11ac(HT80)	155	3.251	30.00	Pass

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 54Mbps at IEEE 802.11a; MCS7 at IEEE 802.11n(HT20); MCS7 at IEEE 802.11n(HT40); Ncc1 MCS8 at IEEE 802.11ac(HT20); MCS7 at IEEE 802.11ac(HT40); MCS9 at IEEE 802.11ac(HT80);