



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2231-1,XT2231-5
FCC ID : IHDT56AC2
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Dec. 12, 2021 ~ Jan. 09, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Test Software	7
1.8 Applicable Standards	8
1.9 Specification of Accessory	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode	11
2.3 Connection Diagram of Test System	12
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	13
2.6 Measurement Results Explanation Example	13
3 TEST RESULT	14
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	14
3.2 Maximum Conducted Output Power Measurement	23
3.3 Power Spectral Density Measurement	24
3.4 Unwanted Emissions Measurement	26
3.5 AC Conducted Emission Measurement	31
3.6 Antenna Requirements	32
4 LIST OF MEASURING EQUIPMENT	33
5 UNCERTAINTY OF EVALUATION	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1N1011E	Rev. 01	Initial issue of report	Jan. 25, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 10.51 dB at 5640.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.69 dB at 11.320 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza,Chicago,IL60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2231-1,XT2231-5
FCC ID	IHDT56AC2
IMEI Code	Conducted: 359986690032831/359986690038317 Conduction: 359986690052110/359986690053951 Radiation: 359986690042913/359986690045437 For Sample 1 359986690034720/359986690040206 For Sample 2 359986690053365/359986690055204 For Sample 3 Sample 4359986690060196 For Sample 4
HW Version	PVT2
SW Version	STA32.48
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two models XT2231-1 and XT2231-5. The detailed differences between two models can be referred to the XT2231-1, XT2231-5_Operational Description of Product Equality Declaration exhibit separately

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 16.81 dBm / 0.0480 W 802.11n HT20 : 15.82 dBm / 0.0382 W 802.11n HT40 : 15.15 dBm / 0.0327 W 802.11ac VHT20: 15.16 dBm / 0.0328 W 802.11ac VHT40: 15.11 dBm / 0.0324 W 802.11ac VHT80: 14.58 dBm / 0.0287 W
99% Occupied Bandwidth	802.11a : 17.63 MHz 802.11n HT20 : 18.13 MHz 802.11n HT40 : 37.26 MHz 802.11ac VHT80 : 75.28 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	PIFA Antenna with gain -5.5 dBi

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-201
AC Adapter 1(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-202
AC Adapter 1(AR)	Brand Name	Motorola (Chenyang)	Model Name	MC-206
AC Adapter 2(US)	Brand Name	Motorola (Acbel)	Model Name	MC-201
AC Adapter 2(EU)	Brand Name	Motorola (Acbel)	Model Name	MC-202
AC Adapter 2(AR)	Brand Name	Motorola (Acbel)	Model Name	MC-206
AC Adapter 2(CHILE)	Brand Name	Motorola (Acbel)	Model Name	MC-209
AC Adapter 3(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-204
AC Adapter 4(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-204
AC Adapter 5(BR)	Brand Name	Motorola (Flex)	Model Name	MC-207
AC Adapter 6(BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-207
AC Adapter 7(US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 7(EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 7(UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 7(AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 8(US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 8(EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 8(UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 8(AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
AC Adapter 9(US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 9(EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
AC Adapter 9(UK)	Brand Name	Motorola (Aohai)	Model Name	MC-103
AC Adapter 10(IN)	Brand Name	Motorola (Chenyang)	Model Name	MC-104
AC Adapter 11(IN)	Brand Name	Motorola (Aohai)	Model Name	MC-104
AC Adapter 12(AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 13(EU)	Brand Name	Motorola (Salom)	Model Name	SC-42
AC Adapter 14(UK)	Brand Name	Motorola (Chenyang)	Model Name	SC-43
Earphone 1	Brand Name	Motorola (lyand)	Model Name	LYM239-76C-003
Earphone 2	Brand Name	Motorola (LCHSE)	Model Name	MEND1432B875000
Earphone 3	Brand Name	Motorola (New Leader)	Model Name	MH202
USB Cable 1	Brand Name	Motorola(Yihuaxing)	Model Name	T365-011B
USB Cable 2	Brand Name	Motorola(SUNTOPS)	Model Name	336258
USB Cable 3	Brand Name	Motorola(SUNTOPS)	Model Name	336281
USB Cable 4	Brand Name	Motorola(I SHENG)	Model Name	SC18D33506
USB Cable 5	Brand Name	Motorola(Yihuaxing)	Model Name	T365-012B
Battery 1	Brand Name	Motorola(Sunwoda)	Model Name	NH50
Battery 2	Brand Name	Motorola(SCUD)	Model Name	NH50

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle+ Bluetooth Link+WLAN Link(5G)+USB Cable1 (Charging from Adapter6) +Earphone1 + Battery1
--------------------------------------	---


Ch. #		U-NII-3 : 5745-5825 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

< Radiated Emission >

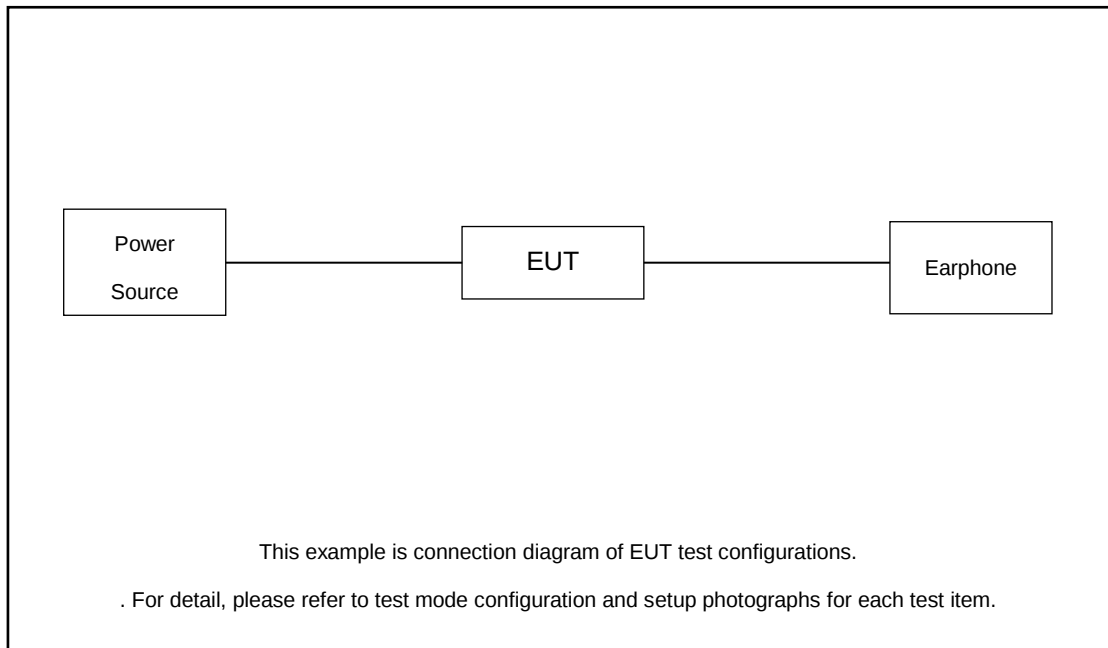

< Conducted Emission>

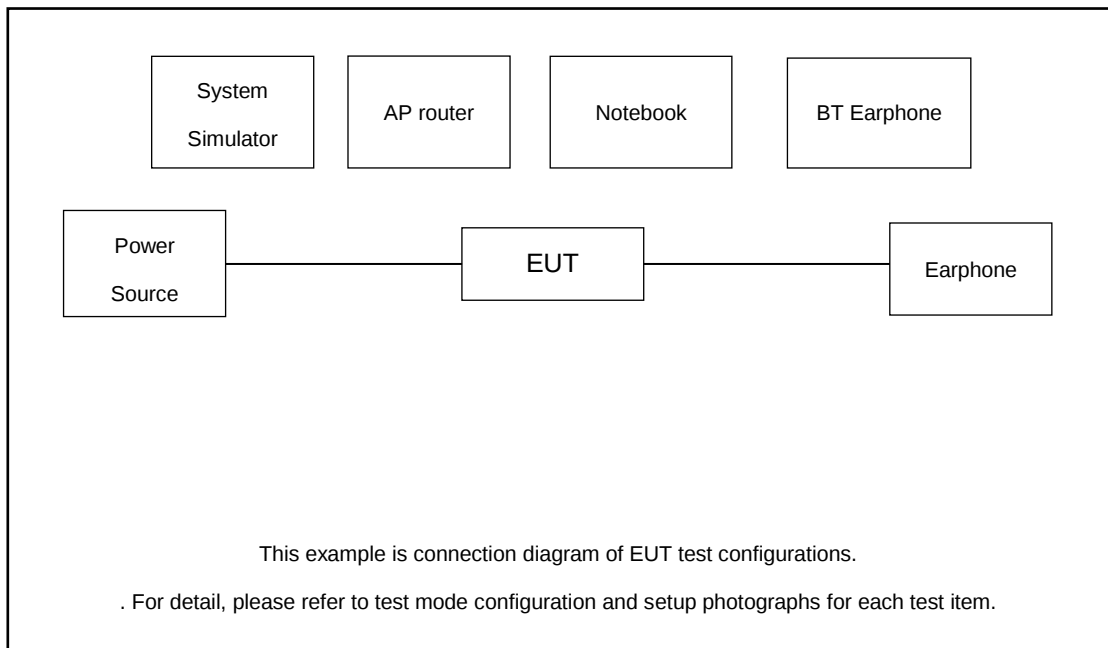

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Sony	MBH22	N/A	N/A	N/A
4.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.8 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.8 + 10 = 12.8 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup


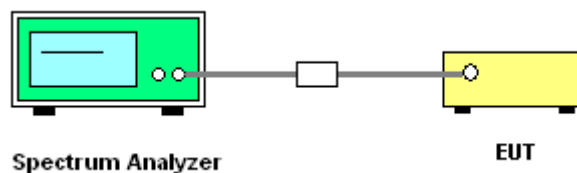





3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



11a

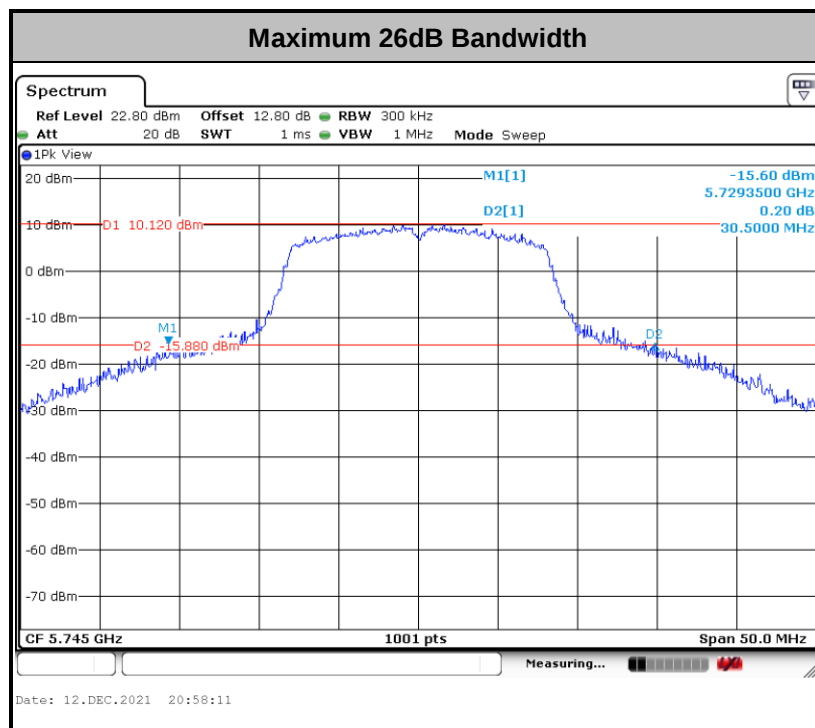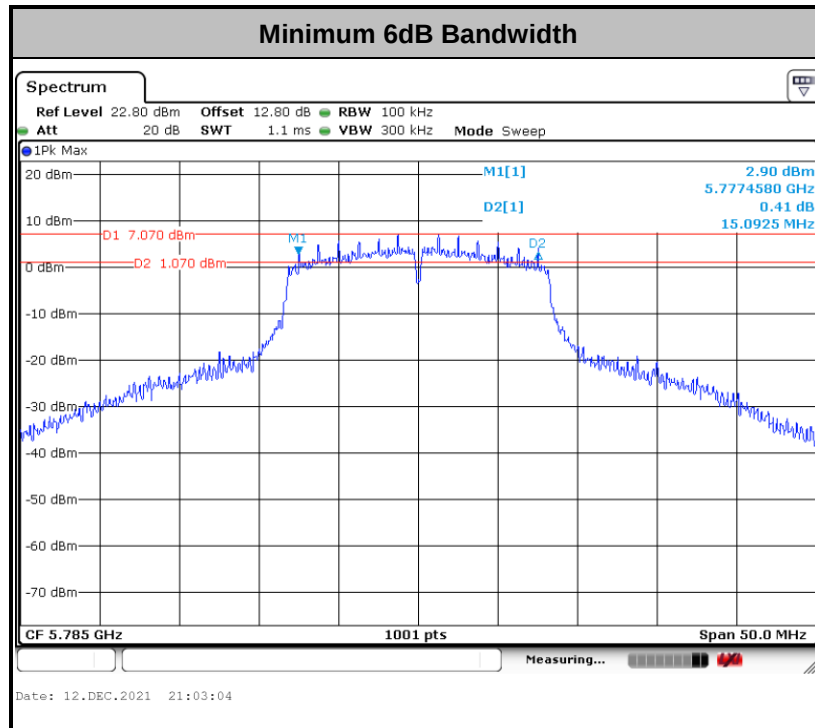


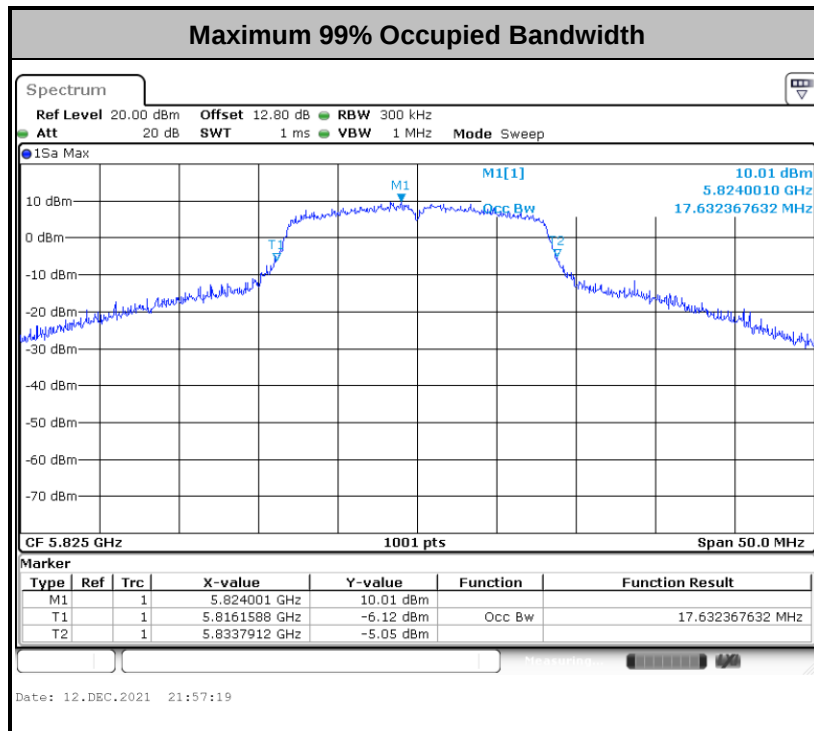





11n HT20

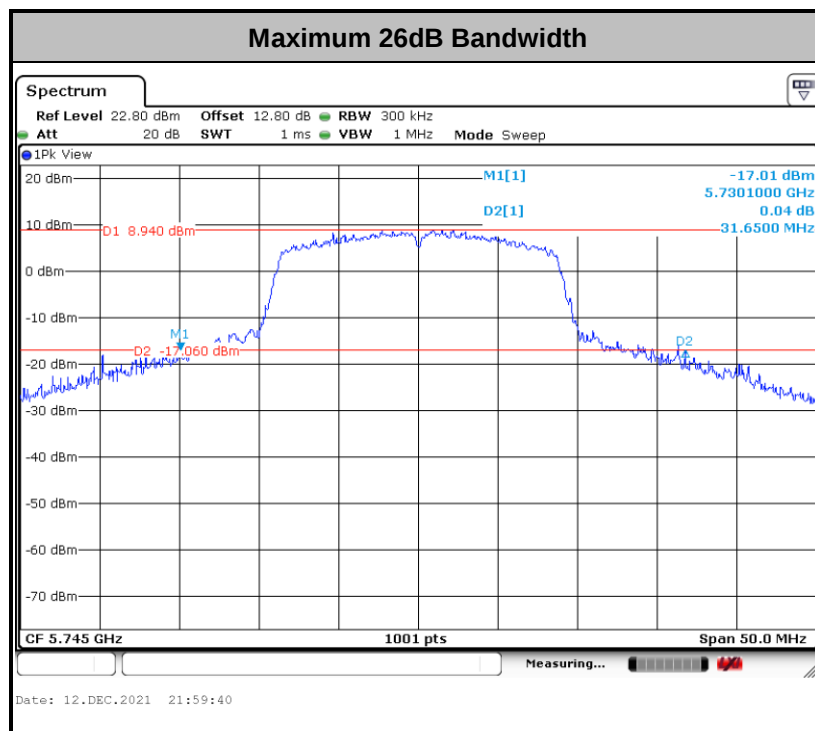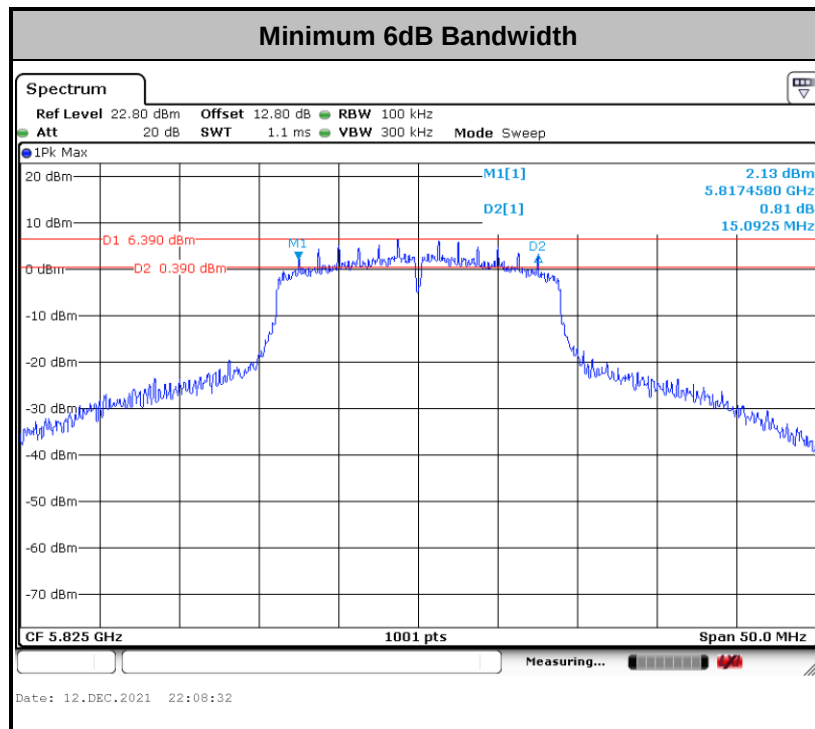


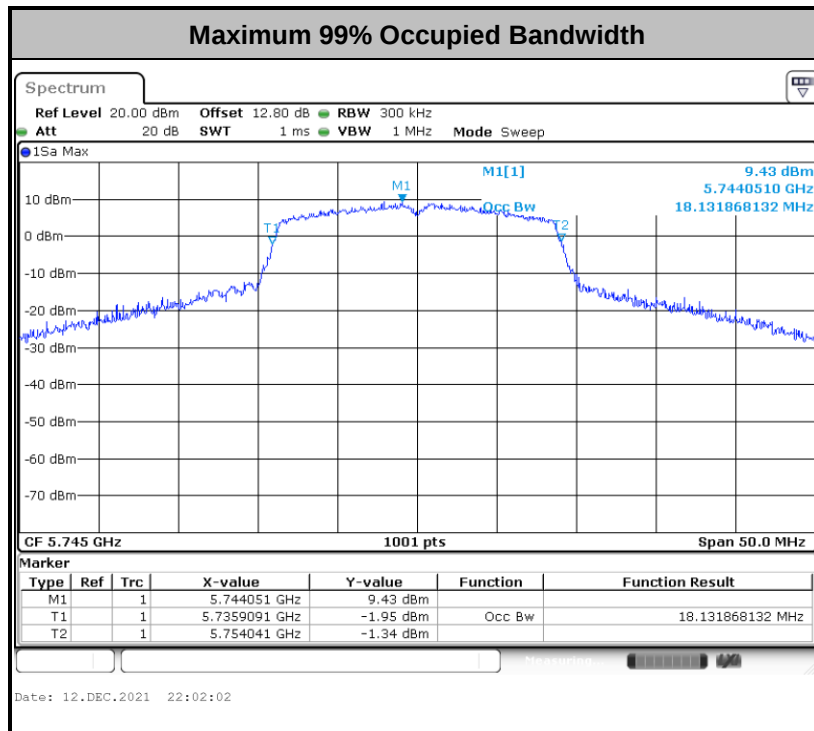





11n HT40

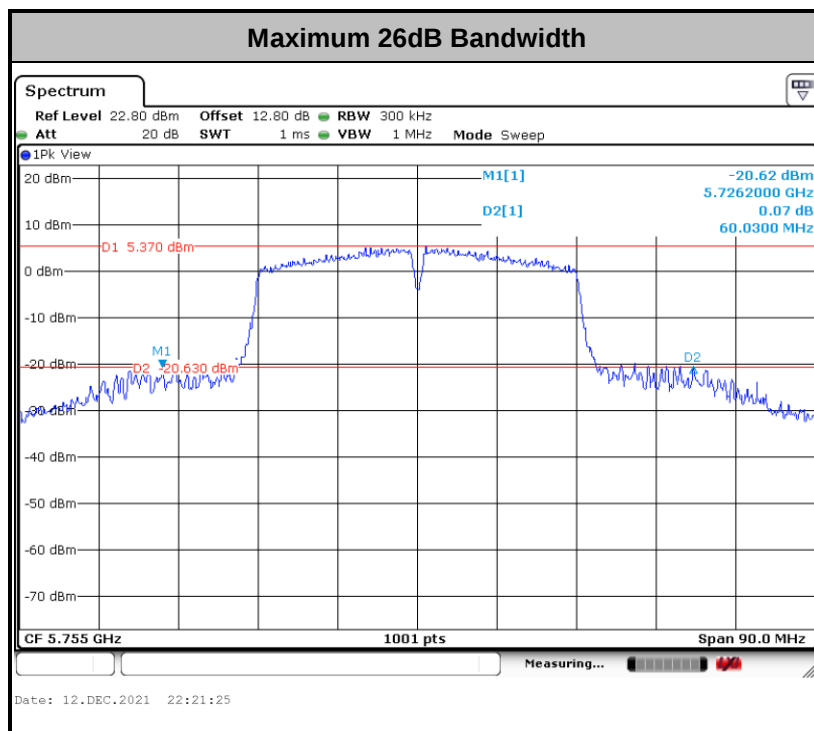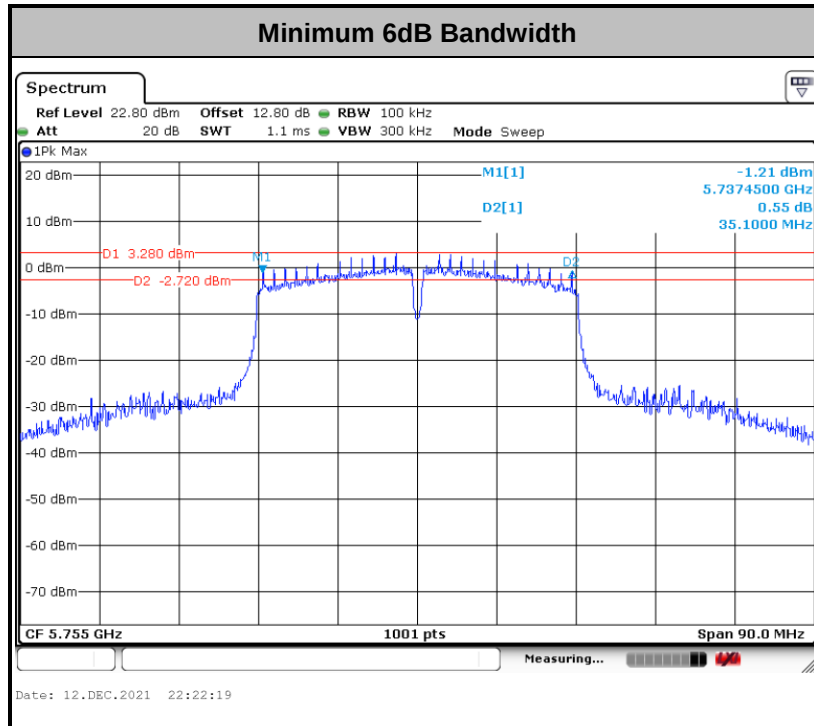


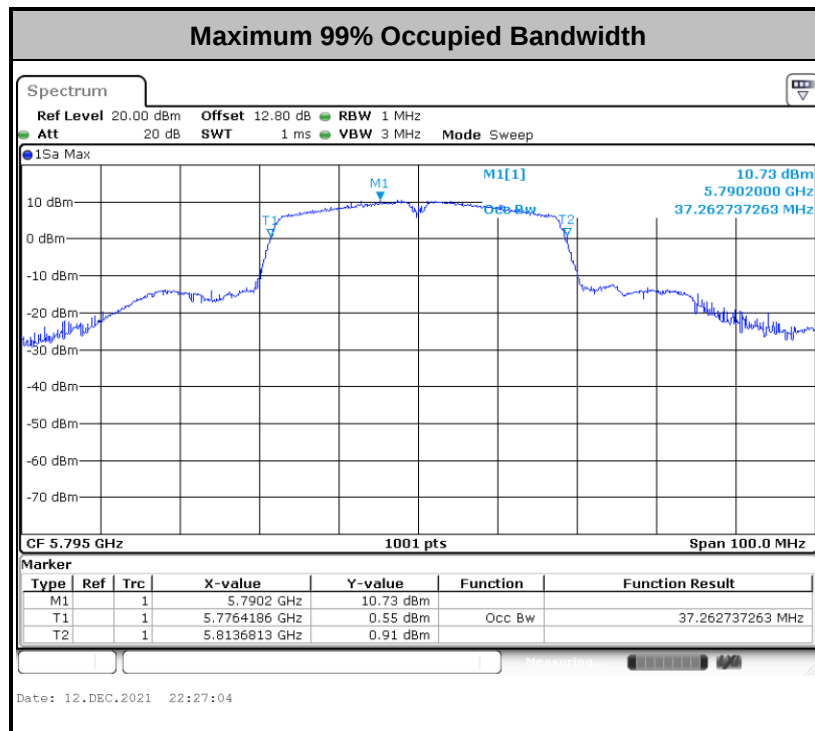



11ac VHT80

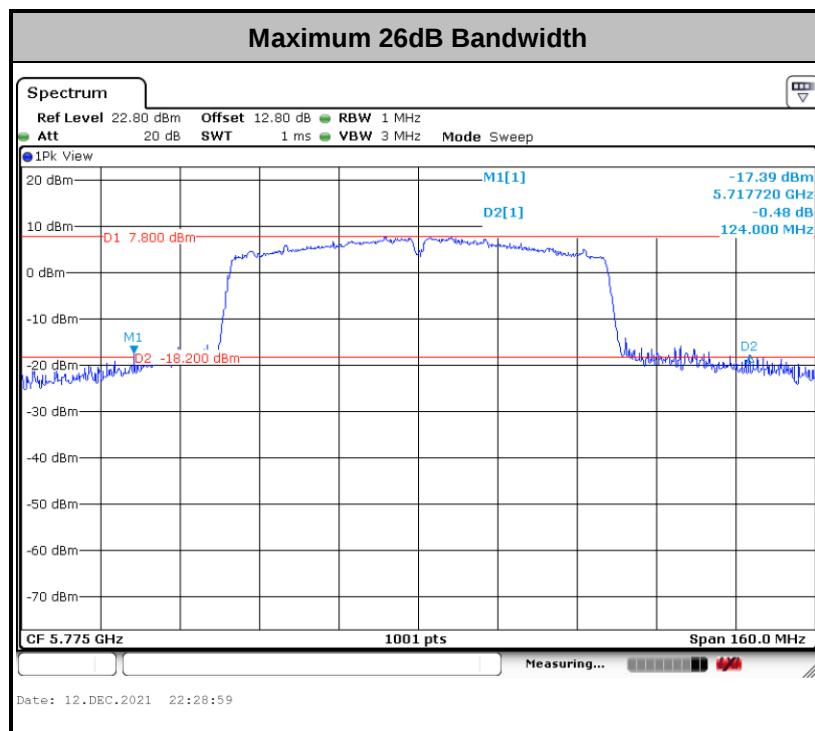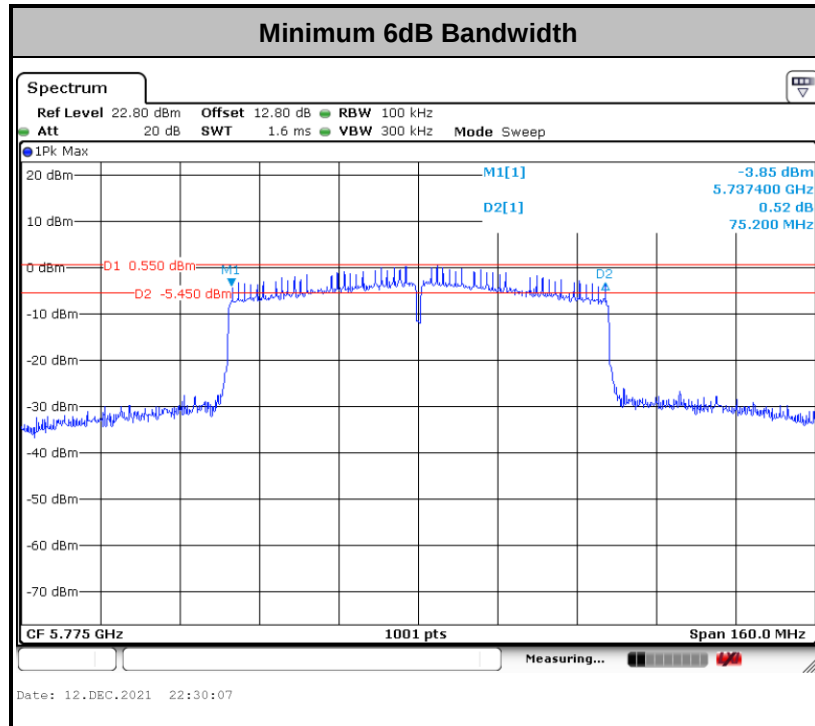

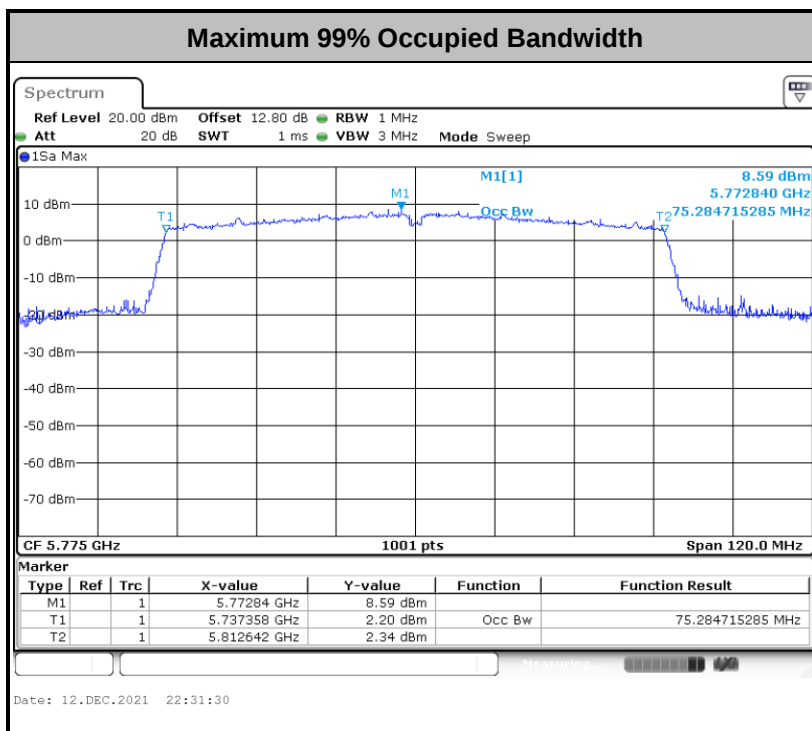

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

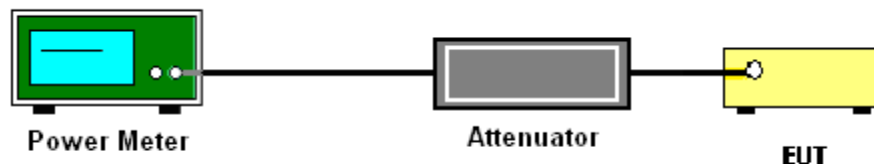

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-3

(power averaging (rms) detection with max hold):


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time $\leq$ (number of points in sweep) $\times$ T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
-
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

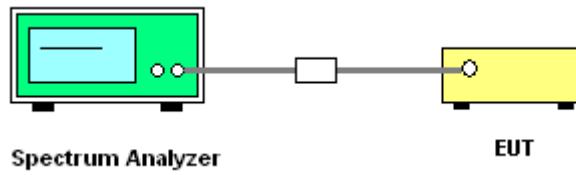

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

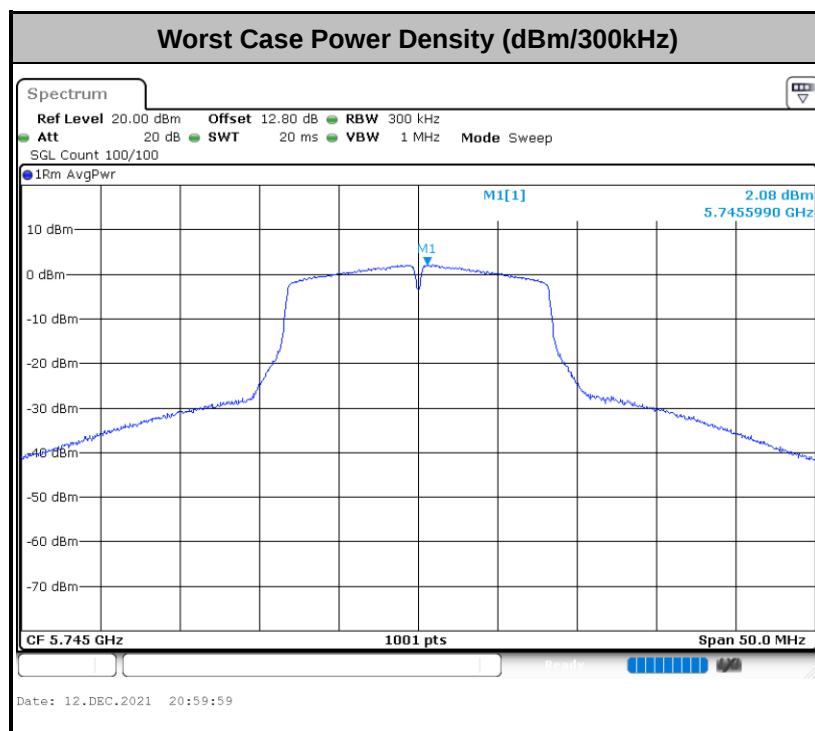



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

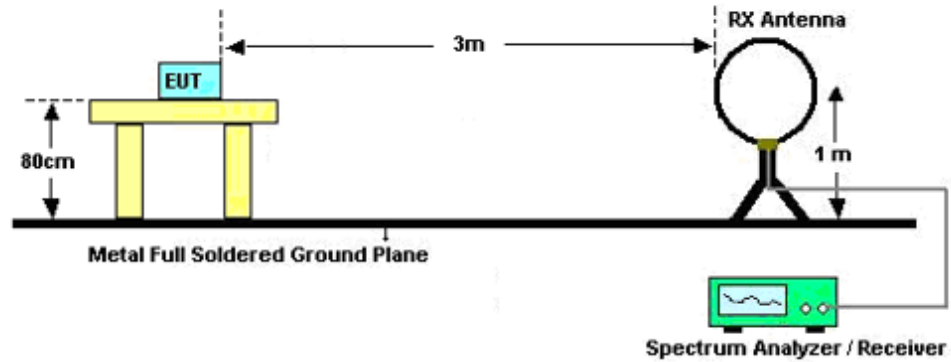

For radiated emissions from 30MHz to 1GHz

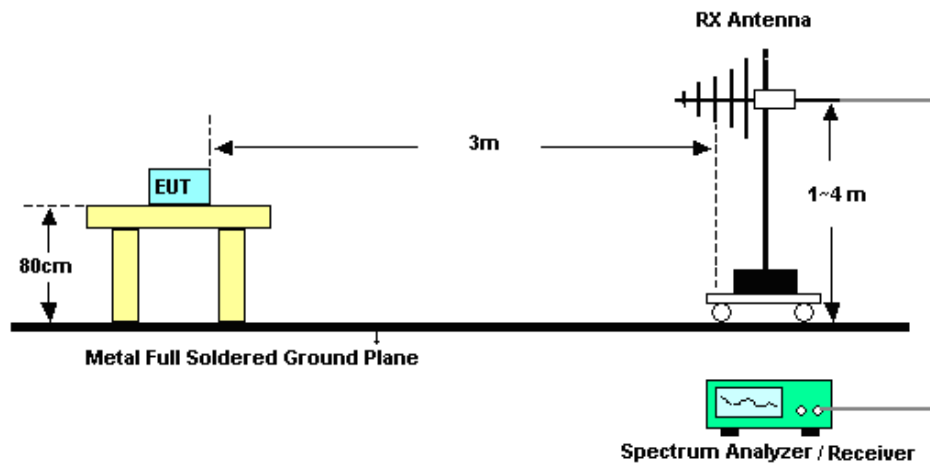

For radiated emissions above 1GHz

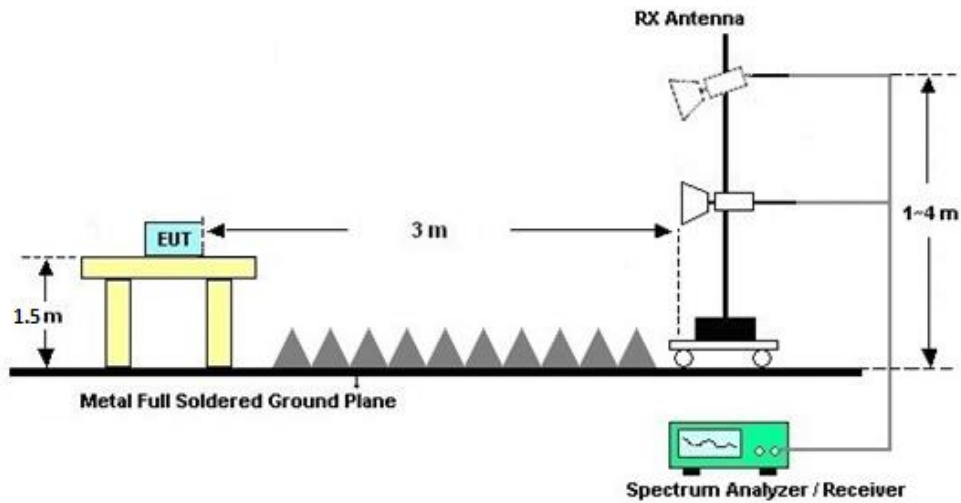

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

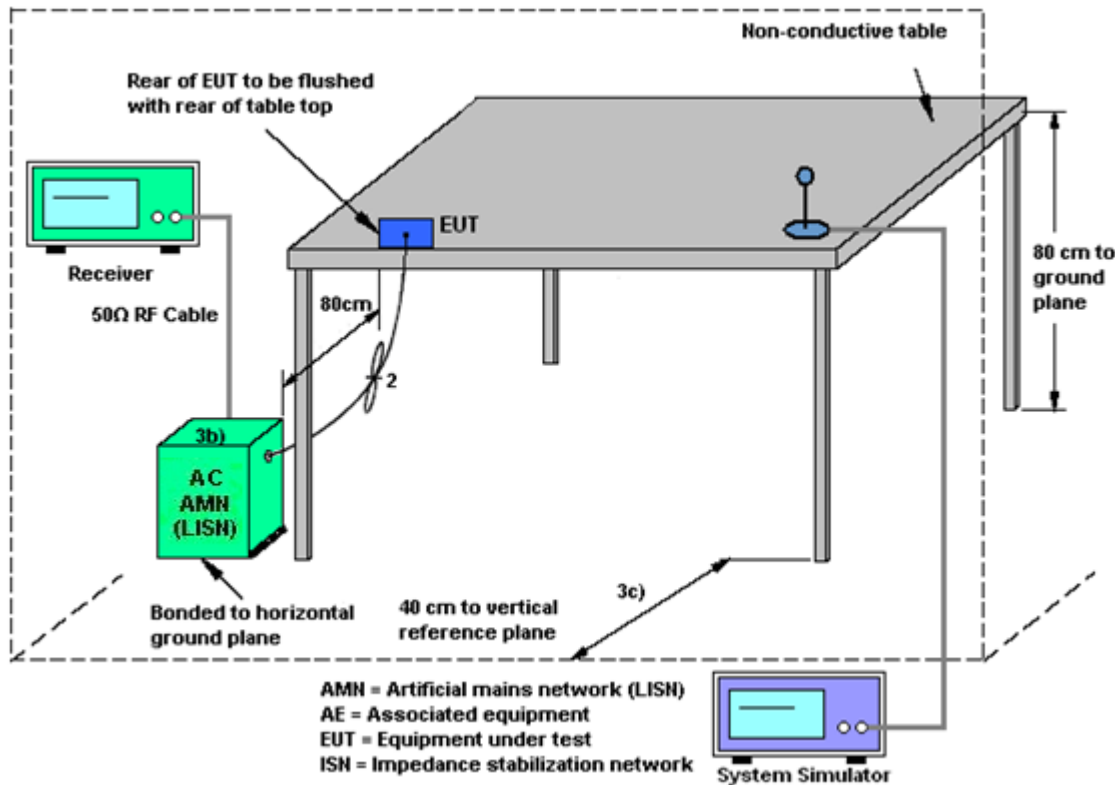

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Dec. 12, 2021	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Dec. 12, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Dec. 12, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Jul. 21, 2021	Dec. 25, 2021~Jan. 09, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2021	Dec. 25, 2021~Jan. 09, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 22, 2021	Dec. 25, 2021~Jan. 09, 2022	Jul. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2021	Dec. 25, 2021~Jan. 09, 2022	Jul. 14, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Dec. 25, 2021~Jan. 09, 2022	Jul. 24, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 23, 2021	Dec. 25, 2021~Jan. 09, 2022	Apr. 22, 2022	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 17, 2021	Dec. 25, 2021~Jan. 09, 2022	Apr. 16, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 17, 2021	Dec. 25, 2021~Jan. 09, 2022	Oct. 16, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 16, 2021	Dec. 25, 2021~Jan. 09, 2022	Oct. 15, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2021	Dec. 25, 2021~Jan. 09, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Dec. 25, 2021~Jan. 09, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 25, 2021~Jan. 09, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 25, 2021~Jan. 09, 2022	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 07, 2021	Dec. 21, 2021	Mar. 06, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Dec. 21, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2021	Dec. 21, 2021	Oct. 14, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 21, 2021	Dec. 21, 2021	Jul. 20, 2022	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2021/12/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

5745-5825									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.08	30.50	15.10	0.5	Pass
11a	6Mbps	1	157	5785	17.33	27.65	15.09	0.5	Pass
11a	6Mbps	1	165	5825	17.63	30.35	15.10	0.5	Pass
HT20	MCS 0	1	149	5745	18.13	31.65	15.10	0.5	Pass
HT20	MCS 0	1	157	5785	18.03	27.95	15.10	0.5	Pass
HT20	MCS 0	1	165	5825	18.03	28.05	15.09	0.5	Pass
HT40	MCS 0	1	151	5755	36.96	60.03	35.10	0.5	Pass
HT40	MCS 0	1	159	5795	37.26	51.93	35.10	0.5	Pass
VHT80	MCS 0	1	155	5775	75.28	124.00	75.20	0.5	Pass

TEST RESULTS DATA
Average Power Table


5745-5825										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.13	16.81	30.00	-5.50		Pass
11a	6Mbps	1	157	5785	0.13	16.57	30.00	-5.50		Pass
11a	6Mbps	1	165	5825	0.13	16.47	30.00	-5.50		Pass
HT20	MCS 0	1	149	5745	0.14	15.82	30.00	-5.50		Pass
HT20	MCS 0	1	157	5785	0.14	15.50	30.00	-5.50		Pass
HT20	MCS 0	1	165	5825	0.14	15.34	30.00	-5.50		Pass
HT40	MCS 0	1	151	5755	0.30	15.15	30.00	-5.50		Pass
HT40	MCS 0	1	159	5795	0.30	14.86	30.00	-5.50		Pass
VHT20	MCS 0	1	149	5745	0.12	15.16	30.00	-5.50		Pass
VHT20	MCS 0	1	157	5785	0.12	15.01	30.00	-5.50		Pass
VHT20	MCS 0	1	165	5825	0.12	14.78	30.00	-5.50		Pass
VHT40	MCS 0	1	151	5755	0.28	15.11	30.00	-5.50		Pass
VHT40	MCS 0	1	159	5795	0.28	14.80	30.00	-5.50		Pass
VHT80	MCS 0	1	155	5775	0.57	14.58	30.00	-5.50		Pass

TEST RESULTS DATA
Power Spectral Density

5745-5825										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.13	2.22	4.43	30.00	-5.50	Pass
11a	6Mbps	1	157	5785	0.13	2.22	4.05	30.00	-5.50	Pass
11a	6Mbps	1	165	5825	0.13	2.22	4.10	30.00	-5.50	Pass
HT20	MCS 0	1	149	5745	0.14	2.22	3.70	30.00	-5.50	Pass
HT20	MCS 0	1	157	5785	0.14	2.22	3.24	30.00	-5.50	Pass
HT20	MCS 0	1	165	5825	0.14	2.22	2.73	30.00	-5.50	Pass
HT40	MCS 0	1	151	5755	0.30	2.22	-0.12	30.00	-5.50	Pass
HT40	MCS 0	1	159	5795	0.30	2.22	-0.54	30.00	-5.50	Pass
VHT80	MCS 0	1	155	5775	0.57	2.22	-3.10	30.00	-5.50	Pass




Appendix B. AC Conducted Emission Test Results

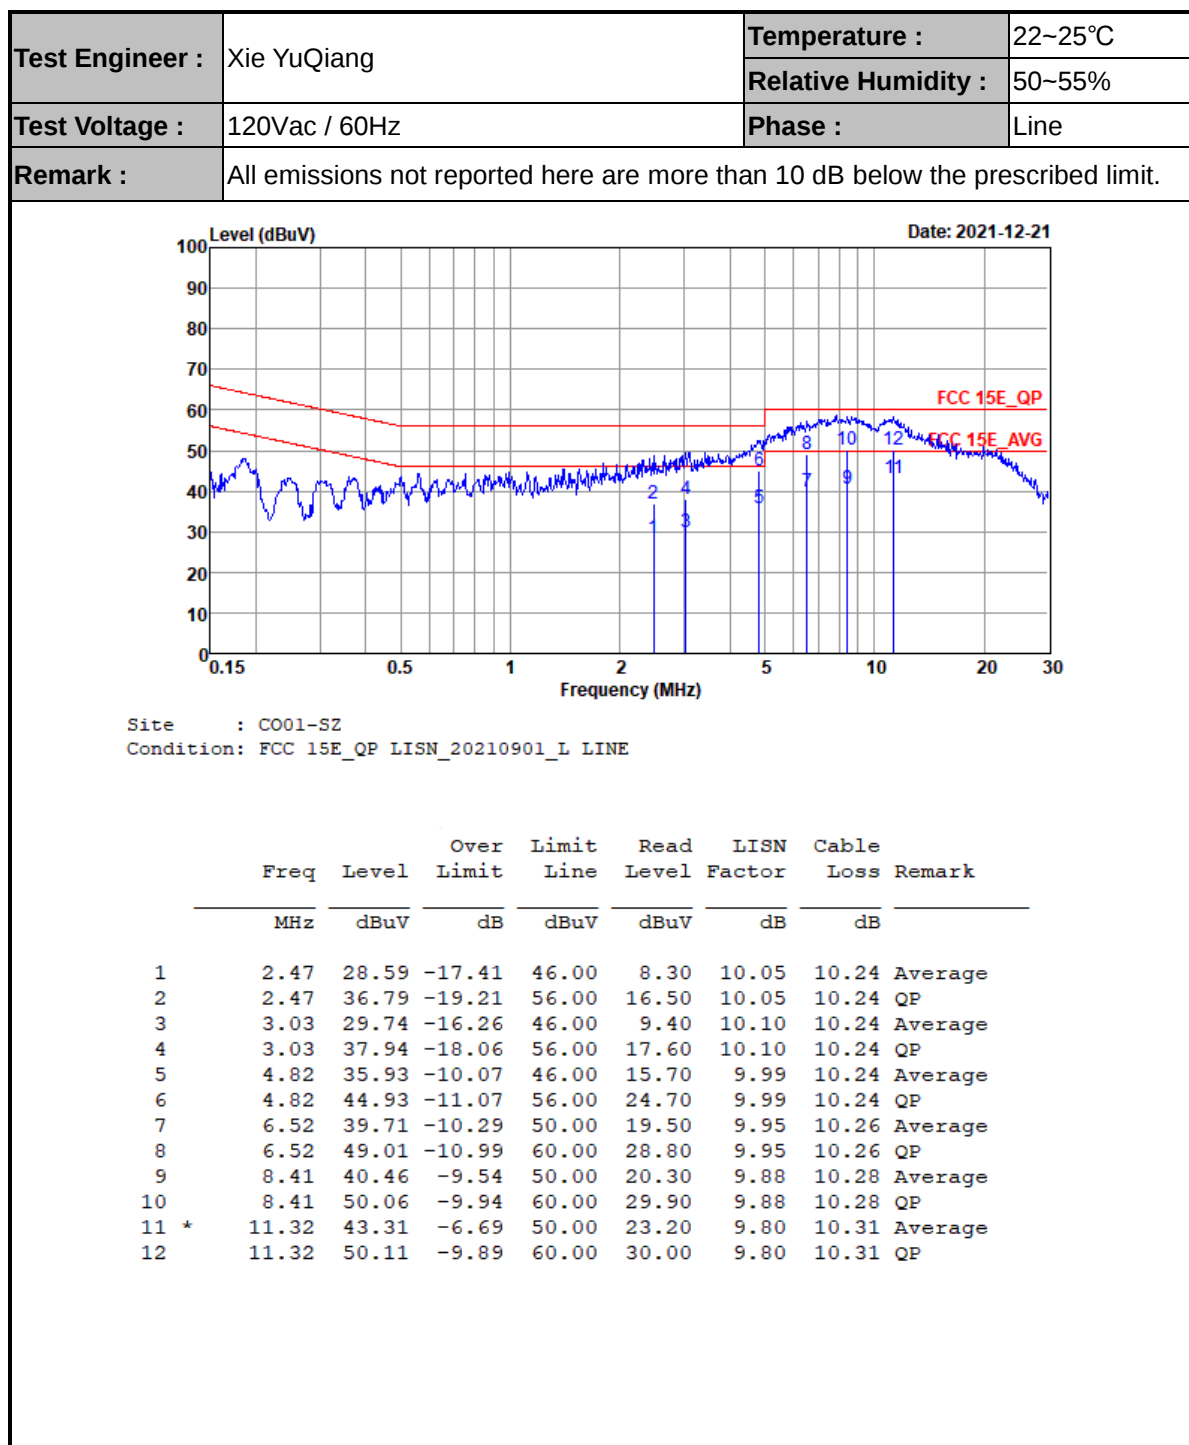



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

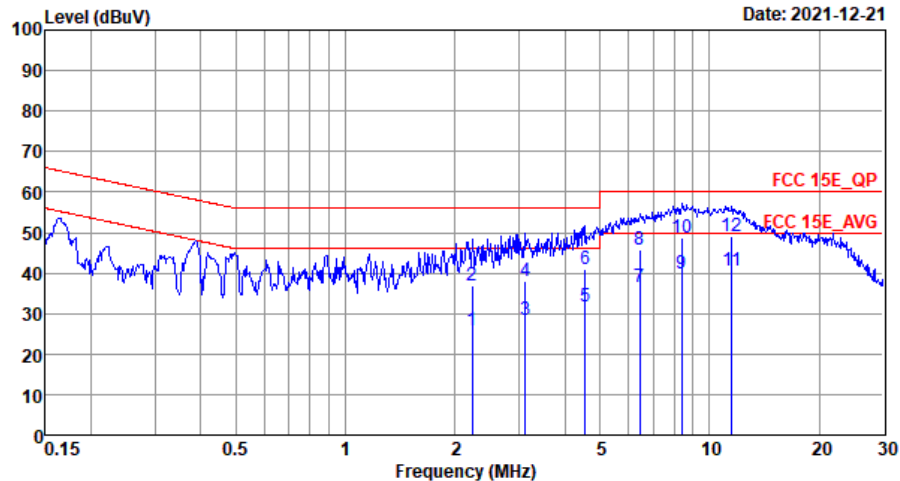

Site : CO01-SZ
Condition: FCC 15E_QP LISN_20210901_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	2.22	26.01	-19.99	46.00	5.60	10.17	10.24	Average
2	2.22	36.81	-19.19	56.00	16.40	10.17	10.24	QP
3	3.12	28.48	-17.52	46.00	8.10	10.14	10.24	Average
4	3.12	38.08	-17.92	56.00	17.70	10.14	10.24	QP
5	4.55	31.68	-14.32	46.00	11.30	10.14	10.24	Average
6	4.55	40.98	-15.02	56.00	20.60	10.14	10.24	QP
7	6.42	36.61	-13.39	50.00	16.30	10.05	10.26	Average
8	6.42	45.91	-14.09	60.00	25.60	10.05	10.26	QP
9	8.37	39.79	-10.21	50.00	19.50	10.01	10.28	Average
10	8.37	48.59	-11.41	60.00	28.30	10.01	10.28	QP
11 *	11.50	40.66	-9.34	50.00	20.40	9.95	10.31	Average
12	11.50	48.96	-11.04	60.00	28.70	9.95	10.31	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Sample 1

5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5646.4	52.28	-16.02	68.3	38.23	34.37	12.28	32.6	303	193	P	H
		5699.8	55.08	-49.97	105.05	40.99	34.4	12.29	32.6	303	193	P	H
		5715.6	66.23	-43.34	109.57	52.11	34.43	12.29	32.6	303	193	P	H
		5724.2	70.97	-49.41	120.38	56.81	34.47	12.29	32.6	303	193	P	H
		5745	105.26	-	-	91.06	34.5	12.3	32.6	303	193	P	H
		5745	97.9	-	-	83.7	34.5	12.3	32.6	303	193	A	H
		5649	52.43	-15.87	68.3	38.38	34.37	12.28	32.6	290	213	P	V
		5699.4	54.39	-50.37	104.76	40.3	34.4	12.29	32.6	290	213	P	V
		5718.4	61.53	-48.82	110.35	47.37	34.47	12.29	32.6	290	213	P	V
		5724.4	70.73	-50.1	120.83	56.57	34.47	12.29	32.6	290	213	P	V
		5745	103.36	-	-	89.16	34.5	12.3	32.6	290	213	P	V
		5745	96.6	-	-	82.4	34.5	12.3	32.6	290	213	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5602.6	52.46	-15.84	68.3	38.49	34.3	12.27	32.6	285	186	P	H
		5699.2	53.15	-51.46	104.61	39.06	34.4	12.29	32.6	285	186	P	H
		5717.6	53	-57.13	110.13	38.84	34.47	12.29	32.6	285	186	P	H
		5723	55.32	-62.32	117.64	41.16	34.47	12.29	32.6	285	186	P	H
		5785	105.6	-	-	91.26	34.63	12.31	32.6	285	186	P	H
		5785	98.9	-	-	84.56	34.63	12.31	32.6	285	186	A	H
		5855	51.63	-59.17	110.8	37.04	34.87	12.32	32.6	285	186	P	H
		5863.6	52.91	-55.48	108.39	38.32	34.87	12.32	32.6	285	186	P	H
		5891.8	52.44	-40.33	92.77	37.71	35	12.33	32.6	285	186	P	H
		5936.6	52.79	-15.51	68.3	37.98	35.07	12.34	32.6	285	186	P	H
		5615	52.11	-16.19	68.3	38.14	34.3	12.27	32.6	289	201	P	V
		5654	52.21	-19.05	71.26	38.13	34.4	12.28	32.6	289	201	P	V
		5709.4	51.59	-56.24	107.83	37.47	34.43	12.29	32.6	289	201	P	V
		5723	52	-65.64	117.64	37.84	34.47	12.29	32.6	289	201	P	V
		5785	104.59	-	-	90.25	34.63	12.31	32.6	289	201	P	V
		5785	97.94	-	-	83.6	34.63	12.31	32.6	289	201	A	V
		5850.6	51.68	-69.15	120.83	37.16	34.8	12.32	32.6	289	201	P	V
		5858	51.83	-58.13	109.96	37.24	34.87	12.32	32.6	289	201	P	V
		5910.2	52.27	-26.92	79.19	37.51	35.03	12.33	32.6	289	201	P	V
		5940.6	52.48	-15.82	68.3	37.64	35.1	12.34	32.6	289	201	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5825	103.98	-	-	89.49	34.77	12.32	32.6	295	182	P	H
		5825	98.18	-	-	83.69	34.77	12.32	32.6	295	182	A	H
		5850	66	-56.2	122.2	51.48	34.8	12.32	32.6	295	182	P	H
		5856	64.19	-46.33	110.52	49.6	34.87	12.32	32.6	295	182	P	H
		5877	56.68	-47.04	103.72	42.02	34.93	12.33	32.6	295	182	P	H
		5947.2	53.57	-14.73	68.3	38.73	35.1	12.34	32.6	295	182	P	H
		5825	103.4	-	-	88.91	34.77	12.32	32.6	293	206	P	V
		5825	96.82	-	-	82.33	34.77	12.32	32.6	293	206	A	V
		5851.2	63.9	-55.56	119.46	49.38	34.8	12.32	32.6	293	206	P	V
		5855	59.16	-51.64	110.8	44.57	34.87	12.32	32.6	293	206	P	V
		5876.6	53.25	-50.76	104.01	38.59	34.93	12.33	32.6	293	206	P	V
		5943.6	52.82	-15.48	68.3	37.98	35.1	12.34	32.6	293	206	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	49.91	-24.09	74	46.2	38.19	16.53	51.01	-	-	P	H
		17235	50.97	-17.33	68.3	44.06	41.86	18.46	53.41	-	-	P	H
		11490	49.41	-24.59	74	45.7	38.19	16.53	51.01	-	-	P	V
		17235	50.36	-17.94	68.3	43.45	41.86	18.46	53.41	-	-	P	V
802.11a CH 157 5785MHz		11570	49.41	-24.59	74	45.59	38.26	16.55	50.99	-	-	P	H
		17355	50.51	-17.79	68.3	43.59	41.74	18.5	53.32	-	-	P	H
		11570	50.11	-23.89	74	46.29	38.26	16.55	50.99	-	-	P	V
		17355	50.98	-17.32	68.3	44.06	41.74	18.5	53.32	-	-	P	V
802.11a CH 165 5825MHz		11650	49.05	-24.95	74	45.13	38.32	16.57	50.97	-	-	P	H
		17475	50.07	-18.23	68.3	43.12	41.63	18.55	53.23	-	-	P	H
		11650	50.21	-23.79	74	46.29	38.32	16.57	50.97	-	-	P	V
		17475	50.85	-17.45	68.3	43.9	41.63	18.55	53.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5645.2	52.47	-15.83	68.3	38.42	34.37	12.28	32.6	301	183	P	H
		5699.6	57.5	-47.41	104.91	43.41	34.4	12.29	32.6	301	183	P	H
		5718.4	67.7	-42.65	110.35	53.54	34.47	12.29	32.6	301	183	P	H
		5724	72.33	-47.59	119.92	58.17	34.47	12.29	32.6	301	183	P	H
		5745	104.67	-	-	90.47	34.5	12.3	32.6	301	183	P	H
		5745	98.06	-	-	83.86	34.5	12.3	32.6	301	183	A	H
		5613.6	53.29	-15.01	68.3	39.32	34.3	12.27	32.6	290	213	P	V
		5700	57.79	-47.41	105.2	43.7	34.4	12.29	32.6	290	213	P	V
		5720	68.01	-42.79	110.8	53.85	34.47	12.29	32.6	290	213	P	V
		5724.8	75.74	-46	121.74	61.58	34.47	12.29	32.6	290	213	P	V
		5745	102.54	-	-	88.34	34.5	12.3	32.6	290	213	P	V
		5745	96.5	-	-	82.3	34.5	12.3	32.6	290	213	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 157 5785MHz		5624.2	52.23	-16.07	68.3	38.23	34.33	12.27	32.6	284	185	P	H
		5661	52.82	-23.63	76.45	38.74	34.4	12.28	32.6	284	185	P	H
		5701.2	53.23	-52.31	105.54	39.11	34.43	12.29	32.6	284	185	P	H
		5721	52.85	-60.23	113.08	38.69	34.47	12.29	32.6	284	185	P	H
		5785	104.59	-	-	90.25	34.63	12.31	32.6	284	185	P	H
		5785	98.5	-	-	84.16	34.63	12.31	32.6	284	185	A	H
		5850.6	52.72	-68.11	120.83	38.2	34.8	12.32	32.6	284	185	P	H
		5859	52.29	-57.39	109.68	37.7	34.87	12.32	32.6	284	185	P	H
		5910.4	52.29	-26.75	79.04	37.53	35.03	12.33	32.6	284	185	P	H
		5942.8	52.81	-15.49	68.3	37.97	35.1	12.34	32.6	284	185	P	H
		5649	53.24	-15.06	68.3	39.19	34.37	12.28	32.6	289	213	P	V
		5673	52.61	-32.7	85.31	38.53	34.4	12.28	32.6	289	213	P	V
		5711.4	52.47	-55.92	108.39	38.35	34.43	12.29	32.6	289	213	P	V
		5722.2	52.81	-63.01	115.82	38.65	34.47	12.29	32.6	289	213	P	V
		5785	103.17	-	-	88.83	34.63	12.31	32.6	289	213	P	V
		5785	96.44	-	-	82.1	34.63	12.31	32.6	289	213	A	V
		5852.2	51.79	-65.39	117.18	37.27	34.8	12.32	32.6	289	213	P	V
		5858.6	51.9	-57.89	109.79	37.31	34.87	12.32	32.6	289	213	P	V
		5877	53.02	-50.7	103.72	38.36	34.93	12.33	32.6	289	213	P	V
		5939.2	52.05	-16.25	68.3	37.21	35.1	12.34	32.6	289	213	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5825	103.38	-	-	88.89	34.77	12.32	32.6	298	188	P	H
		5825	97.58	-	-	83.09	34.77	12.32	32.6	298	188	A	H
		5851	67.1	-52.82	119.92	52.58	34.8	12.32	32.6	298	188	P	H
		5855	64.01	-46.79	110.8	49.42	34.87	12.32	32.6	298	188	P	H
		5876.2	54.19	-50.12	104.31	39.53	34.93	12.33	32.6	298	188	P	H
		5933.4	53.19	-15.11	68.3	38.38	35.07	12.34	32.6	298	188	P	H
		5825	101.67	-	-	87.18	34.77	12.32	32.6	294	205	P	V
		5825	95.96	-	-	81.47	34.77	12.32	32.6	294	205	A	V
		5850	65.19	-57.01	122.2	50.67	34.8	12.32	32.6	294	205	P	V
		5856.8	62.3	-48	110.3	47.71	34.87	12.32	32.6	294	205	P	V
		5915.8	53.48	-21.59	75.07	38.72	35.03	12.33	32.6	294	205	P	V
		5940.2	52.83	-15.47	68.3	37.99	35.1	12.34	32.6	294	205	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		11490	48.99	-25.01	74	45.28	38.19	16.53	51.01	-	-	P	H
HT20		17235	50.4	-17.9	68.3	43.49	41.86	18.46	53.41	-	-	P	H
CH 149		11490	48.86	-25.14	74	45.15	38.19	16.53	51.01	-	-	P	V
5745MHz		17235	51.3	-17	68.3	44.39	41.86	18.46	53.41	-	-	P	V
802.11n		11590	48.9	-25.1	74	45.05	38.27	16.56	50.98	-	-	P	H
HT20		17385	50.44	-17.86	68.3	43.51	41.71	18.51	53.29	-	-	P	H
CH 157		11590	49.9	-24.1	74	46.05	38.27	16.56	50.98	-	-	P	V
5785MHz		17385	51.56	-16.74	68.3	44.63	41.71	18.51	53.29	-	-	P	V
802.11n		11650	49.06	-24.94	74	45.14	38.32	16.57	50.97	-	-	P	H
HT20		17475	50.61	-17.69	68.3	43.66	41.63	18.55	53.23	-	-	P	H
CH 165		11650	50.99	-23.01	74	47.07	38.32	16.57	50.97	-	-	P	V
5825MHz		17475	50.13	-18.17	68.3	43.18	41.63	18.55	53.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5643	53.94	-14.36	68.3	39.89	34.37	12.28	32.6	303	190	P	H
		5698.8	59.94	-44.38	104.32	45.85	34.4	12.29	32.6	303	190	P	H
		5719.6	72.5	-38.19	110.69	58.34	34.47	12.29	32.6	303	190	P	H
		5724.4	74.37	-46.46	120.83	60.21	34.47	12.29	32.6	303	190	P	H
		5755	100.19	-	-	85.92	34.57	12.3	32.6	303	190	P	H
		5755	94.37	-	-	80.1	34.57	12.3	32.6	303	190	A	H
		5853.6	52.14	-61.85	113.99	37.55	34.87	12.32	32.6	303	190	P	H
		5861.2	52.52	-56.54	109.06	37.93	34.87	12.32	32.6	303	190	P	H
		5913	52.71	-24.42	77.13	37.95	35.03	12.33	32.6	303	190	P	H
		5948.8	53.34	-14.96	68.3	38.5	35.1	12.34	32.6	303	190	P	H
		5632.4	52.45	-15.85	68.3	38.44	34.33	12.28	32.6	292	221	P	V
		5698.8	57.52	-46.8	104.32	43.43	34.4	12.29	32.6	292	221	P	V
		5719.4	70.29	-40.34	110.63	56.13	34.47	12.29	32.6	292	221	P	V
		5723	72.53	-45.11	117.64	58.37	34.47	12.29	32.6	292	221	P	V
		5755	98.12	-	-	83.85	34.57	12.3	32.6	292	221	P	V
		5755	92.57	-	-	78.3	34.57	12.3	32.6	292	221	A	V
		5851.6	51.82	-66.73	118.55	37.3	34.8	12.32	32.6	292	221	P	V
		5858	52.28	-57.68	109.96	37.69	34.87	12.32	32.6	292	221	P	V
		5910.6	51.91	-26.99	78.9	37.15	35.03	12.33	32.6	292	221	P	V
		5940.2	52.51	-15.79	68.3	37.67	35.1	12.34	32.6	292	221	P	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5644.6	53.11	-15.19	68.3	39.06	34.37	12.28	32.6	290	179	P	H
		5697.4	53.72	-49.57	103.29	39.63	34.4	12.29	32.6	290	179	P	H
		5715.8	57.61	-52.02	109.63	43.49	34.43	12.29	32.6	290	179	P	H
		5724	56.84	-63.08	119.92	42.68	34.47	12.29	32.6	290	179	P	H
		5795	100.25	-	-	85.84	34.7	12.31	32.6	290	179	P	H
		5795	94.27	-	-	79.86	34.7	12.31	32.6	290	179	A	H
		5850.6	63.06	-57.77	120.83	48.54	34.8	12.32	32.6	290	179	P	H
		5858.2	58.02	-51.88	109.9	43.43	34.87	12.32	32.6	290	179	P	H
		5881.6	53.9	-46.41	100.31	39.24	34.93	12.33	32.6	290	179	P	H
		5938	52.85	-15.45	68.3	38.04	35.07	12.34	32.6	290	179	P	H
		5640.4	52.34	-15.96	68.3	38.29	34.37	12.28	32.6	299	205	P	V
		5696.4	52.76	-49.79	102.55	38.67	34.4	12.29	32.6	299	205	P	V
		5717.2	56.29	-53.73	110.02	42.17	34.43	12.29	32.6	299	205	P	V
		5721.8	53.98	-60.92	114.9	39.82	34.47	12.29	32.6	299	205	P	V
		5795	98.96	-	-	84.55	34.7	12.31	32.6	299	205	P	V
		5795	92.53	-	-	78.12	34.7	12.31	32.6	299	205	A	V
		5851	60.03	-59.89	119.92	45.51	34.8	12.32	32.6	299	205	P	V
		5855.8	56.87	-53.71	110.58	42.28	34.87	12.32	32.6	299	205	P	V
		5909	52.96	-27.11	80.07	38.2	35.03	12.33	32.6	299	205	P	V
		5936.6	53.18	-15.12	68.3	38.37	35.07	12.34	32.6	299	205	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		11510	49.68	-24.32	74	45.94	38.21	16.53	51	-	-	P	H
HT40		17265	49.84	-18.46	68.3	42.93	41.83	18.47	53.39	-	-	P	H
CH 151		11510	49.15	-24.85	74	45.41	38.21	16.53	51	-	-	P	V
5755MHz		17265	50.23	-18.07	68.3	43.32	41.83	18.47	53.39	-	-	P	V
802.11n		11590	49.85	-24.15	74	46	38.27	16.56	50.98	-	-	P	H
HT40		17385	50.95	-17.35	68.3	44.02	41.71	18.51	53.29	-	-	P	H
CH 159		11590	49.87	-24.13	74	46.02	38.27	16.56	50.98	-	-	P	V
5795MHz		17385	50.47	-17.83	68.3	43.54	41.71	18.51	53.29	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5647.4	56.88	-11.42	68.3	42.83	34.37	12.28	32.6	293	180	P	H
		5697	67.22	-35.78	103	53.13	34.4	12.29	32.6	293	180	P	H
		5716.6	70.84	-39.01	109.85	56.72	34.43	12.29	32.6	293	180	P	H
		5724.6	70.61	-50.68	121.29	56.45	34.47	12.29	32.6	293	180	P	H
		5775	98.94	-	-	84.6	34.63	12.31	32.6	293	180	P	H
		5775	90.99	-	-	76.65	34.63	12.31	32.6	293	180	A	H
		5852	64.94	-52.7	117.64	50.42	34.8	12.32	32.6	293	180	P	H
		5857	65.31	-44.93	110.24	50.72	34.87	12.32	32.6	293	180	P	H
		5876.4	59.17	-44.99	104.16	44.51	34.93	12.33	32.6	293	180	P	H
		5925.8	53.69	-14.61	68.3	38.88	35.07	12.34	32.6	293	180	P	H
		5643.6	54.74	-13.56	68.3	40.69	34.37	12.28	32.6	296	202	P	V
		5689.4	64.69	-32.71	97.4	50.6	34.4	12.29	32.6	296	202	P	V
		5713.8	69.25	-39.82	109.07	55.13	34.43	12.29	32.6	296	202	P	V
		5723	69.92	-47.72	117.64	55.76	34.47	12.29	32.6	296	202	P	V
		5775	95.75	-	-	81.41	34.63	12.31	32.6	296	202	P	V
		5775	89.44	-	-	75.1	34.63	12.31	32.6	296	202	A	V
		5854.6	62.7	-49.01	111.71	48.11	34.87	12.32	32.6	296	202	P	V
		5869.2	63.05	-43.77	106.82	48.46	34.87	12.32	32.6	296	202	P	V
		5877.2	58.29	-45.28	103.57	43.63	34.93	12.33	32.6	296	202	P	V
		5931.8	53.39	-14.91	68.3	38.58	35.07	12.34	32.6	296	202	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	49.37	-24.63	74	45.57	38.25	16.54	50.99	-	-	P	H
VHT80		17325	50.99	-17.31	68.3	44.07	41.78	18.49	53.35	-	-	P	H
CH 155		11550	50.52	-23.48	74	46.72	38.25	16.54	50.99	-	-	P	V
5775MHz		17325	50.52	-17.78	68.3	43.6	41.78	18.49	53.35	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
5GHz 802.11ac VHT80 LF		45.52	18.97	-21.03	40	31.66	20.25	2.12	35.06	-	-	P	H
		177.44	20.52	-22.98	43.5	34.64	18.32	2.66	35.1	-	-	P	H
		220.12	18.75	-27.25	46	33.91	17.11	2.79	35.06	-	-	P	H
		372.41	22.56	-23.44	46	32.71	21.44	3.27	34.86	-	-	P	H
		515	25.41	-20.59	46	32.39	24.17	3.52	34.67	-	-	P	H
		578.05	25.9	-20.1	46	31.31	25.35	3.78	34.54	-	-	P	H
		30	24.19	-15.81	40	38.49	18.85	1.85	35	-	-	P	V
		106.63	27.79	-15.71	43.5	44.64	15.87	2.47	35.19	-	-	P	V
		178.41	20.06	-23.44	43.5	34.31	18.19	2.66	35.1	-	-	P	V
		410.24	21.84	-24.16	46	31.07	22.24	3.31	34.78	-	-	P	V
		470.38	22.54	-23.46	46	30.41	23.46	3.37	34.7	-	-	P	V
		576.11	25.85	-20.15	46	31.31	25.31	3.78	34.55	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Sample 2

5725~5850 MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 155 5775MHz		5640	57.79	-10.51	68.3	43.74	34.37	12.28	32.6	394	180	P	H
		5695.6	64.28	-37.69	101.97	50.19	34.4	12.29	32.6	394	180	P	H
		5702.8	66.31	-39.68	105.99	52.19	34.43	12.29	32.6	394	180	P	H
		5724.4	68.73	-52.1	120.83	54.57	34.47	12.29	32.6	394	180	P	H
		5775	96.96	-	-	82.62	34.63	12.31	32.6	394	180	P	H
		5775	91.49	-	-	77.15	34.63	12.31	32.6	394	180	A	H
		5850.2	64.07	-57.67	121.74	49.55	34.8	12.32	32.6	394	180	P	H
		5869.2	64.49	-42.33	106.82	49.9	34.87	12.32	32.6	394	180	P	H
		5878.4	59.22	-43.46	102.68	44.56	34.93	12.33	32.6	394	180	P	H
		5930.6	53.93	-14.37	68.3	39.12	35.07	12.34	32.6	394	180	P	H
		5640.8	54.59	-13.71	68.3	40.54	34.37	12.28	32.6	396	218	P	V
		5689	61.8	-35.31	97.11	47.71	34.4	12.29	32.6	396	218	P	V
		5705.8	63.59	-43.24	106.83	49.47	34.43	12.29	32.6	396	218	P	V
		5723.8	63.73	-55.73	119.46	49.57	34.47	12.29	32.6	396	218	P	V
		5775	96.12	-	-	81.78	34.63	12.31	32.6	396	218	P	V
		5775	90.04	-	-	75.7	34.63	12.31	32.6	396	218	A	V
		5853.4	60.43	-54.02	114.45	45.91	34.8	12.32	32.6	396	218	P	V
		5869.2	62.49	-44.33	106.82	47.9	34.87	12.32	32.6	396	218	P	V
		5875.2	56.33	-48.72	105.05	41.67	34.93	12.33	32.6	396	218	P	V
		5944.2	53.4	-14.9	68.3	38.56	35.1	12.34	32.6	396	218	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	49.74	-24.26	74	45.94	38.25	16.54	50.99	-	-	P	H
VHT80		17325	50.7	-17.6	68.3	43.78	41.78	18.49	53.35	-	-	P	H
CH 155		11550	50.2	-23.8	74	46.4	38.25	16.54	50.99	-	-	P	V
5775MHz		17325	50.19	-18.11	68.3	43.27	41.78	18.49	53.35	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Sample 3

5725~5850 MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 155 5775MHz		5634.6	53.59	-14.71	68.3	39.54	34.37	12.28	32.6	394	345	P	H
		5693.4	60.3	-40.05	100.35	46.21	34.4	12.29	32.6	394	345	P	H
		5704.6	63.87	-42.62	106.49	49.75	34.43	12.29	32.6	394	345	P	H
		5723.8	64.05	-55.41	119.46	49.89	34.47	12.29	32.6	394	345	P	H
		5775	94.94	-	-	80.6	34.63	12.31	32.6	394	345	P	H
		5775	88.16	-	-	73.82	34.63	12.31	32.6	394	345	A	H
		5850.6	58.33	-62.5	120.83	43.81	34.8	12.32	32.6	394	345	P	H
		5868.8	60.28	-46.65	106.93	45.69	34.87	12.32	32.6	394	345	P	H
		5877	55.04	-48.68	103.72	40.38	34.93	12.33	32.6	394	345	P	H
		5932.4	52.79	-15.51	68.3	37.98	35.07	12.34	32.6	394	345	P	H
		5647.2	53.95	-14.35	68.3	39.9	34.37	12.28	32.6	396	207	P	V
		5689	60.04	-37.07	97.11	45.95	34.4	12.29	32.6	396	207	P	V
		5720	62.26	-48.54	110.8	48.1	34.47	12.29	32.6	396	207	P	V
		5721.6	63.51	-50.94	114.45	49.35	34.47	12.29	32.6	396	207	P	V
		5775	95.95	-	-	81.61	34.63	12.31	32.6	396	207	P	V
		5775	88.44	-	-	74.1	34.63	12.31	32.6	396	207	A	V
		5851.4	60.68	-58.33	119.01	46.16	34.8	12.32	32.6	396	207	P	V
		5869.2	60	-46.82	106.82	45.41	34.87	12.32	32.6	396	207	P	V
		5876.6	55.01	-49	104.01	40.35	34.93	12.33	32.6	396	207	P	V
		5934	52.34	-15.96	68.3	37.53	35.07	12.34	32.6	396	207	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	48.8	-25.2	74	45	38.25	16.54	50.99	-	-	P	H
VHT80		17325	50.97	-17.33	68.3	44.05	41.78	18.49	53.35	-	-	P	H
CH 155		11550	50.01	-23.99	74	46.21	38.25	16.54	50.99	-	-	P	V
5775MHz		17325	51.35	-16.95	68.3	44.43	41.78	18.49	53.35	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Sample 4

5725~5850 MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 155 5775MHz		5646.4	54.84	-13.46	68.3	40.79	34.37	12.28	32.6	340	320	P	H
		5696.6	62.61	-40.09	102.7	48.52	34.4	12.29	32.6	340	320	P	H
		5712.4	63.79	-44.88	108.67	49.67	34.43	12.29	32.6	340	320	P	H
		5725	65.68	-56.52	122.2	51.51	34.47	12.3	32.6	340	320	P	H
		5775	97.31	-	-	82.97	34.63	12.31	32.6	340	320	P	H
		5775	89.71	-	-	75.37	34.63	12.31	32.6	340	320	A	H
		5853	61.9	-53.46	115.36	47.38	34.8	12.32	32.6	340	320	P	H
		5869.2	61.36	-45.46	106.82	46.77	34.87	12.32	32.6	340	320	P	H
		5875.8	55.9	-48.71	104.61	41.24	34.93	12.33	32.6	340	320	P	H
		5925.2	52.65	-15.65	68.3	37.84	35.07	12.34	32.6	340	320	P	H
		5649.6	55.08	-13.22	68.3	41	34.4	12.28	32.6	337	32	P	V
		5691.4	59.59	-39.29	98.88	45.5	34.4	12.29	32.6	337	32	P	V
		5719.4	64.92	-45.71	110.63	50.76	34.47	12.29	32.6	337	32	P	V
		5721.8	64.11	-50.79	114.9	49.95	34.47	12.29	32.6	337	32	P	V
		5775	95.3	-	-	80.96	34.63	12.31	32.6	337	32	P	V
		5775	87.6	-	-	73.26	34.63	12.31	32.6	337	32	A	V
		5850.6	59.22	-61.61	120.83	44.7	34.8	12.32	32.6	337	32	P	V
		5869.2	60.07	-46.75	106.82	45.48	34.87	12.32	32.6	337	32	P	V
		5876.8	54.22	-49.65	103.87	39.56	34.93	12.33	32.6	337	32	P	V
		5948.4	53.21	-15.09	68.3	38.37	35.1	12.34	32.6	337	32	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	50.19	-23.81	74	46.39	38.25	16.54	50.99	-	-	P	H
VHT80		17325	51.27	-17.03	68.3	44.35	41.78	18.49	53.35	-	-	P	H
CH 155		11550	49.52	-24.48	74	45.72	38.25	16.54	50.99	-	-	P	V
5775MHz		17325	50.77	-17.53	68.3	43.85	41.78	18.49	53.35	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:


1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	96.97	1.392	0.718	1KHz
802.11n HT20	96.76	1.298	0.771	1KHz
802.11n HT40	93.30	0.646	1.549	3KHz
802.11ac VHT80	87.77	0.323	3.101	10KHZ


802.11a

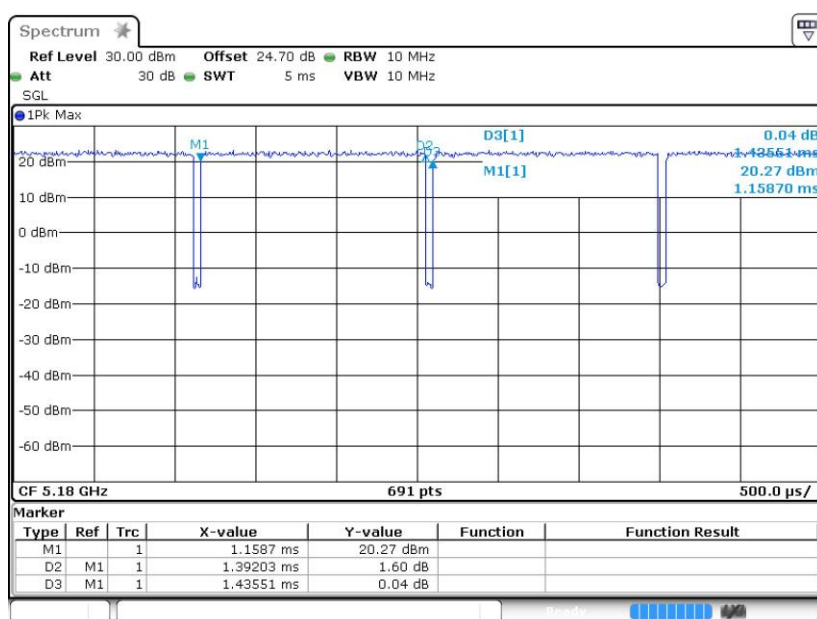

802.11n HT20

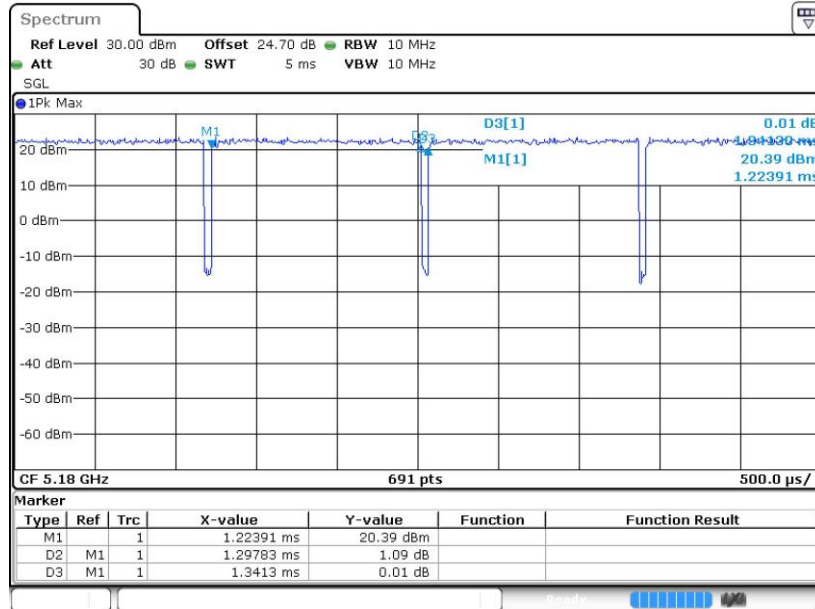

802.11n HT40

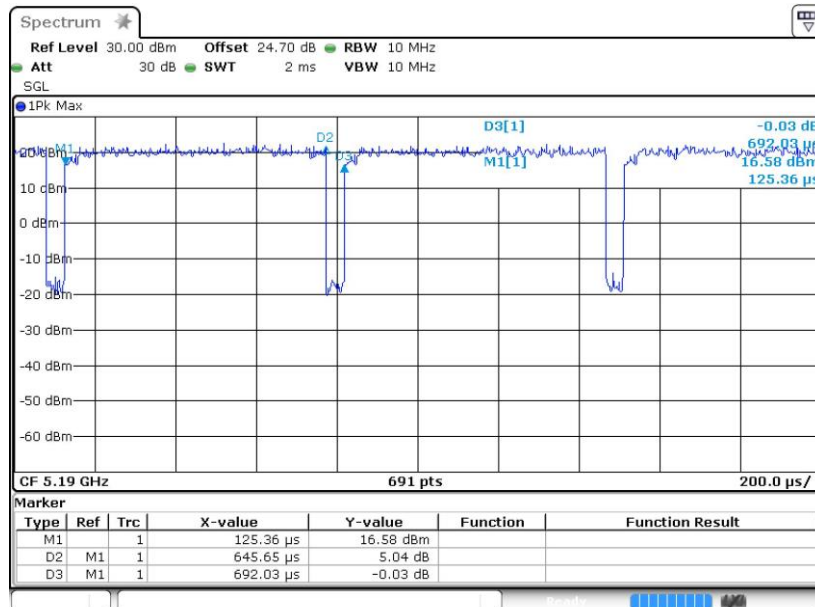

802.11ac VHT80

