

# TEST REPORT

of

FCC Part 15 Subpart C §15.209  
IC RSS-210 Issue 9, RSS-Gen Issue 5

FCC ID: TQ8-IBU-4E05  
IC Certification: 5074A-IBU4E05

Equipment Under Test : SMART KEY ECU  
Model Name : IBU-4E05  
Applicant : Hyundai Mobis Co., Ltd.  
Manufacturer : Hyundai Mobis Co., Ltd.  
Date of Receipt : 2018.11.02  
Date of Test(s) : 2018.11.24 ~ 2018.12.19  
Date of Issue : 2019.01.02

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Nancy Park

Date:

2019.01.02

Technical  
Manager:



Harim Lee

Date:

2019.01.02

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

## Table of contents

|                                                             |    |
|-------------------------------------------------------------|----|
| 1. General information -----                                | 3  |
| 2. Field Strength of Fundamental and Spurious Emission----- | 6  |
| 3. 20 dB Bandwidth -----                                    | 41 |
| 4. Occupied Bandwidth-----                                  | 46 |

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1. General information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- Wireless Div. 2FL, 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

### 1.2. Details of Applicant

Applicant : Hyundai Mobis Co., Ltd.

Address : 203, Teheran-ro, Gangnam-gu, Seoul, South Korea, 135-977

Contact Person : Choe, Seung-Hoon

Phone No. : +82 31 260 0098

### 1.3. Details of Manufacturer

Applicant : Same as applicant

Address : Same as applicant

### 1.4. Description of EUT

|                 |    |                                |
|-----------------|----|--------------------------------|
| Kind of Product |    | SMART KEY ECU                  |
| Model Name      |    | IBU-4E05                       |
| Power Supply    |    | DC 12.0 V                      |
| Frequency Range |    | Tx: 125.00 kHz, Rx: 433.92 MHz |
| Antenna Type    | Tx | External Type (Coil Antenna)   |
|                 | Rx | Internal Type                  |

### 1.5. Declaration of manufacturer

- The EUT has 7 transmit antennas and one receive antenna.
- The transmit antennas can not operate at the same time.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 1.6. Test Equipment List

| Equipment         | Manufacturer                   | Model                                | S/N                       | Cal. Date     | Cal. Interval | Cal. Due      |
|-------------------|--------------------------------|--------------------------------------|---------------------------|---------------|---------------|---------------|
| Spectrum Analyzer | R&S                            | FSV30                                | 100768                    | Mar. 12, 2018 | Annual        | Mar. 12, 2019 |
| Signal Generator  | R&S                            | SMBV100A                             | 255834                    | Jun. 15, 2018 | Annual        | Jun. 15, 2019 |
| DC Power Supply   | Agilent                        | U8002A                               | MY50060028                | Mar. 15, 2018 | Annual        | Mar. 15, 2019 |
| Test Receiver     | R&S                            | ESU26                                | 100109                    | Feb. 07, 2018 | Annual        | Feb. 07, 2019 |
| Loop Antenna      | Schwarzbeck<br>Mess-Elektronik | FMZB 1519                            | 1519-039                  | Aug. 23, 2017 | Biennial      | Aug. 23, 2019 |
| Turn Table        | Innco systems<br>GmbH          | DS 1200 S                            | N/A                       | N. C. R.      | N/A           | N. C. R.      |
| Controller        | Innco systems<br>GmbH          | CONTROLLER<br>CO3000-4P              | CO3000/963/3<br>8330516/L | N. C. R.      | N/A           | N. C. R.      |
| Anechoic Chamber  | SY Corporation                 | L × W × H<br>(9.6 m × 6.4 m × 6.6 m) | N/A                       | N. C. R.      | N/A           | N. C. R.      |
| Coaxial Cable     | SUCOFLEX                       | 104 (3 m)                            | MY3258414                 | Jul. 04, 2018 | Semi-annual   | Jan. 04, 2019 |
| Coaxial Cable     | SUCOFLEX                       | 104 (10 m)                           | MY3145814                 | Jul. 04, 2018 | Semi-annual   | Jan. 04, 2019 |

## 1.7. Sample Calculation

Where relevant, the following sample calculation is provided:

Field strength level (dB $\mu$ V/m) = Measured level (dB $\mu$ V) + Antenna factor (dB) + Cable loss (dB)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm × 297 mm)

## 1.8. Summary of Test Results

The EUT has been tested according to the following specifications:

| Applied standard: FCC Part15 subpart C, IC RSS-210 Issue 9, RSS-Gen Issue 5 |                                                     |                                                                              |          |
|-----------------------------------------------------------------------------|-----------------------------------------------------|------------------------------------------------------------------------------|----------|
| FCC Section                                                                 | IC Section                                          | Test Item                                                                    | Result   |
| 15.209                                                                      | RSS-210 Issue 9,<br>4.4,<br>RSS-Gen Issue 5,<br>8.9 | Radiated emission,<br>Spurious Emission and<br>Field Strength of Fundamental | Complied |
| 2.1049                                                                      | -                                                   | 20 dB Bandwidth                                                              | Complied |
| -                                                                           | RSS-Gen Issue 5,<br>6.7                             | Occupied Bandwidth                                                           | Complied |

## 1.9. Test Report Revision

| Revision | Report number          | Date of Issue | Description                                                                                                                        |
|----------|------------------------|---------------|------------------------------------------------------------------------------------------------------------------------------------|
| 0        | F690501/RF-RTL013324   | 2018.12.20    | Initial                                                                                                                            |
| 1        | F690501/RF-RTL013324-1 | 2019.01.02    | Corrected details of applicant and<br>description of antenna type and<br>Added information about the ISED field<br>strength limit. |

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2. Field Strength of Fundamental and Spurious Emission

### 2.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission below 30 MHz.

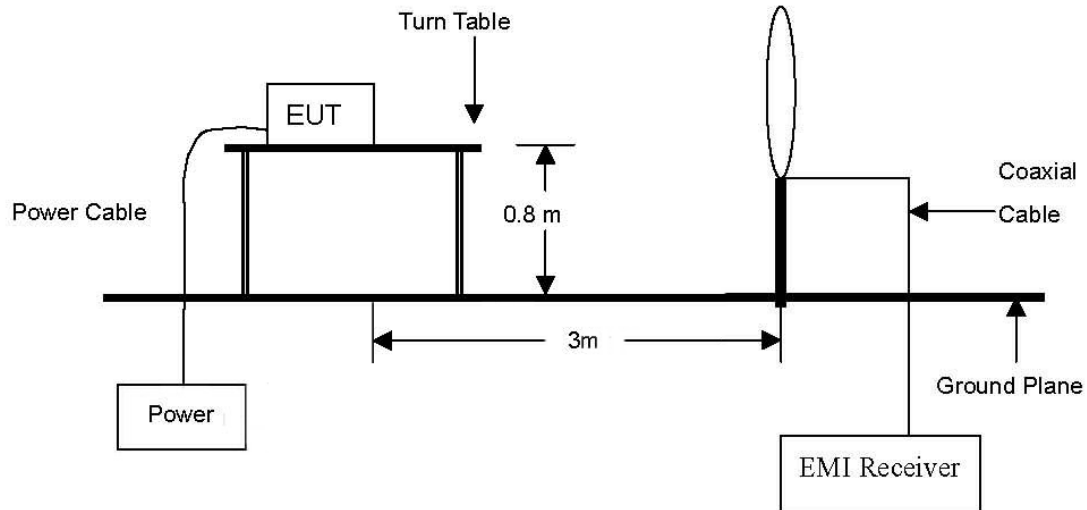

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.2. Limits

### 2.2.1. FCC

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meter) |
|--------------------|--------------------------------------|---------------------------------|
| 0.009-0.490        | 2 400/F(kHz)                         | 300                             |
| 0.490-1.705        | 24 000/F(kHz)                        | 30                              |
| 1.705-30.0         | 30                                   | 30                              |
| 30-88              | 100**                                | 3                               |
| 88-216             | 150**                                | 3                               |
| 216-960            | 200**                                | 3                               |
| Above 960          | 500                                  | 3                               |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

According to §15.209 (d), The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.2.2. IC

### 2.2.2.1. Transmitter emission limits

According to RSS-Gen Issue 5, 8.9.

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5 - General field strength limits at frequencies above 30 MHz**

| Frequency (MHz) | Field Strength ( $\mu V/m$ at 3 m) |
|-----------------|------------------------------------|
| 30-88           | 100                                |
| 88-216          | 150                                |
| 216-960         | 200                                |
| Above 960       | 500                                |

**Table 6 - General field strength limits at frequencies below 30 MHz**

| Frequency              | Magnetic Field Strength (H-Field) ( $\mu A/m$ ) | Measurement Distance (m) |
|------------------------|-------------------------------------------------|--------------------------|
| 9-490 kHz <sup>1</sup> | 6.37/F (F in kHz)                               | 300                      |
| 490-1 705 kHz          | 63.7/F (F in kHz)                               | 30                       |
| 1.705-30 MHz           | 0.08                                            | 30                       |

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10-2013.

### 2.3.1. Test Procedures for emission from 9 kHz to 30 MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes (X, Y, Z). Worst orthogonal plan of EUT is **X – axis** during radiation test.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.4. Field Strength of Fundamental Test Result

Ambient temperature : (23 ± 1) °C  
Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. The field strength of spurious emission was measured in one orthogonal EUT position (x-axis). Definition of DUT for a orthogonal plane was described in the test setup photo.

| Radiated Emissions |                |             | Ant. | Correction Factors |            | Total                  |                          | Limit                   |             |
|--------------------|----------------|-------------|------|--------------------|------------|------------------------|--------------------------|-------------------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | Ant. (dB/m)        | Cable (dB) | Actual (dBμV/m) at 3 m | Actual (dBμV/m) at 300 m | Limit (dBμV/m) at 300 m | Margin (dB) |
| DRV Antenna        |                |             |      |                    |            |                        |                          |                         |             |
| 0.121              | 60.90          | Average     | H    | 19.69              | 0.06       | 80.65                  | 0.65                     | 25.95                   | 25.30       |
| AST Antenna        |                |             |      |                    |            |                        |                          |                         |             |
| 0.121              | 62.50          | Average     | H    | 19.69              | 0.06       | 82.25                  | 2.25                     | 25.95                   | 23.70       |
| BUM Antenna        |                |             |      |                    |            |                        |                          |                         |             |
| 0.121              | 61.80          | Average     | H    | 19.69              | 0.06       | 81.55                  | 1.55                     | 25.95                   | 24.40       |
| INT1 Antenna       |                |             |      |                    |            |                        |                          |                         |             |
| 0.121              | 60.40          | Average     | H    | 19.69              | 0.06       | 80.15                  | 0.15                     | 25.95                   | 25.80       |
| INT2 Antenna       |                |             |      |                    |            |                        |                          |                         |             |
| 0.121              | 60.40          | Average     | H    | 19.69              | 0.06       | 80.15                  | 0.15                     | 25.95                   | 25.80       |
| TNK Antenna        |                |             |      |                    |            |                        |                          |                         |             |
| 0.121              | 60.00          | Average     | H    | 19.69              | 0.06       | 79.75                  | -0.25                    | 25.95                   | 26.20       |
| SSB Antenna        |                |             |      |                    |            |                        |                          |                         |             |
| 0.125              | 69.80          | Average     | H    | 19.69              | 0.07       | 89.56                  | 9.56                     | 25.67                   | 16.11       |


### Remark;

1. According to §15.31 (f)(2) 300 m Result (dBμV/m) = 3 m Result (dBμV/m) - 40log(300/3) (dBμV/m).
2. According to §15.209 (d), the measurements were tested by using Quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1 GHz in these three bands on measurements employing an average detector.
3. The limit above was calculated based on table of §15.209 (a).
4. According to ANSI C63.10: 2013, For measurement below 30 MHz.  
conversion factor from E-field to H-field is considered as free-space impedance [1 μV/m = (1/377 Ω) × 1 μA/m]  
The FCC limits are same to the IC limits.


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - Test plots

### - DRV Antenna

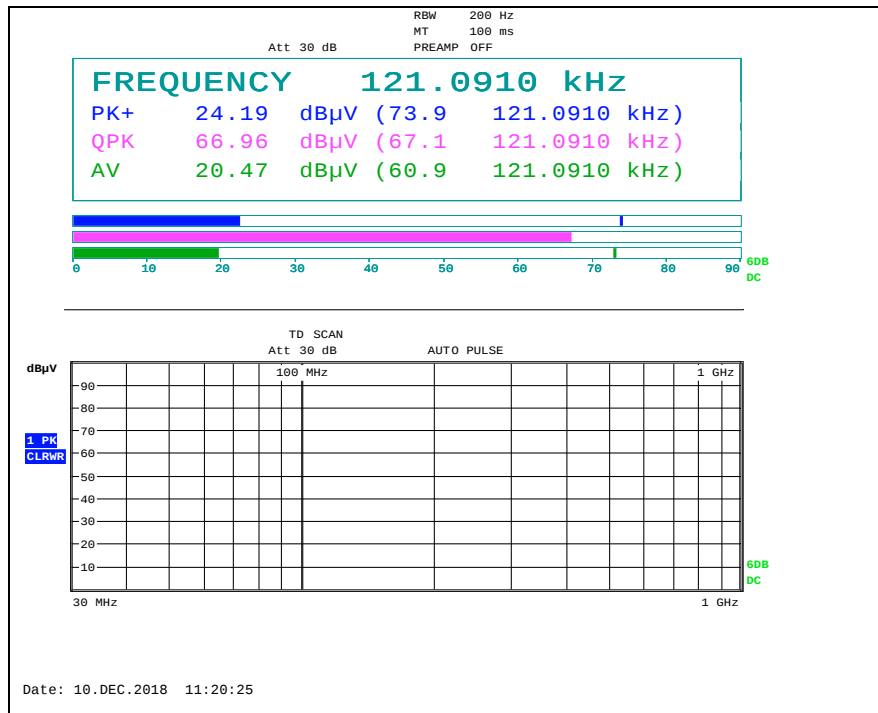


### - AST Antenna

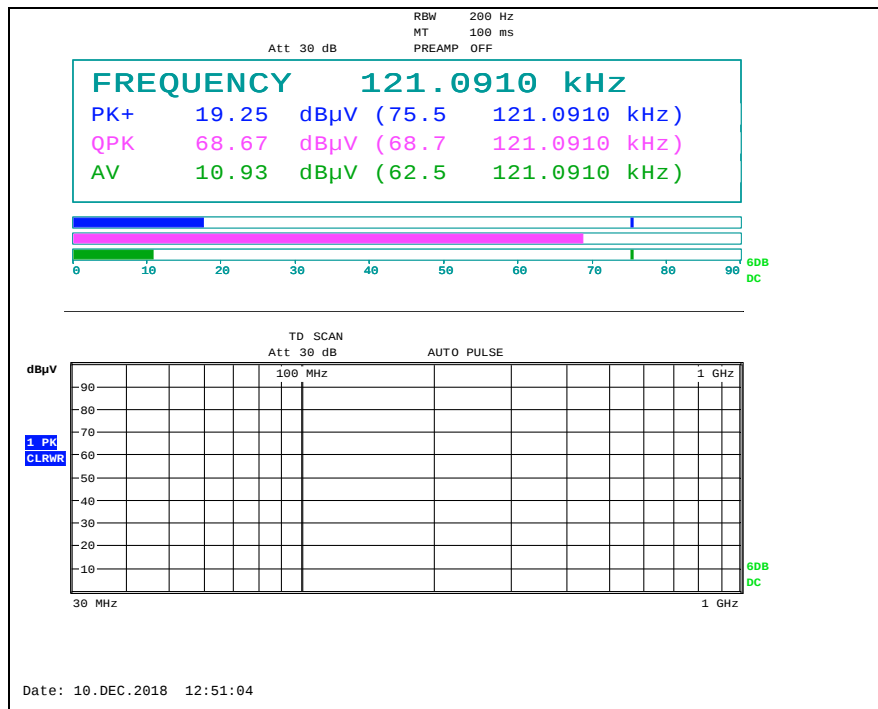


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - BUM Antenna

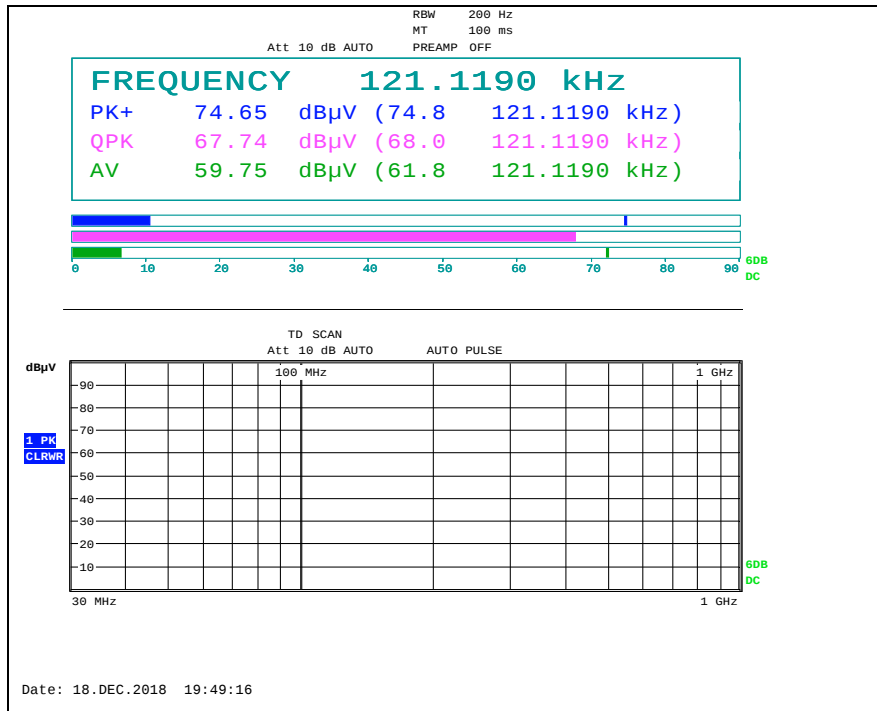


## - INT1 Antenna

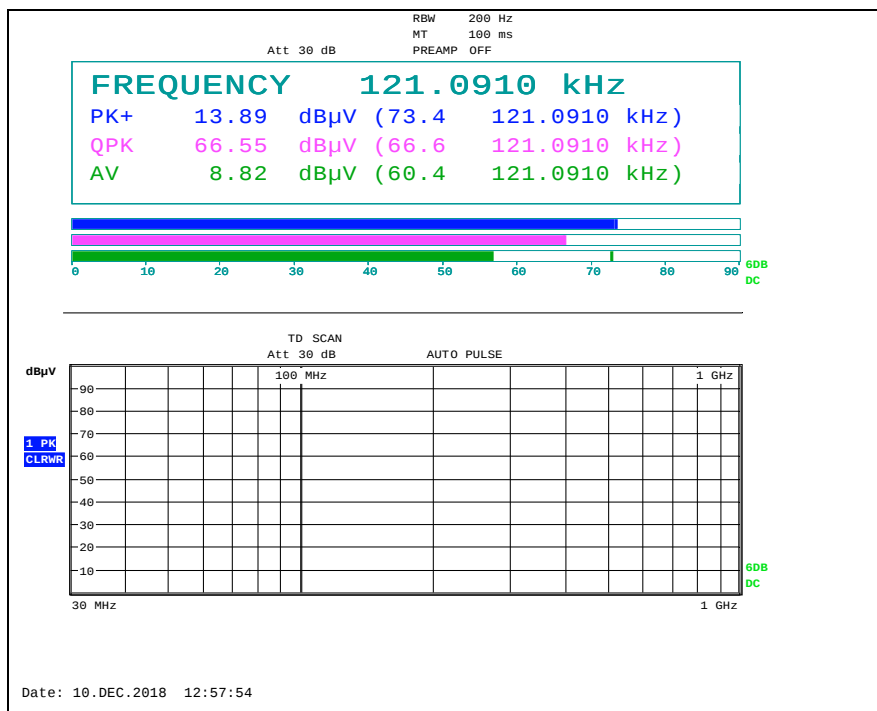


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - INT2 Antenna

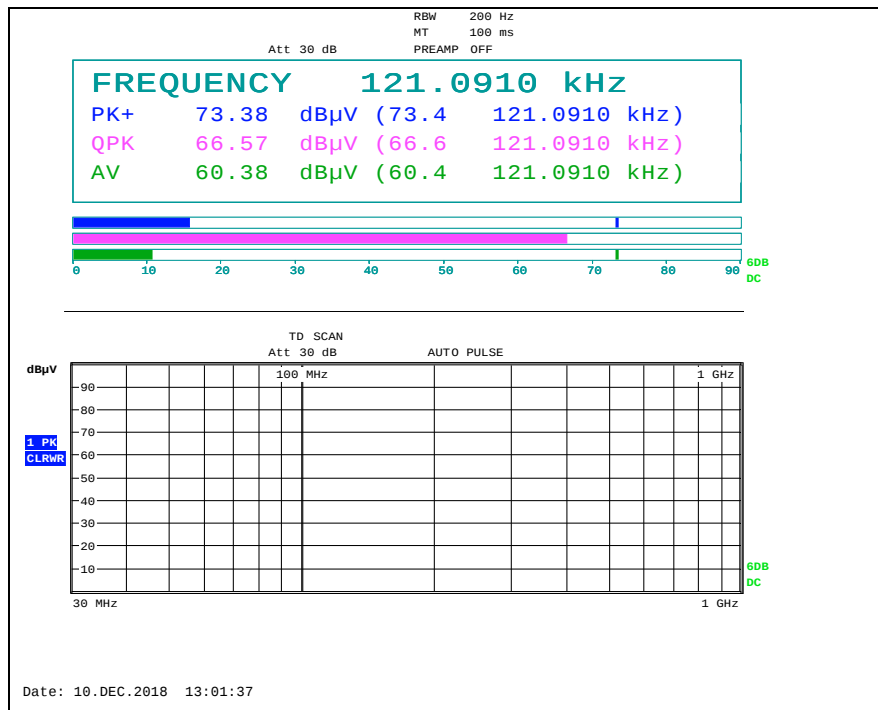


## - TNK Antenna

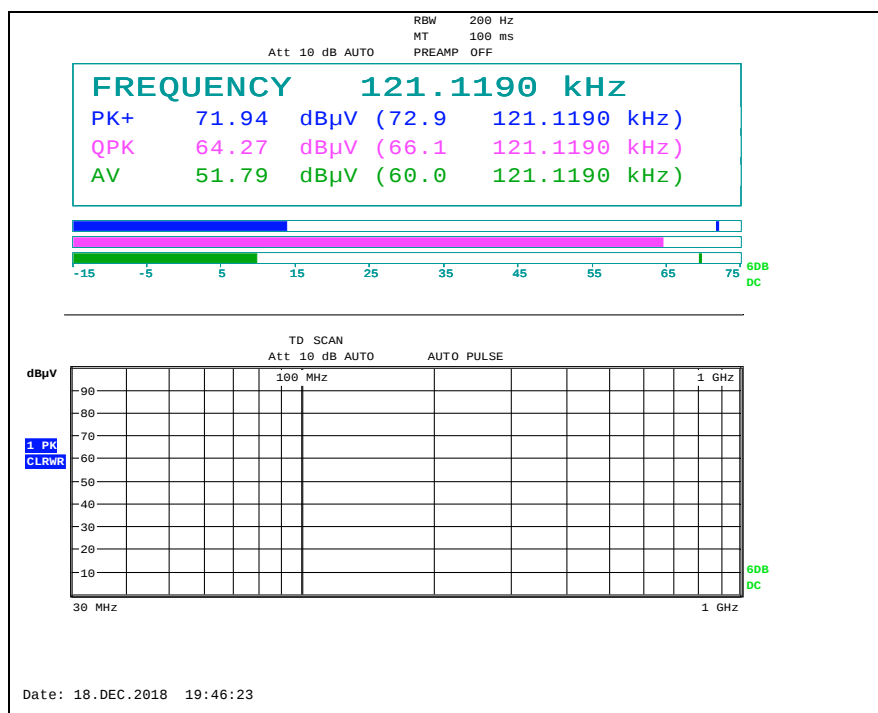

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - SSB Antenna

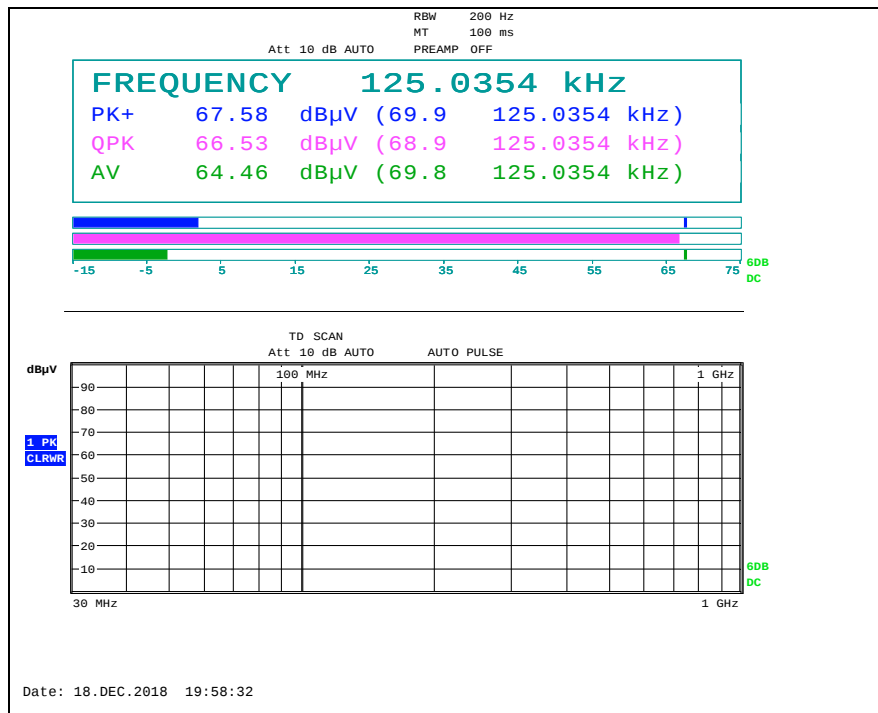

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## 2.5. Spurious Emission Test Result

Ambient temperature : (23 ± 1) °C  
Relative humidity : 47 % R.H.

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

| Radiated Emissions |                |             | Ant. | Correction Factors |            | Total                  |                                  | Limit                           |             |
|--------------------|----------------|-------------|------|--------------------|------------|------------------------|----------------------------------|---------------------------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | Ant. (dB/m)        | Cable (dB) | Actual (dBμV/m) at 3 m | Actual (dBμV/m) at 30 m or 300 m | Limit (dBμV/m) at 30 m or 300 m | Margin (dB) |
| DRV Antenna        |                |             |      |                    |            |                        |                                  |                                 |             |
| 0.021              | 33.70          | Average     | H    | 19.94              | 0.01       | 53.65                  | -26.35                           | 41.16                           | 67.51       |
| 0.047              | 28.70          | Average     | H    | 19.78              | 0.02       | 48.50                  | -31.50                           | 34.16                           | 65.66       |
| 0.068              | 26.70          | Average     | H    | 19.75              | 0.03       | 46.48                  | -33.52                           | 30.95                           | 64.47       |
| 0.098              | 16.80          | Quasi-Peak  | H    | 19.70              | 0.04       | 36.54                  | -43.46                           | 27.78                           | 71.24       |
| 3.786              | 5.50           | Quasi-Peak  | H    | 19.92              | 0.41       | 25.83                  | -14.17                           | 30.00                           | 44.17       |
| Above 4.000        | Not detected   | -           | -    | -                  | -          | -                      | -                                | -                               | -           |
| AST Antenna        |                |             |      |                    |            |                        |                                  |                                 |             |
| 0.023              | 32.50          | Average     | H    | 19.91              | 0.01       | 52.42                  | -27.58                           | 40.37                           | 67.95       |
| 0.068              | 27.10          | Average     | H    | 19.75              | 0.03       | 46.88                  | -33.12                           | 30.95                           | 64.07       |
| 3.690              | 5.30           | Quasi-Peak  | H    | 19.90              | 0.42       | 25.62                  | -14.38                           | 30.00                           | 44.38       |
| Above 4.000        | Not detected   | -           | -    | -                  | -          | -                      | -                                | -                               | -           |
| BUM Antenna        |                |             |      |                    |            |                        |                                  |                                 |             |
| 0.018              | 34.30          | Average     | H    | 19.98              | 0.01       | 54.29                  | -25.71                           | 42.50                           | 68.21       |
| 0.069              | 29.20          | Average     | H    | 19.74              | 0.03       | 48.97                  | -31.03                           | 30.83                           | 61.86       |
| 2.494              | 6.70           | Quasi-Peak  | H    | 19.77              | 0.58       | 27.05                  | -12.95                           | 30.00                           | 42.95       |
| Above 3.000        | Not detected   | -           | -    | -                  | -          | -                      | -                                | -                               | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

| Radiated Emissions |                      |             | Ant. | Correction Factors |            | Total                        |                                        | Limit                                 |             |
|--------------------|----------------------|-------------|------|--------------------|------------|------------------------------|----------------------------------------|---------------------------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | Ant. (dB/m)        | Cable (dB) | Actual (dB $\mu$ V/m) at 3 m | Actual (dB $\mu$ V/m) at 30 m or 300 m | Limit (dB $\mu$ V/m) at 30 m or 300 m | Margin (dB) |
| INT1 Antenna       |                      |             |      |                    |            |                              |                                        |                                       |             |
| 0.018              | 34.74                | Average     | H    | 19.98              | 0.01       | 54.73                        | -25.27                                 | 42.50                                 | 67.77       |
| 0.069              | 29.30                | Average     | H    | 19.74              | 0.03       | 49.07                        | -30.93                                 | 30.83                                 | 61.76       |
| 0.963              | 8.81                 | Quasi-Peak  | H    | 19.69              | 0.75       | 29.25                        | -10.75                                 | 27.93                                 | 38.68       |
| Above 1.000        | Not detected         | -           | -    | -                  | -          | -                            | -                                      | -                                     | -           |
| INT2 Antenna       |                      |             |      |                    |            |                              |                                        |                                       |             |
| 0.019              | 38.90                | Average     | H    | 19.97              | 0.01       | 58.88                        | -21.12                                 | 42.03                                 | 63.15       |
| 0.068              | 27.10                | Average     | H    | 19.75              | 0.03       | 46.88                        | -33.12                                 | 30.95                                 | 64.07       |
| 1.059              | 11.20                | Quasi-Peak  | H    | 19.70              | 0.77       | 31.67                        | -8.33                                  | 27.11                                 | 35.44       |
| Above 2.000        | Not detected         | -           | -    | -                  | -          | -                            | -                                      | -                                     | -           |
| TNK Antenna        |                      |             |      |                    |            |                              |                                        |                                       |             |
| 0.019              | 39.00                | Average     | H    | 19.97              | 0.01       | 58.98                        | -21.02                                 | 42.03                                 | 63.05       |
| 0.068              | 26.60                | Average     | H    | 19.75              | 0.03       | 46.38                        | -33.62                                 | 30.95                                 | 64.57       |
| 0.676              | 11.60                | Quasi-Peak  | H    | 19.64              | 0.52       | 31.76                        | -8.24                                  | 31.01                                 | 39.25       |
| Above 1.000        | Not detected         | -           | -    | -                  | -          | -                            | -                                      | -                                     | -           |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

| Radiated Emissions |                      |             | Ant. | Correction Factors |            | Total                        |                                        | Limit                                 |             |
|--------------------|----------------------|-------------|------|--------------------|------------|------------------------------|----------------------------------------|---------------------------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | Ant. (dB/m)        | Cable (dB) | Actual (dB $\mu$ V/m) at 3 m | Actual (dB $\mu$ V/m) at 30 m or 300 m | Limit (dB $\mu$ V/m) at 30 m or 300 m | Margin (dB) |
| SSB Antenna        |                      |             |      |                    |            |                              |                                        |                                       |             |
| 0.019              | 37.70                | Average     | H    | 19.97              | 0.01       | 57.68                        | -22.32                                 | 42.03                                 | 64.35       |
| 0.068              | 27.00                | Average     | H    | 19.75              | 0.03       | 46.78                        | -33.22                                 | 30.95                                 | 64.17       |
| 0.351              | 13.50                | Average     | H    | 19.60              | 0.27       | 33.37                        | -46.63                                 | 16.70                                 | 63.33       |
| 0.703              | 20.50                | Quasi-Peak  | H    | 19.64              | 0.55       | 40.69                        | 0.69                                   | 30.67                                 | 29.98       |
| Above 1.000        | Not detected         | -           | -    | -                  | -          | -                            | -                                      | -                                     | -           |

#### Remark;


- According to §15.31 (f)(2)
  - 300 m Result (dB $\mu$ V/m) = 3 m Result (dB $\mu$ V/m) - 40log(300/3) (dB $\mu$ V/m)
  - 30 m Result (dB $\mu$ V/m) = 3 m Result (dB $\mu$ V/m) - 40log(30/3) (dB $\mu$ V/m)
- According to field strength table of general requirement in §15.209 (a), field strength limits below 1.705 MHz were calculated as below.
  - 9 kHz to 490 kHz: 20log(2 400 / F (kHz)) at 300 m (dB $\mu$ V/m)
  - 490 kHz to 1 705 kHz: 20log(24 000 / F (kHz)) at 30 m (dB $\mu$ V/m)
- According to §15.209 (d), the measurements were tested by using Quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1 GHz in these three bands on measurements employing an average detector.
- According to ANSI C63.10: 2013, For measurement below 30 MHz.  
conversion factor from E-field to H-field is considered as free-space impedance [1  $\mu$ V/m = (1/377  $\Omega$ )  $\times$  1  $\mu$ A/m]  
The FCC limits are same to the IC limits.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - Test plots



## - DRV Antenna

## Scanning plots below 30 MHz


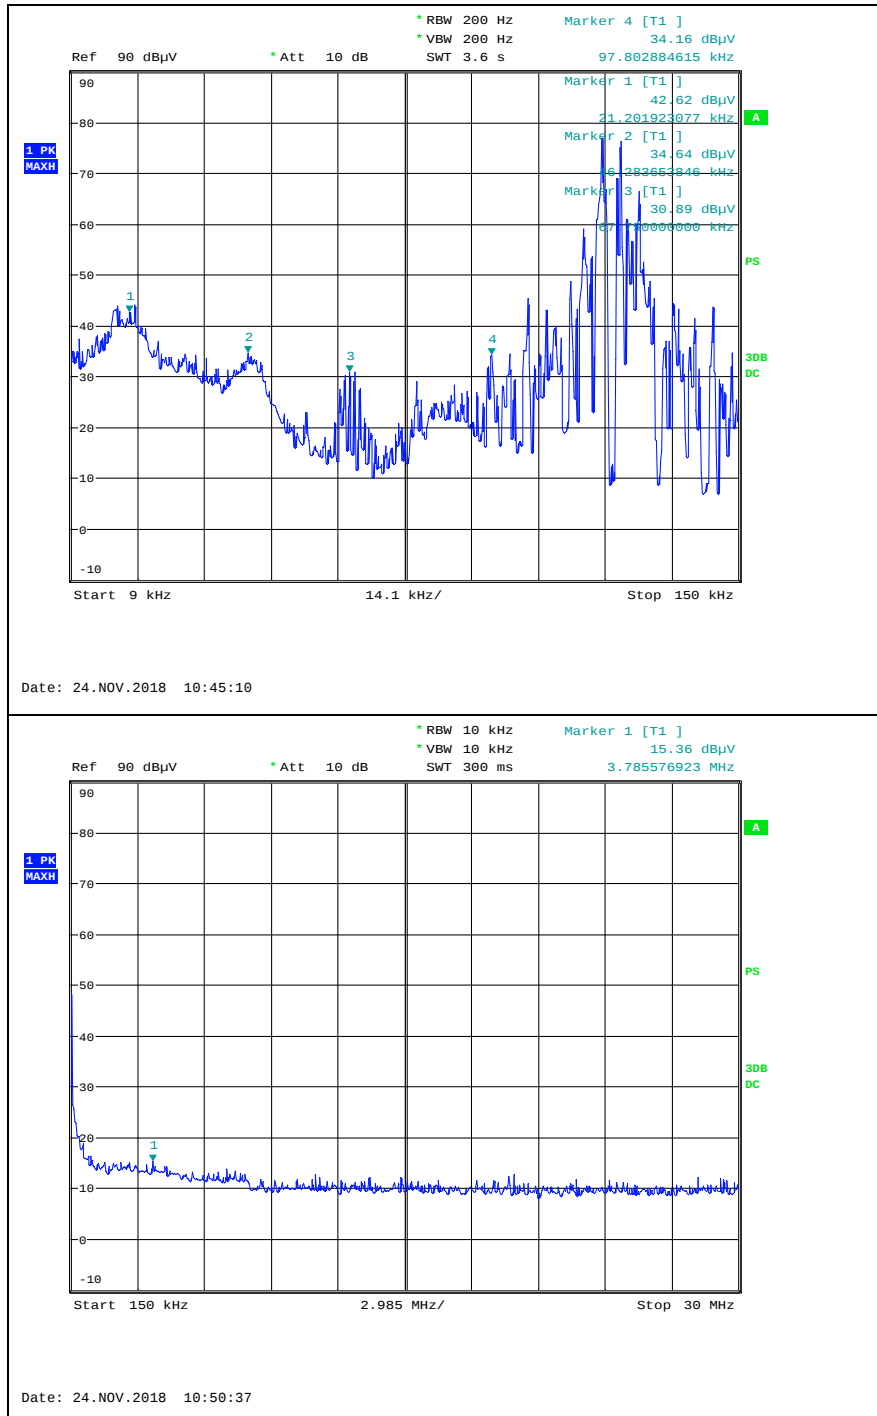


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## Measured plots below 30 MHz

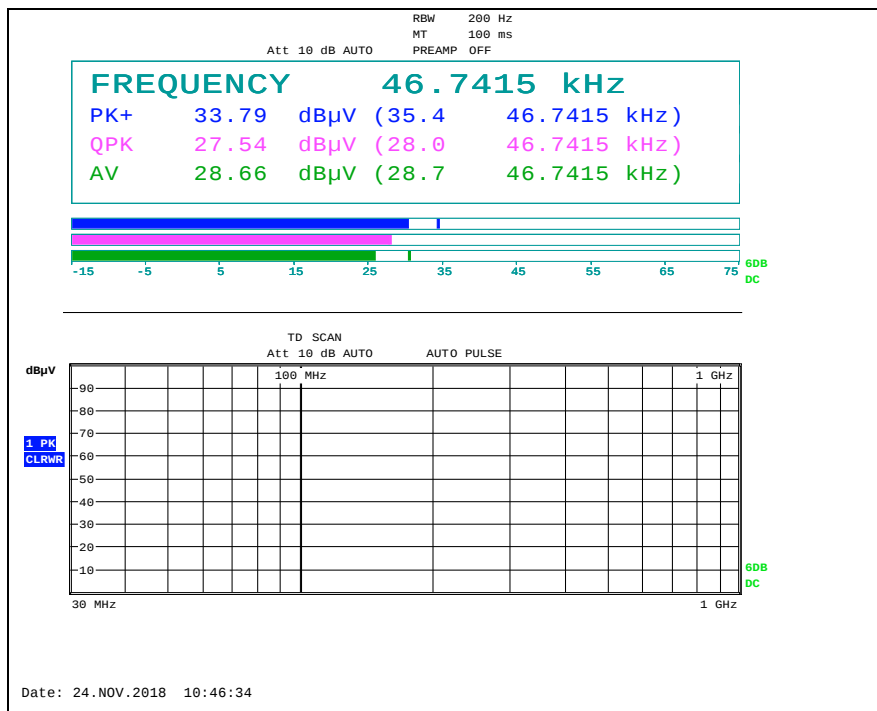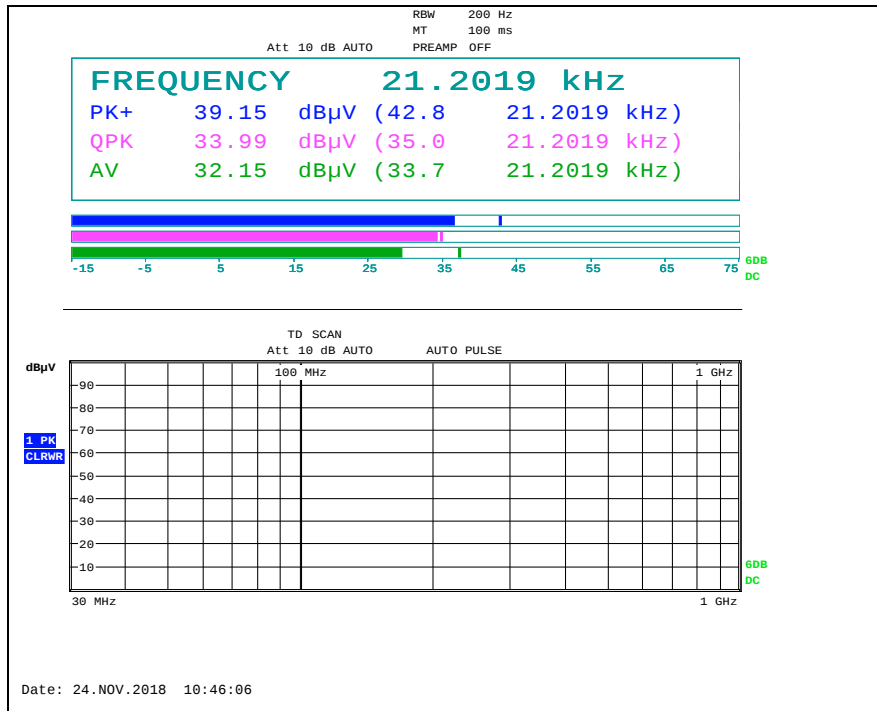

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

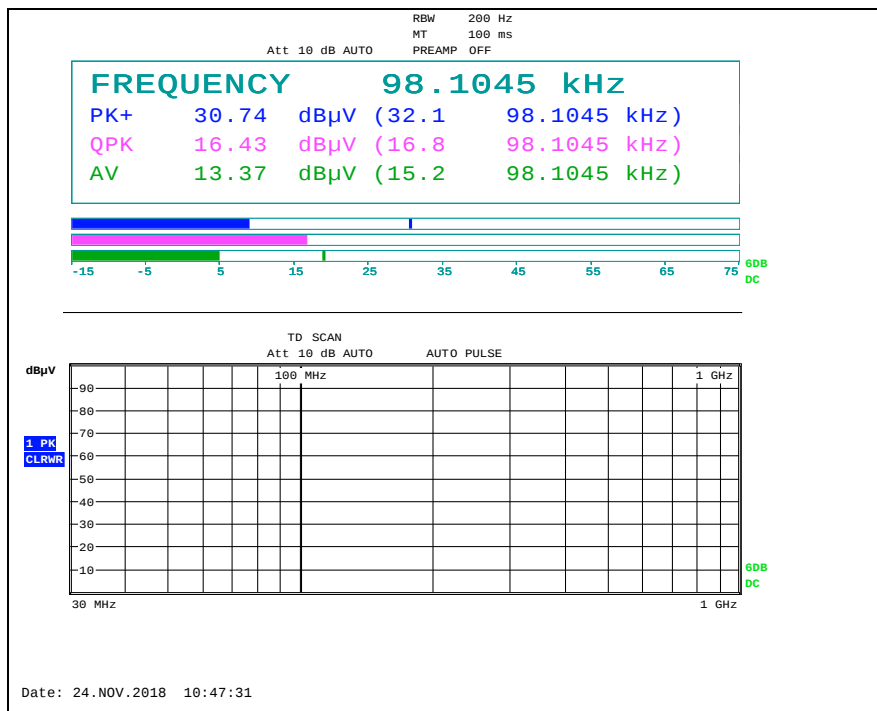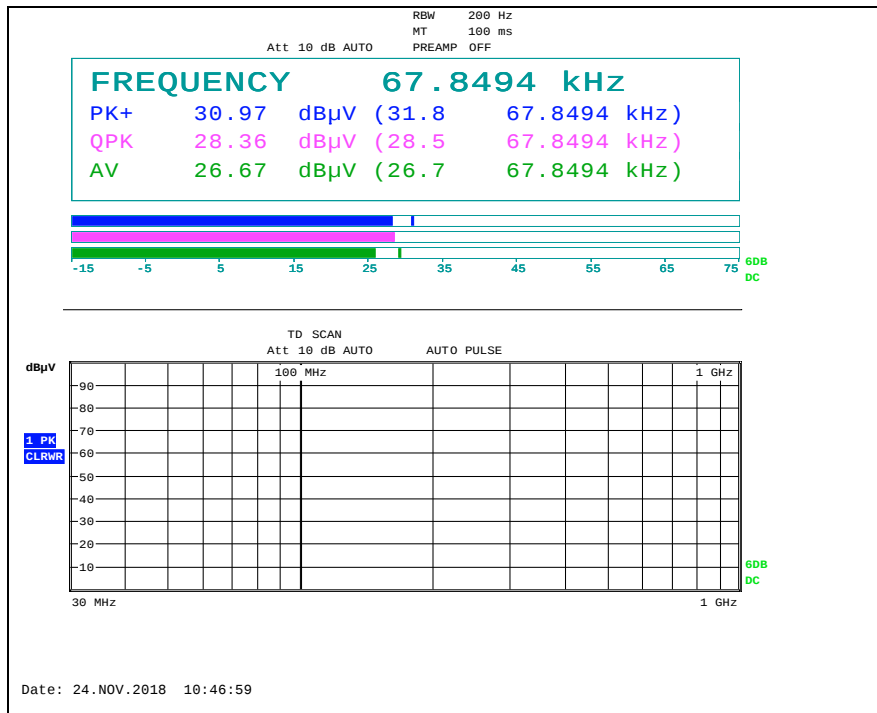


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.





## - AST Antenna

### Scanning plots below 30 MHz

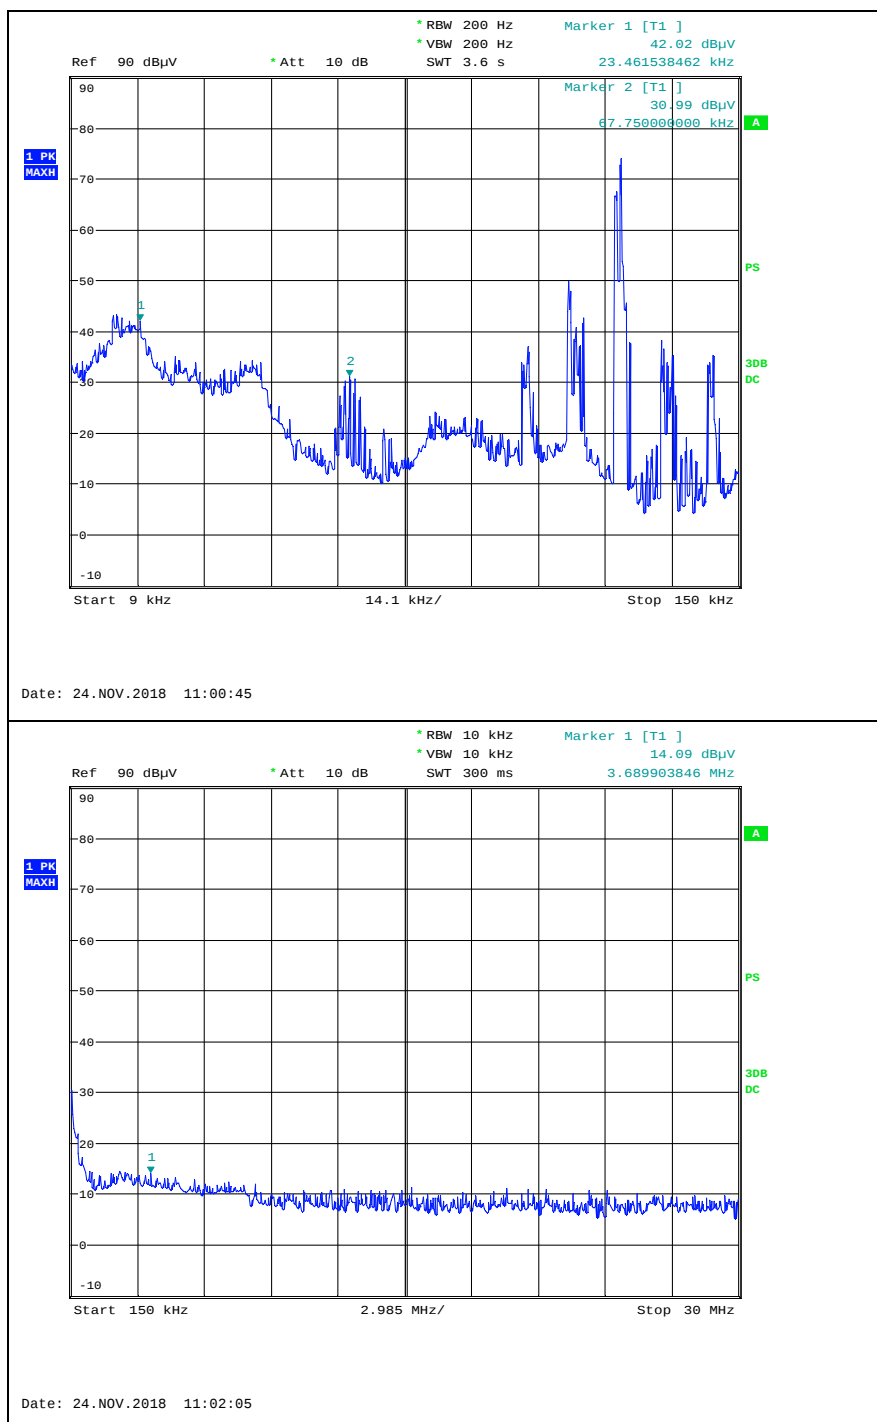


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## Measured plots below 30 MHz

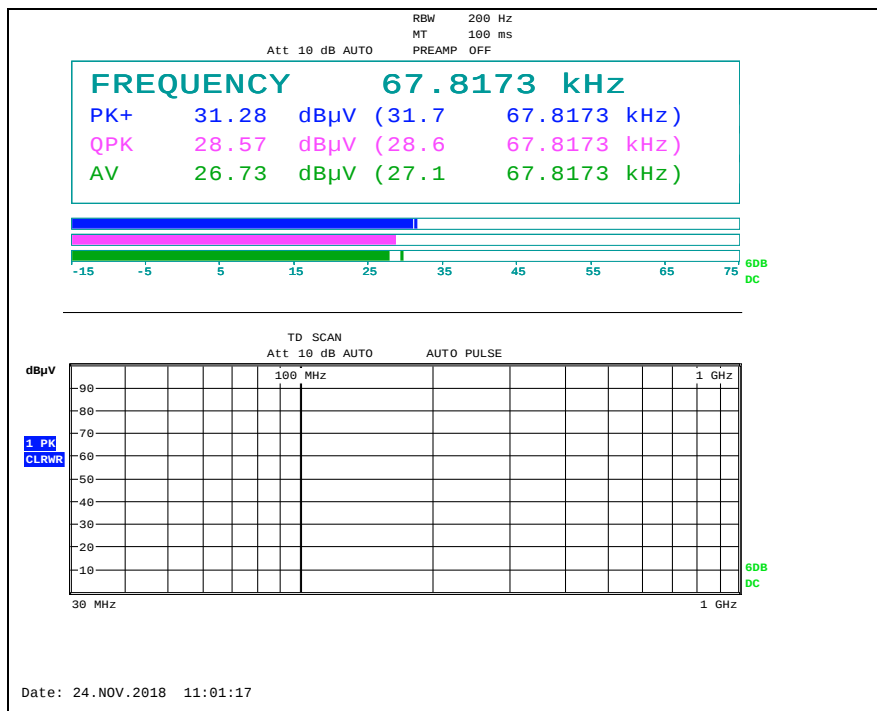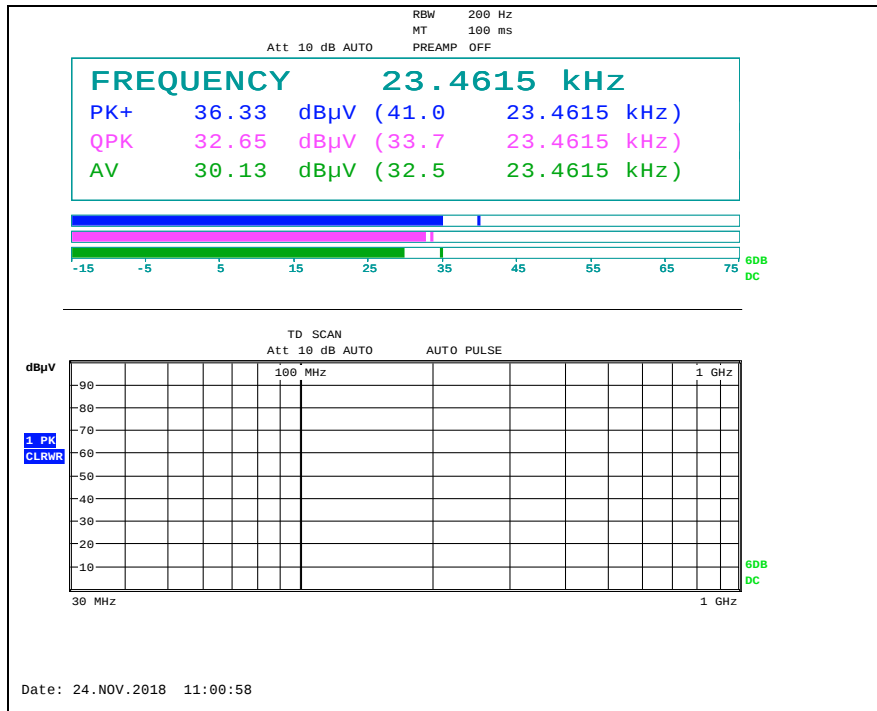


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

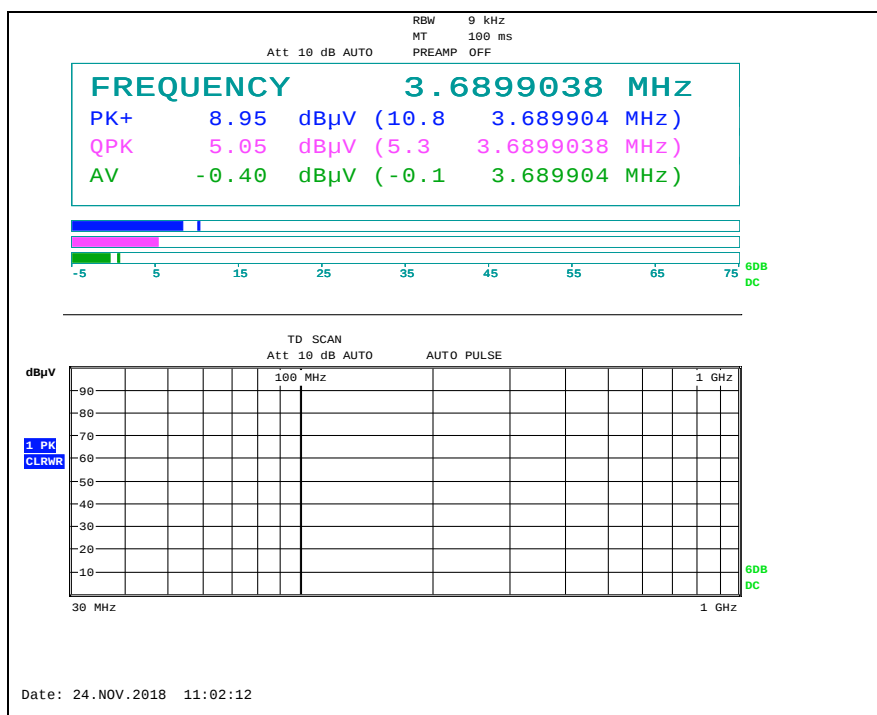

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



## - BUM Antenna

### Scanning plots below 30 MHz

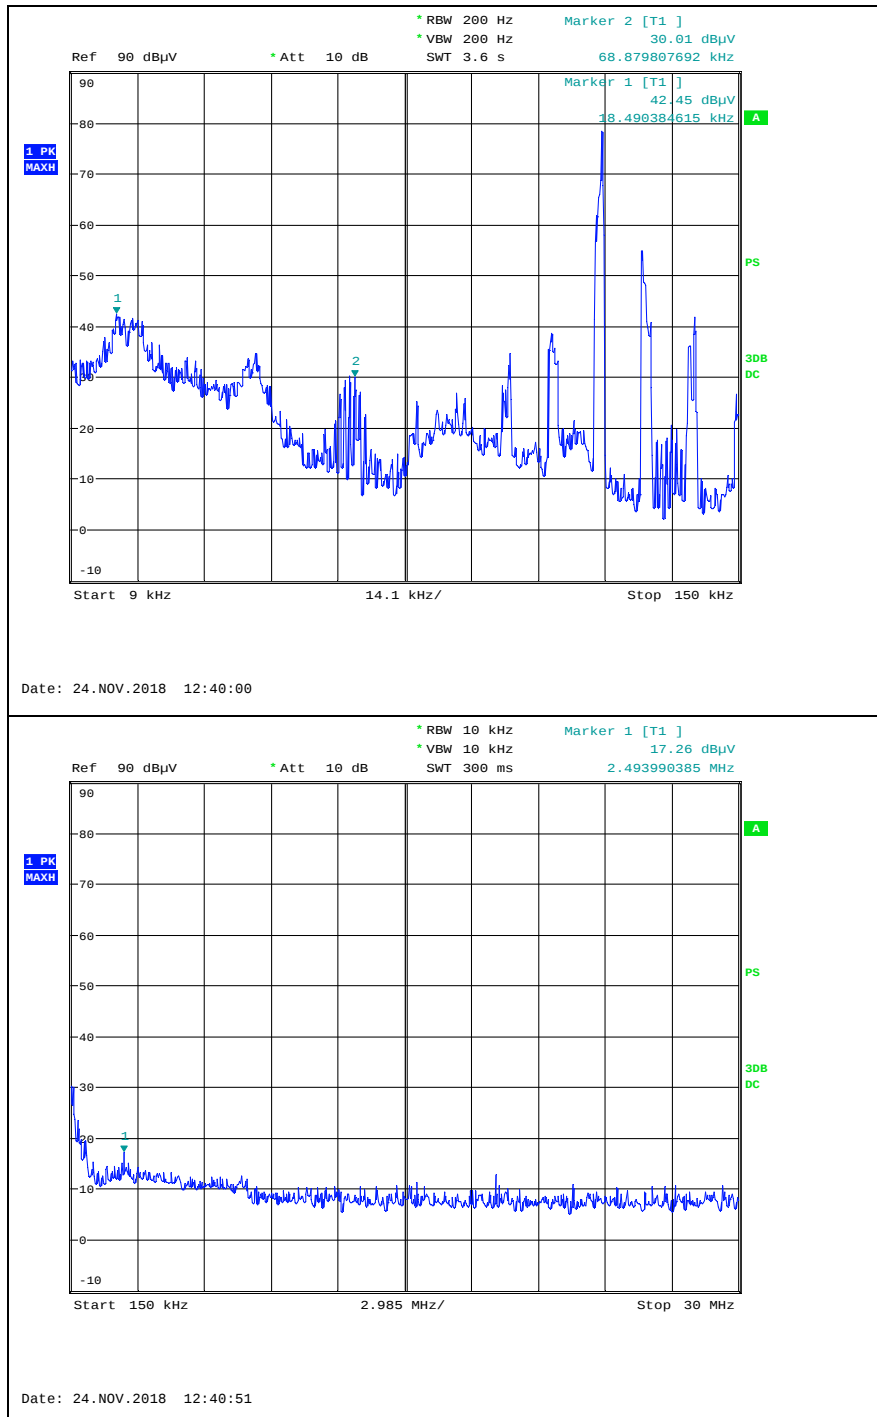


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## Measured plots below 30 MHz

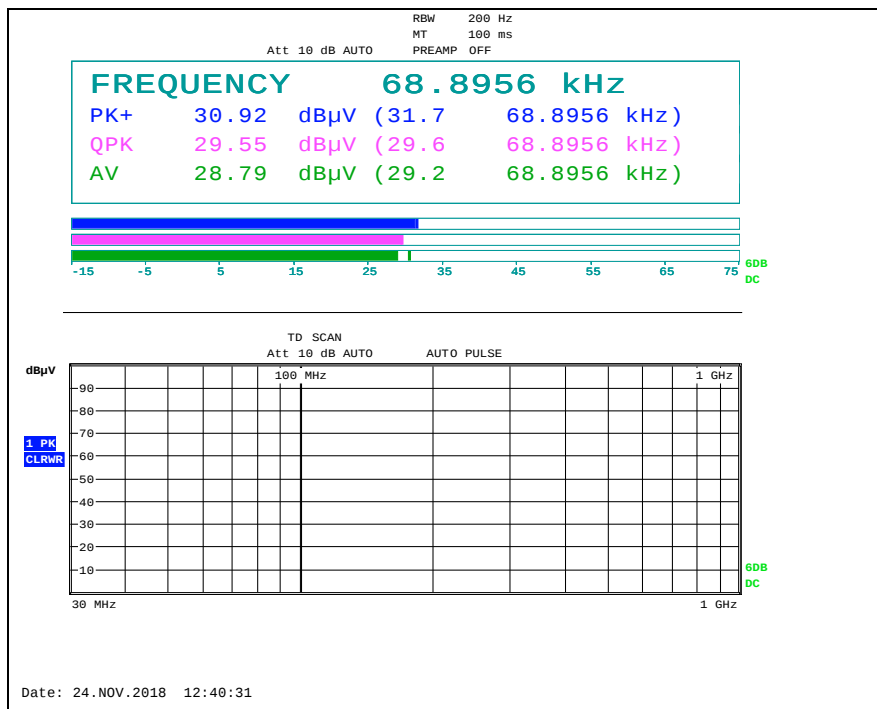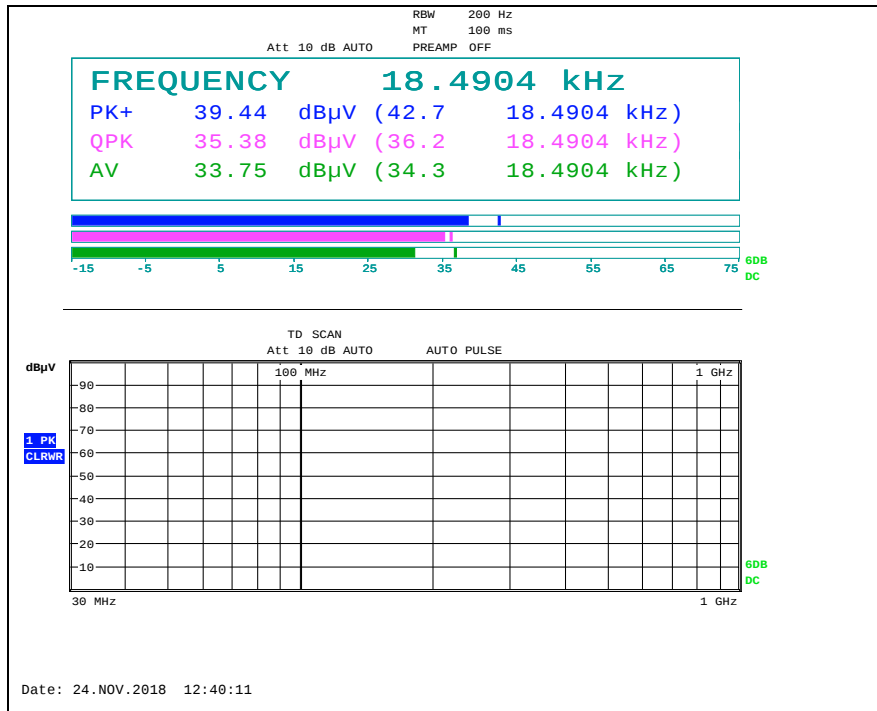

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

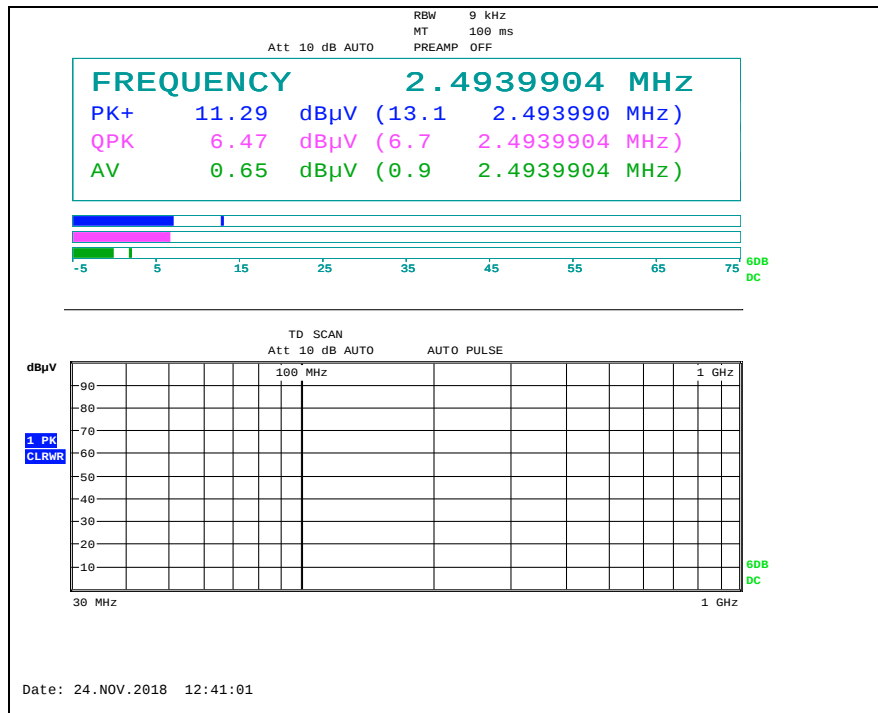

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)



## - INT1 Antenna

### Scanning plots below 30 MHz

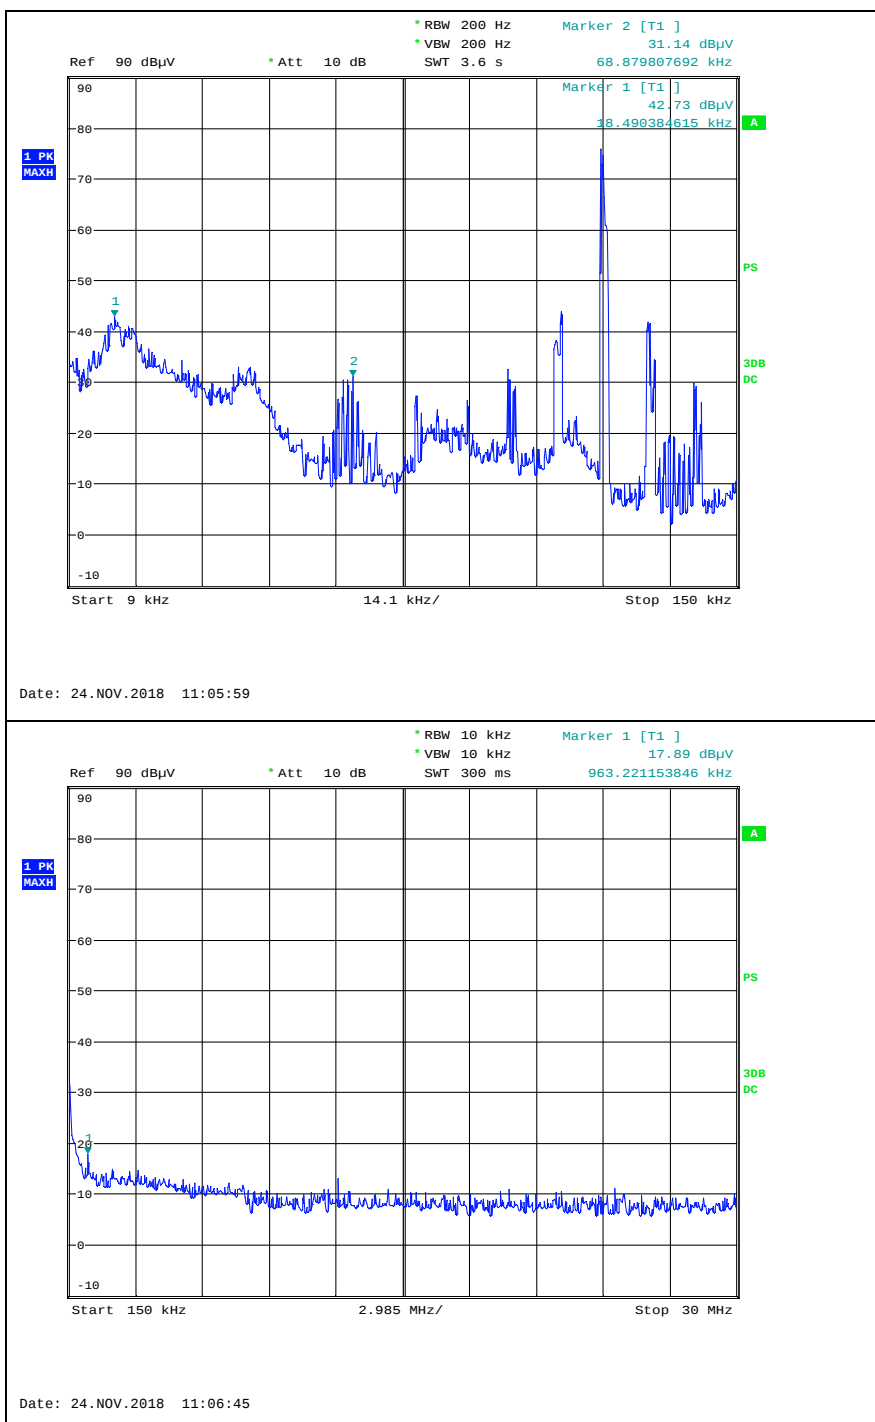


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## Measured plots below 30 MHz

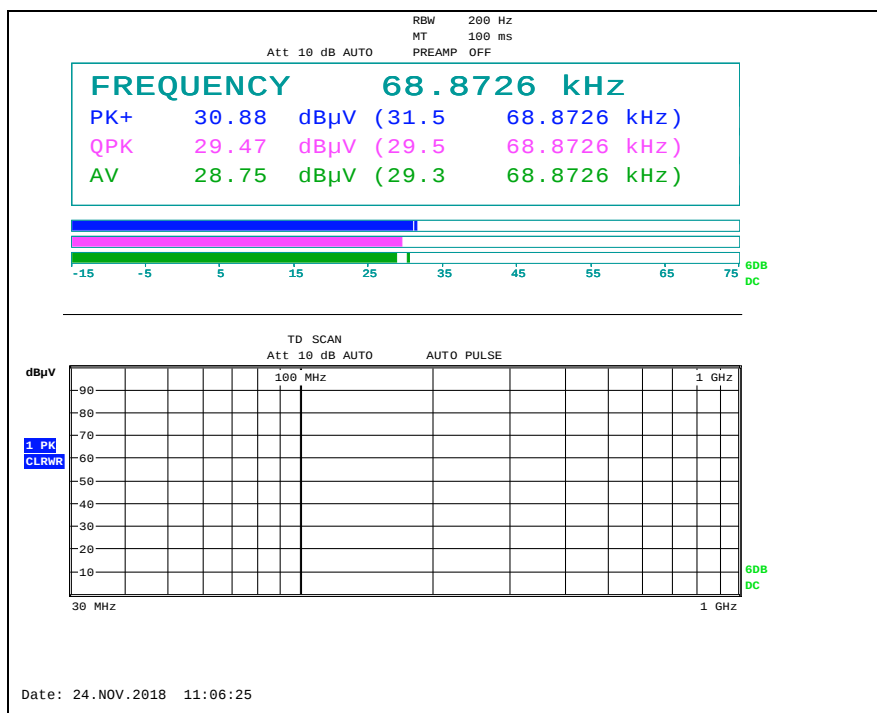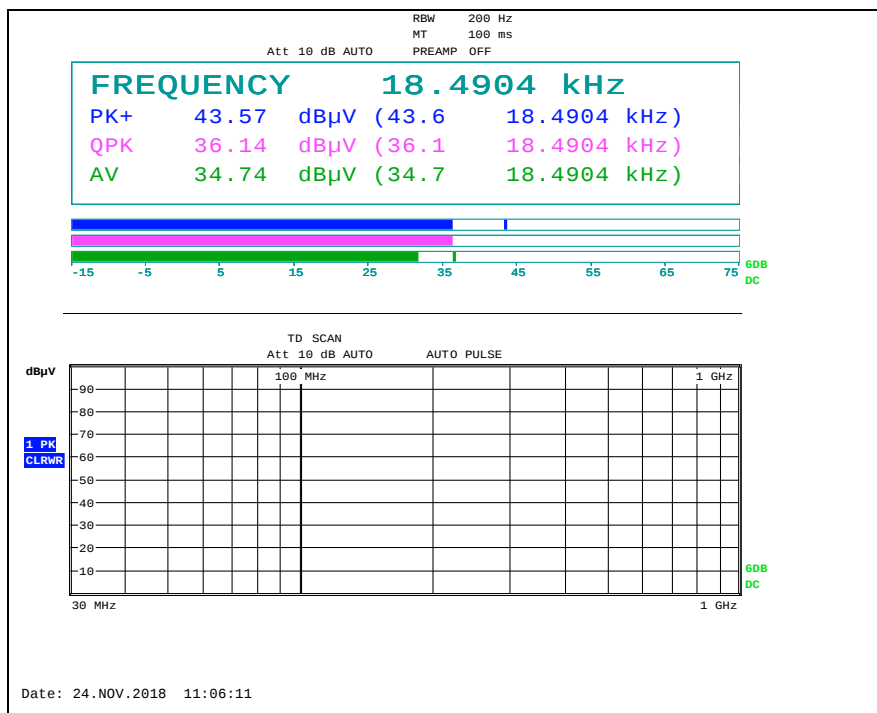

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

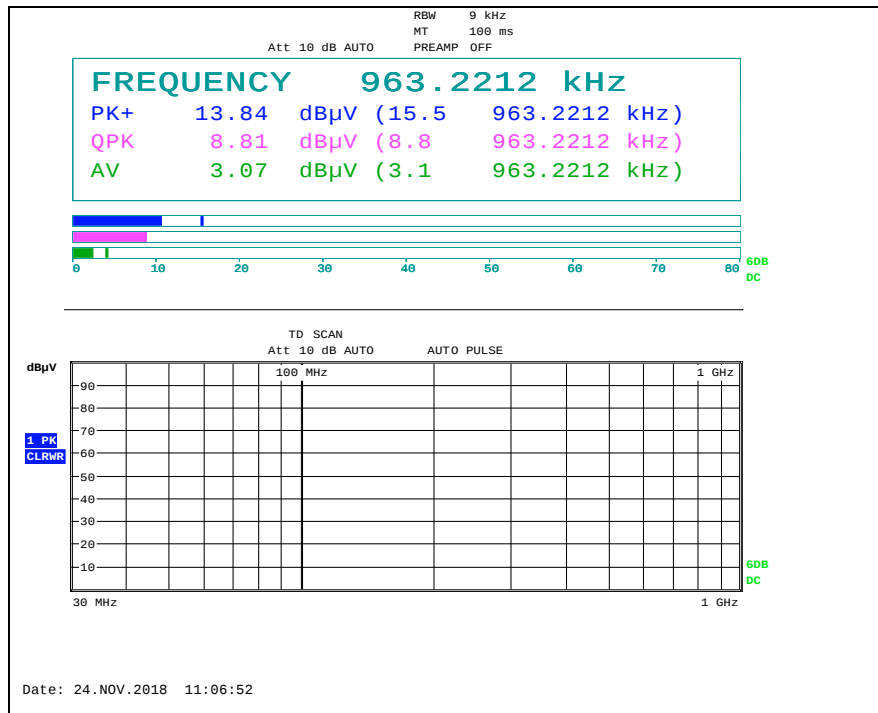

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## - INT2 Antenna

### Scanning plots below 30 MHz

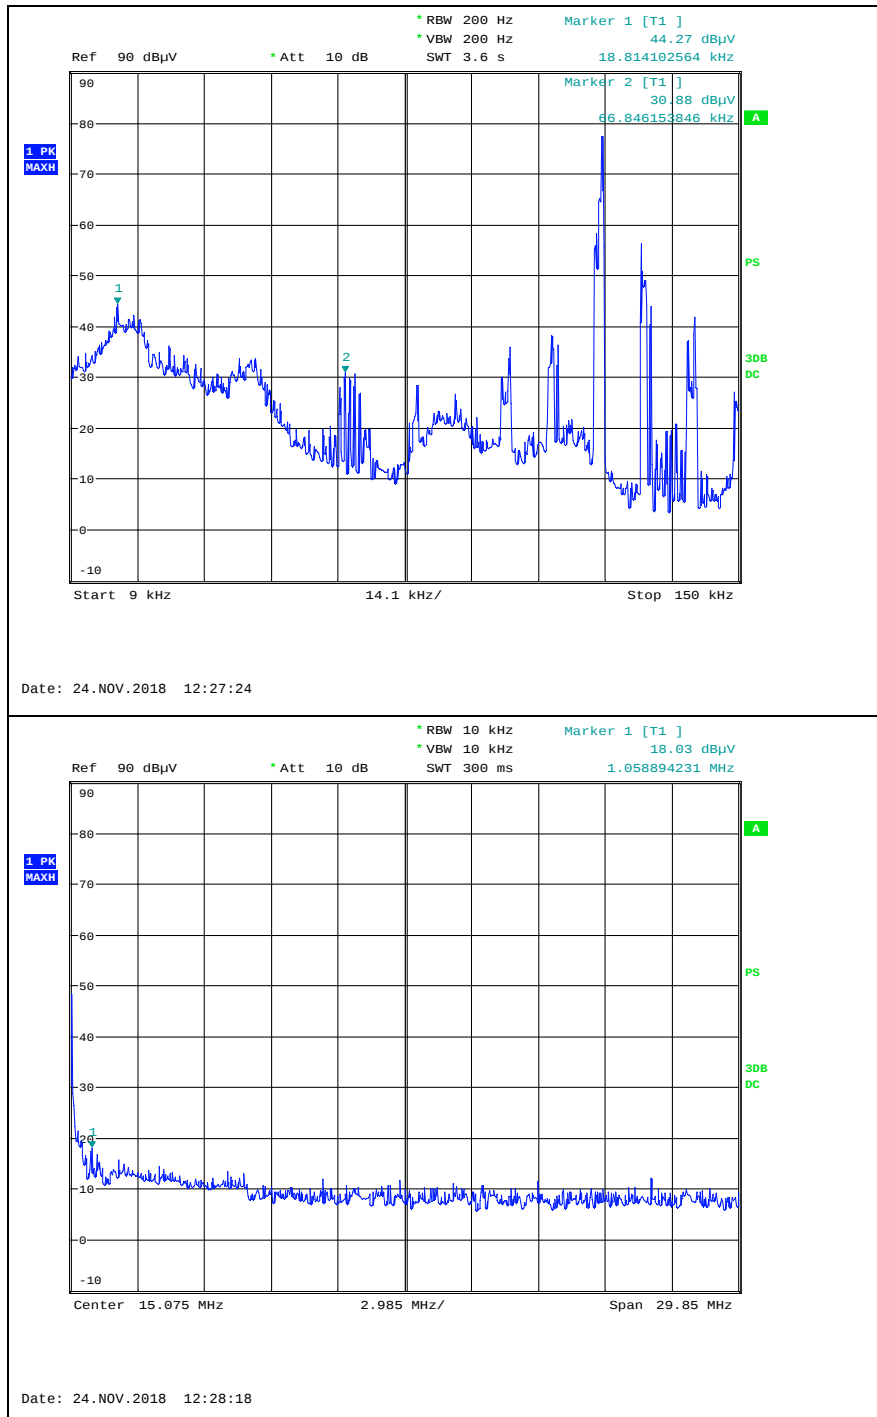

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## Measured plots below 30 MHz

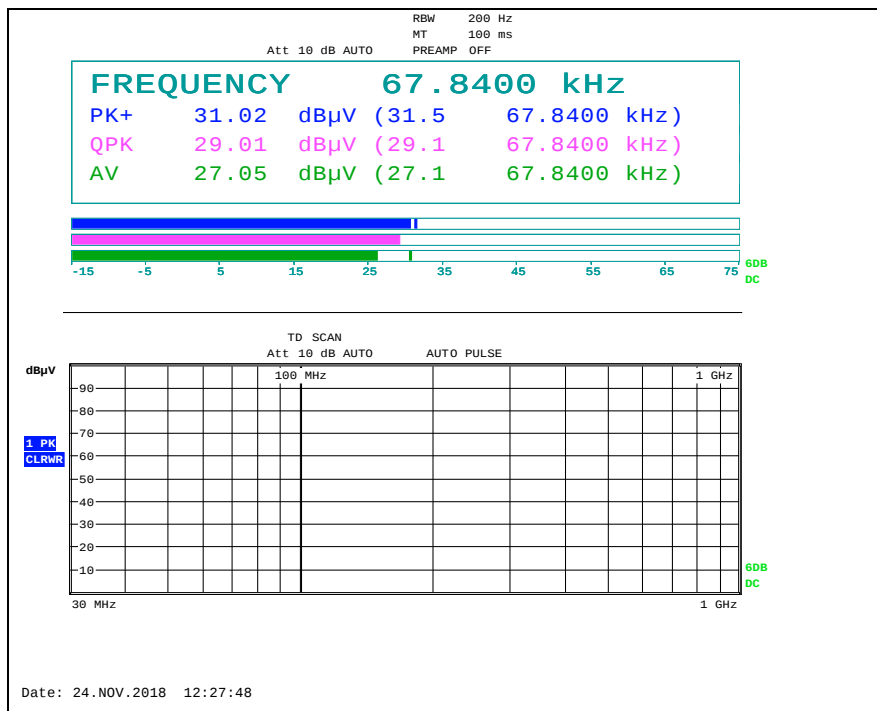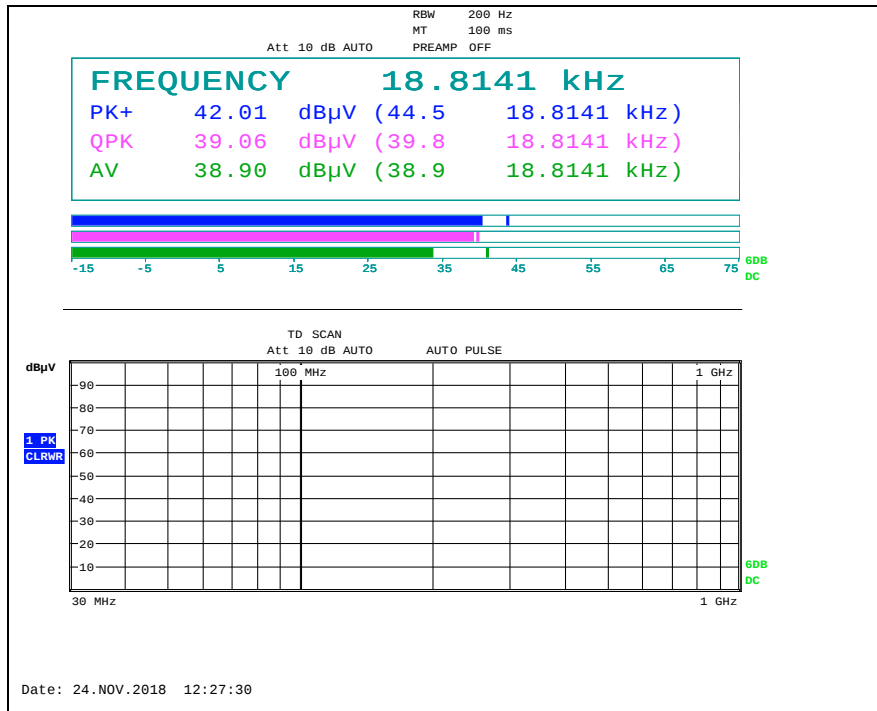

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

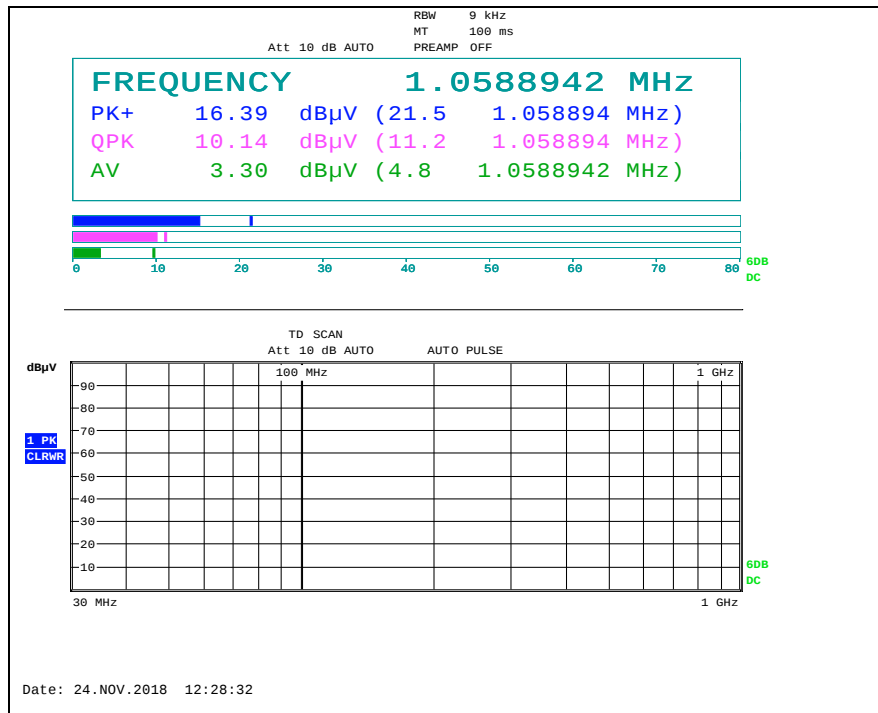

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>


RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)



## - TNK Antenna

### Scanning plots below 30 MHz

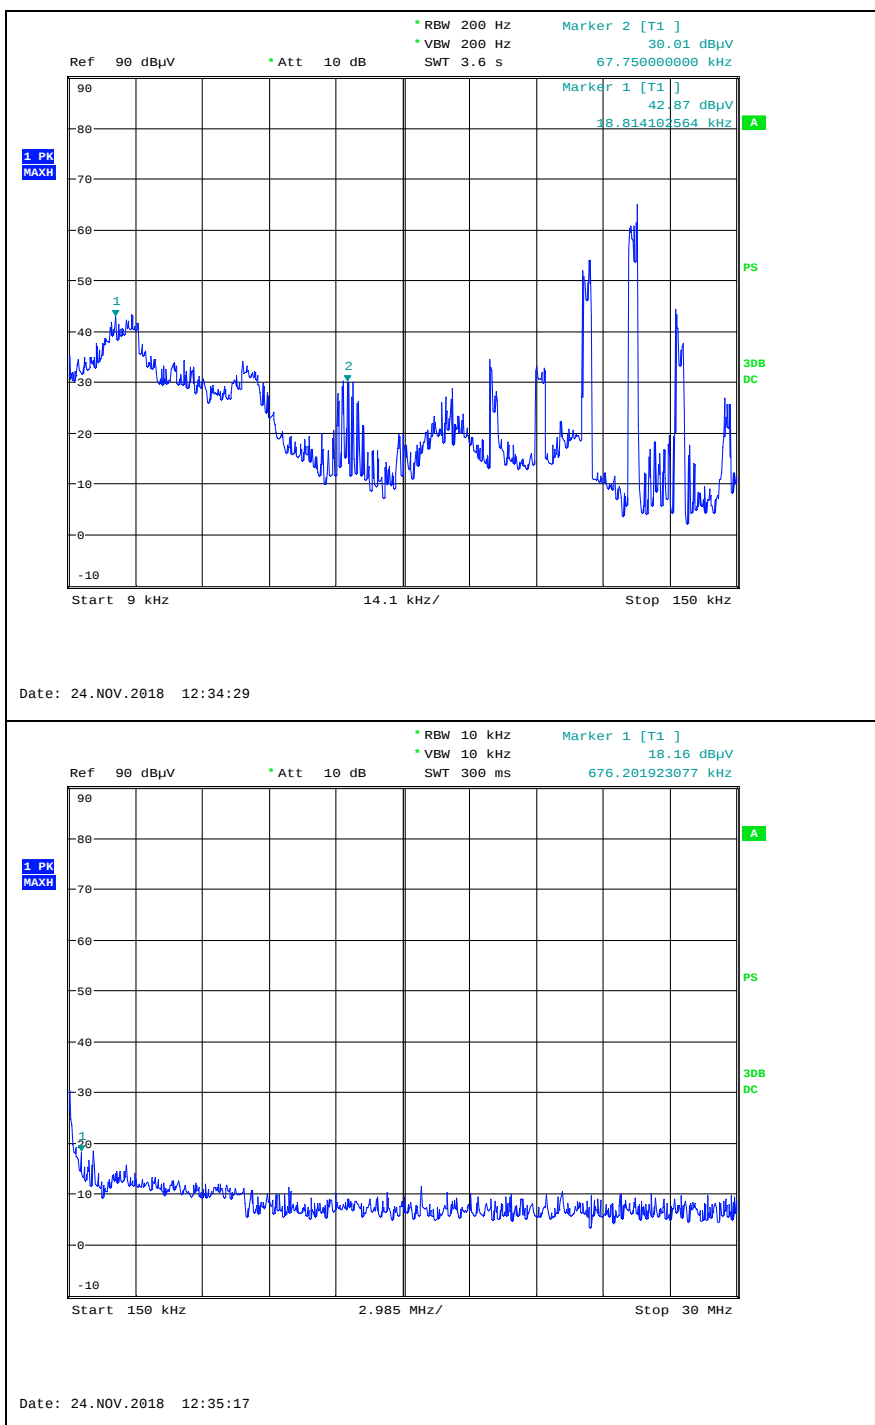


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## Measured plots below 30 MHz

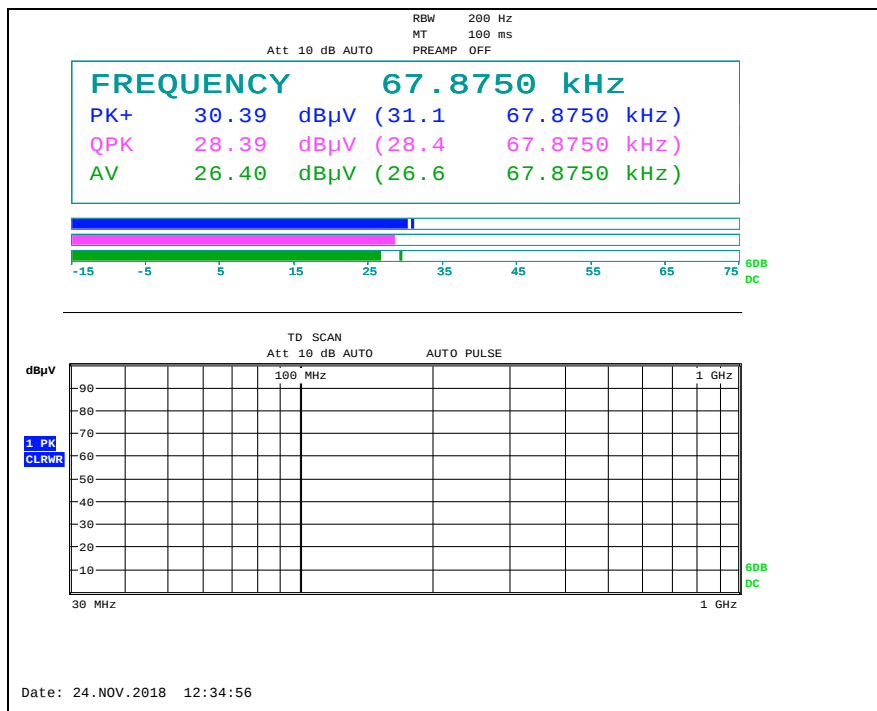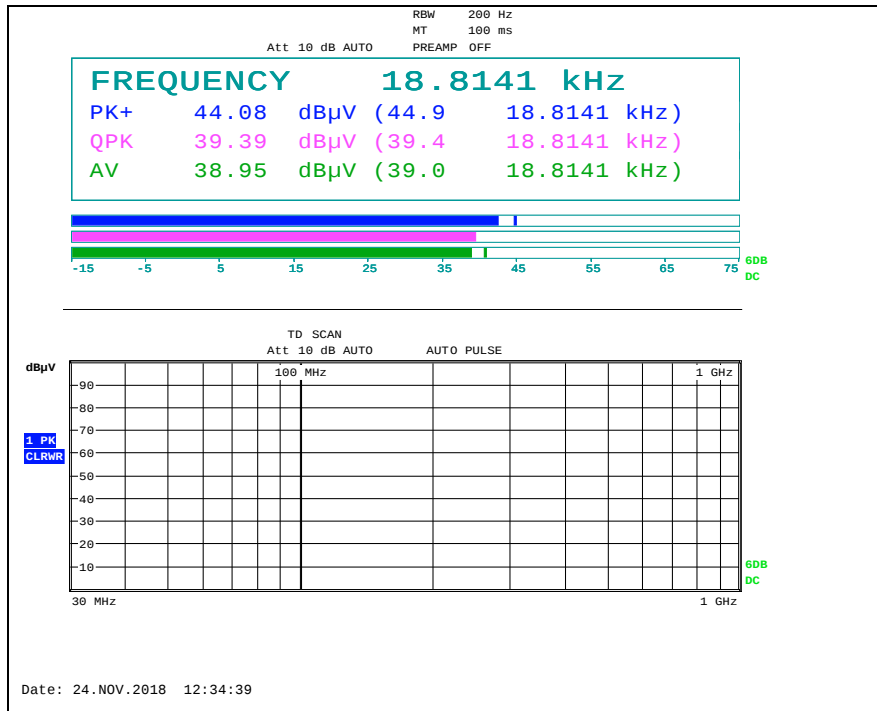


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

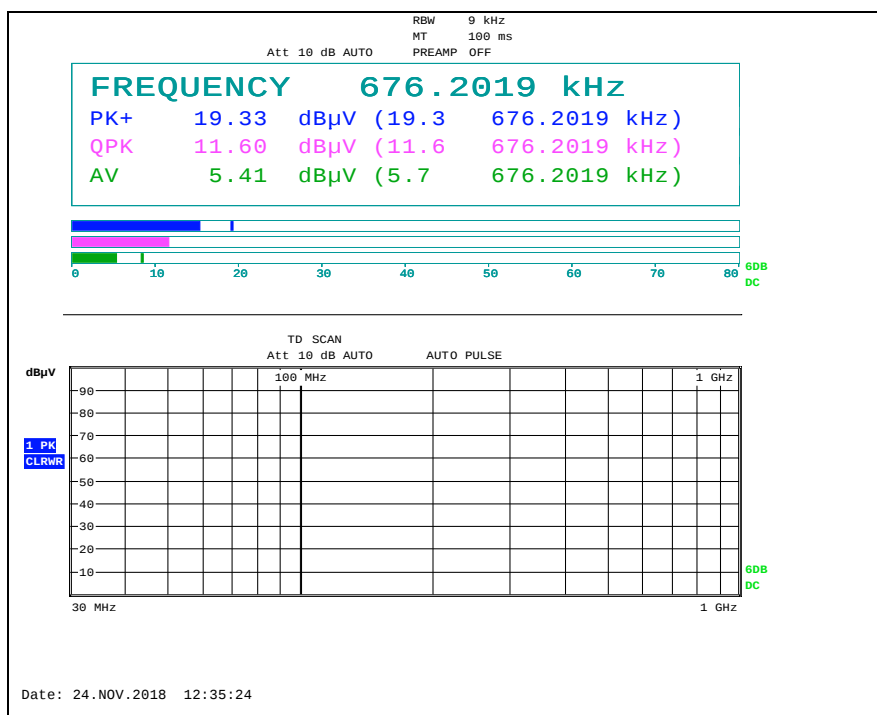

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.



## - SSB Antenna

### Scanning plots below 30 MHz


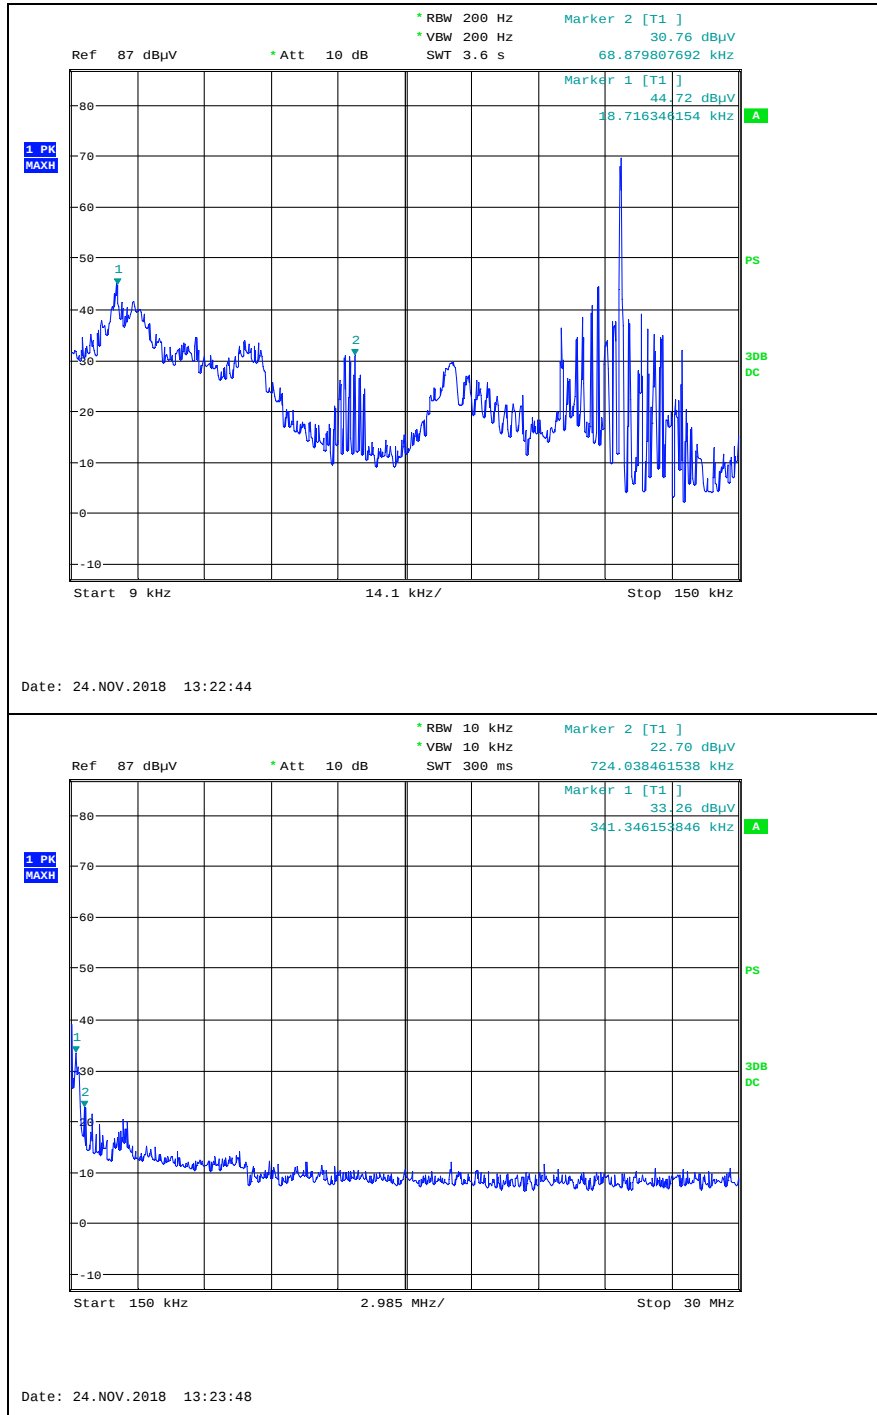


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## Measured plots below 30 MHz

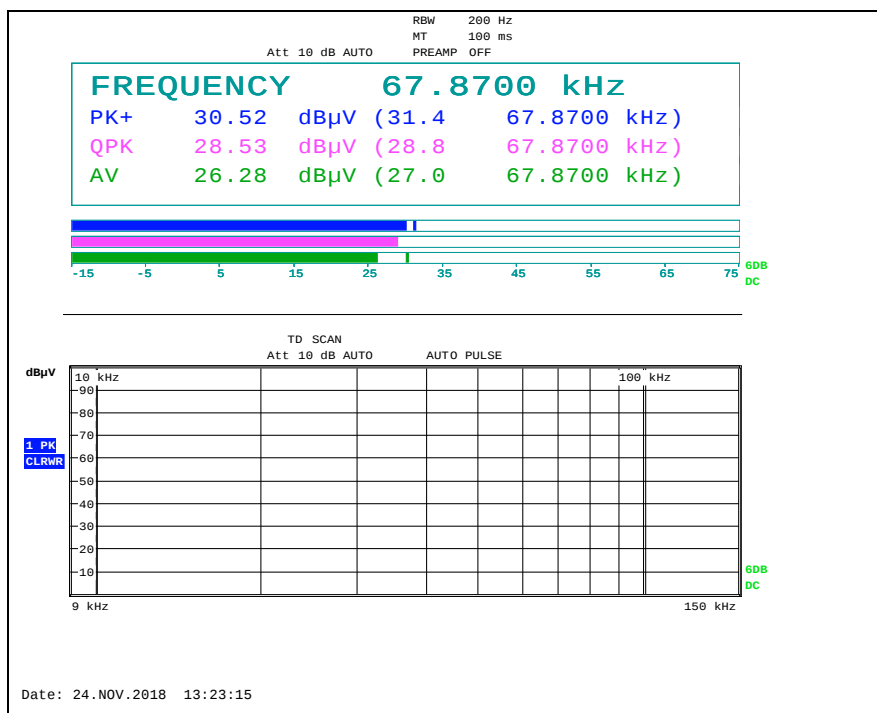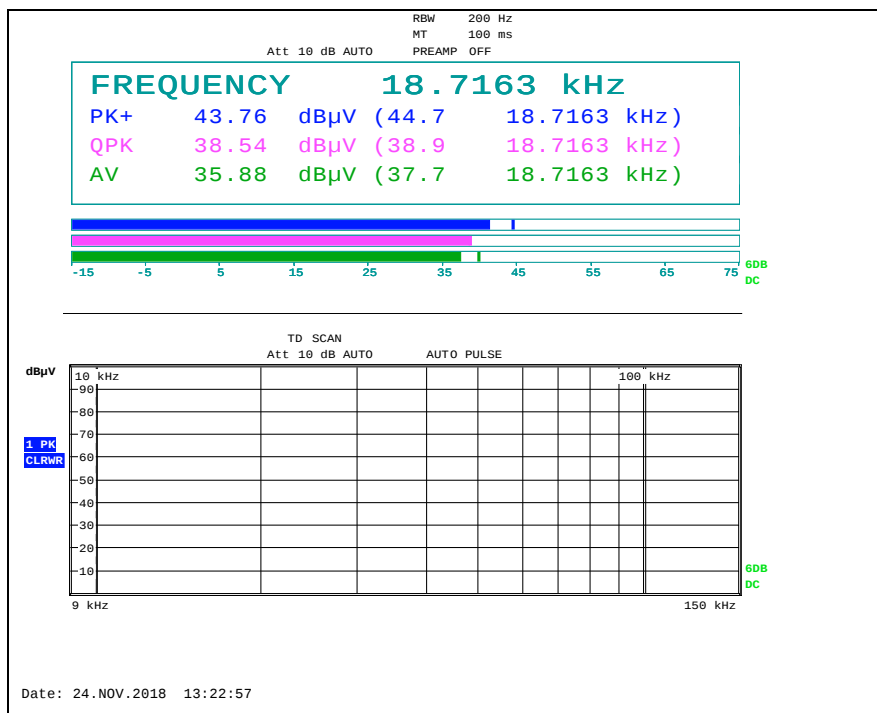


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

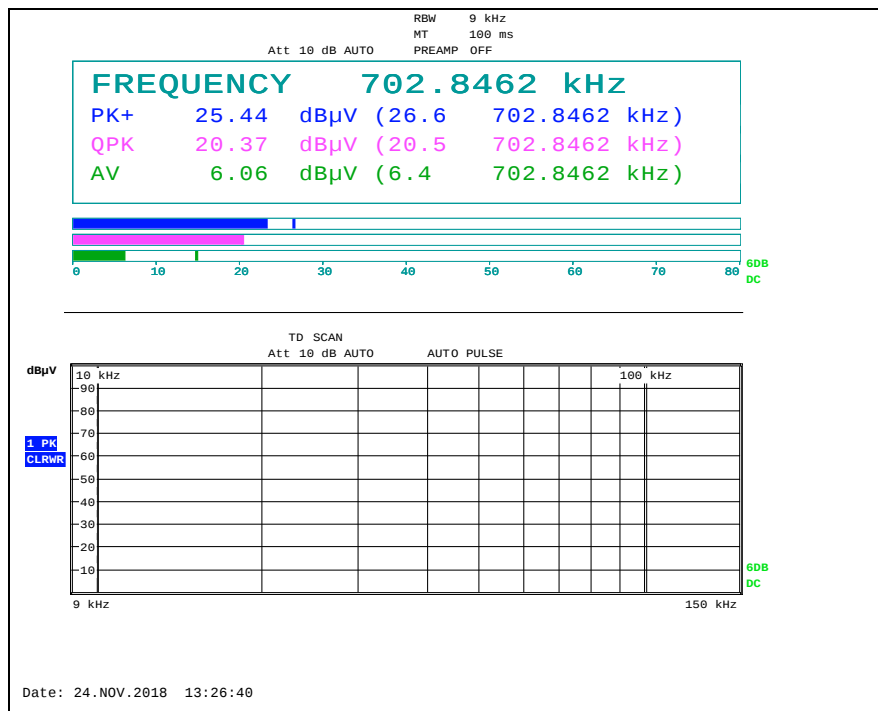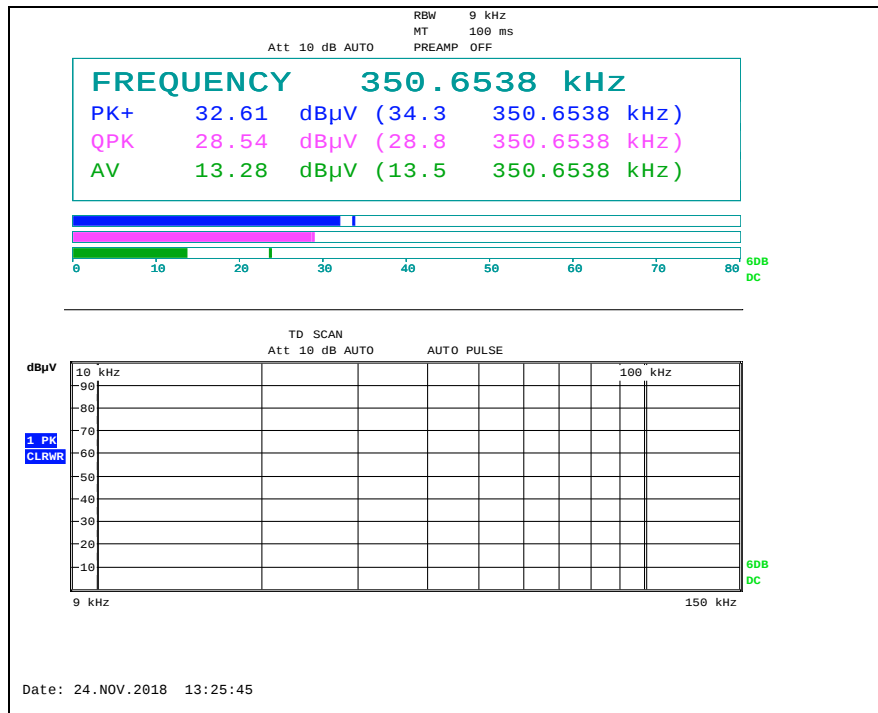

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

### 3. 20 dB Bandwidth

#### 3.1. Test Setup

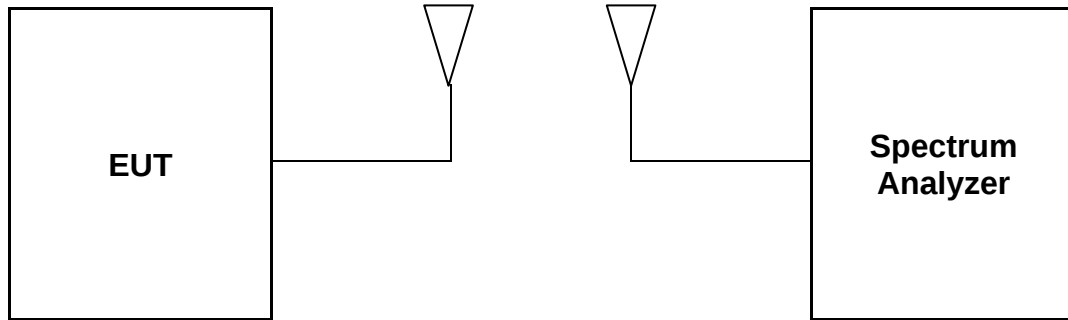

#### 3.2. Limits

None; for reporting purposed only

#### 3.3. Test Procedure

- Span = set to capture all products of the modulation process, including the emission skirts, RBW = 500 Hz, VBW = set approximately 3 x RBW, Sweep = auto, Detector = peak, Trace = max hold.
- The marker-to-peak function to set the mark to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is 20 dB bandwidth of the emission.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


### 3.4. Test Result

Ambient temperature : (23 ± 1) °C  
Relative humidity : 47 % R.H.

| Test Antenna | Carrier Frequency (kHz) | 20 dB Bandwidth (kHz) | Limit                   |
|--------------|-------------------------|-----------------------|-------------------------|
| DRV Antenna  | 125.072                 | 10.058                | Reporting proposed only |
| AST Antenna  | 121.165                 | 12.663                |                         |
| BUM Antenna  | 121.237                 | 10.709                |                         |
| INT1 Antenna | 121.310                 | 10.854                |                         |
| INT2 Antenna | 121.310                 | 10.854                |                         |
| TNK Antenna  | 124.928                 | 10.854                |                         |
| SSB Antenna  | 125.000                 | 9.696                 |                         |


#### - Test plots

#### - DRV Antenna

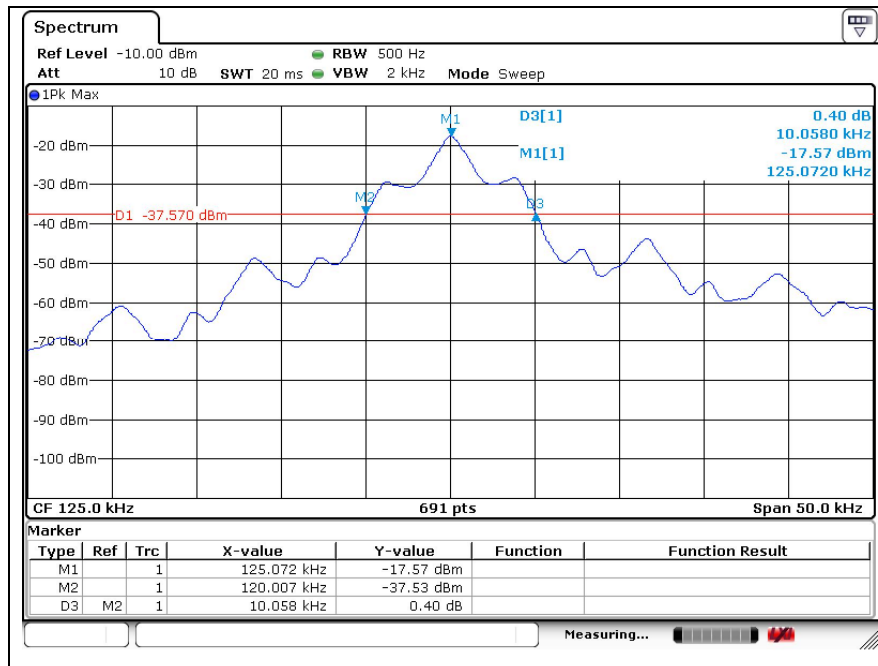


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - AST Antenna

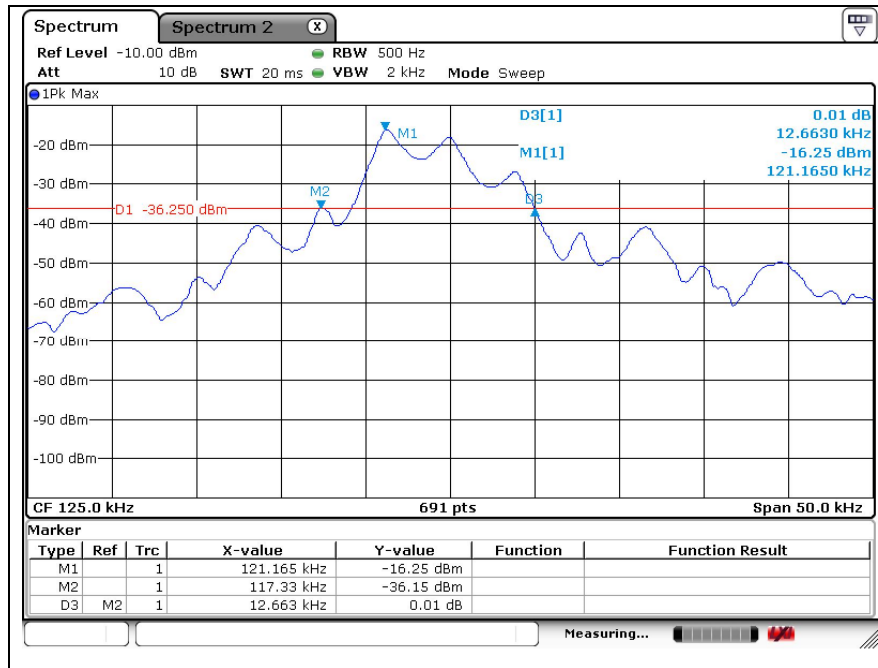


## - BUM Antenna

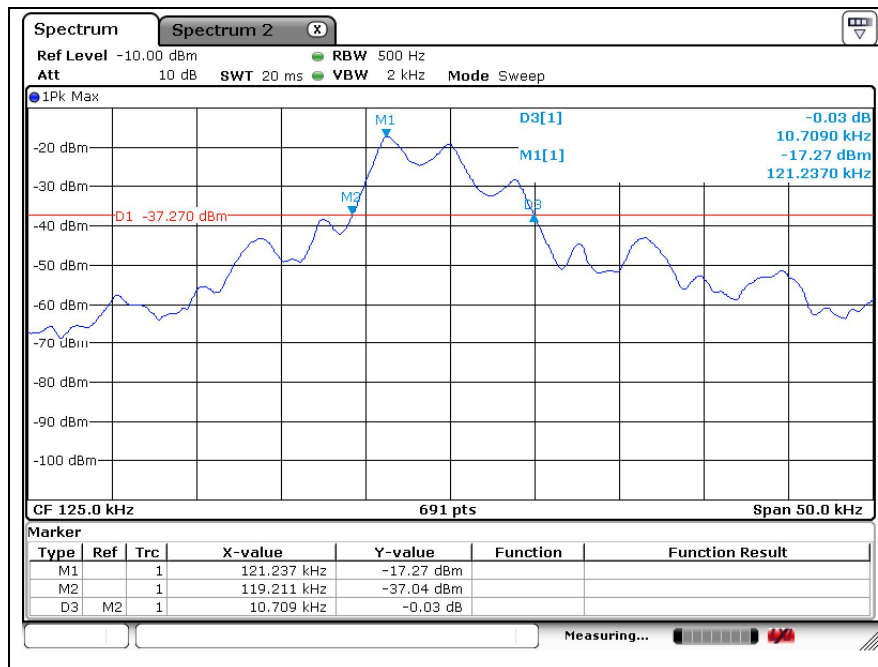


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - INT1 Antenna

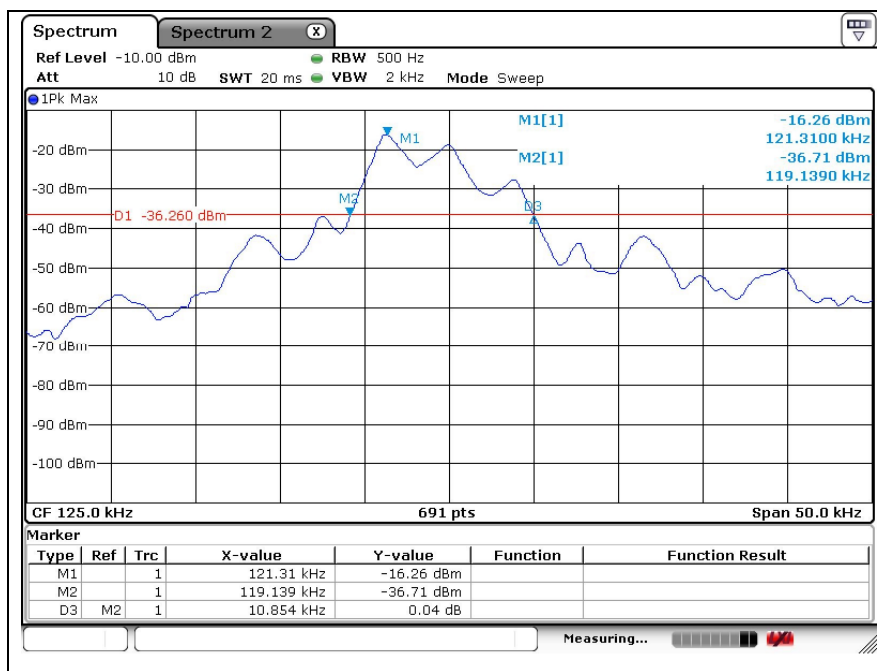


## - INT2 Antenna

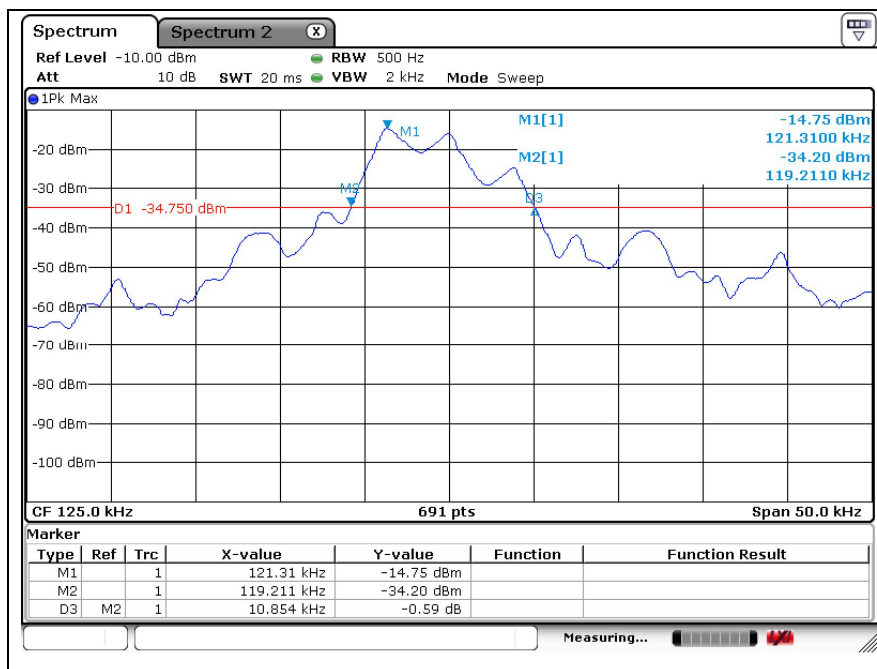


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - TNK Antenna

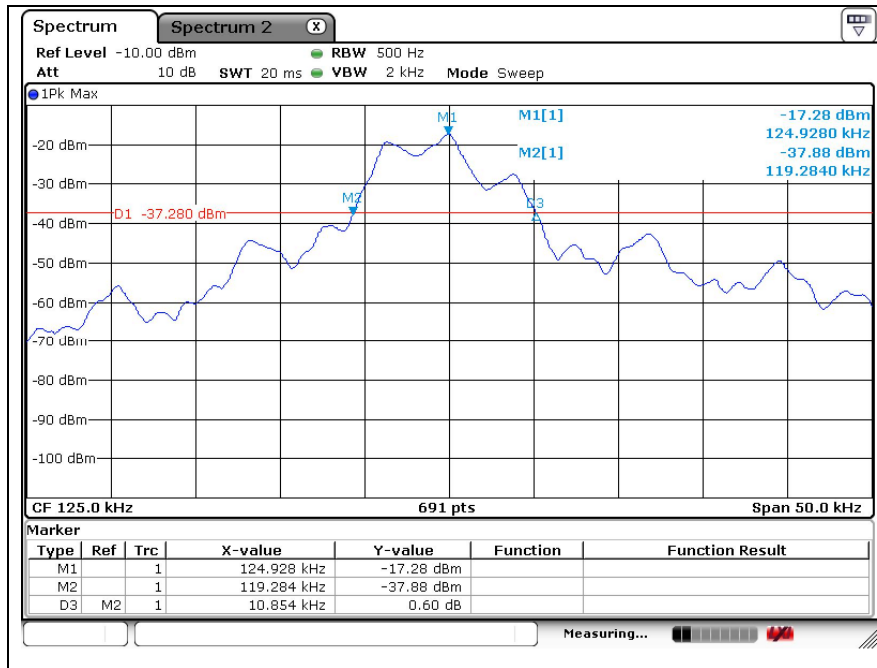


## - SSB Antenna

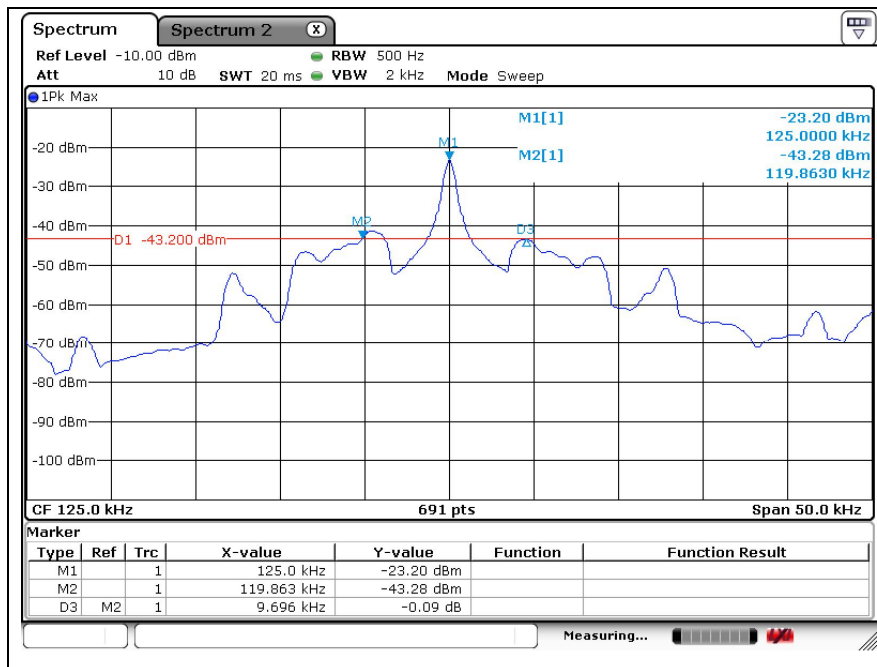

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## 4. Occupied Bandwidth

### 4.1. Test Setup

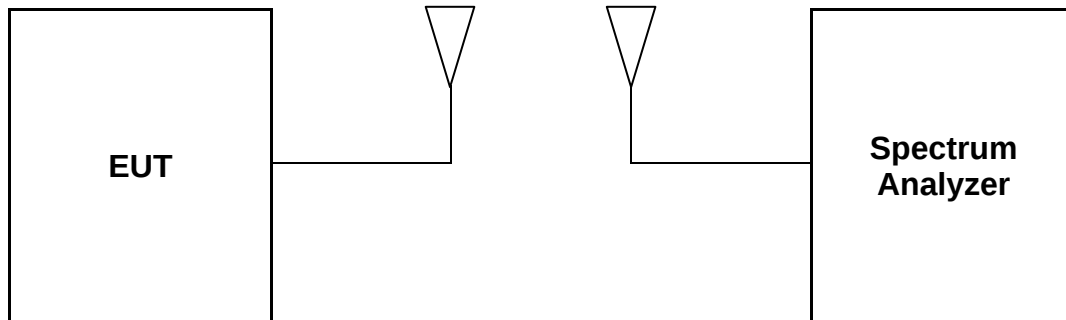

### 4.2. Limit

None; for reporting purposed only

### 4.3. Test Procedure

- Set the spectrum analyzer as SPAN = set to capture all products of the modulation process, including the emission skirts, RBW = 500 Hz, VBW = set approximately 3 x RBW, Detector = sampling, Trace mode = max hold.
- Measure lowest and highest frequencies are placed in a running sum until 0.5 % and 99.5 % of the total is reached.
- Record the SPAN between the lowest and the highest frequencies for the 99 % occupied bandwidth.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)


## 4.4. Test Result

Ambient temperature : (23 ± 1) °C  
Relative humidity : 47 % R.H.

| Test Antenna | Carrier Frequency (MHz) | Occupied Bandwidth (kHz) | Limit                   |
|--------------|-------------------------|--------------------------|-------------------------|
| DRV Antenna  | 125.000                 | 10.058                   | Reporting proposed only |
| AST Antenna  | 121.237                 | 12.663                   |                         |
| BUM Antenna  | 121.237                 | 12.012                   |                         |
| INT1 Antenna | 121.237                 | 12.156                   |                         |
| INT2 Antenna | 121.310                 | 11.505                   |                         |
| TNK Antenna  | 124.928                 | 10.709                   |                         |
| SSB Antenna  | 125.000                 | 17.873                   |                         |


### - Test plots

#### - DRV Antenna

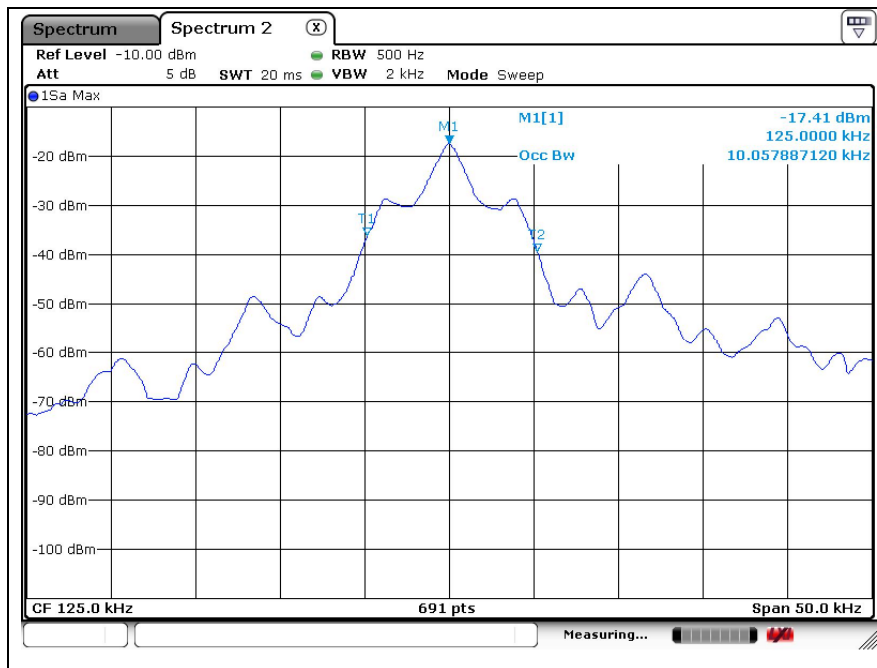


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - AST Antenna

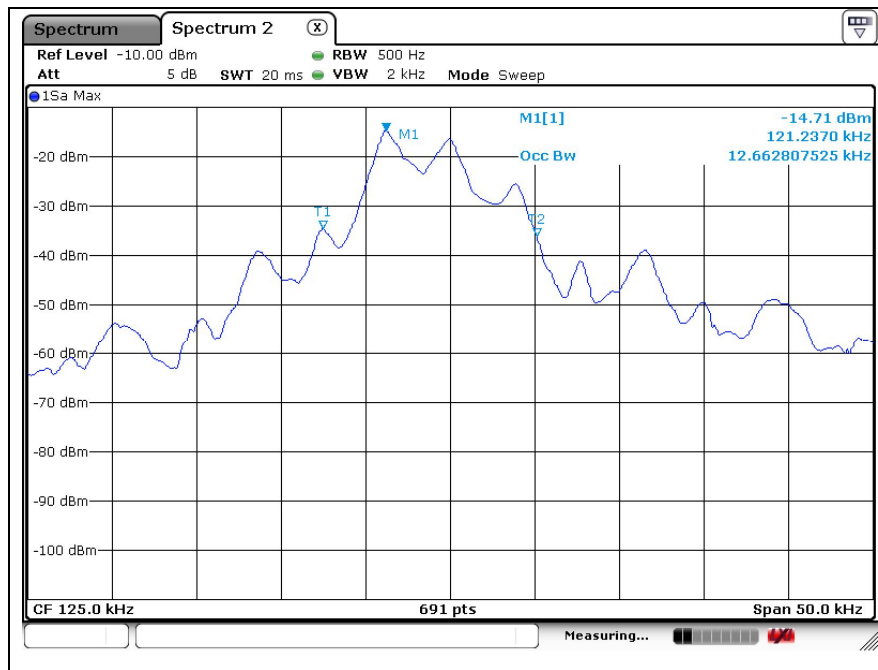

## - BUM Antenna

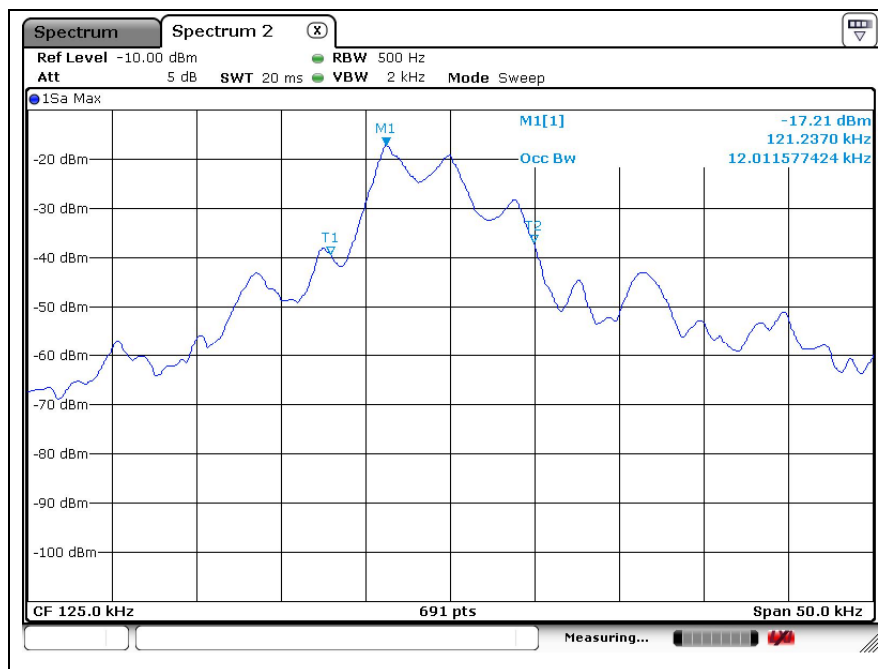

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.


SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

RTT5041-19(2017.07.10)(0)


Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

## - INT1 Antenna

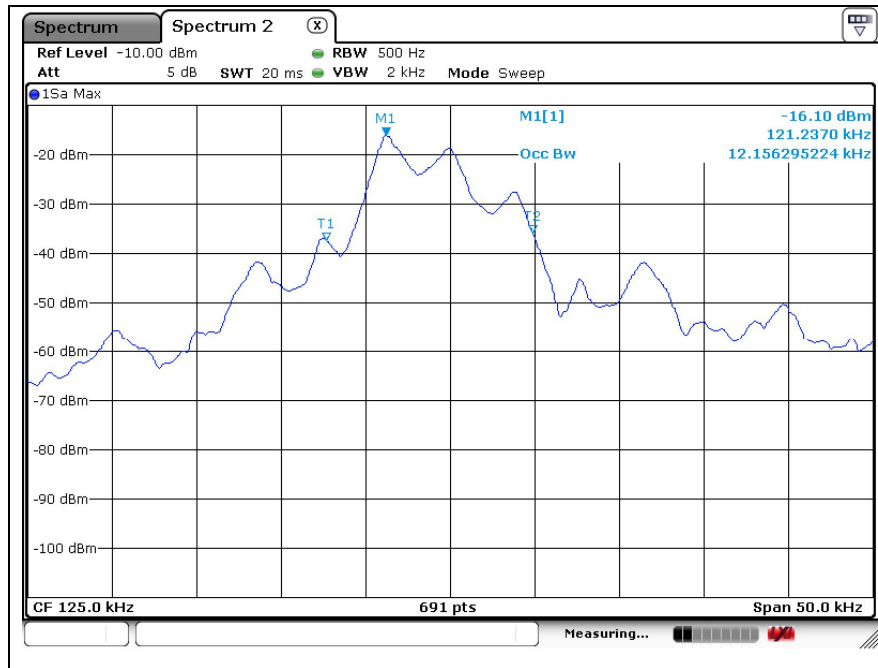


## - INT2 Antenna

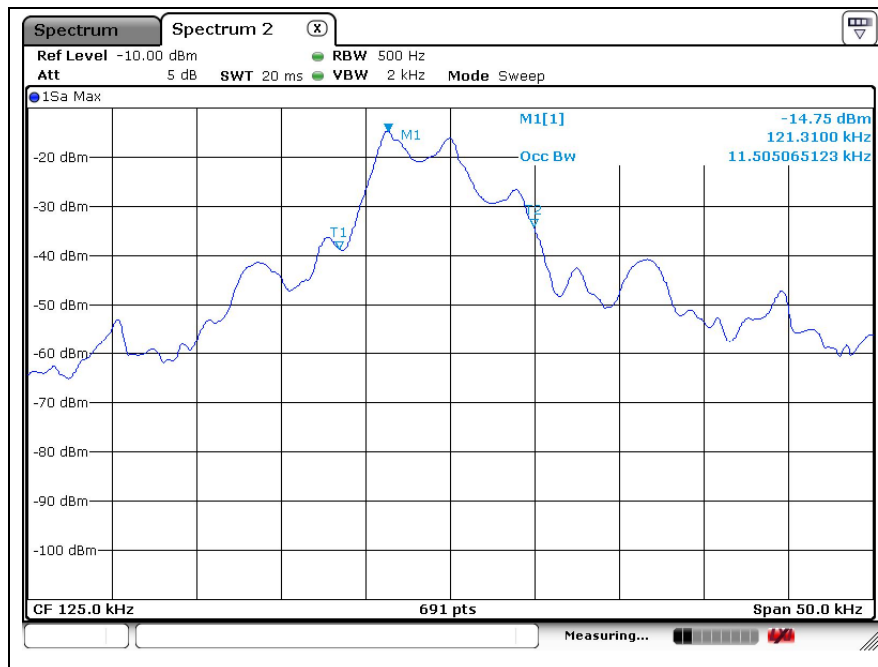


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

## - TNK Antenna

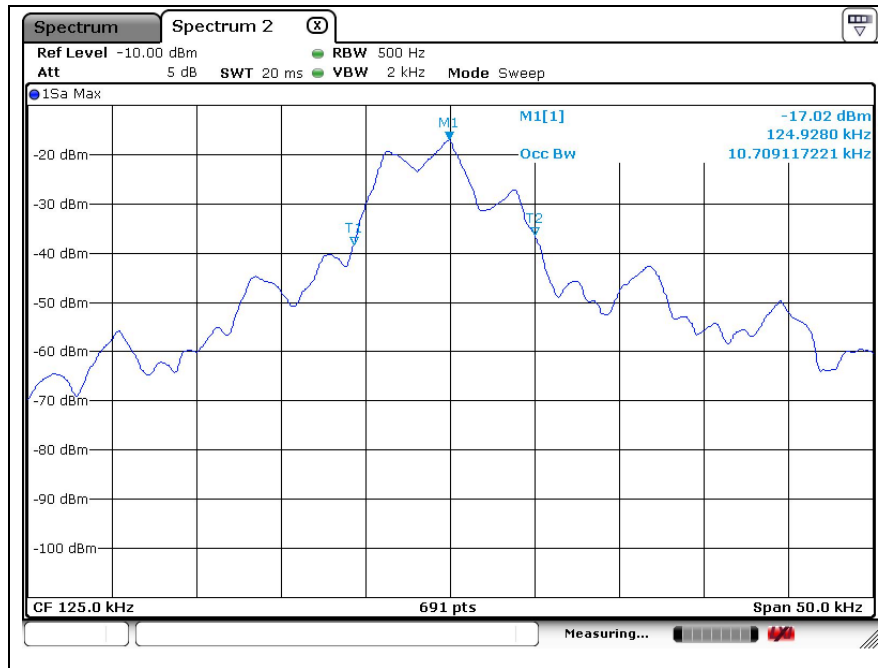

## - SSB Antenna

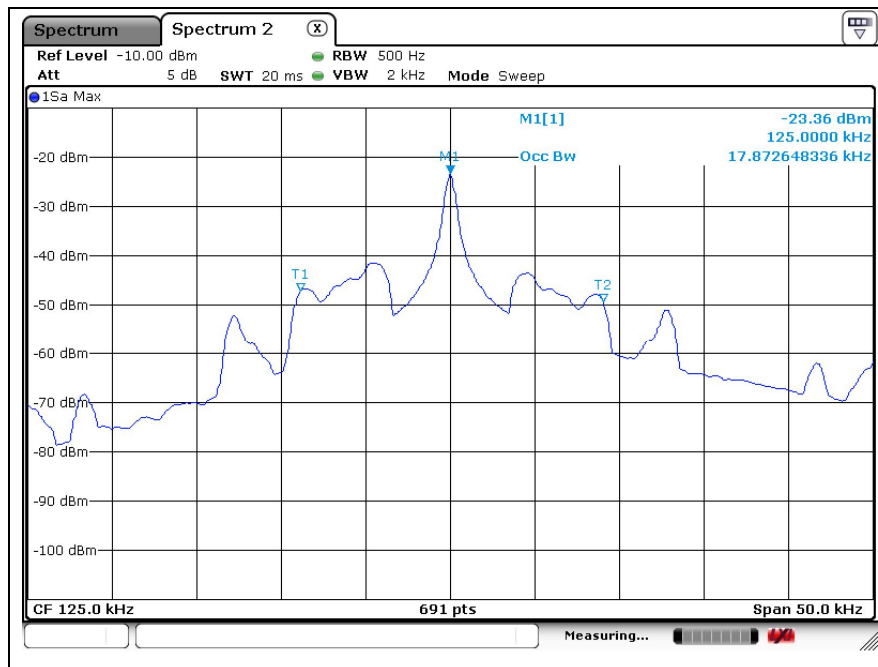

## - End of the Test Report -

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.