

TEST REPORT

Electromagnetic Compatibility

Report Reference No.: REP011634

Date of issue: 2023-10-02

Test Report Verdict: PASS

Testing Laboratory.....: Nemko S.p.A.

Address.....: Via Del Carroccio, 4

City: 20853 Biassono (MB)

Country: Italy

Testing location.....: Described at clause 1.4

Customer name.....: Leonardo Spa

Customer information.....: Via Laurentina, 760
00143 Roma (RM) – Italy

Reference standards.....: FCC CFR 47 Part 15 Subpart B

Standard application: Full application

Equipment under test: Radio Base Station for fixed installation

Trademark(s):  **LEONARDO**

Manufacturer.....: Leonardo Spa

Model/Type reference: Described at clause 4.1

Tests performed by: P. Barbieri

Report approved by.....: D. Guarnone

CONTENTS

1. GENERAL INFORMATION.....	3
1.1 Project history	3
1.2 Symbol used in the report	3
1.3 Date of sample(s) reception and tests	3
1.4 Testing location	4
1.5 Environmental conditions	4
1.6 Measurement uncertainty and assessment of conformity	4
1.7 Instruments calibration table	6
2. PRODUCT STANDARDS, TEST METHODS AND TECHNICAL PROCEDURES	7
2.1 Standard(s) applied.....	7
2.2 Test method(s) applied.....	7
2.3 Nemko technical procedures.....	7
3. SUMMARY OF TEST RESULTS AND VERDICTS	8
3.1 Measurement of electromagnetic disturbances emitted by the equipment under test	8
4. EQUIPMENT UNDER TEST	9
4.1 EUT Identification	9
4.2 EUT Power Supply.....	10
4.3 EUT Information declared by the Customer ¹	10
4.4 EUT Operation Modes	10
4.5 EUT Configuration Modes.....	10
4.6 EUT Input/Output Ports.....	11
4.7 EUT and Equipment Used During Test	11
4.8 EUT Electric/Block Diagram	12
4.9 Information about radio module(s).....	12
5 TEST RESULTS	13
5.1 Radiated Emission	13
5.2 Conducted emission	22
5.3 Antenna power conduction emission.....	26
6 EUT PHOTOS	30

1. GENERAL INFORMATION

1.1 Project history

Report number	Modification to the report / comments	Date
REP011634	First release	2023-10-02
--	--	--
--	--	--
--	--	--

1.2 Symbol used in the report

<input checked="" type="checkbox"/>	The crossed square indicates that the listed condition, standard or equipment is applicable for this report.
<input type="checkbox"/>	The empty square indicates that the listed condition, standard or equipment is not applicable for this report.
NP (Not performed)	Test case not performed according to customer request
N (Not applicable)	Test case does not apply to the test object
P (Pass)	Test object does meet the requirement
F (Fail)	Test object does not meet the requirement
<input type="checkbox"/> Comma (,) / <input checked="" type="checkbox"/> Dot (.)	Symbol used as decimal separator throughout this report
Asterisk (*)	Symbol used to indicate a standard or a test not accredited by ACCREDIA
EUT	Equipment Under Test
The results contained in this report reflect the results for this particular model(s) and serial number(s) and apply to the sample(s) as received. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.	

1.3 Date of sample(s) reception and tests

Date of receipt of test sample(s)	2023-05-24
Testing start date	2023-05-25
Testing termination date	2023-05-29

1.4 Testing location

The tests have been performed in the place indicated below:

- ☒ Nemko premises location: Nemko S.p.A.
Via Del Carroccio, 4
20853 Biassono (MB) - Italy
FCC site number: 682159
- ☐ Other location: --
--
--

1.5 Environmental conditions

The tests were carried out in the ranges of environmental conditions specified below:

Ambient temperature: 18-33 °C ¹
Relative Humidity: 25-70 % ²
Atmospheric pressure: 860-1060 hPa

Notes:

¹ For luminaire, temperature during tests was verified to be within 18 ÷ 30 °C

² During ESD test, humidity was verified to be within 30 ÷ 60 %

The following instruments are used to monitor the environmental conditions:

Equipment	Trademark	Model	Serial No.
Thermo-hygrometer	Testo	175-H2	20012380/305
Thermo-hygrometer	Testo	175-H2	38203337/703
Barometer	Castle	GPB 3300	072015

1.6 Measurement uncertainty and assessment of conformity

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002. The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Disturbance	Antenna distance 1 m, 3 m, 10 m 0.009 ÷ 200 MHz	5.0 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 200 ÷ 1000 MHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m, 10 m 1 ÷ 6 GHz	5.2 dB	(1)
	Antenna distance 1 m, 3 m 6 ÷ 18 GHz	5.5 dB	(1)
	Antenna distance 1 m, 3 m 18 ÷ 40 GHz	7.2 dB	(1)
Radiated Disturbance with large loop antenna system (LLAS)	0.009 ÷ 30 MHz	3.3 dB	(1)
Conducted Disturbance	0.02 ÷ 150 kHz with AMN	3.8 dB	(1)
	150 kHz ÷ 30 MHz with AMN	3.4 dB	(1)
	150 kHz ÷ 30 MHz with AAN	4.6 dB	(1)
	9 kHz ÷ 30 MHz with voltage probe	2.9 dB	(1)
	150 kHz ÷ 30 MHz with current probe	2.9 dB	(1)
Frequency	10 Hz ÷ 1 kHz	0.2 %	(1)
	1 kHz ÷ 40 GHz	10 ⁻⁶	(1)
Electromagnetic fields (EMF)	Magnetic, Electric and Electromagnetic fields: 0 Hz ÷ 40 GHz	25 %	(1)
Electrical quantities (voltage, current, resistance)	AC/DC Voltage 10 mV ÷ 1000 V 0÷100 kHz AC/DC Current 0.1 mA ÷ 400 A 0÷1 kHz Resistance 100 mΩ ÷ 10 MΩ	2.5 %	(1)
NOTES: (1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k = 2, which for a normal distribution corresponds to a coverage probability of approximately 95 % (2) The instruments used for this immunity test is according to the tolerances requested by the applicable standard (3) The reported expanded uncertainty of measurement is related to the stimulus quantity			

1.7 Instruments calibration table

Instrument cited in the report and not listed in this paragraph are not subject to calibration. The calibration is valid up to the last day of the due date month.

Description	Manufacturer	Model	Identifier	Cal Date	Due Date
EMI Receiver	Rohde & Schwarz	ESW44	101620	2022-08	2023-08
EMI Receiver	Rohde & Schwarz	ESU8	100202	2022-09	2023-09
Antenna Trilog 25MHz - 8GHz	Schwarzbeck Mess-Elektronik	VULB9162	9162-025	2021-07	2024-07
Antenna Trilog 25-2000 MHz	Schwarzbeck Mess-Elektronik	VULB9168	9168-242	2021-06	2024-06
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STLP 9148-152	2021-09	2024-09
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STPL 9148-123	2021-06	2024-06
Broadband Bench Top Amplifier	Sage	STB-1834034030-KFKF-L1	18490-01	2023-05	2024-05
Broadband Amplifier	Schwarzbeck Mess-Elektronik	BBV9718C	00121	2023-03	2024-03
Preamplifier	Schwarzbeck Mess-Elektronik	BBV9718	BBV9718-137	2023-05	2024-05
Semi-anechoic chamber	Nemko S.p.a.	10m semi-anechoic chamber	530	2021-09	2023-09
Common Mode Absorption Device	Schwarzbeck Mess-Elektronik	CMAD1614	00041	2022-05	2025-05
LISN	Rohde & Schwarz	ENV432	101714	2022-08	2023-08
LISN	Rohde & Schwarz	ESH2-Z5	872 460/041	2022-10	2023-10
V-network	Rohde & Schwarz	ESH3-Z5	840 731/004	2022-08	2023-08
Oscilloscopio	Agilent	54846A	MY40000254	2022-07	2023-07
Multimeter	Rohde & Schwarz	HMC8012	101577	2022-07	2023-07
Barometer	Castle	GBP 3300	072015	2023-05	2024-05
Data logger con diagnosi in campo	Testo	175-H2	20012380/305	2022-12	2024-12
Data logger con diagnosi in campo	Testo	175-H2	38203337/703	2022-12	2024-12
Attenuator	Aeroflex / Weinschel	2	CC8577	2022-08	2023-08
3m Semi anechoic chamber	Comtest	SAC-3	1711-150	2022-09	2024-09

2. PRODUCT STANDARDS, TEST METHODS AND TECHNICAL PROCEDURES

2.1 Standard(s) applied

The following standard(s) or specifications, accredited by ACCREDIA, were applied:

FCC CFR 47 Part 15 Subpart B

Code of Federal Regulations – Title 47 – Part 15 Radio Frequency Devices – Subpart B
Unintentional radiators

2.2 Test method(s) applied

The following documents are referred to in the standard(s) in such a way that some or all of their content constitutes requirements for the standard itself.

ANSI C63.4 (2014)

American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.3 Nemko technical procedures

WM L0177: General routines for using instruments at Nemko

WM L1002: Measurement Uncertainty - Policy and Statement

WM L0077: General procedure for conducting EMC tests

3. SUMMARY OF TEST RESULTS AND VERDICTS

3.1 Measurement of electromagnetic disturbances emitted by the equipment under test

Emission Tests		
Requirement / test	Method Standard	Verdict
Part §15.107 – Conducted emission	ANSI C63.4	P
Part §15.109 – Radiated emission	ANSI C63.4	P
Part §15.111 – Antenna power conduction emission	ANSI C63.4	P
Notes: --		

4. EQUIPMENT UNDER TEST

4.1 EUT Identification

<p style="text-align: center;">Short description of the EUT</p> <p>The EUT is a radio base station for fixed installation. The RBS is composed by the following modules:</p> <ul style="list-style-type: none"> • “Power Amplifier” (PA) module representing the final amplification stage. • “Voltage converter” (DC/DC) module is a DC power voltage converter from an external power source (48Vdc) to the necessary voltages for the operation of the RBS modules. • “Vectorial transceiver” (RTX) module, in VHF range equipped with an I&Q modulator and demodulator. • “Power Supply” (SWITCH) module that generates and distributes the power supply to the whole RBS. • “RBS Simulcast Controller” (CORE) module. 	
<p style="text-align: center;">Copy of marking plate(s) (if present)</p> <div style="text-align: center;">  </div>	
Sample ID	00326221
Model/Type	ECOS-D RBS4000H V3110WA0C14W0E100S1V2G2-010
Ratings	48 V DC
Equipment installation	Rack mounted
Accessories and detachable parts included	None
Test performed.....	All tests were performed on this sample
Software and/or firmware information	6.0.25.5
<p>Product variants not tested:</p> <p>--</p>	
<p>Opinions and interpretations - not subject to ACCREDIA accreditation:</p> <p>--</p>	

4.2 EUT Power Supply

Used ¹	N° ²	Type	Supply Voltage	Phases N°	Supplementary Information
<input checked="" type="checkbox"/>	1	DC	48 V		with external earth connection
Notes: ¹ The crossed square indicates that the supply voltage is used in at least one test. ² This number will be used all over the report to identify the supply voltage(s) used for each test.					

4.3 EUT Information declared by the Customer ¹

Information	Declaration
EUT highest frequency ²	fc = 1610 MHz
Environment intended use.....	Commercial / Light industrial
Equipment classification ³	B
Notes: ¹ Nemko S.p.A. declines all responsibility for the information above declared by the customer that may influence the validity of the results contained in this test report. ² For host products with certified modular transmitter, the frequency range of investigation of the composite system is specified by rule in Sections 15.33(a)(1) through (a)(3), or the range applicable to the digital device, as shown in Section 15.33(b)(1), whichever is the higher frequency range of investigation. ³ Equipment class and category definitions are specified in the standard used.	

4.4 EUT Operation Modes

N°	Description
1	Normal working
Notes: --	

4.5 EUT Configuration Modes

The EUT was configured to measure its highest possible radiation level. The test modes selected are according to EUT instruction manual.

N°	Description
1	The EUT has been tested supplied by an external DC power source, with the LAN cable connected to a PC, the GPS ports connected to an antenna, the TX OUT and the RX IN ports closed on a dummy load
Notes: --	


4.6 EUT Input/Output Ports

Port	Name	Type ¹	Cable Max. >3m	Cable Shielded	Description
0	Enclosure	N/E	—	—	—
1	DC V IN	DC	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Two wires cable
2	MAIN GPS ANT	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable
3	SPARE GPS ANT	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable
4	TX OUT	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable
5	ANT	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable
6	ETHERNET	TP	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Standard cable
7	DIGITAL I/O	I/O	<input type="checkbox"/>	<input type="checkbox"/>	—
8	12 V DC	DC	<input type="checkbox"/>	<input type="checkbox"/>	—
9	DORE ALARM	I/O	<input type="checkbox"/>	<input type="checkbox"/>	—
Notes: ¹ Port type: AC = AC Power Port DC = DC Power Port N/E = Non-Electrical ANT = Antenna Port I/O = Signal/Control Input or Output Port TP = Wired network or telecommunication Port					

4.7 EUT and Equipment Used During Test

Use ¹	Product Type	Manufacturer	Model	Comments
AE	Notebook	Packard Bell	Easynote	—
Notes: ¹ Use EUT - Equipment Under Test SIM - Simulator (Not Subjected to Test) AE - Auxiliary/Associated Equipment (Not Subjected to Test)				

4.8 EUT Electric/Block Diagram



4.9 Information about radio module(s)

Radio module 1	
Description	Information
Identification:	Model: ECOS-D RBS4000H Trademark: Leonardo
Frequency band (MHz):	150 to 174 MHz
Modulation type:	FM with channel bandwidth 12.5 kHz / 25 kHz (voice) 4FSK 9600 bps with channel bandwidth 12.5 kHz (voice and data) C4FM with channel bandwidth 12.5 kHz (voice and data)
Antenna information:	External Antenna (not provided)
Other information:	--
Notes:	--


5 TEST RESULTS

5.1 Radiated Emission

5.1.1 Test result

Verdict:	<input checked="" type="checkbox"/> P <input type="checkbox"/> F <input type="checkbox"/> N ¹ <input type="checkbox"/> NP
Frequency range:	30 MHz – 40000 MHz ²
Test site:	Semi anechoic chamber
Measurement distance:	3 m or 10 m ³
Notes: ¹ If marked, the test is not applicable for the EUT. ² For host products with certified modular transmitter, the frequency range of investigation of the composite system is specified by rule in Sections 15.33(a)(1) through (a)(3), or the range applicable to the digital device, as shown in Section 15.33(b)(1), whichever is the higher frequency range of investigation. ³ Test was performed at 10 m measurement distance for class A EUT in the frequency range from 30 to 1000 MHz; test was performed at 3 m measurement distance in all other cases.	

5.1.2 Photo documentation of the test set-up

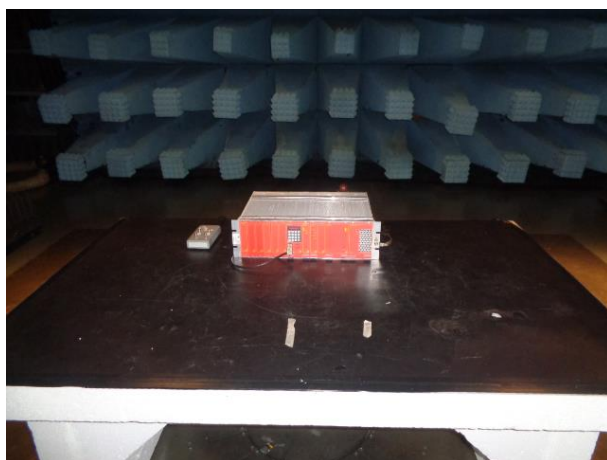

5.1.3 Test method

Method standard is reported at par. 3.1. Measurements were made on a semi anechoic chamber. Preliminary measurements were performed at an antenna to EUT separation distance of 3 or 10 meters with the receive antenna located at a fixed height (from 1 to 4 meter) in both horizontal and vertical polarizations. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 meters. All frequencies were investigated in both horizontal and vertical antenna polarization, where applicable.

Receiver reading P_R , reported in tables at clause 5.1.6, was achieved adjusting the input signal P_{IN} by a correction factor CF , to take into account of the insertion loss due to cables and attenuators, the antenna factor, the external preamplifier gain. This correction factor was pre-inserted in the firmware of the receiver and was applied by the instrument during the test. The relationship between P_R and P_{IN} , expressed in dB, is:

$$P_R = P_{IN} + CF$$

5.1.4 Limits for enclosure

Radiated emission ¹				
Frequency (MHz)	Limit for Class A EUT		Limit for Class B EUT	
	$\mu V/m$	$dB\mu V/m$	$\mu V/m$	$dB\mu V/m$
30 to 88	90	39.0	100	40.0
88 to 216	150	43.5	150	43.5
216 to 960	210	46.4	200	46.0
960 to 1000	300 ²	49.5 ²	500 ²	54.0 ²
Above 1000 ³	1000 ²	59.5 ²	500 ²	54.0 ²

Notes:

¹ For frequency range between 30 to 1000 MHz Quasi-Peak detector is used. For frequency range above 1000 MHz Average and Peak detector are used.

² Above 1000 MHz, the limit reported refers to measurement s performed with Average detector. For measurements performed with Peak detector the limit is 20 dB greater.

³ For Class A radiated emission above 1 GHz, a measurement distance of 3 m can be used, with the limits increased by 10 dB.

5.1.5 Test equipment used¹

Used ²	Description	Manufacturer	Model	Identifier
<input checked="" type="checkbox"/>	SAC	Nemko Spa	10m SAC	530
<input checked="" type="checkbox"/>	SAC	Comtest	3m SAC	1711-150
<input checked="" type="checkbox"/>	EMI receiver	Rohde & Schwarz	ESW44	101620
<input checked="" type="checkbox"/>	EMI receiver	R&S	ESU8	100202
<input type="checkbox"/>	Common mode absorption device	Schwarzbeck	CMAD1614	00041
<input checked="" type="checkbox"/>	Antenna	Schwarzbeck	VULB9162	VULB9162-025
<input type="checkbox"/>	Antenna	Schwarzbeck	VULB9168	VULB9168-242
<input checked="" type="checkbox"/>	Antenna	Schwarzbeck	STLP9148	STLP9148-123
<input type="checkbox"/>	Antenna	Schwarzbeck	STLP9148	STLP9148-152
<input type="checkbox"/>	Antenna	RF Spin	DRH40	061106A40
<input type="checkbox"/>	Preamplifier	Schwarzbeck	BBV9718	BBV9718-137
<input checked="" type="checkbox"/>	Preamplifier	Schwarzbeck	BBV9718C	00121
<input type="checkbox"/>	Preamplifier	Sage	STB-1834034030-	18490-01
<input checked="" type="checkbox"/>	Controller for turntable and antenna mast	Maturo	FCU3.0	10041
<input checked="" type="checkbox"/>	Tilt antenna mast	Maturo	TAM4.0-E	10042
<input checked="" type="checkbox"/>	Turntable 4.5 t	Maturo	TT4.0-5T	2.527
Notes: ¹ See clause 1.7 for calibration information. ² If crossed, the instrument was used during tests.				

5.1.7 Test protocol


Antenna Polarization	Supply Voltage ¹	Test Mode		Remarks	Verdict
		Operation ²	Configuration ³		
Horizontal	1	1	1	Range 30 to 1000 MHz	P

Notes:

¹ See clause 4.2 EUT Power Supply


² See clause 4.4 EUT Operation Modes

³ See clause 4.5 EUT Configuration Modes

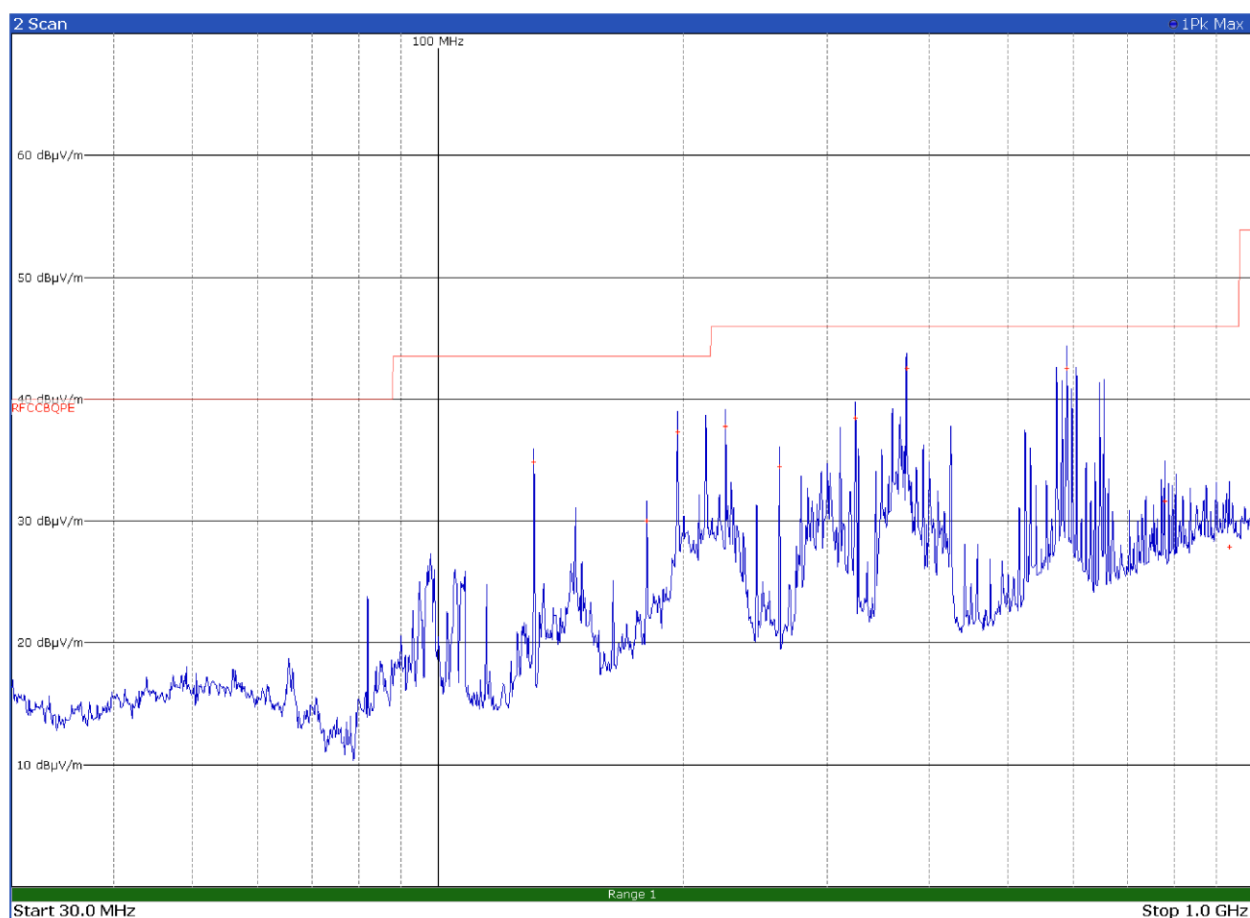

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
131.0700	34.9	43.5	-8.6	QP
180.2400	30.1	43.5	-13.4	QP
196.6200	37.3	43.5	-6.2	QP
225.0000	37.8	46.0	-8.2	QP
262.1400	34.5	46.0	-11.5	QP
324.9900	38.5	46.0	-7.5	QP
375.0000	42.6	46.0	-3.4	QP
589.8600	42.6	46.0	-3.4	QP
778.2900	31.7	46.0	-14.3	QP
933.9900	27.9	46.0	-18.1	QP

Antenna Polarization	Supply Voltage ¹	Test Mode		Remarks	Verdict
		Operation ²	Configuration ³		
Vertical	1	1	1	Range 30 to 1000 MHz	P
Notes: ¹ See clause 4.2 EUT Power Supply ² See clause 4.4 EUT Operation Modes ³ See clause 4.5 EUT Configuration Modes					

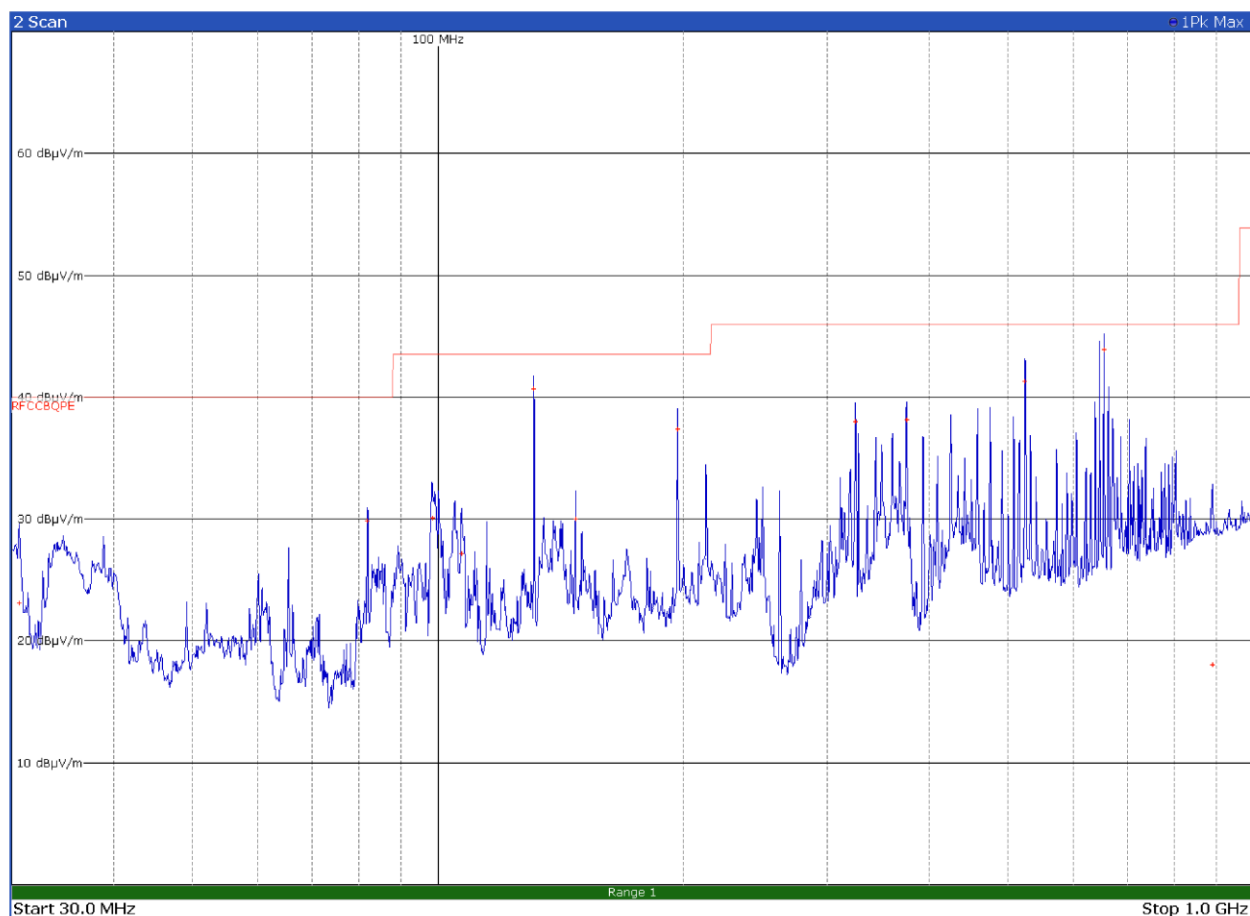


Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
30.6300	23.2	40.0	-16.8	QP
81.9300	29.9	40.0	-10.1	QP
98.3100	30.1	43.5	-13.4	QP
106.7100	27.2	43.5	-16.3	QP
131.0700	40.7	43.5	-2.8	QP
147.4500	30.0	43.5	-13.5	QP
196.6200	37.4	43.5	-6.1	QP
324.9900	38.1	46.0	-7.9	QP
375.0000	38.2	46.0	-7.8	QP
524.3400	41.3	46.0	-4.7	QP
655.4100	44.0	46.0	-2.0	QP
889.8300	18.1	46.0	-27.9	QP

Antenna Polarization	Supply Voltage ¹	Test Mode		Remarks	Verdict
		Operation ²	Configuration ³		
Horizontal	1	1	1	Range 1000 to 2000 MHz	P
Notes: ¹ See clause 4.2 EUT Power Supply ² See clause 4.4 EUT Operation Modes ³ See clause 4.5 EUT Configuration Modes					



RBW 1 MHz
 MT 100 ms
 PREAMP OFF

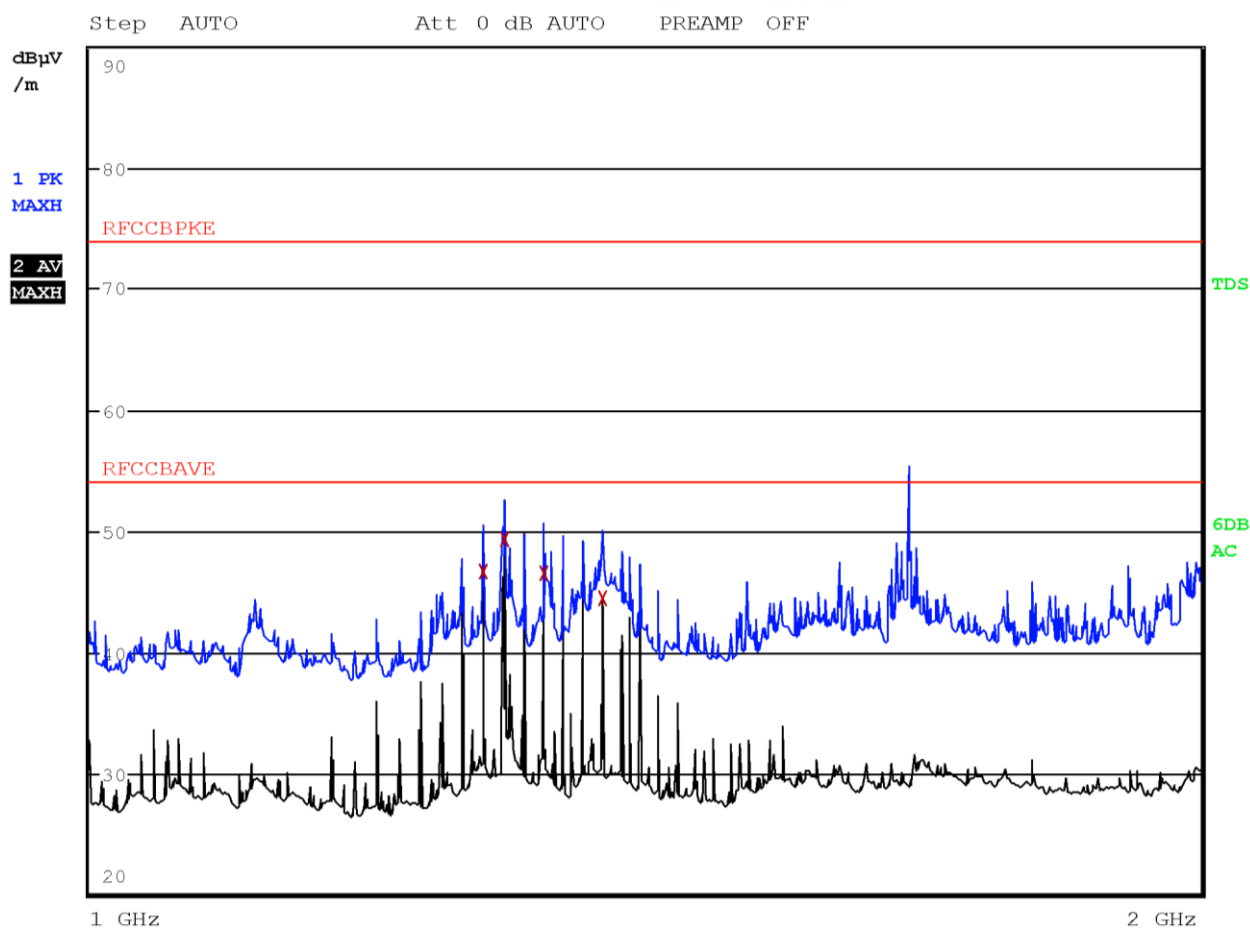


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1278.0000	46.7	54.0	-7.3	Av
1294.4000	49.4	54.0	-4.6	Av
1327.2000	46.6	54.0	-7.4	Av
1376.4000	44.5	54.0	-9.5	Av


Antenna Polarization	Supply Voltage ¹	Test Mode		Remarks	Verdict
		Operation ²	Configuration ³		
Vertical	1	1	1	Range 1000 to 2000 MHz	P
Notes: ¹ See clause 4.2 EUT Power Supply ² See clause 4.4 EUT Operation Modes ³ See clause 4.5 EUT Configuration Modes					



Antenna Polarization	Supply Voltage ¹	Test Mode		Remarks	Verdict
		Operation ²	Configuration ³		
Horizontal	1	1	1	Range 2000 to 8300 MHz	P
Notes: ¹ See clause 4.2 EUT Power Supply ² See clause 4.4 EUT Operation Modes ³ See clause 4.5 EUT Configuration Modes					

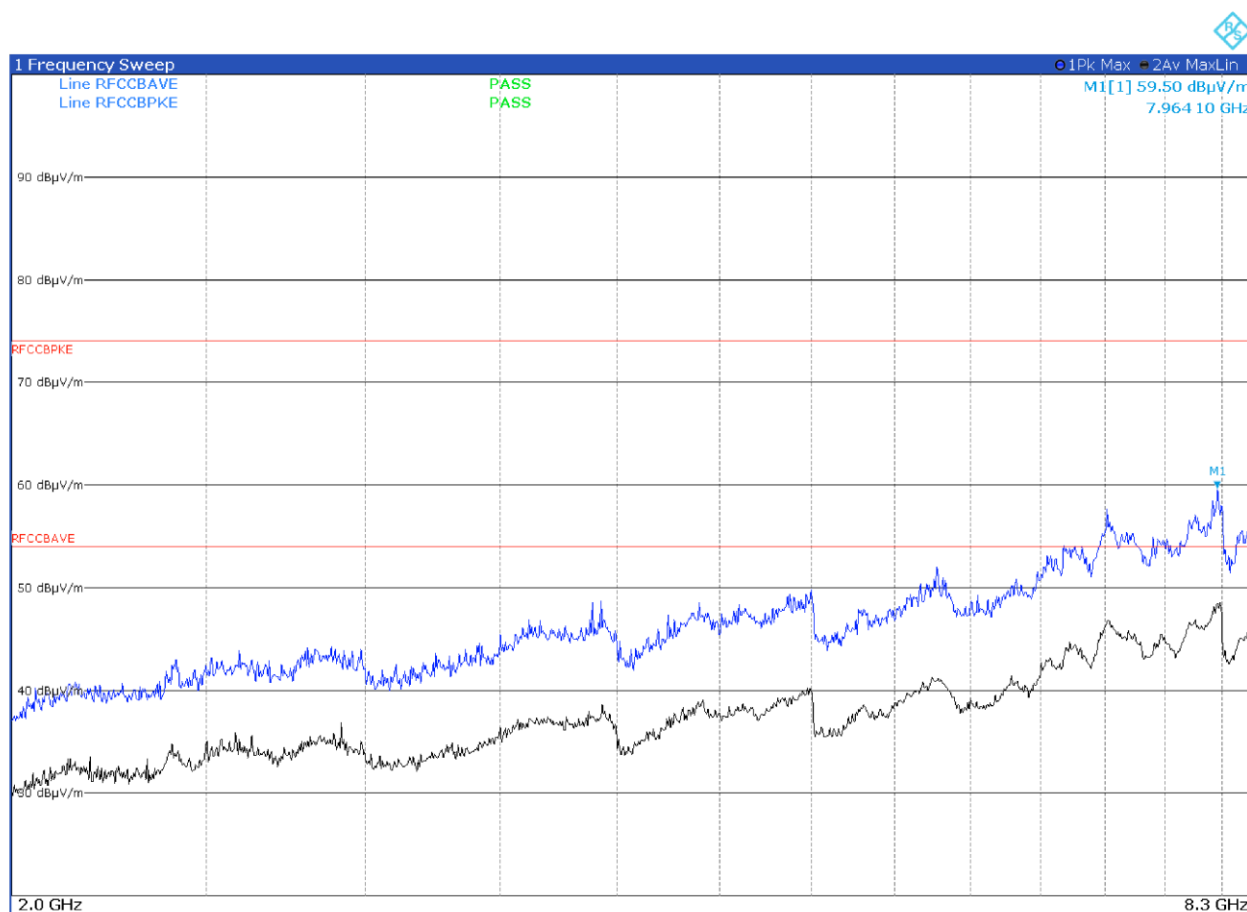

Antenna Polarization	Supply Voltage ¹	Test Mode		Remarks	Verdict
		Operation ²	Configuration ³		
Vertical	1	1	1	Range 2000 to 8300 MHz	P
Notes: ¹ See clause 4.2 EUT Power Supply ² See clause 4.4 EUT Operation Modes ³ See clause 4.5 EUT Configuration Modes					

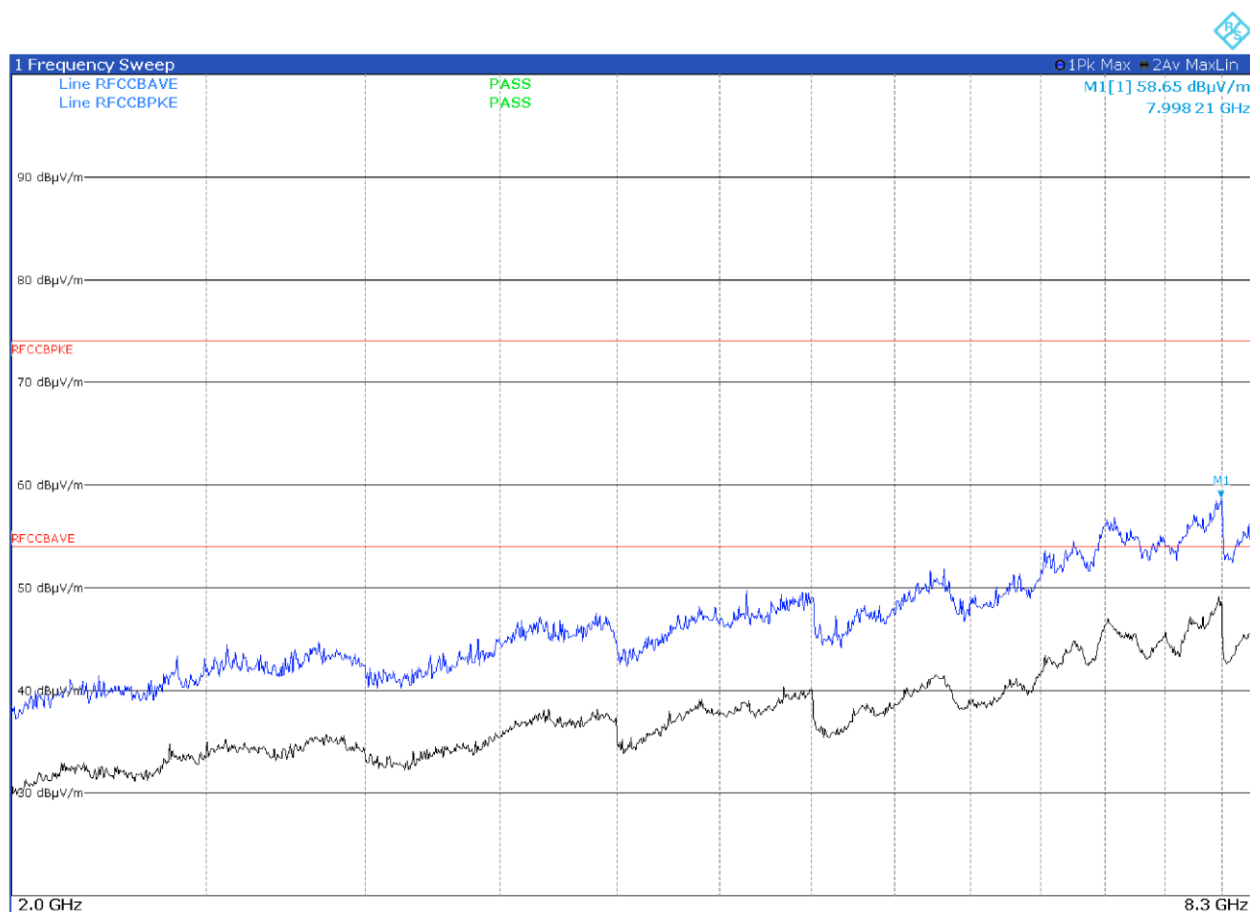


5.2 Conducted emission

5.2.1 Test result

Verdict for AC mains port ² :	<input checked="" type="checkbox"/> P <input type="checkbox"/> F <input type="checkbox"/> N ¹ <input type="checkbox"/> NP
Frequency range:	0.15 MHz – 30 MHz
Kind of test site:	Shielded room
Notes: ¹ If marked, the test is not applicable for the EUT, according to 15.107 (c)(1) or (d). ² If applicable, KDB 174176D01 criterion was used for devices powered from a computer or any other external power source via a USB connection.	

5.2.2 Photo documentation of the test set-up

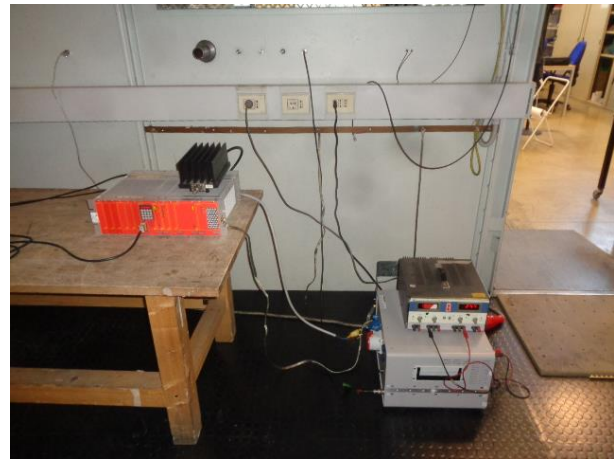

5.2.3 Test method

Method standard is reported at par. 3.1. Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Line Impedance Stabilization Networks (LISN). Conducted voltage measurements on mains lines were made at the output of the LISN.

Receiver reading P_R , reported in tables at clause 5.2.6, was achieved adjusting the input signal P_{IN} by a correction factor CF , to take into account of the insertion loss due to LISN and cables. This correction factor was pre-inserted in the firmware of the receiver and was applied by the instrument during the test. The relationship between P_R and P_{IN} , expressed in dB, is:

$$P_R = P_{IN} + CF$$

5.2.4 Limits

Conducted emissions from AC mains power ports				
Frequency (MHz)	Quasi-Peak limit (dBμV)		Average limit (dBμV)	
	Class B	Class A	Class B	Class A
0.15 to 0.50	66 to 56 ¹	79	56 to 46 ¹	66
0.50 to 5	56	73	46	60
5 to 30	60	73	50	60

Notes:

¹ The limit level in dBμV decreases linearly with the logarithm of frequency

5.2.5 Test equipment used¹

Used ²	Description	Manufacturer	Model	Identifier
<input checked="" type="checkbox"/>	EMI receiver	R&S	ESU8	100202
<input type="checkbox"/>	EMI receiver	Rohde & Schwarz	ESW44	101620
<input checked="" type="checkbox"/>	Attenuator	Aeroflex / Weinschel	2	CC8577
<input type="checkbox"/>	LISN 9 kHz ÷ 30 MHz	R&S	ESH2-Z5	872 460/041
<input checked="" type="checkbox"/>	LISN 9 kHz ÷ 30 MHz	R&S	ENV432	101714
<input type="checkbox"/>	LISN 9 kHz ÷ 30 MHz	R&S	ESH3-Z5	840 731/004
<input checked="" type="checkbox"/>	Shielded room	Siemens	Conducted emission test room	1862

Notes:

¹ See clause 1.7 for calibration information.

² If crossed, the instrument was used during tests.

Test Port		Supply Voltage ²	Test Mode		Remarks	Verdict
EUT ¹	Line		Operation ³	Configuration ⁴		
1	N	1	1	1	--	P


Notes:

¹ See clause 4.6 EUT Input/Output Ports

² See clause 4.2 EUT Power Supply

³ See clause 4.4 EUT Operation Modes

⁴ See clause 4.5 EUT Configuration Modes


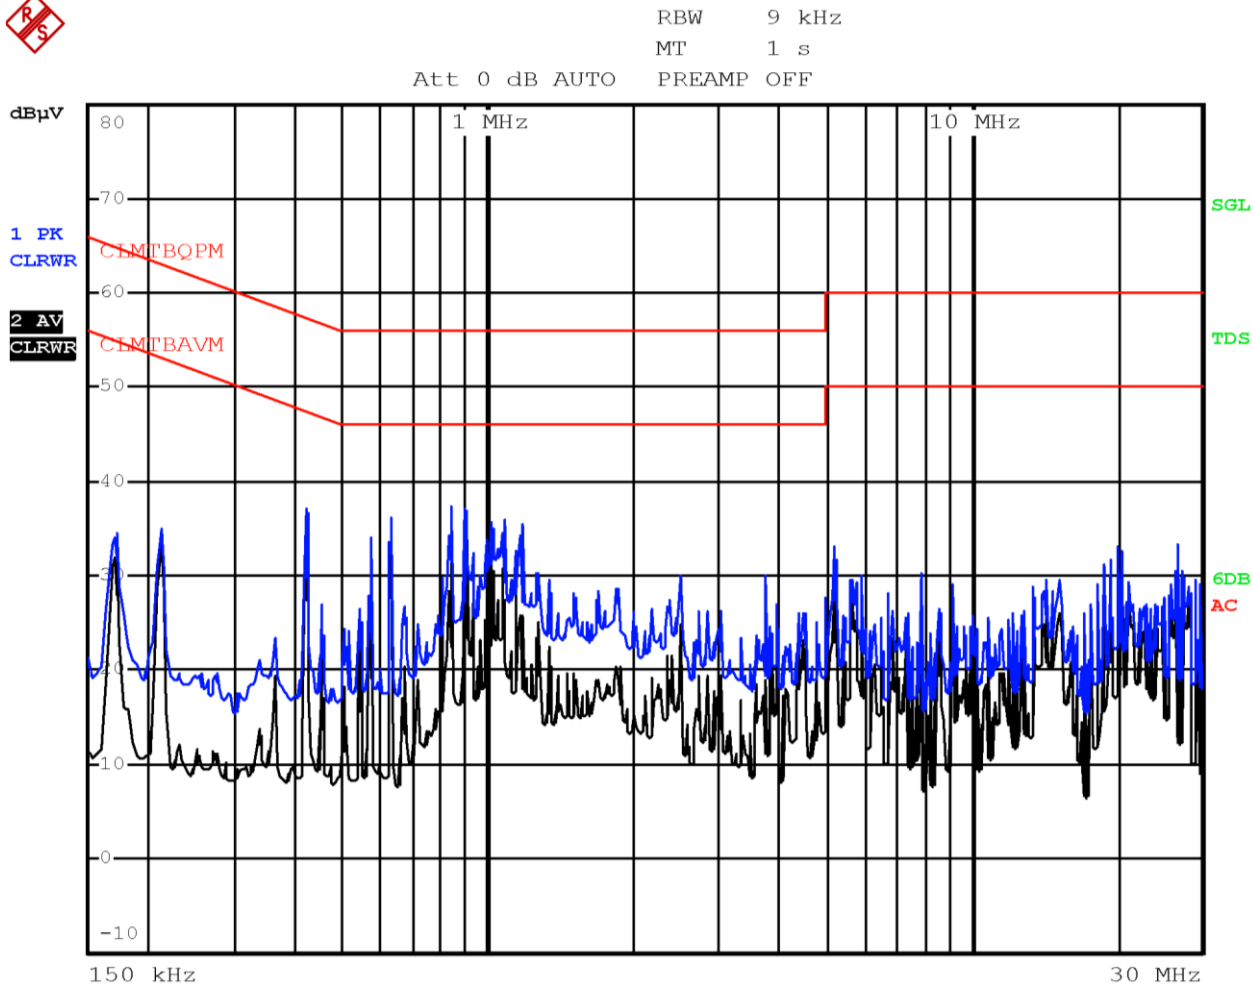


5.3 Antenna power conduction emission

5.3.1 Test result

Verdict for antenna port:	<input checked="" type="checkbox"/> P <input type="checkbox"/> F <input type="checkbox"/> N ¹ <input type="checkbox"/> NP
Frequency range:	30 MHz – 40000 MHz ²
Kind of test site:	Shielded room
Notes: ¹ If marked, the test is not applicable for the EUT. ² The frequency range of investigation of the system is specified by rule in Sections 15.33(a)(1) through (a)(3), or the range applicable to the digital device, as shown in Section 15.33(b)(1), whichever is the higher frequency range of investigation.	

5.3.2 Photo documentation of the test set-up

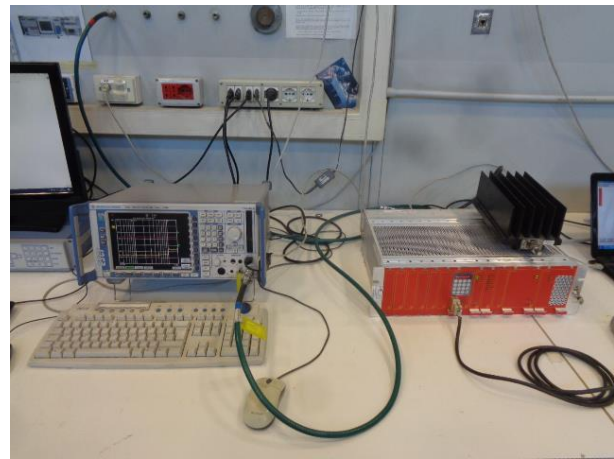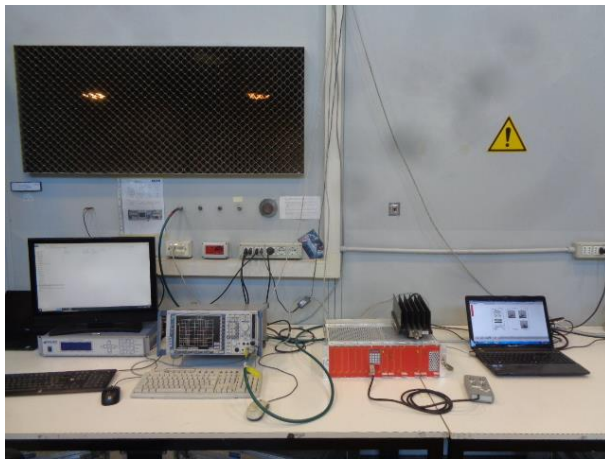

5.3.3 Test method

Method standard is reported at par. 3.1. In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the antenna power conduction limits for receivers. The test has been performed connecting the EUT directly to the receiver

Receiver reading P_R , reported in tables at clause 5.3.6, was achieved adjusting the input signal P_{IN} by a correction factor CF , to take into account of the insertion loss due the cables. This correction factor was pre-inserted in the firmware of the receiver and was applied by the instrument during the test. The relationship between P_R and P_{IN} , expressed in dB, is:

$$P_R = P_{IN} + CF$$

5.3.4 Limits


Antenna power conduction emission		
Frequency (MHz)	Limit	
	nW	dBm
30 to 1000	2	-57
Above 1000 ³	2	-57
Notes: --		

5.3.5 Test equipment used¹

Used ²	Description	Manufacturer	Model	Identifier
<input checked="" type="checkbox"/>	EMI receiver	R&S	ESU8	100202
<input type="checkbox"/>	EMI receiver	Rohde & Schwarz	ESW44	101620
<input checked="" type="checkbox"/>	Shielded room	Siemens	Conducted emission test room	1862
Notes: ¹ See clause 1.7 for calibration information. ² If crossed, the instrument was used during tests.				

5.3.6 Test protocol

EUT ¹ Test Port	Supply Voltage ²	Test Mode		Remarks	Verdict
		Operation ³	Configuration ⁴		
5	1	1	1	30 MHz to 2 GHz	P
<div>Notes:</div> <div><div>¹ See clause 4.6 EUT Input/Output Ports</div><div>² See clause 4.2 EUT Power Supply</div><div>³ See clause 4.4 EUT Operation Modes</div><div>⁴ See clause 4.5 EUT Configuration Modes</div></div>					

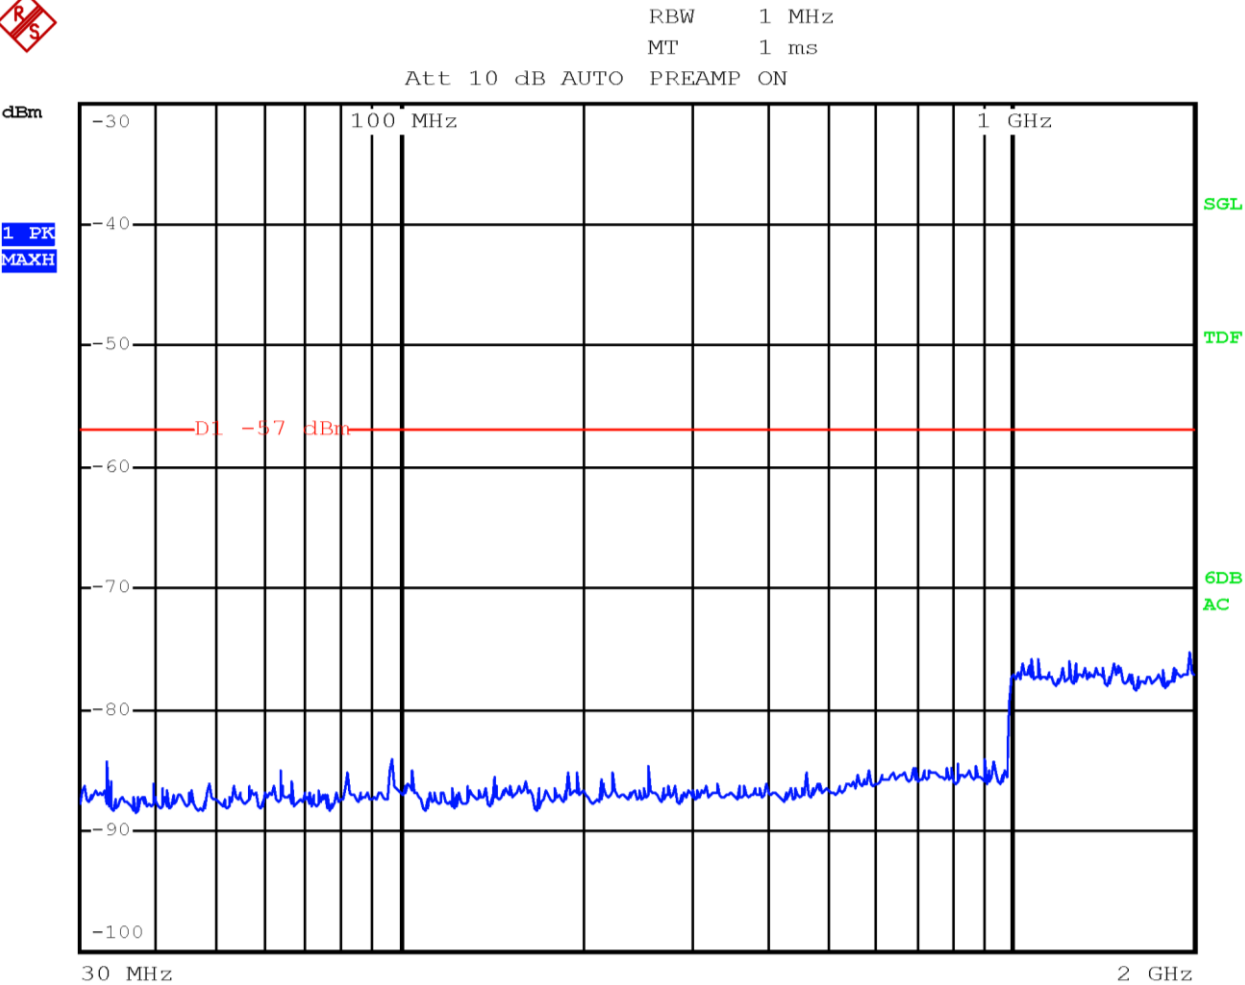


EUT ¹ Test Port	Supply Voltage ²	Test Mode		Remarks	Verdict
		Operation ³	Configuration ⁴		
5	1	1	1	2 GHz to 8.3 GHz	P

Notes:


¹ See clause 4.6 EUT Input/Output Ports

² See clause 4.2 EUT Power Supply

³ See clause 4.4 EUT Operation Modes

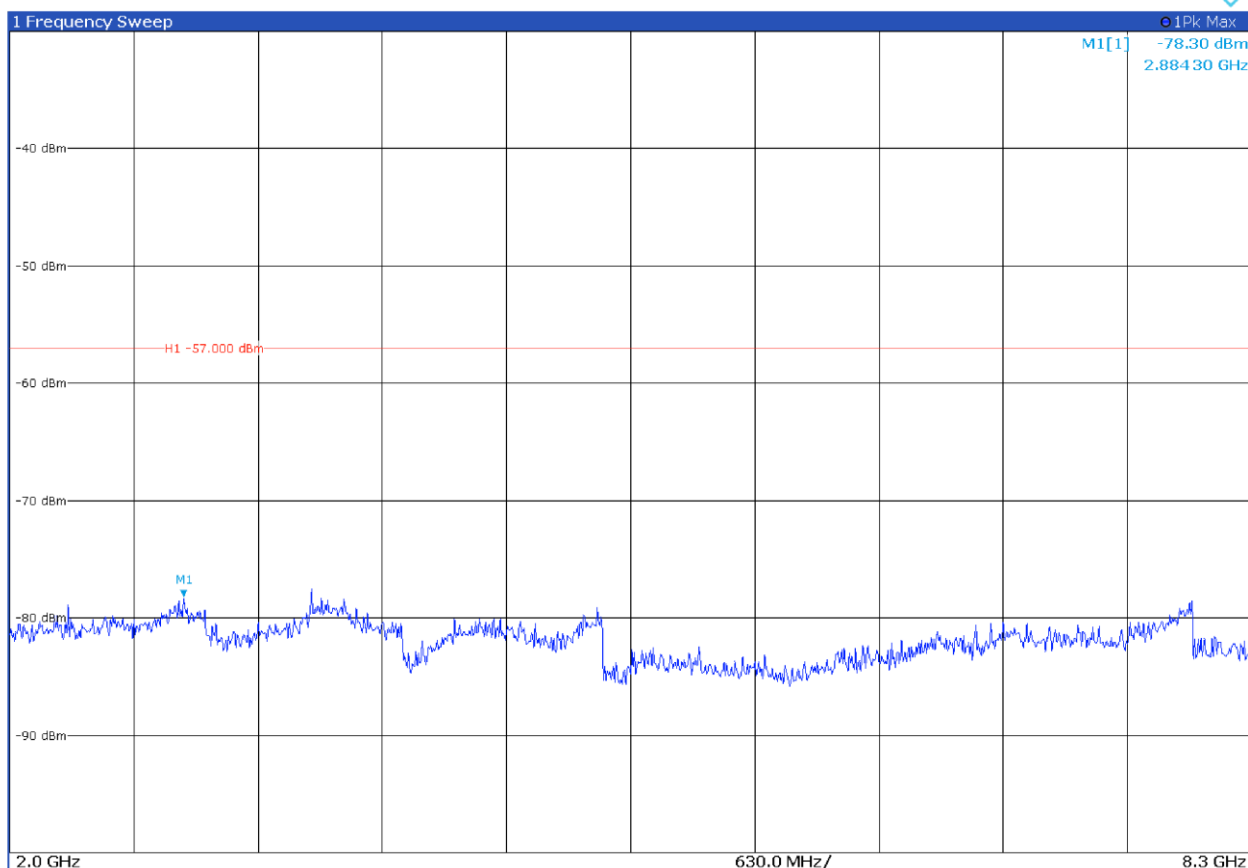⁴ See clause 4.5 EUT Configuration Modes


6 EUT PHOTOS

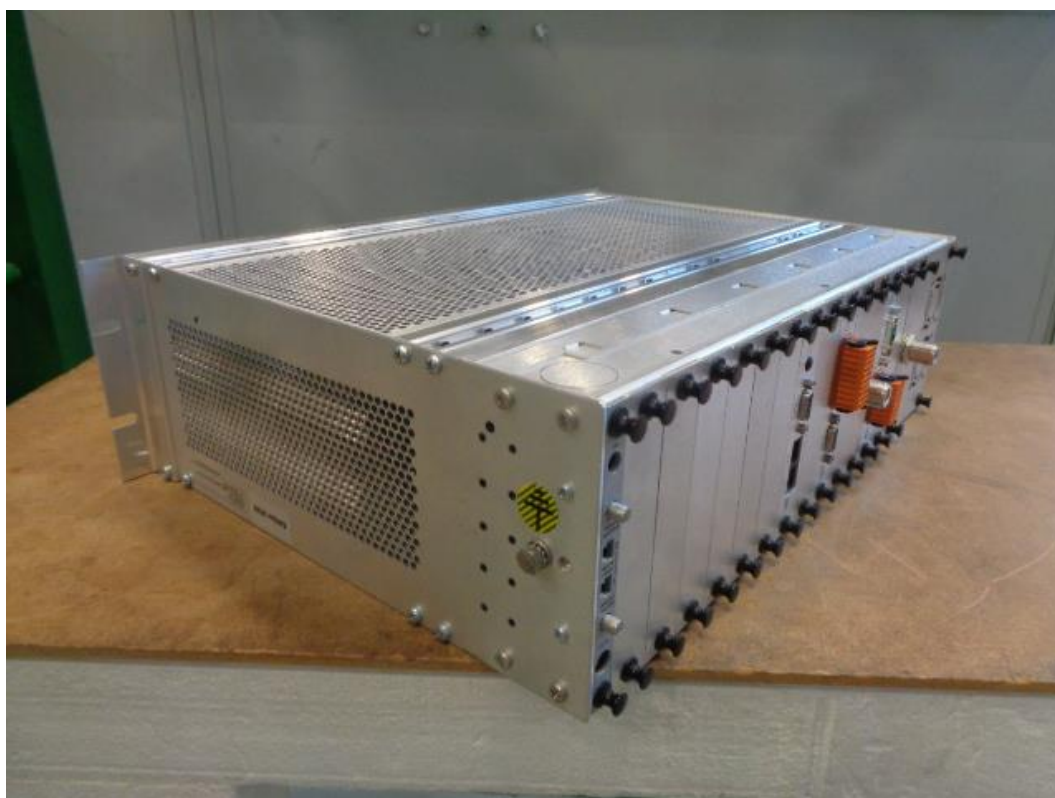

End of report