



TEST REPORT

For

Applicant : RM ACQUISITIONS LLC

Address : 9855 Woods Drive Skokie. IL 60077 U.S.A

Product Name : TND Tablet

Model Name : TNBT80B, RVT80B, RET80B

Brand Name : Rand McNally

FCC ID : A4C-1000AA

Report No. : MTE/CEC/S16071514

Date of Issue : Jul.19, 2016

Issued by : Most Technology Service Co., Ltd.

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

Tel : 86-755-8602 6850

Fax : 86-755-26013350

The report consists 52 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1 Product Information.....	5
2.2 Objective.....	5
2.3 Test Standards and Results	6
2.4 Environmental Conditions	6
3. TEST METHODOLOGY.....	7
3. 1TEST FACILITY	7
3.2 GENERAL TEST PROCEDURES	7
4. SETUP OF EQUIPMENT UNDER TEST	8
4.1 SETUP CONFIGURATION OF EUT	8
4.2 TEST EQUIPMENT LIST	8
5. 47 CFR Part 15 C Requirements	9
5.1 RF EXPOSURE	9
5.1.1 Applicable Standard	9
5.1.2 Measurement Result	9
5.2 ANTENNA REQUIREMENT.....	10
5.2.1 Applicable Standard	10
5.2.2 Evaluation Criteria.....	10
5.2.3 Result: Compliance.....	10
5.3 AC Power Line Conducted Emission.....	11
5.3.1Requirement	11
5.3.2 Block Diagram of Test Setup	11
5.3.3 Test procedure.....	11
5.3.4 Test Result	11
5.4 Radiated Emission	16
5.4.1Requirement	16
5.4.2 Test Configuration	16
5.4.3 Test Procedure:.....	17
5.4.4 Test Result	18
5.5.1 Requirement	25
5.5.2 Block Diagram of Test Setup	25
5.5.3 Test Procedure	25
5.5.4 Test Result	25
5.6 20dB Emission Bandwidth	29
5.6.1 Test Requirement	29
5.6.2 Test Procedure	29
5.6.3 Test Result	29
5.7 Carrier Frequency Separation	33
5.7.1 Test Requirement	33
5.7.2 Test Procedure	33
5.7.3 Test Result	33
5.8 Number of Hopping Channel	37
5.8.1 Test Requirement	37
5.8.2 Test Procedure	37
5.8.3 Test Result	37
5.9 Dwell Time	39

5.9.1 Test Requirement	39
5.9.2 Test Procedure	39
5.9.3 Test Result	39
5.9 Band Edge and Conducted Spurious Emissions	43
5.9.1 Test Requirement	43
5.9.2 Test Procedure	43
5.9.3 Test Result	43
5.10 Restricted Frequency Bands.....	48
5.10.1 Test Requirement	48
5.10.2 Test Configuration	48
5.10.3 Test Procedure:.....	48
5.10.4 Test Result	48

1. VERIFICATION OF CONFORMITY

Equipment Under Test: TND Tablet

Brand Name: Rand McNally

Model Number: TNBT80B(Adapter Model:KZ0502000)

FCC ID: A4C-1000AA

Applicant: RM ACQUISITIONS LLC

9855 Woods Drive Skokie, IL 60077 U.S.A

Manufacturer: SHEN ZHEN APICAL TECHNOLOGY CO., LTD

9/F,B Building, Tinghua Unis Infoport, Langshan RD, North district,
Hi-tech Industrial Park, Nanshan, Shenzhen

Technical Standards: 47 CFR Part 15 Subpart C

File Number: MTE/CEC/S16071514

Date of test: Jul.01-18, 2016

Deviation: None

Condition of Test

Normal

Sample:

Test Result: PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):

Chloe

Chloe Cai

Jul.01-18, 2016

Review by (+ signature):

Henry

Henry Chen



Jul.19, 2016

Approved by (+ signature):

J Zhou

Yvette Zhou (Manager)

Jul.19, 2016

2. GENERAL INFORMATION

2.1 Product Information

Product	TND Tablet
Brand Name	Rand McNally
Model Number	TNDT80B
Series Model Name:	RVT80B, RET80B
Series Model Difference description:	Only different in model name.
Power Supply	DC 5V by USB Port DC 3.7V by Battery
Frequency Range	2402MHz -2480MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation Technique	FHSS
Channel Number	79
Antenna Type	Internal Antenna, 0.5dBi
Temperature Range	-10°C ~ +55°C

NOTE:

1. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

The objective of the report is to perform tests according to FCC Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices
2	DA00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

2.3 Test Standards and Results

No.	Section	Test Items	Result	Date of Test
1	FCC 15.247 (i)	RF EXPOSURE	PASS	2016-07-12
2	FCC 15.203	Antenna Requirement	PASS	2016-07-13
3	FCC15.207 (a)	AC Power Line Conducted Emission	PASS	2016-07-12
4	FCC15.209, 15.247(d)	Radiated Emission	PASS	2016-07-12
5	FCC 15.247 (b)(1)	Conducted Peak Output Power	PASS	2016-07-11
6	FCC 15.247 (a)(1)	20dB Emission Bandwidth	PASS	2016-07-11
7	FCC 15.247 (a)(1)	Carrier Frequency Separation	PASS	2016-07-11
8	FCC 15.247 (a)(1)(iii)	Number of Hopping Channel	PASS	2016-07-11
9	FCC 15.247 (a)(1) (iii)	Dwell Time	PASS	2016-07-12
10	FCC15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	2016-07-12
11	FCC15.247(d)	Restricted Frequency Bands	PASS	2016-07-12
Remark: N/A means not applicable				

Note: 1. The test result judgment is decided by the limit of measurement standard
 2. The information of measurement uncertainty is available upon the customer's request.

2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

3. TEST METHODOLOGY

3. 1 TEST FACILITY

Test Site: Most Technology Service Co., Ltd
Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China
Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.10:2013 and CISPR 16 requirements.
The FCC Registration Number is **490827**. The **IC** Registration Number is **7103A-1**.
Site Filing: The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.
Instrument All measuring equipment is in accord with ANSI C63.10:2013 and CISPR 16
Tolerance: requirements that meet industry regulatory agency and accreditation agency requirement.
Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

3.2 GENERAL TEST PROCEDURES

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.5 of ANSI C63.10:2013.

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10:2013, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

4. SETUP OF EQUIPMENT UNDER TEST

4.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

4.2 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration Interval
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2016/03/10	1 Year
2	Spectrum Analyzer	Agilent	E7405A	US44210471	2016/03/14	1 Year
3	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2016/03/10	1 Year
4	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2016/03/07	1 Year
5	Terminator	Hubersuhner	50Ω	No.1	2016/03/07	1 Year
6	RF Cable	SchwarzBeck	N/A	No.1	2016/03/07	1 Year
7	Test Receiver	Rohde & Schwarz	ESPI	101202	2016/03/10	1 Year
8	Bilog Antenna	Sunol	JB3	A121206	2016/03/14	1 Year
9	Horn Antenna	SCHWARZBECK	BBHA9120D	756	2016/03/14	1 Year
10	Horn Antenna	Penn Engineering	9034	8376	2016/03/14	1 Year
11	Cable	Resenberger	N/A	NO.1	2016/03/07	1 Year
12	Cable	SchwarzBeck	N/A	NO.2	2016/03/07	1 Year
13	Cable	SchwarzBeck	N/A	NO.3	2016/03/07	1 Year
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2016/03/07	1 Year
15	Test Receiver	Rohde & Schwarz	ESCI	100492	2016/03/10	1 Year
16	Loop antenna	ARA	PLA-1030/B	1039	2016/03/14	1 Year

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 15 C Requirements

5.1 RF EXPOSURE

5.1.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

$f(\text{GHz})$ is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is \leq 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is $<$ 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

5.1.2 Measurement Result

The maximum conducted output power=6.004 dBm (3.985 mW) at 2402 MHz $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$

$$=3.985/5 * (\sqrt{2.402}) = 1.550 < 3.0$$

So the stand-alone SAR evaluation is not necessary.

5.2 ANTENNA REQUIREMENT

5.2.1 Applicable Standard

According to FCC § 15.203 , An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

5.2.2 Evaluation Criteria

- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, Installer shall be responsible for verifying that the correct antenna is employed with the unit.

5.2.3 Result: Compliance.

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0.5 dBi, fulfill the requirement of this section.

5.3 AC Power Line Conducted Emission

5.3.1 Requirement


A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz-30 MHz, shall not exceed the limits in the following table:

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

****Note:** 1. the lower limit shall apply at the band edges.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.3.2 Block Diagram of Test Setup

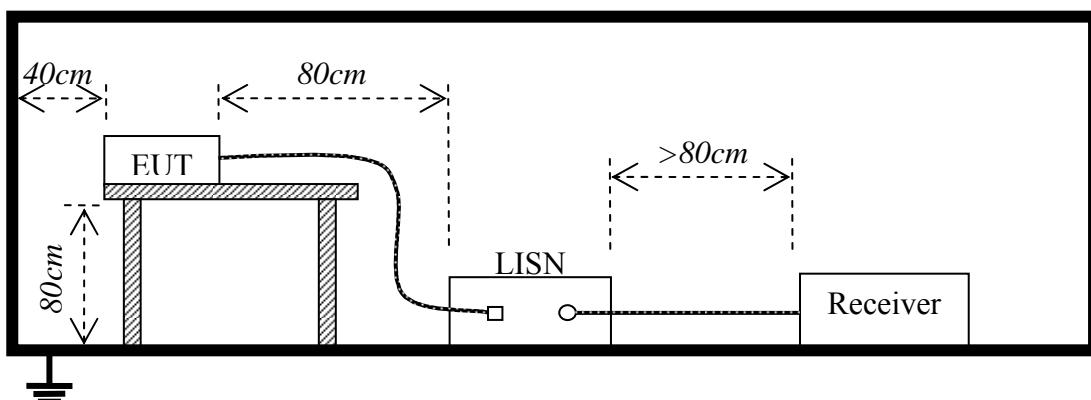

5.3.3 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. Exploratory measurements were made to identify the frequency of the emission that has the highest amplitude relative to the limit;
3. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
4. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.
5. The bandwidth of test receiver (ESCI) set at 9 KHz.
6. All data was recorded in the Quasi-peak and average detection mode.


5.3.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following pages.


EUT:	TND Tablet	M/N:	TNDT80B (Adapter Model:KZ0502000)
Mode:	Charging	Phase:	L1
Test by:	John	Power:	DC 5V by USB Port
Temperature: / Humidity	23.4°C / 52.9%	Test date:	2016-07-11

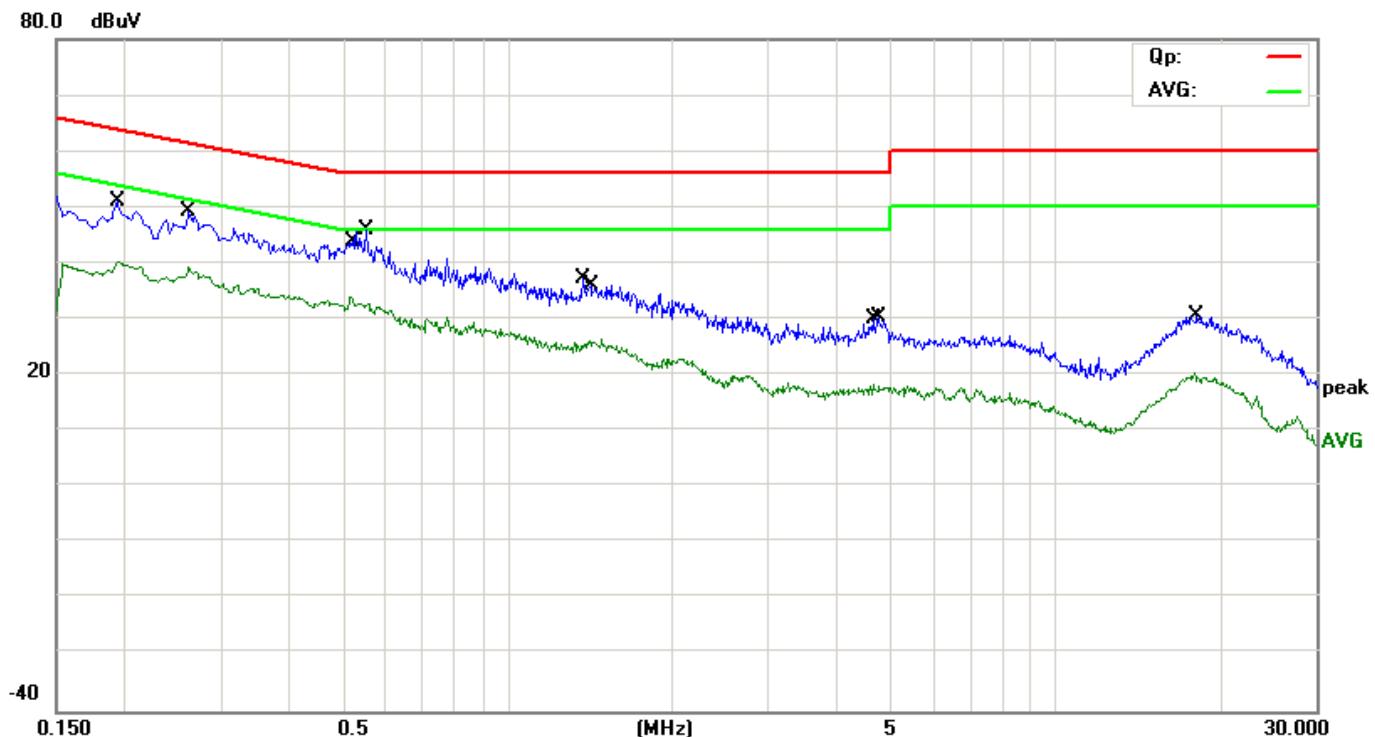

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1940	41.55	9.60	51.15	63.86	-12.71	QP	
2		0.1940	30.68	9.60	40.28	53.86	-13.58	AVG	
3		0.2620	39.74	9.60	49.34	61.37	-12.03	QP	
4		0.2620	29.62	9.60	39.22	51.37	-12.15	AVG	
5		0.5180	24.24	9.59	33.83	46.00	-12.17	AVG	
6 *		0.5540	36.23	9.59	45.82	56.00	-10.18	QP	
7		1.3740	27.74	9.60	37.34	56.00	-18.66	QP	
8		1.4180	16.53	9.60	26.13	46.00	-19.87	AVG	
9		4.6660	8.79	9.63	18.42	46.00	-27.58	AVG	
10		4.7500	20.87	9.63	30.50	56.00	-25.50	QP	
11		17.9540	10.64	9.72	20.36	50.00	-29.64	AVG	
12		18.1780	20.81	9.72	30.53	60.00	-29.47	QP	

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B (Adapter Model:KZ0502000)
Mode:	Charging	Phase:	N
Test by:	John	Power:	DC 5V by USB Port
Temperature: / Humidity	23.4°C / 52.9%	Test date:	2016-07-11

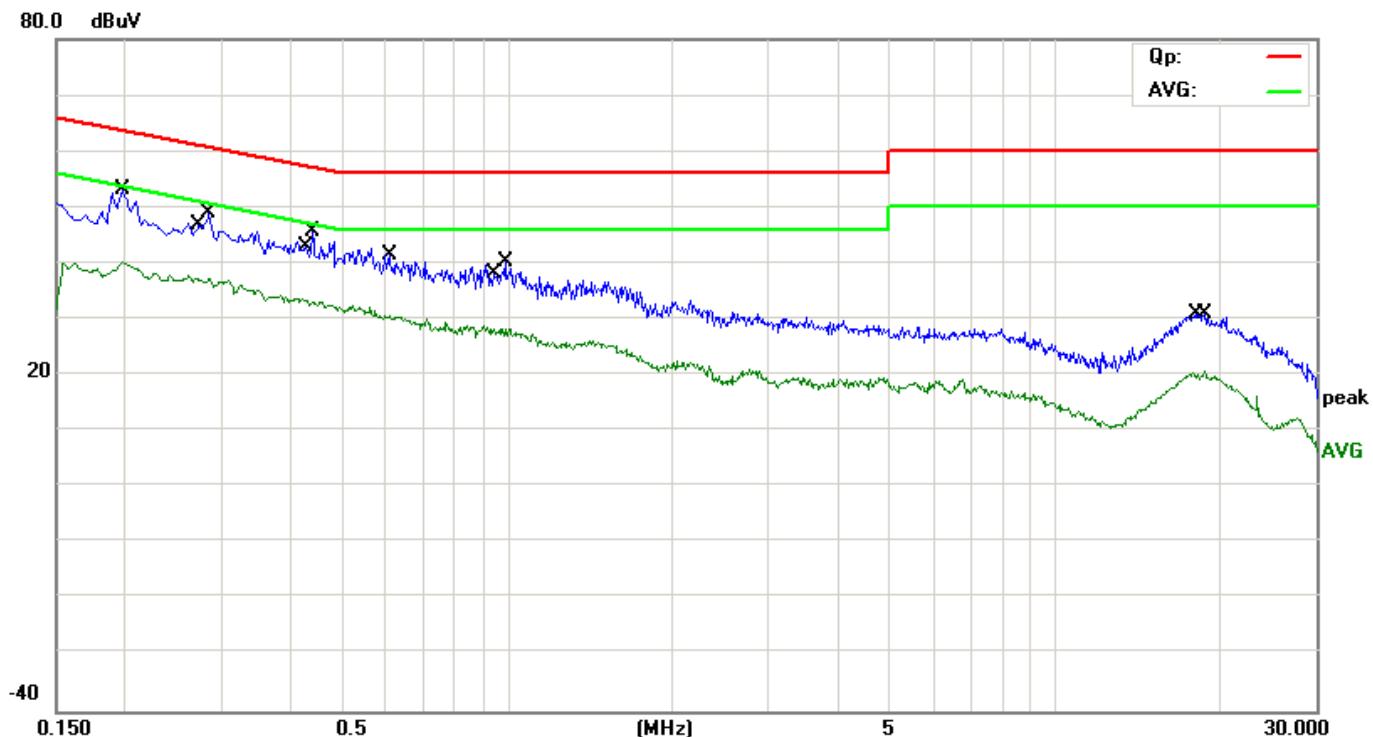

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1	*	0.1980	43.47	9.60	53.07	63.69	-10.62	QP	
2		0.1980	30.77	9.60	40.37	53.69	-13.32	AVG	
3		0.2701	27.70	9.60	37.30	51.11	-13.81	AVG	
4		0.2860	39.35	9.59	48.94	60.64	-11.70	QP	
5		0.4220	24.05	9.59	33.64	47.41	-13.77	AVG	
6		0.4420	36.04	9.59	45.63	57.02	-11.39	QP	
7		0.6100	31.77	9.59	41.36	56.00	-14.64	QP	
8		0.6100	21.02	9.59	30.61	46.00	-15.39	AVG	
9		0.9460	18.74	9.60	28.34	46.00	-17.66	AVG	
10		0.9940	30.62	9.60	40.22	56.00	-15.78	QP	
11		18.0900	21.29	9.72	31.01	60.00	-28.99	QP	
12		18.7460	10.95	9.72	20.67	50.00	-29.33	AVG	

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	Charging	Phase:	L1
Test by:	John	Power:	DC 5V by USB Port
Temperature: / Humidity	23.4°C / 52.9%	Test date:	2016-07-14

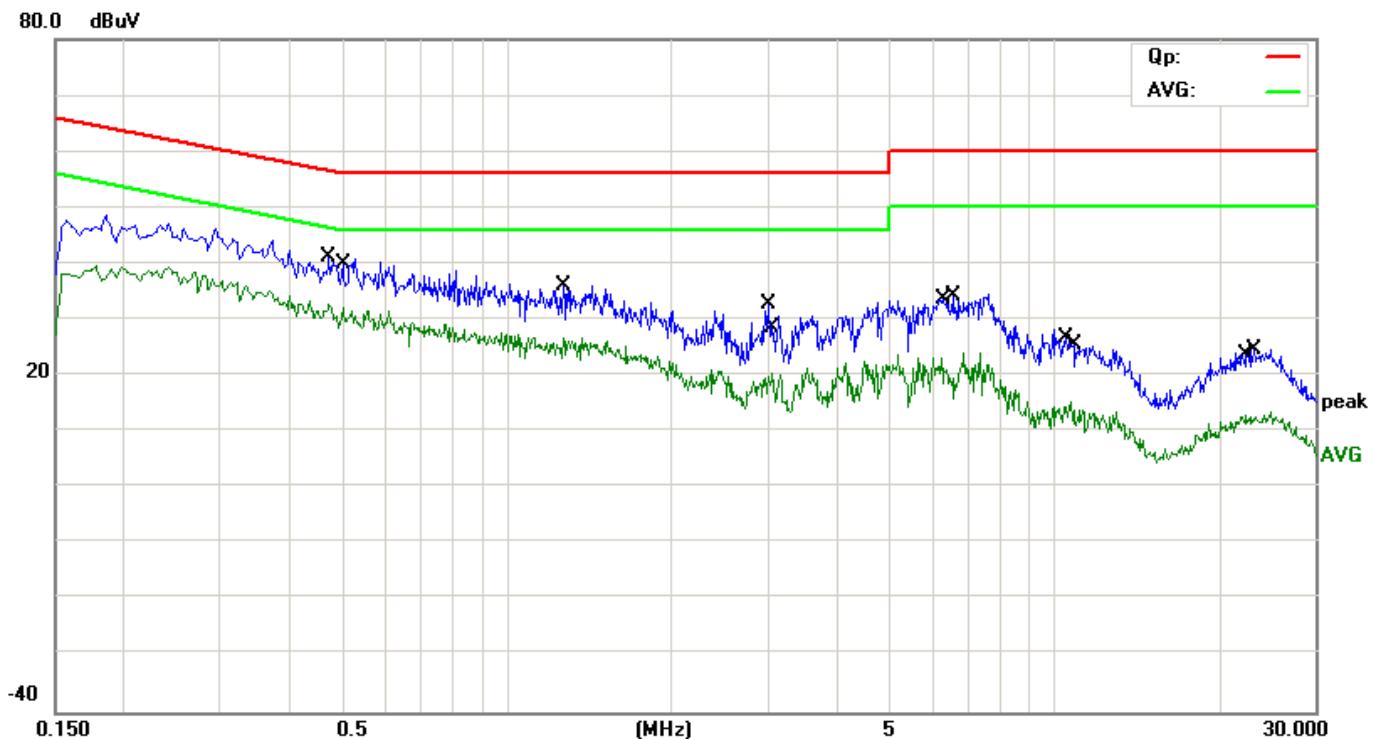

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		6.2420	11.81	11.25	23.06	50.00	-26.94	AVG	
2		6.5340	23.28	11.08	34.36	60.00	-25.64	QP	
3		23.1660	15.70	9.00	24.70	60.00	-35.30	QP	
4		22.5220	3.87	9.00	12.87	50.00	-37.13	AVG	
5		10.7660	6.41	9.00	15.41	50.00	-34.59	AVG	
6		10.5580	17.83	9.00	26.83	60.00	-33.17	QP	
7		3.0660	10.25	10.07	20.32	46.00	-25.68	AVG	
8		3.0180	22.71	10.02	32.73	56.00	-23.27	QP	
9		0.5020	30.06	10.00	40.06	56.00	-15.94	QP	
10	*	0.4780	22.41	10.15	32.56	46.37	-13.81	AVG	
11		1.2700	16.87	9.73	26.60	46.00	-19.40	AVG	
12		1.2700	26.37	9.73	36.10	56.00	-19.90	QP	

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	Charging	Phase:	N
Test by:	John	Power:	DC 5V by USB Port
Temperature: / Humidity	23.4°C / 52.9%	Test date:	2016-07-14

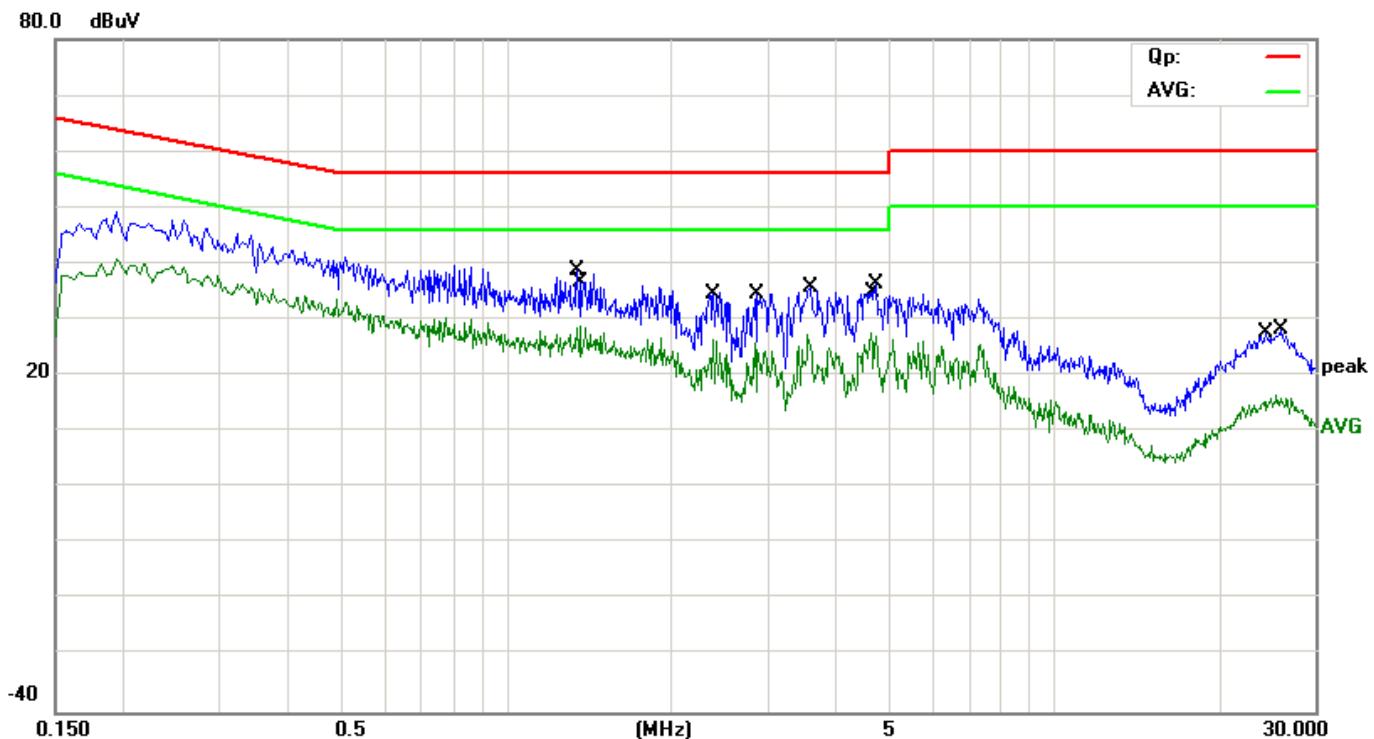

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1	*	1.3660	19.14	9.63	28.77	46.00	-17.23	AVG
2		1.3460	28.95	9.65	38.60	56.00	-17.40	QP
3		2.3900	25.27	9.39	34.66	56.00	-21.34	QP
4		2.3900	17.12	9.39	26.51	46.00	-19.49	AVG
5		2.8540	16.00	9.85	25.85	46.00	-20.15	AVG
6		2.8740	24.75	9.87	34.62	56.00	-21.38	QP
7		3.5900	25.28	10.59	35.87	56.00	-20.13	QP
8		3.5500	16.69	10.55	27.24	46.00	-18.76	AVG
9		4.6300	16.01	11.63	27.64	46.00	-18.36	AVG
10		4.7460	24.48	11.75	36.23	56.00	-19.77	QP
11		24.4860	18.54	9.00	27.54	60.00	-32.46	QP
12		25.4860	7.43	9.00	16.43	50.00	-33.57	AVG

*:Maximum data x:Over limit !:over margin

5.4 Radiated Emission

5.4.1 Requirement

According to FCC section 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC section 15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at 3-meter)	Test Distance (m)	Field Strength (dB $\mu\text{V}/\text{m}$ at 3-meter)
0.009 - 0.490	$2400/F(\text{kHz})$	300	
0.490 - 1.705	$24000/F(\text{kHz})$	30	
1.705-30	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Note:


- For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- For above 1000MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}$ @3m (AV) and 74dB $\mu\text{V}/\text{m}$ @3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


5.4.2 Test Configuration

Test Setup:


- For radiated emissions from 9kHz to 30MHz

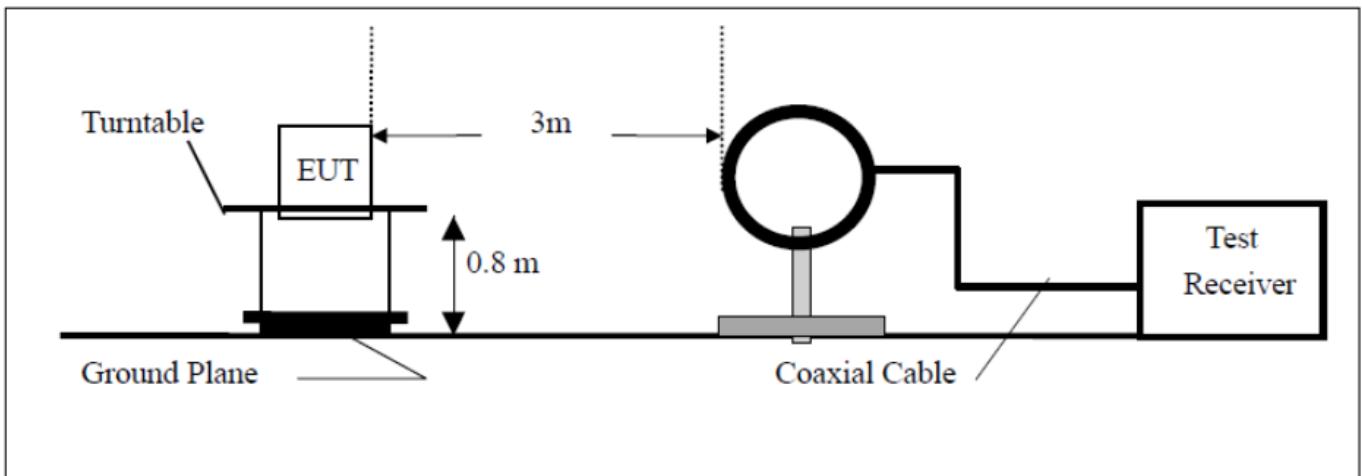

2) For radiated emissions from 30MHz to1GHz

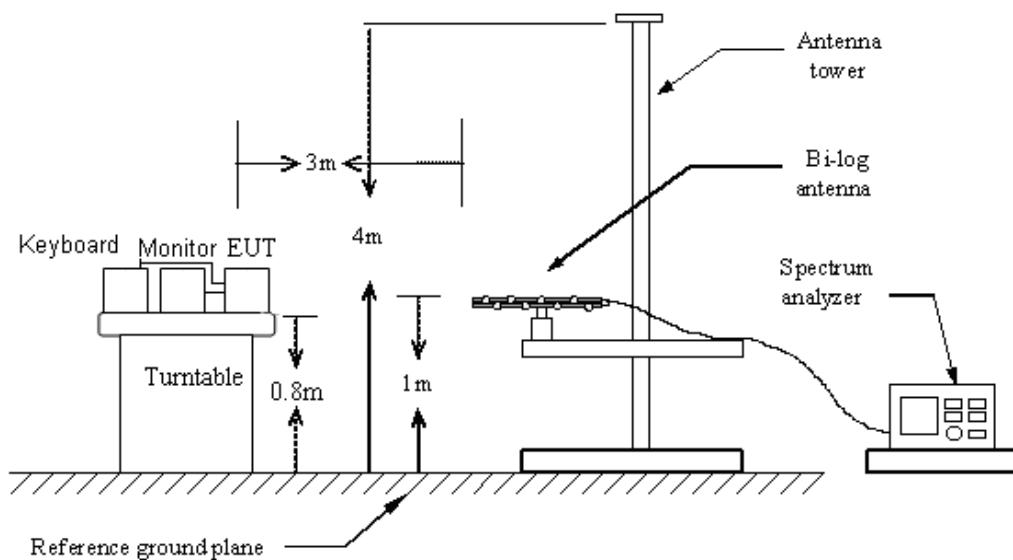

3) For radiated emissions above 1GHz

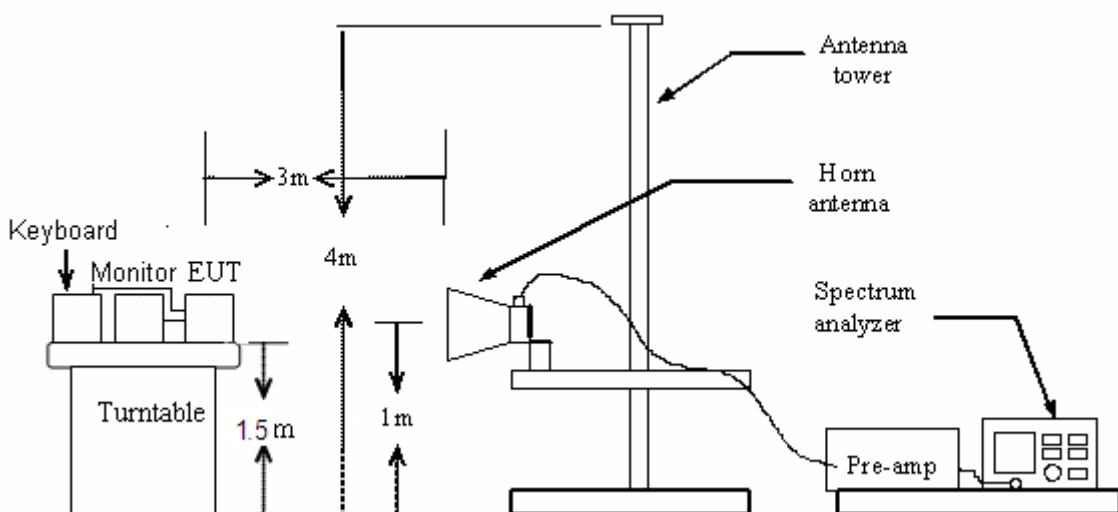

5.4.3 Test Procedure:

1. For frequencies above 1GHz, the frequencies of maximum emission was recorded by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display.
2. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
4. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rote table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. For frequencies above 1GHz, horn antenna mouth should face to the EUT all the time when rise or fall.

7. Set the spectrum analyzer in the following setting as:

Below 1GHz: PEAK: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO QP: RBW=120 kHz / Sweep=AUTO

Above 1GHz: (a)PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b)AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

8. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

5.4.4 Test Result

Pass

Remark:


1. During the test, pre-scan the GFSK, π/4-QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case in above 1GHz and the GFSK Low channel modulation which it is worse case in below 1GHz.

2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Please refer the following pages.

Below 1GHz:


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.9°C / 53.6%	Test date:	2016-07-12

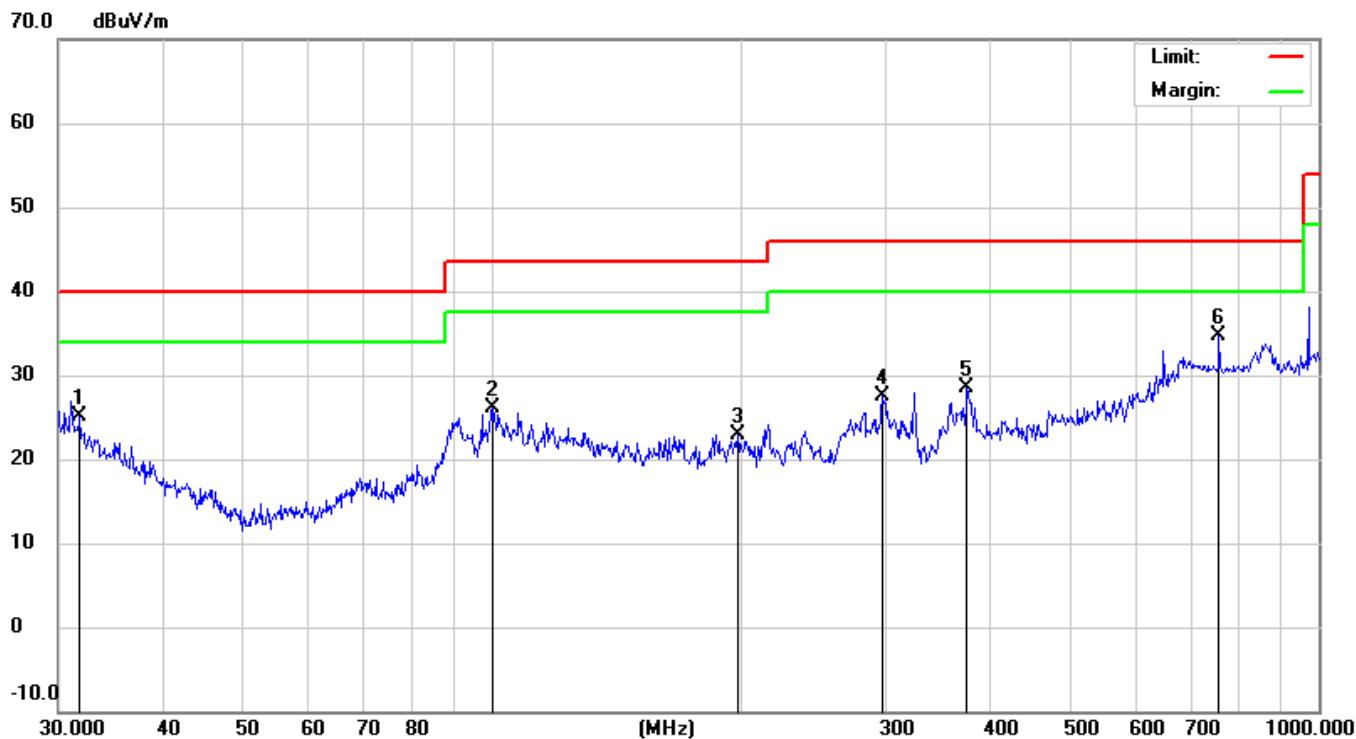

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height cm	Table Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	degree	
1		31.8427	4.28	20.84	25.12	40.00	-14.88	QP		
2		100.2285	12.87	13.26	26.13	43.50	-17.37	QP		
3		198.5879	5.60	17.29	22.89	43.50	-20.61	QP		
4		297.2238	8.13	19.33	27.46	46.00	-18.54	QP		
5		375.9385	10.27	18.14	28.41	46.00	-17.59	QP		
6	*	758.0407	9.04	25.64	34.68	46.00	-11.32	QP		

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.9°C / 53.6%	Test date:	2016-07-12

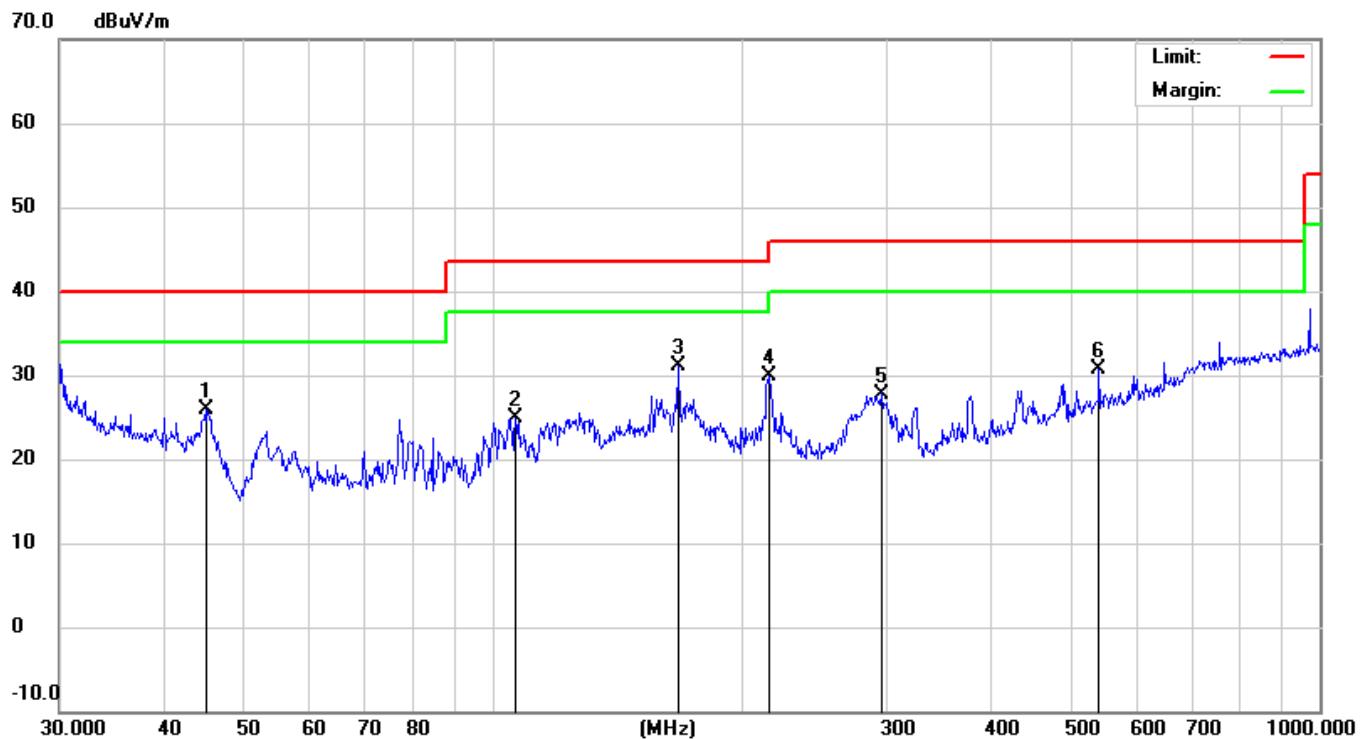


No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
			dBuV	dB	dBuV/m					
1		45.0583	12.76	13.12	25.88	40.00	-14.12	QP		
2		106.7587	9.73	15.16	24.89	43.50	-18.61	QP		
3	*	167.8242	13.80	17.23	31.03	43.50	-12.47	QP		
4		216.0238	13.72	16.14	29.86	46.00	-16.14	QP		
5		295.1468	8.45	19.35	27.80	46.00	-18.20	QP		
6		541.3725	8.44	22.24	30.68	46.00	-15.32	QP		

*:Maximum data x:Over limit !:over margin

Above 1GHz:


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	22.8°C / 53.5%	Test date:	2016-07-12

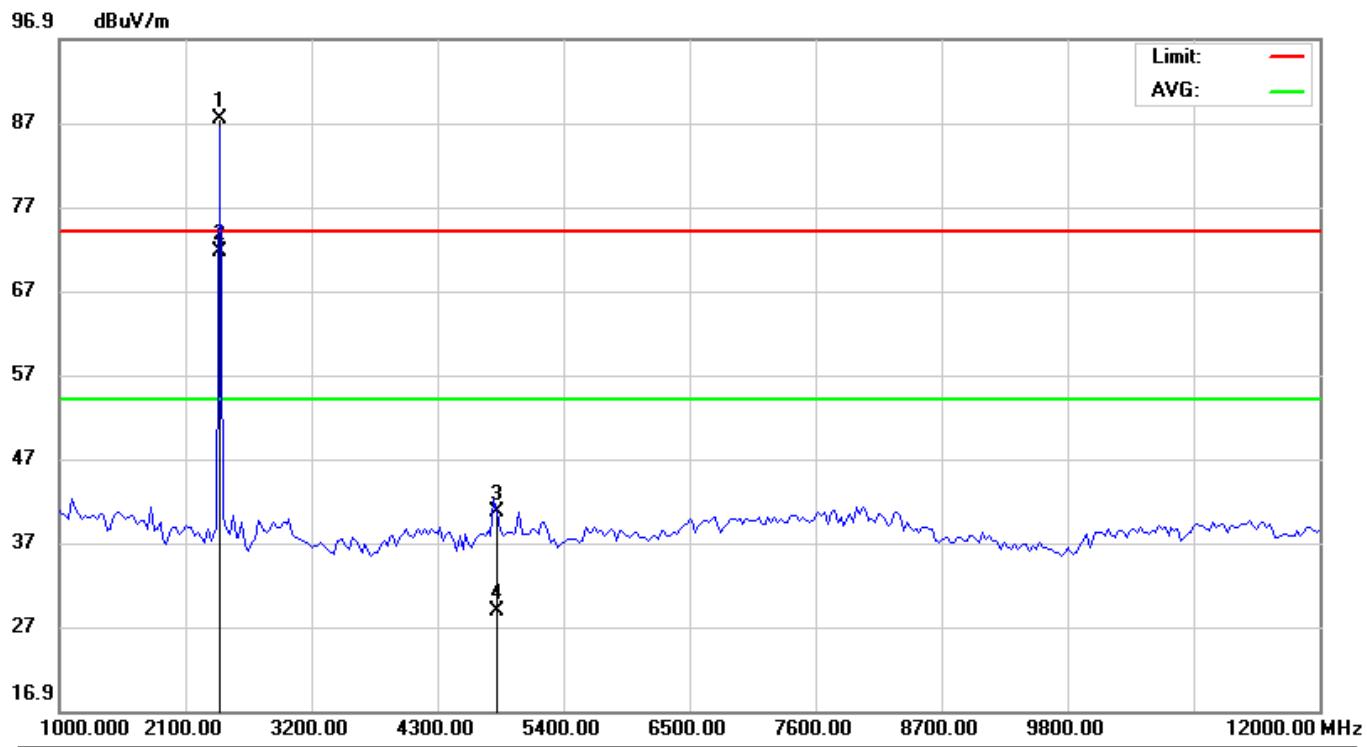

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2402.500	95.86	-8.43	87.43	74.00	13.43	peak		
2	*	2402.500	80.01	-8.43	71.58	54.00	17.58	AVG		
3		4804.000	46.75	-6.15	40.60	74.00	-33.40	peak		
4		4804.000	35.04	-6.15	28.89	54.00	-25.11	AVG		

*:Maximum data x:Over limit !:over margin


EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	22.8°C / 53.5%	Test date:	2016-07-12

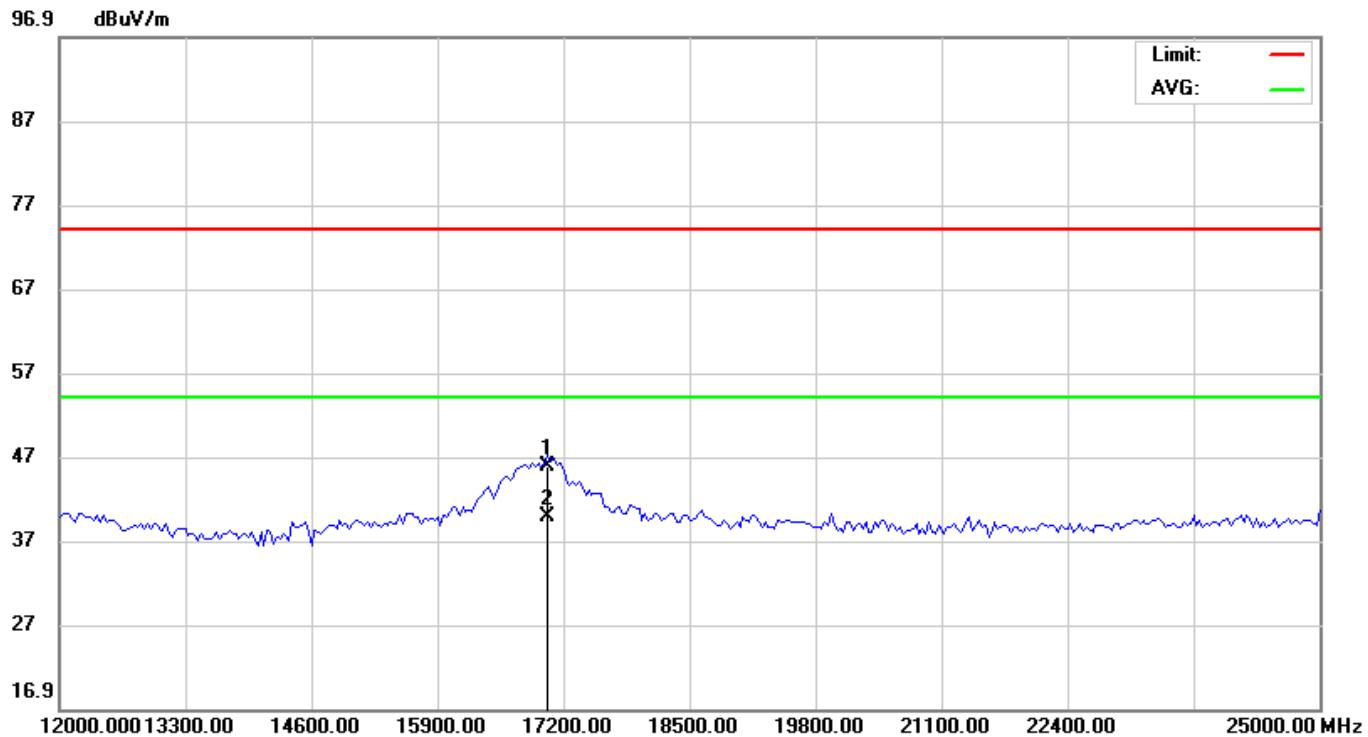

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment			Height	Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		17037.50	39.01	6.73	45.74	74.00	-28.26	peak			
2	*	17037.50	33.15	6.73	39.88	54.00	-14.12	AVG			


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	22.8°C / 53.5%	Test date:	2016-07-12

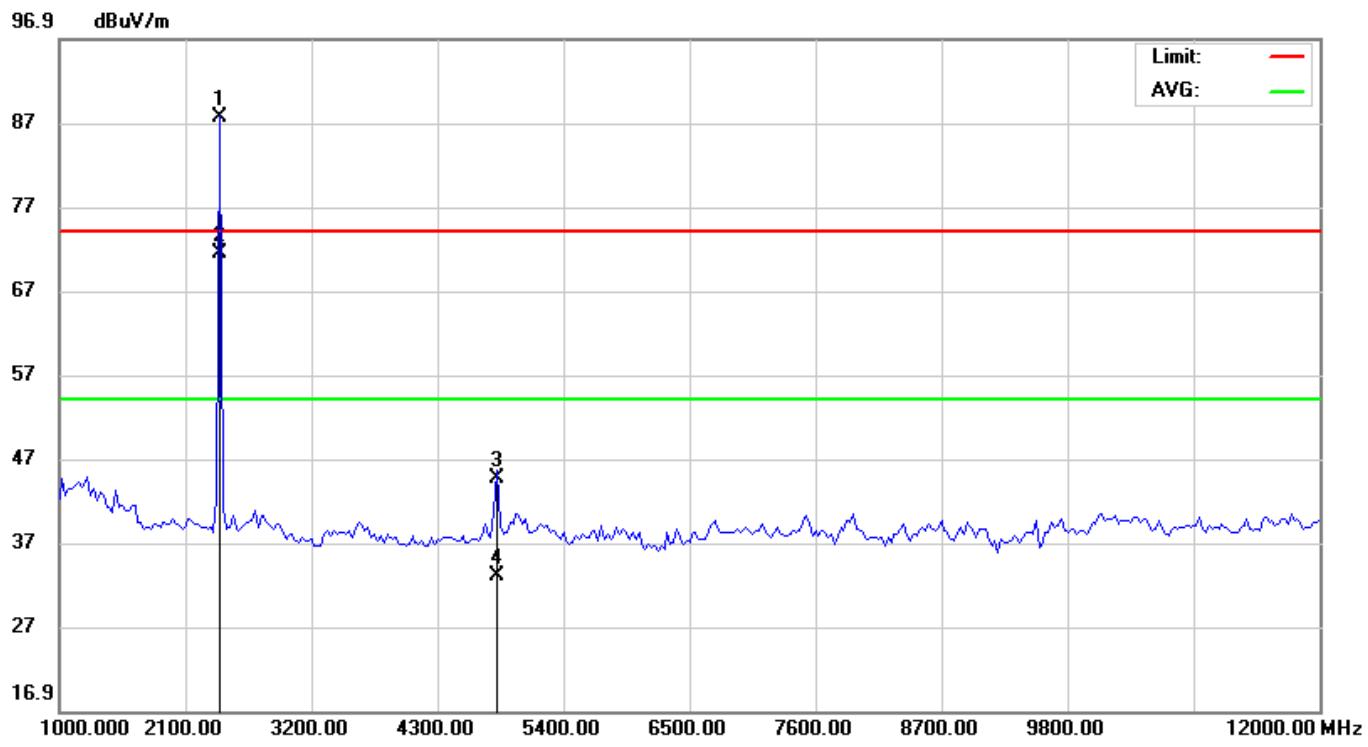

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	22.8°C / 53.5%	Test date:	2016-07-12

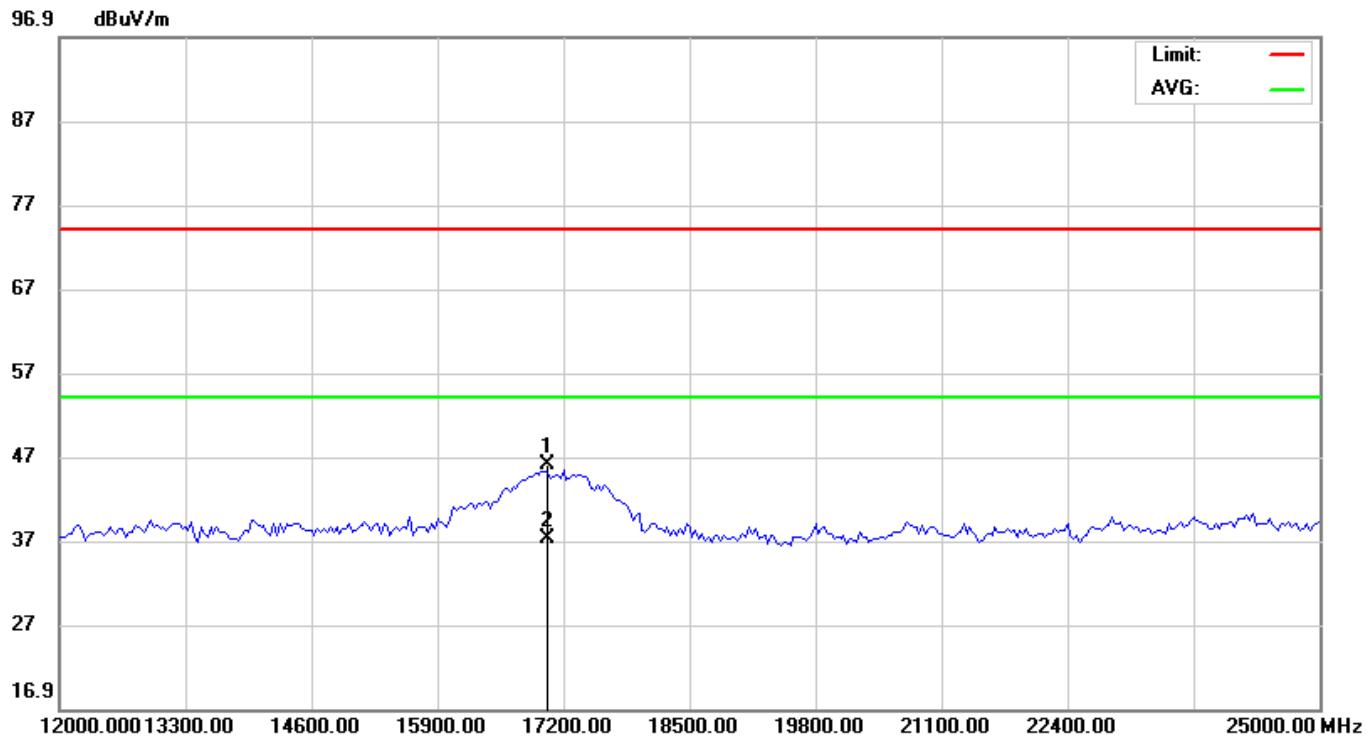

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17006.00	39.01	6.90	45.91	74.00	-28.09	peak		
2	*	17006.00	30.24	6.90	37.14	54.00	-16.86	AVG		


*:Maximum data x:Over limit !:over margin

5.5 Conducted Peak Output Power

5.5.1 Requirement

According to FCC Section 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

5.5.2 Block Diagram of Test Setup

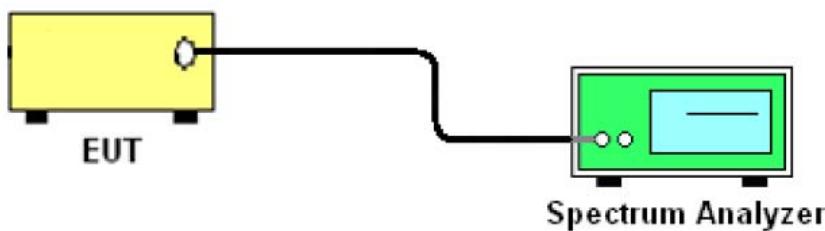


5.5.3 Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.


5.5.4 Test Result

Test Item:	Peak Output Power	Temperature :	21°C
Test Engineer:	Kang	Relative Humidity :	59%


Mode	Channel	Frequency (MHz)	Peak Output Power(dBm)	Limit		Pass/Fail
				(mW)	(dBm)	
BDR (GFSK)	Low	2402	5.967	125	20.97	Pass
	Middle	2441	5.254	125	20.97	Pass
	High	2480	4.378	125	20.97	Pass
EDR ($\pi/4$ -DQPSK)	Low	2402	6.004	125	20.97	Pass
	Middle	2441	5.248	125	20.97	Pass
	High	2480	4.384	125	20.97	Pass
EDR (8DPSK)	Low	2402	6.004	125	20.97	Pass
	Middle	2441	5.263	125	20.97	Pass
	High	2480	4.380	125	20.97	Pass

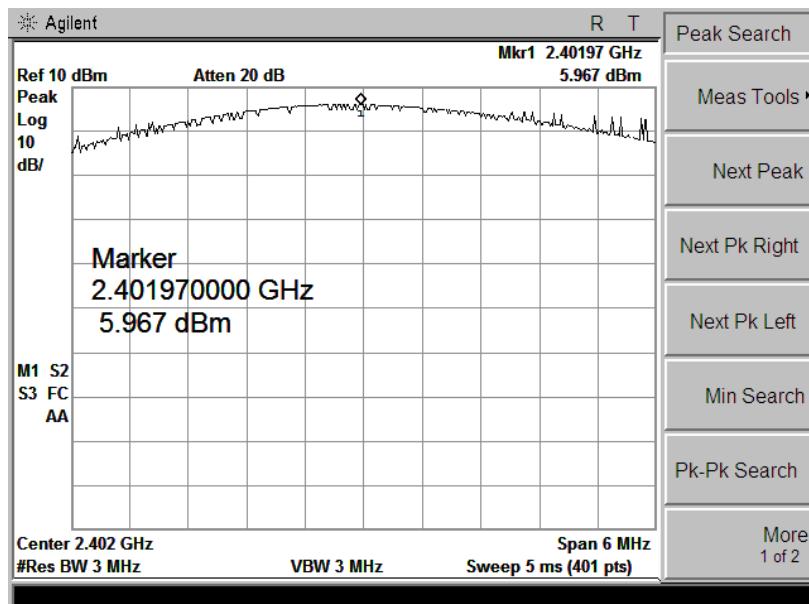


Ch 0

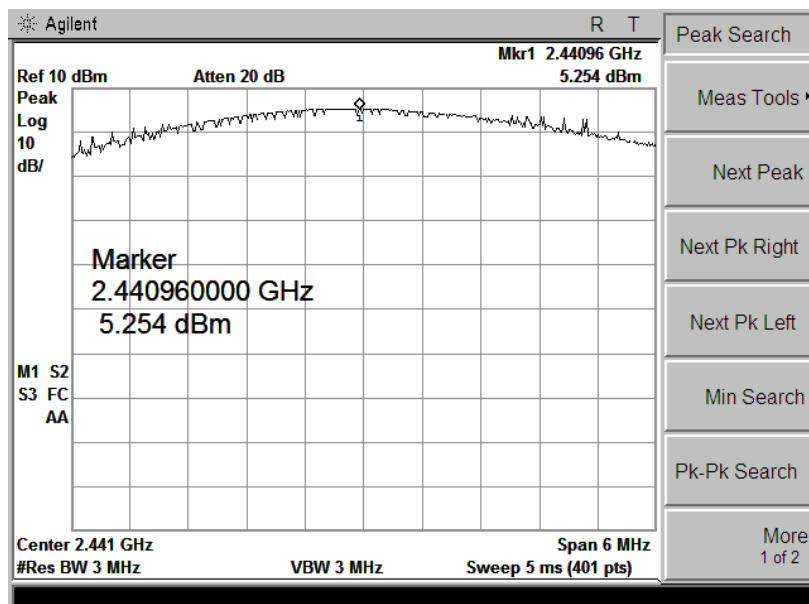


Ch 39

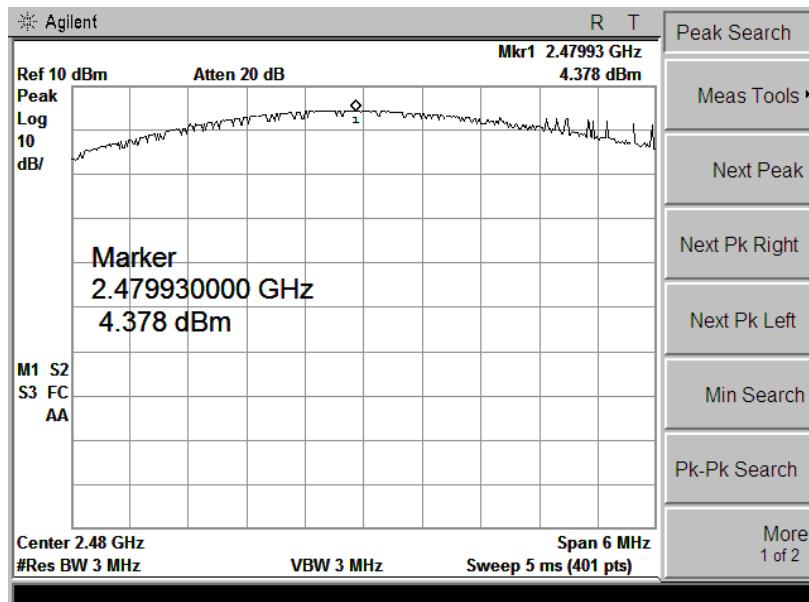


Ch 78

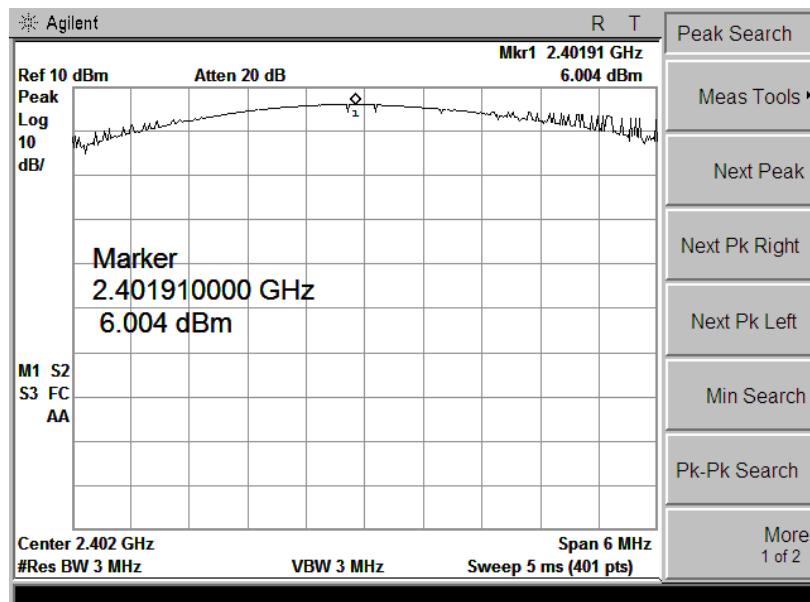$\pi/4$ -DQPSK Mode

Ch 0

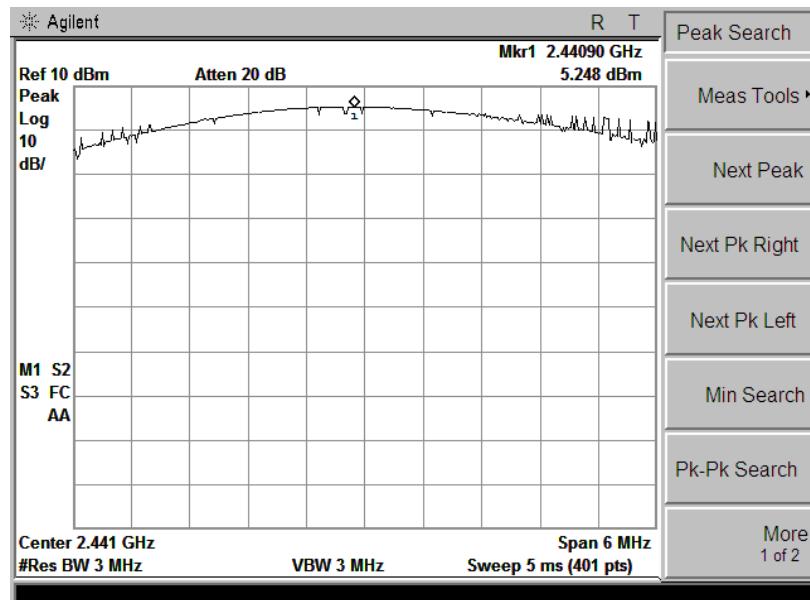


Ch 39

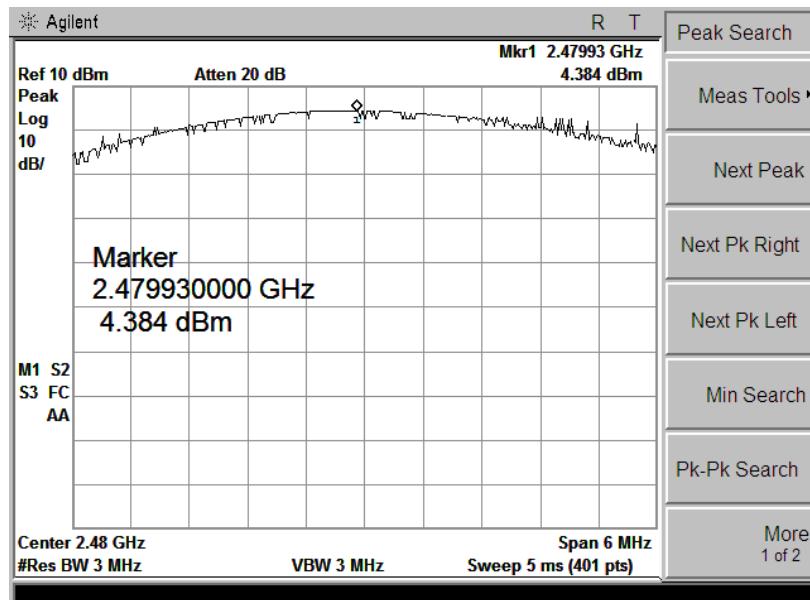


Ch 78


8DPSK Mode

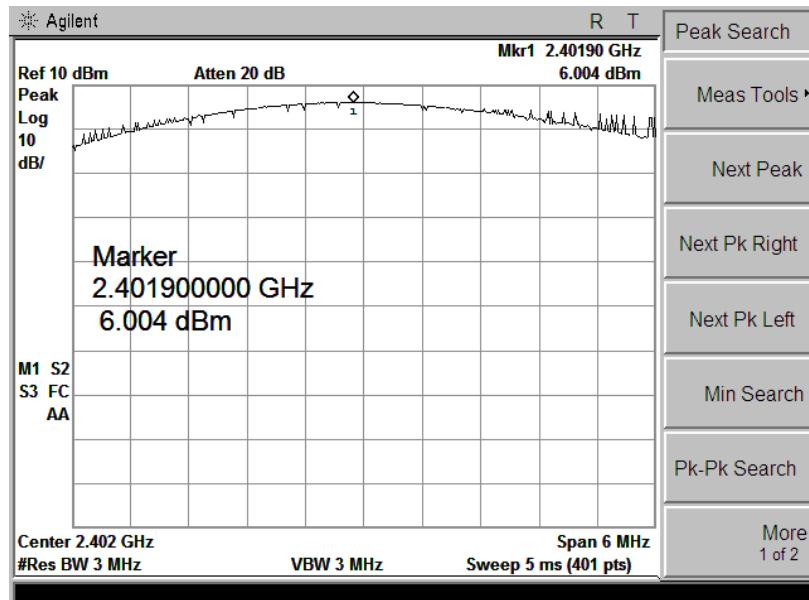

Ch 0

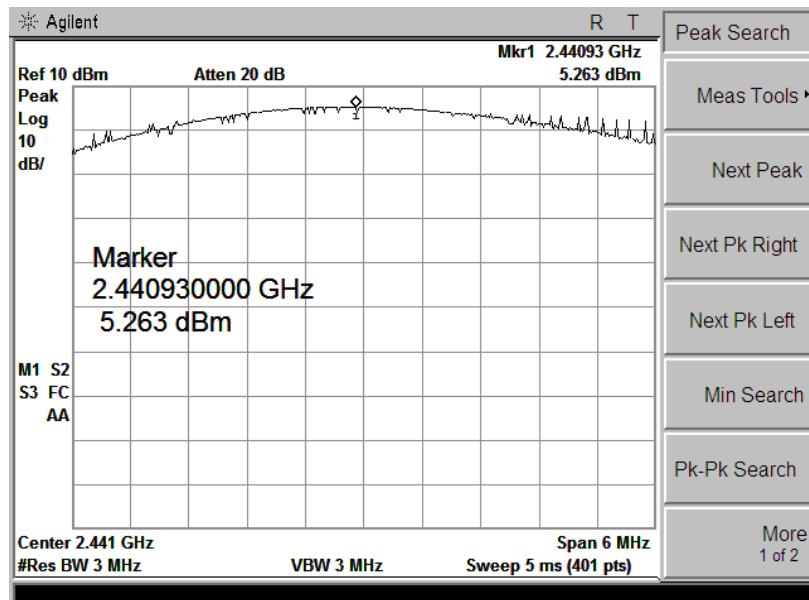

Ch 39

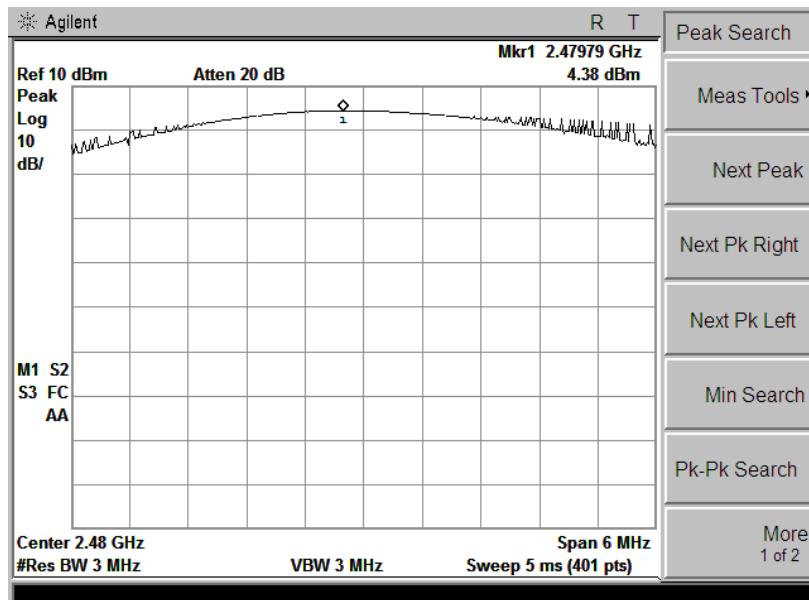

5.6 20dB Emission Bandwidth

5.6.1 Test Requirement

The bandwidth of a frequency hopping channel is the -20 dB emission bandwidth, measured with the hopping stopped.

5.6.2 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

5.6.3 Test Result


Test Item:	20dB Emission Bandwidth	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%

Mode	Channel	Frequency (MHz)	20dB Bandwidth(MHz)
BDR (GFSK)	Low	2402	1.054
	Middle	2441	1.045
	High	2480	1.041
EDR (π/4-DQPSK)	Low	2402	1.377
	Middle	2441	1.354
	High	2480	1.363
EDR (8DPSK)	Low	2402	1.371
	Middle	2441	1.350
	High	2480	1.362


GFSK Mode

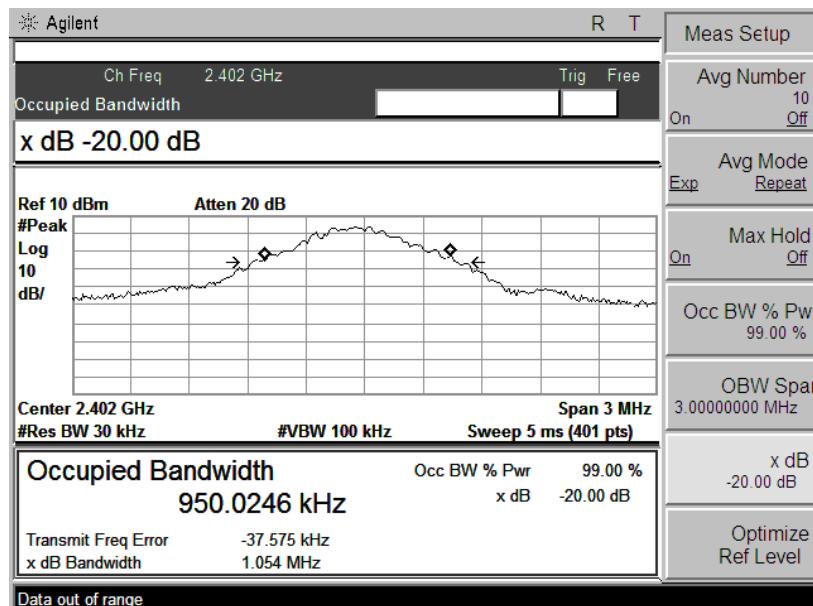


Ch 0

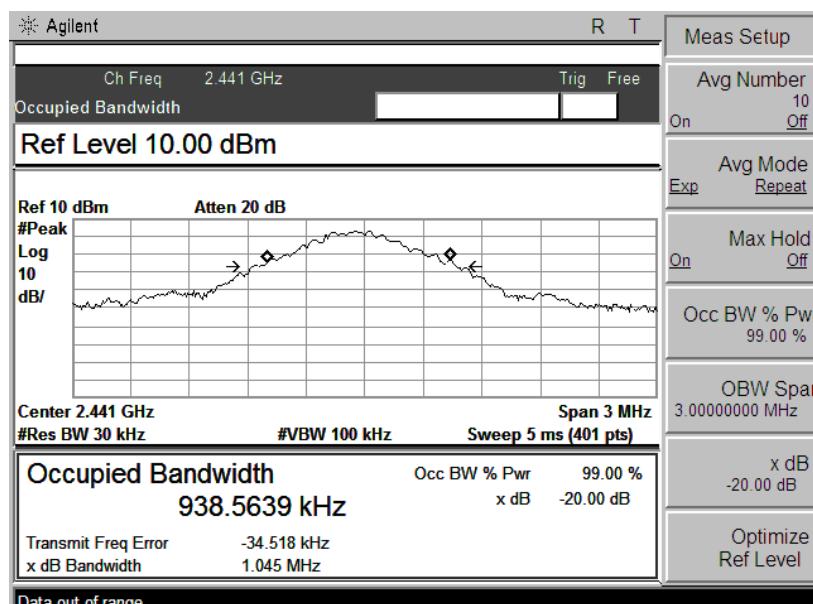


Ch 39

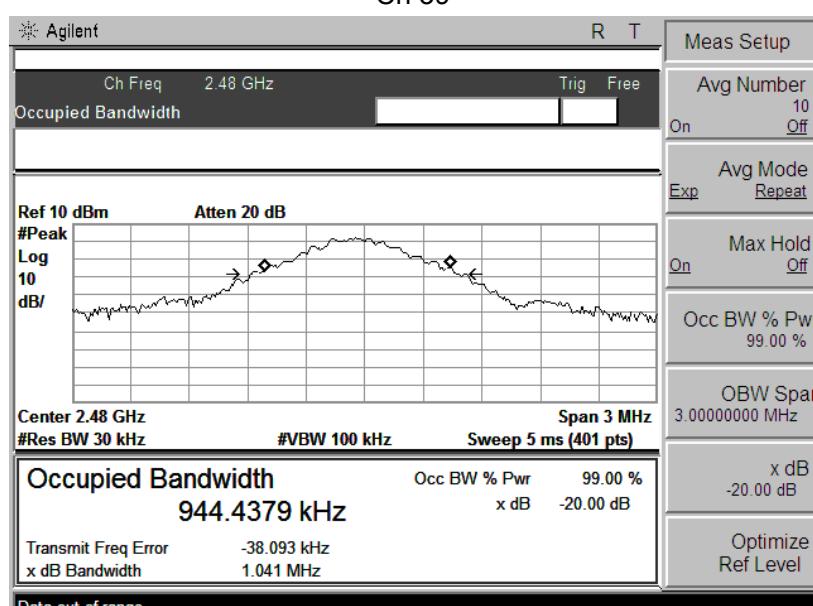


Ch 78

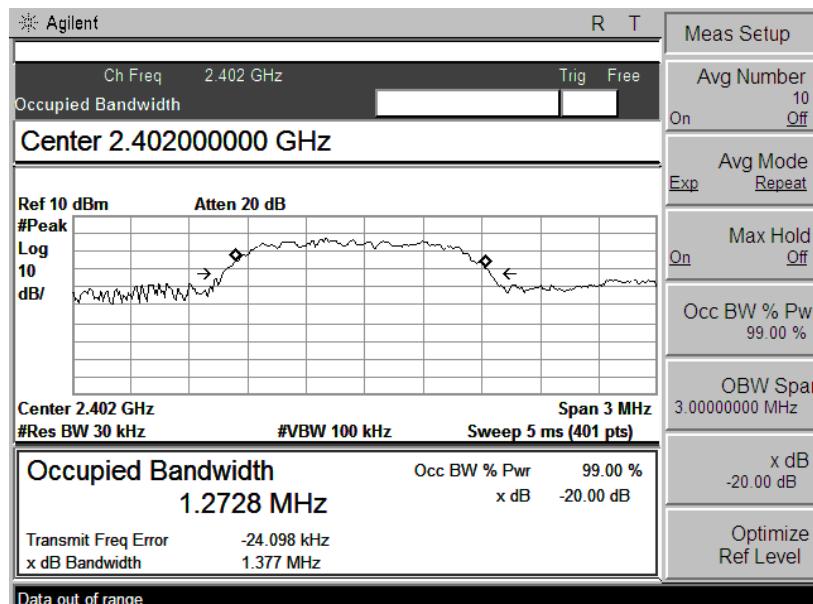$\pi/4$ -DQPSK Mode

Ch 0

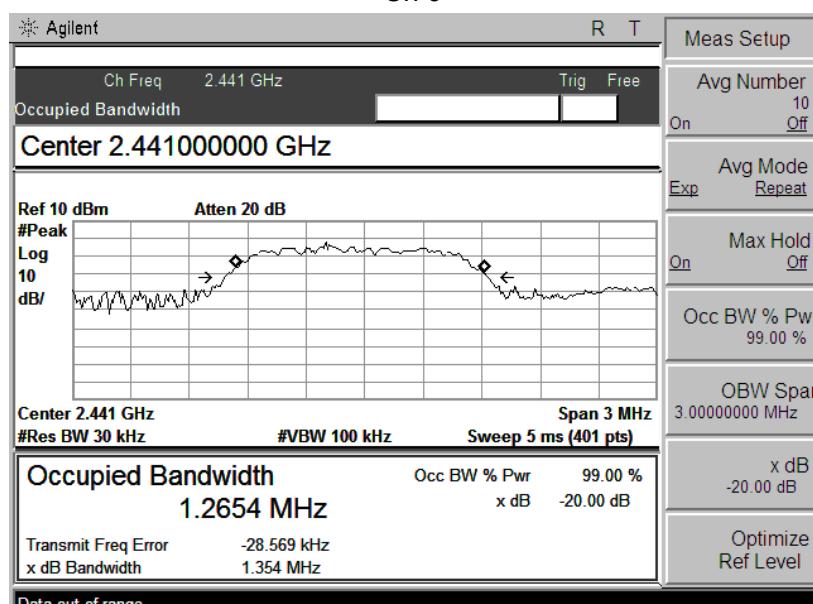


Ch 39

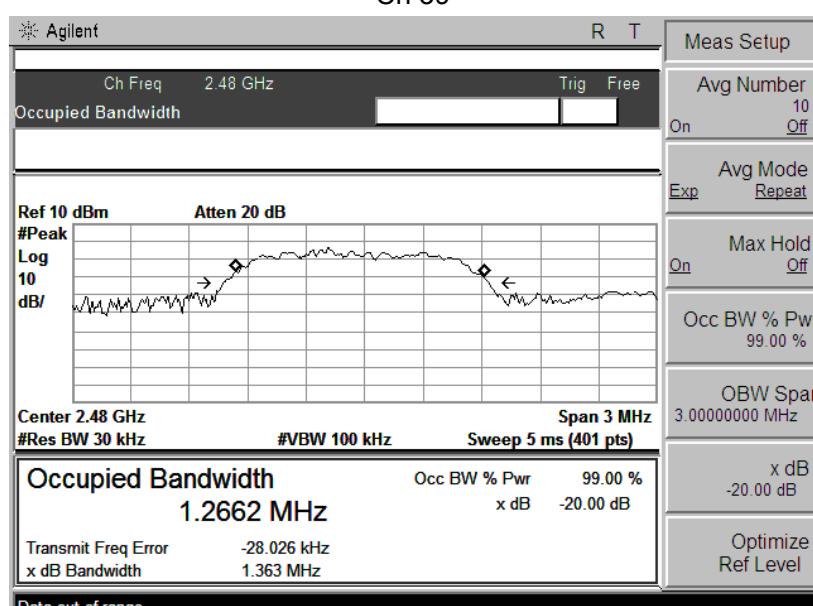


Ch 78


8DPSK Mode

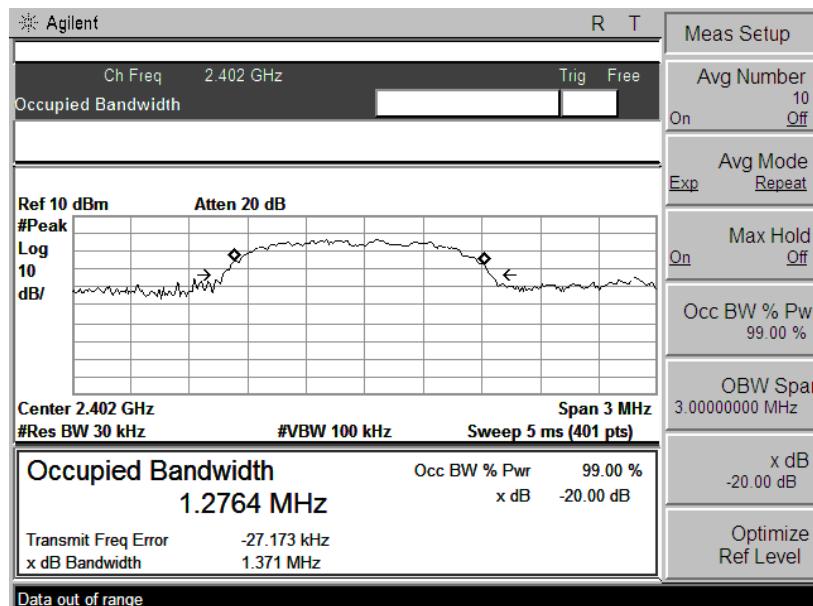

Ch 0

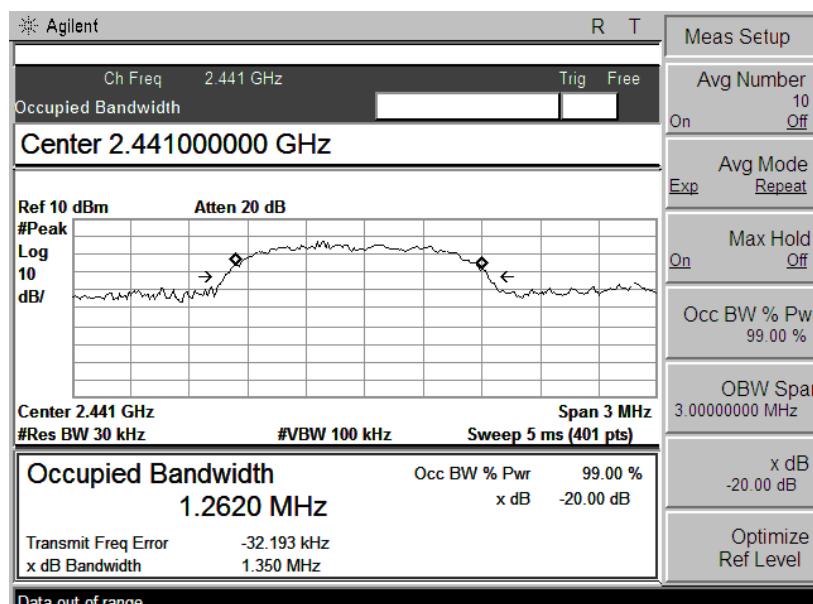

Ch 39

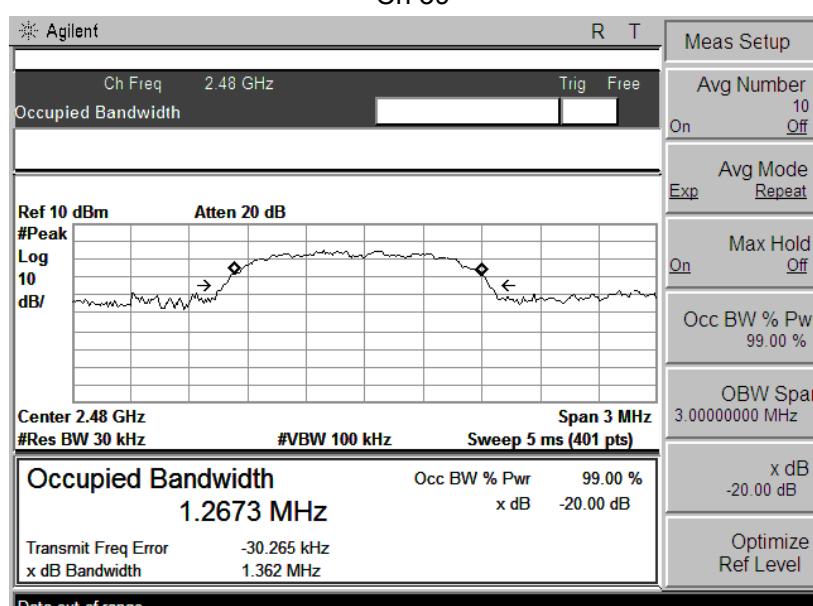

CH78

5.7 Carrier Frequency Separation

5.7.1 Test Requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

5.7.2 Test Procedure


1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

5.7.3 Test Result


Test Item:	Carrier Frequency Separation	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	0.803	0.703	Pass
	Middle	2441	0.998	0.697	Pass
	High	2480	0.946	0.694	Pass
EDR (π/4-DQPSK)	Low	2402	0.997	0.918	Pass
	Middle	2441	1.035	0.903	Pass
	High	2480	1.073	0.909	Pass
EDR (8DPSK)	Low	2402	0.997	0.914	Pass
	Middle	2441	0.982	0.900	Pass
	High	2480	1.020	0.908	Pass


GFSK Mode

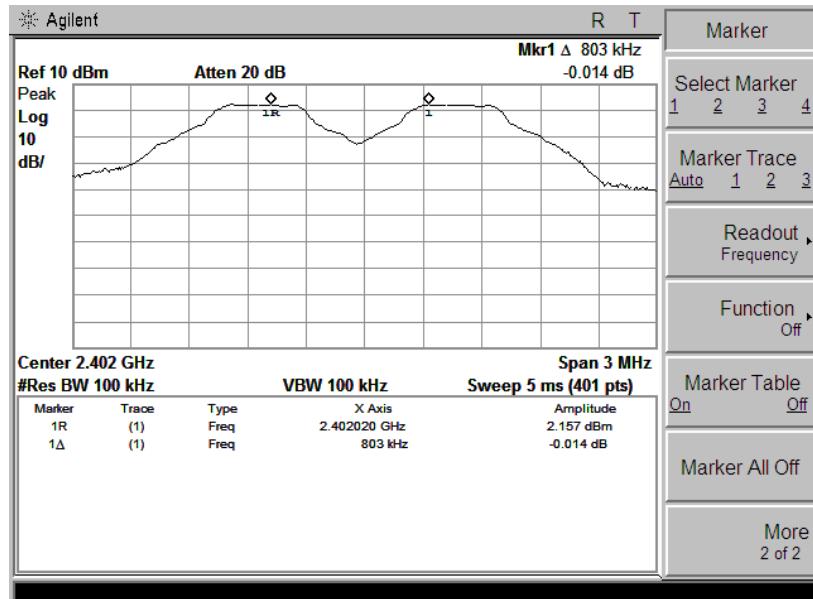




Ch 0

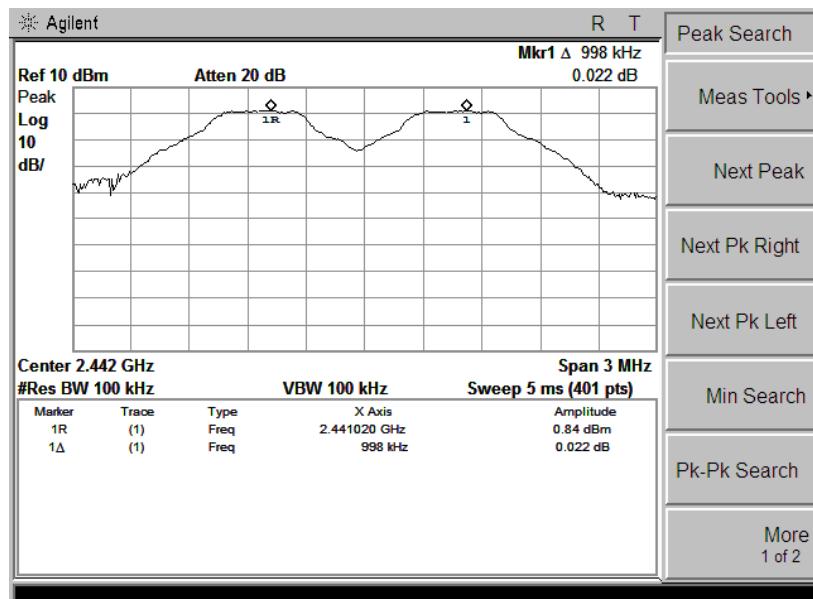

Ch 39



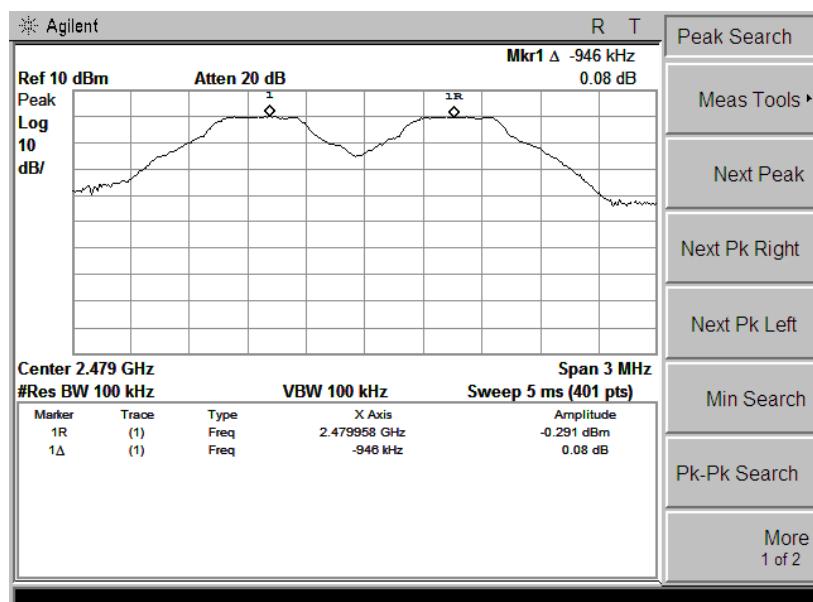


Ch 78

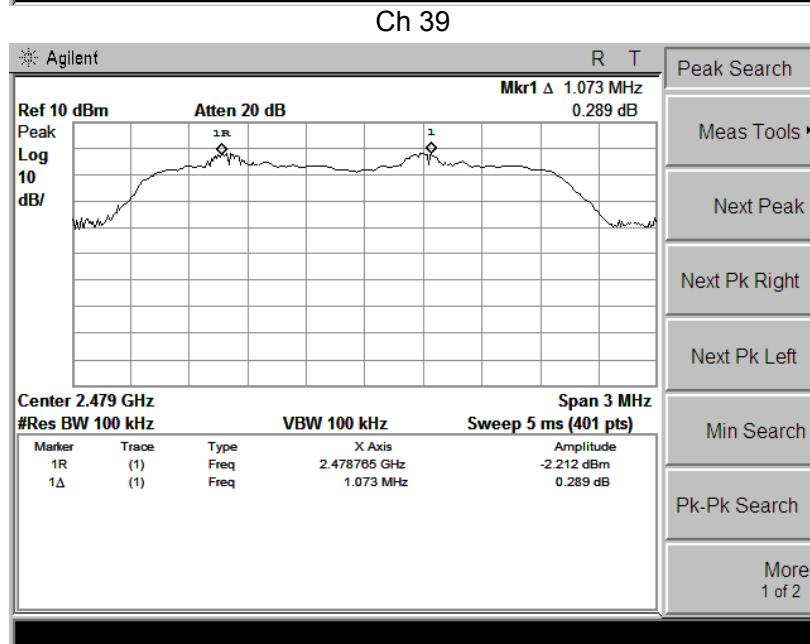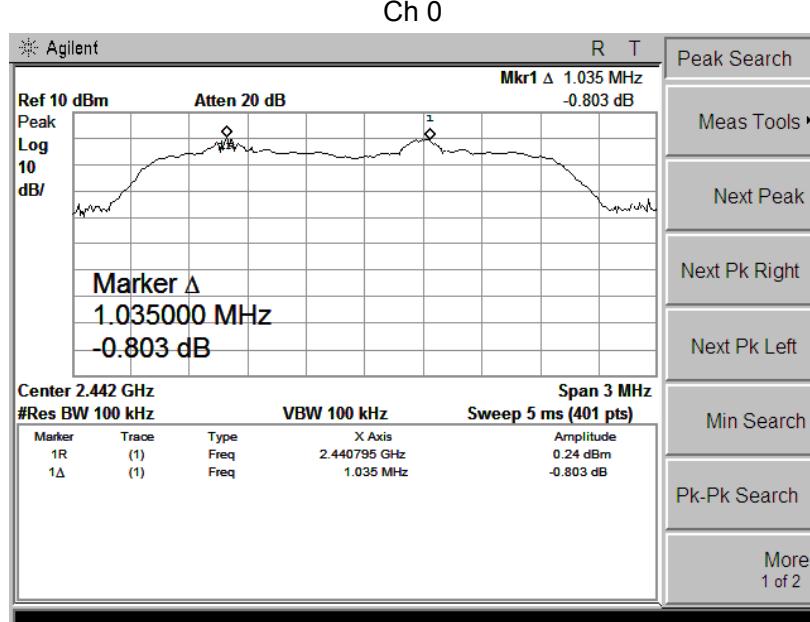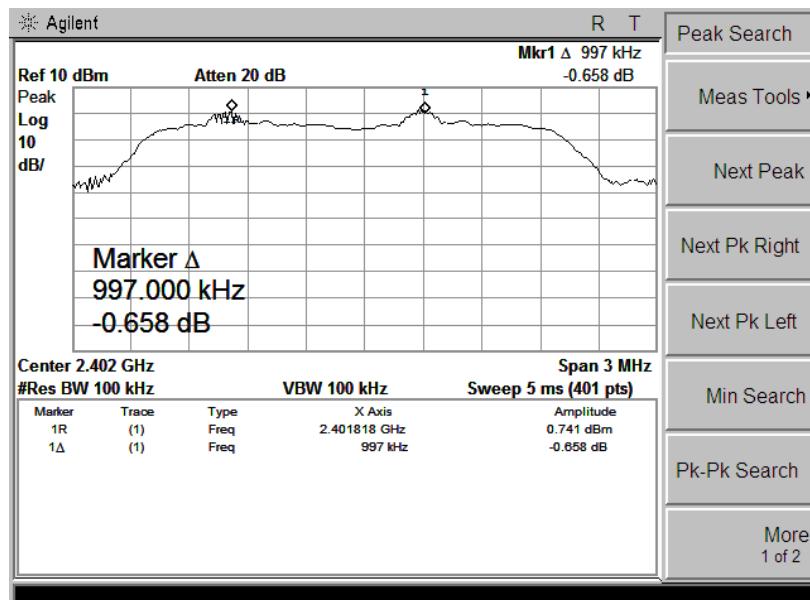$\pi/4$ -DQPSK Mode

Ch 78

8DPSK Mode

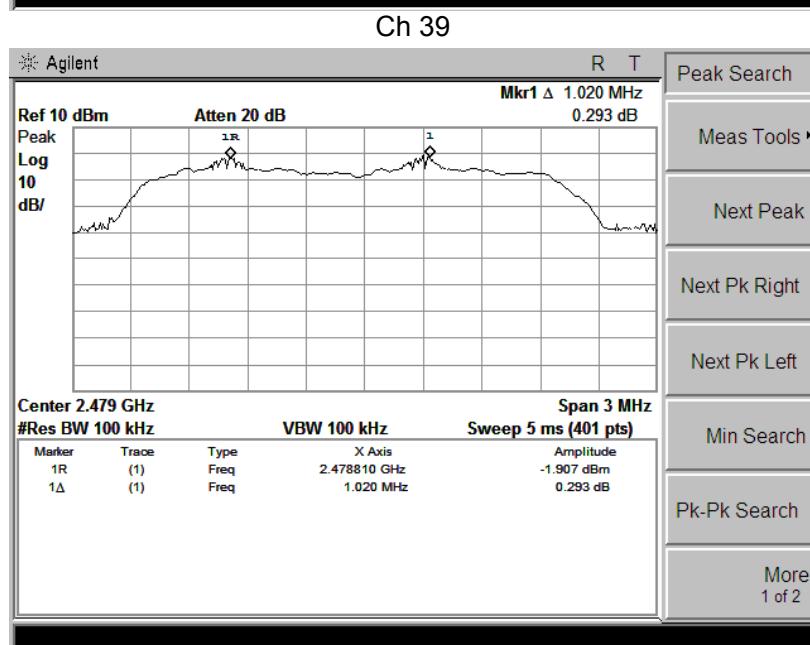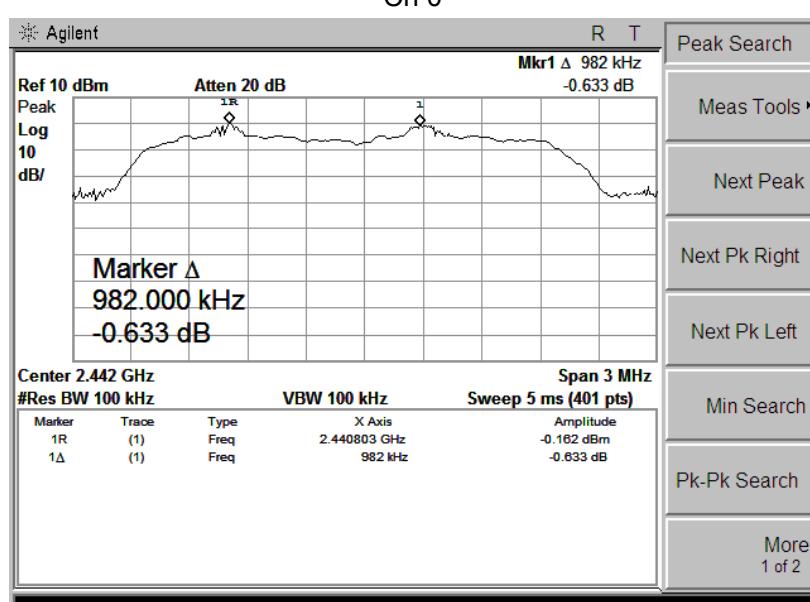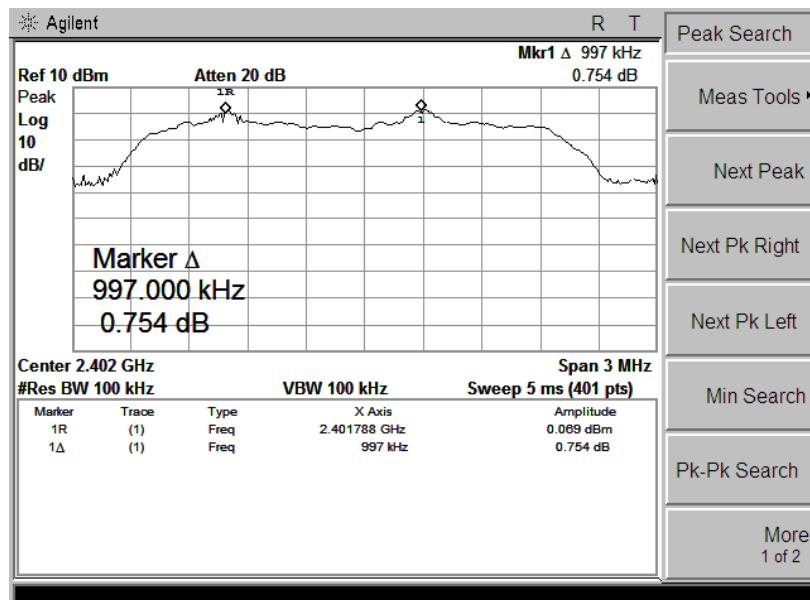

Ch 78

5.8 Number of Hopping Channel

5.8.1 Test Requirement

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


5.8.2 Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.


5.8.3 Test Result

Test Item:	Number of Hopping Channel	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%


Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

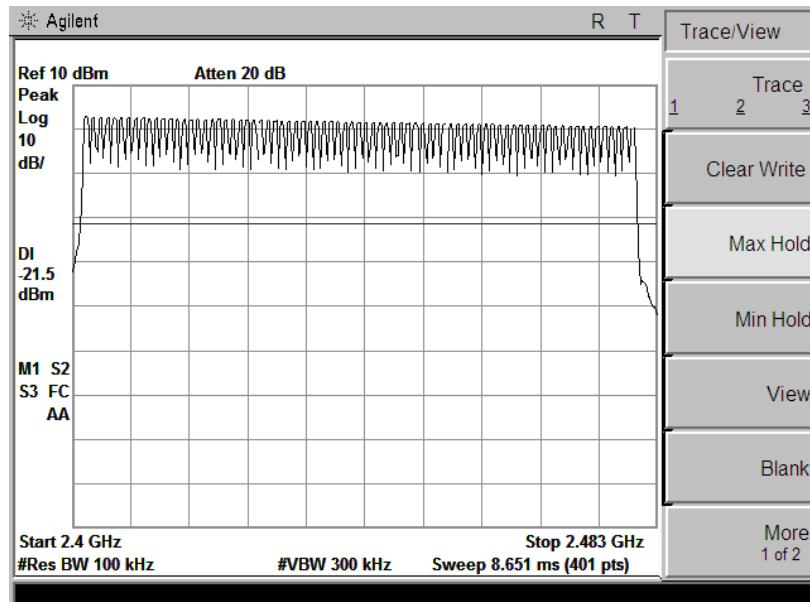

GFSK Mode

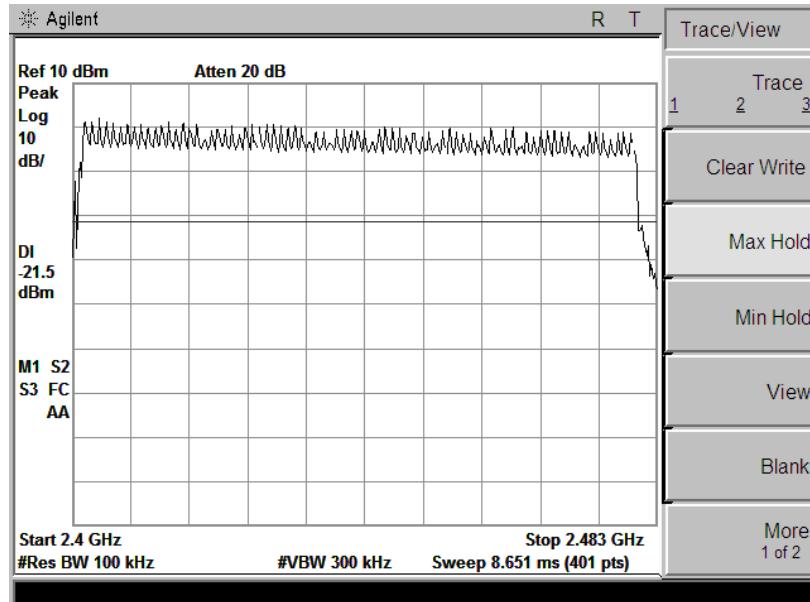

π/4-DQPSK

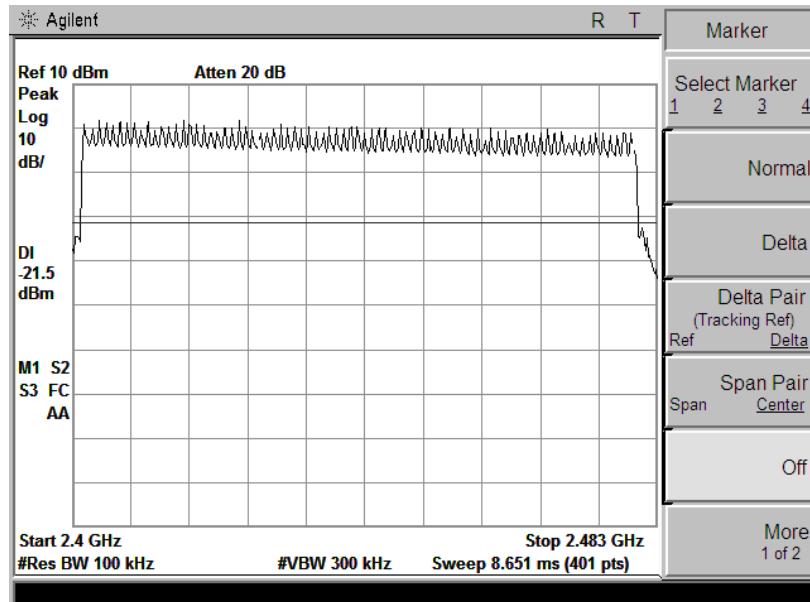

8DPSK Mode

5.9 Dwell Time

5.9.1 Test Requirement

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.9.2 Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.


Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s Hop rate=1600/s

5.9.3 Test Result


Test Item:	Dwell Time	Temperature :	25°C
Test Engineer:	Henry	Relative Humidity :	65%

Mode	Packet	Pulse Time (ms)	Dwell Time(ms)	Limit(ms)	Result
GFSK	DH1	0.43	137.60	400	Pass
	DH3	1.73	276.80	400	Pass
	DH5	2.84	302.94	400	Pass
π /4DQPSK	2DH1	0.57	182.40	400	Pass
	2DH3	1.70	272.00	400	Pass
	2DH5	2.82	300.81	400	Pass
8DPSK	3DH1	0.43	137.60	400	Pass
	3DH3	1.70	272.00	400	Pass
	3DH5	2.83	301.88	400	Pass
Note: DH1/2DH1/3DH1: Dwell Time=Pulse Time(ms)X[(1600/2/79)X31.6] DH3/2DH3/3DH3: Dwell Time= Pulse Time(ms)X[(1600/4/79)X31.6] DH5/2DH5/3DH5: Dwell Time= Pulse Time(ms)X[(1600/6/79)X31.6]					


GFSK Mode

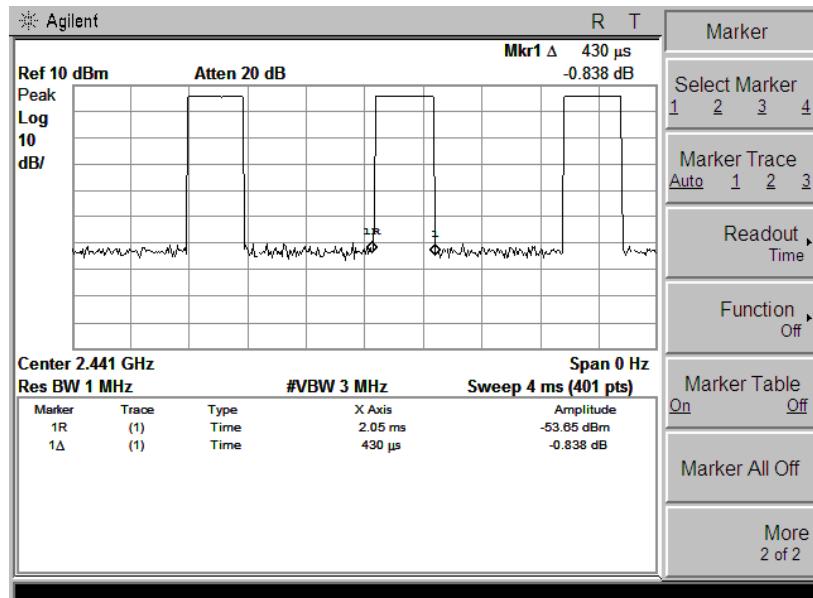


DH1

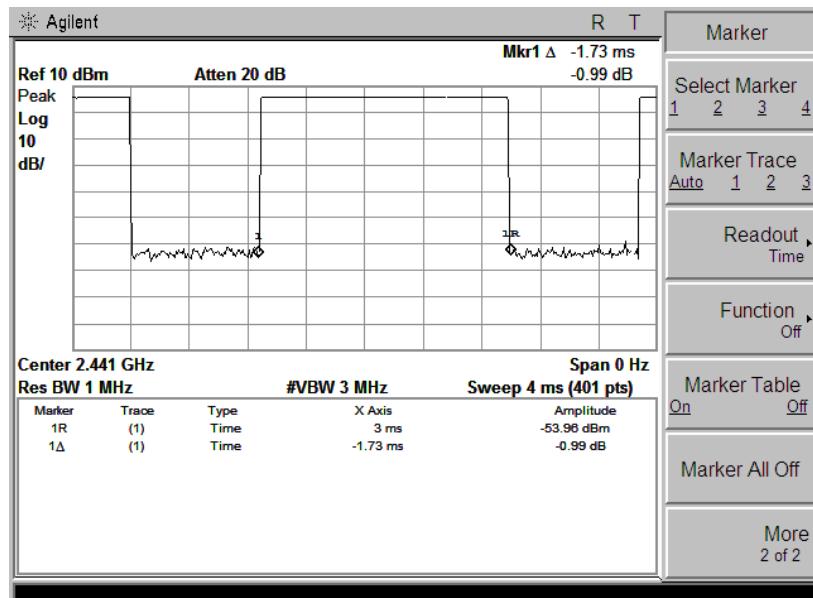


DH3

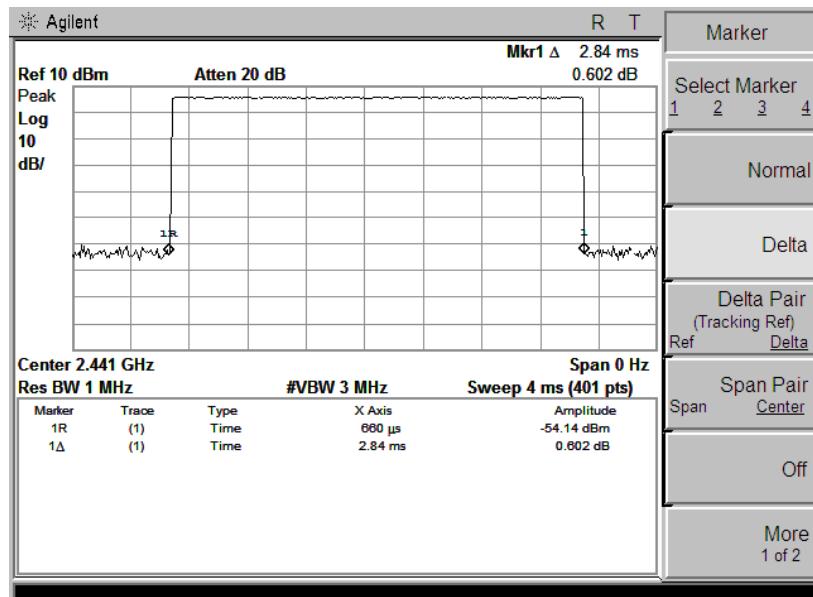


DH5

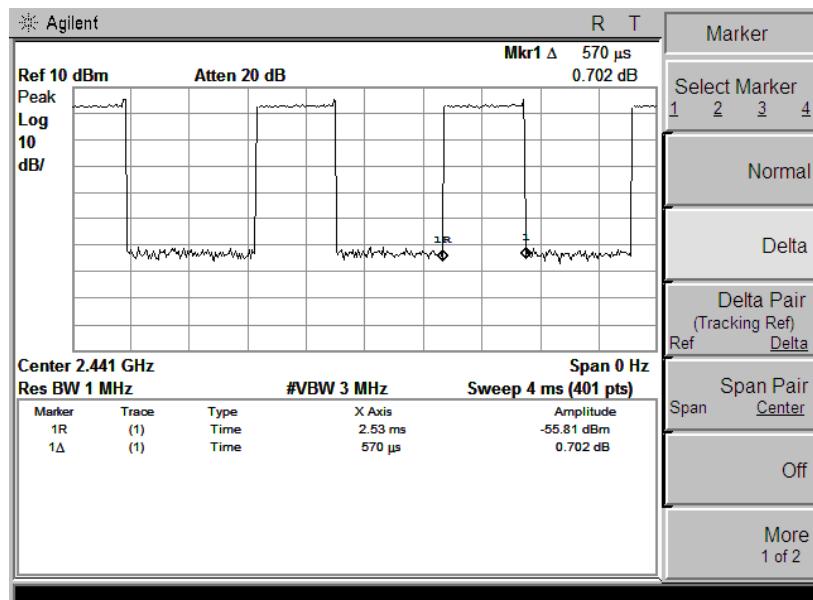$\pi/4$ -DQPSK Mode

DH1

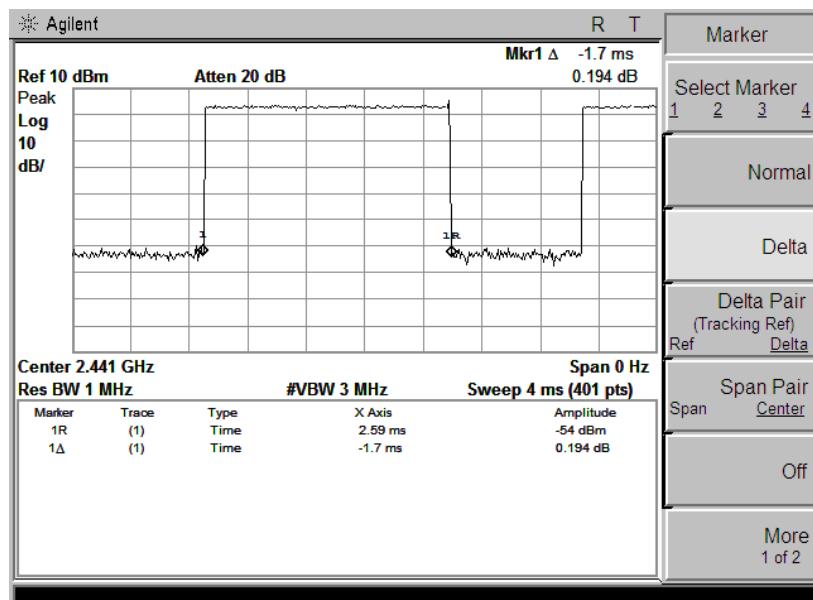


DH3

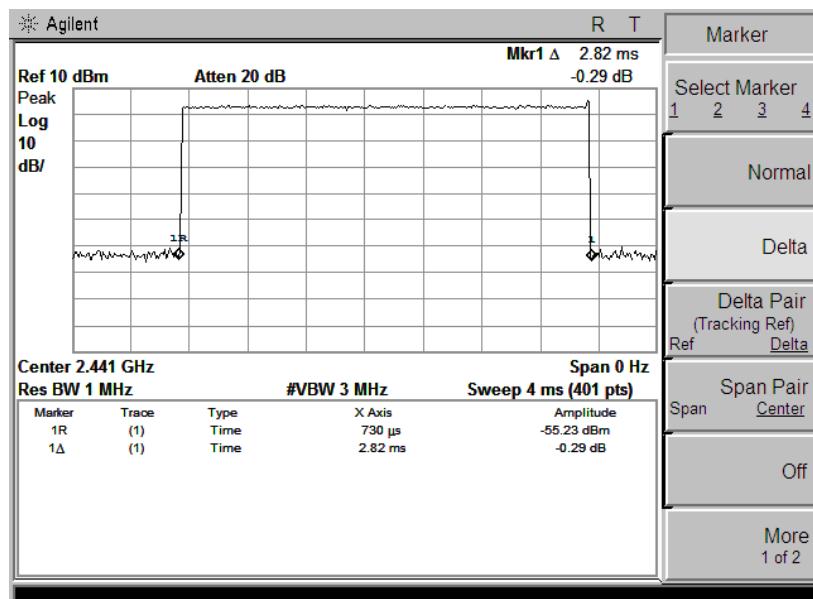


DH5


8DPSK Mode

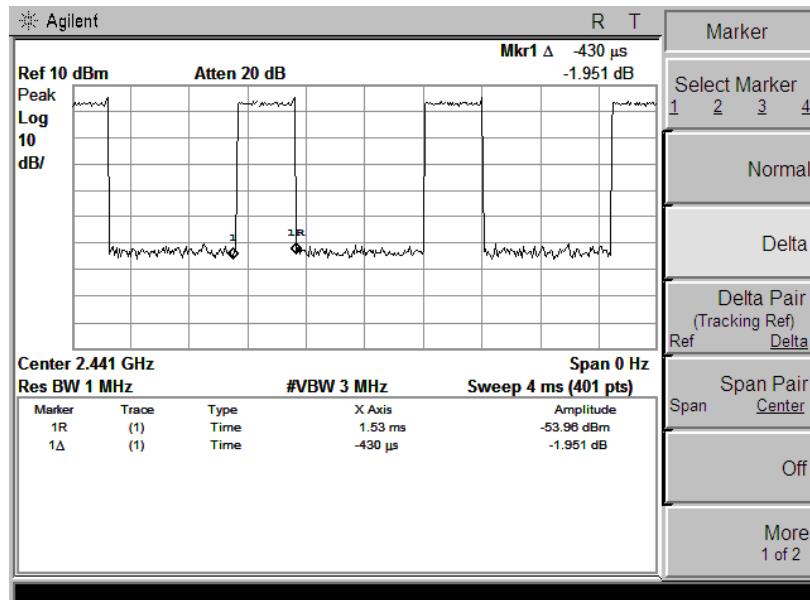

DH1

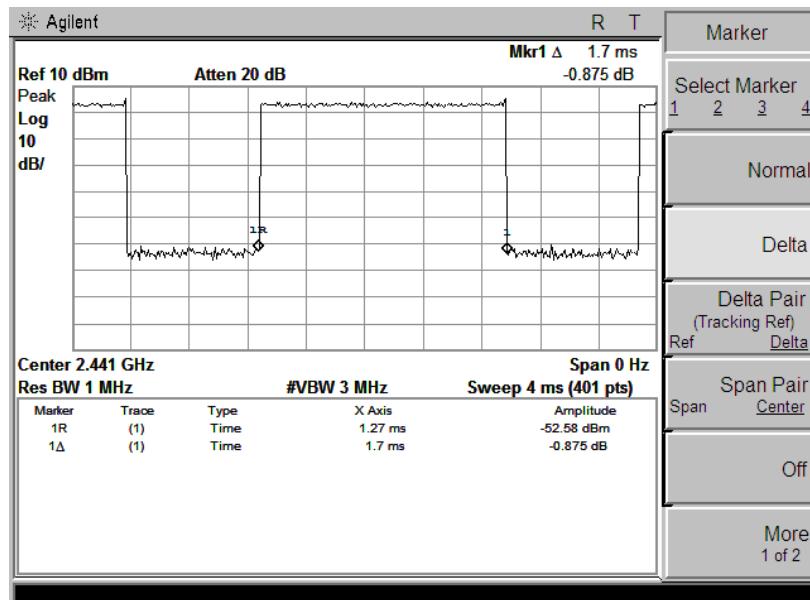

DH3

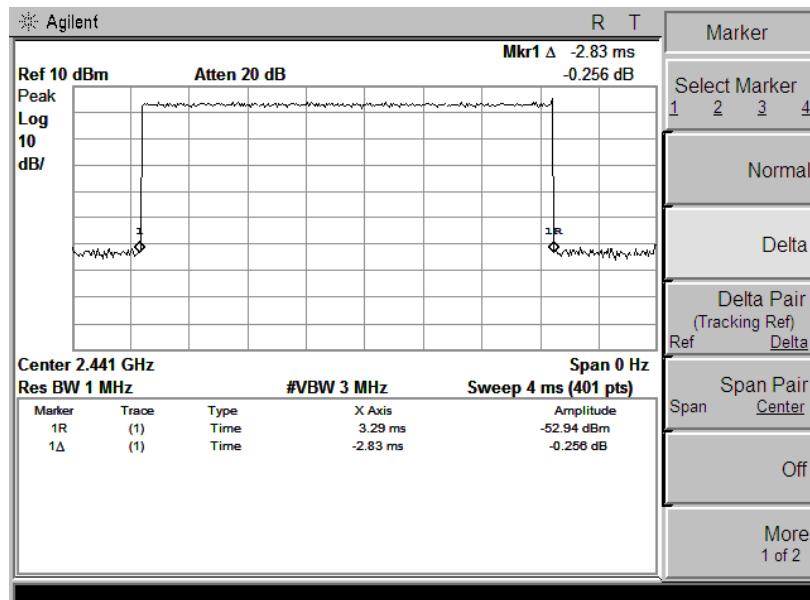

DH5

5.9 Band Edge and Conducted Spurious Emissions

5.9.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

5.9.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

5.9.3 Test Result



Pass

Remark:


During the Conducted Spurious Emissions test, pre-scan the GFSK, $\pi/4$ -QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

Test Item:	Band Edge	Temperature :	23°C
Test Engineer:	Kang	Relative Humidity :	65%




Band Edge, Left Side

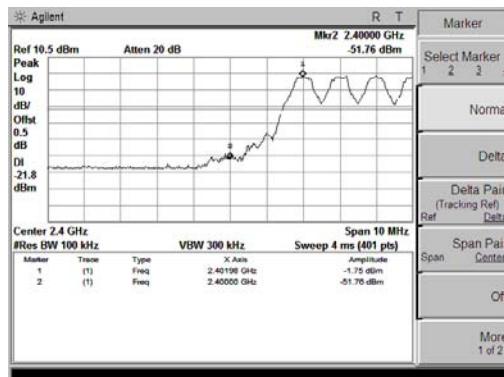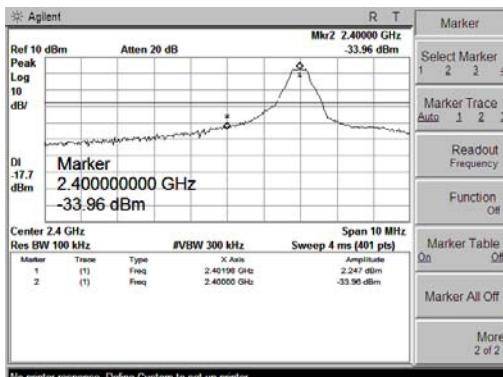

GFSK Mode, Non-Hopping

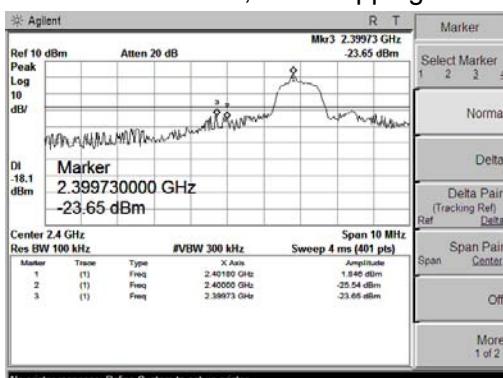


GFSK Mode, Hopping

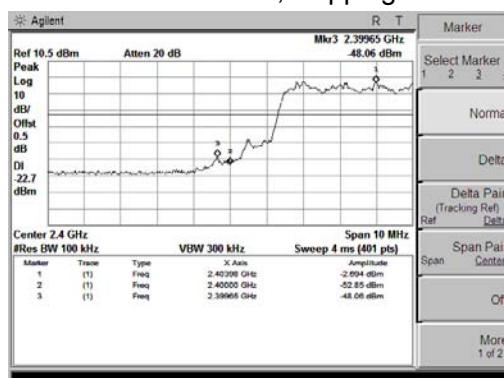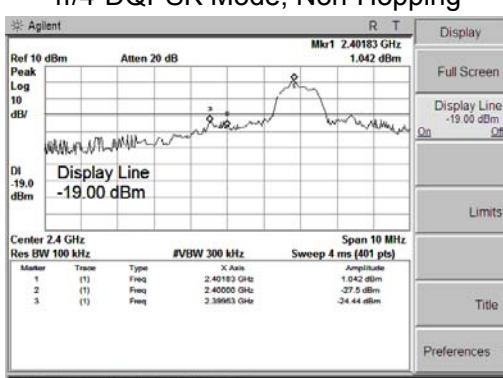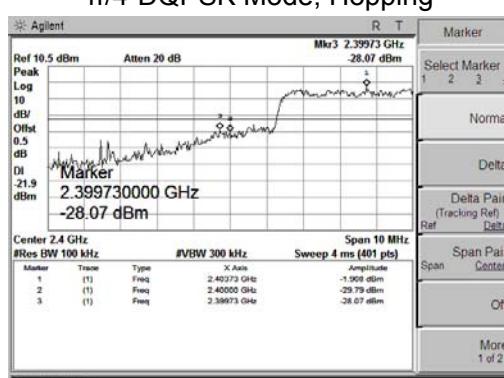 $\pi/4$ -DQPSK Mode, Non-Hopping $\pi/4$ -DQPSK Mode, Hopping


8DPSK Mode, Non-Hopping

8DPSK Mode, Hopping


Band Edge, Right Side

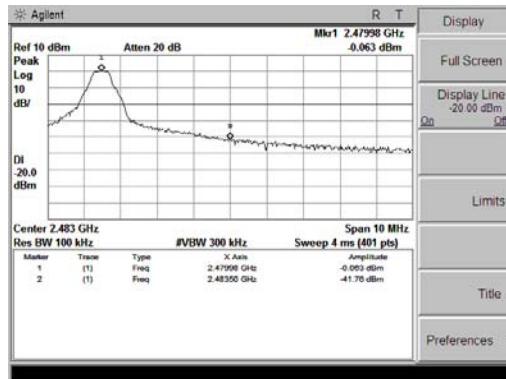


GFSK Mode, Non-Hopping

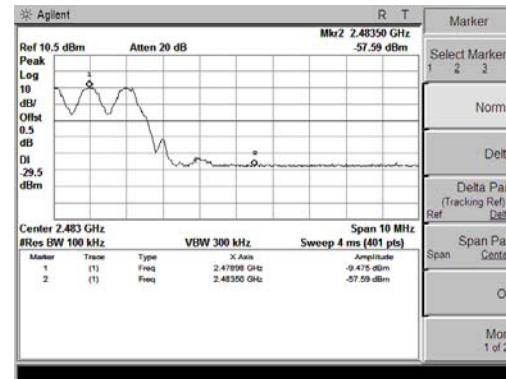


GFSK Mode, Hopping

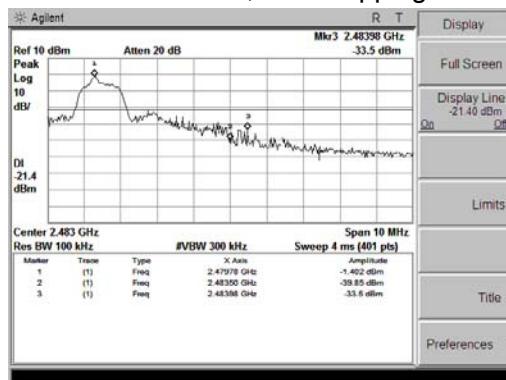


π/4-DQPSK Mode, Non-Hopping

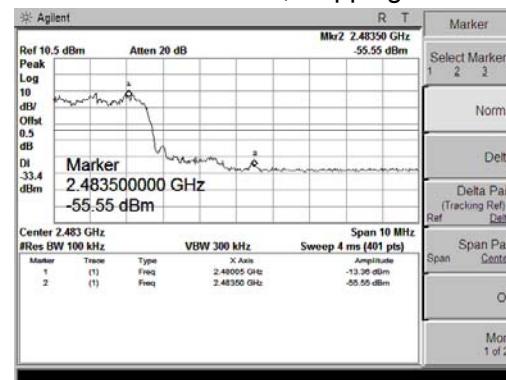

π/4-DQPSK Mode, Hopping

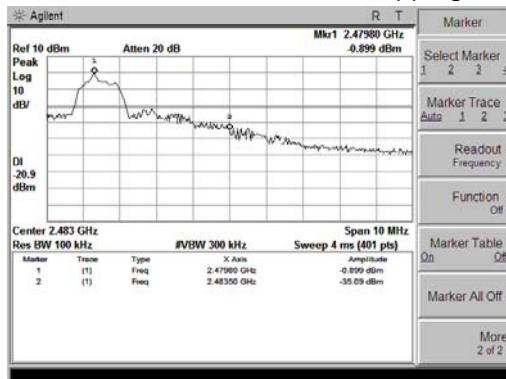


8DPSK Mode, Non-Hopping

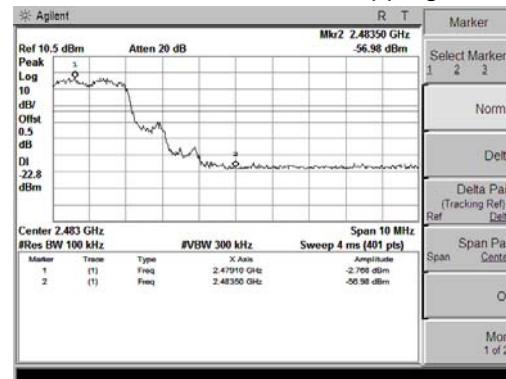


8DPSK Mode, Hopping

Conducted Spurious Emissions

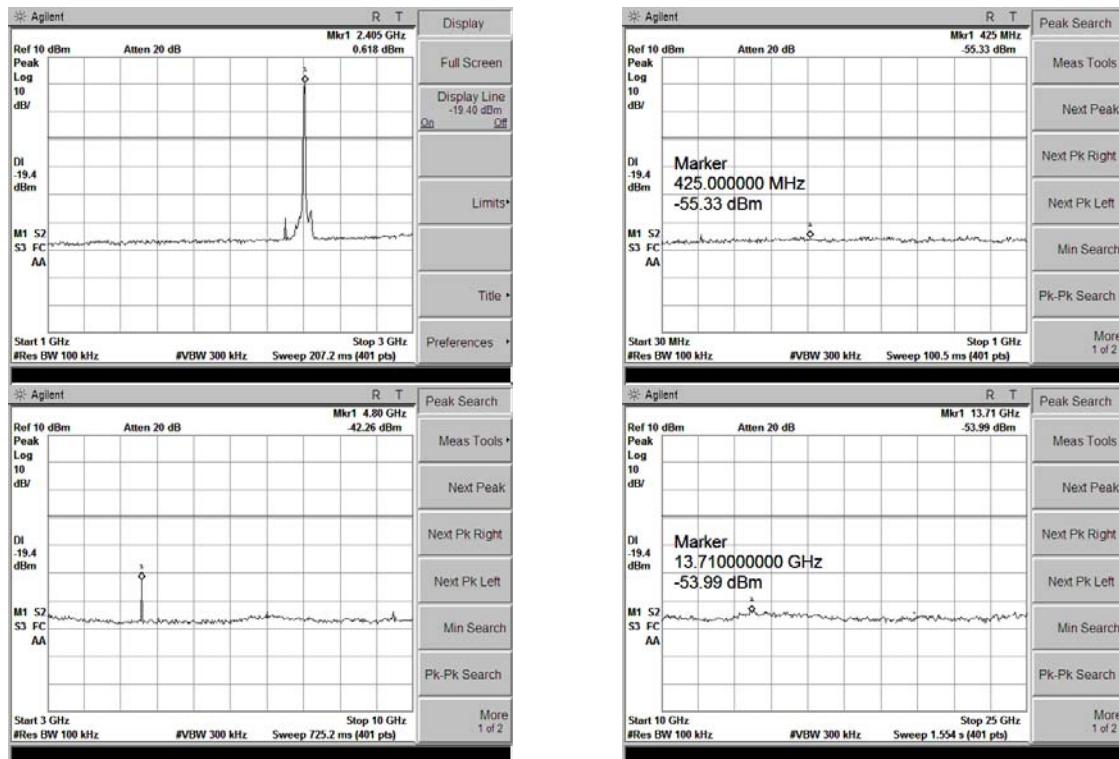


**GFSK Mode, Ch0
π/4-DQPSK Mode, Hopping**

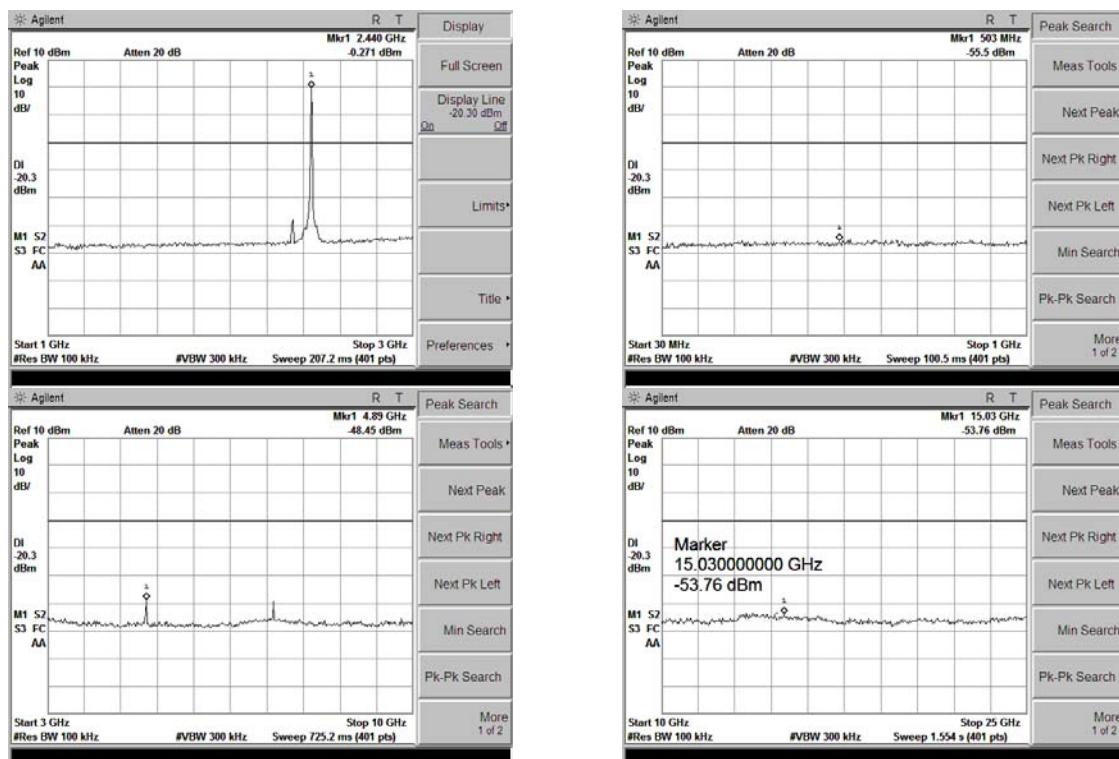

GFSK Mode, Ch39

Conducted Spurious Emissions

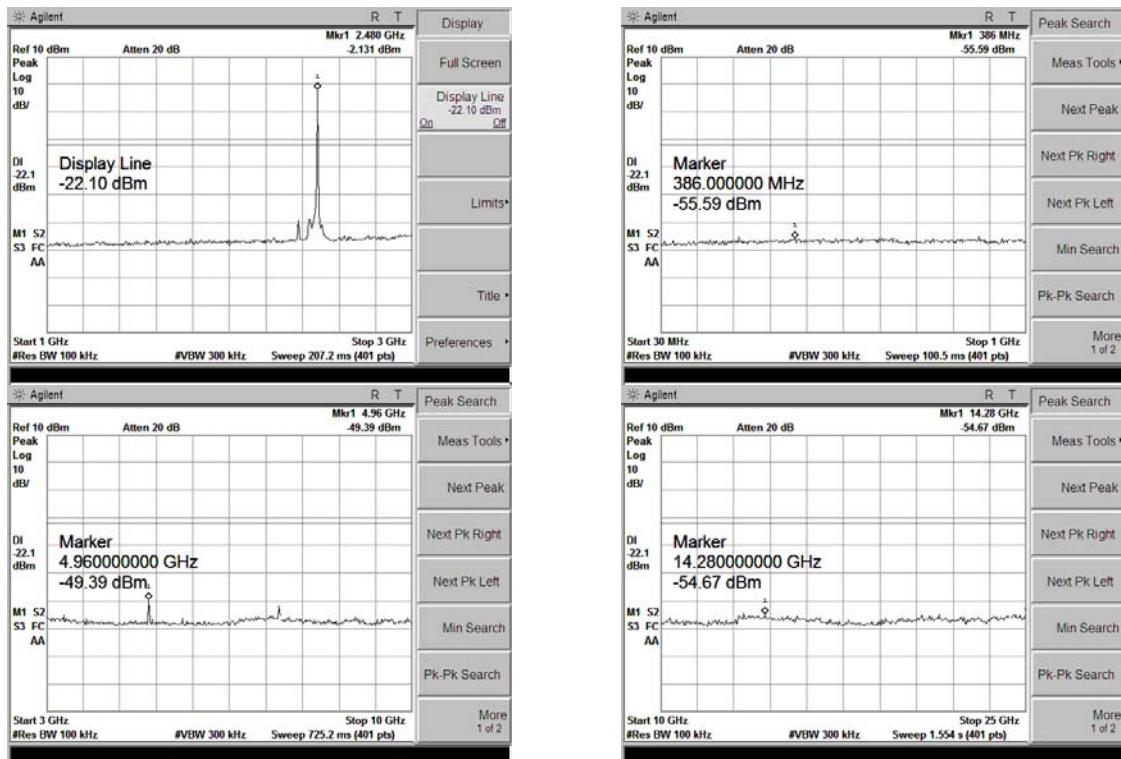

GFSK Mode, Ch78
 $\pi/4$ -DQPSK Mode, Hopping


5.10 Restricted Frequency Bands

5.10.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.10.2 Test Configuration

Test Setup:

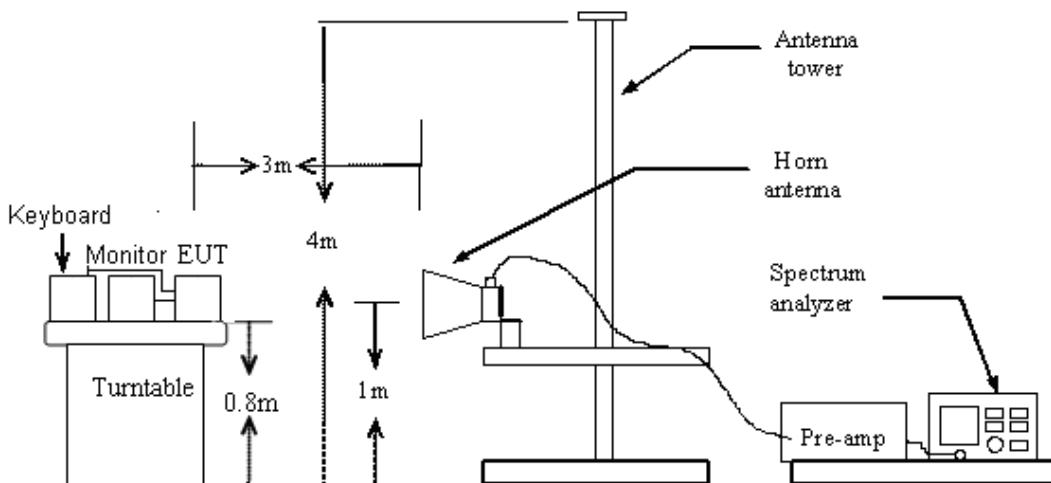

5.10.3 Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.


5.10.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.


Please refer the following plots.

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C / 52.9%	Test date:	2016-07-12

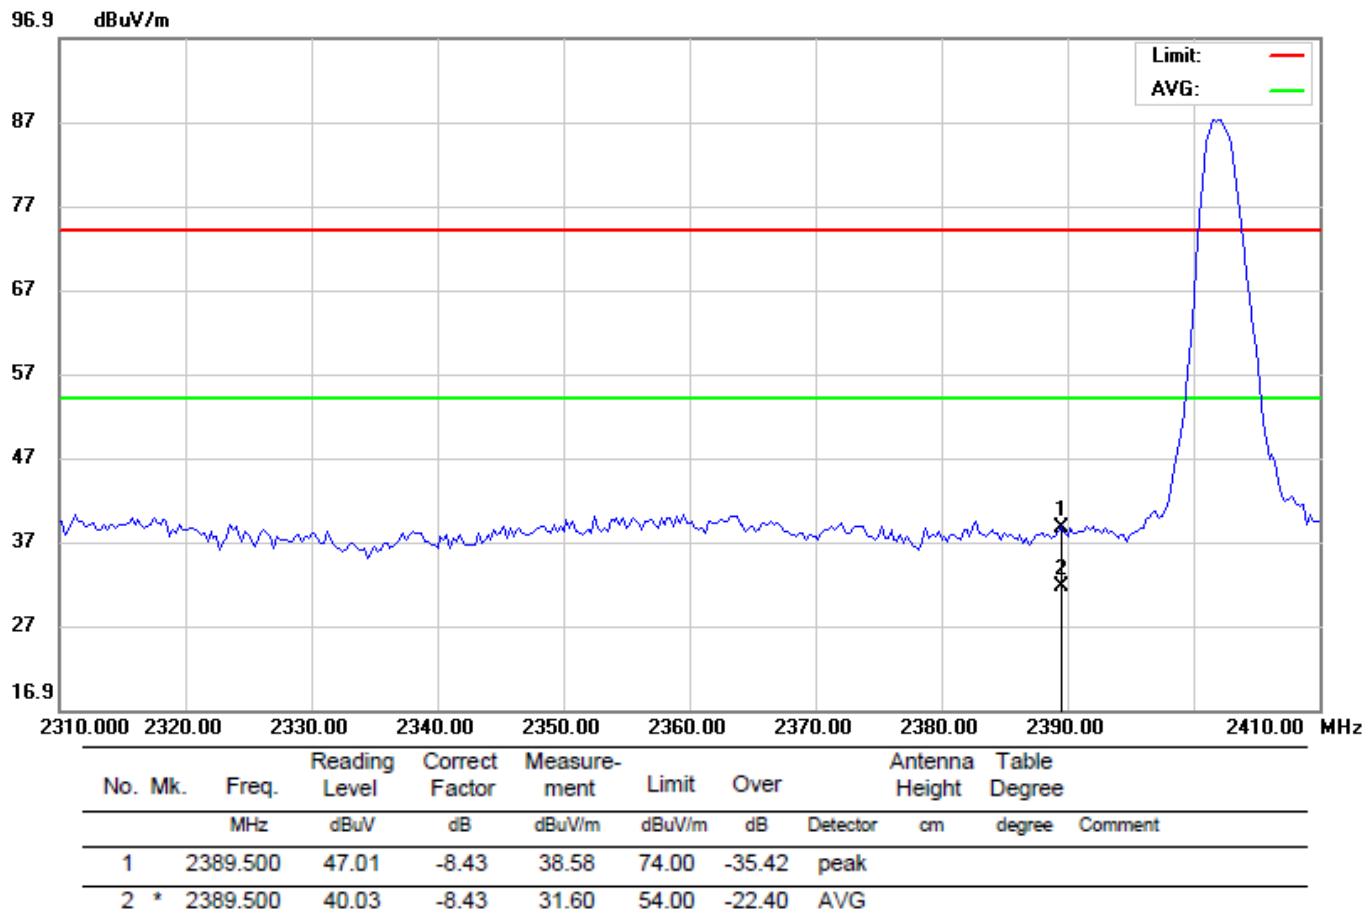


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH0	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 52.9%	Test date:	2016-07-12

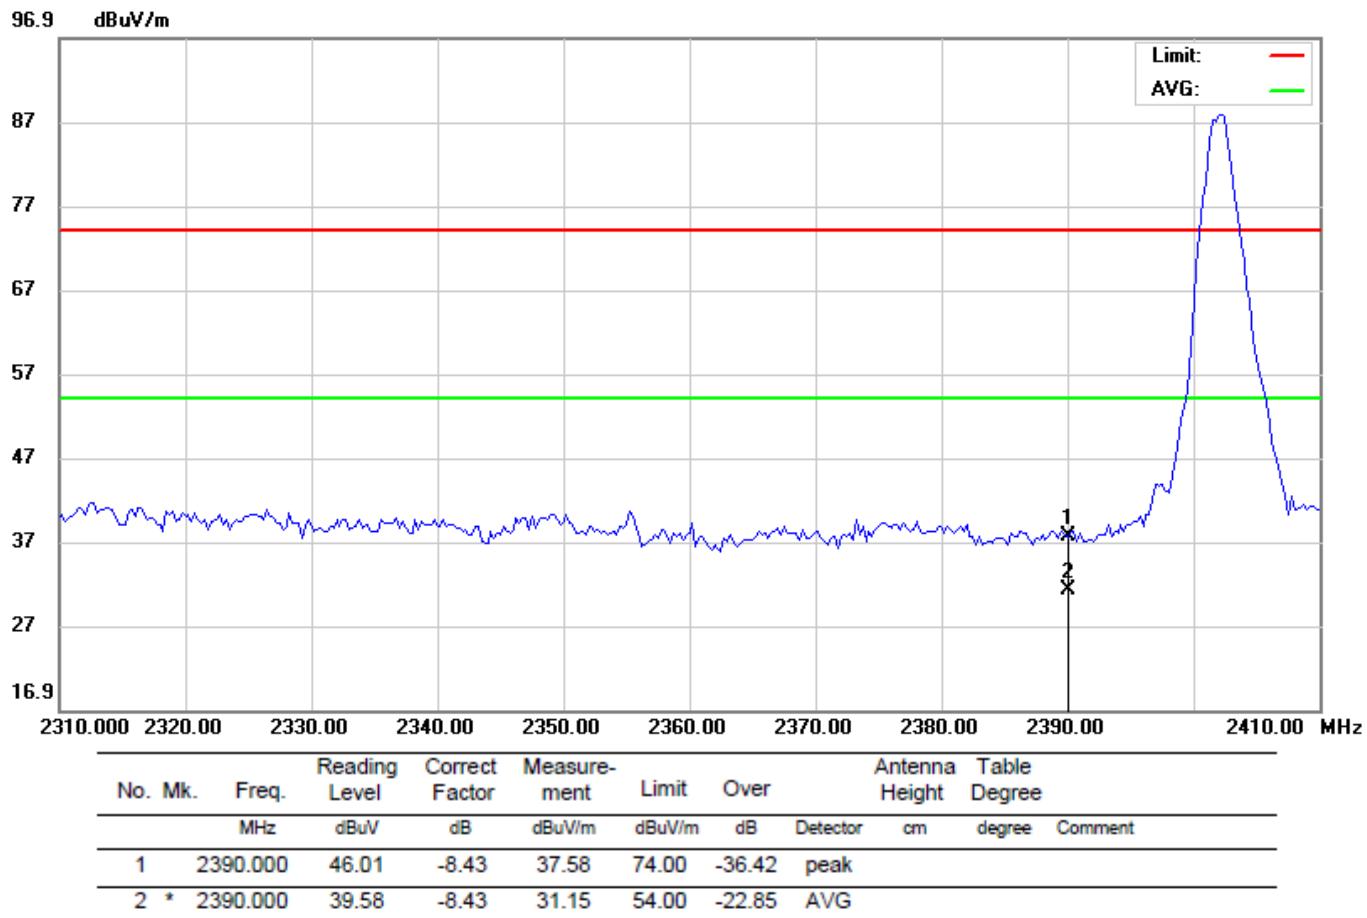


*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH78	Polarization:	Horizontal
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 52.9%	Test date:	2016-07-12

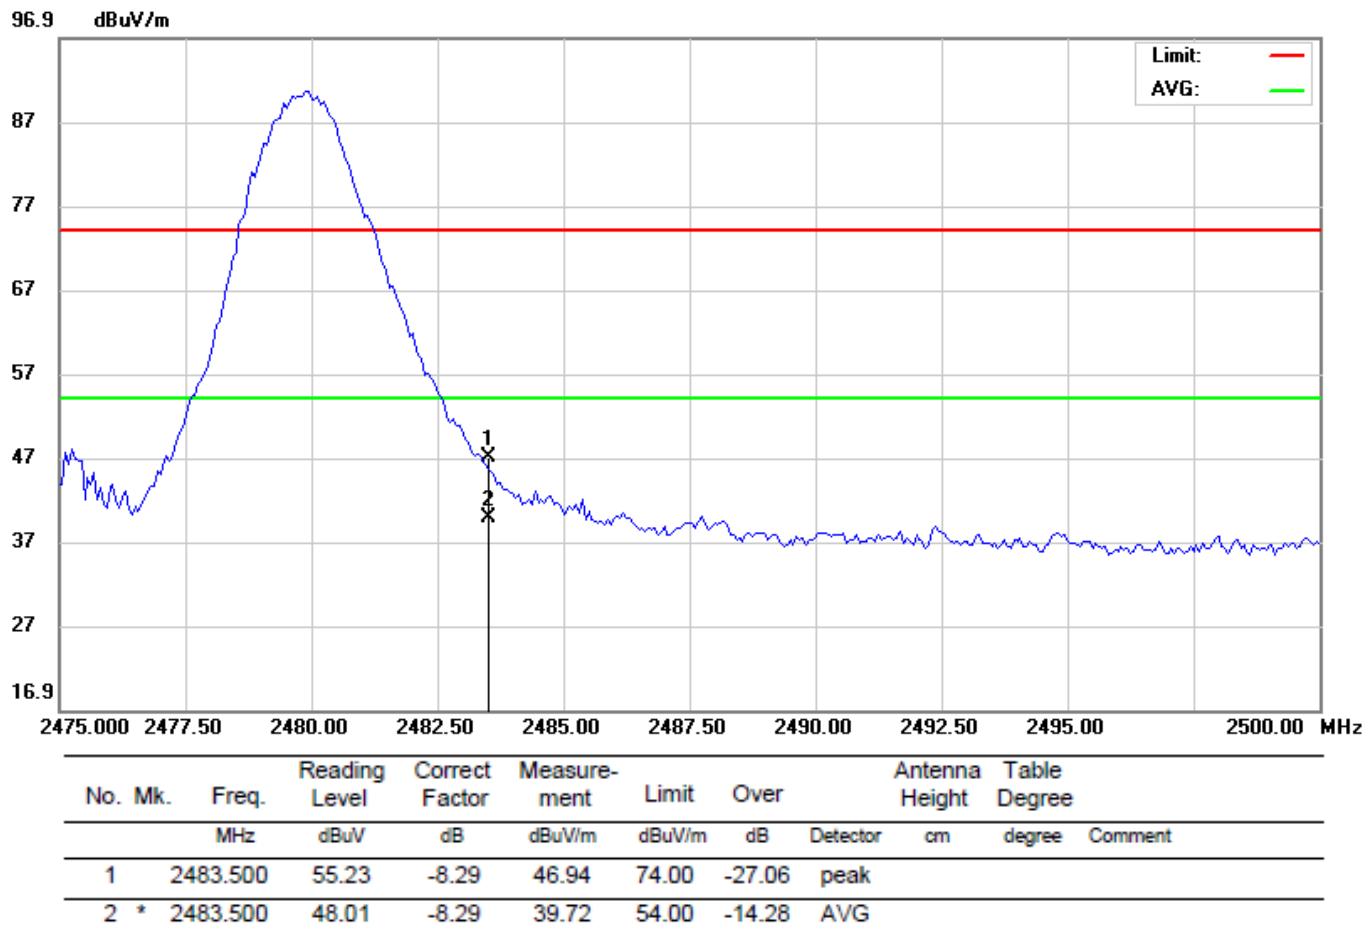

*:Maximum data x:Over limit !:over margin

EUT:	TND Tablet	M/N:	TNDT80B
Mode:	GFSK-CH78	Polarization:	Vertical
Test by:	John	Power:	DC 3.7V by Battery
Temperature: / Humidity	23.7°C/ 52.9%	Test date:	2016-07-12

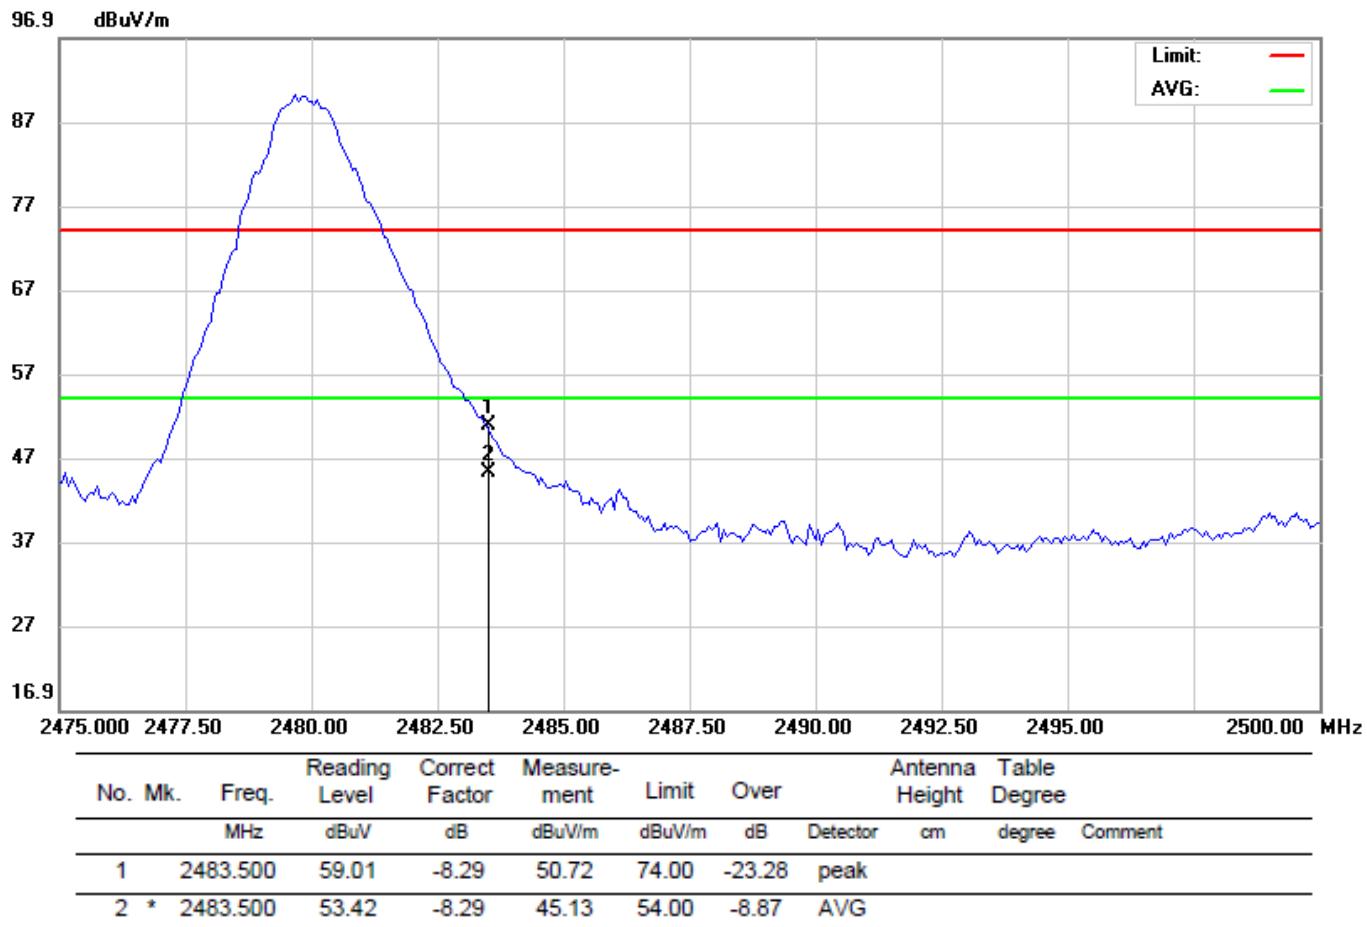

*:Maximum data x:Over limit !:over margin

End of the Report