



EMC

TEST REPORT

REPORT NO. : F87072101

MODEL NO. : BCD 36X

DATE OF TEST : July 21, 1998

PREPARED FOR: BEHAVIOR TECH COMPUTER CORP.

ADDRESS : 12F, 18, SEC. 1, CHANG AN E. RD.,
TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

12F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 13 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION.....	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION.....	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION).....	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE	8
4.2 EUT OPERATION CONDITION	8
4.3 TEST DATA OF CONDUCTED EMISSION	9
4.4 TEST DATA OF RADIATED EMISSION.....	10
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN.	12



1.

CERTIFICATION

Issue Date: July 27, 1998

Product : CD-ROM DRIVE
Trade Name : BTC
Model No. : BCD 36X
Applicant : BEHAVIOR TECH COMPUTER CORP.
Standard : FCC Part 15, Subpart B, Class B
ANSI C63.4-1992
CISPR 22: 1993 +A1+A2

We hereby certify that one sample of the designation has been tested in our facility on July 21, 1998. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards

TESTED BY: John Liao , DATE: 7/27/98
(John Liao)

CHECKED BY: Sharon Hsiung , DATE: 7/27/98
(Sharon Hsiung)

APPROVED BY: Mike Su , DATE: 7/27/98
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	CD-ROM DRIVE
Model No.	:	BCD 36X
Power Supply	:	DC 5V/12V (from PC)
Data Cable	:	Nonshielded (IDE cable) (0.8 m)

Note: The EUT is a 36X CD-ROM DRIVE, which is designed to be used within an IBM PC or compatible computer by using the IDE connection.

User could install one sound card in PC to process audio signals from EUT then output audio to speaker via SPK port located on sound card or only connect headphone to headphone jack on front panel of EUT to listen to an audio directly playing from the CD-ROM DRIVE.

The EUT was tested under the following two conditions:

- (1) The EUT played music CD and audio signals were present via headphone port, no sound blaster card was installed.
- (2) The EUT played video demo CD and PC showed continuous pictures on monitor and present stereo audio via sound blaster card.

The maximum emission levels of the above two conditions are recorded together in this report.

For more detailed features, please refer to manufacturer's specification or User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No	Product	Brand	Model No.	FCC ID	I/O Cable
1	PERSONAL COMPUTER	HP	VECTRA VL 5/133	B94VECTRA500T	Nonshielded Power (1.8m)
2	MONITOR	ADI	PD-959	FCC DoC Approved	Shielded Signal (1.5m) Nonshielded Power (1.8m)
3	KEYBOARD	FORWARD	FDA-104GA	F4ZDA-104G	Shielded Signal (1.4m)
4	PRINTER	HP	C2145A	B94C2145X	Shielded Signal (1.2m) Nonshielded Power (1.9m)
5	MODEM	ACEEX	1414	IFAXDM1414	Shielded Signal (1.2m) Nonshielded Power (1.9m)
6	MOUSE	HP	M-S34	DZL211029	Shielded Signal (1.8m)
7	EARPHONE	GAMMA	LH115	N/A	Nonshielded Signal (1.4m)
8	SPEAKER	J-S	J-008	N/A	Nonshielded Signal (1.1m)
9	SOUND CARD	YASHIN	AUDIO 1869	FCC DoC Approved	N/A
10	VIDEO CARD	GORDIA	DSV3365	LUT-DSV3365	N/A

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:1992. Radiated testing was performed at an antenna to EUT distance of 10 m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	E4411A	US37360834	Sept. 28, 1998
CHASE Preamplifier	CPA9231A/4	3215	Oct. 31, 1998
ROHDE & SCHWARZ TEST RECEIVER	ESVS 30	841977/002	Jan. 8, 1999
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 28, 1998
CHASE BILOG Antenna	CBL6112	2074	Dec. 25, 1998
CHANCE Turn Table & Tower Controller	ACS-I	N/A	N/A
Open Field Test Site	Site 6	ADT-R06	Dec. 23, 1998

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.

And the calibrations are traceable to NML/ROC and NIST/USA.

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESH3	893495/006	July 15, 1999
ROHDE & SCHWARZ Spectrum Monitor	EZM	893787/013	July 16, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH3-Z5	839135/006	July 14, 1999
EMCO-L.I.S.N.	3825/2	9204-1964	July 14, 1999
Shielded Room	Site 2	ADT-C02	N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.

And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	uV/m	dBuV/m	uV/m	dBuV/m
Above 1000	300	49.5	500	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 1000 MHz (Radiated Emission)
Input Voltage : 120 Vac, 60 Hz
Temperature : 30 °C
Humidity : 56 %
Atmospheric Pressure : 998 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -10.3 dB at 0.245 MHz Minimum passing margin of radiated emission: -3.0 dB at 225.79 MHz

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. PC plays a demo disk via the EUT and sends out audio via sound card installed. The monitor screen shows video of this demo disk.

OR

1. Turn on the power of all equipments.
2. PC reads a test program and runs it to enable all functions.
3. PC sends "H" messages to monitor and monitor displays "H" patterns on screen.
4. PC sends "H" messages to modem.
5. PC sends "H" messages to printer, and the printer prints them on paper.
6. PC plays a music disk via the EUT and sends out audio signals to earphone via the EUT.
7. Repeat steps 3-7.



4.3 TEST DATA OF CONDUCTED EMISSION

EUT: **CD-ROM DRIVE**MODEL: **BCD 36X**

6 dB Bandwidth: 10 kHz

TEST PERSONNEL:


John Liao

Freq.	L Level		N Level		Limit		Margin [dB (μV)]			
[MHz]	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.164	52.80	-	45.40	-	65.24	55.24	-12.4	-	-19.8	-
0.245	51.60	-	47.00	-	61.91	51.91	-10.3	-	-14.9	-
0.326	46.80	-	47.30	-	59.54	49.54	-12.7	-	-12.2	-
1.152	25.20	-	26.10	-	56.00	46.00	-30.8	-	-29.9	-
12.552	33.10	-	33.40	-	60.00	50.00	-26.9	-	-26.6	-
22.565	30.00	-	32.50	-	60.00	50.00	-30.0	-	-27.5	-

- Remarks:
1. "***": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

dBuV

Mkr 0.172763MHz 53.7dBuV

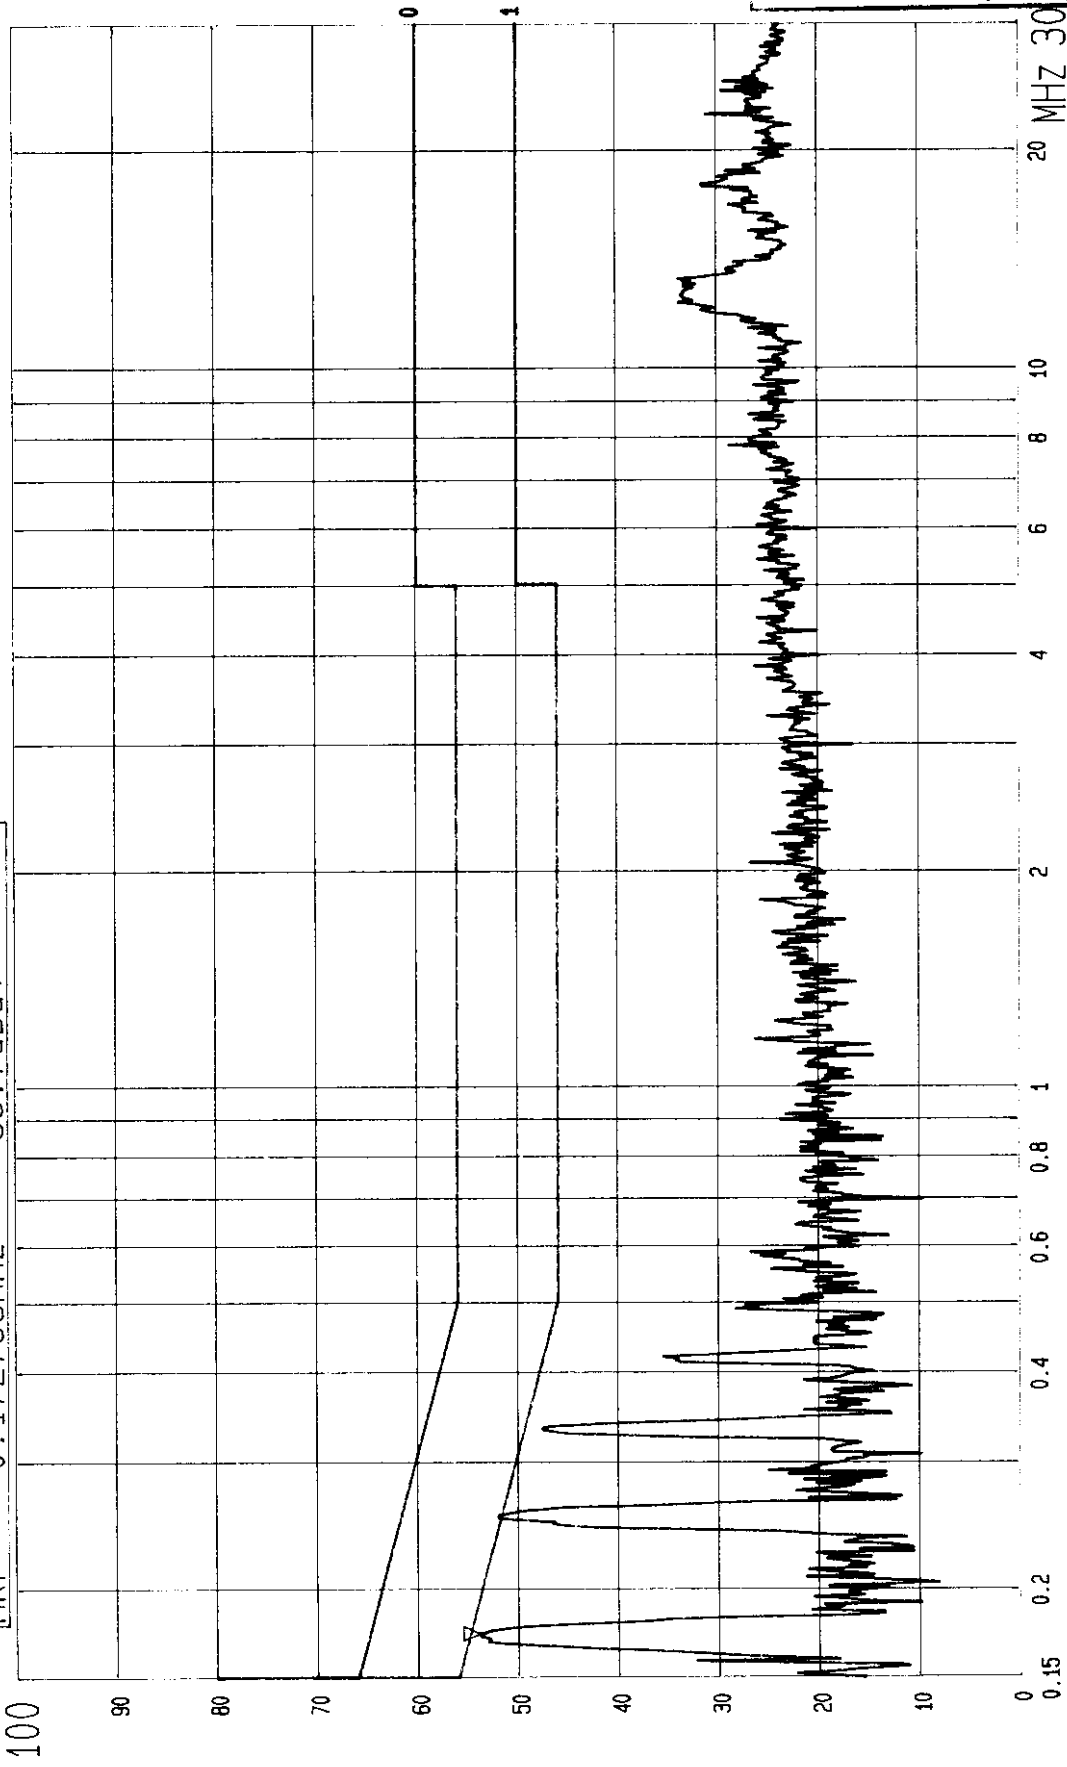

--- Date 21.JUL.'98 Time 20:24:27
CISPR 22 CLASS B CONDUCTION TEST
MODEL : BCD 36X


(PEAK VALUE)

ADT CORP
LISN: L

Report No. FP4072101

Page 9-1

Tested by John Liao

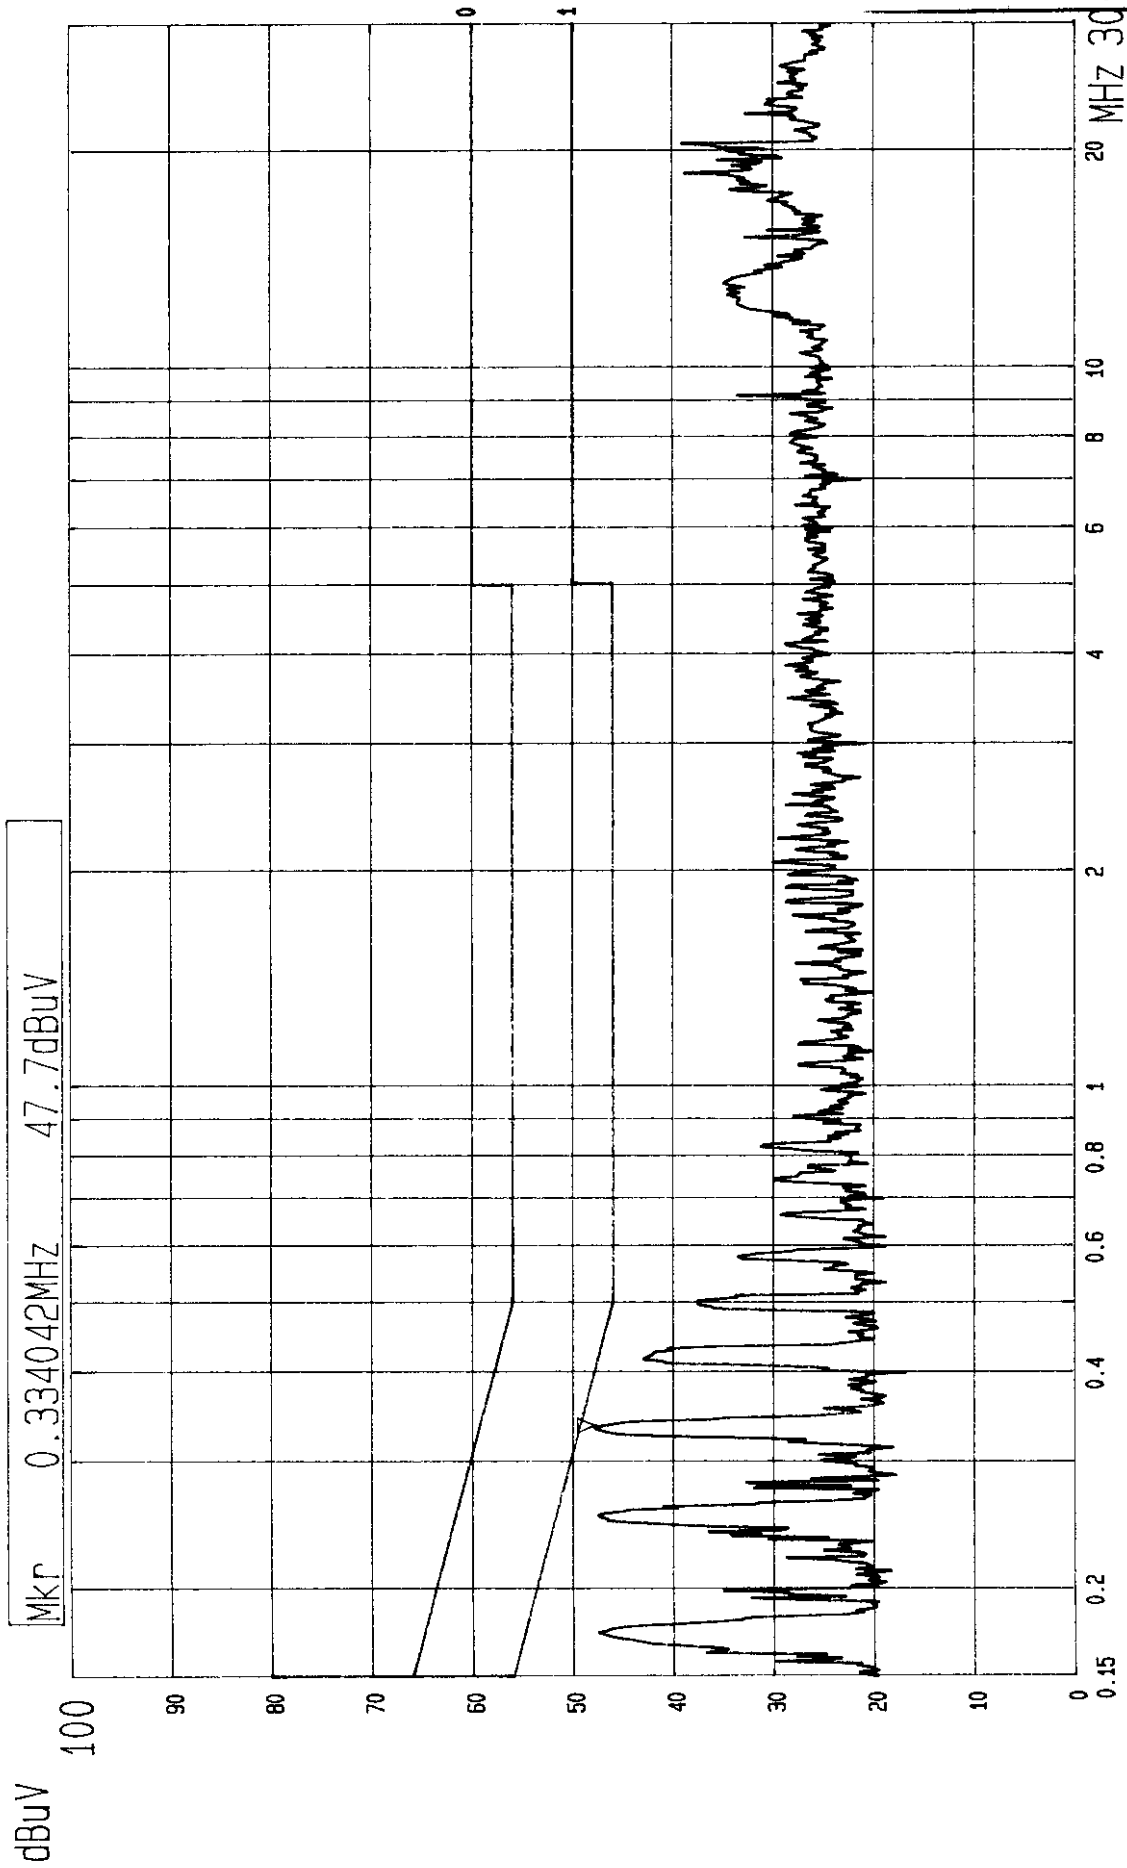

--- Date 21.JUL.'98 Time 20:26:28

CISPR 22 CLASS B CONDUCTION TEST

MODEL : BCD 36X

(PEAK VALUE)

ADT CORP

LISN: N



4.4 TEST DATA OF RADIATED EMISSION

EUT: **CD-ROM DRIVE**MODEL: **BCD 36X**

ANTENNA: CHASE BILOG CBL6112

POLARITY: Horizontal

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

TEST PERSONNEL: *John Liak*

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
86.94	11.3	11.4	22.7	30.0	-7.3
114.30	15.1	6.4	21.5	30.0	-8.5
132.61	14.0	11.6	25.6	30.0	-4.4
192.24	10.6	9.4	20.0	30.0	-10.0
198.95	10.4	10.8	21.2	30.0	-8.8
200.24	10.5	12.9	23.4	30.0	-6.6
221.49	12.5	12.1	24.6	30.0	-5.4
225.79	12.9	14.1	27.0	30.0	-3.0
228.60	13.1	9.0	22.1	30.0	-7.9
231.48	13.4	14.0	27.4	37.0	-9.6

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
 2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION

EUT: **CD-ROM DRIVE**MODEL: **BCD 36X**

ANTENNA: CHASE BILOG CBL6112

POLARITY: Vertical

DETECTOR FUNCTION: Quasi-peak

6 dB BANDWIDTH: 120 kHz

FREQUENCY RANGE: 30-1000 MHz

MEASURED DISTANCE: 10 M

TEST PERSONNEL: *John Liang*

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
85.32	8.9	13.2	22.1	30.0	-7.9
114.33	14.4	8.4	22.8	30.0	-7.2
132.61	13.7	13.1	26.8	30.0	-3.2
192.23	11.0	8.0	19.0	30.0	-11.0
198.93	11.7	9.0	20.7	30.0	-9.3
200.00	11.8	8.8	20.6	30.0	-9.4
203.13	12.0	12.0	24.0	30.0	-6.0
206.85	12.1	6.8	18.9	30.0	-11.1
225.74	13.0	9.2	22.2	30.0	-7.8
232.11	13.2	12.3	25.5	37.0	-11.5

- REMARKS :
1. Emission level (dBuV/m) = Correction Factor(dB/m) + Meter Reading (dBuV).
 2. Correction Factor(dB/m) = Ant. Factor(dB/m)+Cable loss(dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value