




CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.com.cn

TEST REPORT

Report No.: GTI20191674E-2
FCC ID.....: 2ATUP-Q660500
IC: 25301-Q660500
Applicant.....: eInfochips Inc
Address.....: 2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America
Manufacturer.....: eInfochips Inc
Address.....: 2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America
Product Name.....: Eragon 660
Trade Mark.....: 
Model/Type reference.....: Eragon 660 SBC
Listed Model(s): EIC-Q660-500
Standard.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS 247 Issue 2**
Date of receipt of test sample...: Jul. 7, 2019
Date of testing.....: Jul. 8, 2019 to Jul. 26, 2019
Date of issue.....: Jul. 26, 2019
Result.....: **PASS**

Compiled by:
(Printed name+signature) Terry Su

Terry Su

Supervised by:
(Printed name+signature) Eric Zhang

Eric Zhang

Approved by:
(Printed name+signature) Walter Chen

Walter Chen

Testing Laboratory Name **CTC Laboratories, Inc.**

Address..... 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. OPERATION STATE.....	8
2.4. MEASUREMENT INSTRUMENTS LIST	9
3. TEST ITEM AND RESULTS	11
3.1. CONDUCTED EMISSION.....	11
3.2. RADIATED EMISSION	14
3.3. BAND EDGE EMISSIONS	36
3.4. 20 BANDWIDTH.....	67
3.5. CHANNEL SEPARATION.....	71
3.6. NUMBER OF HOPPING CHANNEL.....	75
3.7. DWELL TIME	77
3.8. PEAK OUTPUT POWER	82
3.9. ANTENNA REQUIREMENT	86
4. LABEL AND LABEL LOCATION	87
5. EUT TEST PHOTOS	88
6. PHOTOGRAPHS OF EUT CONSTRUCTIONAL	89



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS 247 Issue 2](#): Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSs) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

1.2. Report version

Revised No.	Date of issue	Description
01	Jul. 26, 2019	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Lucy Lan
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Lucy Lan
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Lucy Lan
Hopping Channel Separation	15.247(a)(1)	RSS 247 5.1 (b)	Pass	Lucy Lan
Dwell Time	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Lucy Lan
Peak Output Power	15.247(b)(1)	RSS 247 5.4 (b)	Pass	Lucy Lan
Number of Hopping Frequency	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Lucy Lan
Band Edge Emissions	15.247(d)	RSS 247 5.5	Pass	Lucy Lan
Radiated Spurious Emission	15.247(d)&15.209	RSS 247 5.5& RSS-Gen 8.9	Pass	Lucy Lan
99% Occupied Bandwidth & 20dB Bandwidth	15.247(a)	RSS 247 5.1 (b)	Pass	Lucy Lan

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: CN1208

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9783A

The 3m alternate test site of CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC-Registration No.: 951311

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	25°C
Relative Humidity:	40%
Air Pressure:	101kPa




2. GENERAL INFORMATION

2.1. Client Information

Applicant:	eInfochips Inc
Address:	2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America
Manufacturer:	eInfochips Inc
Address:	2025 Gateway Place, Suite 270, San Jose, CA 95110, United States of America

2.2. General Description of EUT

Product Name:	Eragon 660
Trade Mark:	
Model/Type reference:	Eragon 660 SBC
Listed Model(s):	EIC-Q660-500
Model Difference:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name.
Power supply:	12Vdc/2.5A from AC/DC Adapter
Adapter Model:	GPE048A-120250-D Input:100-240V 50/60Hz 1A Output:12V/2.5A
Hardware version:	1.1
Software version:	1.1.0
Bluetooth 5.0+EDR	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Ceramic Antenna
Antenna gain:	1.5dBi

2.3. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.4. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 28, 2019
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Dec. 28, 2019
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 28, 2019
4	Signal Generator	Agilent	E8257D	MY46521908	Dec. 28, 2019
5	Power Sensor	Agilent	U2021XA	MY5365004	Dec. 28, 2019
6	Power Sensor	Agilent	U2021XA	MY5365006	Dec. 28, 2019
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Dec. 28, 2019
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec. 28, 2019
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec. 28, 2019
10	Climate Chamber	ESPEC	MT3065	/	Dec. 28, 2019
11	300328 v2.1.1 test system	TONSCEND	v2.6	/	/

Radiated Emission and Transmitter spurious emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	Rohde & Schwarz	ESCI	100658	Dec. 28, 2019
2	High pass filter	micro-tranics	HPM50111	142	Dec. 28, 2019
3	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 28, 2019
4	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 28, 2019
5	Loop Antenna	LAPLAC	RF300	9138	Dec. 28, 2019
6	Spectrum Analyzer	Rohde & Schwarz	FSU26	100105	Dec. 28, 2019
7	Horn Antenna	Schwarzbeck	BBHA 9120D	647	Dec. 28, 2019
8	Pre-Amplifier	HP	8447D	1937A03050	Dec. 28, 2019
9	Pre-Amplifier	EMCI	EMC051835	980075	Dec. 28, 2019
10	Antenna Mast	UC	UC3000	N/A	N/A
11	Turn Table	UC	UC3000	N/A	N/A
12	Cable Below 1GHz	Schwarzbeck	AK9515E	33155	Dec. 28, 2019
13	Cable Above 1GHz	Hubersuhner	SUCOFLEX10 2	DA1580	Dec. 28, 2019
14	Splitter	Mini-Circuit	ZAPD-4	400059	Dec. 28, 2019
15	RF Connection Cable	HUBER+SUHNE R	RE-7-FL	N/A	Dec. 28, 2019
16	RF Connection Cable	Chengdu E-Microwave	---	---	Dec. 28, 2019

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



17	High pass filter	Compliance Direction systems	BSU-6	34202	Dec. 28, 2019
18	Attenuator	Chengdu E-Microwave	EMCAXX-10R NZ-3	---	Dec. 28, 2019
19	High and low temperature box	ESPEC	MT3065	12114019	Dec. 28, 2019

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 28, 2019
2	LISN	R&S	ENV216	101113	Dec. 28, 2019
3	EMI Test Receiver	R&S	ESCI	100658	Dec. 28, 2019

Note:1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

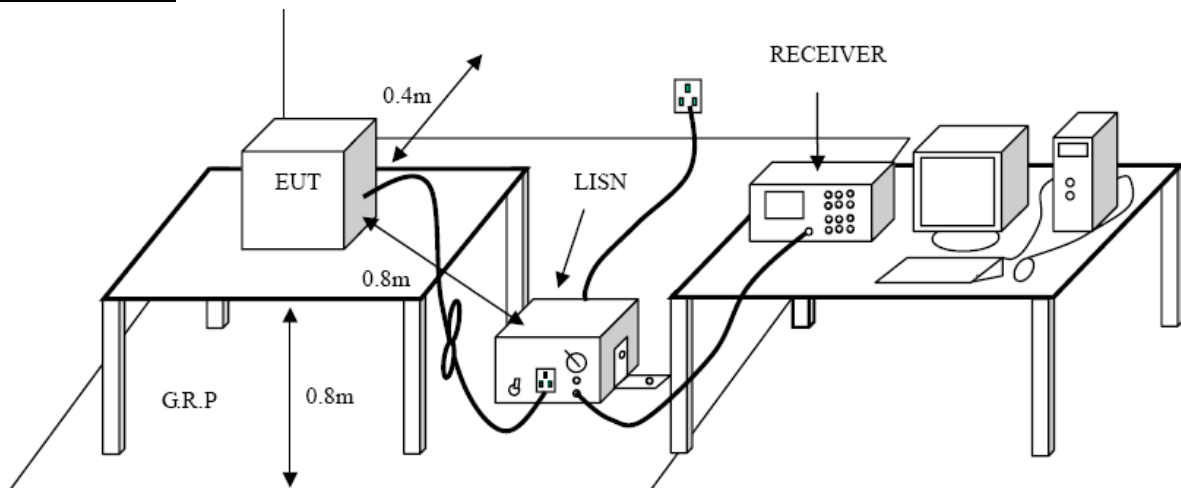

Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment.
The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.


Test Mode:

Please refer to the clause 2.3.

Test Results



Test Voltage:	AC 120V/60 Hz
Terminal:	Line

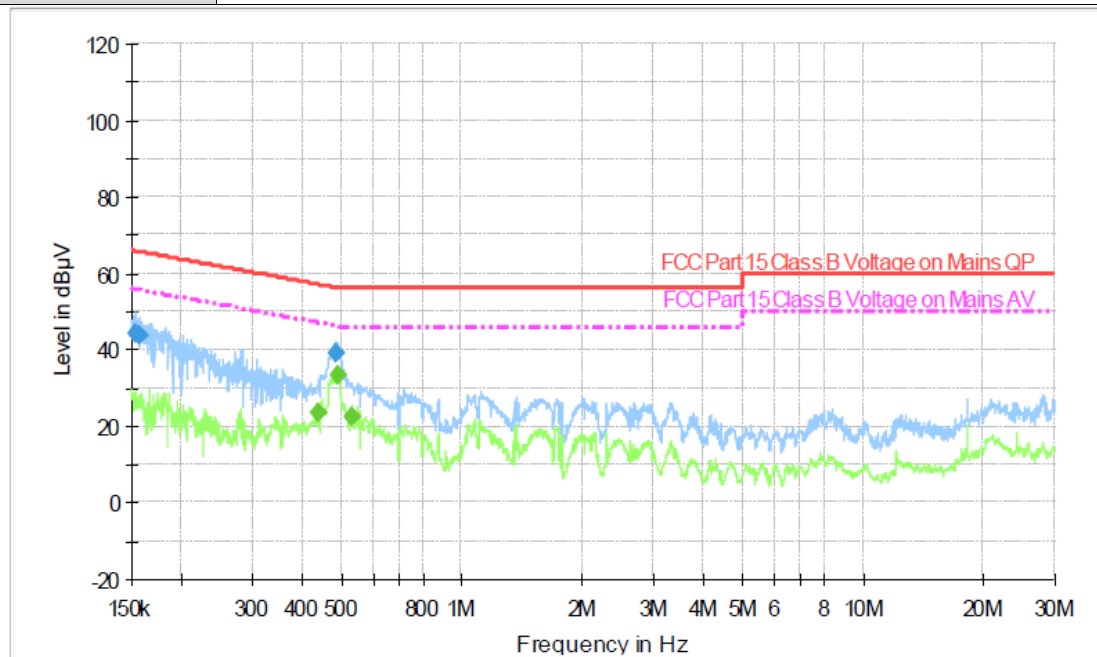


Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.152720	44.2	1000.00	9.000	Off	L1	10.0	21.7	65.9	
0.157050	43.8	1000.00	9.000	Off	L1	10.0	21.8	65.6	
0.485640	39.2	1000.00	9.000	Off	L1	10.0	17.0	56.2	

Final Measurement Detector 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.438590	23.4	1000.00	9.000	Off	L1	10.0	23.7	47.1	
0.490510	33.3	1000.00	9.000	Off	L1	10.0	12.9	46.2	
0.530260	22.3	1000.00	9.000	Off	L1	10.0	23.7	46.0	

Emission Level= Read Level+ Correct Factor

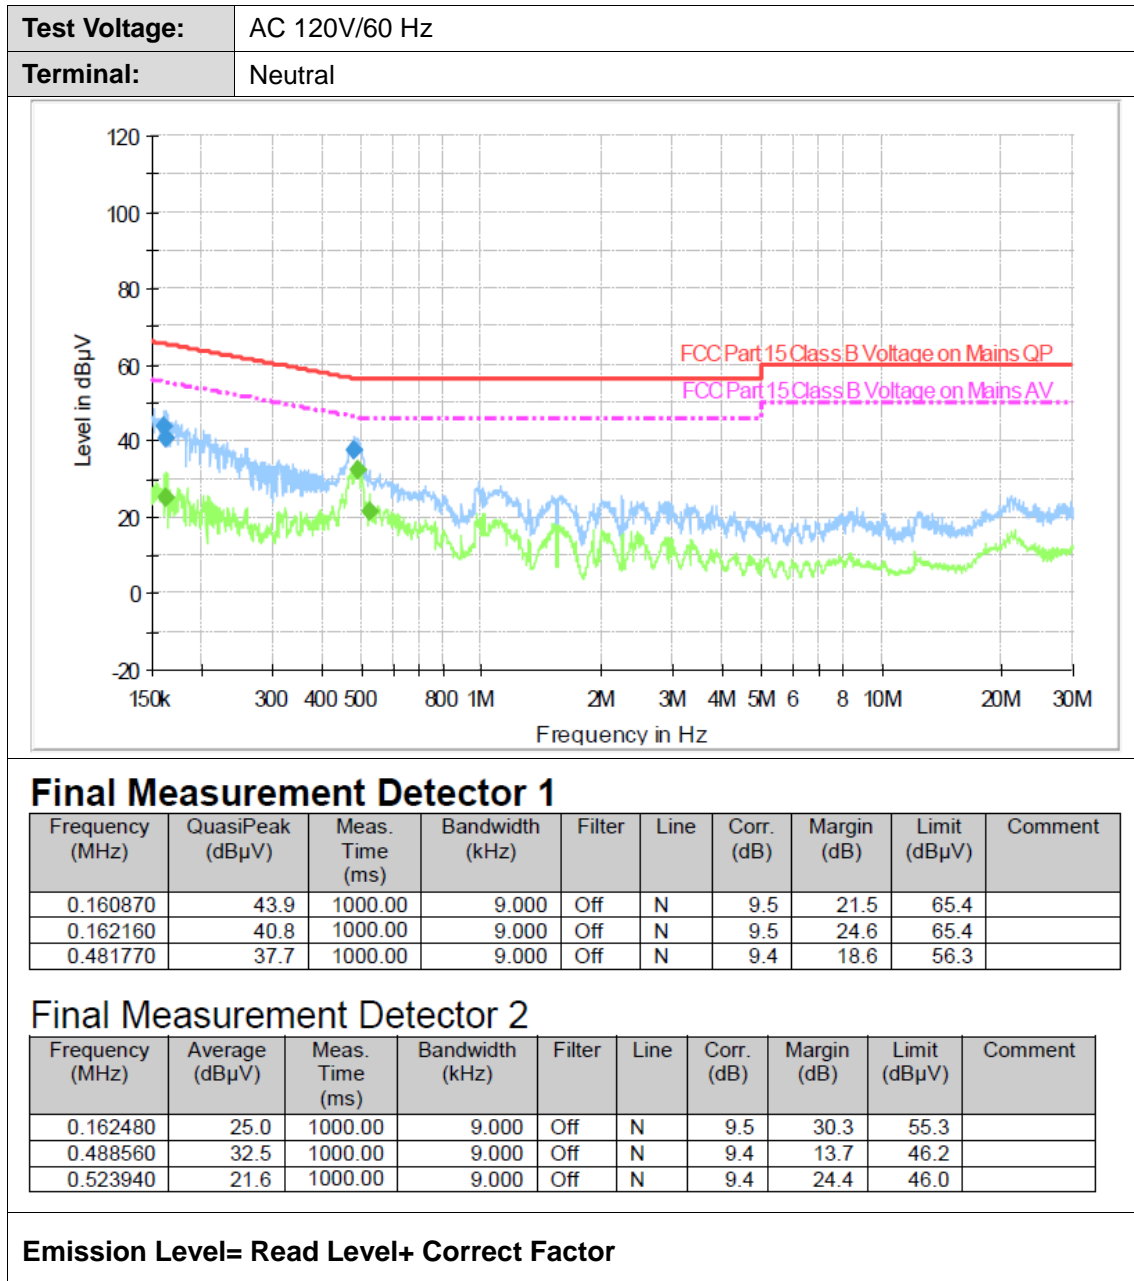

3.2. Radiated Emission

Limit



FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration

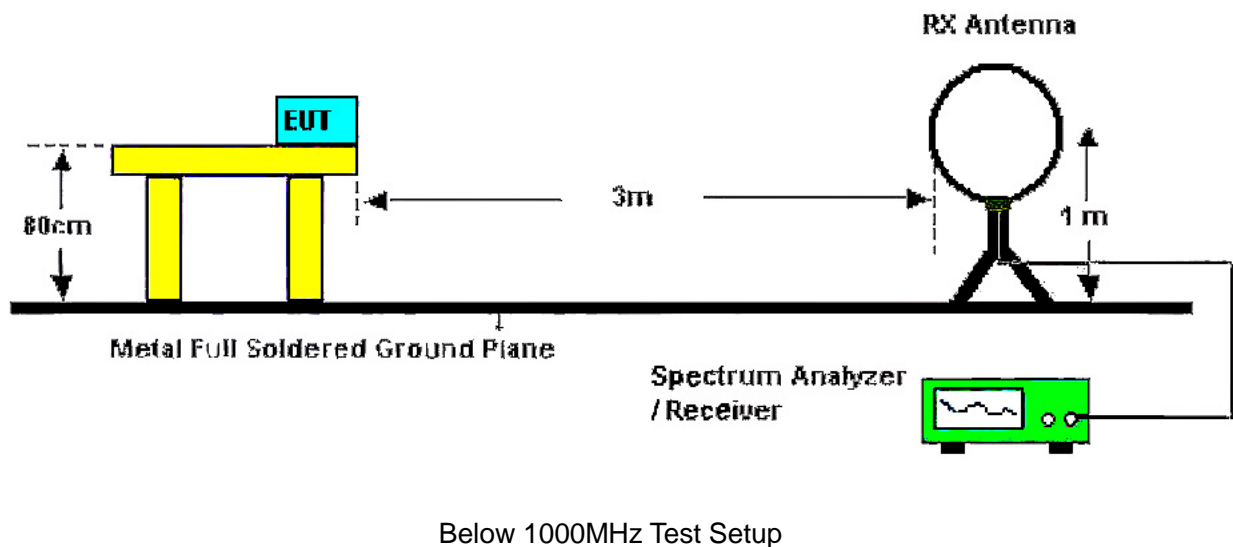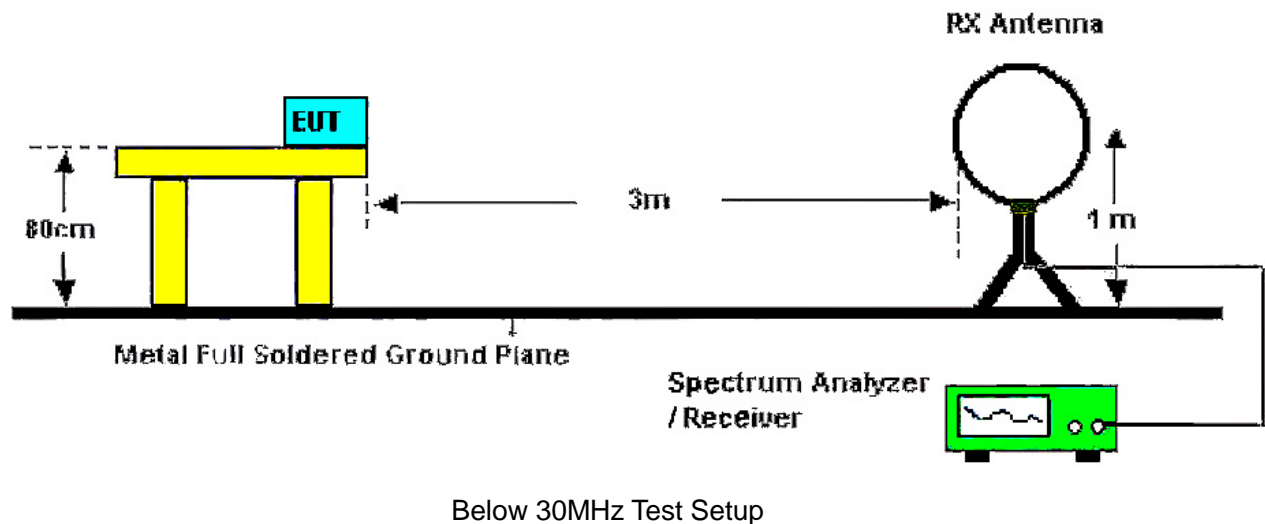

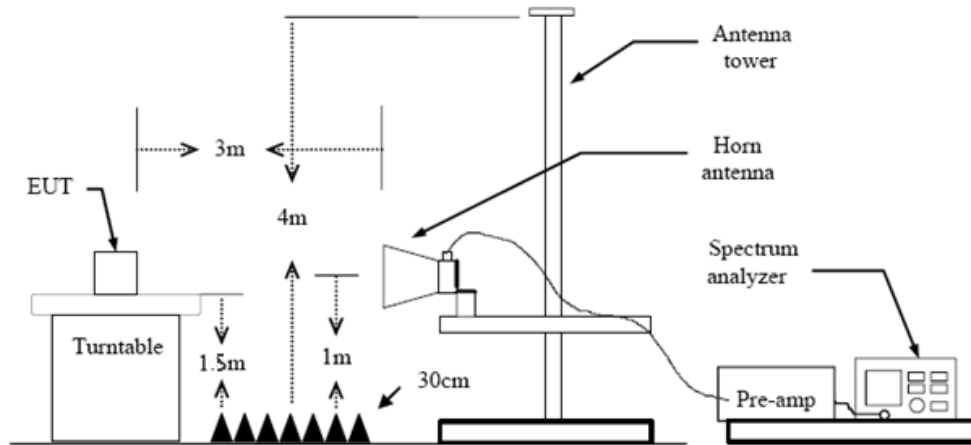

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.3.

Test Result

9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Above 18G test data reference to the test report No.: C180811Z01-RP1.



30MHz-1GHz

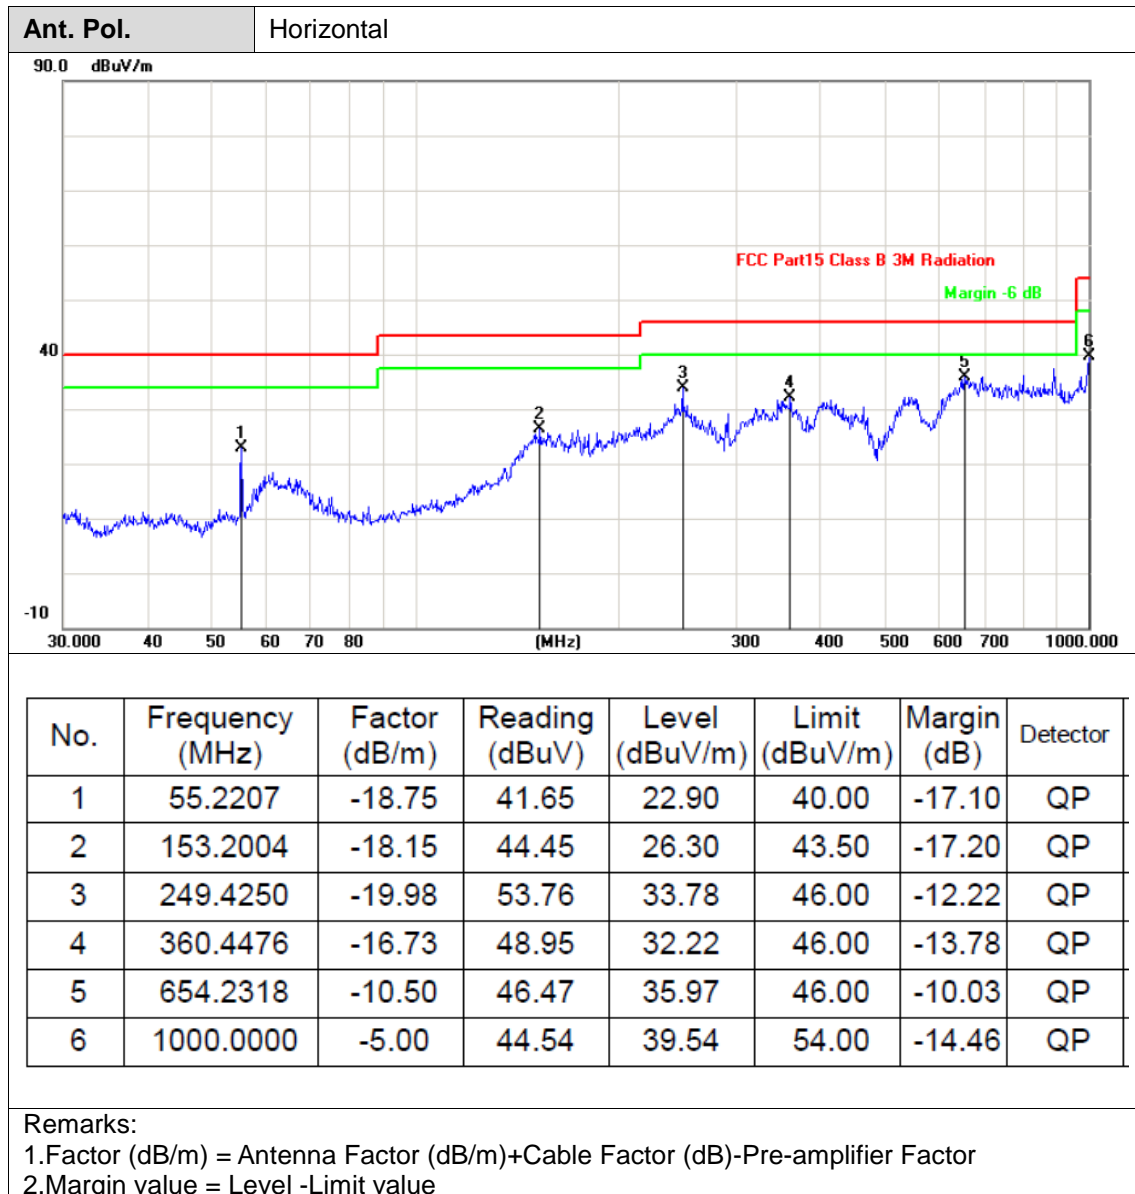


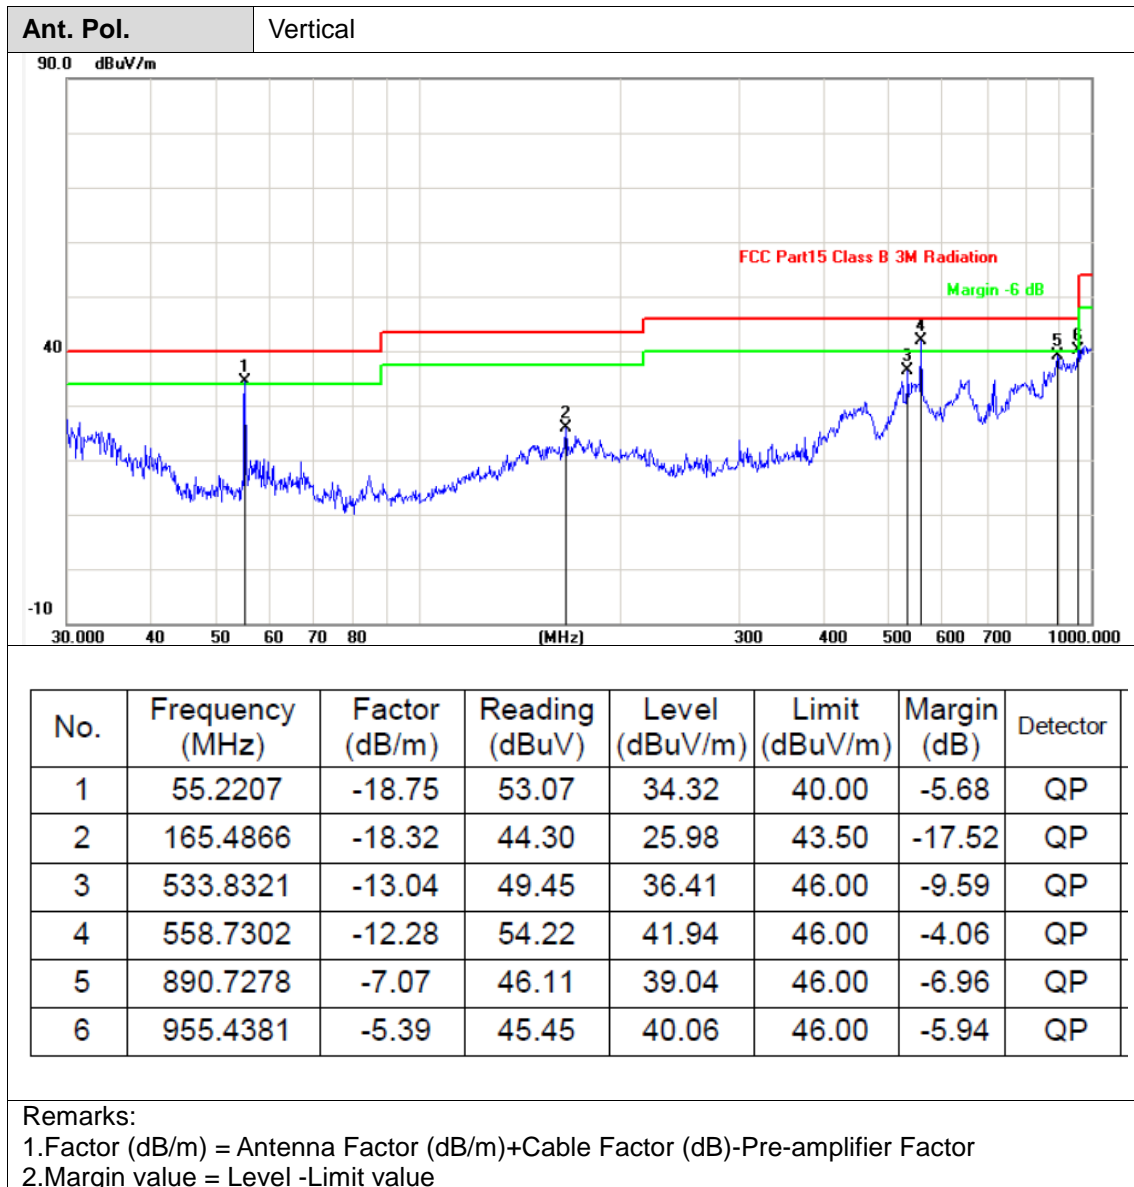



Above 1GHz

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

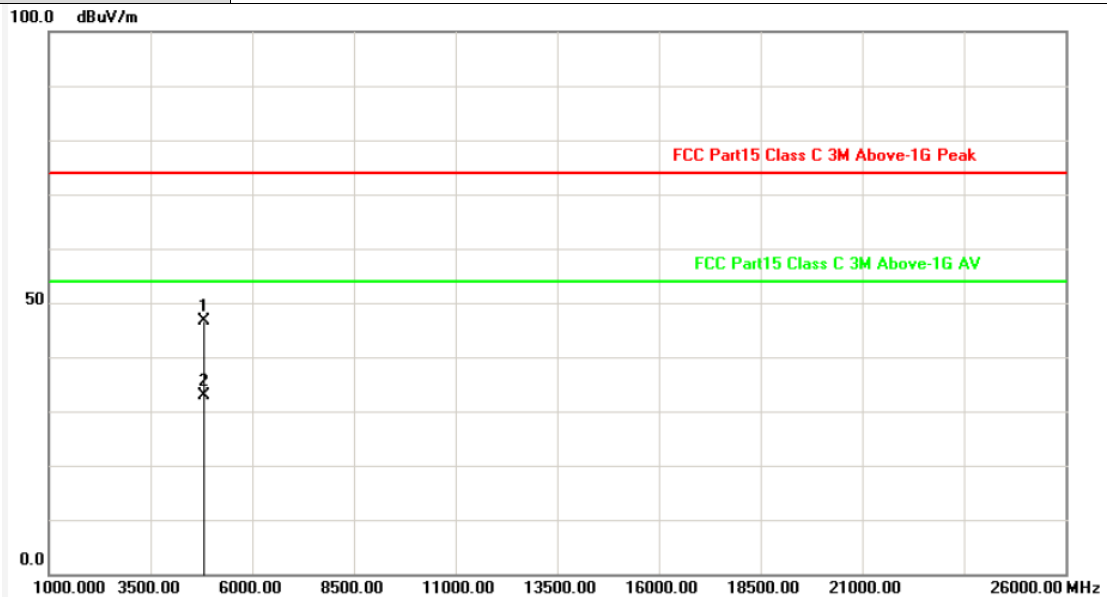


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4804.626	-3.32	50.00	46.68	74.00	-27.32	peak
2	4803.708	-3.32	36.23	32.91	54.00	-21.09	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

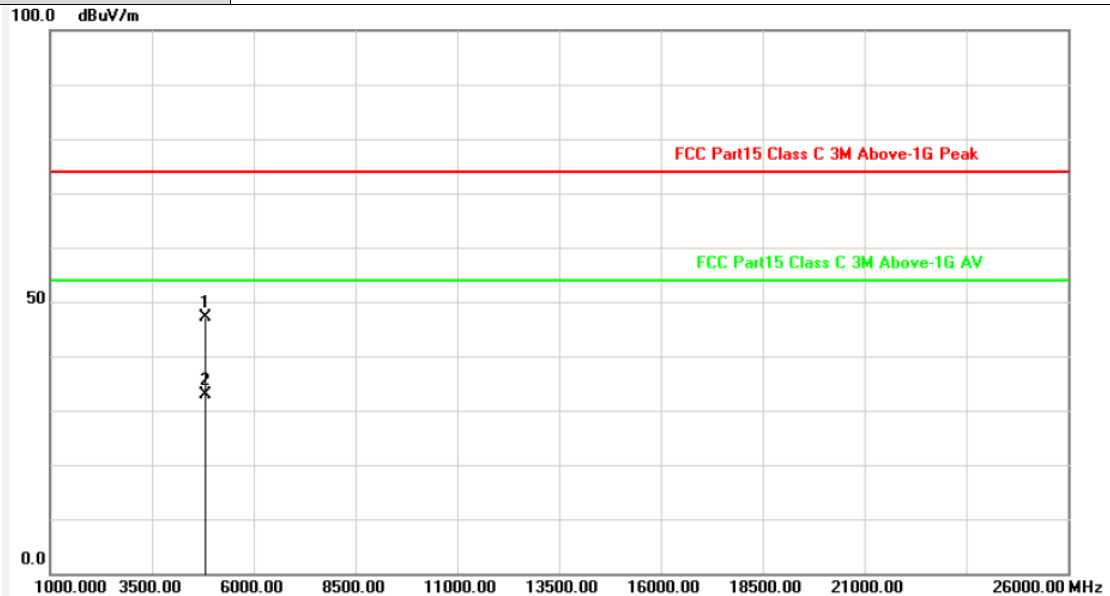

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4804.020	-3.32	50.49	47.17	74.00	-26.83	peak
2	4803.748	-3.32	36.19	32.87	54.00	-21.13	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

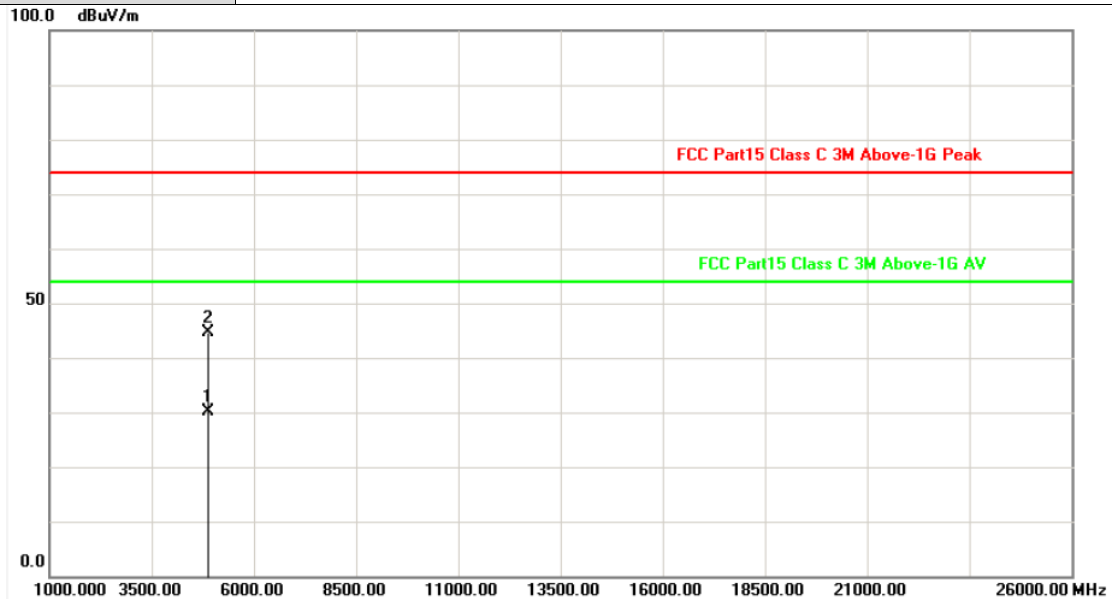

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4882.279	-2.60	32.61	30.01	54.00	-23.99	AVG
2	4882.503	-2.59	47.23	44.64	74.00	-29.36	peak


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

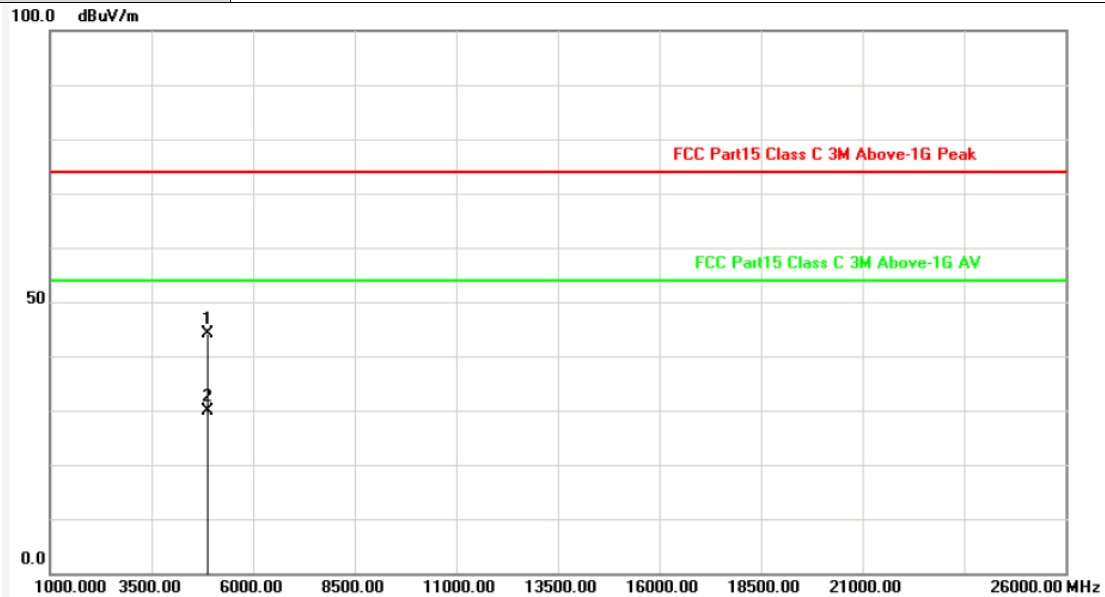

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4882.025	-2.60	46.70	44.10	74.00	-29.90	peak
2	4882.250	-2.60	32.60	30.00	54.00	-24.00	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

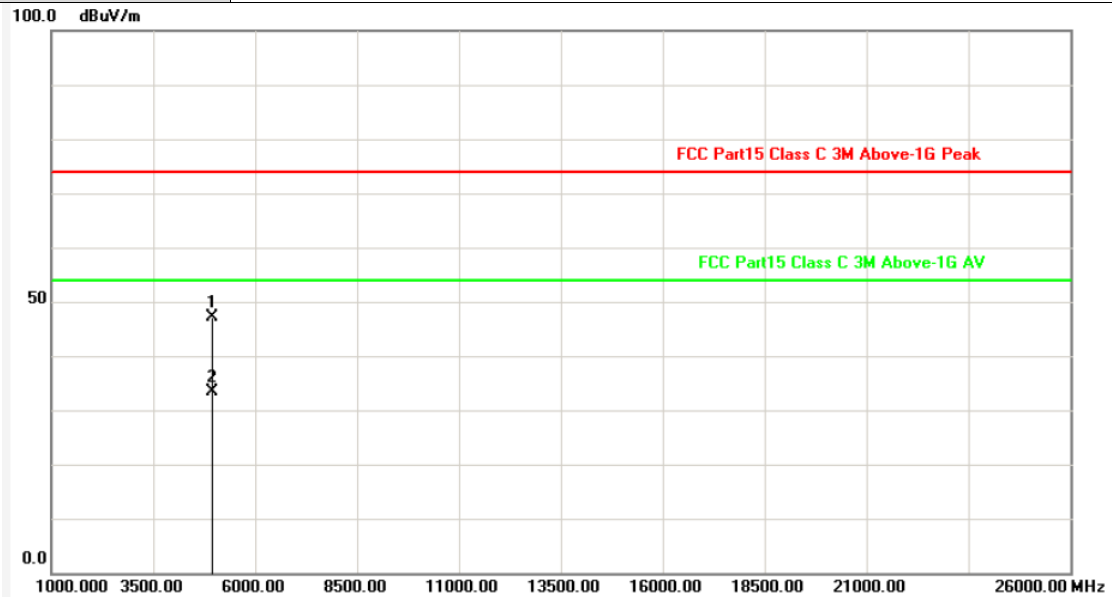

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.200	-2.92	50.15	47.23	74.00	-26.77	peak
2	4960.656	-2.92	36.19	33.27	54.00	-20.73	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

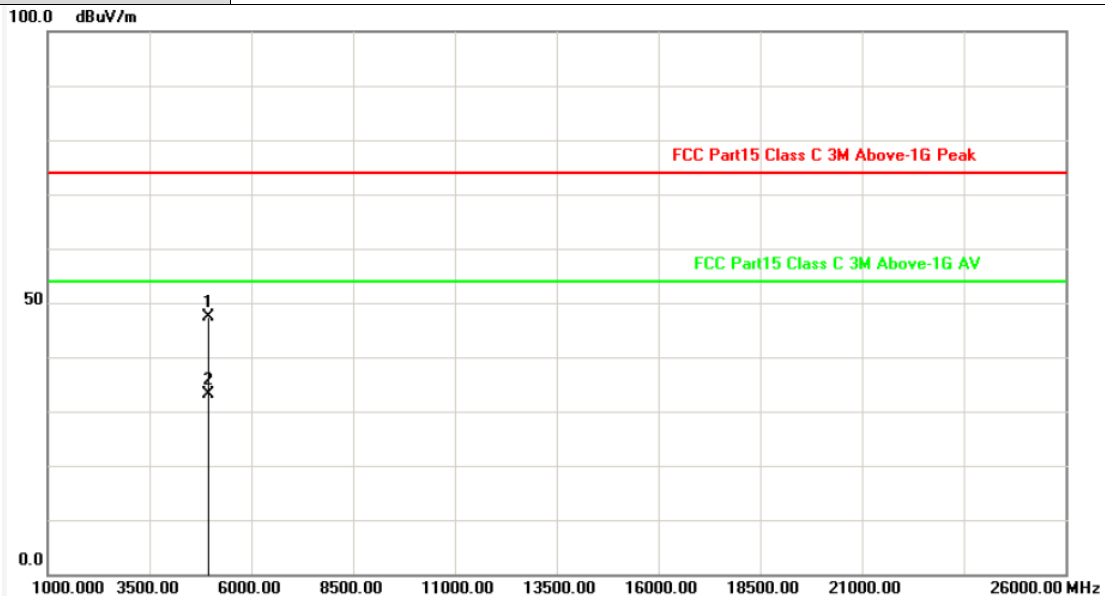

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.826	-2.92	50.18	47.26	74.00	-26.74	peak
2	4959.848	-2.92	36.15	33.23	54.00	-20.77	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

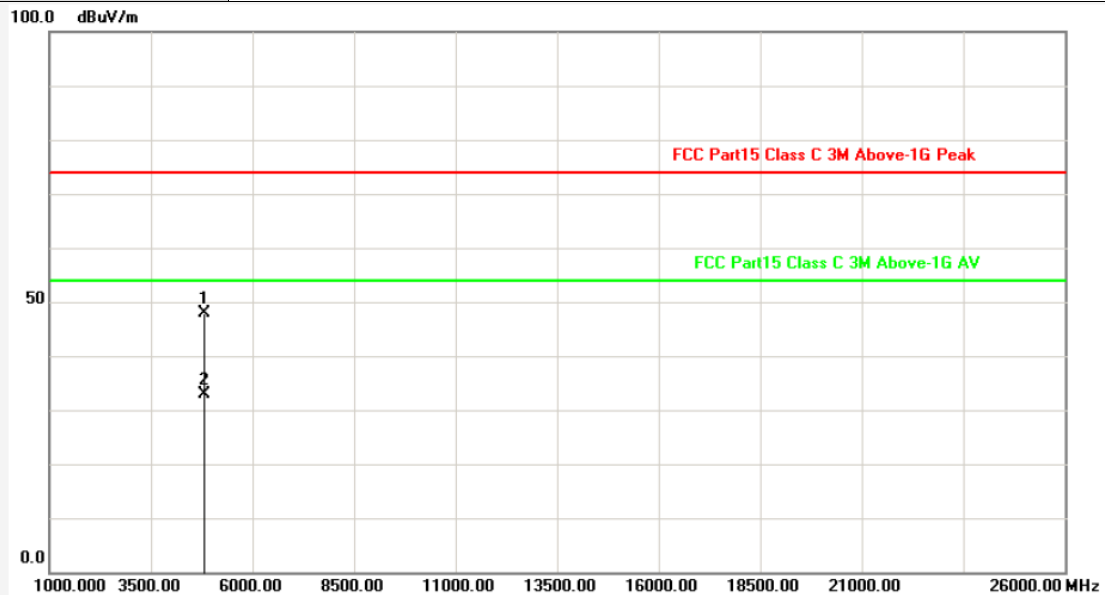

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.982	-3.32	51.23	47.91	74.00	-26.09	peak
2	4804.212	-3.32	36.19	32.87	54.00	-21.13	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

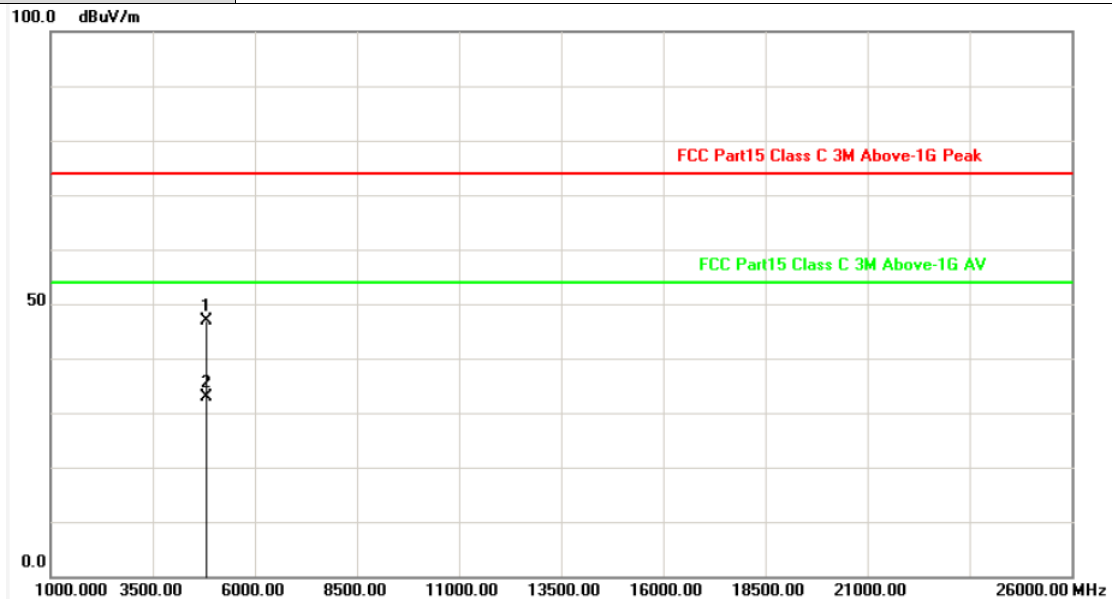

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4804.336	-3.32	50.27	46.95	74.00	-27.05	peak
2	4803.890	-3.32	36.21	32.89	54.00	-21.11	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

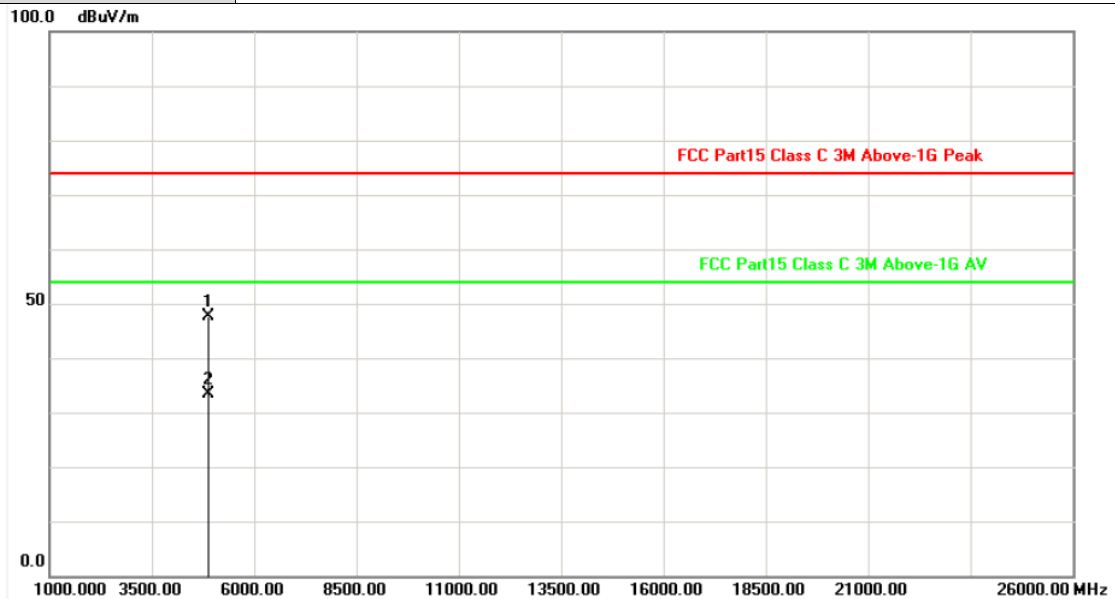

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4882.308	-3.12	50.81	47.69	74.00	-26.31	peak
2	4882.778	-3.11	36.40	33.29	54.00	-20.71	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

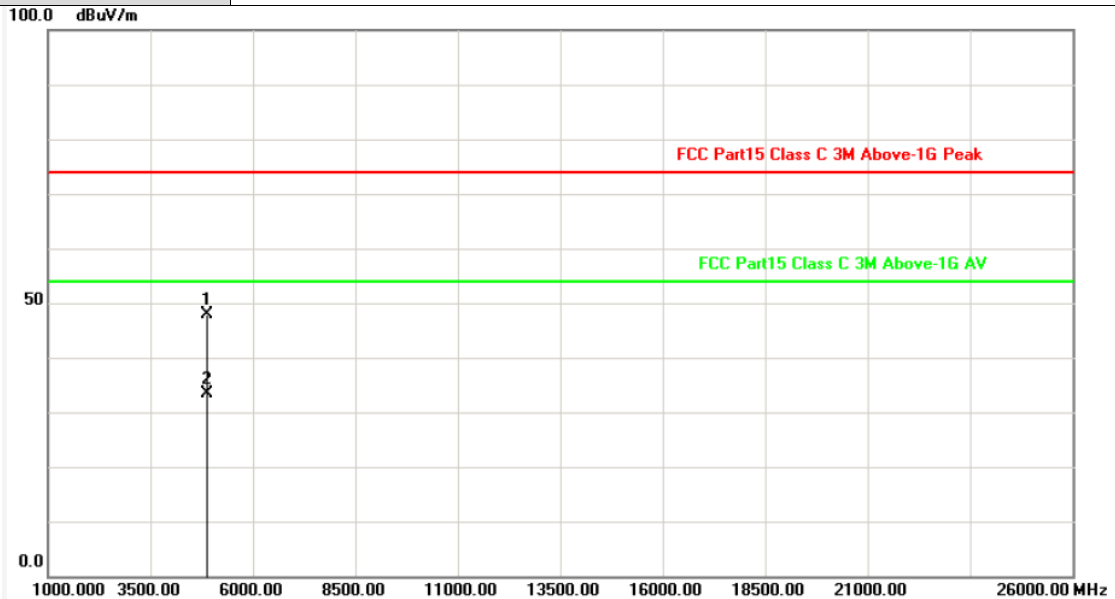

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4882.732	-3.11	51.02	47.91	74.00	-26.09	peak
2	4881.122	-3.12	36.40	33.28	54.00	-20.72	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

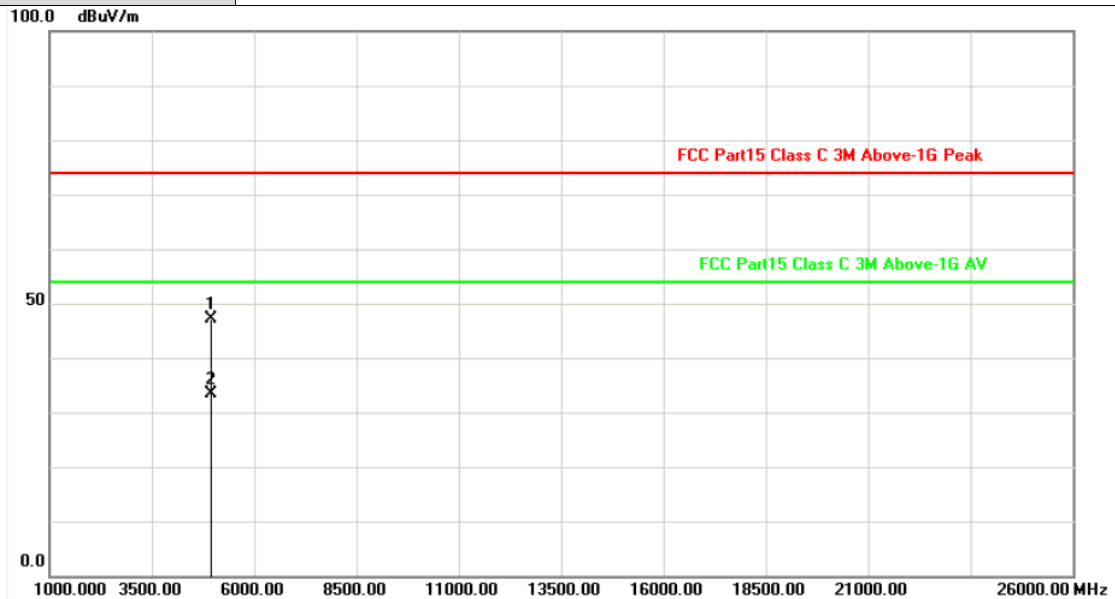

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.200	-2.92	50.15	47.23	74.00	-26.77	peak
2	4960.656	-2.92	36.19	33.27	54.00	-20.73	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

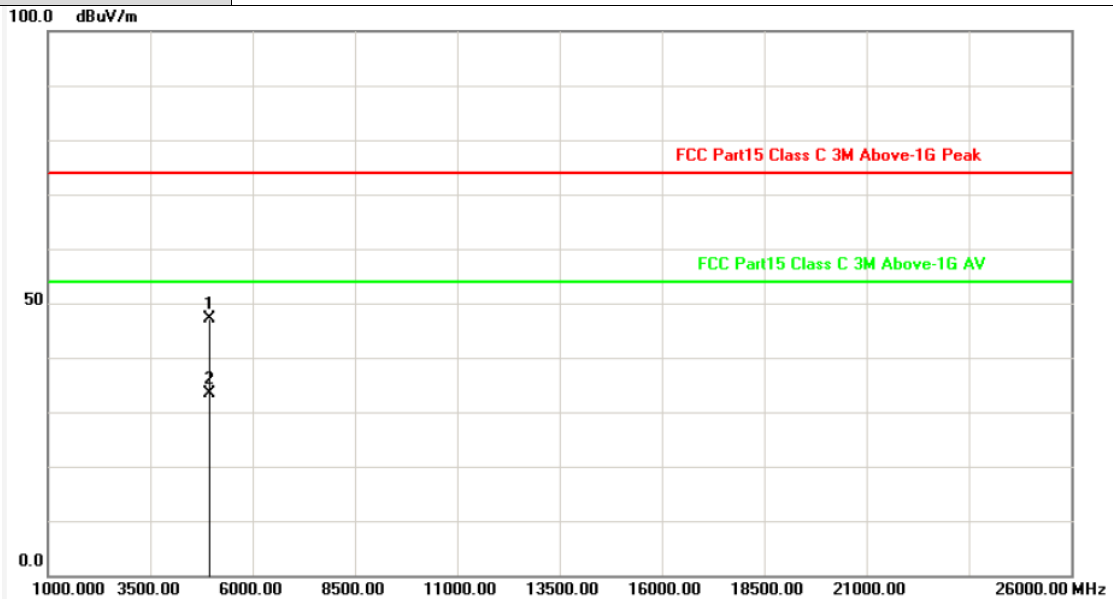

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4960.576	-2.92	50.08	47.16	74.00	-26.84	peak
2	4959.950	-2.92	36.18	33.26	54.00	-20.74	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

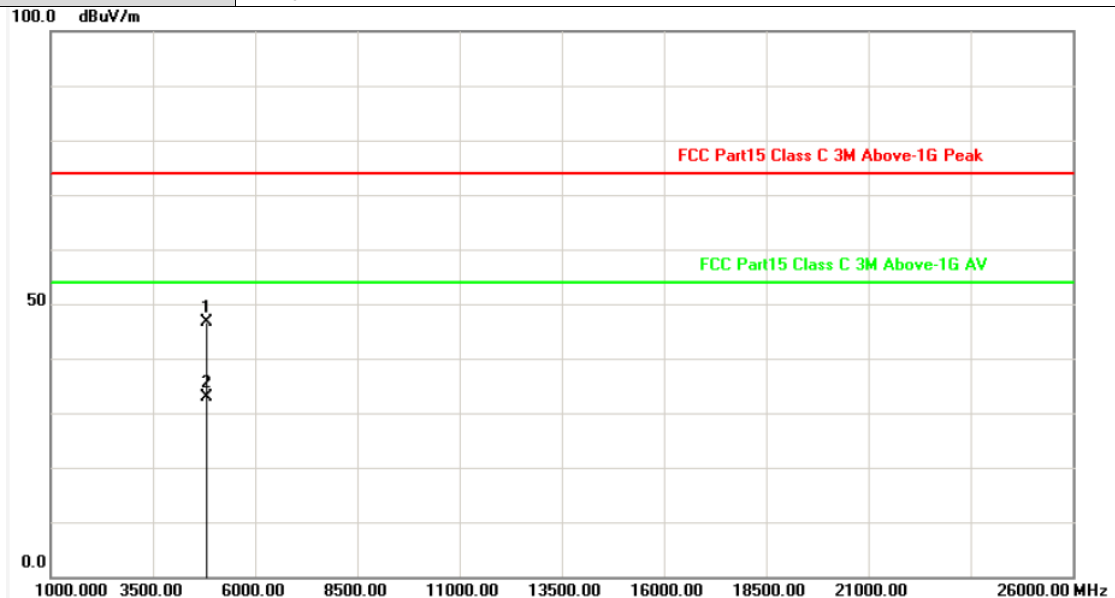

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4804.728	-3.32	49.87	46.55	74.00	-27.45	peak
2	4803.404	-3.32	36.20	32.88	54.00	-21.12	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

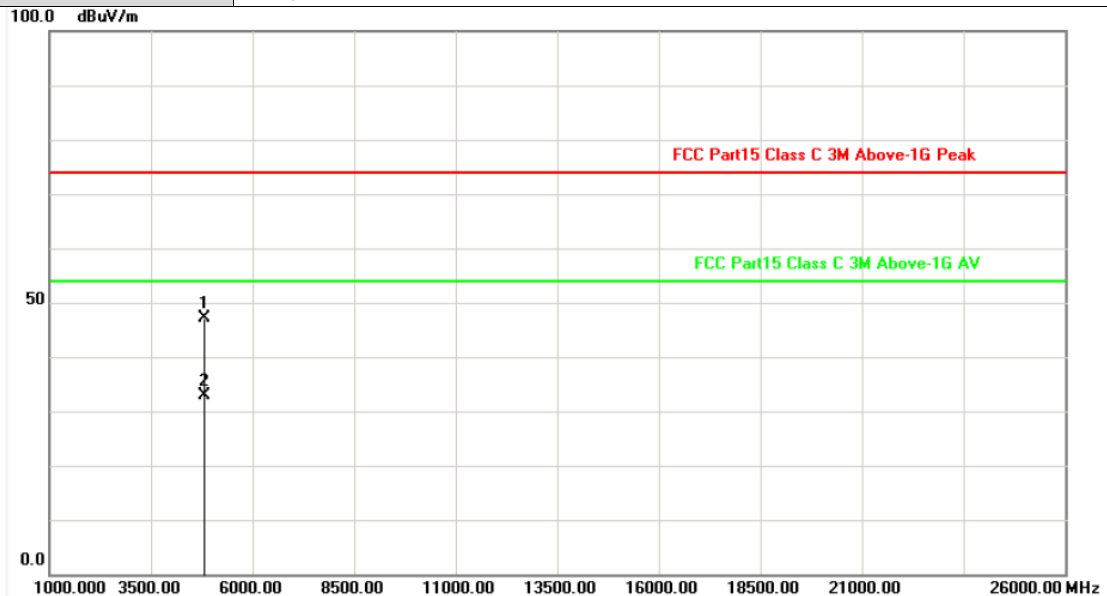

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4804.380	-3.32	50.46	47.14	74.00	-26.86	peak
2	4804.374	-3.32	36.21	32.89	54.00	-21.11	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

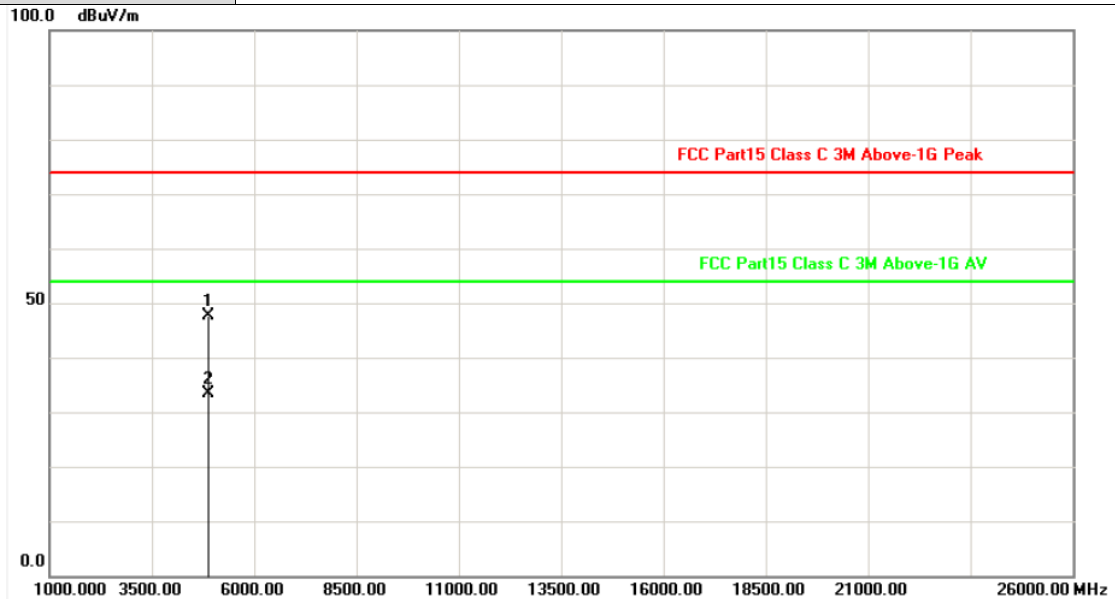

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.044	-3.12	50.78	47.66	74.00	-26.34	peak
2	4882.716	-3.11	36.37	33.26	54.00	-20.74	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

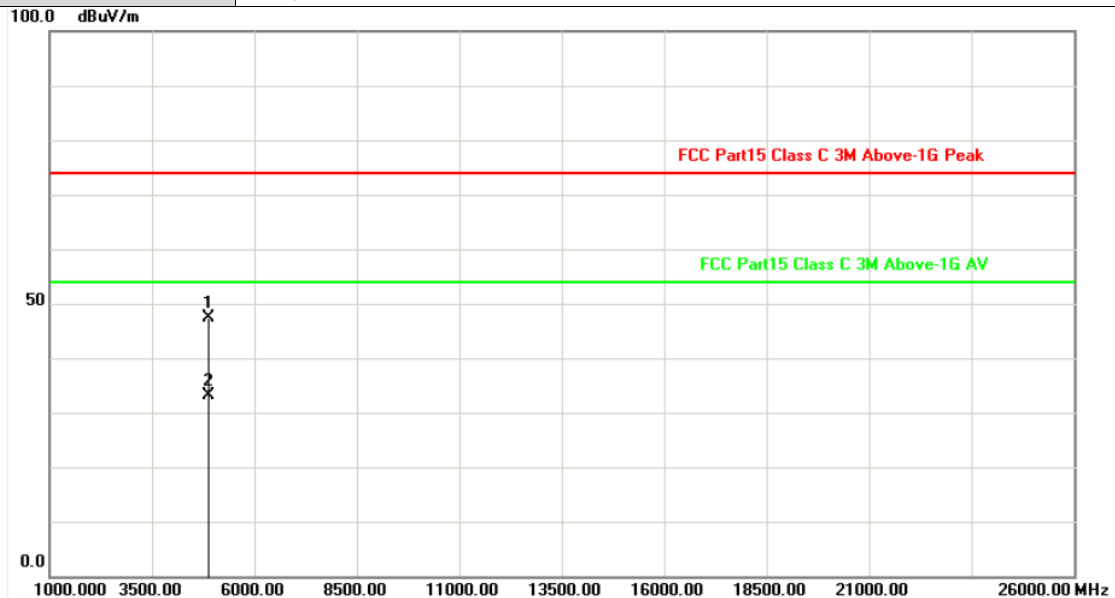

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4882.420	-3.12	50.42	47.30	74.00	-26.70	peak
2	4881.606	-3.12	36.36	33.24	54.00	-20.76	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

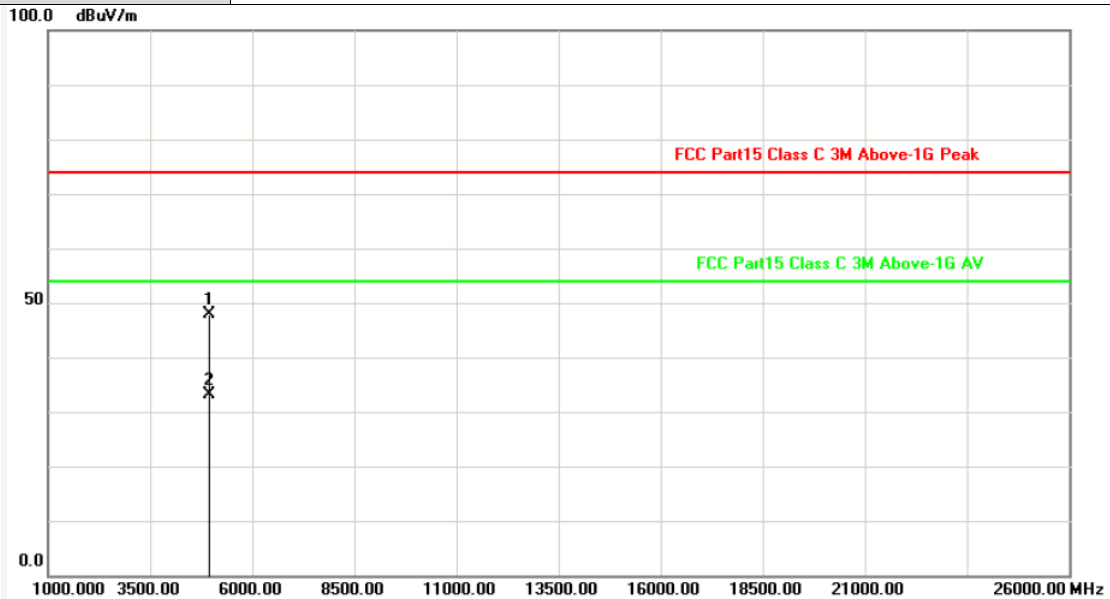

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.956	-2.92	50.85	47.93	74.00	-26.07	peak
2	4959.102	-2.92	36.15	33.23	54.00	-20.77	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

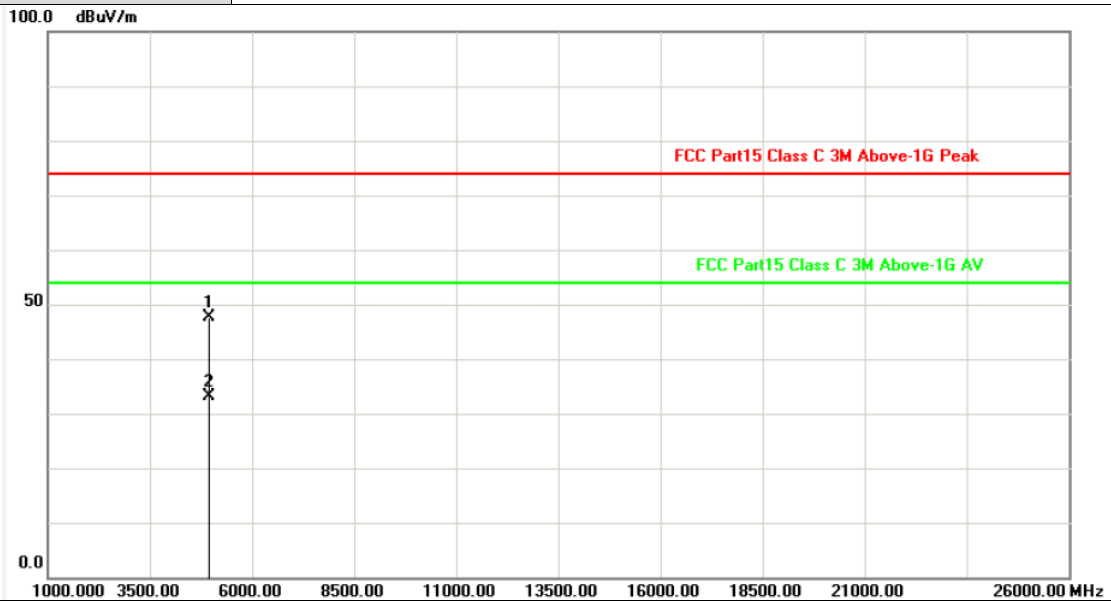

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4960.444	-2.92	50.43	47.51	74.00	-26.49	peak
2	4959.848	-2.92	36.13	33.21	54.00	-20.79	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

3.3. Band Edge Emissions


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Conducted band edge limit: The highest point of the operating frequency waveform down 20dB

Test Configuration

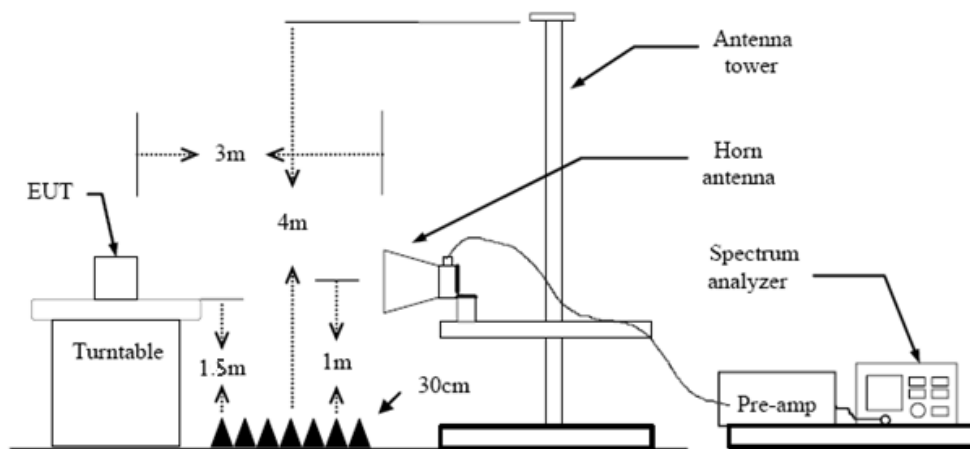

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
RBW=1MHz, VBW=10Hz with PEAK Detector for Average Value.


Test Mode


Please refer to the clause 2.3.


Test Results





(1) Radiation Test

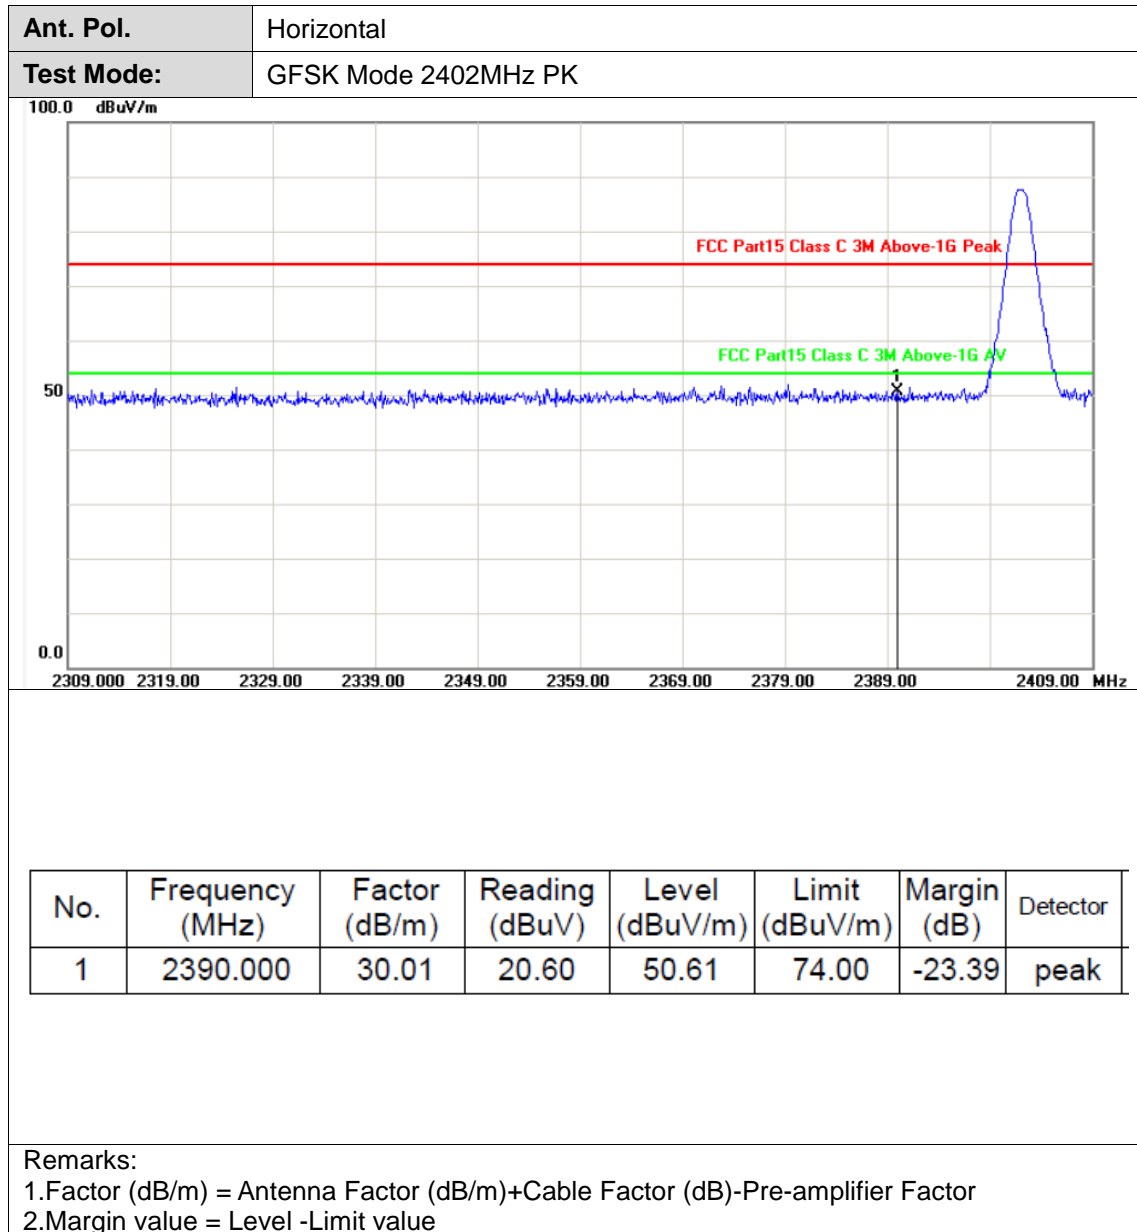


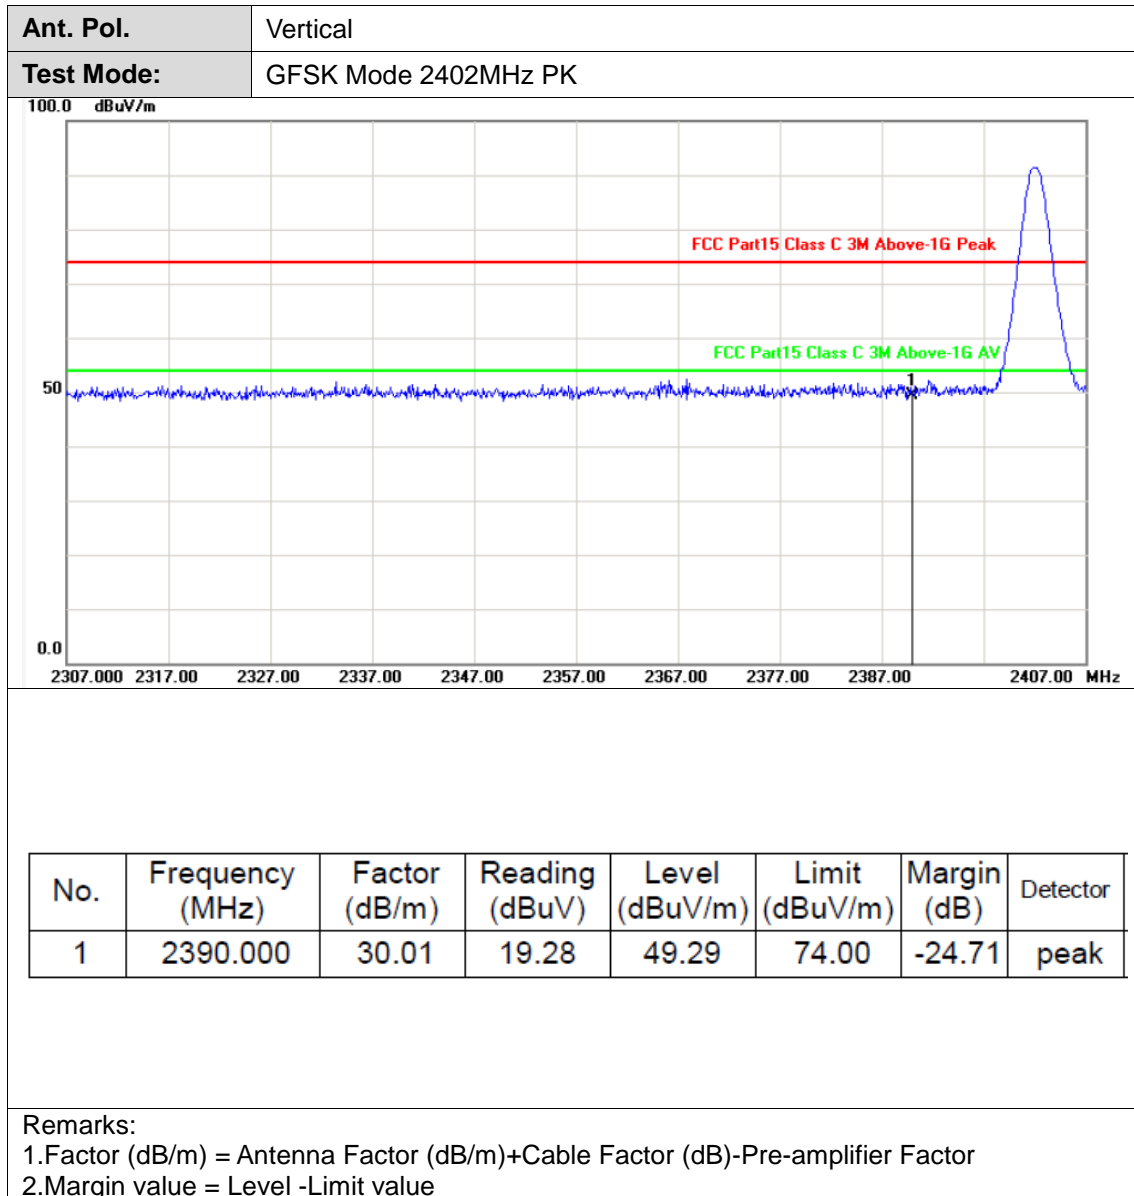


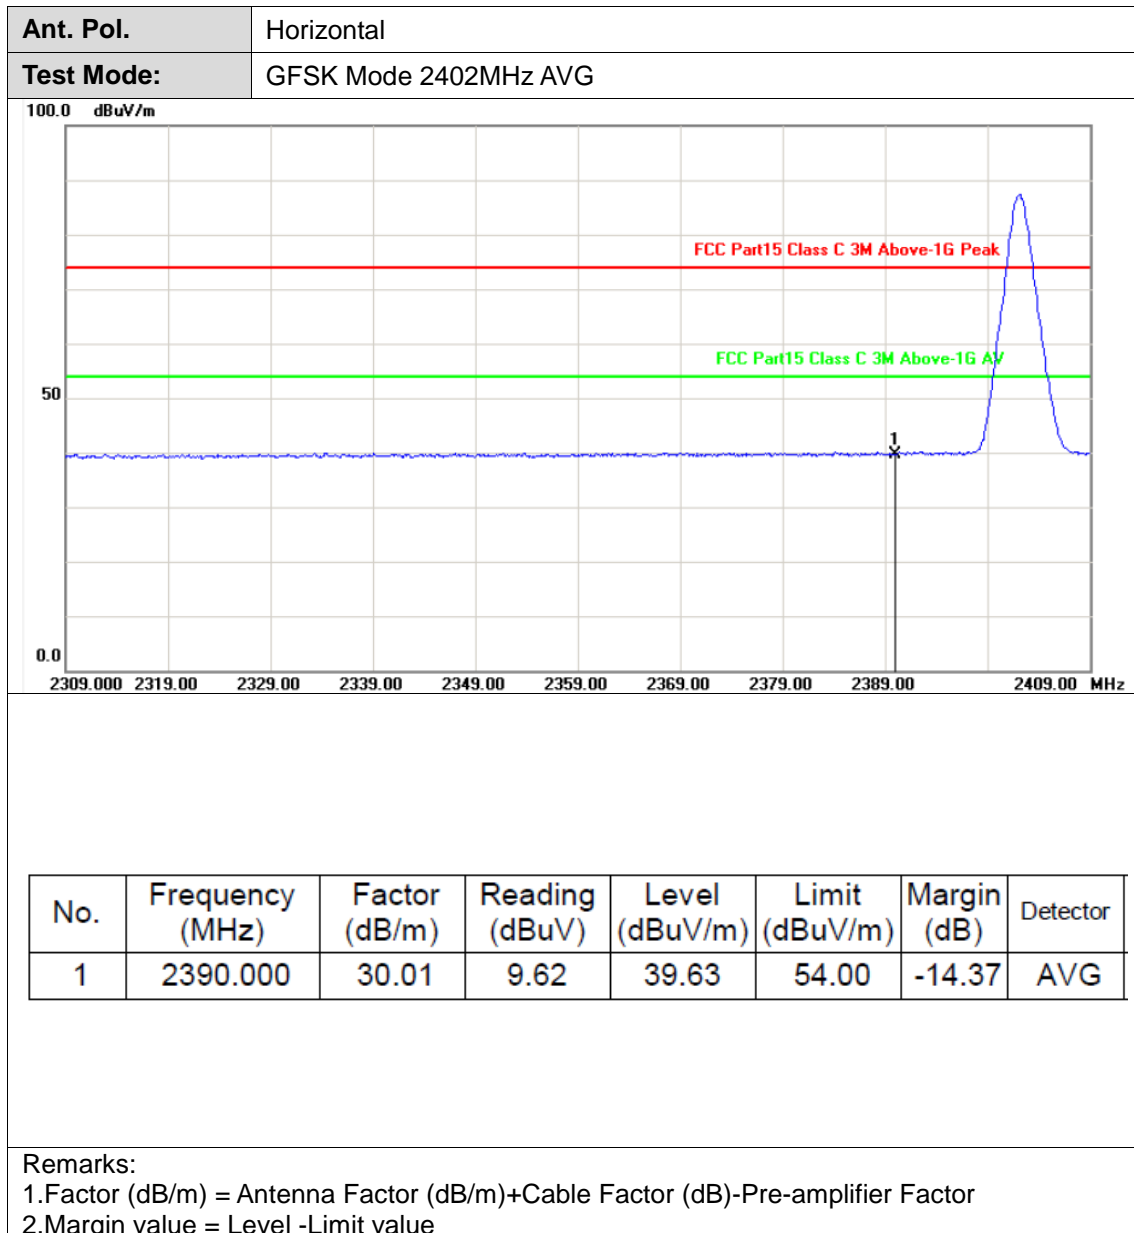


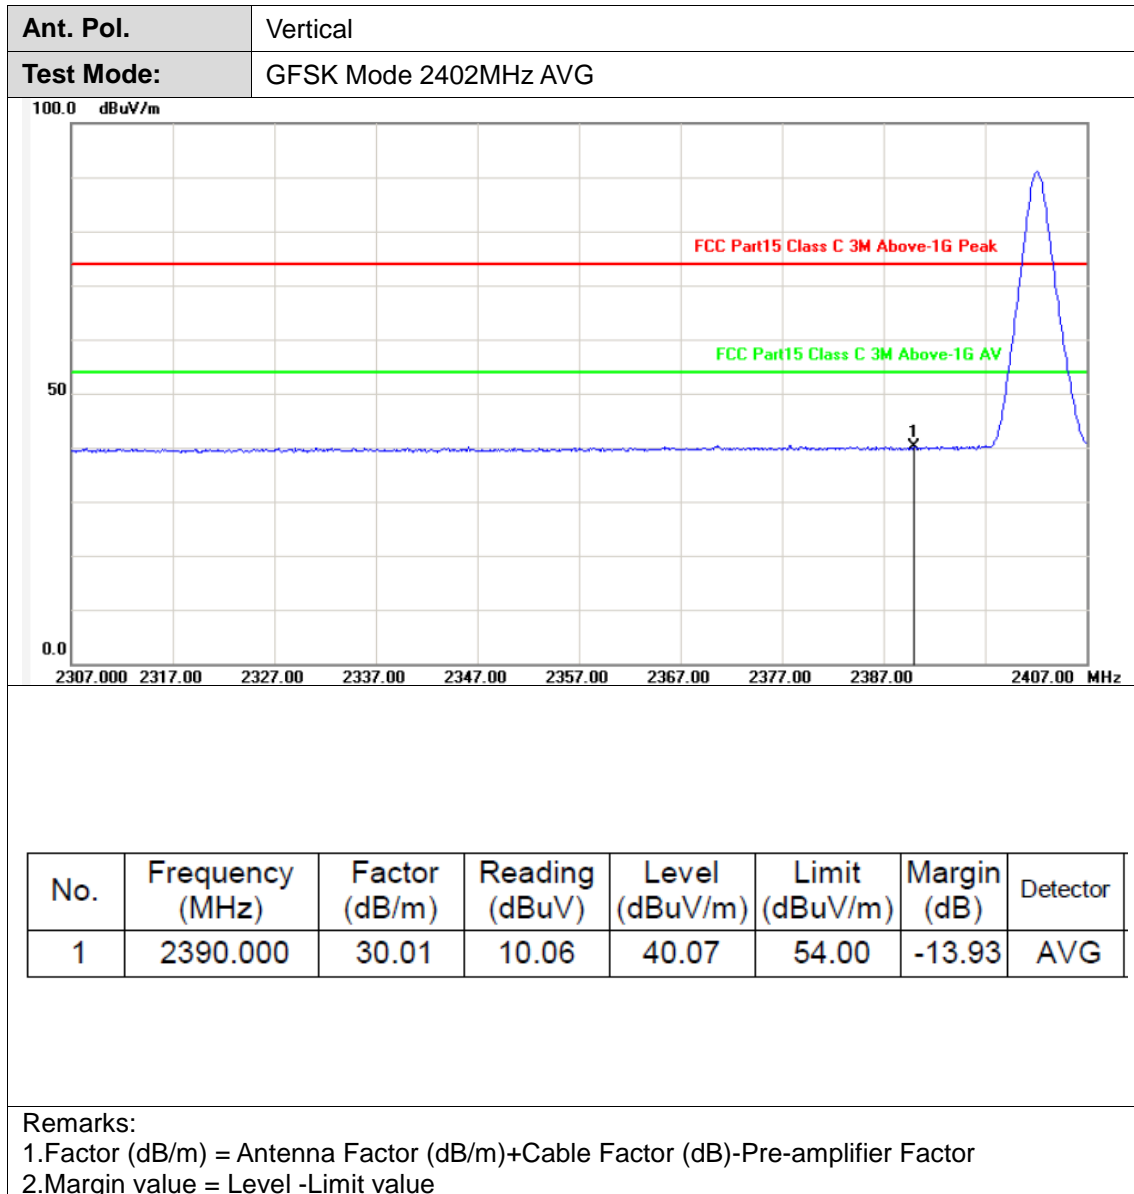


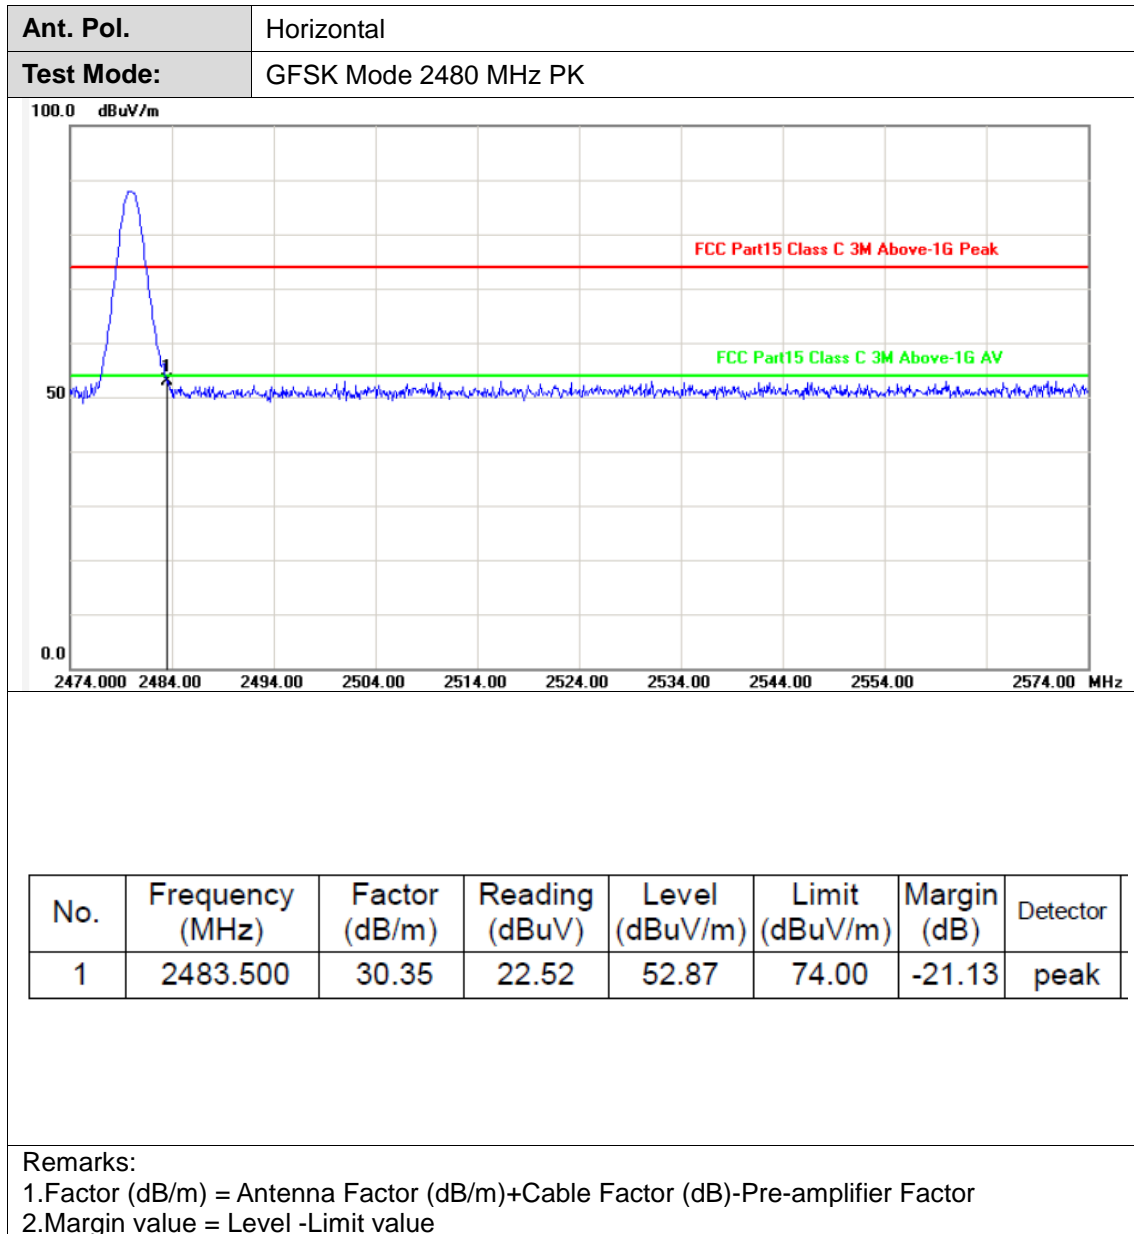


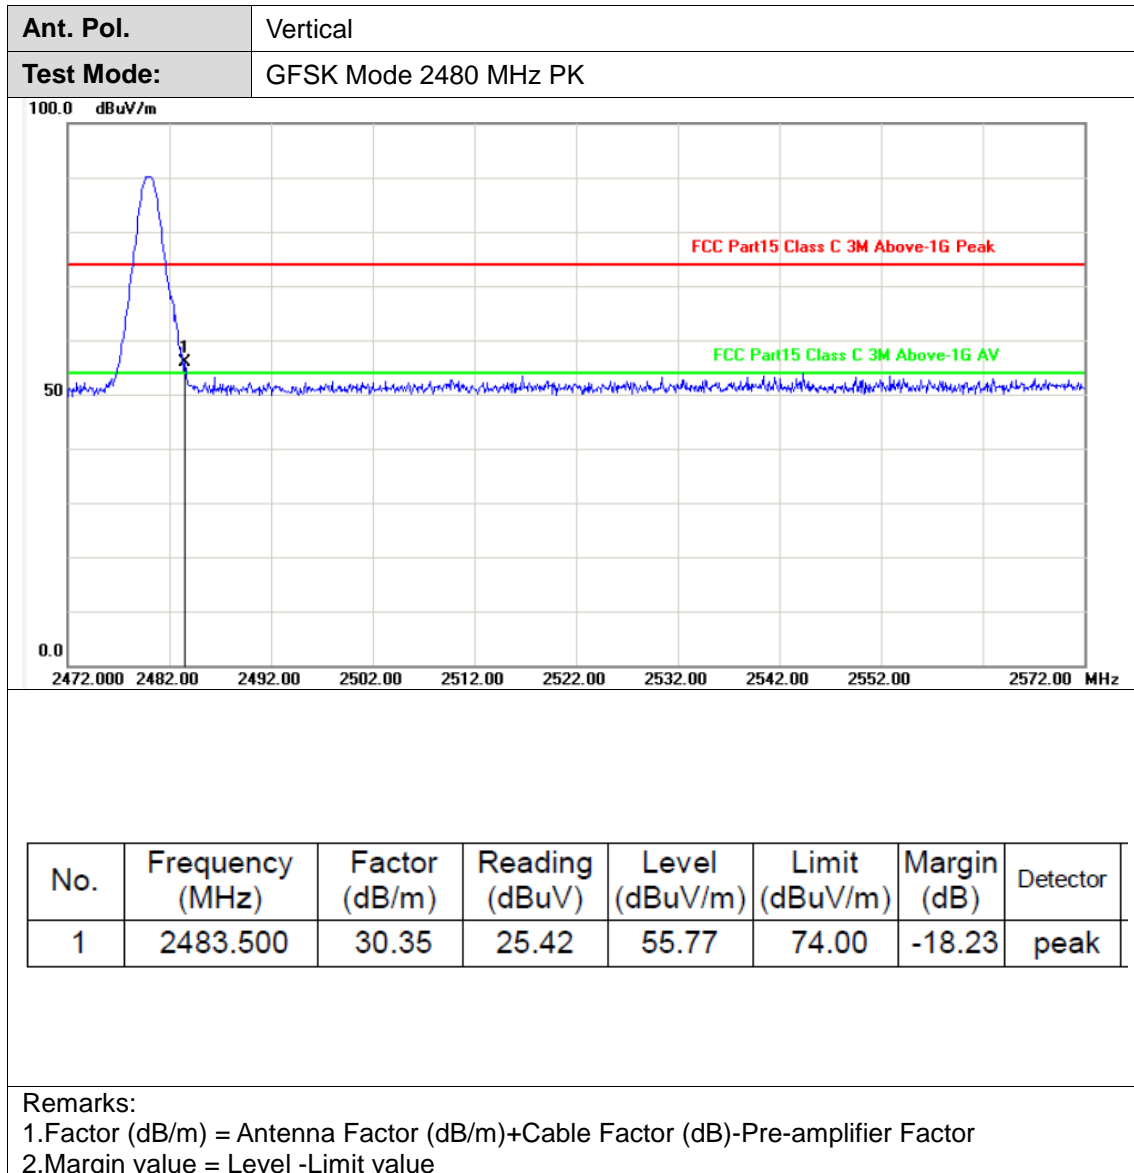


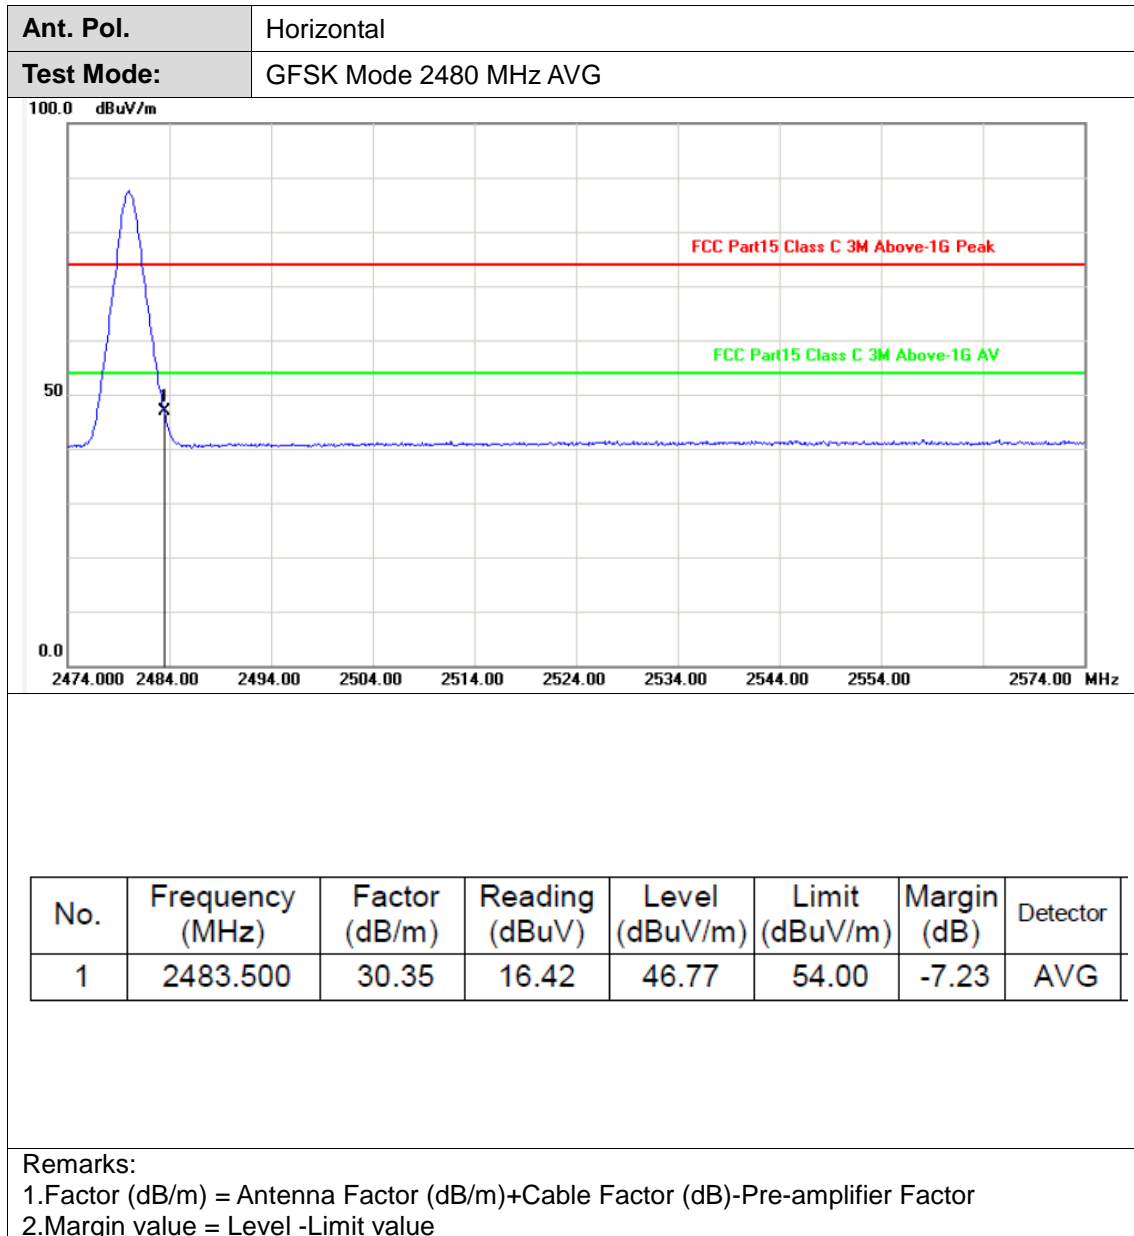


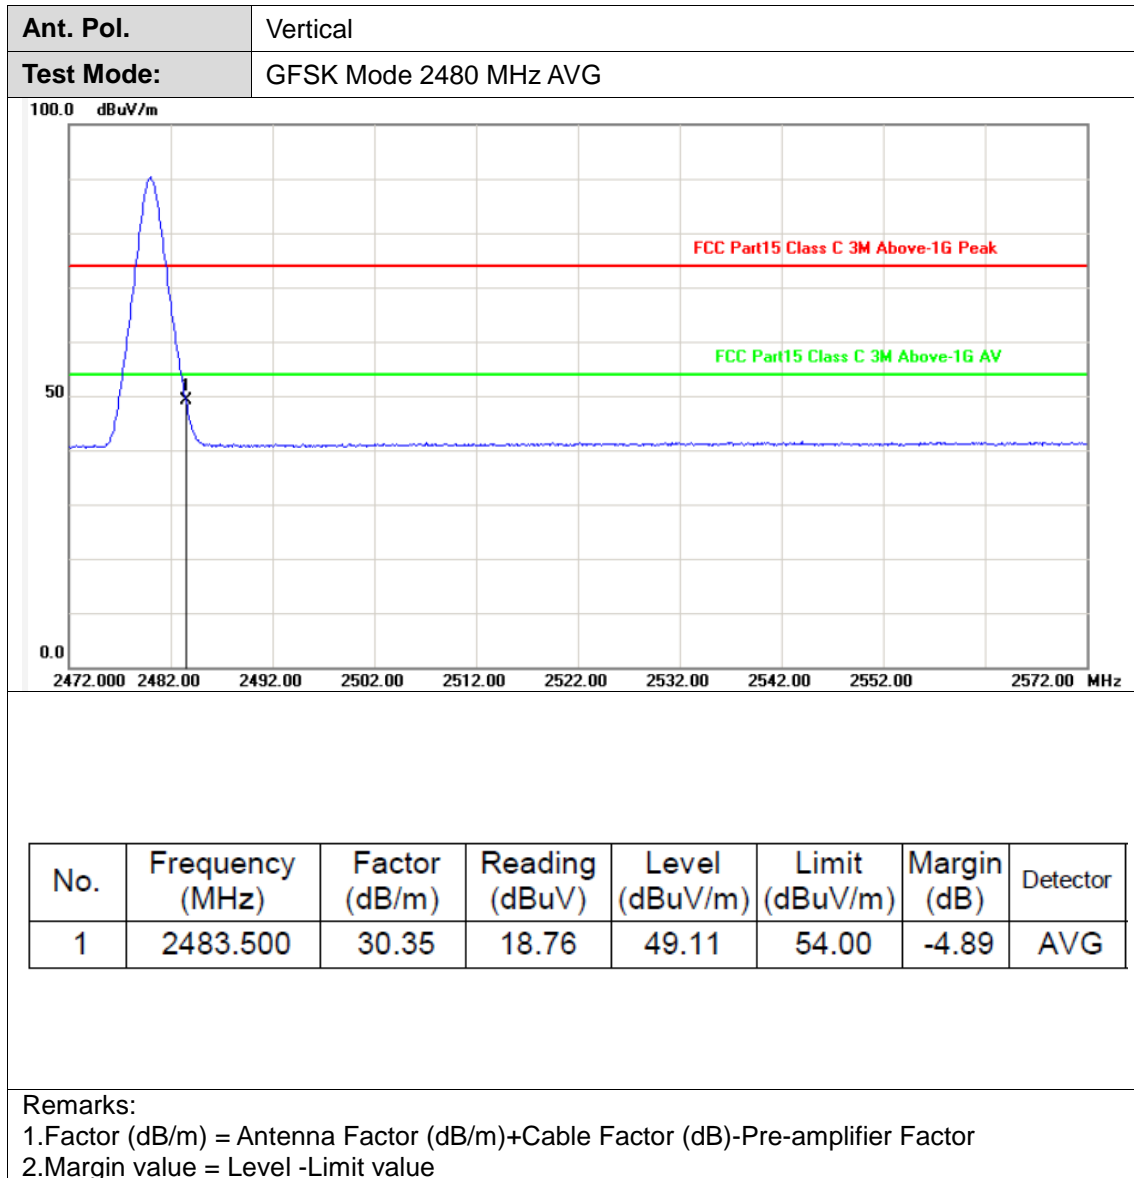


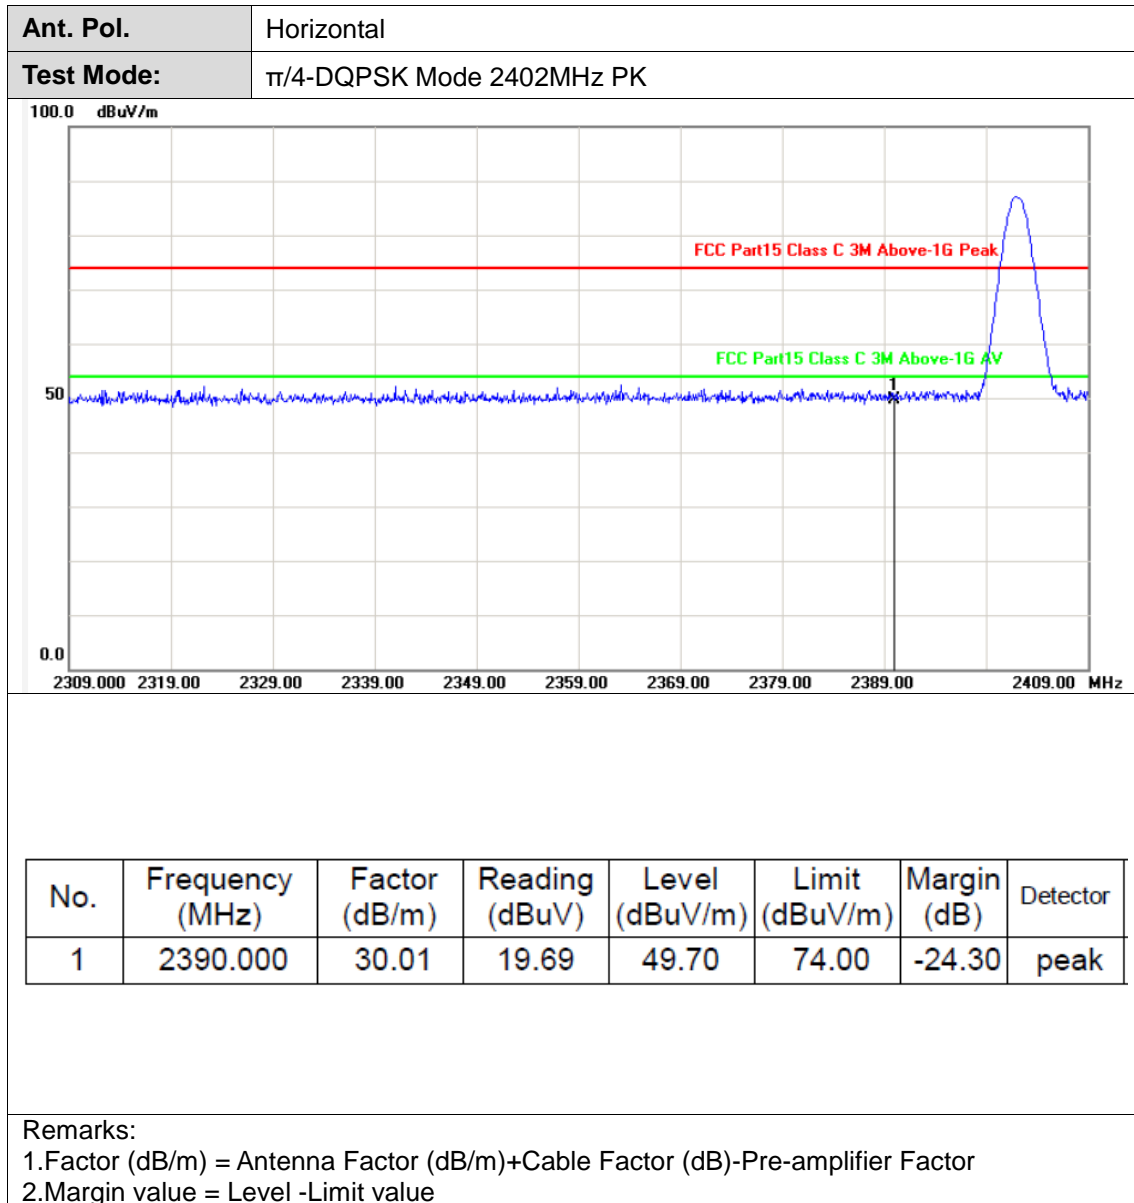


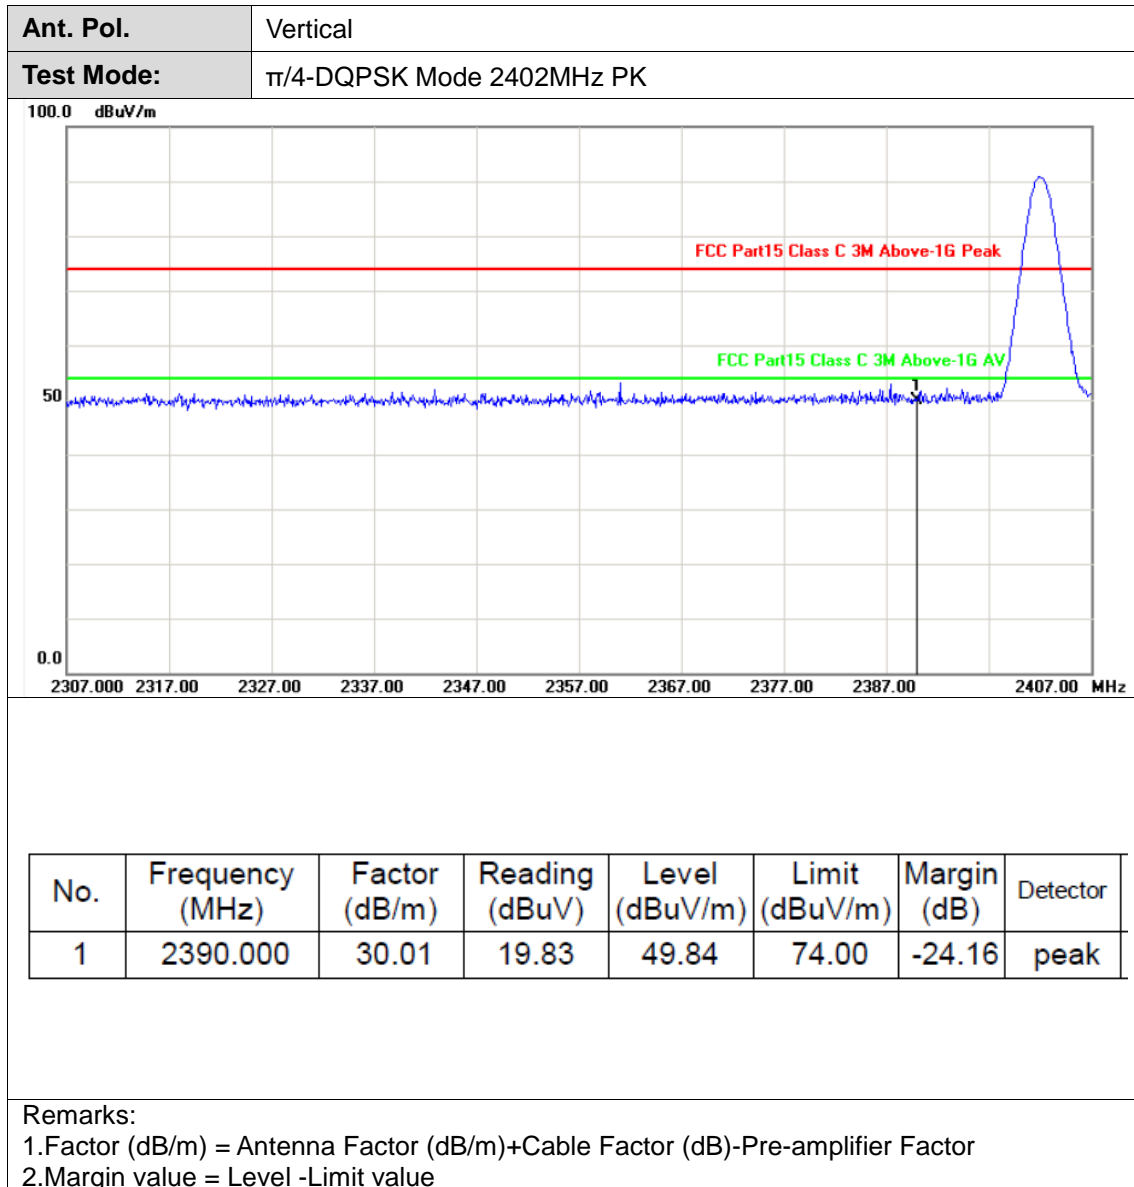


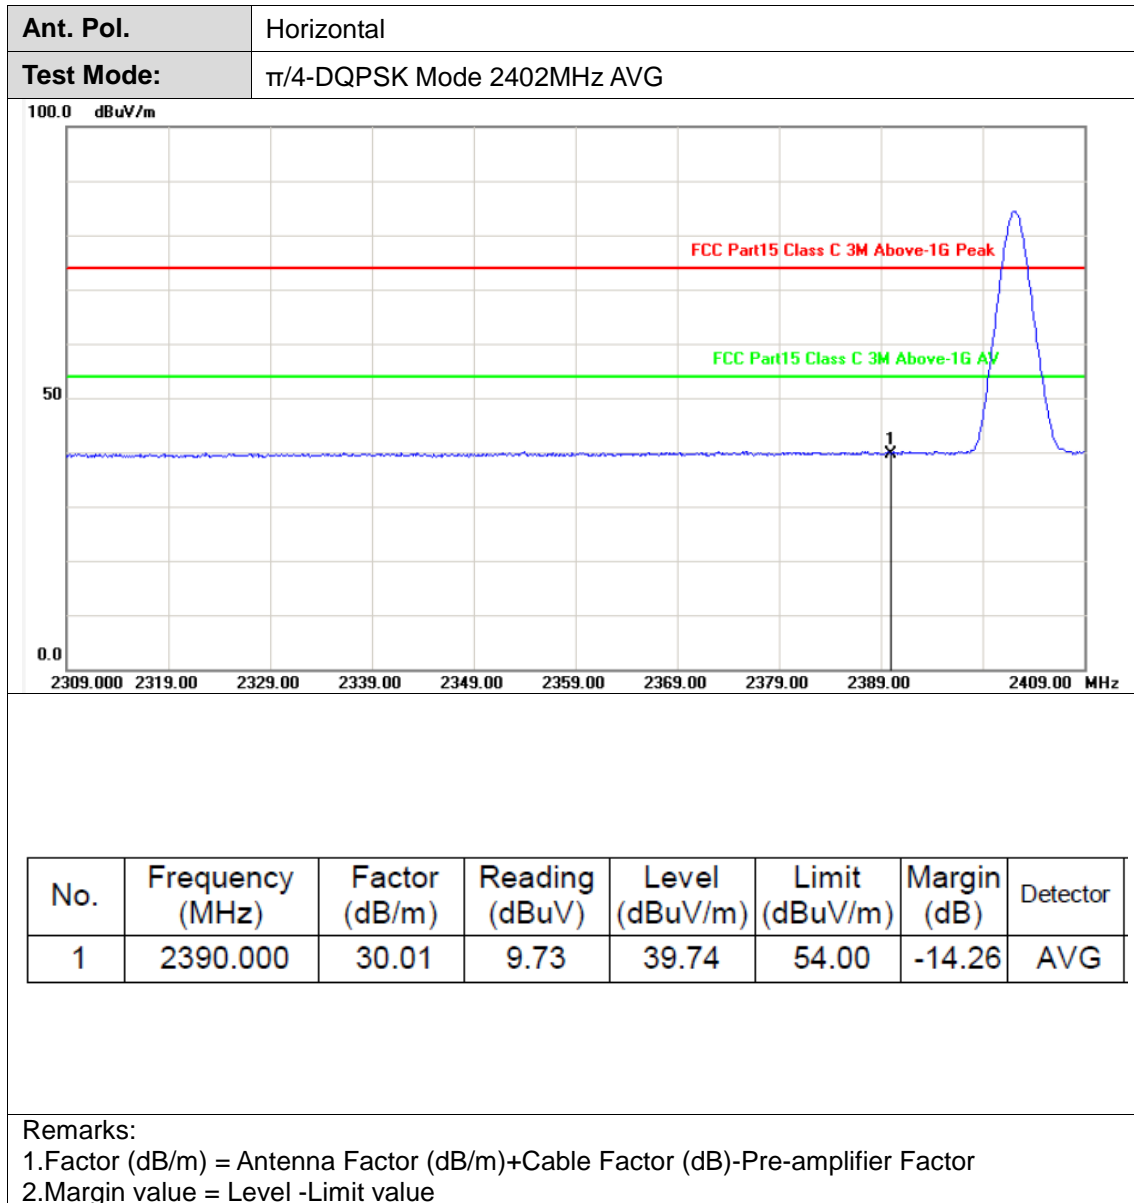


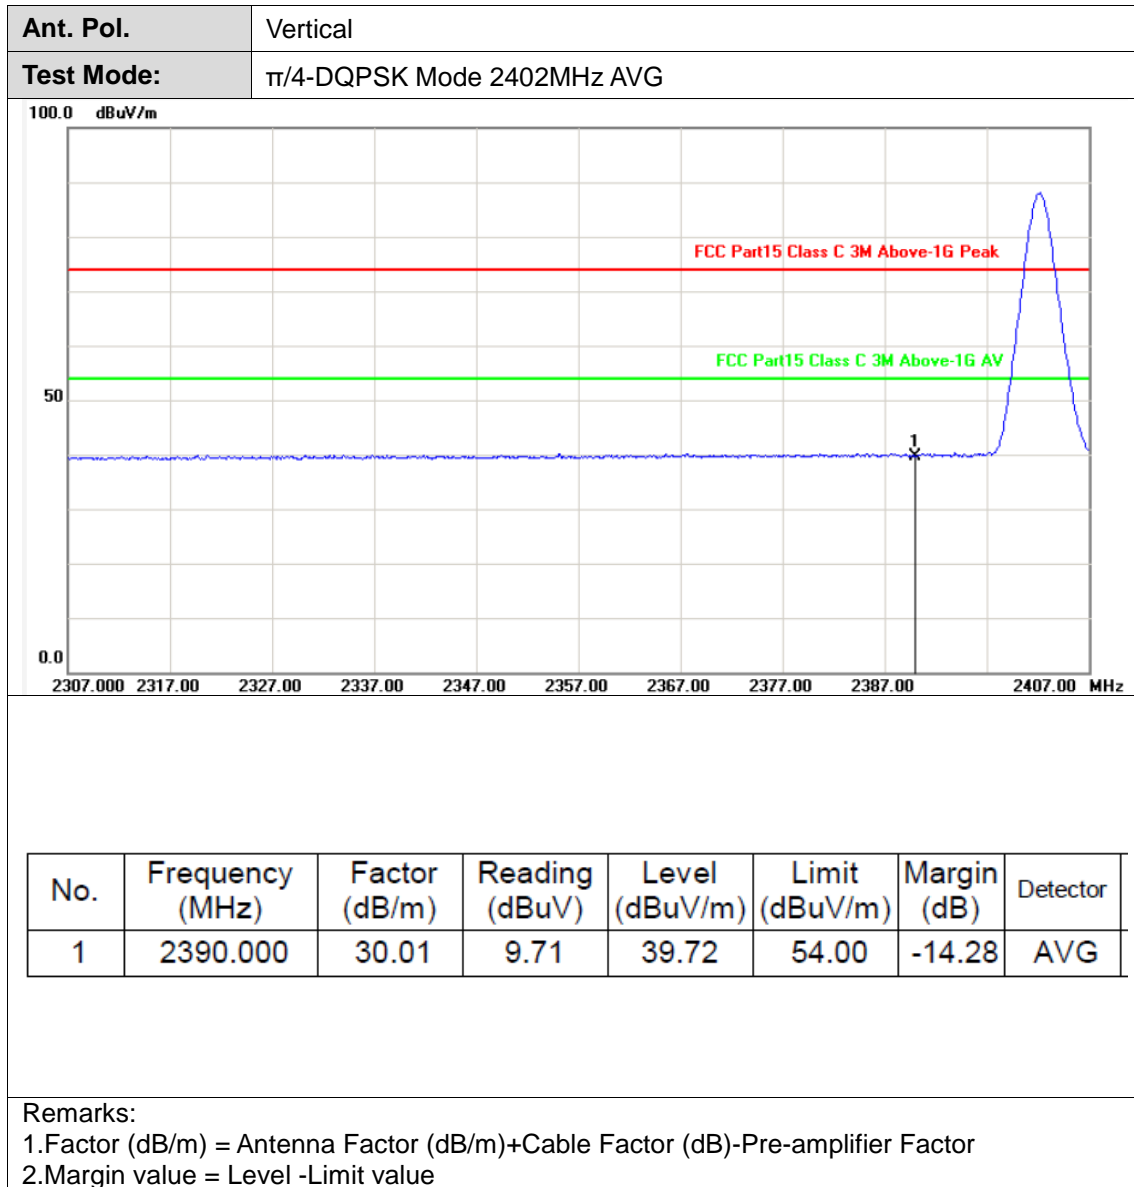


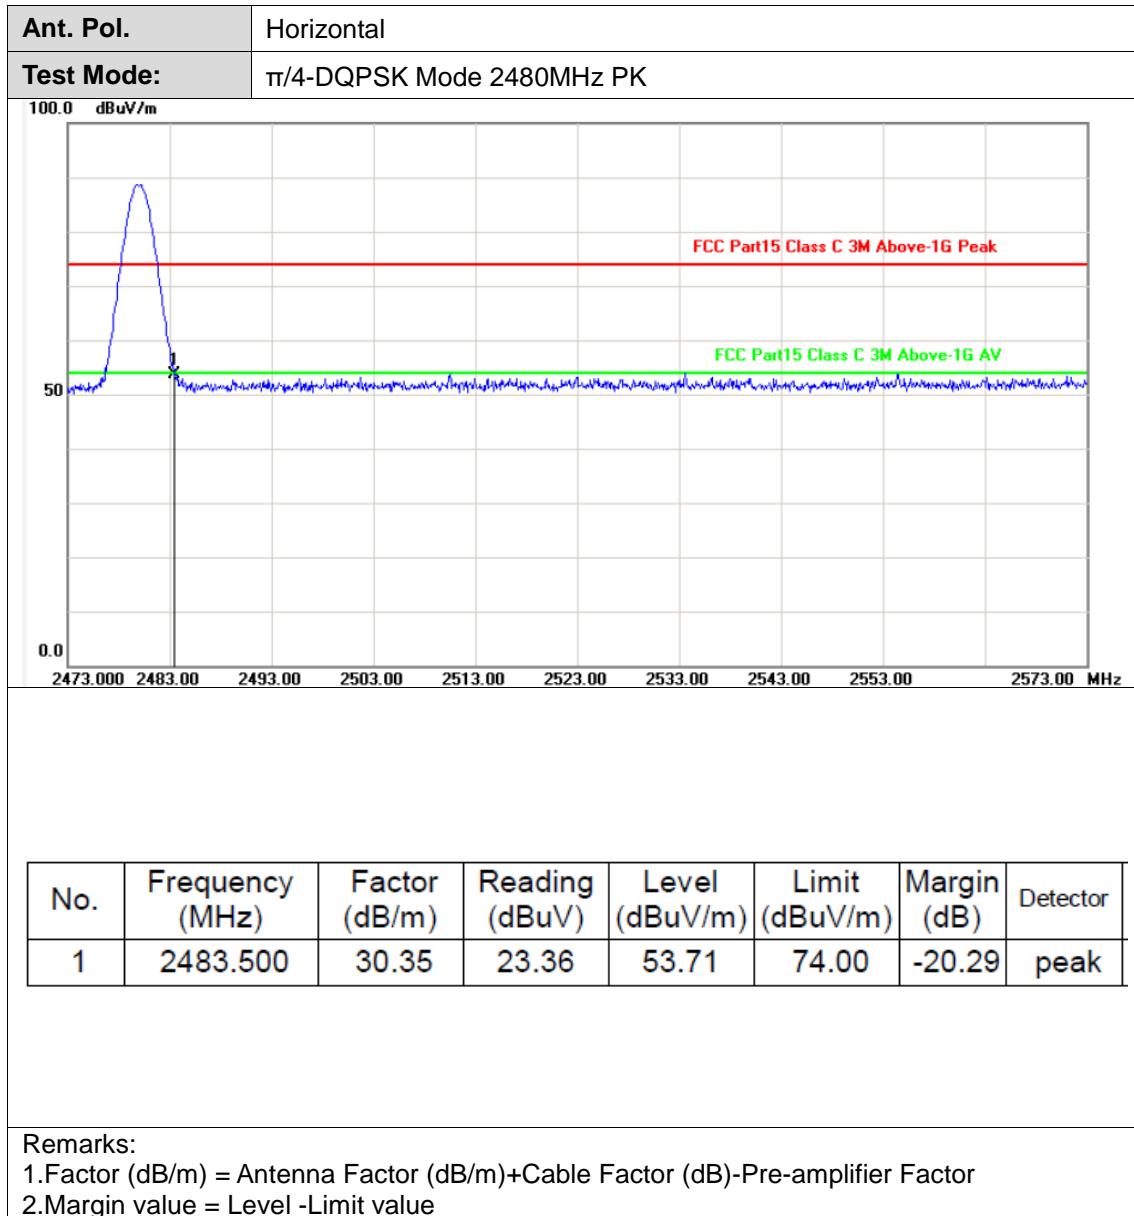


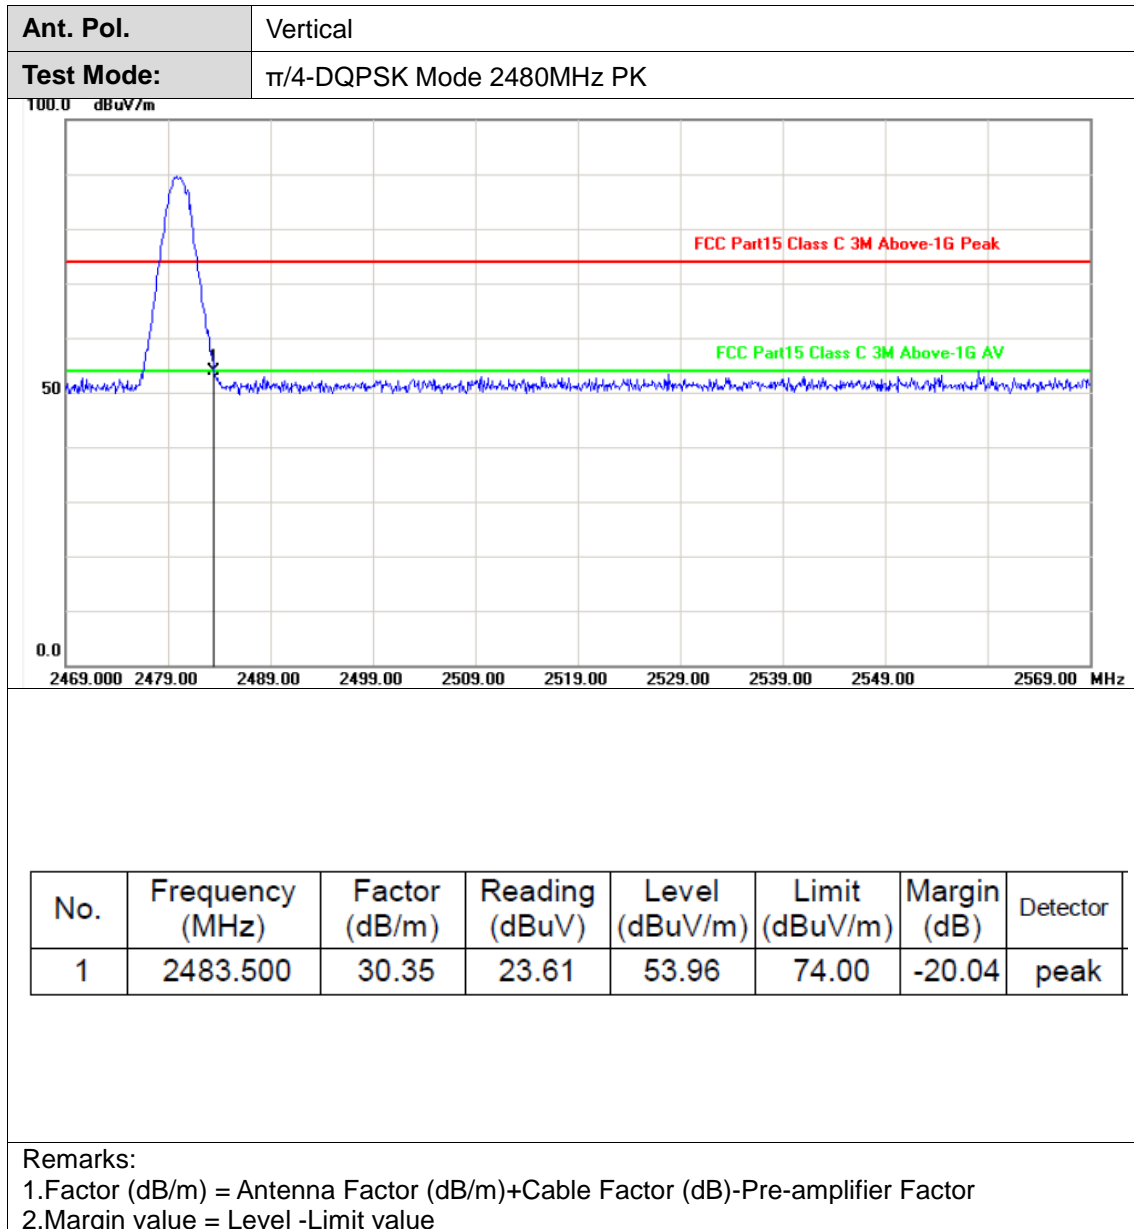


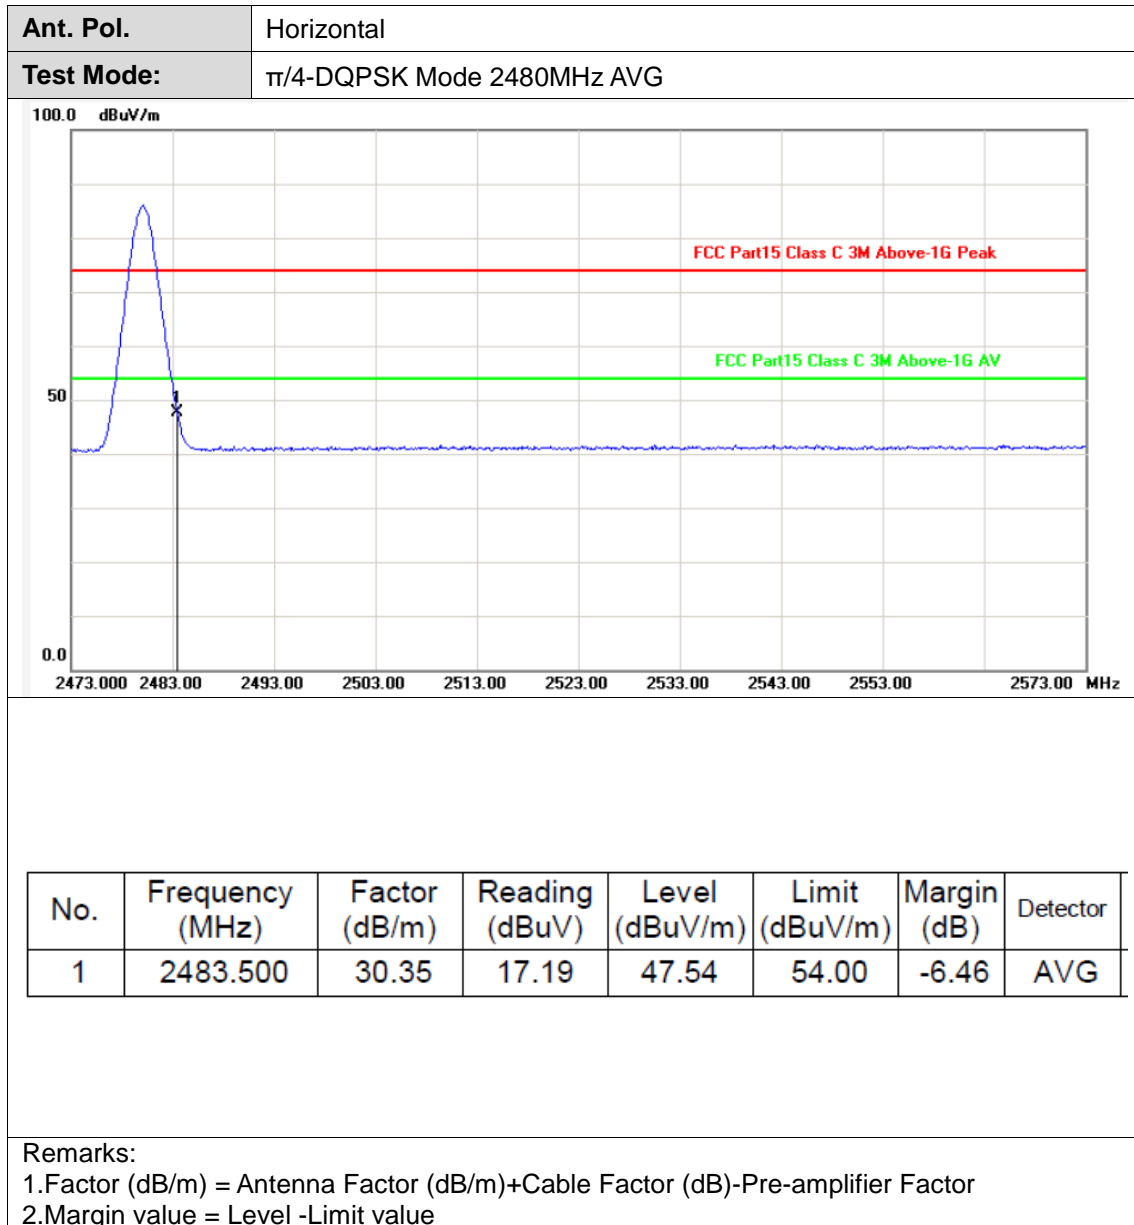


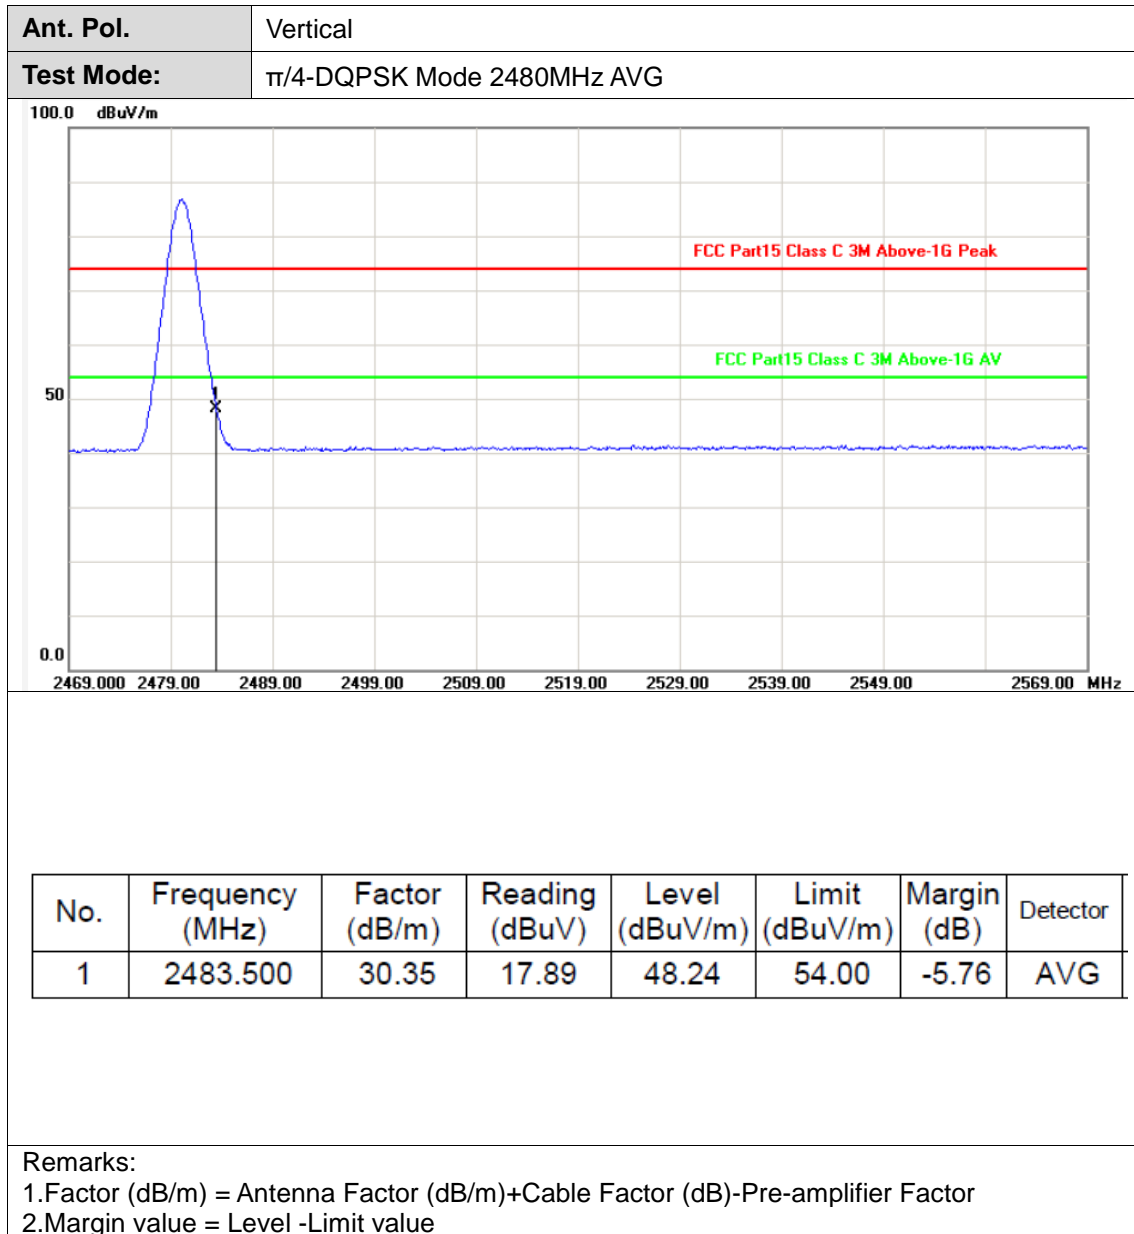


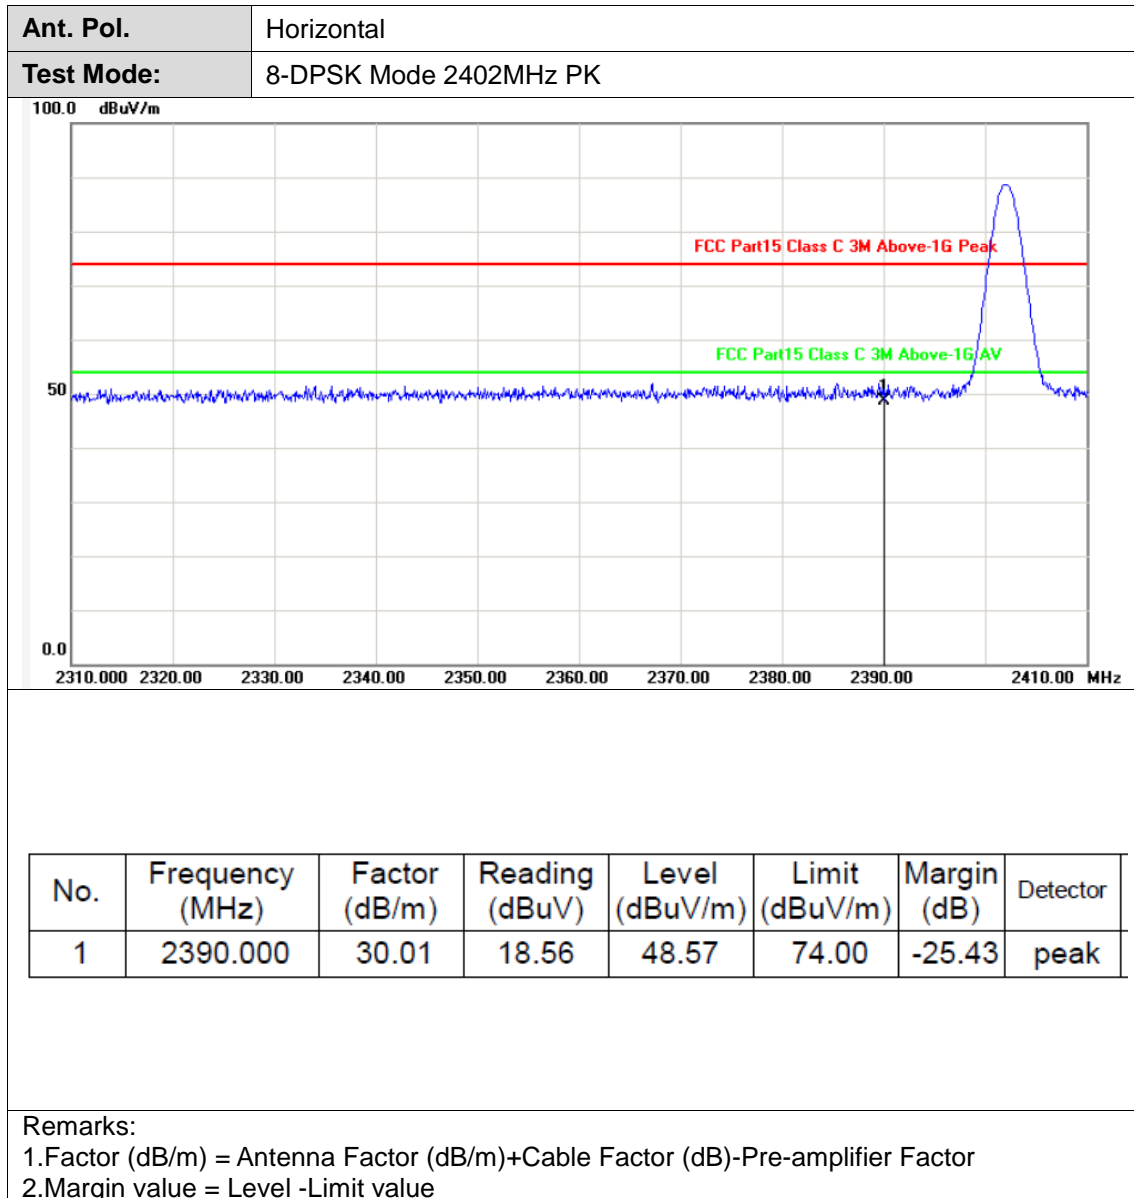


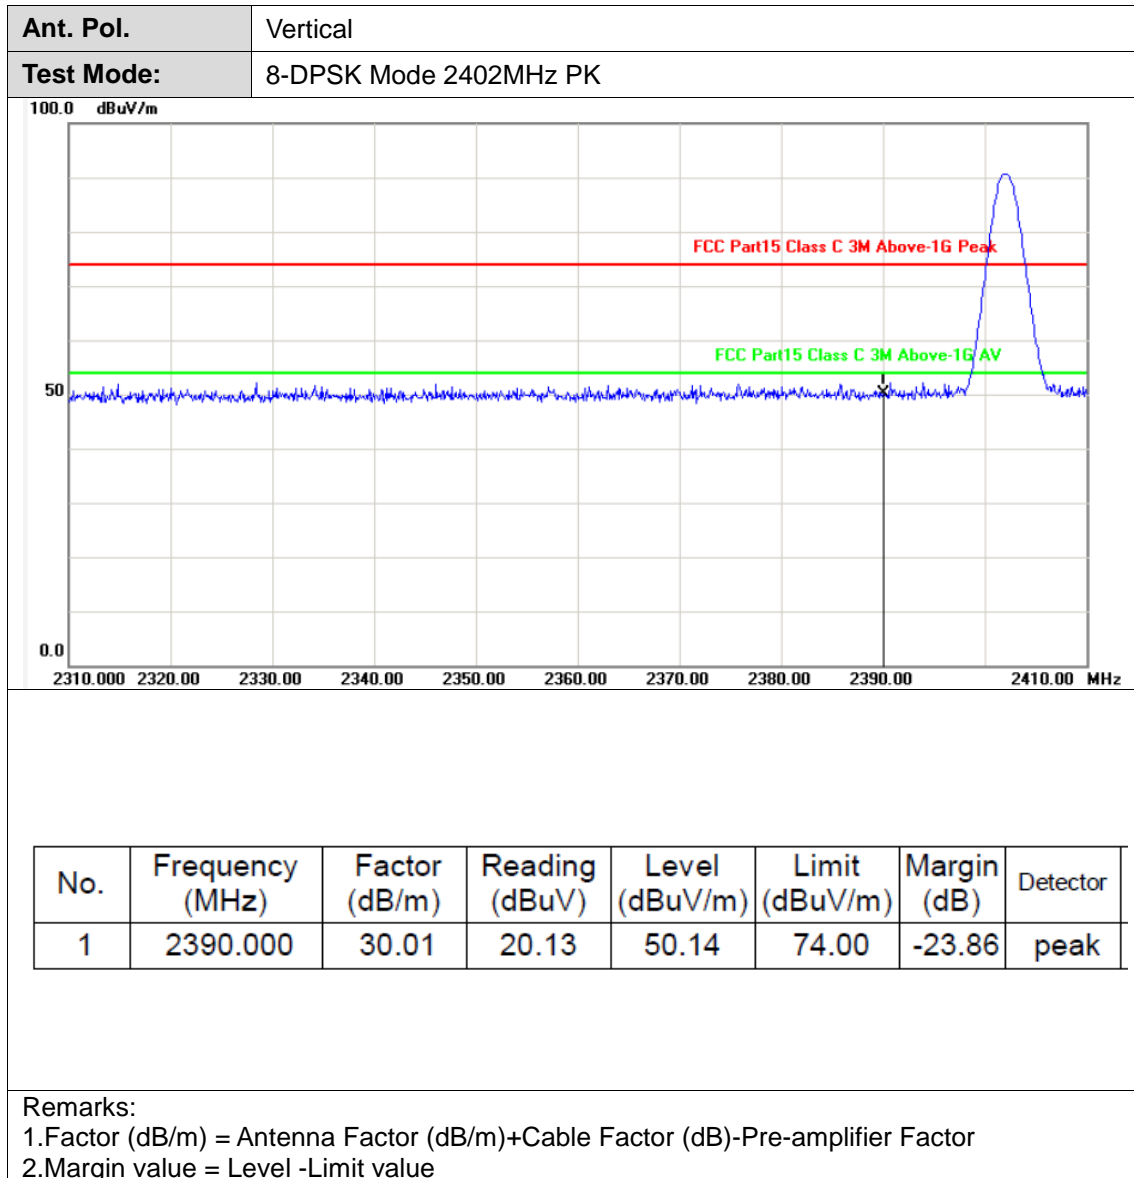


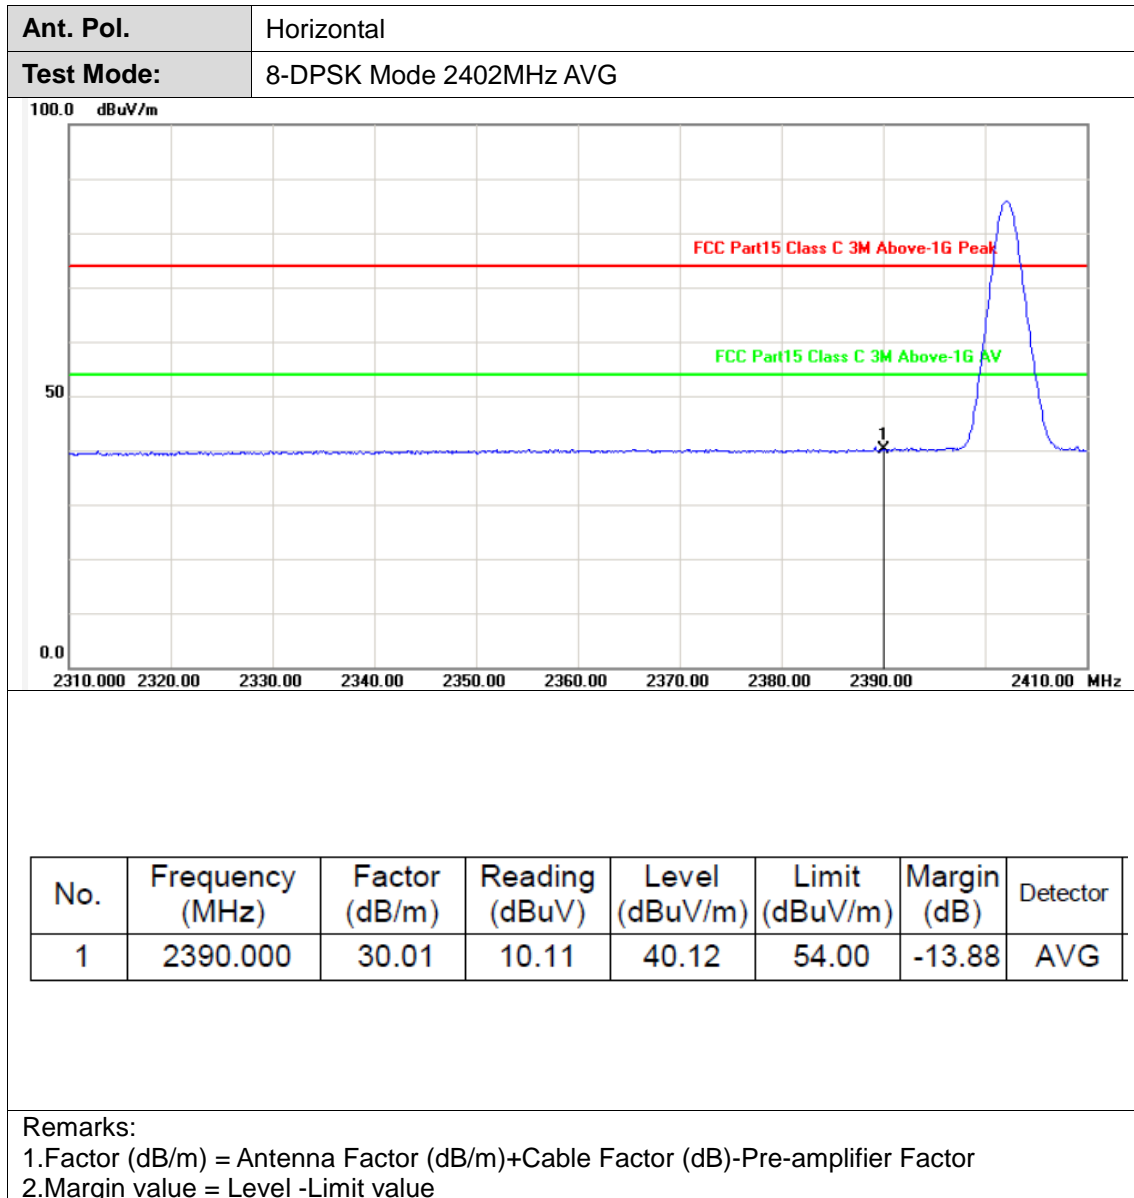


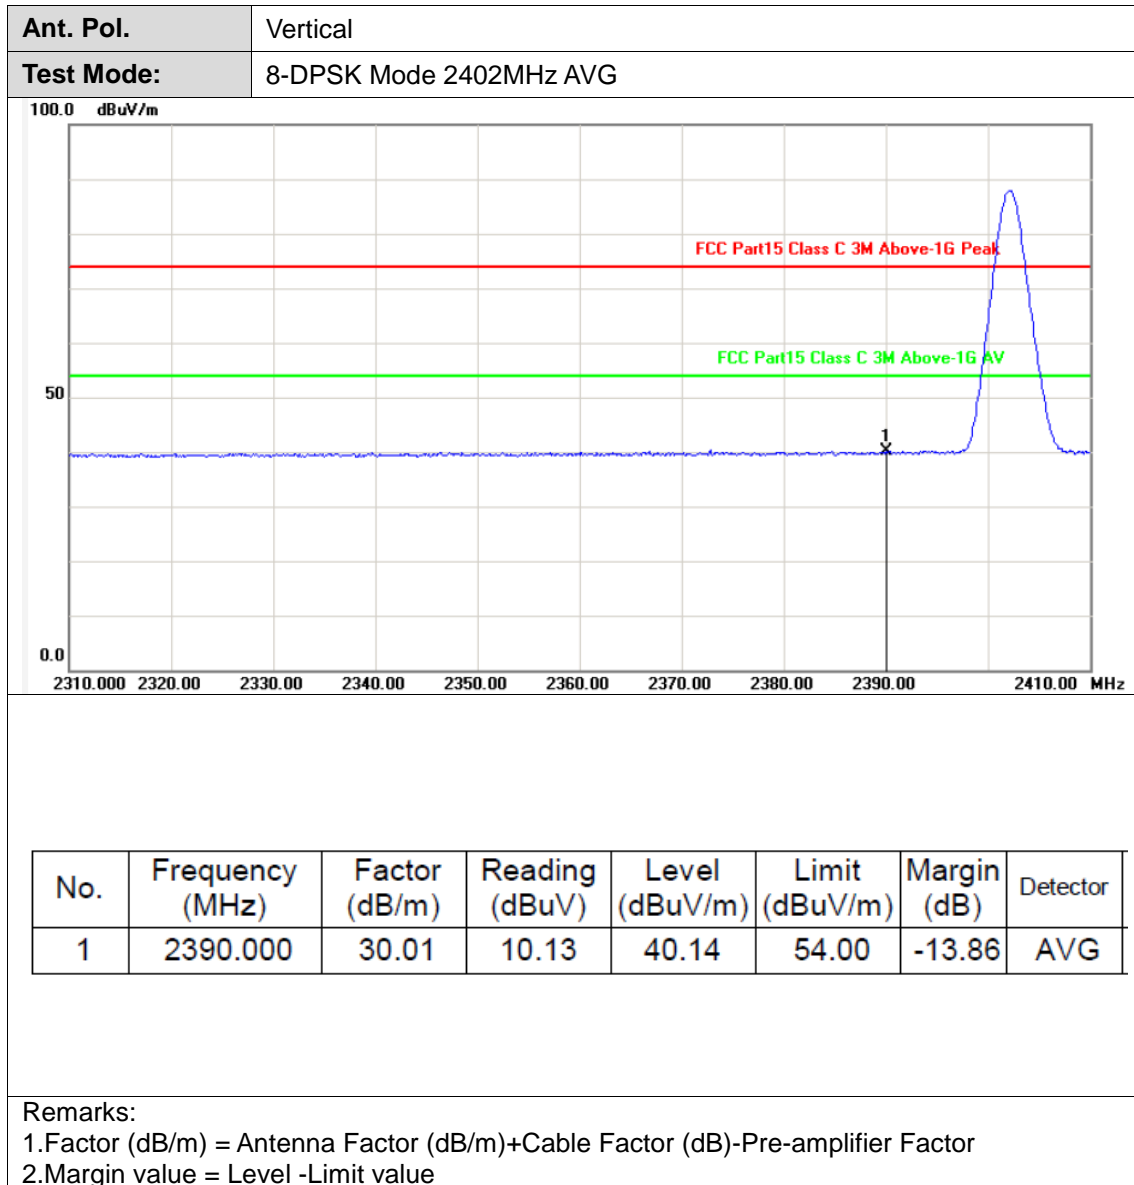

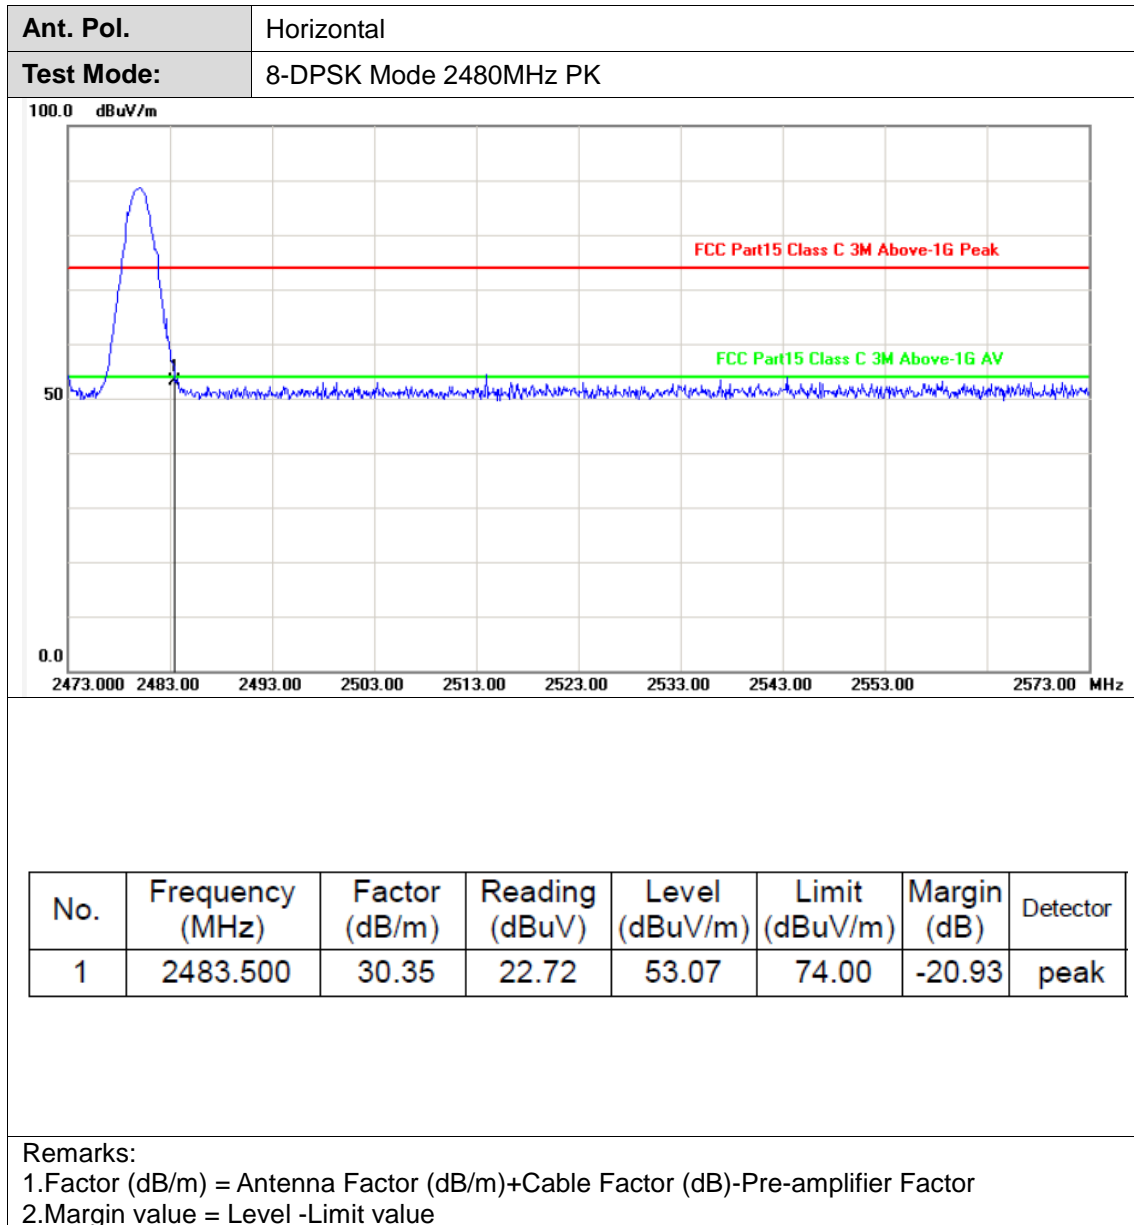

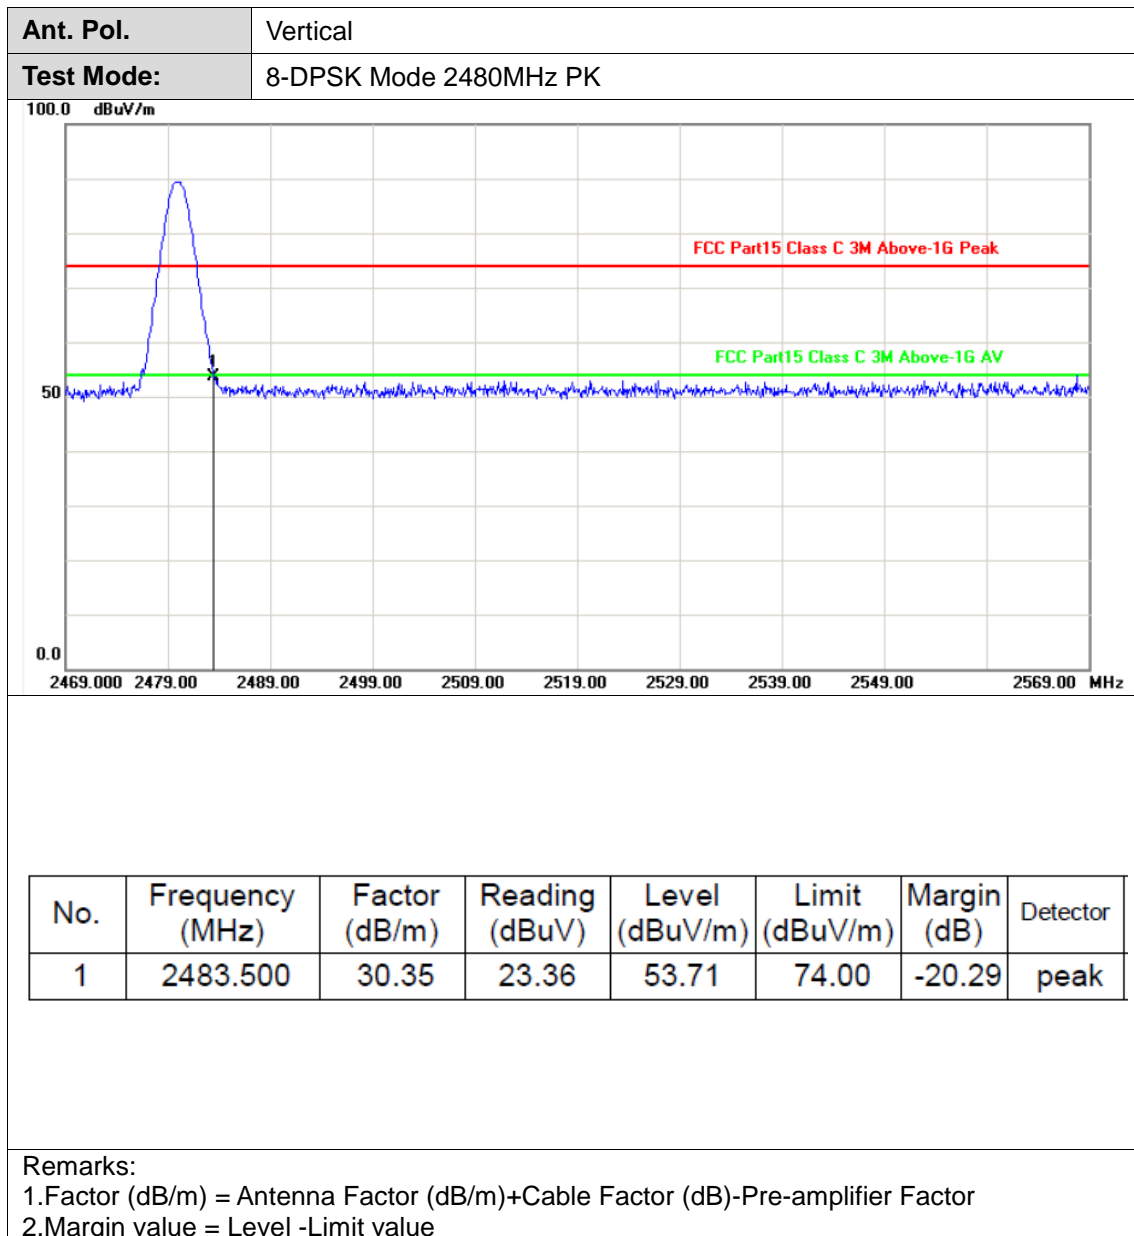

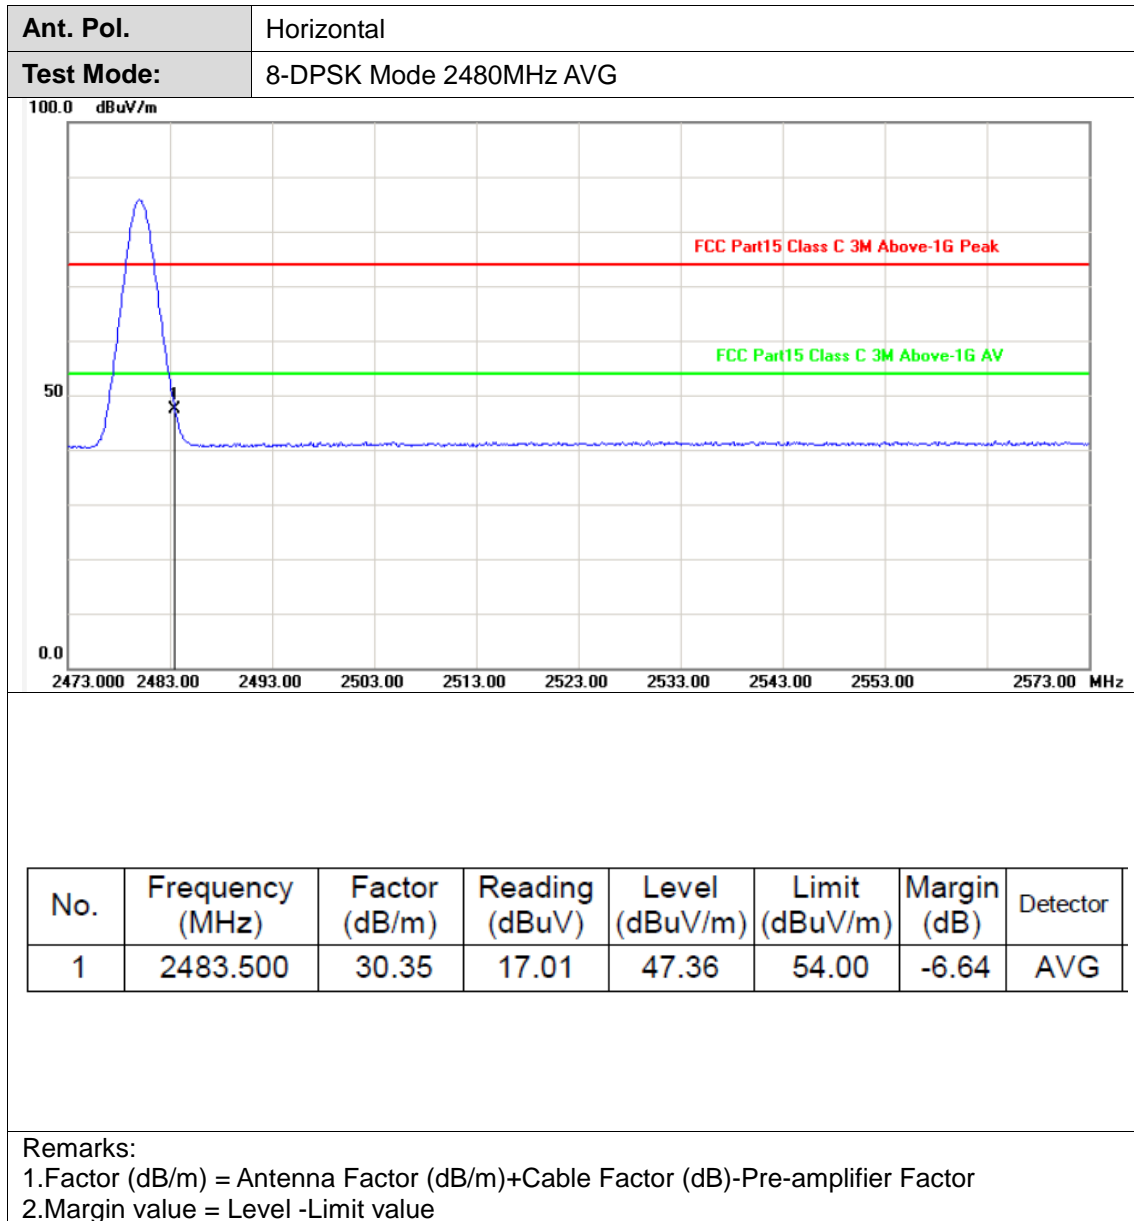

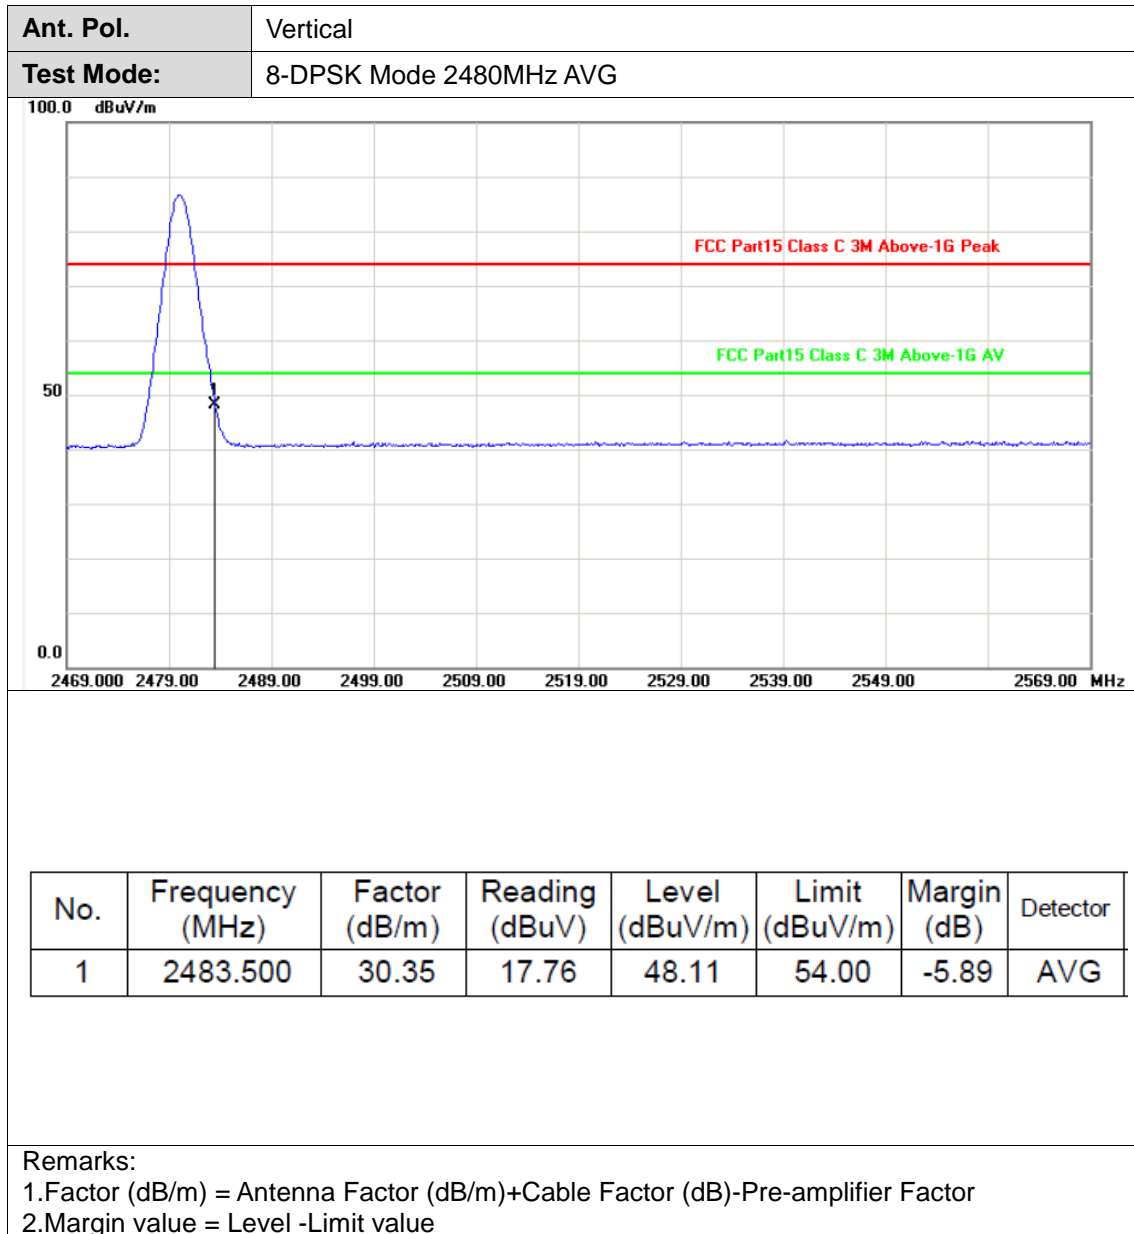




(2) Conducted Test

Test Mode: GFSK Mode 2402MHz

CH00

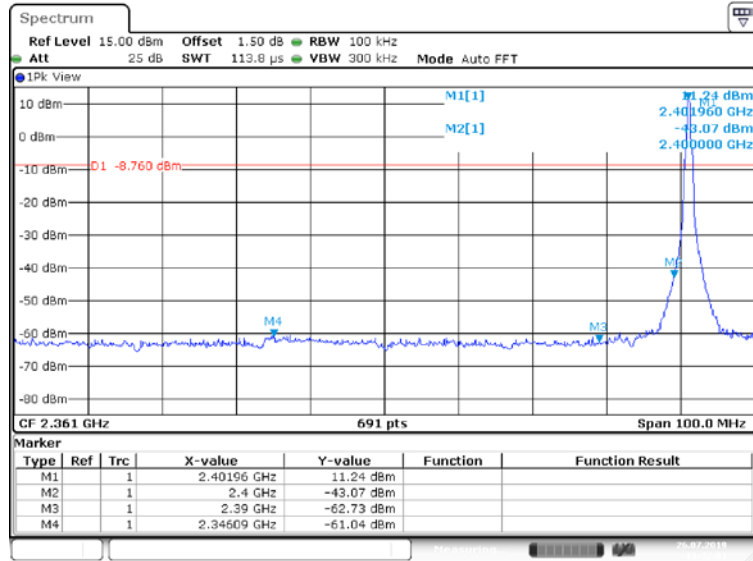


Date: 26.JUL.2019 11:32:01

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.00	-43.07	-8.760	Pass
2390.00	-62.73		
2346.09	-61.04		

Test Mode: GFSK Mode 2480 MHz

CH78

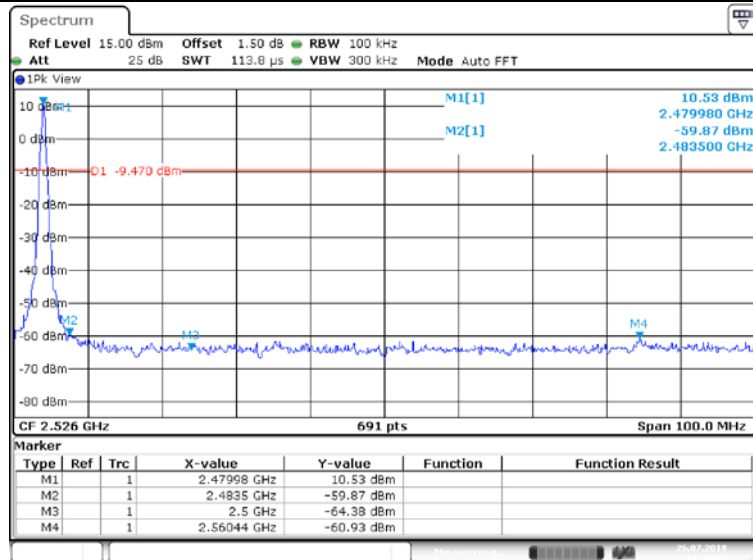

Date: 26.JUL.2019 11:45:42

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.50	-59.87	-9.470	Pass
2500.00	-64.38		
2560.44	-60.93		

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011


Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



Test Mode: GFSK Hopping Mode


CH00

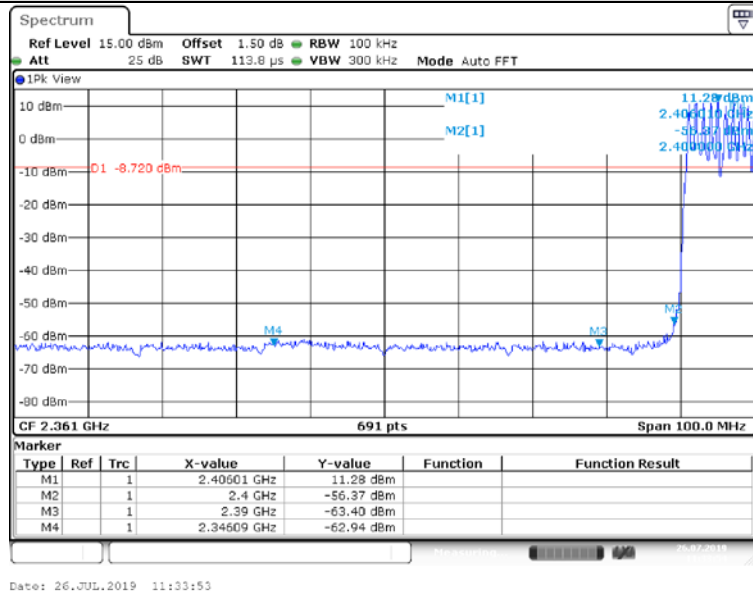



Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.00	-56.37	-8.720	Pass
2390.00	-63.40		
2346.09	-62.94		



Test Mode: GFSK Hopping Mode

CH78

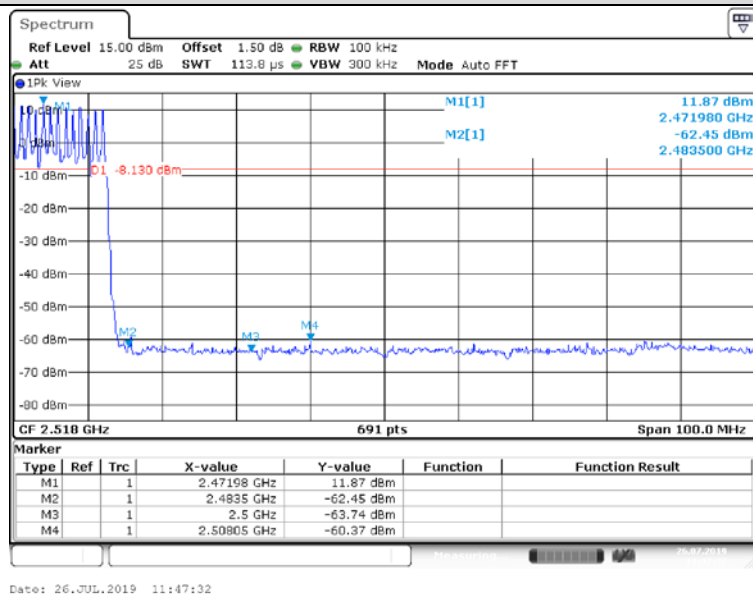

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.50	-62.45	-8.130	Pass
2500.00	-63.74		
2508.05	-60.37		

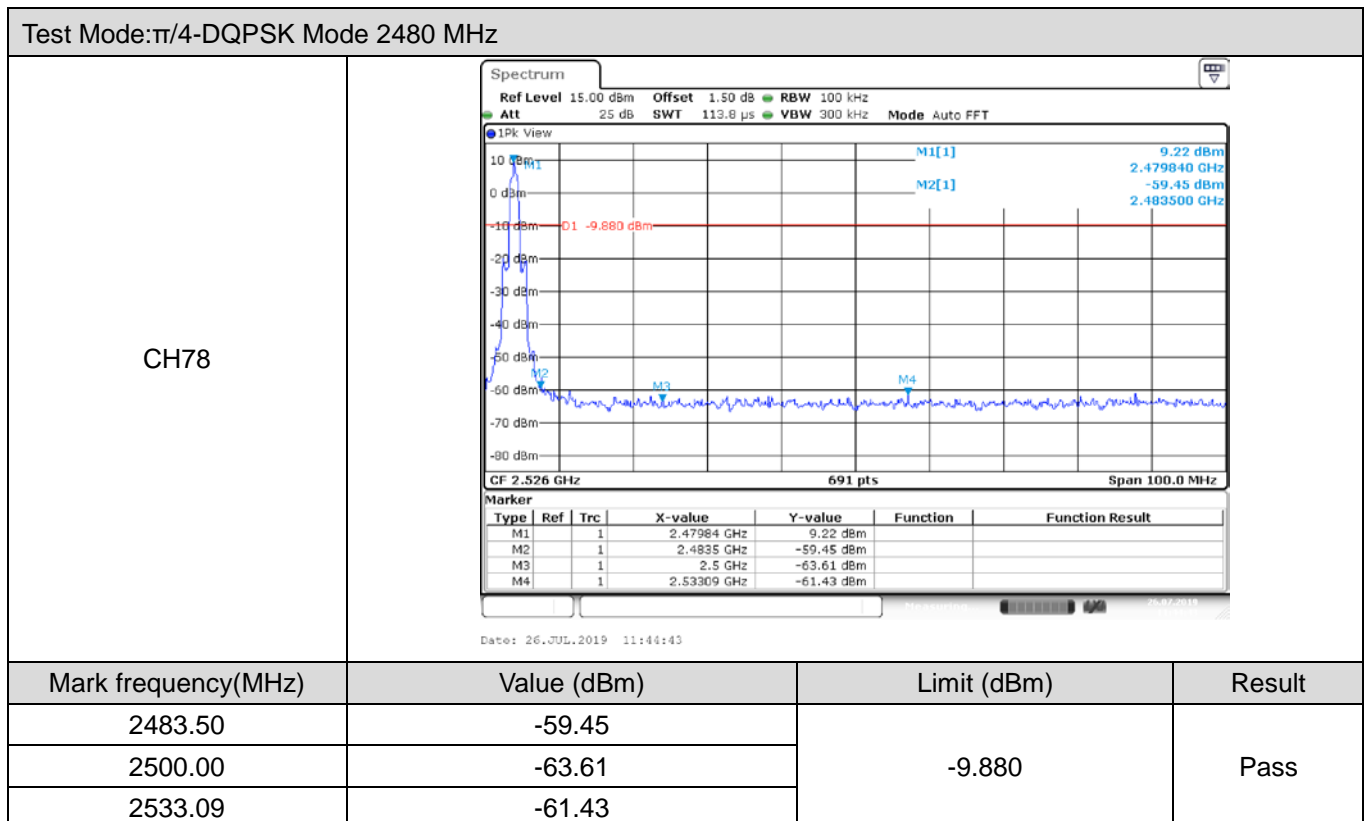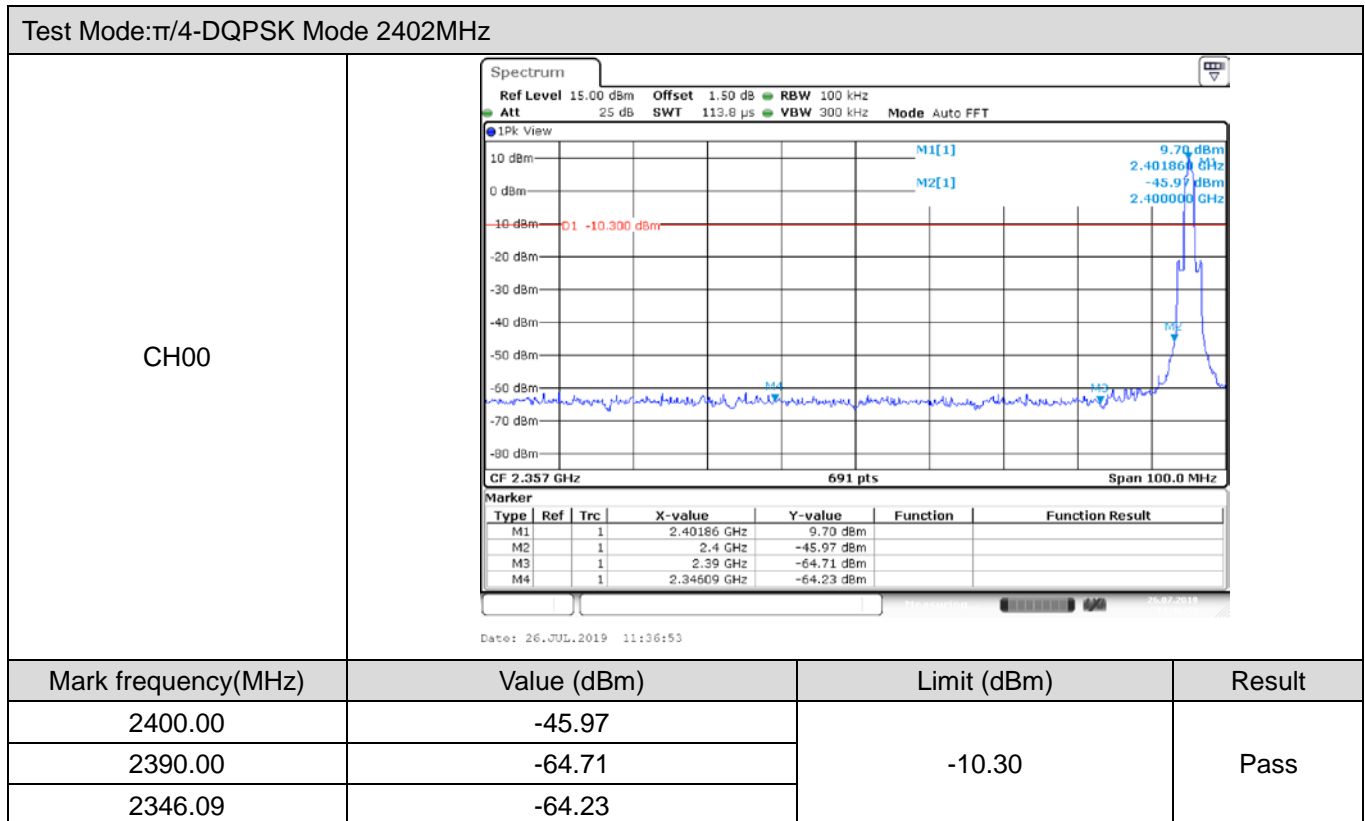


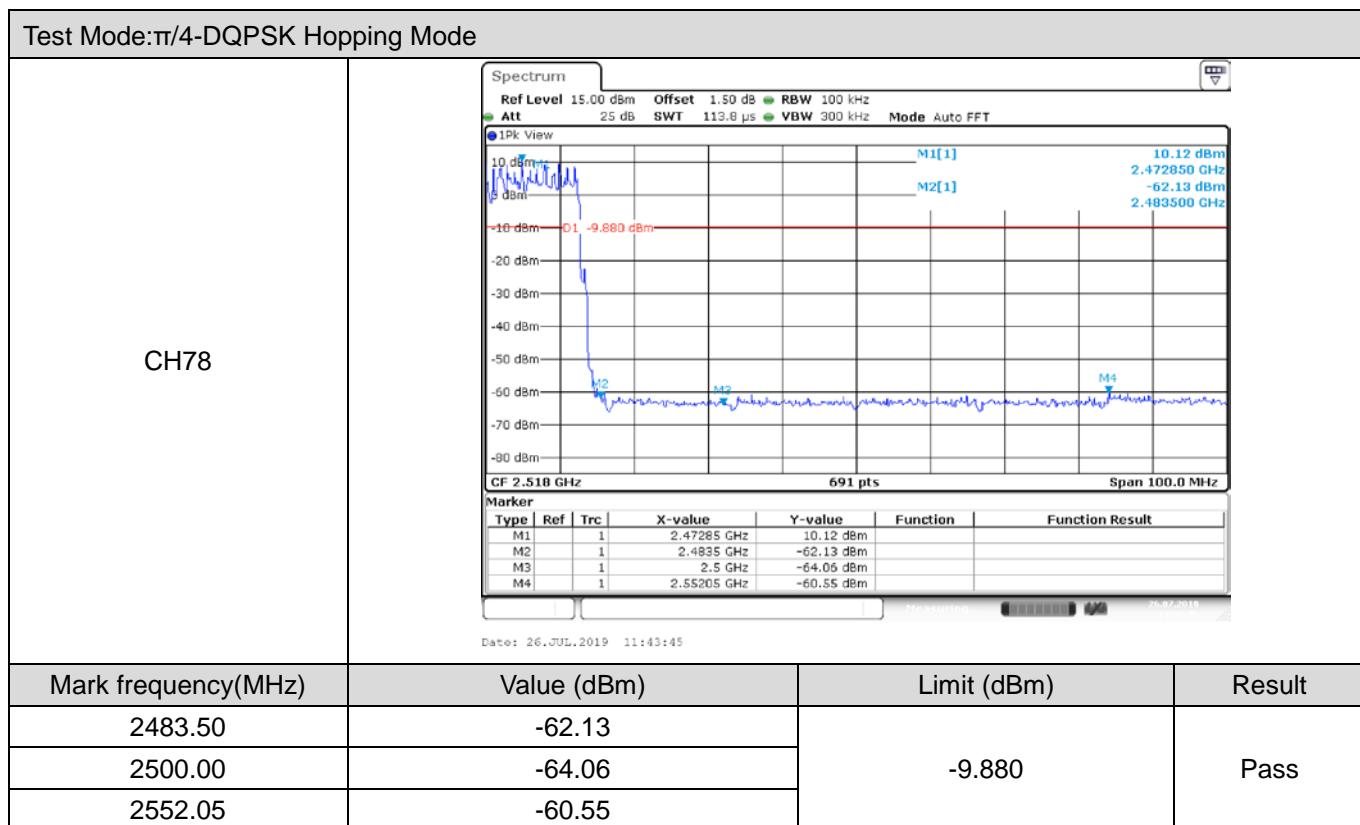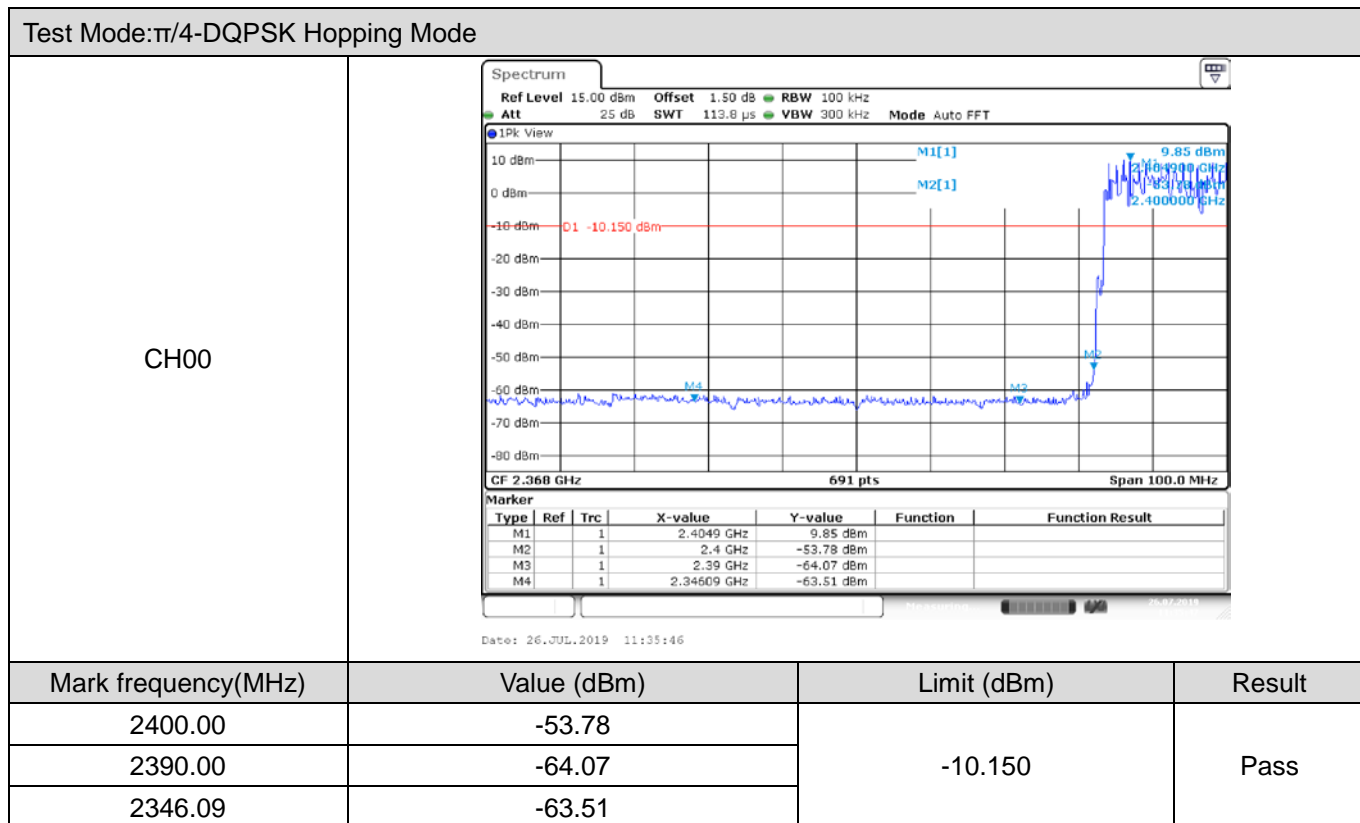



Test Mode: 8-DPSK Mode 2402MHz


CH00

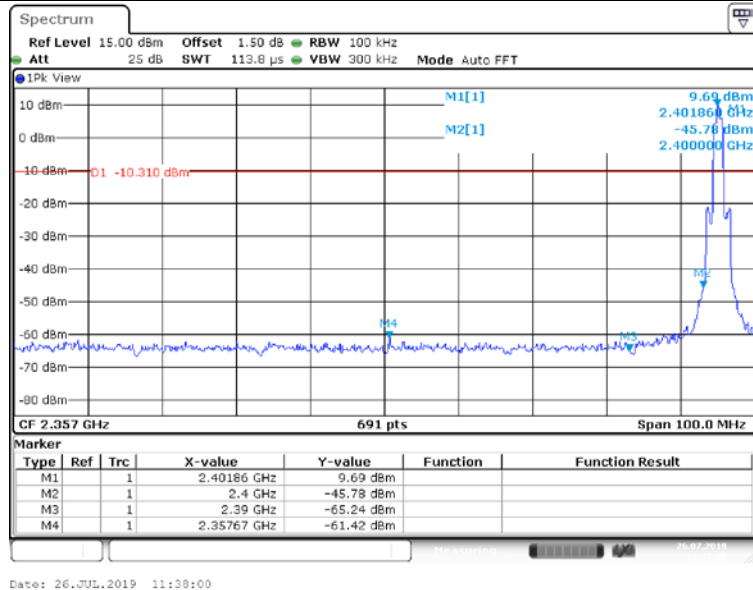

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.00	-45.78	-10.310	Pass
2390.00	-65.24		
2357.67	-61.42		

Test Mode: 8-DPSK Mode 2480 MHz

CH78

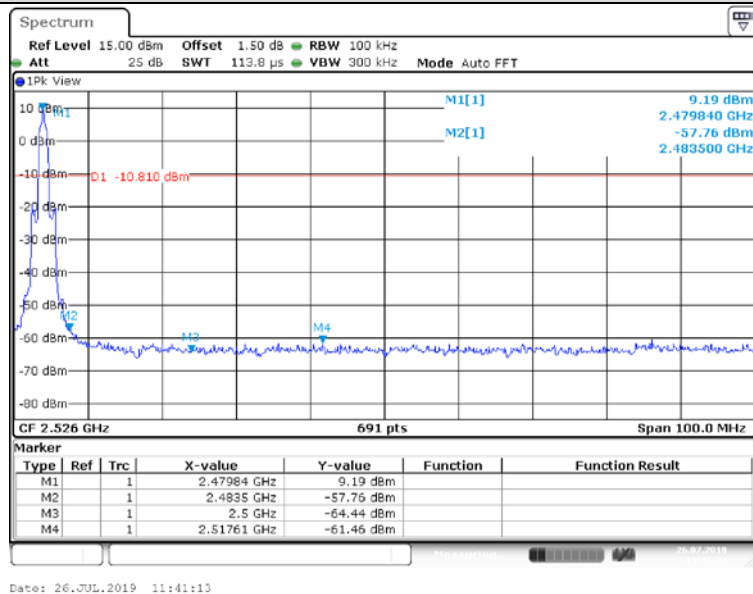

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.50	-57.76	-10.810	Pass
2500.00	-64.44		
2517.61	-61.46		

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011


Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



Test Mode: 8-DPSK Hopping Mode


CH00

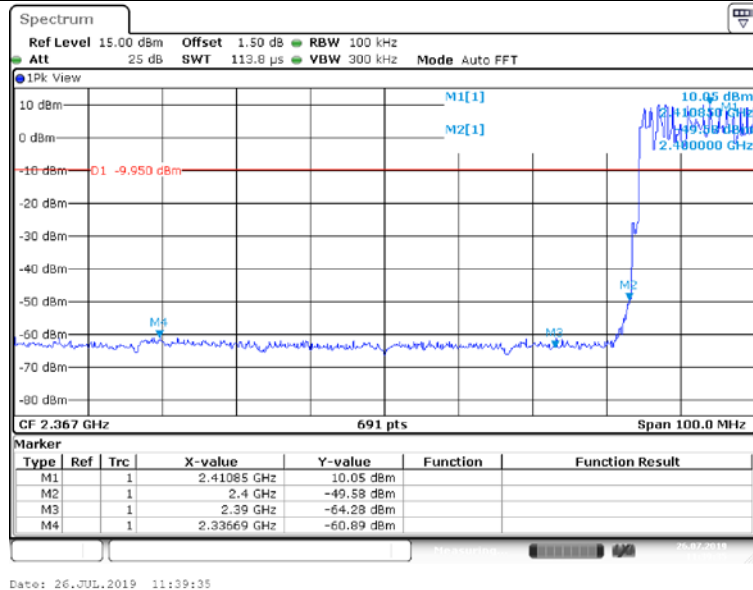

Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2400.00	-49.58	-9.950	Pass
2390.00	-64.28		
2336.69	-60.89		

Test Mode: 8-DPSK Hopping Mode

CH78

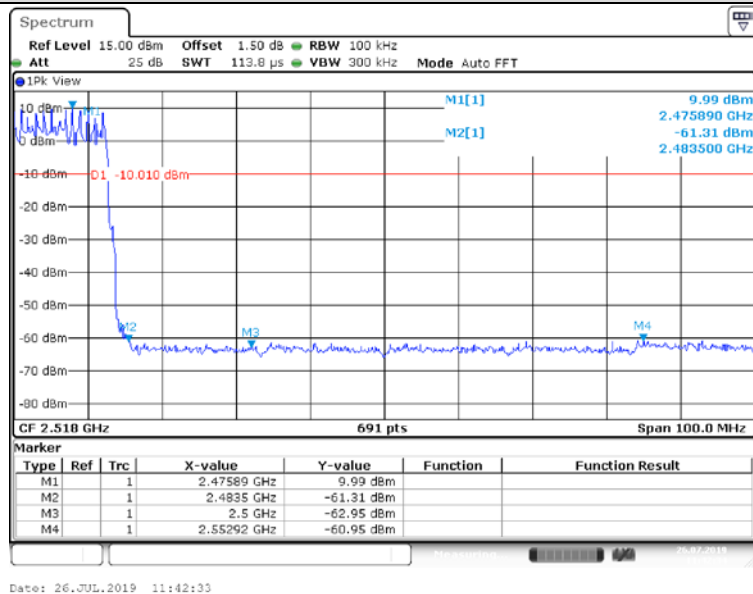


Mark frequency(MHz)	Value (dBm)	Limit (dBm)	Result
2483.50	-61.31	-10.010	Pass
2500.00	-62.95		
2552.92	-60.95		

3.4. 20 Bandwidth

Limit

N/A

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.


NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.

Test Results

Modulation type	Channel	20 dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
GFSK	00	1101	734.00
	39	1101	734.00
	78	1101	734.00
$\pi/4$ -DQPSK	00	1380	920.00
	39	1370	913.33
	78	1385	923.33
8-DPSK	00	1385	923.33
	39	1385	923.33
	78	1389	926.00

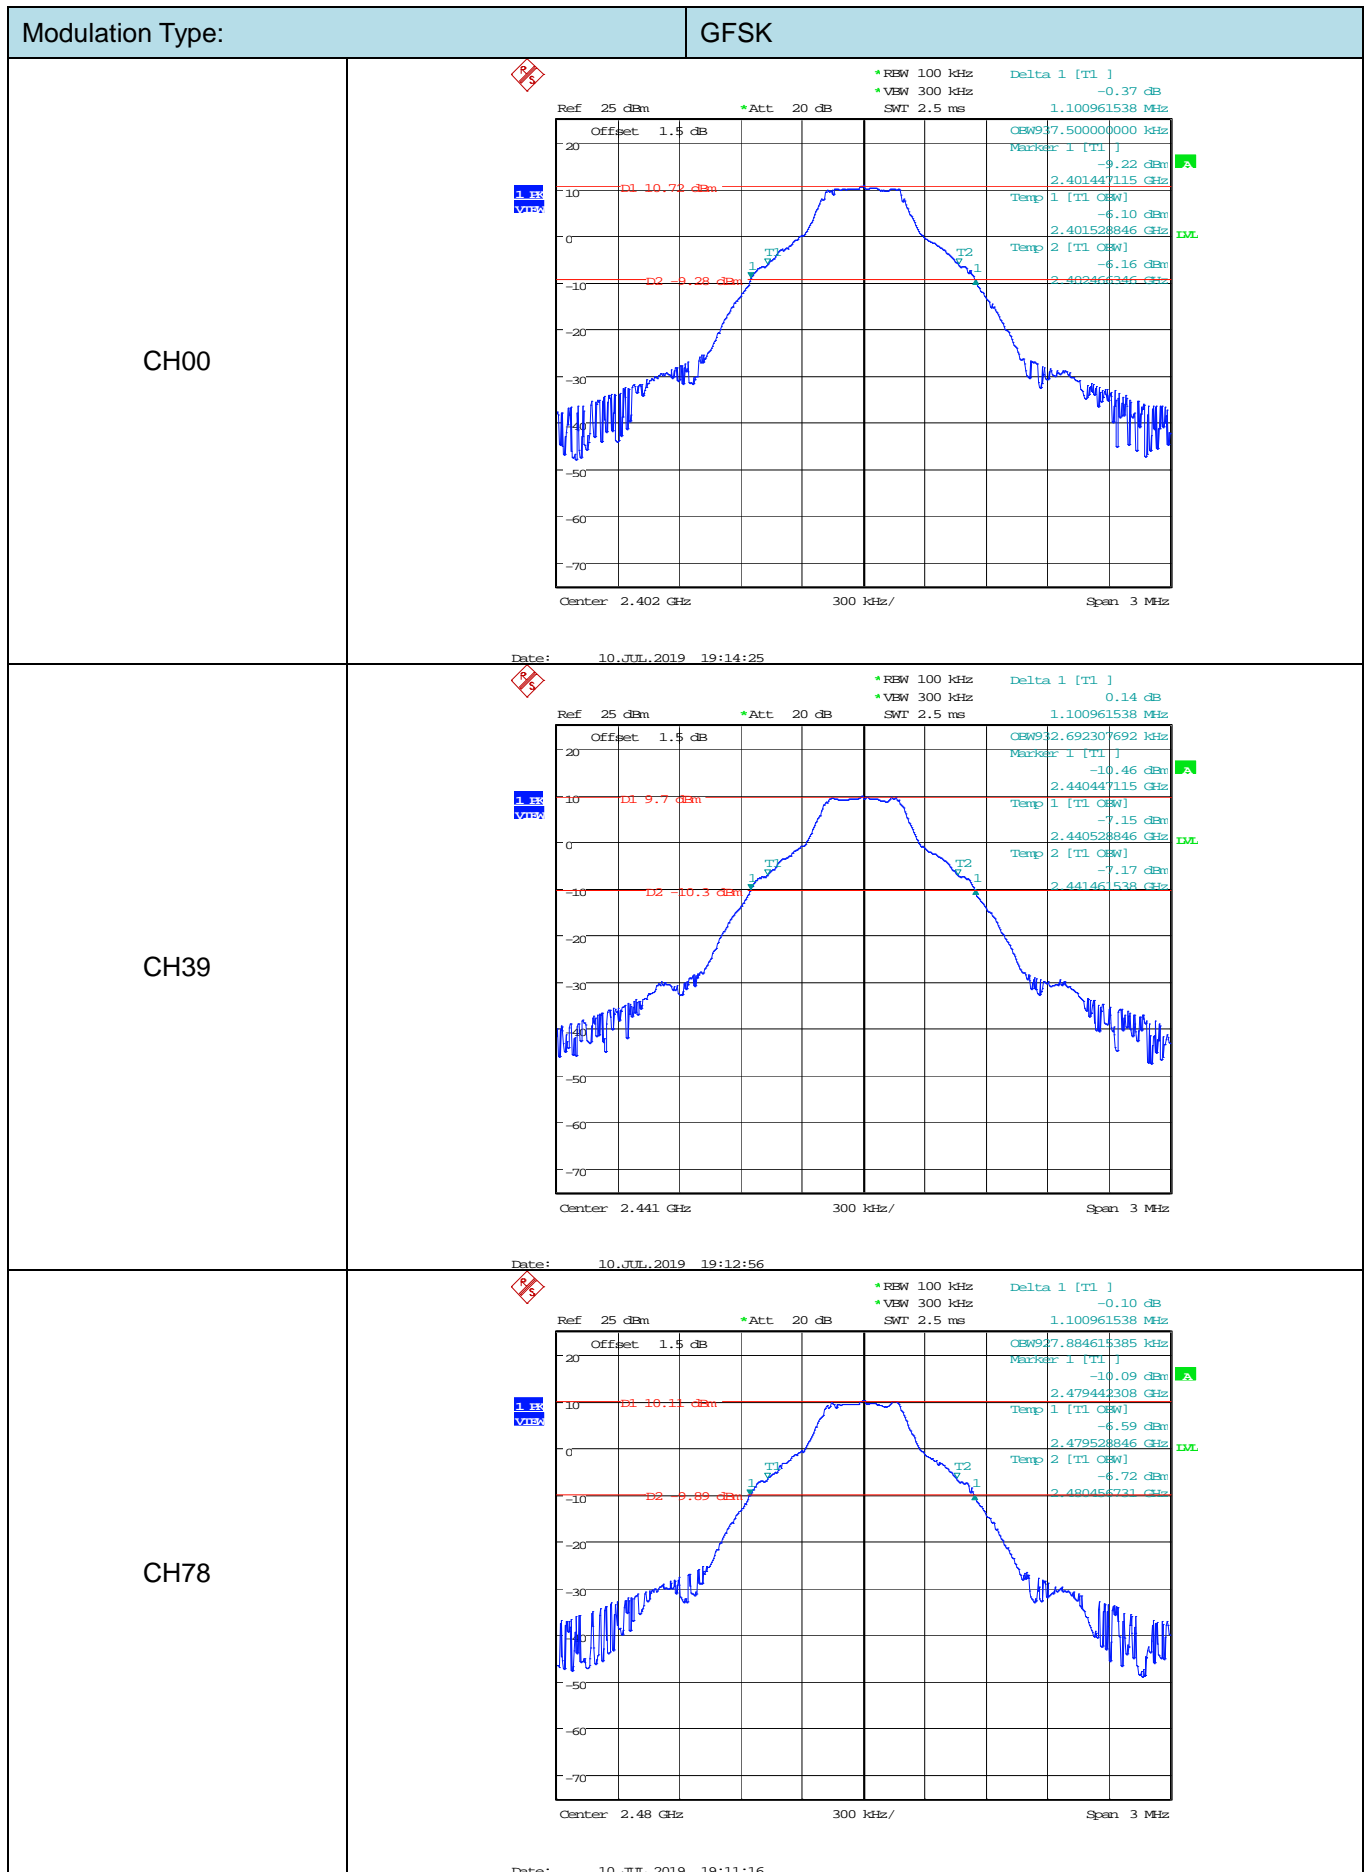

CTC Laboratories, Inc.


2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

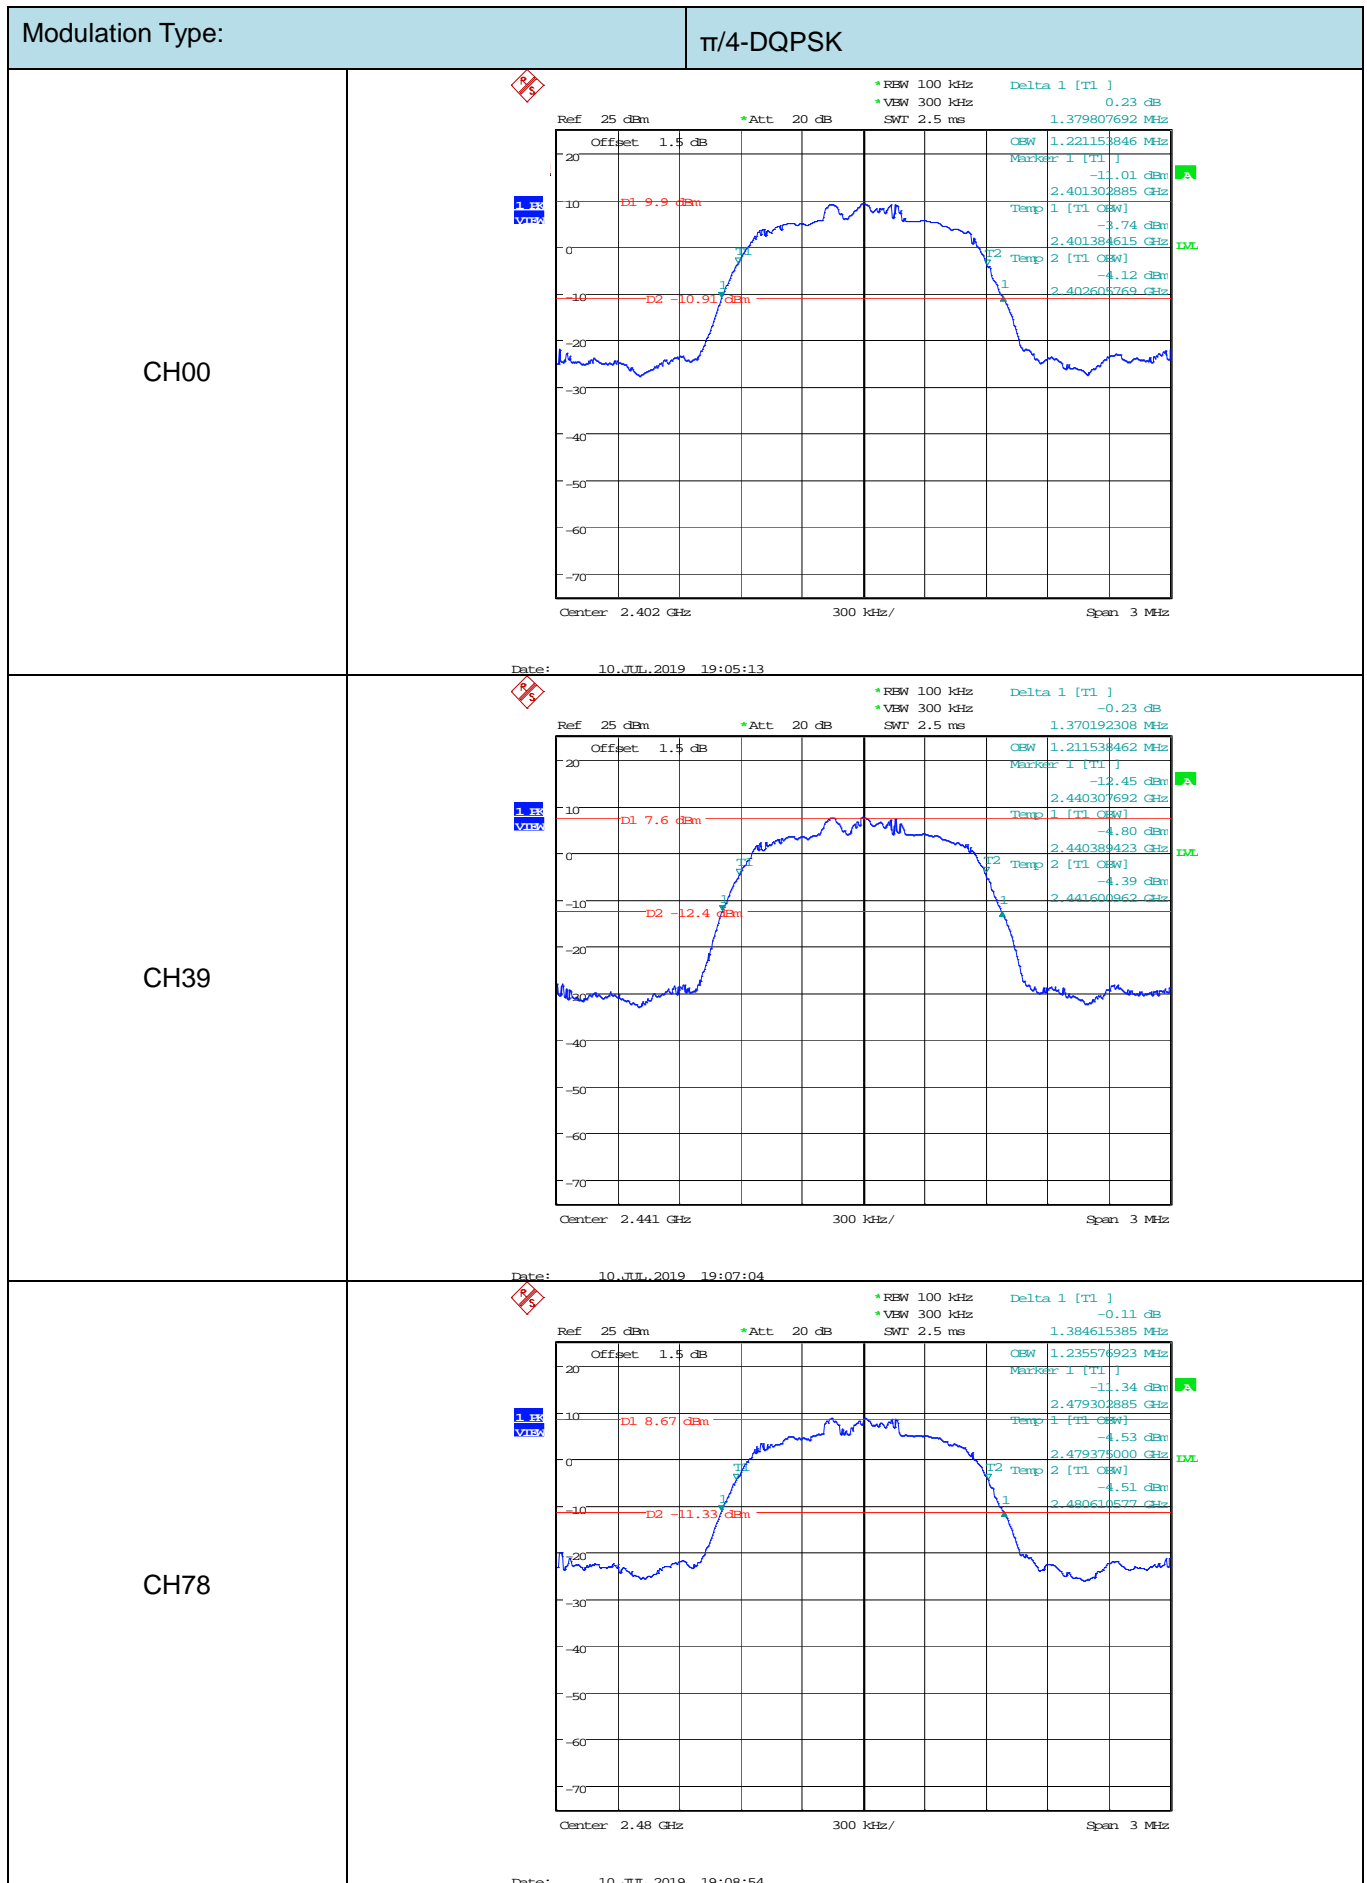

CTC Laboratories, Inc.


2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

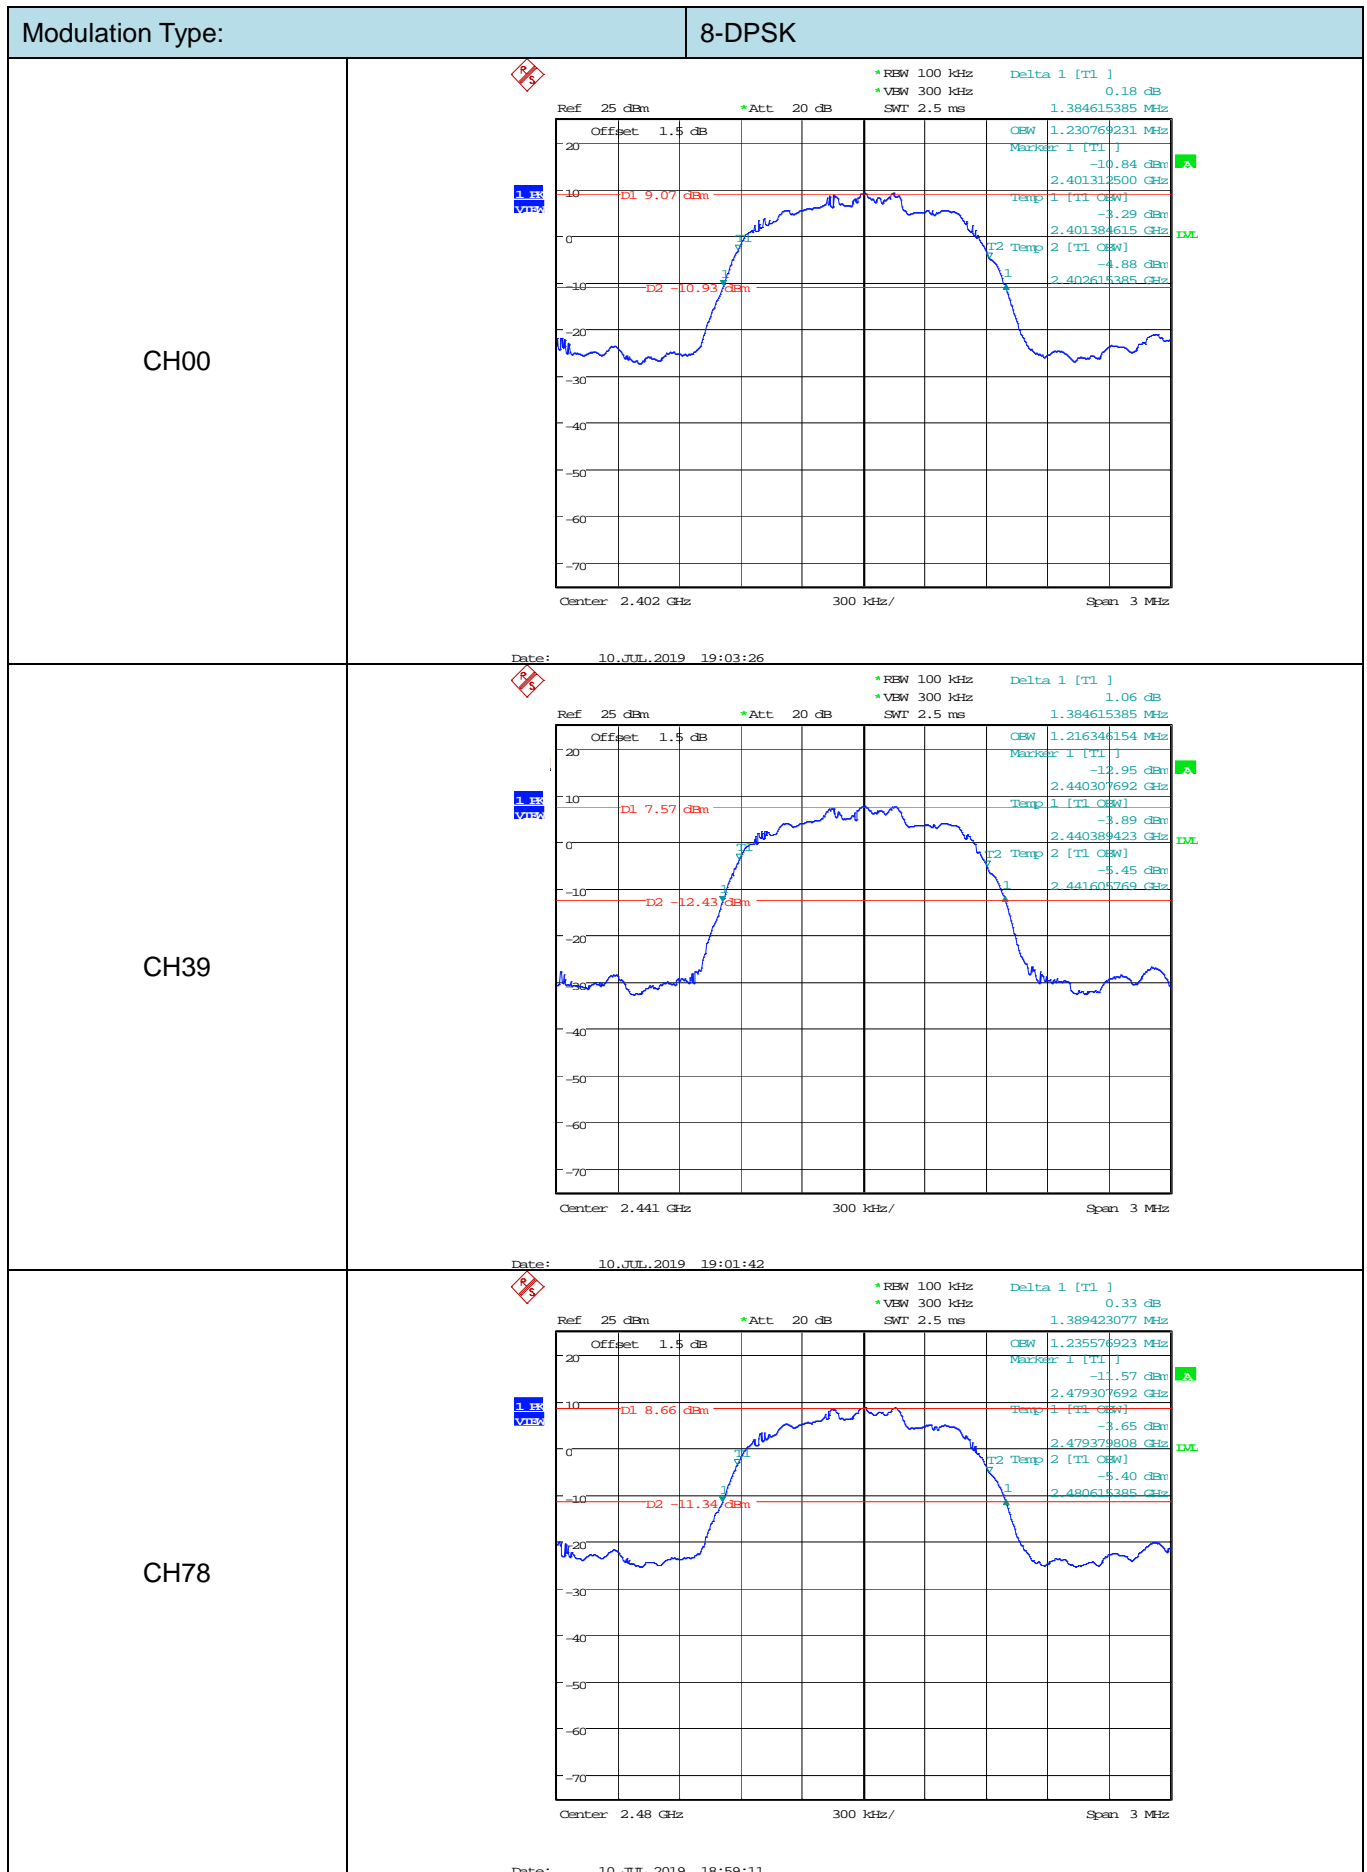

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




3.5. Channel Separation

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

Test Configuration



Test Procedure

3. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
4. Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.




Test Mode

Please refer to the clause 2.3.

Test Results

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	00	1.003	734.00	Pass
	39	1.003	734.00	
	78	1.003	734.00	
$\pi/4$ -DQPSK	00	1.003	920.00	Pass
	39	1.003	913.33	
	78	1.003	923.33	
8-DPSK	00	1.003	923.33	Pass
	39	1.003	923.33	
	78	1.003	926.00	

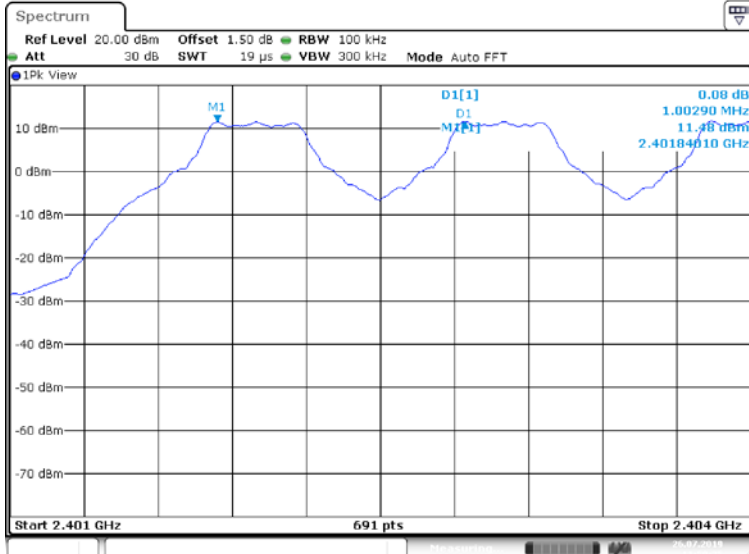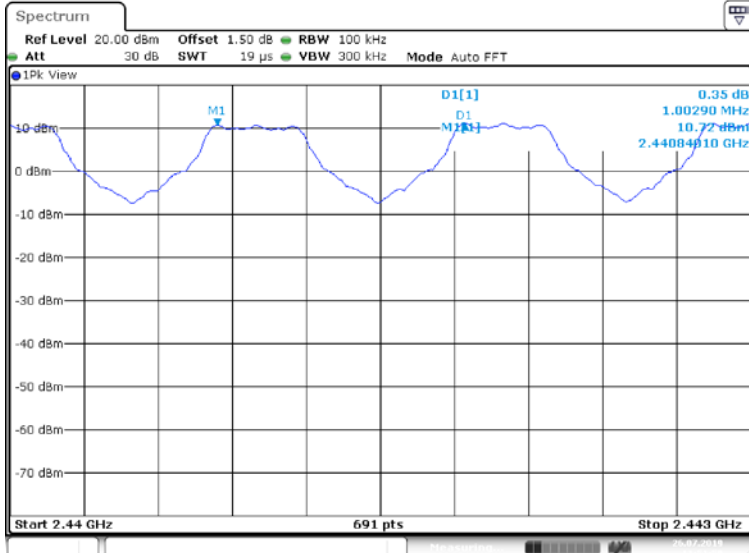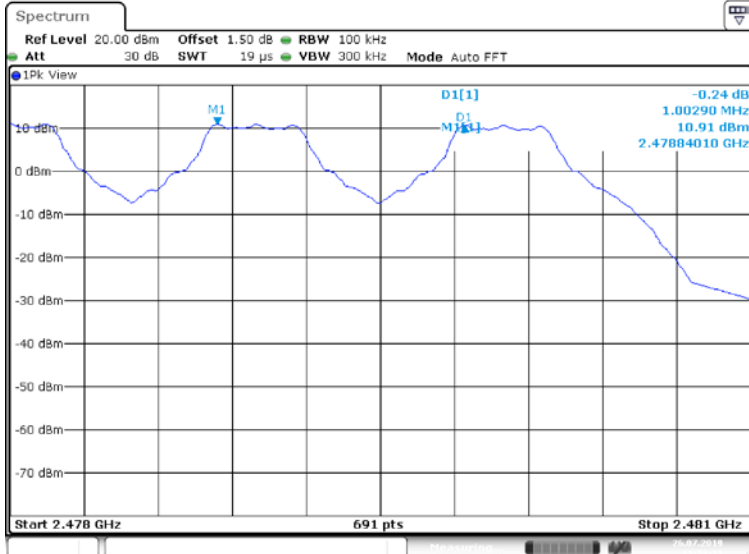

Modulation Type:		GFSK
CH00	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.50 dB RBW 100 kHz Att 30 dB SWT 19 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1 D1[1] D1 M1[1]</p> <p>0.08 dB 1.00290 MHz 11.46 dBm 2.40184010 GHz</p> <p>Start 2.401 GHz 691 pts Stop 2.404 GHz</p> <p>Date: 26.JUL.2019 11:50:25</p>	
CH39	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.50 dB RBW 100 kHz Att 30 dB SWT 19 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1 D1[1] D1 M1[1]</p> <p>0.35 dB 1.00290 MHz 10.72 dBm 2.44084010 GHz</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 26.JUL.2019 11:51:59</p>	
CH78	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.50 dB RBW 100 kHz Att 30 dB SWT 19 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1 D1[1] D1 M1[1]</p> <p>-0.24 dB 1.00290 MHz 10.91 dBm 2.47884010 GHz</p> <p>Start 2.478 GHz 691 pts Stop 2.481 GHz</p> <p>Date: 26.JUL.2019 11:53:11</p>	

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

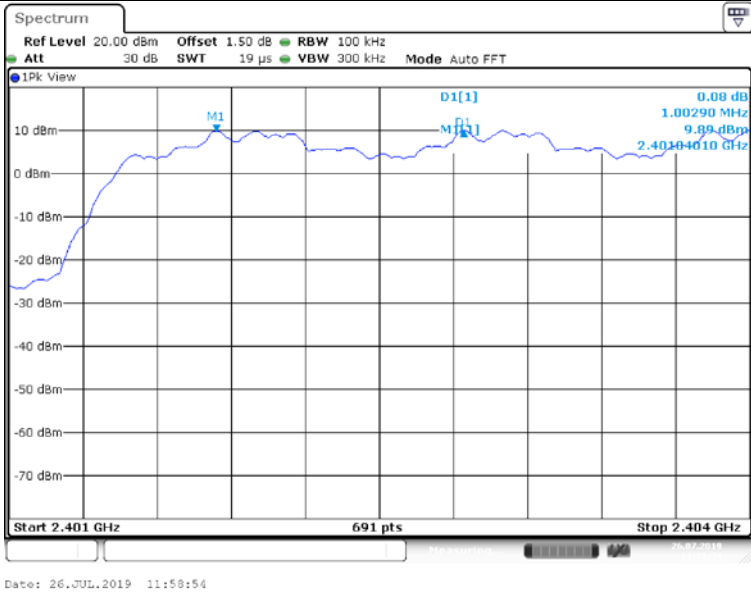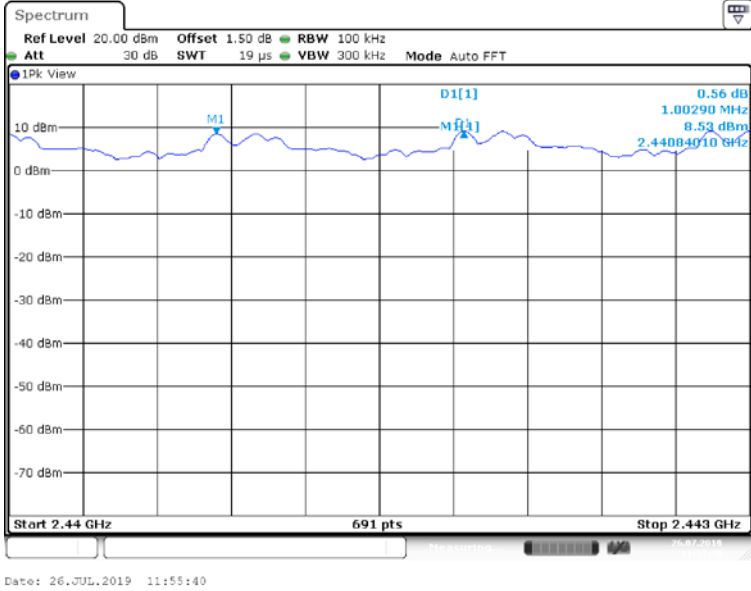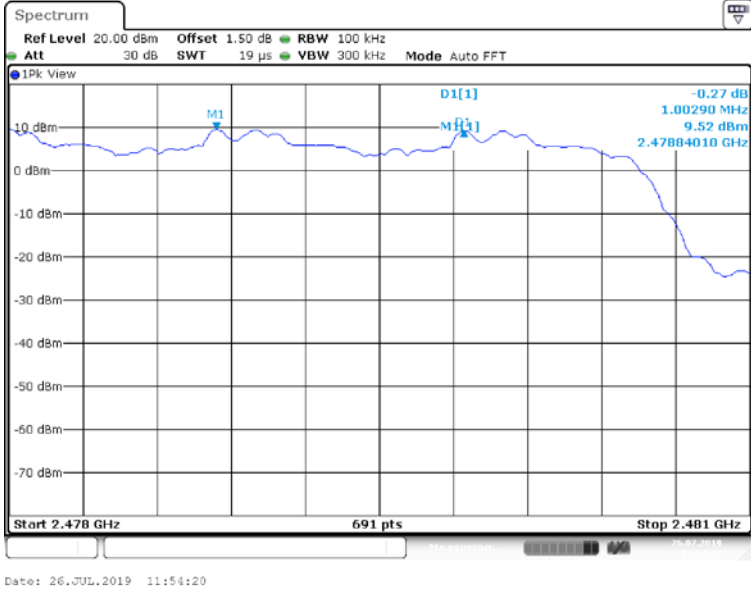

Modulation Type:		$\pi/4$ -DQPSK
CH00		
CH39		
CH78		

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China




Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

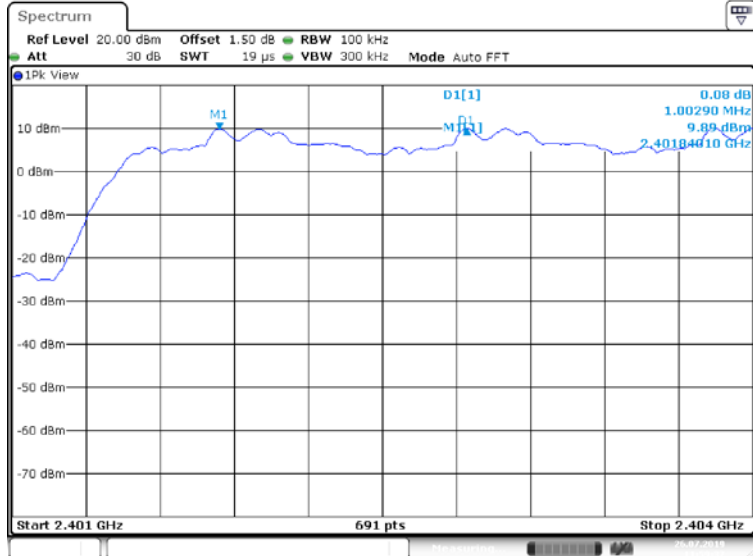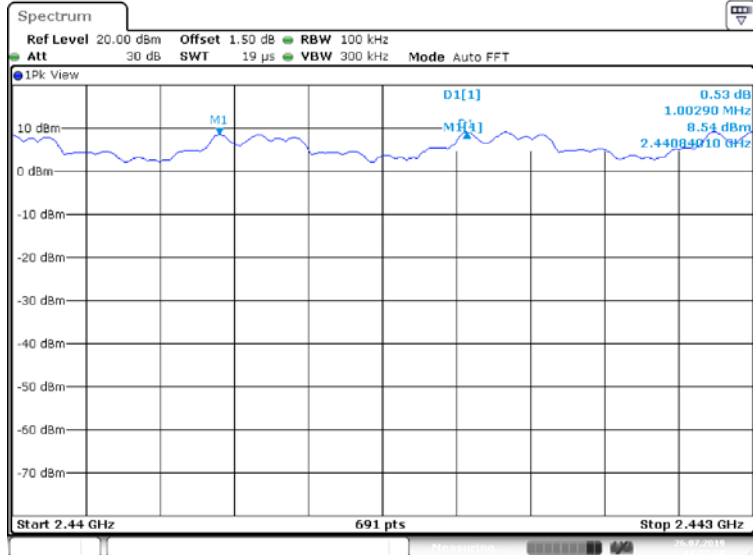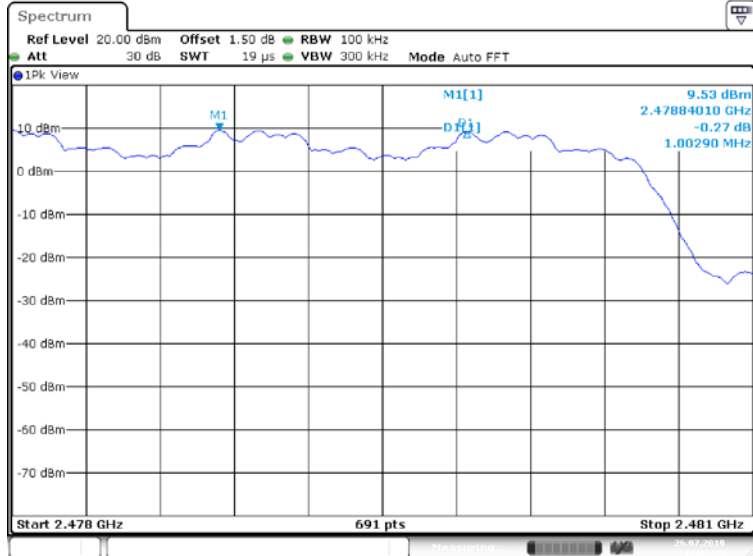

Modulation Type:		8-DPSK
CH00	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.50 dB RBW 100 kHz Att 30 dB SWT 19 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>0.08 dB 1.00290 MHz 9.89 dBm 2.40184010 GHz</p> <p>Start 2.401 GHz 691 pts Stop 2.404 GHz</p> <p>Date: 26.JUL.2019 11:59:39</p>	
CH39	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.50 dB RBW 100 kHz Att 30 dB SWT 19 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>0.53 dB 1.00290 MHz 8.51 dBm 2.44084010 GHz</p> <p>Start 2.44 GHz 691 pts Stop 2.443 GHz</p> <p>Date: 26.JUL.2019 11:57:18</p>	
CH78	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.50 dB RBW 100 kHz Att 30 dB SWT 19 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>9.53 dBm 2.47884010 GHz -0.27 dB 1.00290 MHz</p> <p>Start 2.478 GHz 691 pts Stop 2.481 GHz</p> <p>Date: 26.JUL.2019 12:00:36</p>	

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn


3.6. Number of Hopping Channel

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

Test Mode



Please refer to the clause 2.3.

Test Result


Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4-DQPSK	79		
8DPSK	79		



GFSK

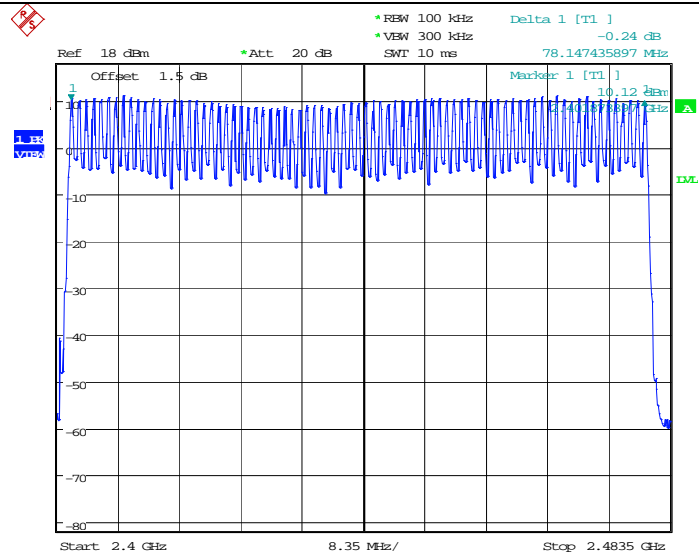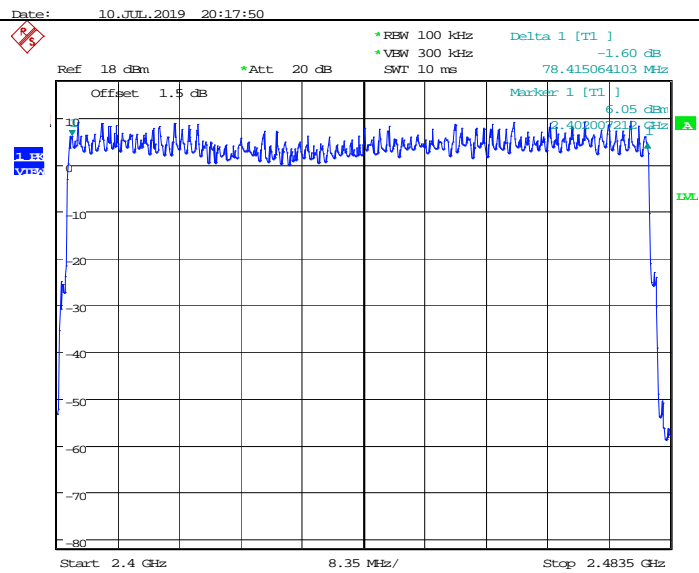 $\pi/4$ -DQPSK

8-DPSK

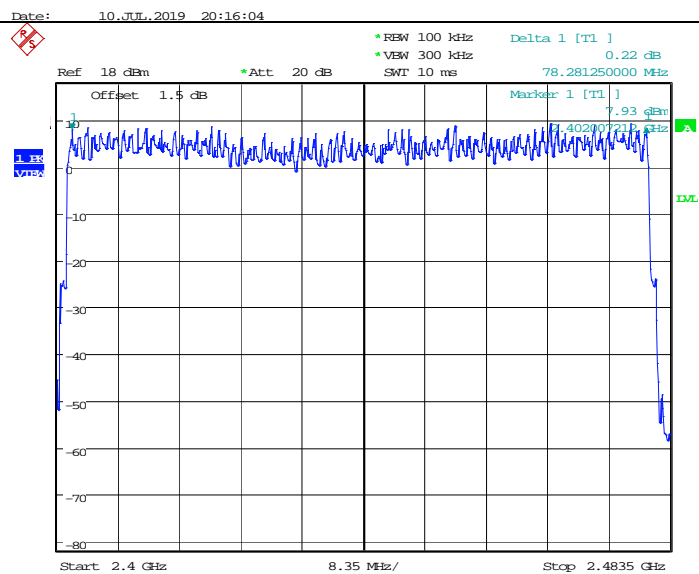

Date: 10.JUL.2019 20:14:18

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

3.7. Dwell Time

Limit

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
 - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
 - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
 - (3) Sweep Time is more than once pulse time.
 - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
 - (5) Measure the maximum time duration of one single pulse.
 - (6) Set the EUT for packet transmitting.

Test Mode

Please refer to the clause 2.2

**Test Result**

Modulation type	Channel	Channel (MHz)	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
GFSK	DH1	2441	0.420	134.40	31.60	≤ 0.40	Pass
	DH3	2441	1.674	267.84	31.60		
	DH5	2441	2.920	311.47	31.60		
$\pi/4$ -DQPSK	2DH1	2441	0.428	136.96	31.60	≤ 0.40	Pass
	2DH3	2441	1.681	268.96	31.60		
	2DH5	2441	2.928	312.32	31.60		
8-DPSK	3DH1	2441	0.420	134.40	31.60	≤ 0.40	Pass
	3DH3	2441	1.681	268.96	31.60		
	3DH5	2441	2.928	312.32	31.60		

Note: 1DH1/2DH1/3DH1 Total of Dwell= Pulse Time*(1600/2)*31.6/79

1DH3/2DH3/3DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79

1DH5/2DH5/3DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79



Modulation Type:		GFSK
DH1	<div><div>Spectrum</div><div><div>Ref Level 15.00 dBm</div><div>Offset 1.50 dB</div><div>RBW 1 MHz</div><div>Att 25 dB</div><div>SWT 5 ms</div><div>VBW 1 MHz</div><div>SGL TRG:VID</div><div>1AP Clrw</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div><div>-80 dBm</div></div><div><div>TRG 4.000 dBm</div><div>M1[1]</div><div>D1[1]</div></div><div><div>-0.21 dB</div><div>420.29 μs</div><div>-59.08 dBm</div><div>-21.30 μs</div></div></div><div><div>CF 2.441 GHz</div><div>691 pts</div><div>500.0 μs/</div></div></div><div>Date: 26.JUL.2019 10:03:13</div></div>	
DH3	<div><div>Spectrum</div><div><div>Ref Level 15.00 dBm</div><div>Offset 1.50 dB</div><div>RBW 1 MHz</div><div>Att 25 dB</div><div>SWT 5 ms</div><div>VBW 1 MHz</div><div>SGL TRG:VID</div><div>1AP Clrw</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div><div>-80 dBm</div></div><div><div>TRG 4.000 dBm</div><div>M1[1]</div><div>D1[1]</div></div><div><div>1.05 dB</div><div>1.67391 ms</div><div>-59.51 dBm</div><div>-21.30 μs</div></div></div><div><div>CF 2.441 GHz</div><div>691 pts</div><div>500.0 μs/</div></div></div><div>Date: 26.JUL.2019 10:06:54</div></div>	
DH5	<div><div>Spectrum</div><div><div>Ref Level 15.00 dBm</div><div>Offset 1.50 dB</div><div>RBW 1 MHz</div><div>Att 25 dB</div><div>SWT 5 ms</div><div>VBW 1 MHz</div><div>SGL TRG:VID</div><div>1AP Clrw</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div><div>-80 dBm</div></div><div><div>TRG 4.000 dBm</div><div>M1[1]</div><div>D1[1]</div></div><div><div>1.37 dB</div><div>2.92029 ms</div><div>-58.07 dBm</div><div>-21.30 μs</div></div></div><div><div>CF 2.441 GHz</div><div>691 pts</div><div>500.0 μs/</div></div></div><div>Date: 26.JUL.2019 10:08:59</div></div>	

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



Modulation Type:		$\pi/4$ -DQPSK
2DH1	<p>Date: 26.JUL.2019 10:03:55</p>	
2DH3	<p>Date: 26.JUL.2019 10:25:04</p>	
2DH5	<p>Date: 26.JUL.2019 10:09:36</p>	

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



Modulation Type:		8-DPSK
3DH1	<div><div><div>Spectrum</div><div><div>Ref Level 15.00 dBm</div><div>Offset 1.50 dB</div><div>RBW 1 MHz</div><div>Att 25 dB</div><div>SWT 5 ms</div><div>VBW 1 MHz</div></div><div>SGL TRG:VID</div><div><div>IAP Clrw</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div></div><div><div>TRG 4.000 dBm</div><div>M1[1]</div><div>D1[1]</div></div><div><div>-58.21 dBm</div><div>-21.30 μs</div><div>1.22 dB</div><div>420.29 μs</div></div></div><div><div>CF 2.441 GHz</div><div>691 pts</div><div>500.0 μs/</div></div></div></div><div>Date: 26.JUL.2019 10:05:46</div></div>	
3DH3	<div><div><div>Spectrum</div><div><div>Ref Level 15.00 dBm</div><div>Offset 1.50 dB</div><div>RBW 1 MHz</div><div>Att 25 dB</div><div>SWT 5 ms</div><div>VBW 1 MHz</div></div><div>SGL TRG:VID</div><div><div>IAP Clrw</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-80 dBm</div></div><div><div>TRG 4.000 dBm</div><div>D1[1]</div><div>M1[1]</div></div><div><div>0.63 dB</div><div>1.68116 ms</div><div>-60.25 dBm</div><div>-21.30 μs</div></div></div><div><div>CF 2.441 GHz</div><div>691 pts</div><div>500.0 μs/</div></div></div></div><div>Date: 26.JUL.2019 10:11:18</div></div>	
3DH5	<div><div><div>Spectrum</div><div><div>Ref Level 15.00 dBm</div><div>Offset 1.50 dB</div><div>RBW 1 MHz</div><div>Att 25 dB</div><div>SWT 5 ms</div><div>VBW 1 MHz</div></div><div>SGL TRG:VID</div><div><div>IAP Clrw</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-80 dBm</div></div><div><div>TRG 4.000 dBm</div><div>D1[1]</div><div>M1[1]</div></div><div><div>-1.31 dB</div><div>2.92754 ms</div><div>-57.11 dBm</div><div>-21.30 μs</div></div></div><div><div>CF 2.441 GHz</div><div>691 pts</div><div>500.0 μs/</div></div></div></div><div>Date: 26.JUL.2019 10:10:12</div></div>	

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




3.8. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5

Test Configuration



Test Procedure


1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

Test Mode

Please refer to the clause 2.2

Test Result

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	10.72	≤ 30.00	Pass
	39	9.92		
	78	10.37		
π/4-DQPSK	00	10.15	≤ 21.00	Pass
	39	8.96		
	78	9.63		
8-DPSK	00	10.25	≤ 21.00	Pass
	39	9.10		
	78	9.68		

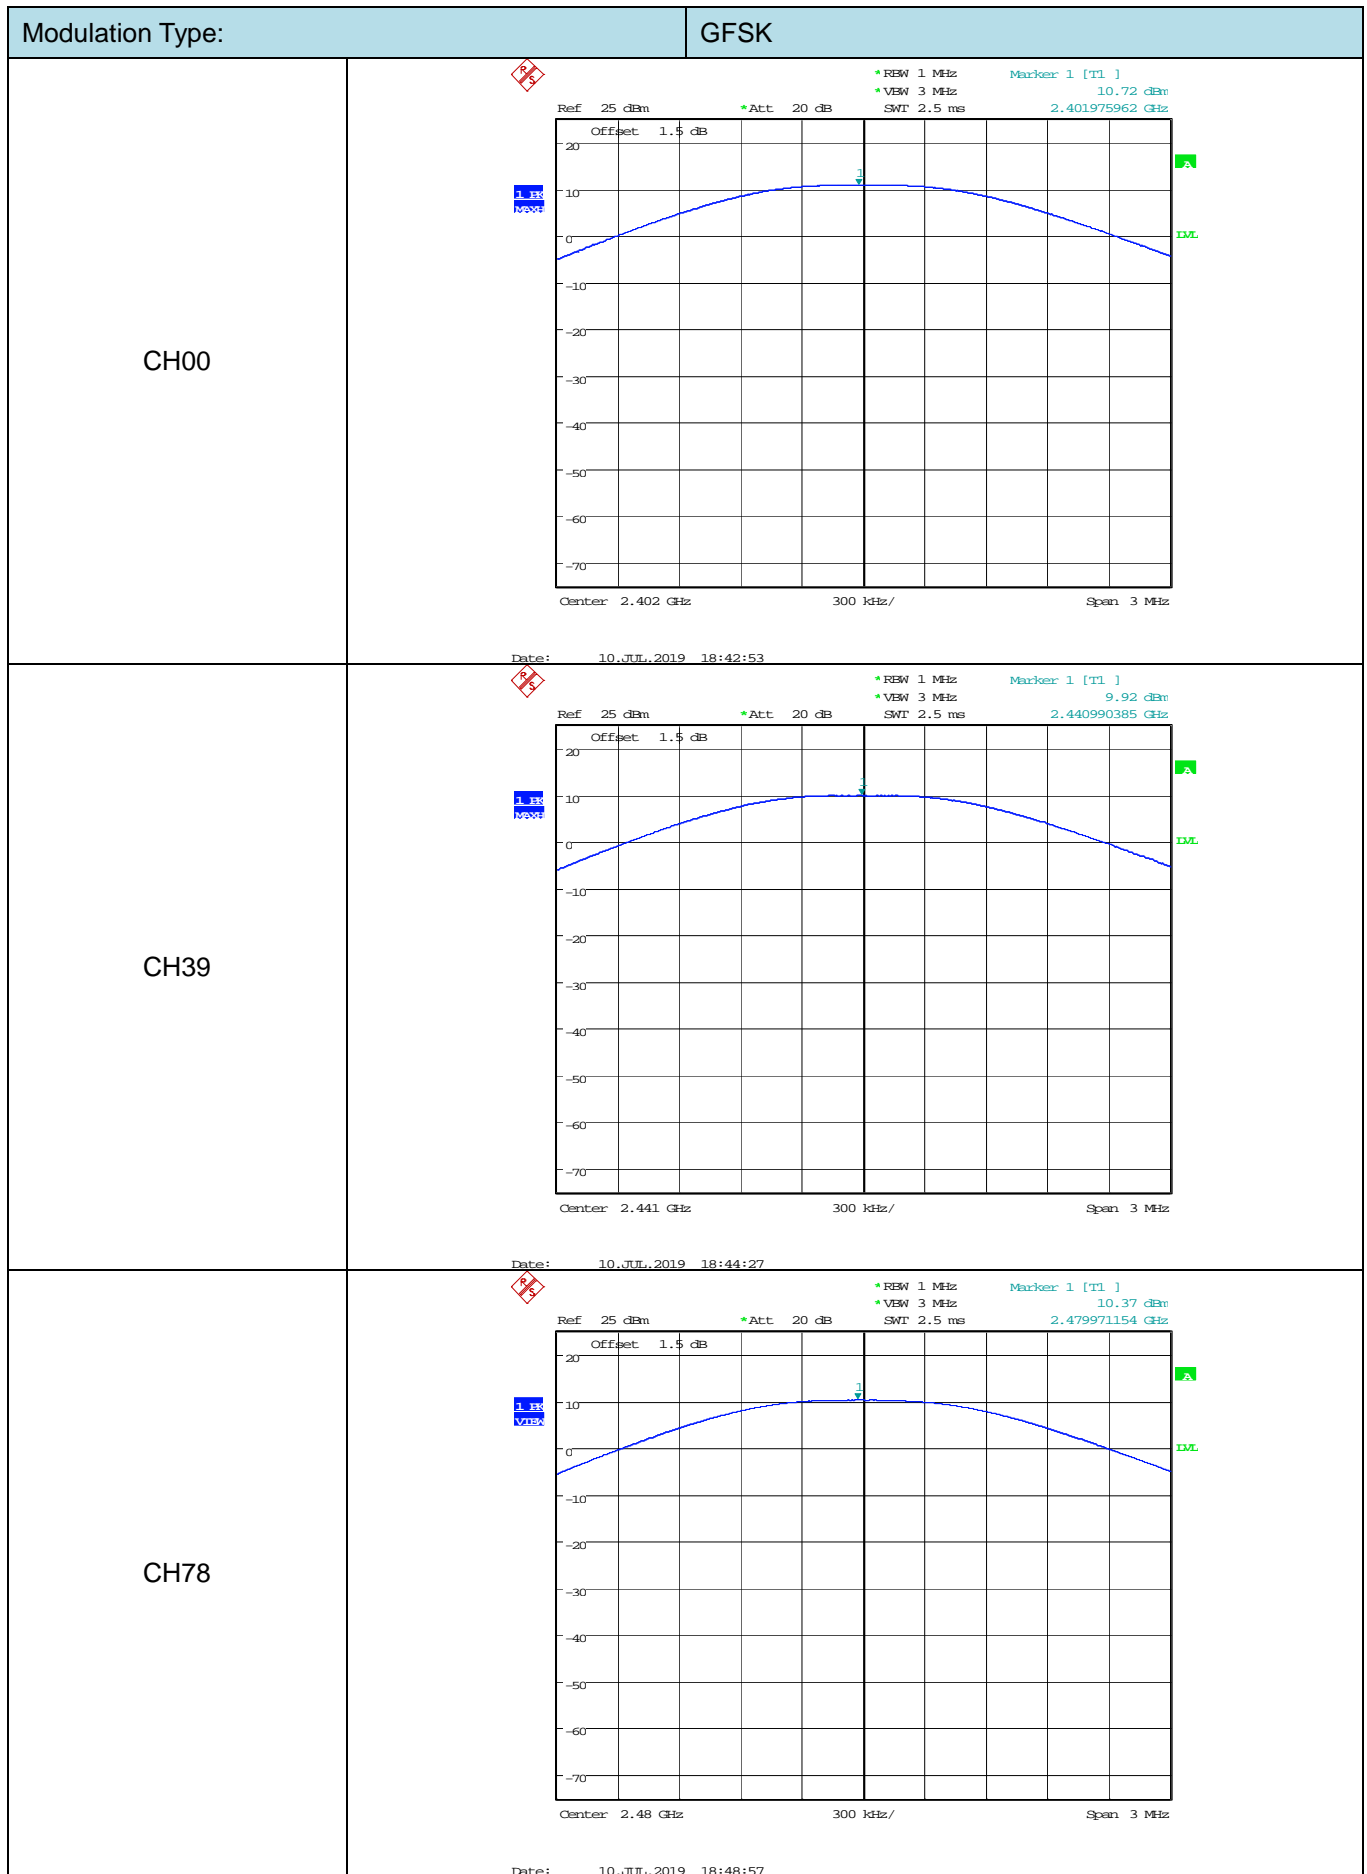

CTC Laboratories, Inc.


2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

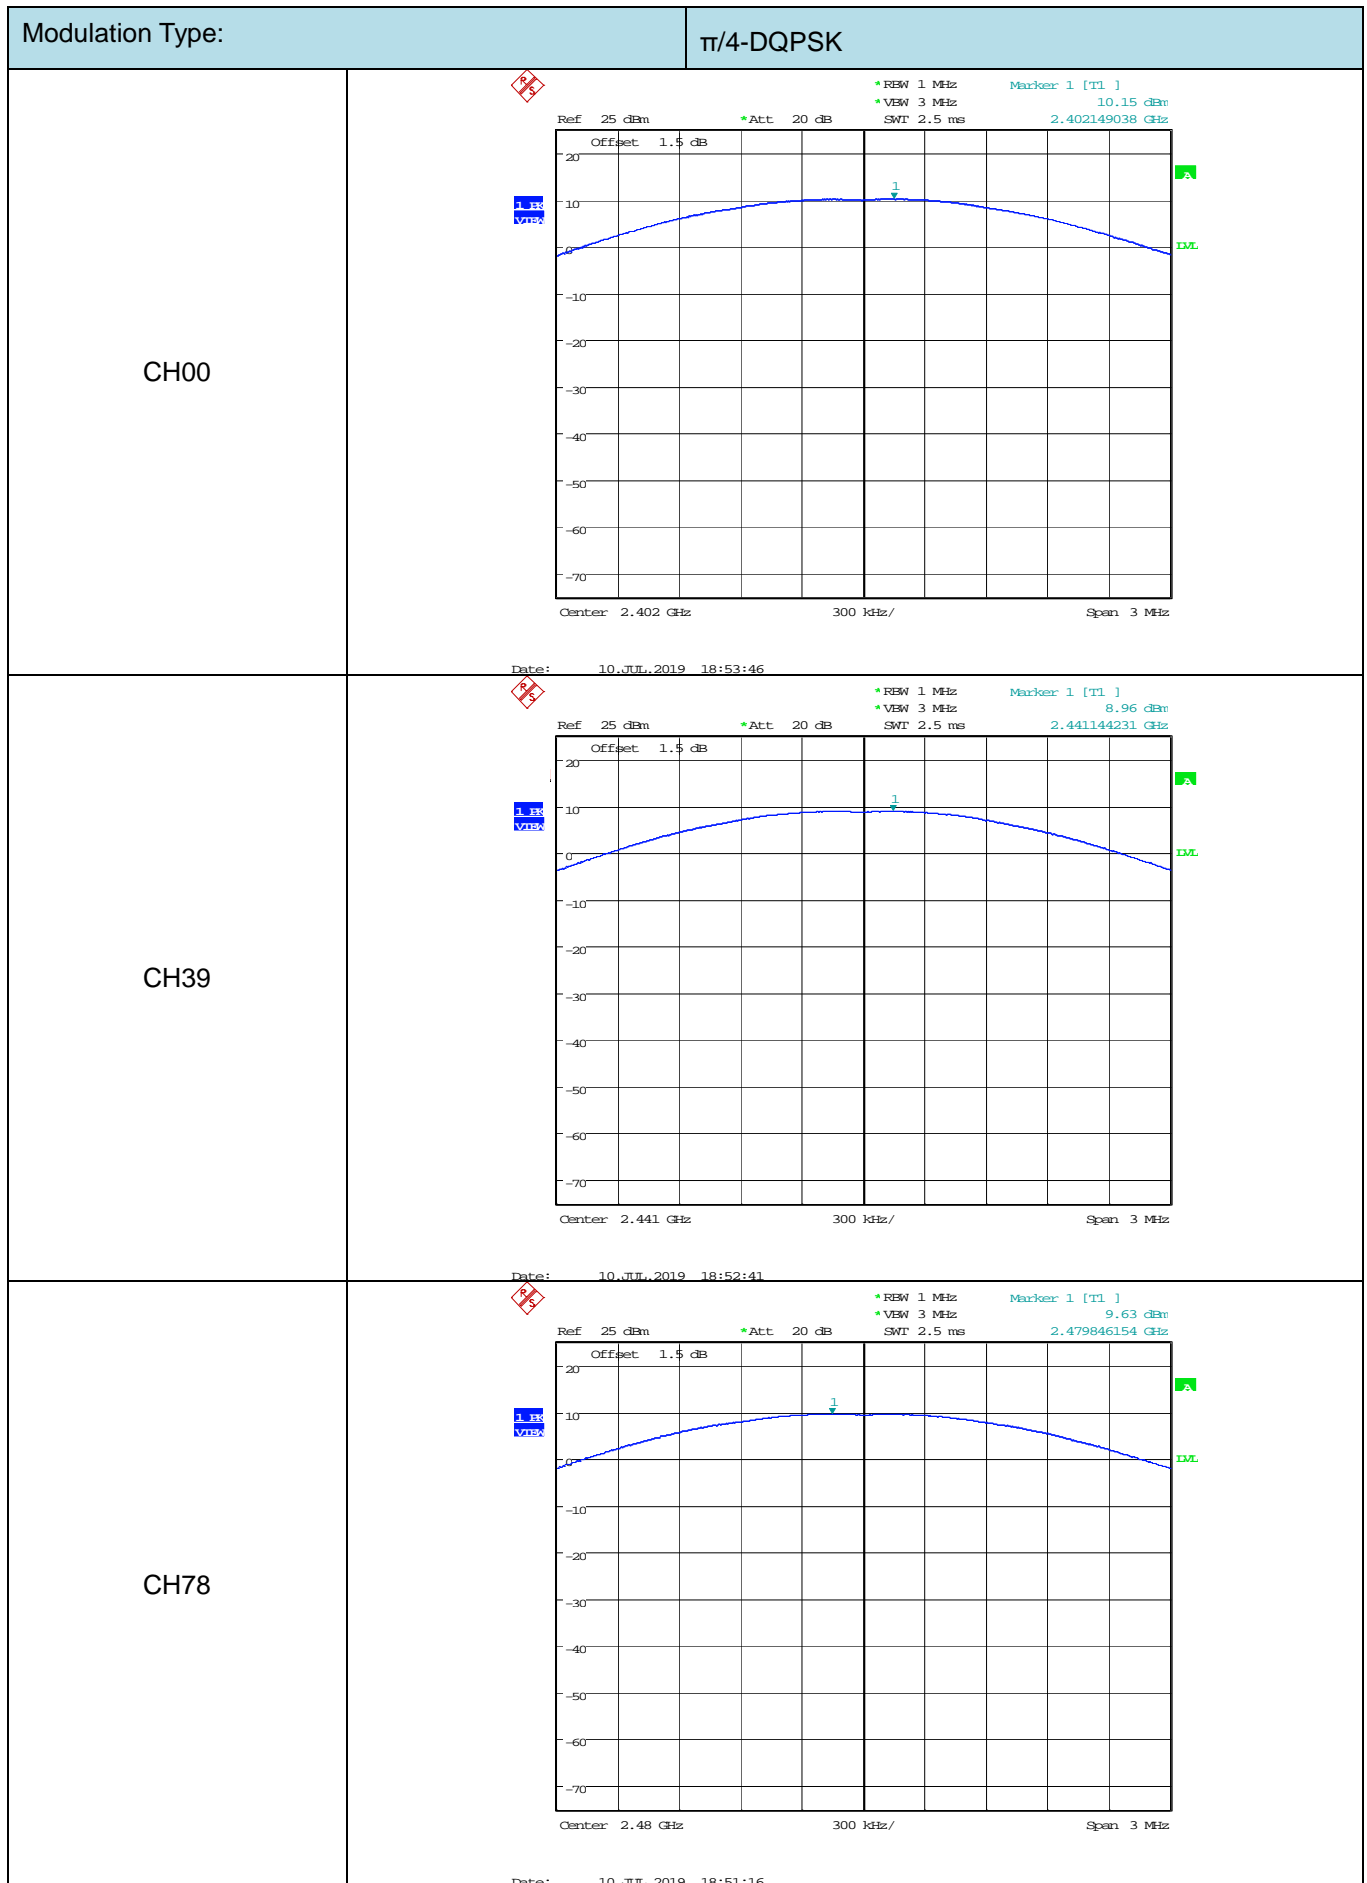

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn

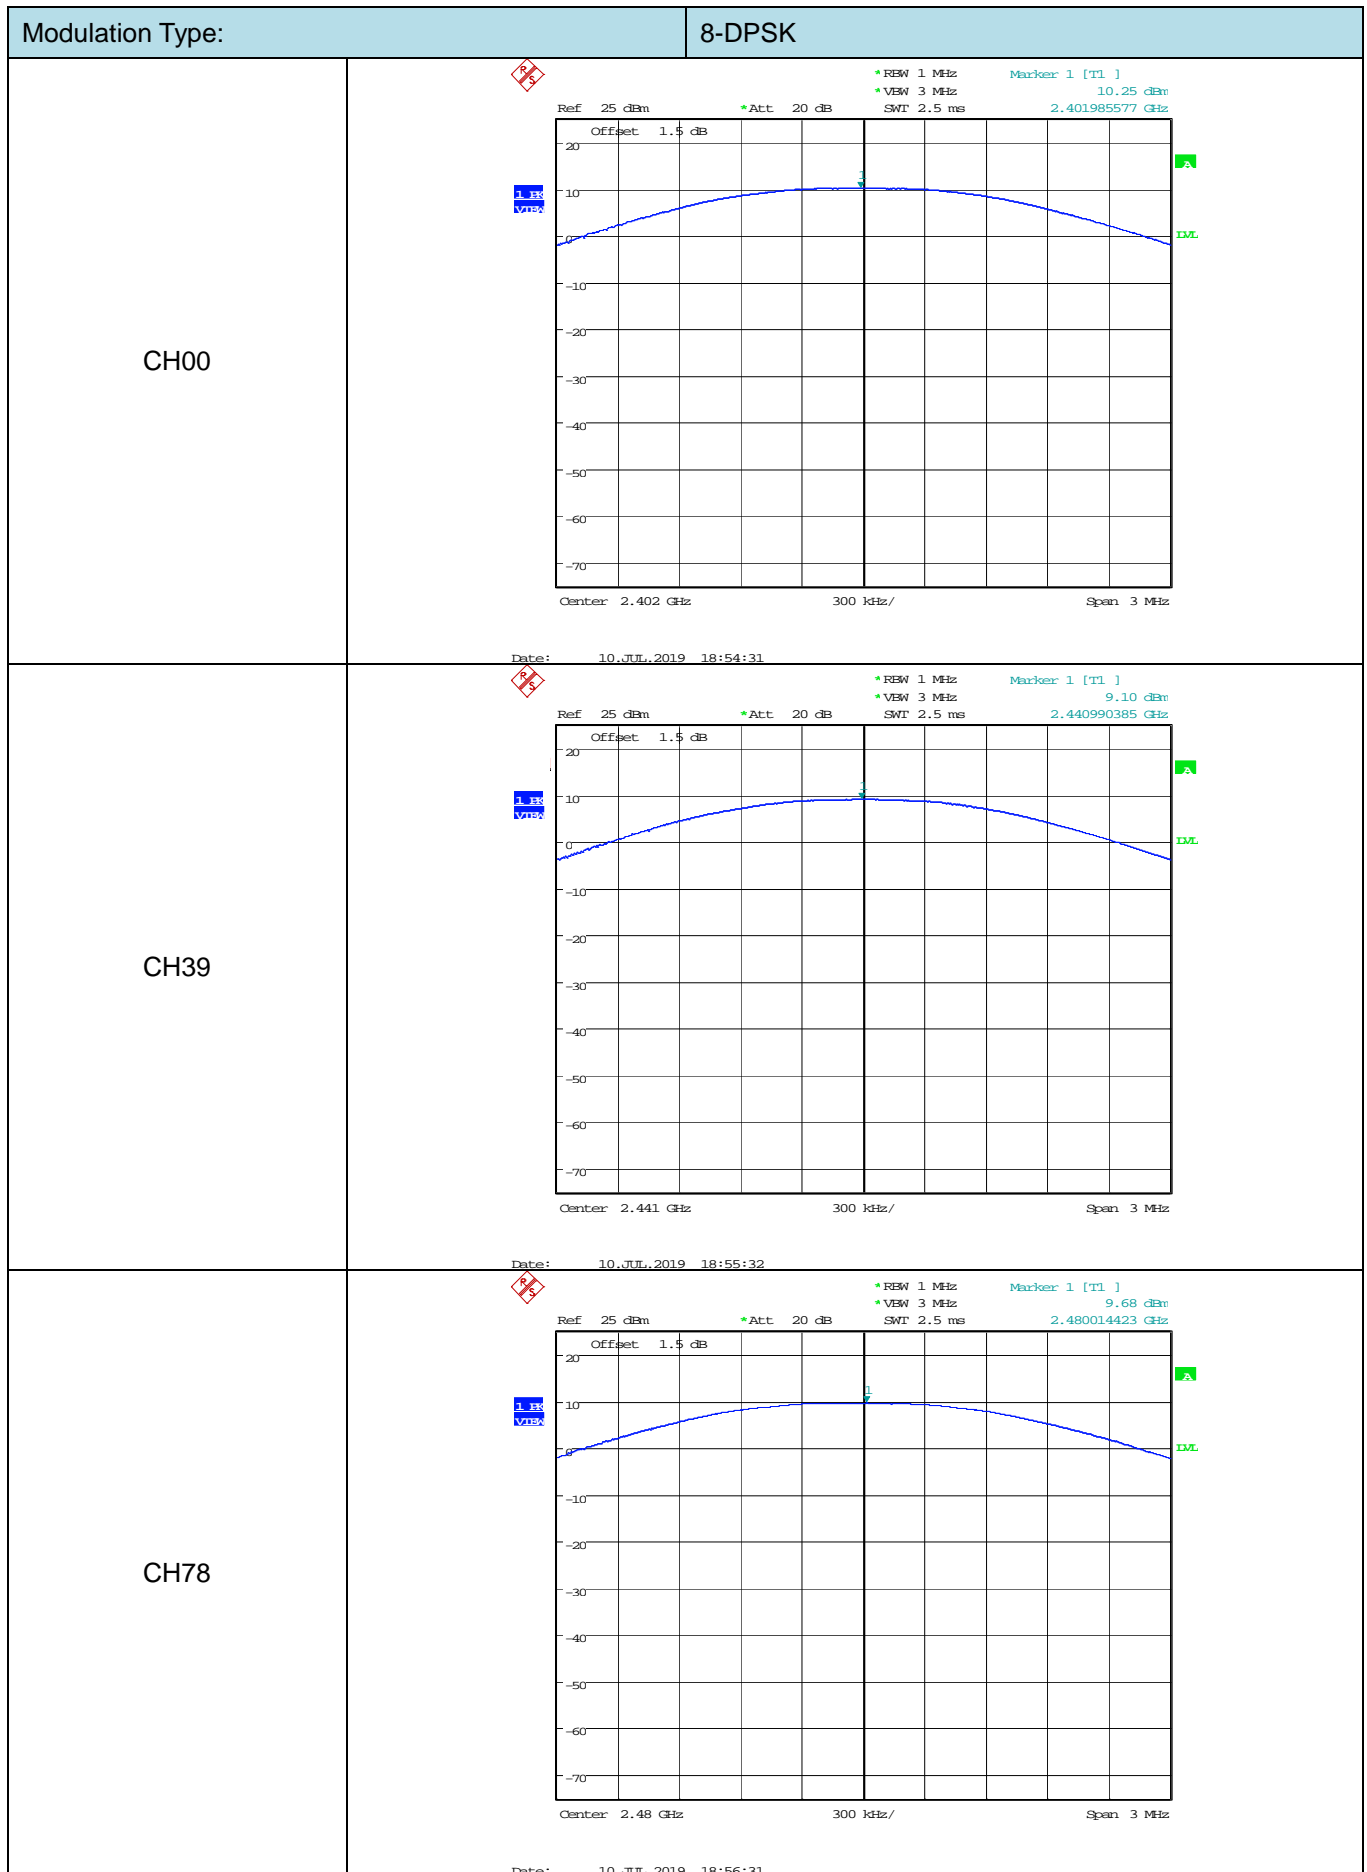

CTC Laboratories, Inc.

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



3.9. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.