

FCC PART 15.247

TEST REPORT

For

Iconnect

No.9, Aly. 58, Ln. 112, Ruiguang Rd., Neihu Dist., Taipei City, Taiwan

FCC ID: 2AB879331

Report Type: Original Report	Product Type: 802.11n Long-Range outdoor AP/CPE
Test Engineer: Ares Liu	<i>Ares Liu</i>
Report Number: R2DG140113004-00	
Report Date: 2014-02-24	
Reviewed By: Ivan Cao RF Leader	<i>Ivan Cao</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	37

APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	38
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	45
FCC §15.247(e) - POWER SPECTRAL DENSITY	50
APPLICABLE STANDARD	50
TEST PROCEDURE	50
TEST EQUIPMENT LIST AND DETAILS.....	50
TEST DATA	50
DECLARATION LETTER	58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Iconnect's* product, model number: *Tube2H (FCC ID: 2AB879331)* (the "EUT") in this report was a *802.11n Long-Range outdoor AP/CPE*, which was measured approximately: 4.8cm (L) x 4.4 cm (W) x 37.5 cm (H), rated input voltage: DC 24V from adapter.

Adapter information: ALFA
Model: IVP2400-0700
Input: AC 100-240V, 50/60Hz, 0.8A
Output: DC 24.0V, 0.7A

Note: The series product, model Tube2H, Tube, Tube2, Tube5, Tube5H are electrically identical, the difference between them is just the model name, we selected Tube2H for fully testing, the details was explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 140113004 (Assigned by BACL.Dongguan). The EUT was received on 2014-01-16*

Objective

This report is prepared on behalf of *Iconnect* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. For 2.4GHz band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b and 802.11g modes were tested with Channel 1, 6 and 11.

For 802.11n40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

The test software: 'Atheros Radio Test 2' was used in testing, which was provided by manufacturer, and configured as following table:

Test Mode	Test Software Version	Atheros Radio Test 2		
802.11b	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	1Mbps	1Mbps	1Mbps
	Power Level Setting	23	23	23
802.11g	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	18	18	18
802.11n20	Test Frequency	2412MHz	2437MHz	2462MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	18	18	18
802.11n40	Test Frequency	2422MHz	2437MHz	2452MHz
	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	18	18	18


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop 1	PP11L	QDS-BRCM1017
DELL	Laptop 2	PP11L	QDS-BRCM2081

External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	1.0	Adapter	EUT
RJ45 Cable	No	No	10	EUT	Laptop
RJ45 Cable	No	No	10	Adapter	Laptop

Block Diagram of Test Setup

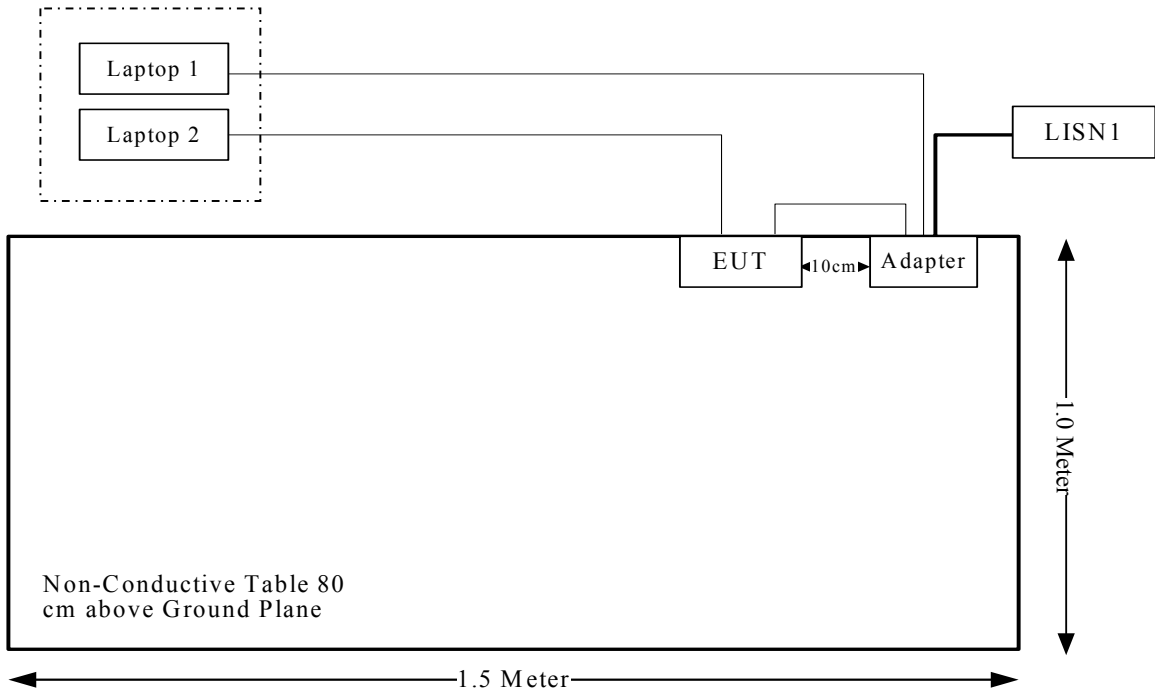

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2462	5	3.16	21.62	145.21	20	0.091	1.0
802.11g	2412	5	3.16	21.23	132.74	20	0.084	1.0
802.11n ht20	2412	5	3.16	21.26	133.66	20	0.084	1.0
802.11n ht40	2437	5	3.16	21.07	127.94	20	0.081	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT must be professionally installed, and the installer shall be responsible for verifying that the correct antenna is employed with the EUT, that compliance with the section, the maximum gain is 5.0 dBi, please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2:2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

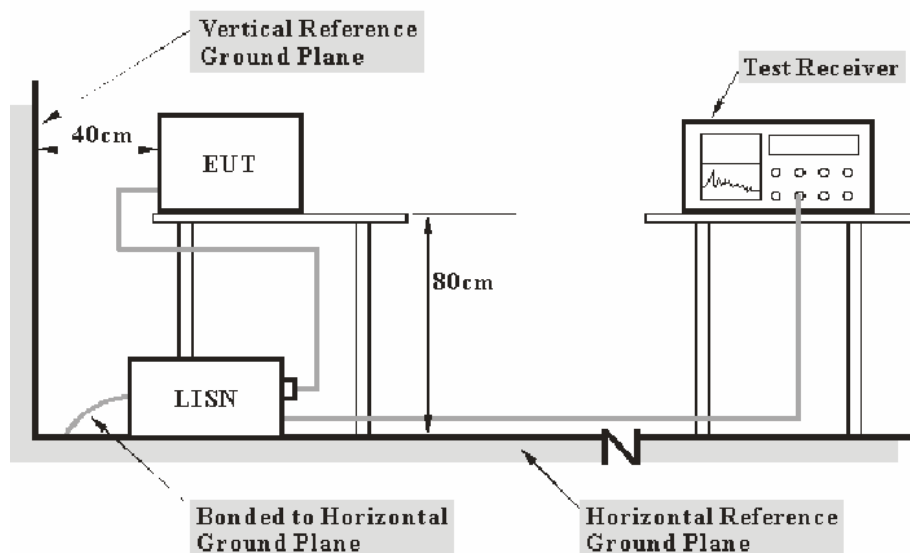

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2014-01-22	2015-01-21
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

9.20 dB at 13.420 MHz in the **Line** conducted mode


Test Data**Environmental Conditions**

Temperature:	19.9 °C
Relative Humidity:	37 %
ATM Pressure:	102 kPa

The testing was performed by Ares Liu on 2014-01-24.

Test Mode: Transmitting

120 V, 60 Hz, Line:

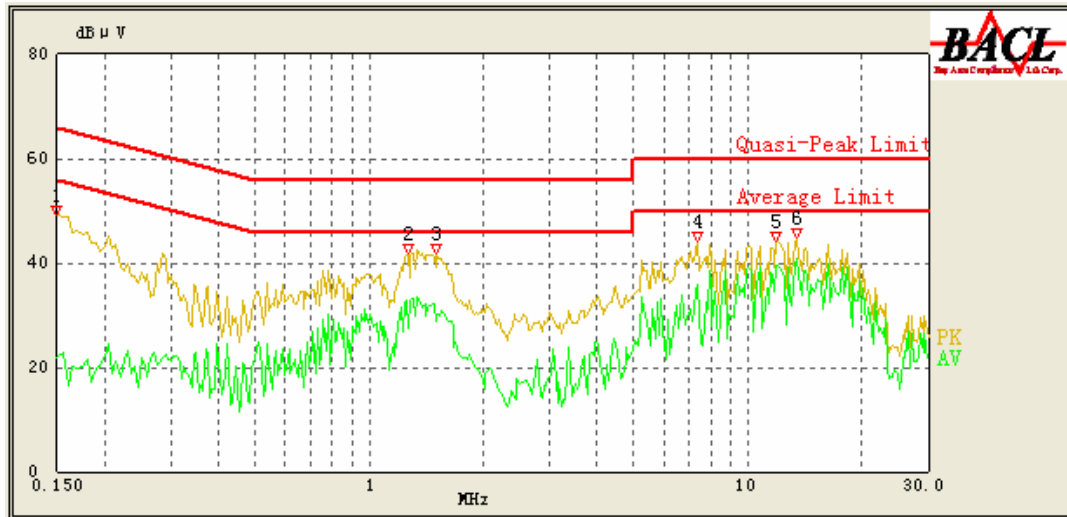

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.150	42.61	9.51	66.00	23.39	QP
0.150	21.97	9.51	56.00	34.03	AV
1.265	39.16	9.72	56.00	16.84	QP
1.260	32.67	9.72	46.00	13.33	AV
1.505	37.98	9.72	56.00	18.02	QP
1.505	30.05	9.72	46.00	15.95	AV
7.375	39.69	9.84	60.00	20.31	QP
7.375	35.76	9.84	50.00	14.24	AV
11.890	42.34	9.85	60.00	17.66	QP
11.890	39.54	9.85	50.00	10.46	AV
13.420	43.76	9.86	60.00	16.24	QP
13.420	40.80	9.86	50.00	9.20	AV

120 V, 60 Hz, Neutral:

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.155	41.69	9.82	65.73	24.04	QP
0.155	25.17	9.82	55.73	30.56	AV
1.240	38.20	9.80	56.00	17.80	QP
1.240	33.56	9.80	46.00	12.44	AV
1.480	38.17	9.77	56.00	17.83	QP
1.480	30.97	9.77	46.00	15.03	AV
7.310	38.41	9.84	60.00	21.59	QP
7.310	33.91	9.84	50.00	16.09	AV
7.925	41.45	9.84	60.00	18.55	QP
7.925	38.08	9.84	50.00	11.92	AV
13.420	43.30	9.86	60.00	16.70	QP
13.420	40.56	9.86	50.00	9.44	AV

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cispr}

Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

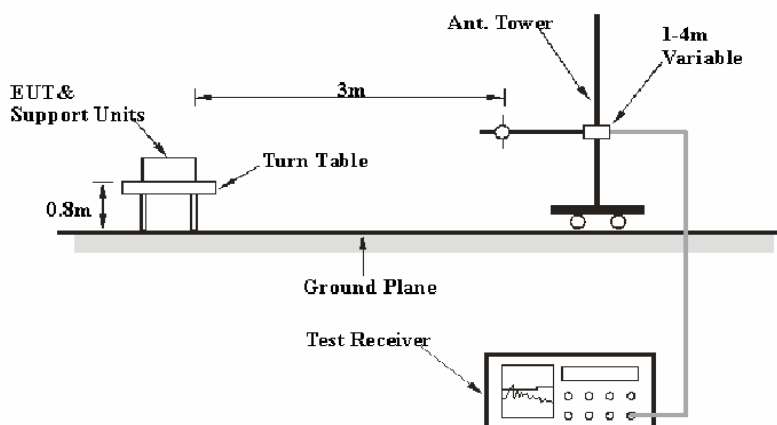

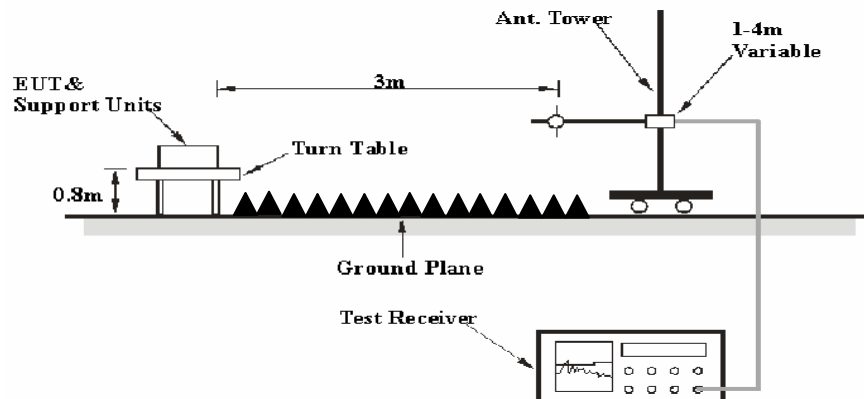Above 1GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2013-05-06	2014-05-05
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
R&S	Spectrum Analyzer	FSEM	DE31388	2013-05-07	2014-05-06
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-18
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2013-06-16	2014-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2013-09-06	2014-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

2.88 dB at 2390.0 MHz in the Vertical polarization for 802.11b Mode

Test Data

Environmental Conditions

Temperature:	20.4 °C
Relative Humidity:	53 %
ATM Pressure:	102 kPa

The testing was performed by Ares Liu on 2014-02-21.

Mode: Transmitting
802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	69.55	PK	H	25.67	4.42	0.00	99.64	N/A	N/A
2412	64.71	AV	H	25.67	4.42	0.00	94.80	N/A	N/A
2412	82.58	PK	V	25.67	4.42	0.00	112.67	N/A	N/A
2412	77.4	AV	V	25.67	4.42	0.00	107.49	N/A	N/A
2390	32.55	PK	V	25.61	4.39	0.00	62.55	74.00	11.45
2390	21.12	AV	V	25.61	4.39	0.00	51.12	54.00	2.88 *
4824	39.71	PK	V	30.64	6.03	27.26	49.12	74.00	24.88
4824	35.36	AV	V	30.64	6.03	27.26	44.77	54.00	9.23
7236	38.11	PK	V	34.17	7.47	26.36	53.39	74.00	20.61
7236	30.33	AV	V	34.17	7.47	26.36	45.61	54.00	8.39
9648	34.47	PK	V	36.06	8.81	26.06	53.28	74.00	20.72
9648	26.38	AV	V	36.06	8.81	26.06	45.19	54.00	8.81
1597	32.53	PK	V	23.79	3.23	26.90	32.65	74.00	41.35
1597	18.97	AV	V	23.79	3.23	26.90	19.09	54.00	34.91
371.4	35.4	QP	V	15.68	2.34	21.70	31.72	46.00	14.28
Middle Channel: 2437 MHz									
2437	69.64	PK	H	25.74	4.41	0.00	99.79	N/A	N/A
2437	64.77	AV	H	25.74	4.41	0.00	94.92	N/A	N/A
2437	82.65	PK	V	25.74	4.41	0.00	112.80	N/A	N/A
2437	77.41	AV	V	25.74	4.41	0.00	107.56	N/A	N/A
4874	40.73	PK	V	30.77	6.09	27.26	50.33	74.00	23.67
4874	35.21	AV	V	30.77	6.09	27.26	44.81	54.00	9.19
7311	37.94	PK	V	34.35	7.51	26.51	53.29	74.00	20.71
7311	30.26	AV	V	34.35	7.51	26.51	45.61	54.00	8.39
9748	34.58	PK	V	36.30	8.83	25.68	54.03	74.00	19.97
9748	26.47	AV	V	36.30	8.83	25.68	45.92	54.00	8.08
1597	33.27	PK	V	23.79	3.23	26.90	33.39	74.00	40.61
1597	19.04	AV	V	23.79	3.23	26.90	19.16	54.00	34.84
3004	32.86	PK	V	27.21	7.41	27.48	40.00	74.00	34.00
3004	18.75	AV	V	27.21	7.41	27.48	25.89	54.00	28.11
371.6	34.9	QP	V	15.69	2.34	21.70	31.23	46.00	14.77
High Channel: 2462 MHz									
2462	69.76	PK	H	25.80	4.43	0.00	99.99	N/A	N/A
2462	64.83	AV	H	25.80	4.43	0.00	95.06	N/A	N/A
2462	82.81	PK	V	25.80	4.43	0.00	113.04	N/A	N/A
2462	77.63	AV	V	25.80	4.43	0.00	107.86	N/A	N/A
2483.5	33.12	PK	V	25.86	4.49	0.00	63.47	74.00	10.53
2483.5	18.8	AV	V	25.86	4.49	0.00	49.15	54.00	4.85
4924	40.4	PK	V	30.90	5.97	27.27	50.00	74.00	24.00
4924	34.87	AV	V	30.90	5.97	27.27	44.47	54.00	9.53
7386	37.46	PK	V	34.53	7.55	26.66	52.88	74.00	21.12
7386	30.13	AV	V	34.53	7.55	26.66	45.55	54.00	8.45
9848	34.18	PK	V	36.54	8.85	25.49	54.08	74.00	19.92
9848	26.04	AV	V	36.54	8.85	25.49	45.94	54.00	8.06
1597	32.81	PK	V	23.79	3.23	26.90	32.93	74.00	41.07
1597	18.69	AV	V	23.79	3.23	26.90	18.81	54.00	35.19
371.4	35.1	QP	V	15.68	2.34	21.70	31.42	46.00	14.58

*Within measurement uncertainty!

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	64.55	PK	H	25.67	4.42	0.00	94.64	N/A	N/A
2412	50.61	AV	H	25.67	4.42	0.00	80.70	N/A	N/A
2412	80.72	PK	V	25.67	4.42	0.00	110.81	N/A	N/A
2412	67.67	AV	V	25.67	4.42	0.00	97.76	N/A	N/A
2390	34.48	PK	V	25.61	4.39	0.00	64.48	74.00	9.52
2390	20.34	AV	V	25.61	4.39	0.00	50.34	54.00	3.66 *
4824	37.25	PK	V	30.64	6.03	27.26	46.66	74.00	27.34
4824	21.28	AV	V	30.64	6.03	27.26	30.69	54.00	23.31
7236	34.16	PK	V	34.17	7.47	26.36	49.44	74.00	24.56
7236	18.77	AV	V	34.17	7.47	26.36	34.05	54.00	19.95
9648	33.71	PK	V	36.06	8.81	26.06	52.52	74.00	21.48
9648	18.62	AV	V	36.06	8.81	26.06	37.43	54.00	16.57
1597	32.54	PK	V	23.79	3.23	26.90	32.66	74.00	41.34
1597	18.43	AV	V	23.79	3.23	26.90	18.55	54.00	35.45
371.5	34.3	QP	V	15.69	2.34	21.70	30.63	46.00	15.37
Middle Channel: 2437 MHz									
2437	64.47	PK	H	25.74	4.41	0.00	94.62	N/A	N/A
2437	50.79	AV	H	25.74	4.41	0.00	80.94	N/A	N/A
2437	80.38	PK	V	25.74	4.41	0.00	110.53	N/A	N/A
2437	67.83	AV	V	25.74	4.41	0.00	97.98	N/A	N/A
4874	37.14	PK	V	30.77	6.09	27.26	46.74	74.00	27.26
4874	21.43	AV	V	30.77	6.09	27.26	31.03	54.00	22.97
7311	34.06	PK	V	34.35	7.51	26.51	49.41	74.00	24.59
7311	18.53	AV	V	34.35	7.51	26.51	33.88	54.00	20.12
9748	33.81	PK	V	36.30	8.83	25.68	53.26	74.00	20.74
9748	18.74	AV	V	36.30	8.83	25.68	38.19	54.00	15.81
1597	32.51	PK	V	23.79	3.23	26.90	32.63	74.00	41.37
1597	18.09	AV	V	23.79	3.23	26.90	18.21	54.00	35.79
3004	32.68	PK	V	27.21	7.41	27.48	39.82	74.00	34.18
3004	18.22	AV	V	27.21	7.41	27.48	25.36	54.00	28.64
372.1	34.1	QP	V	15.69	2.34	21.70	30.43	46.00	15.57
High Channel: 2462 MHz									
2462	64.55	PK	H	25.80	4.43	0.00	94.78	N/A	N/A
2462	50.26	AV	H	25.80	4.43	0.00	80.49	N/A	N/A
2462	80.33	PK	V	25.80	4.43	0.00	110.56	N/A	N/A
2462	67.76	AV	V	25.80	4.43	0.00	97.99	N/A	N/A
2483.5	34.52	PK	V	25.86	4.49	0.00	64.87	74.00	9.13
2483.5	20.35	AV	V	25.86	4.49	0.00	50.70	54.00	3.30 *
4924	37.16	PK	V	30.90	5.97	27.27	46.76	74.00	27.24
4924	21.13	AV	V	30.90	5.97	27.27	30.73	54.00	23.27
7386	34.19	PK	V	34.53	7.55	26.66	49.61	74.00	24.39
7386	18.86	AV	V	34.53	7.55	26.66	34.28	54.00	19.72
9848	33.76	PK	V	36.54	8.85	25.49	53.66	74.00	20.34
9848	18.63	AV	V	36.54	8.85	25.49	38.53	54.00	15.47
1597	32.16	PK	V	23.79	3.23	26.90	32.28	74.00	41.72
1597	18.27	AV	V	23.79	3.23	26.90	18.39	54.00	35.61
371.6	34.5	QP	V	15.69	2.34	21.70	30.83	46.00	15.17

*Within measurement uncertainty!

802.11 n20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2412 MHz									
2412	64.49	PK	H	25.67	4.42	0.00	94.58	N/A	N/A
2412	50.73	AV	H	25.67	4.42	0.00	80.82	N/A	N/A
2412	80.66	PK	V	25.67	4.42	0.00	110.75	N/A	N/A
2412	67.33	AV	V	25.67	4.42	0.00	97.42	N/A	N/A
2390	34.6	PK	V	25.61	4.39	0.00	64.60	74.00	9.40
2390	20.01	AV	V	25.61	4.39	0.00	50.01	54.00	3.99 *
4824	37.32	PK	V	30.64	6.03	27.26	46.73	74.00	27.27
4824	21.14	AV	V	30.64	6.03	27.26	30.55	54.00	23.45
7236	33.81	PK	V	34.17	7.47	26.36	49.09	74.00	24.91
7236	18.57	AV	V	34.17	7.47	26.36	33.85	54.00	20.15
9648	33.38	PK	V	36.06	8.81	26.06	52.19	74.00	21.81
9648	18.73	AV	V	36.06	8.81	26.06	37.54	54.00	16.46
1597	32.65	PK	V	23.79	3.23	26.90	32.77	74.00	41.23
1597	18.3	AV	V	23.79	3.23	26.90	18.42	54.00	35.58
371.5	33.9	QP	V	15.69	2.34	21.70	30.23	46.00	15.77
Middle Channel: 2437 MHz									
2437	64.53	PK	H	25.74	4.41	0.00	94.68	N/A	N/A
2437	50.46	AV	H	25.74	4.41	0.00	80.61	N/A	N/A
2437	80.24	PK	V	25.74	4.41	0.00	110.39	N/A	N/A
2437	68.01	AV	V	25.74	4.41	0.00	98.16	N/A	N/A
4874	37.03	PK	V	30.77	6.09	27.26	46.63	74.00	27.37
4874	21.1	AV	V	30.77	6.09	27.26	30.70	54.00	23.30
7311	33.91	PK	V	34.35	7.51	26.51	49.26	74.00	24.74
7311	18.64	AV	V	34.35	7.51	26.51	33.99	54.00	20.01
9748	33.48	PK	V	36.30	8.83	25.68	52.93	74.00	21.07
9748	18.36	AV	V	36.30	8.83	25.68	37.81	54.00	16.19
1597	32.34	PK	V	23.79	3.23	26.90	32.46	74.00	41.54
1597	18.23	AV	V	23.79	3.23	26.90	18.35	54.00	35.65
3004	32.49	PK	V	27.21	7.41	27.48	39.63	74.00	34.37
3004	18.36	AV	V	27.21	7.41	27.48	25.50	54.00	28.50
371.8	34.1	QP	V	15.69	2.34	21.70	30.43	46.00	15.57
High Channel: 2462 MHz									
2462	64.6	PK	H	25.80	4.43	0.00	94.83	N/A	N/A
2462	50.3	AV	H	25.80	4.43	0.00	80.53	N/A	N/A
2462	80.12	PK	V	25.80	4.43	0.00	110.35	N/A	N/A
2462	67.95	AV	V	25.80	4.43	0.00	98.18	N/A	N/A
2483.5	34.35	PK	V	25.86	4.49	0.00	64.70	74.00	9.30
2483.5	20.36	AV	V	25.86	4.49	0.00	50.71	54.00	3.29 *
4924	36.9	PK	V	30.90	5.97	27.27	46.50	74.00	27.50
4924	20.76	AV	V	30.90	5.97	27.27	30.36	54.00	23.64
7386	34.11	PK	V	34.53	7.55	26.66	49.53	74.00	24.47
7386	18.9	AV	V	34.53	7.55	26.66	34.32	54.00	19.68
9848	33.39	PK	V	36.54	8.85	25.49	53.29	74.00	20.71
9848	18.79	AV	V	36.54	8.85	25.49	38.69	54.00	15.31
1597	31.82	PK	V	23.79	3.23	26.90	31.94	74.00	42.06
1597	18.39	AV	V	23.79	3.23	26.90	18.51	54.00	35.49
371.4	34.5	QP	V	15.68	2.34	21.70	30.82	46.00	15.18

*Within measurement uncertainty!


802.11 n40 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2422 MHz									
2422	61.94	PK	H	25.70	4.41	0.00	92.05	N/A	N/A
2422	47.83	AV	H	25.70	4.41	0.00	77.94	N/A	N/A
2422	77.83	PK	V	25.70	4.41	0.00	107.94	N/A	N/A
2422	63.36	AV	V	25.70	4.41	0.00	93.47	N/A	N/A
2390	39.75	PK	V	25.61	4.39	0.00	69.75	74.00	4.25 *
2390	19.02	AV	V	25.61	4.39	0.00	49.02	54.00	4.98
4844	37.03	PK	V	30.69	6.08	27.26	46.54	74.00	27.46
4844	21.2	AV	V	30.69	6.08	27.26	30.71	54.00	23.29
7266	33.87	PK	V	34.24	7.48	26.42	49.17	74.00	24.83
7266	18.59	AV	V	34.24	7.48	26.42	33.89	54.00	20.11
9688	33.69	PK	V	36.15	8.82	25.91	52.75	74.00	21.25
9688	18.51	AV	V	36.15	8.82	25.91	37.57	54.00	16.43
1597	32.28	PK	V	23.79	3.23	26.90	32.40	74.00	41.60
1597	18.6	AV	V	23.79	3.23	26.90	18.72	54.00	35.28
371.5	34.1	QP	V	15.69	2.34	21.70	30.43	46.00	15.57
Middle Channel: 2437 MHz									
2437	61.58	PK	H	25.74	4.41	0.00	91.73	N/A	N/A
2437	47.54	AV	H	25.74	4.41	0.00	77.69	N/A	N/A
2437	77.8	PK	V	25.74	4.41	0.00	107.95	N/A	N/A
2437	63.01	AV	V	25.74	4.41	0.00	93.16	N/A	N/A
4874	36.89	PK	V	30.77	6.09	27.26	46.49	74.00	27.51
4874	20.89	AV	V	30.77	6.09	27.26	30.49	54.00	23.51
7311	33.6	PK	V	34.35	7.51	26.51	48.95	74.00	25.05
7311	18.68	AV	V	34.35	7.51	26.51	34.03	54.00	19.97
9748	33.74	PK	V	36.30	8.83	25.68	53.19	74.00	20.81
9748	18.45	AV	V	36.30	8.83	25.68	37.90	54.00	16.10
1597	32.44	PK	V	23.79	3.23	26.90	32.56	74.00	41.44
1597	18.73	AV	V	23.79	3.23	26.90	18.85	54.00	35.15
3004	31.93	PK	V	27.21	7.41	27.48	39.07	74.00	34.93
3004	18.39	AV	V	27.21	7.41	27.48	25.53	54.00	28.47
371.6	34.3	QP	V	15.69	2.34	21.70	30.63	46.00	15.37
High Channel: 2452 MHz									
2452	62.13	PK	H	25.78	4.41	0.00	92.32	N/A	N/A
2452	47.73	AV	H	25.78	4.41	0.00	77.92	N/A	N/A
2452	77.69	PK	V	25.78	4.41	0.00	107.88	N/A	N/A
2452	63.12	AV	V	25.78	4.41	0.00	93.31	N/A	N/A
2483.5	39.6	PK	V	25.86	4.49	0.00	69.95	74.00	4.05 *
2483.5	19.2	AV	V	25.86	4.49	0.00	49.55	54.00	4.45 *
4904	36.75	PK	V	30.85	6.06	27.27	46.39	74.00	27.61
4904	20.99	AV	V	30.85	6.06	27.27	30.63	54.00	23.37
7356	33.57	PK	V	34.45	7.53	26.60	48.95	74.00	25.05
7356	18.27	AV	V	34.45	7.53	26.60	33.65	54.00	20.35
9808	33.37	PK	V	36.44	8.84	25.48	53.17	74.00	20.83
9808	18.61	AV	V	36.44	8.84	25.48	38.41	54.00	15.59
1597	32.27	PK	V	23.79	3.23	26.90	32.39	74.00	41.61
1597	18.64	AV	V	23.79	3.23	26.90	18.76	54.00	35.24
371.8	34.2	QP	V	15.69	2.34	21.70	30.53	46.00	15.47

*Within measurement uncertainty!


Conducted Spurious Emissions at Antenna Port

802.11b Low Channel

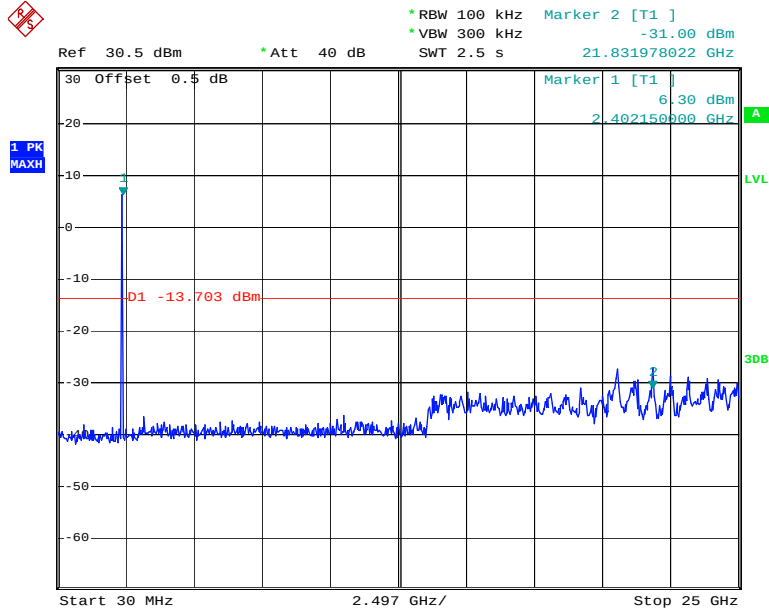


Date: 21.FEB.2014 11:28:59

802.11b Middle Channel

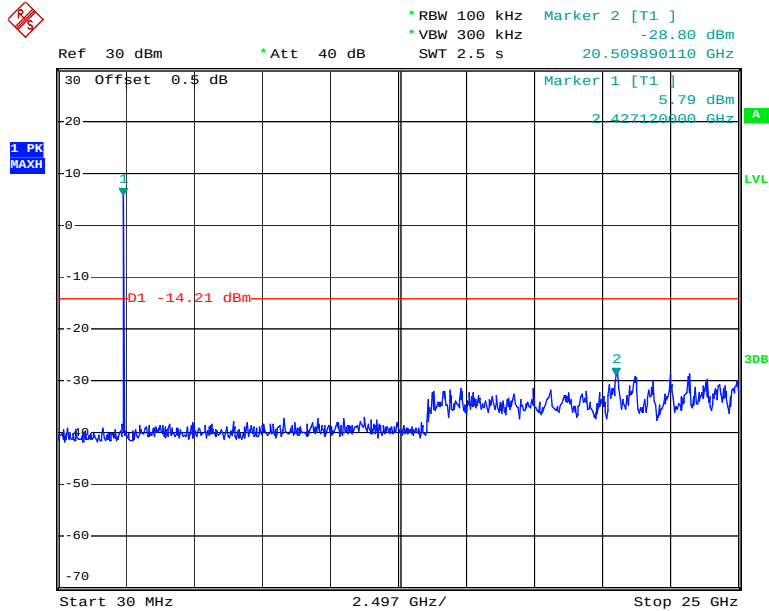


Date: 21.FEB.2014 11:31:42

802.11b High Channel

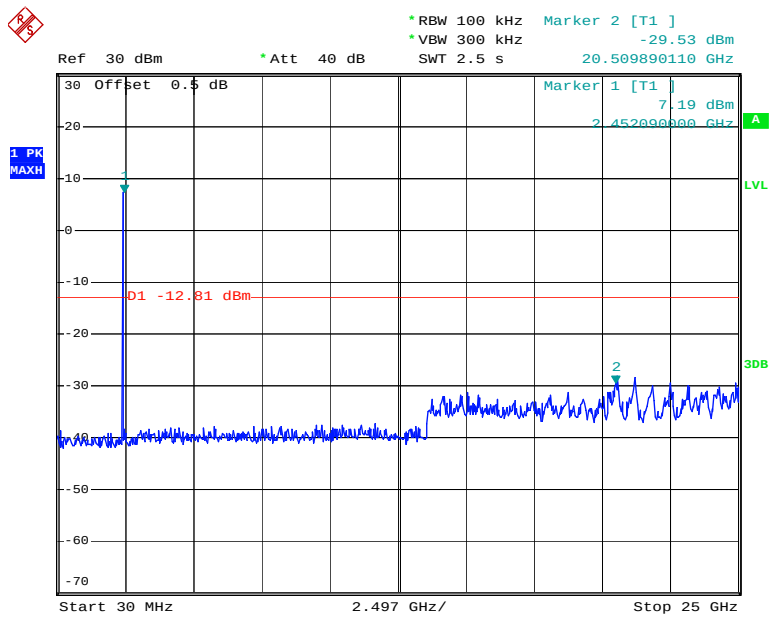


Date: 21.FEB.2014 11:33:00

802.11g Low Channel

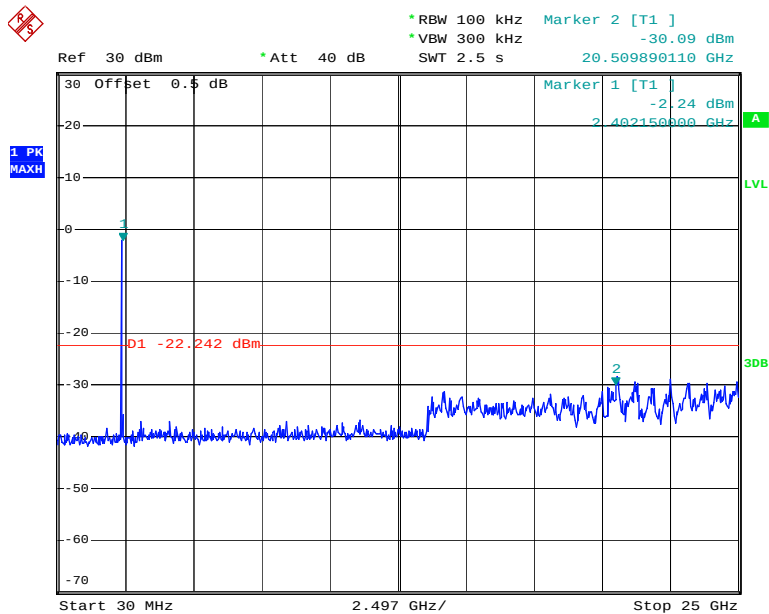


Date: 21.FEB.2014 11:38:25

802.11g Middle Channel

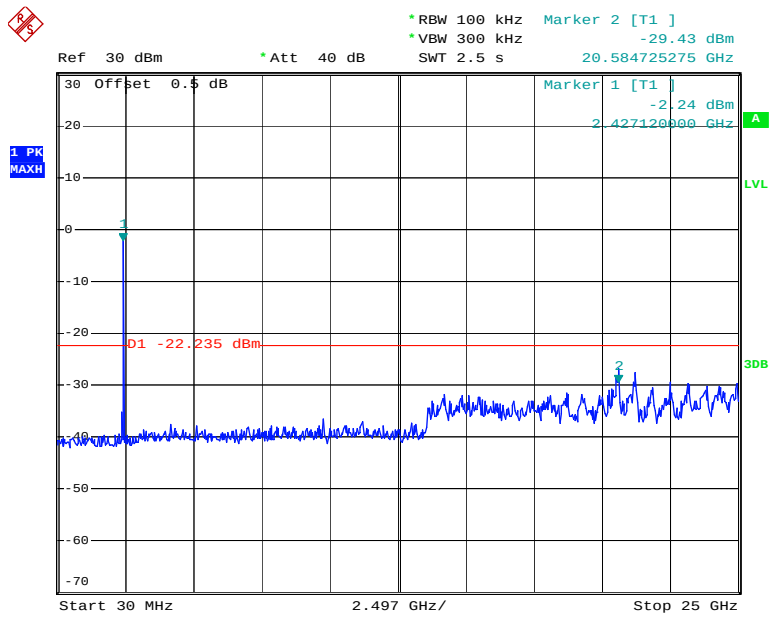


Date: 21.FEB.2014 11:40:05

802.11g High Channel

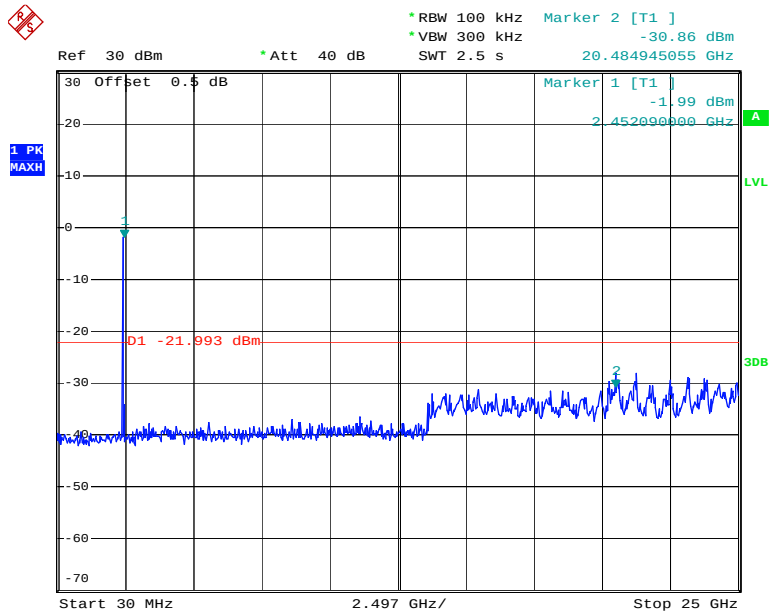


Date: 21.FEB.2014 11:41:29

802.11n20 Low Channel

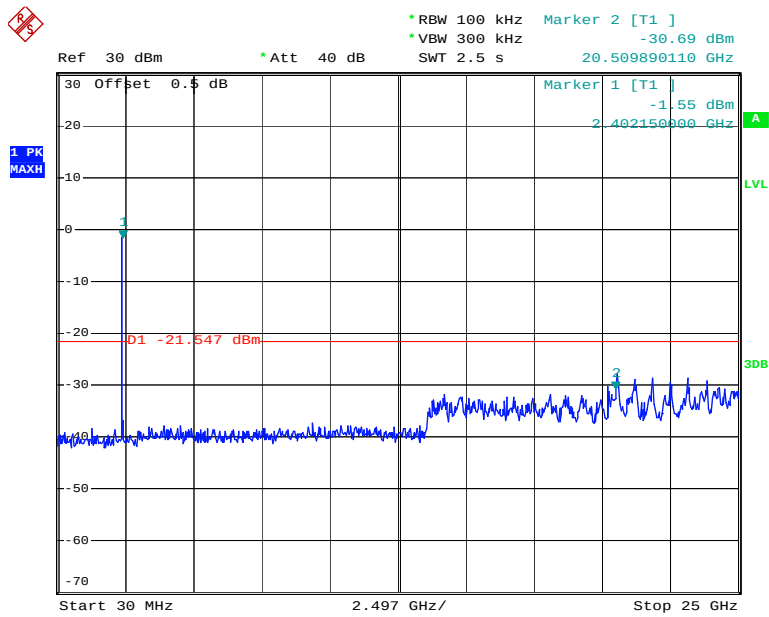


Date: 21.FEB.2014 11:43:16

802.11n20 Middle Channel

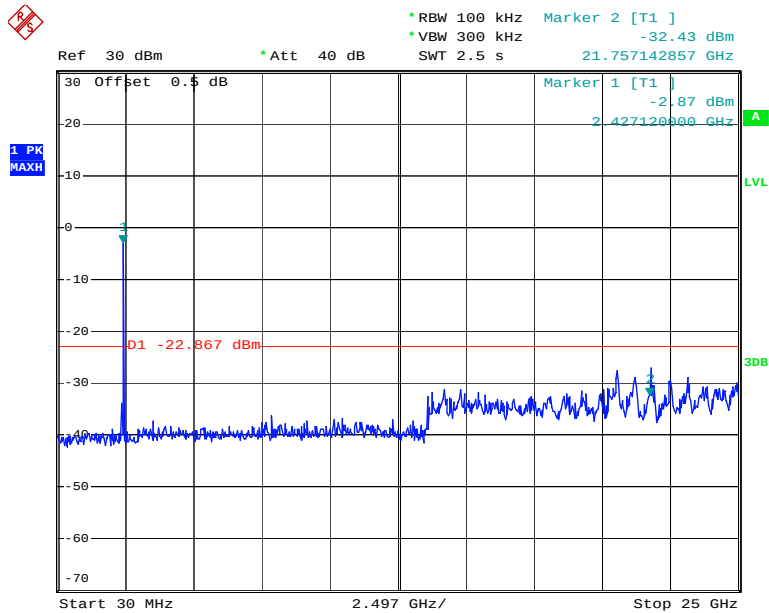


Date: 21.FEB.2014 11:44:53

802.11n20 High Channel

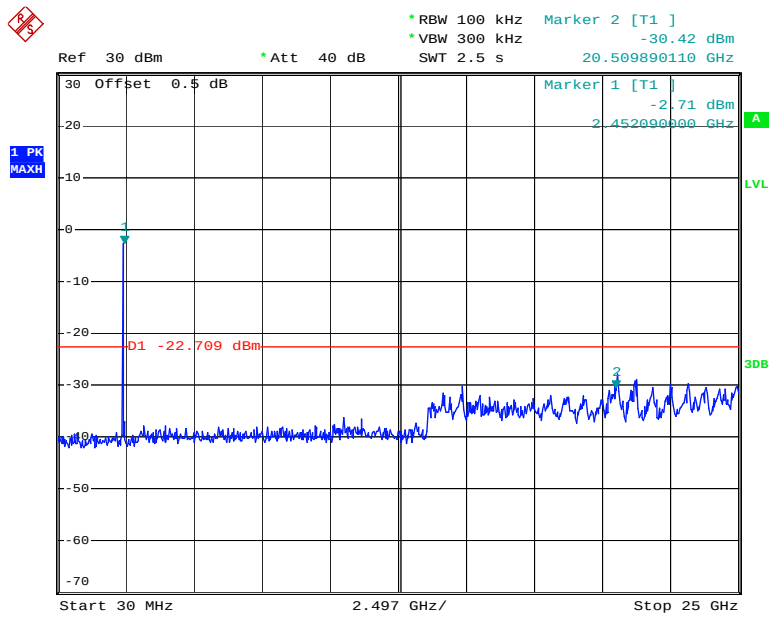


Date: 21.FEB.2014 11:46:07

802.11n40 Low Channel

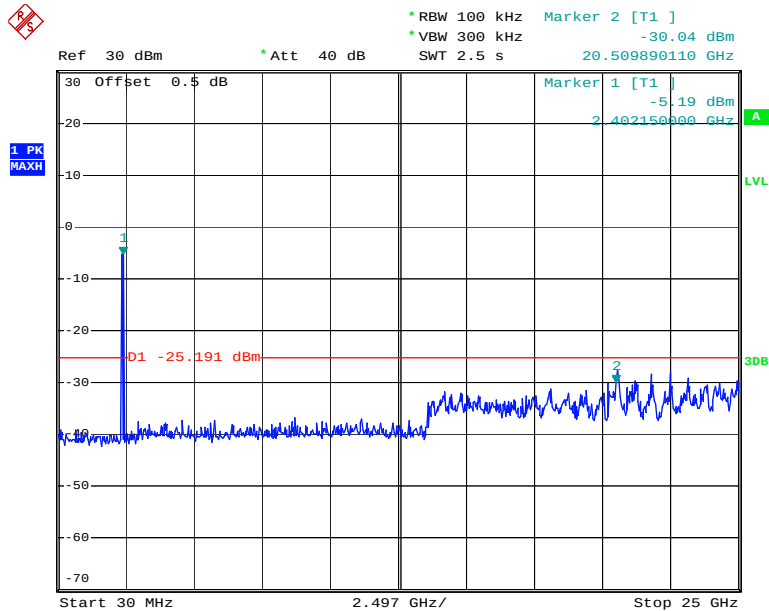


Date: 21.FEB.2014 12:59:13

802.11n40 Middle Channel

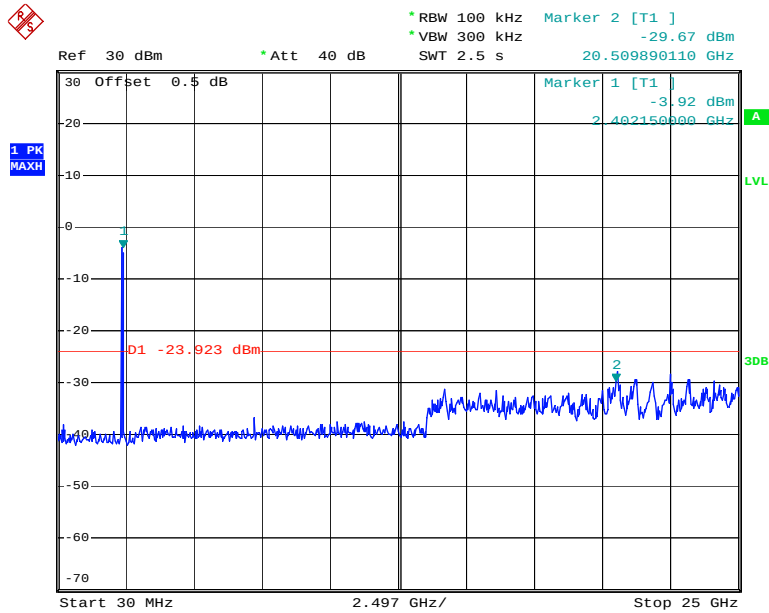

Date: 21.FEB.2014 13:00:56

802.11n40 High Channel

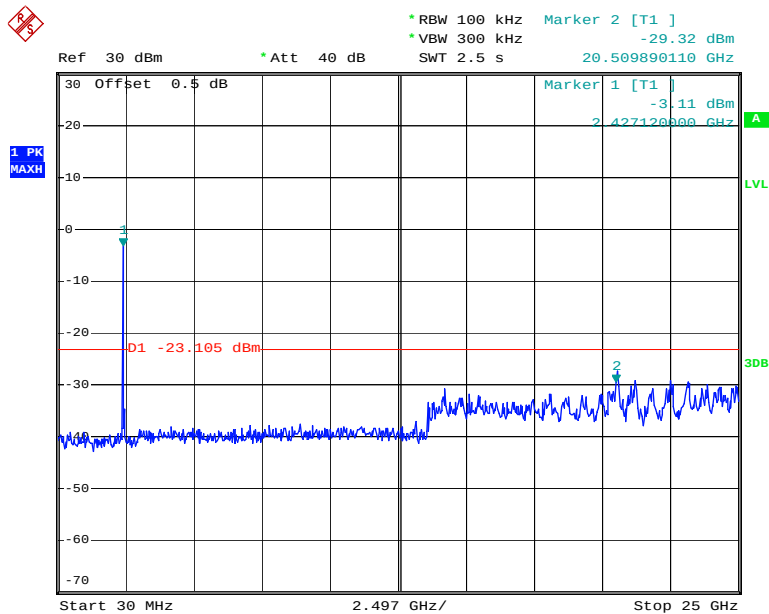


Date: 21.FEB.2014 13:03:23

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	20.7°C
Relative Humidity:	41 %
ATM Pressure:	102 kPa

* The testing was performed by Ares Liu on 2014-02-21.


Test Result: Pass.

Please refer to the following tables and plots.

Test Mode: Transmitting


Test Mode	Channel	Frequency	6 dB Bandwidth	Limit
		(MHz)	(MHz)	(kHz)
802.11b	Low	2412	10.14	>500
	Middle	2437	10.14	>500
	High	2462	10.19	>500
802.11g	Low	2412	16.43	>500
	Middle	2437	16.43	>500
	High	2462	16.43	>500
802.11n20	Low	2412	17.63	>500
	Middle	2437	17.73	>500
	High	2462	17.63	>500
802.11n40	Low	2422	36.56	>500
	Middle	2437	36.56	>500
	High	2452	36.56	>500

802.11b Low Channel

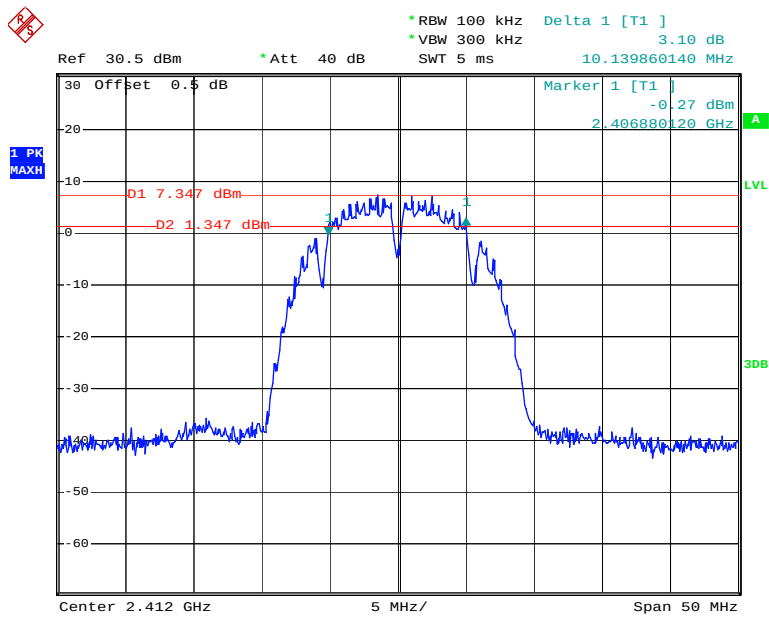


Date: 21.FEB.2014 11:27:56

802.11b Middle Channel

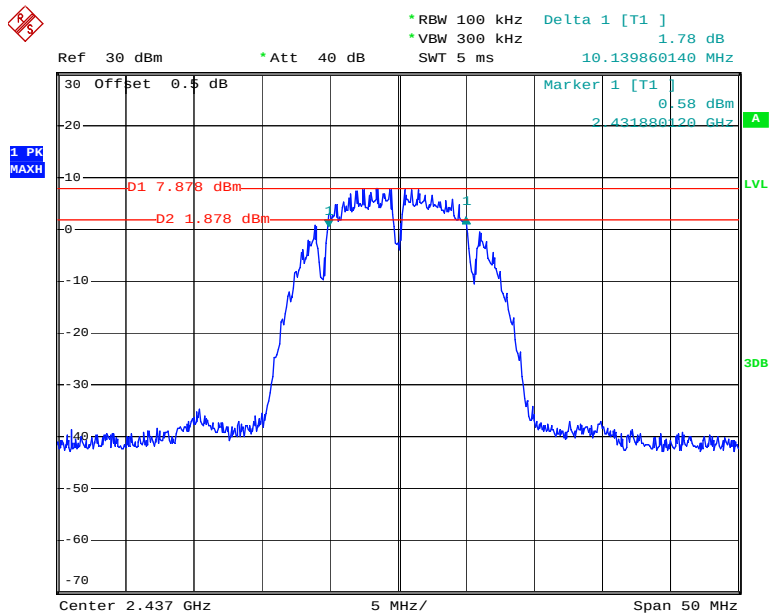


Date: 21.FEB.2014 11:30:51

802.11b High Channel

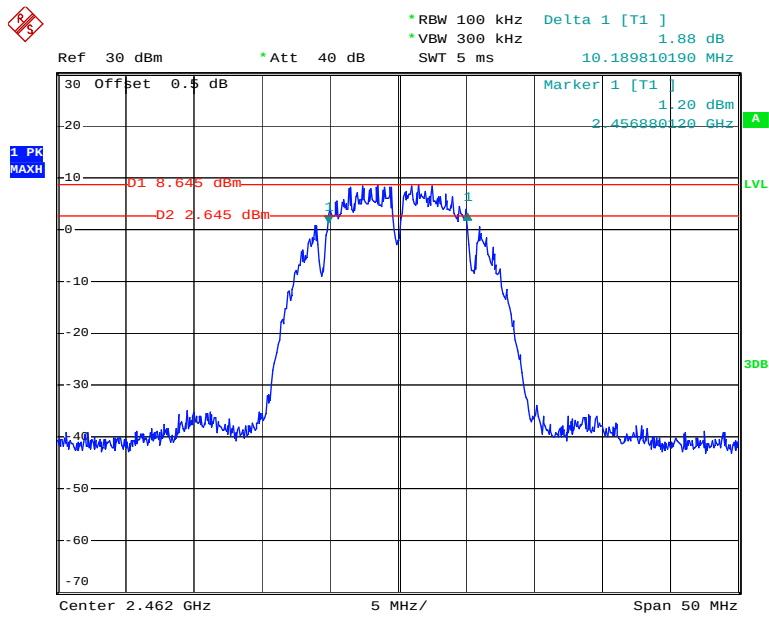

Date: 21.FEB.2014 11:32:24

802.11g Low Channel

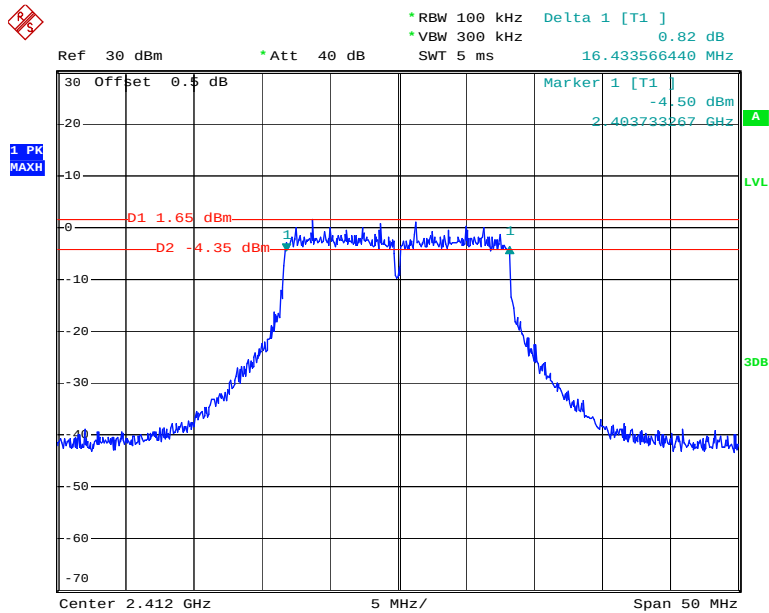

Date: 21.FEB.2014 11:37:40


Ref 30 dBm * Att 40 dB * RBW 100 kHz Delta 1 [T1] 1.38 dB
 * VBW 300 kHz SWT 5 ms 16.433566440 MHz

Marker 1 [T1] -5.32 dBm
 2.428733267 GHz

D1 1.213 dBm
 D2 -4.787 dBm


Center 2.437 GHz 5 MHz/ Span 50 MHz

802.11g High Channel

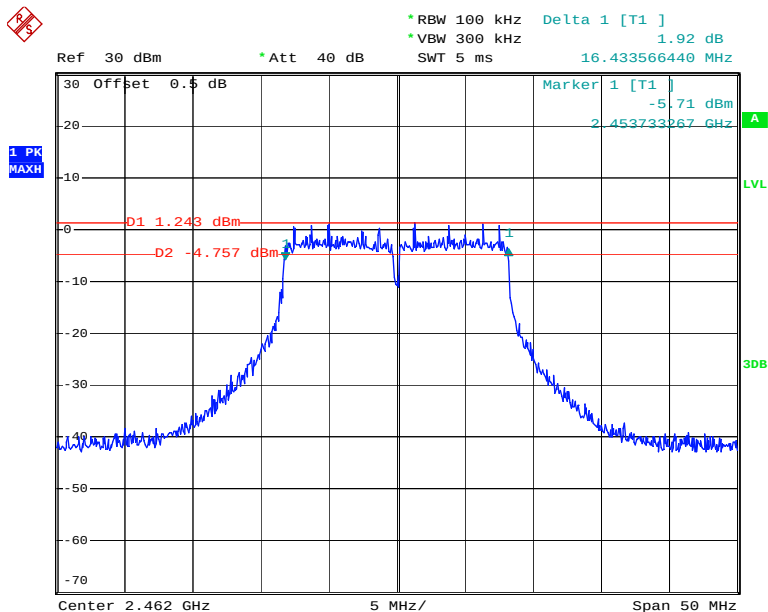


Page 33 of 58

802.11n20 Low Channel

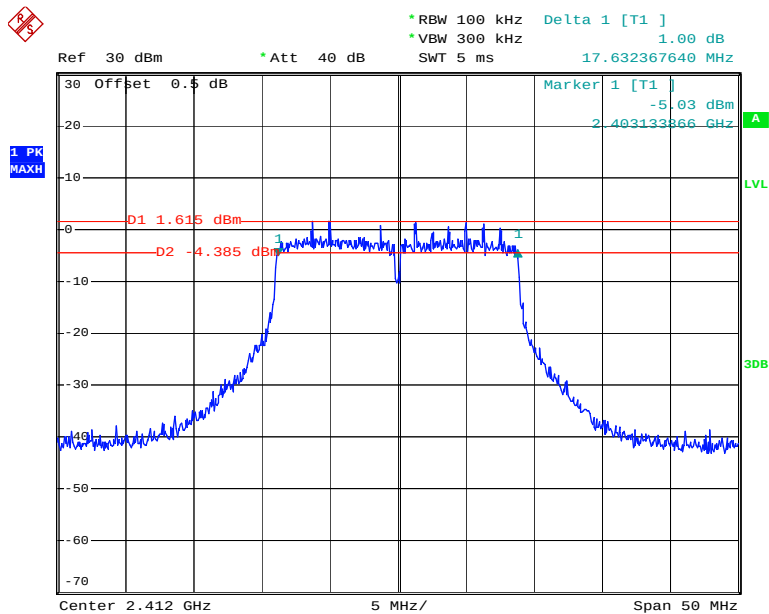


Date: 21.FEB.2014 11:42:28

802.11n20 Middle Channel

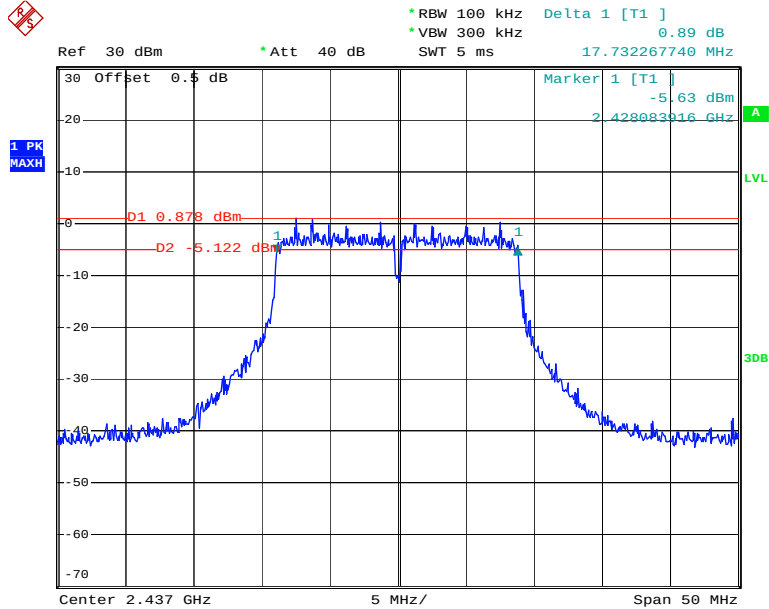


Date: 21.FEB.2014 11:44:05

802.11n20 High Channel

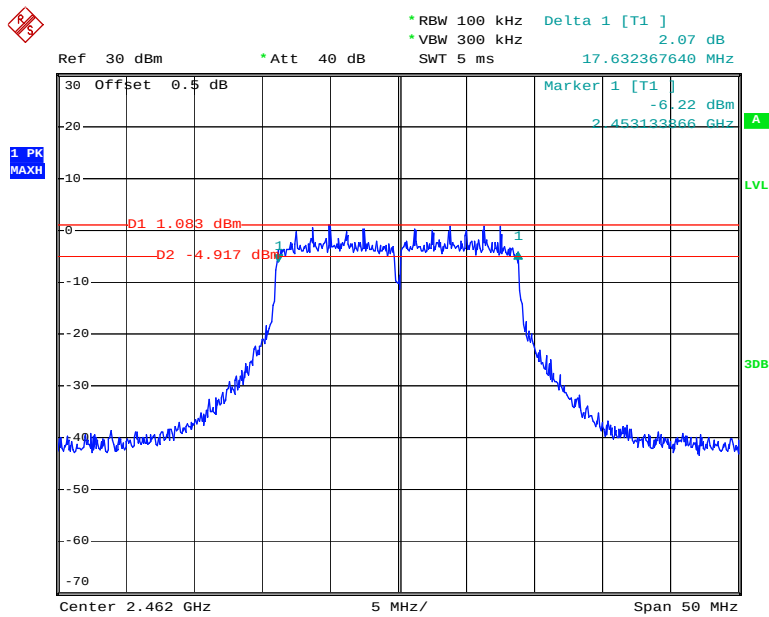


Date: 21.FEB.2014 11:45:26

802.11n40 Low Channel

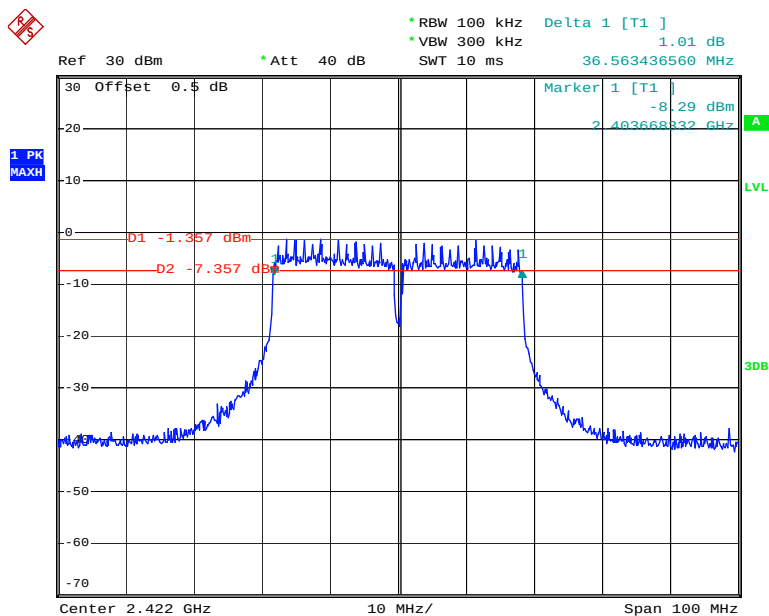


Date: 21.FEB.2014 11:49:19

802.11n40 Middle Channel

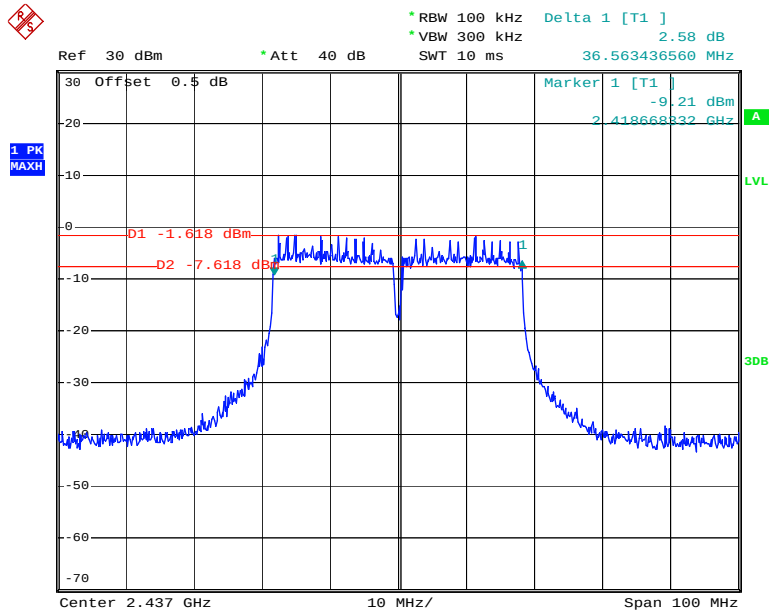

Date: 21.FEB.2014 12:59:56

802.11n40 High Channel

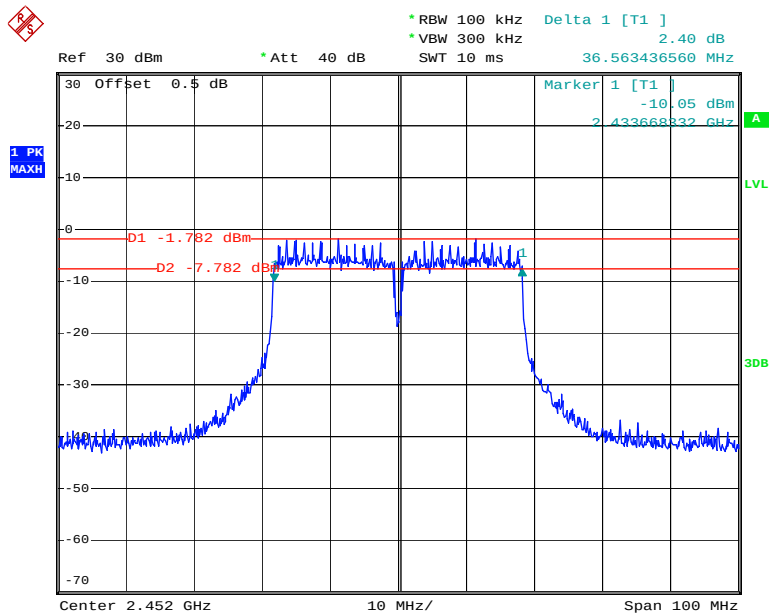

Date: 21.FEB.2014 13:02:23


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. According to KDB 558074 D01 DTS Meas Guidance v03r01, place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum Analyzer.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	20.7°C
Relative Humidity:	41 %
ATM Pressure:	102 kPa


* The testing was performed by Ares Liu on 2014-02-21

Test Mode: Transmitting

Test Mode	Channel	Frequency	Conducted Output Power	Limit	Result
		(MHz)	(dBm)	(dBm)	
802.11b	Low	2412	21.03	30	PASS
	Middle	2437	20.95	30	PASS
	High	2462	21.62	30	PASS
802.11g	Low	2412	21.23	30	PASS
	Middle	2437	20.92	30	PASS
	High	2462	20.99	30	PASS
802.11n20	Low	2412	21.26	30	PASS
	Middle	2437	20.89	30	PASS
	High	2462	20.83	30	PASS
802.11n40	Low	2422	21.04	30	PASS
	Middle	2437	21.07	30	PASS
	High	2452	20.86	30	PASS


Please refer to the following plots

802.11b RF Output Power, Low Channel

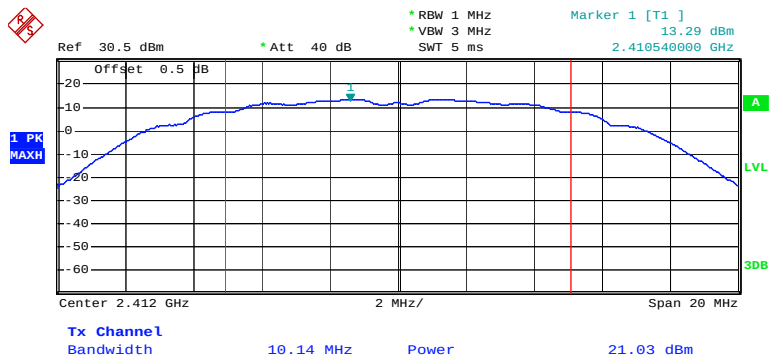


Date: 21.FEB.2014 11:28:37

802.11b RF Output Power, Middle Channel

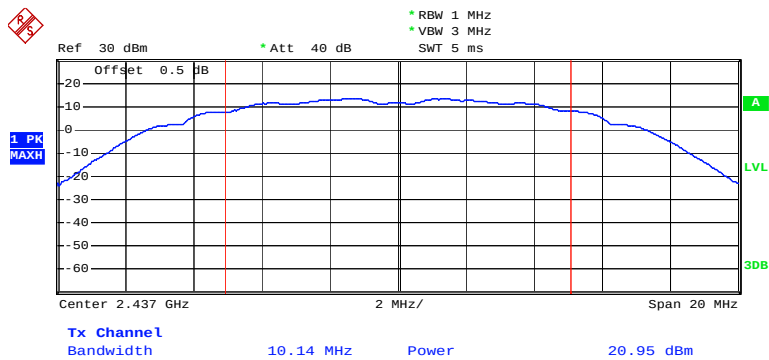


Date: 21.FEB.2014 11:31:20

802.11b RF Output Power, High Channel

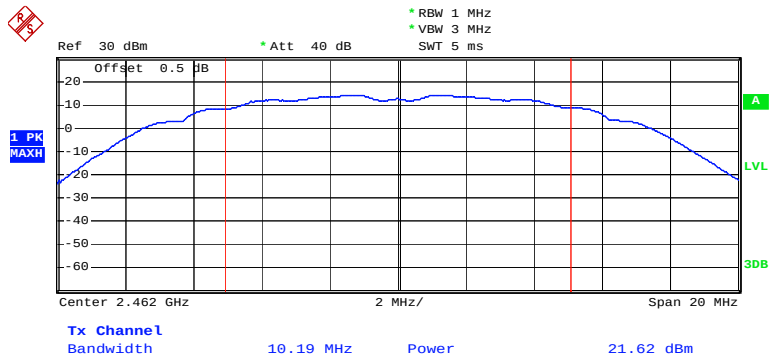


Date: 21.FEB.2014 11:32:39

802.11g RF Output Power, Low Channel

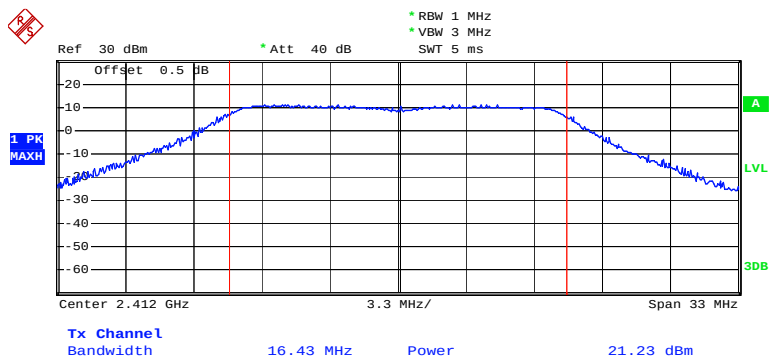


Date: 21.FEB.2014 11:37:59

802.11g RF Output Power, Middle Channel

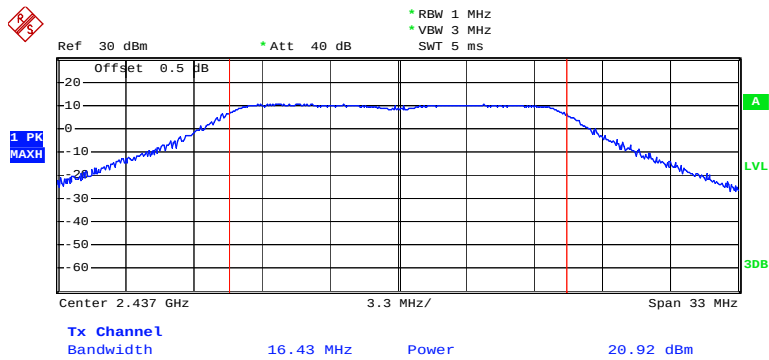


Date: 21.FEB.2014 11:39:39

802.11g RF Output Power, High Channel

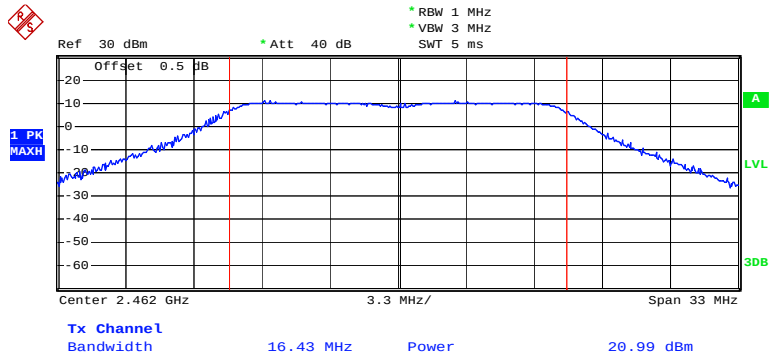


Date: 21.FEB.2014 11:41:03

802.11n20 RF Output Power, Low Channel

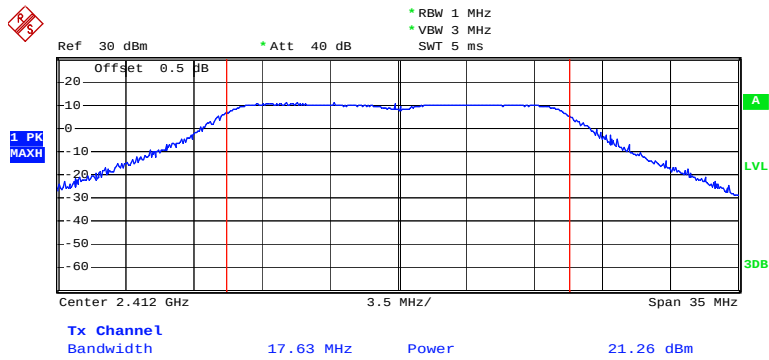


Date: 21.FEB.2014 11:42:50

802.11n20 RF Output Power, Middle Channel

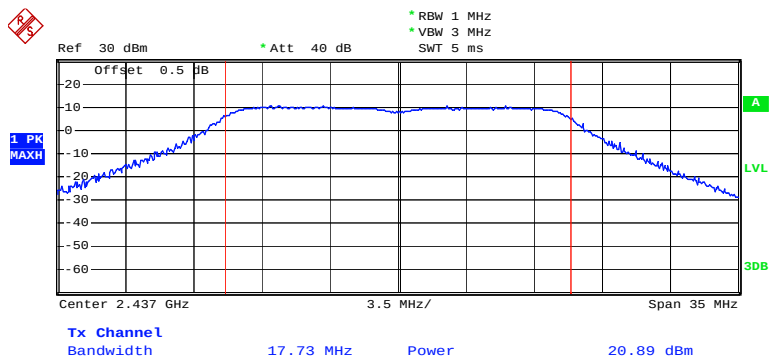


Date: 21.FEB.2014 11:44:26

802.11n20 RF Output Power, High Channel

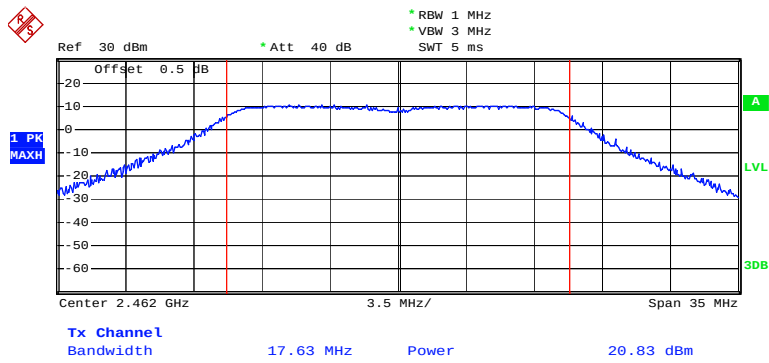


Date: 21.FEB.2014 11:45:41

802.11n40 RF Output Power, Low Channel

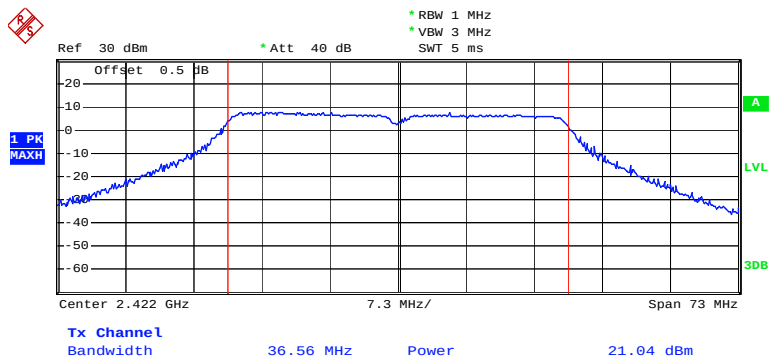


Date: 21.FEB.2014 12:58:34

802.11n40 RF Output Power, Middle Channel

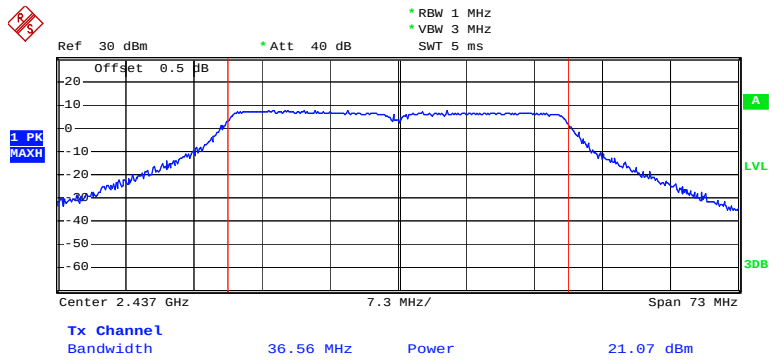

Date: 21.FEB.2014 13:00:17

802.11n40 RF Output Power, High Channel

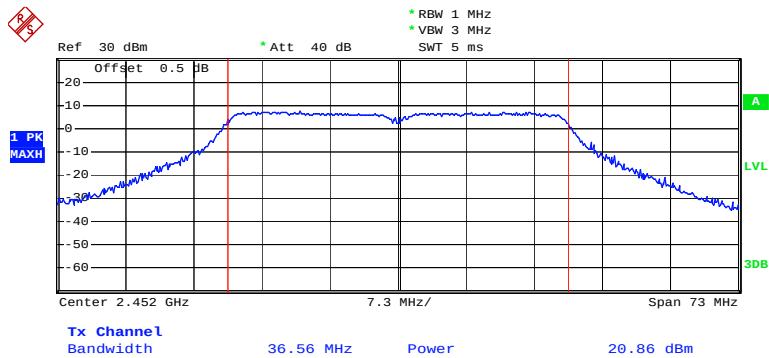

Date: 21.FEB.2014 13:02:44

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	20.7°C
Relative Humidity:	41 %
ATM Pressure:	102 kPa

* The testing was performed by Ares Liu on 2014-02-21

Test Result: Compliance


Please refer to following table and plots.

802.11b: Band Edge, Left Side

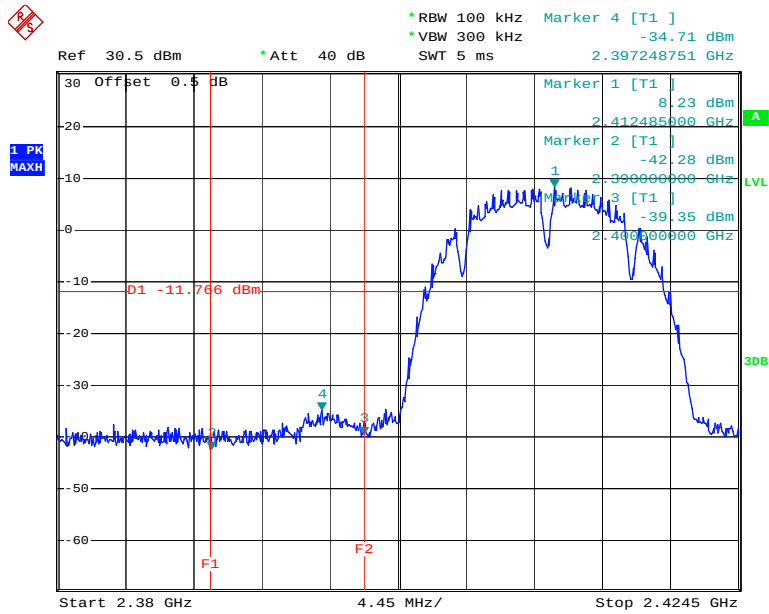


Date: 21.FEB.2014 11:29:11


802.11b: Band Edge, Right Side

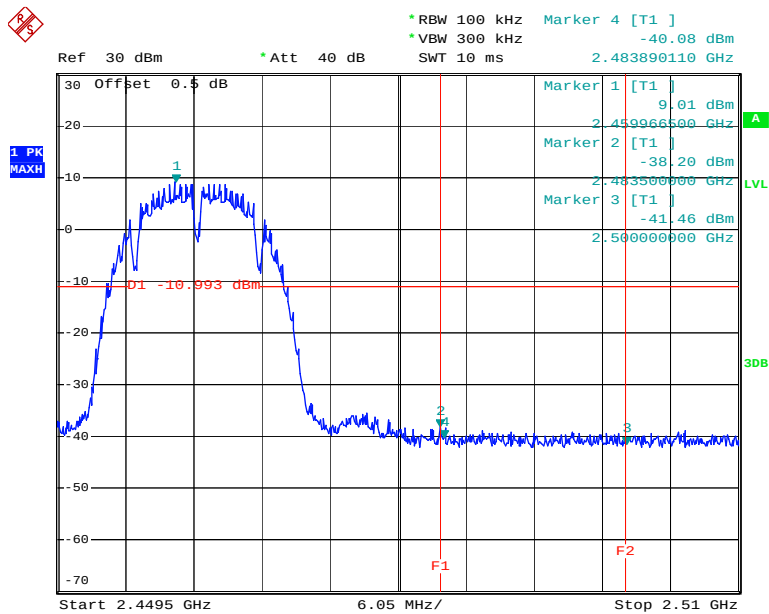

Date: 21.FEB.2014 11:33:12

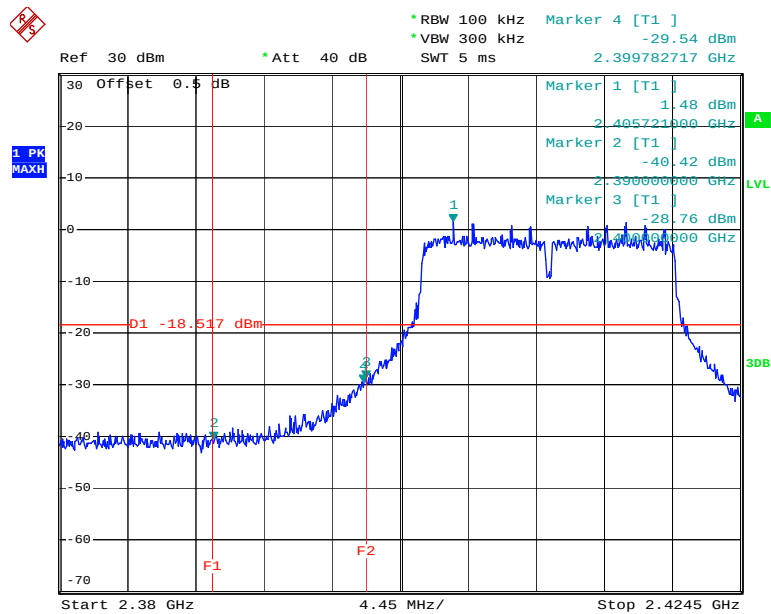
802.11g: Band Edge, Left Side

Date: 21.FEB.2014 11:38:37

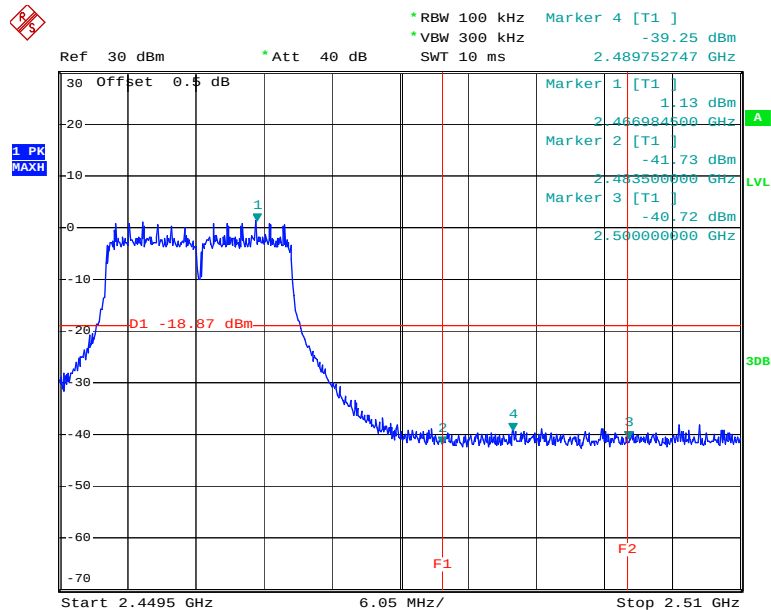802.11g: Band Edge, Right Side


Date: 21.FEB.2014 11:41:41

802.11n20 Band Edge, Left Side

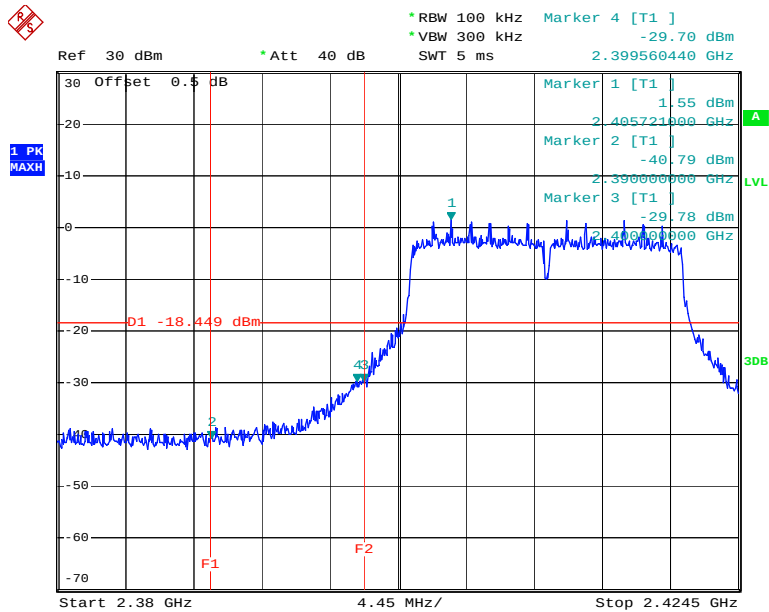

Date: 21.FEB.2014 11:43:28

802.11n20 Band Edge, Right Side

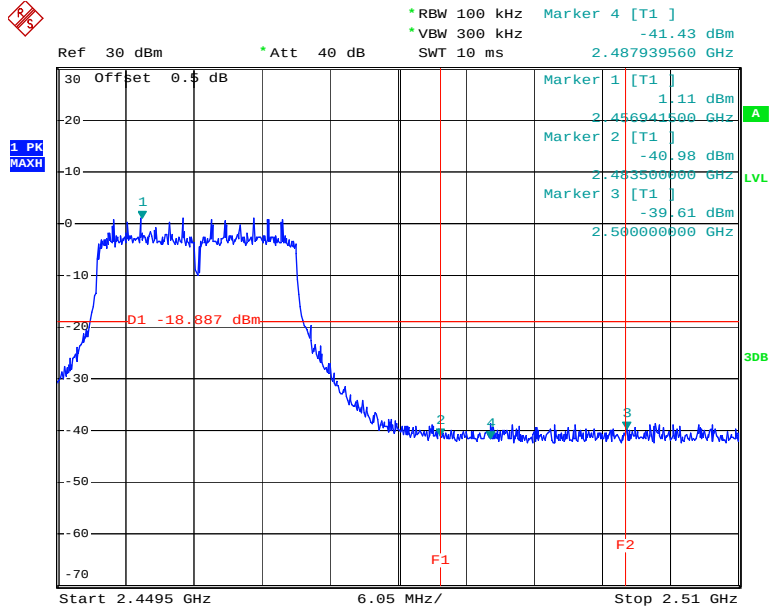

Date: 21.FEB.2014 11:46:19

* RBW 100 kHz
 * VBW 300 kHz
 SWT 10 ms

Ref 30 dBm
 * Att 40 dB

Marker 4 [T1]
 -30.25 dBm
 2.399477522 GHz

1 PK MAXH

30 Offset 0.5 dB
 20
 10
 0
 -10
 -20
 -30
 -50
 -60
 -70

Marker 1 [T1]
 -1.33 dBm
 2.405728000 GHz


Marker 2 [T1]
 -40.24 dBm
 2.390000000 GHz

Marker 3 [T1]
 -29.56 dBm
 2.400000000 GHz

D1 -21.332 dBm
 F1
 F2

Start 2.38 GHz
 6.7 MHz/
 Stop 2.447 GHz

802.11n40 Band Edge, Right Side

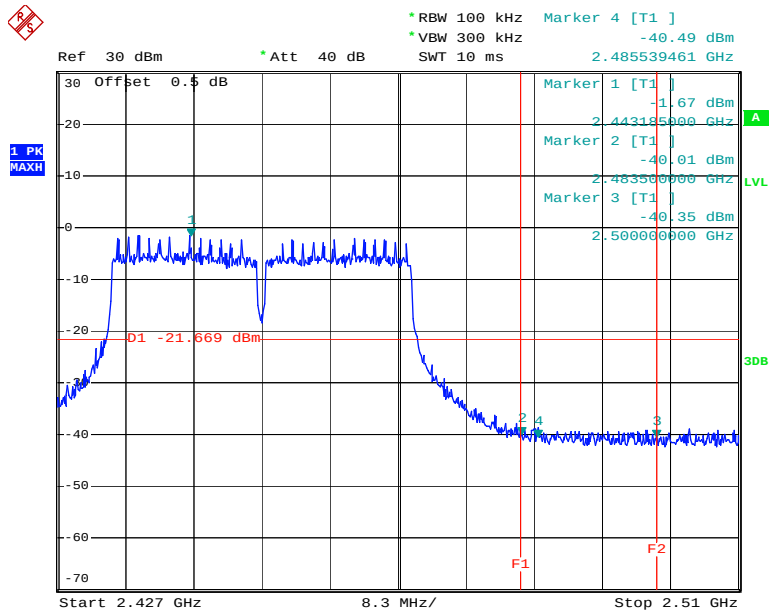

Page 49 of 58

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	20.7°C
Relative Humidity:	41 %
ATM Pressure:	102 kPa


* The testing was performed by Ares Liu on 2014-02-21

*Test Mode: Transmitting***Test Result: Pass**

Test Mode	Channel	PSD	Limit	Result
		(dBm/3kHz)	(dBm/3kHz)	
802.11b	Low	-6.09	8	PASS
	Middle	-7.05	8	PASS
	High	-6.18	8	PASS
802.11g	Low	-12.68	8	PASS
	Middle	-12.52	8	PASS
	High	-12.05	8	PASS
802.11n20	Low	-13.34	8	PASS
	Middle	-12.95	8	PASS
	High	-13.35	8	PASS
802.11n40	Low	-16.01	8	PASS
	Middle	-13.86	8	PASS
	High	-16.43	8	PASS


Please refer to the following plots

Power Spectral Density, 802.11b Low Channel

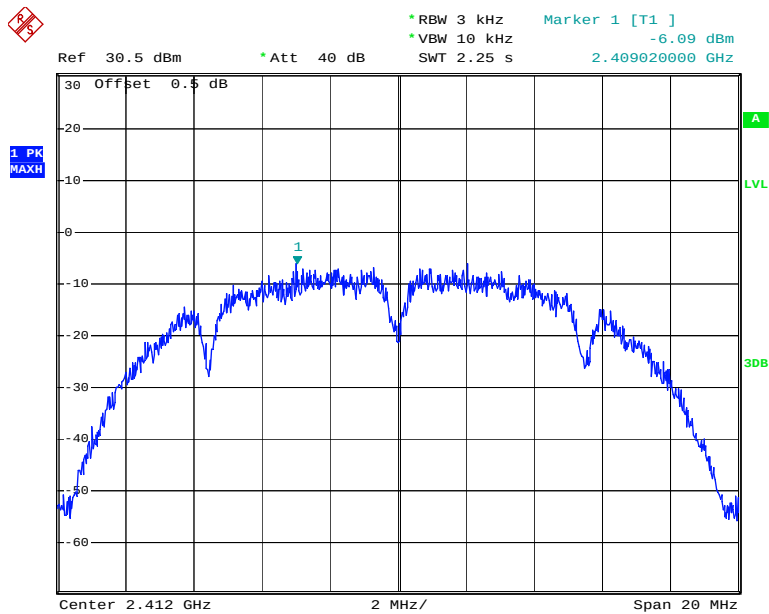


Date: 21.FEB.2014 11:28:46

Power Spectral Density, 802.11b Middle Channel

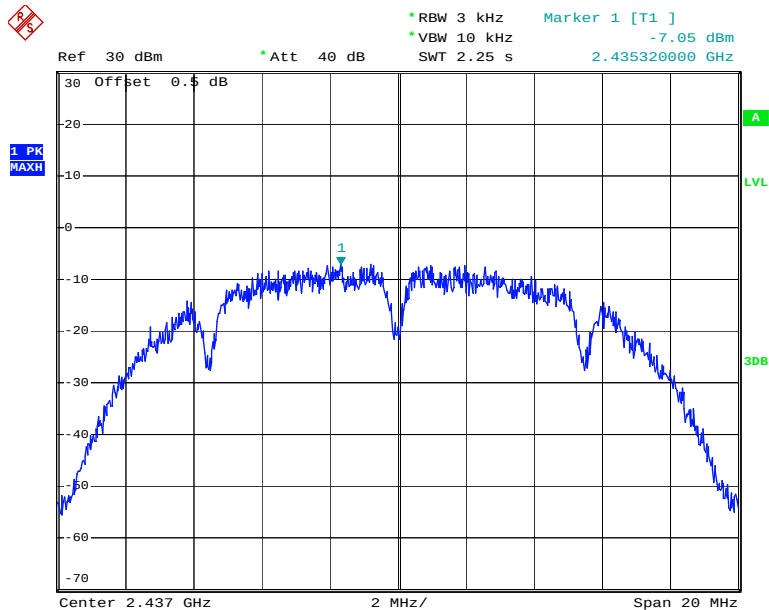


Date: 21.FEB.2014 11:31:29

Power Spectral Density, 802.11b High Channel

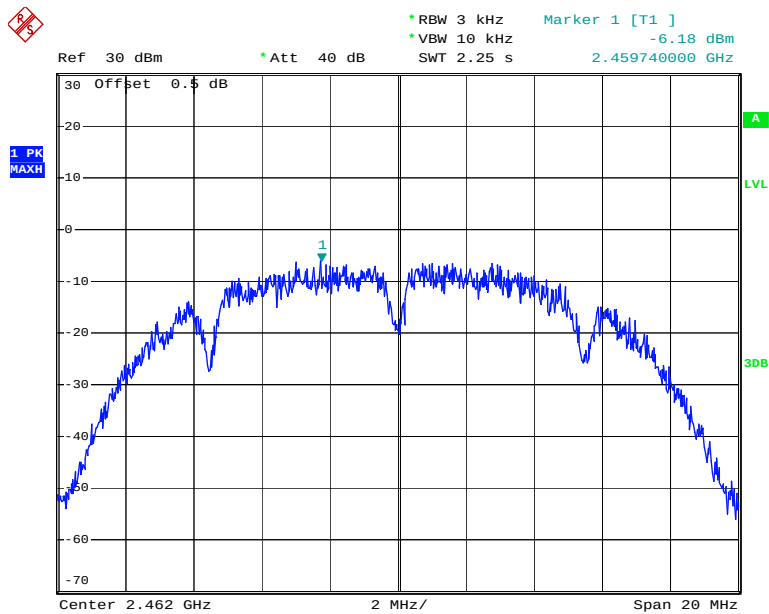


Date: 21.FEB.2014 11:32:48

Power Spectral Density, 802.11g Low Channel

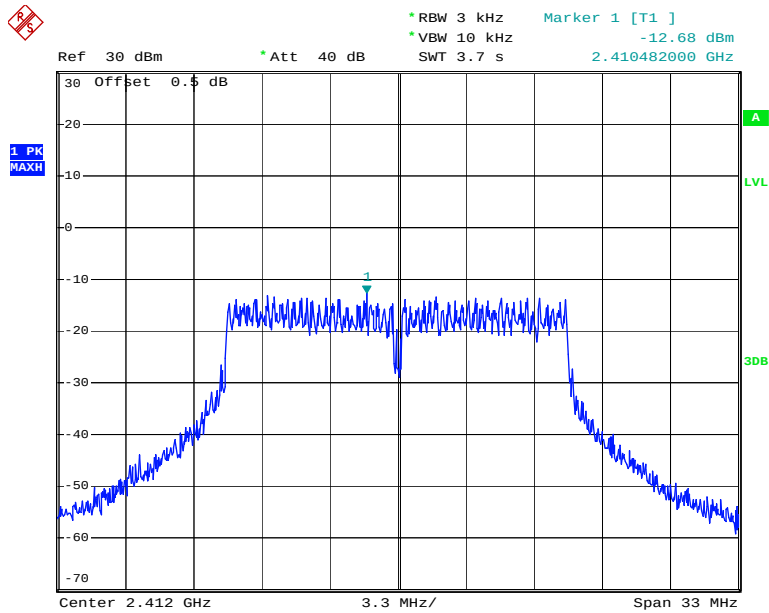


Date: 21.FEB.2014 11:38:12

Power Spectral Density, 802.11g Middle Channel

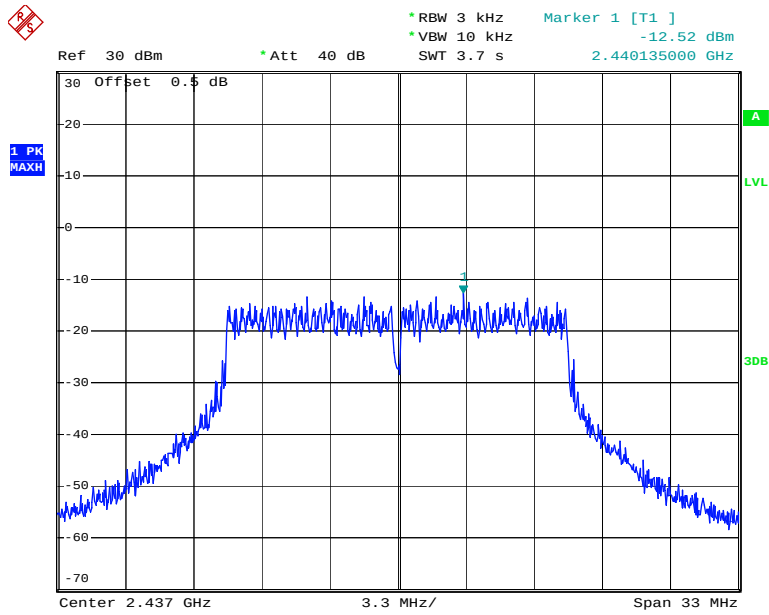


Date: 21.FEB.2014 11:39:52

Power Spectral Density, 802.11g High Channel

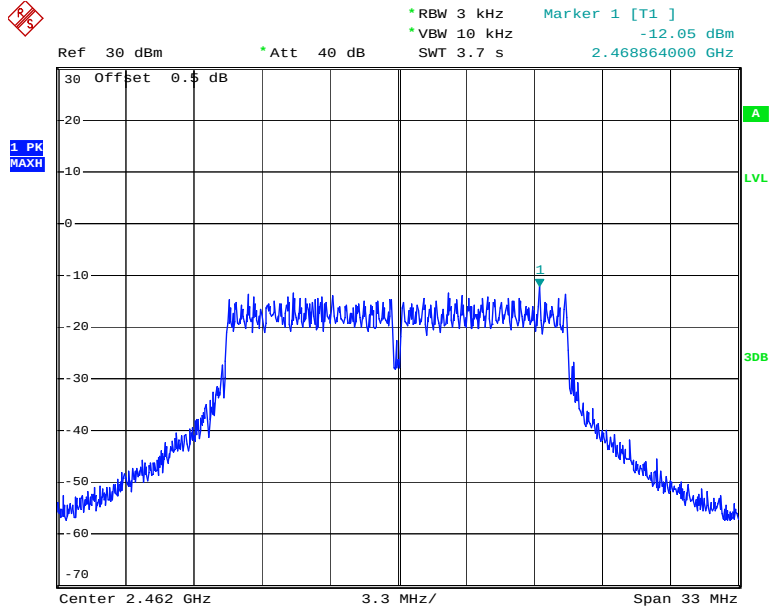


Date: 21.FEB.2014 11:41:16

Power Spectral Density, 802.11n20 Low Channel

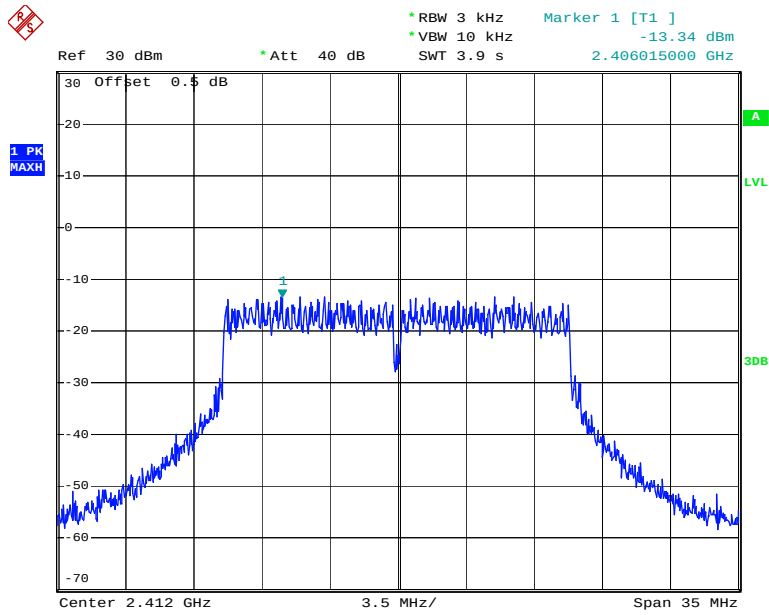


Date: 21.FEB.2014 11:43:03

Power Spectral Density, 802.11n20 Middle Channel

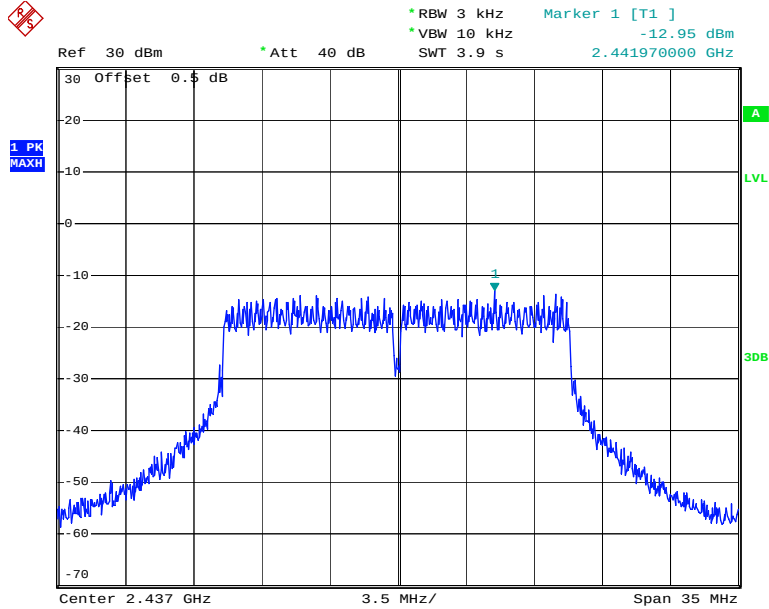


Date: 21.FEB.2014 11:44:40

Power Spectral Density, 802.11n20 High Channel

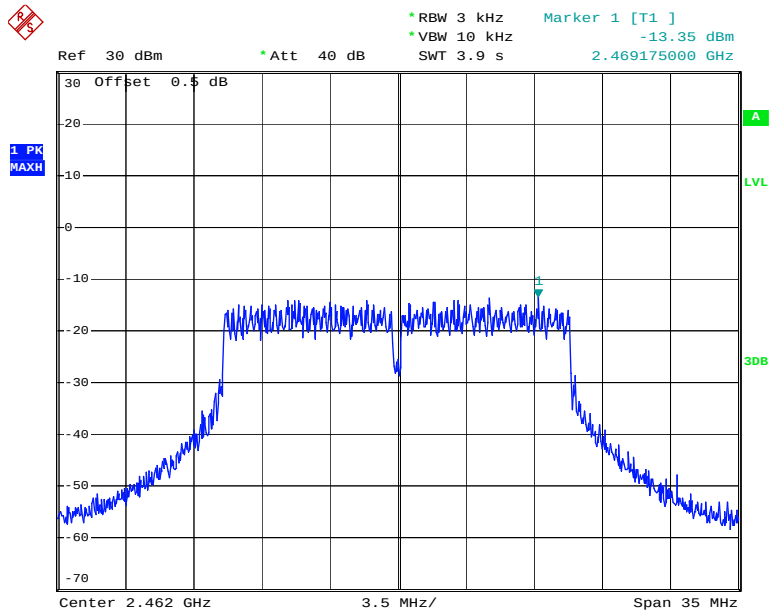


Date: 21.FEB.2014 11:45:55

Power Spectral Density, 802.11n40 Low Channel

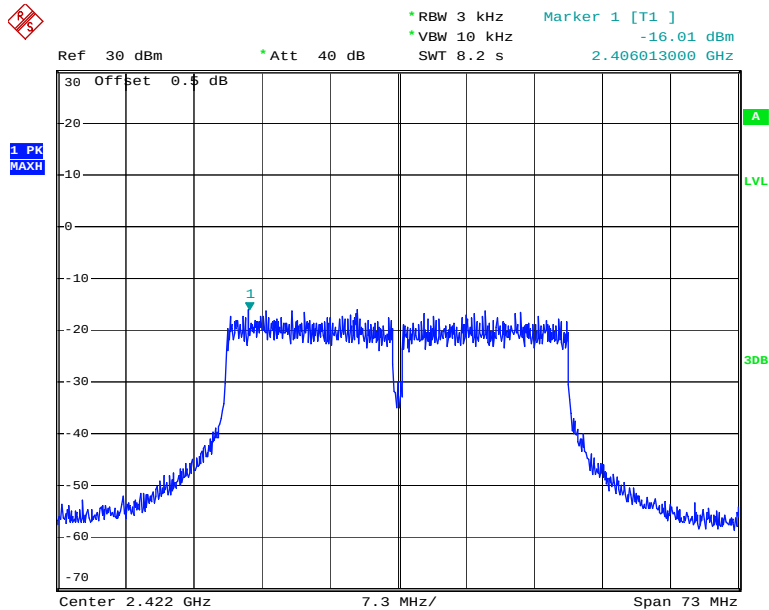


Date: 21.FEB.2014 12:59:01

Power Spectral Density, 802.11n40 Middle Channel

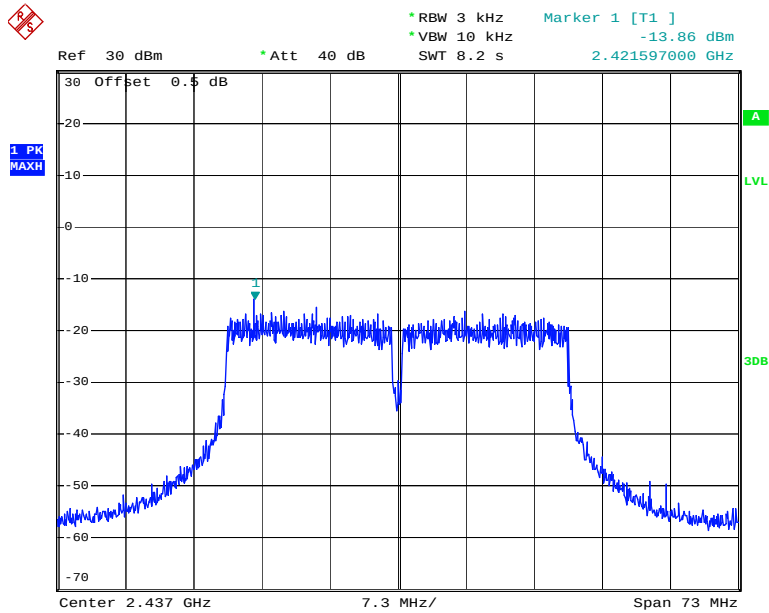

Date: 21.FEB.2014 13:00:43

Power Spectral Density, 802.11n40 High Channel

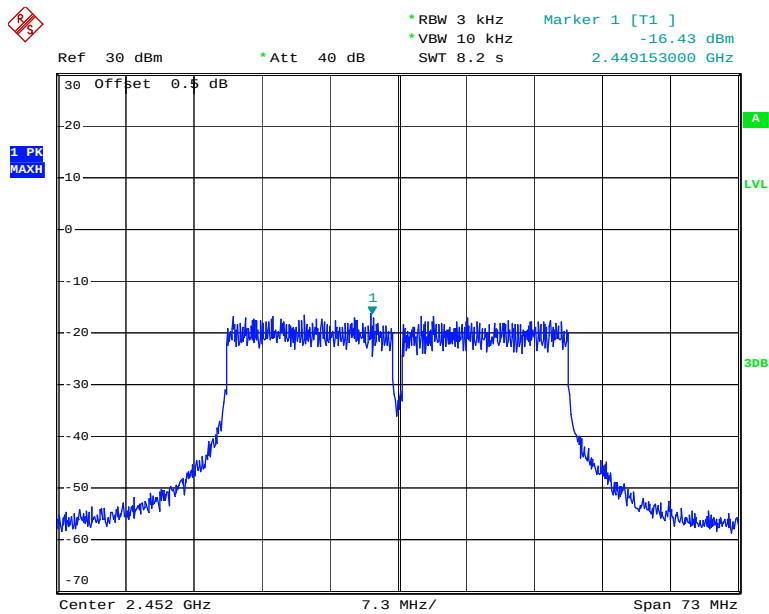

Date: 21.FEB.2014 13:03:10

DECLARATION LETTER

Iconnect

ADD: No.9, Aly. 58, Ln. 112, Ruiguang Rd., Neihu Dist., Taipei City, Taiwan

Tel: 886-2-27968477 Fax: 886-2-27968478

DECLARATION OF SIMILARITY

Date: 2014-4-17

Dear Sir or Madam:

We, Iconnect, hereby declare that product: 802.11n Long-Range outdoor AP/CPE, models: Tube, Tube2, Tube5, Tube5H are electrically identical with the model: Tube2H which was tested by BACL with the same electromagnetic emissions and electromagnetic compatibility characteristics. The results of which are featured in BACL project: R2DG140113004.


A description of the difference among the models and those that are declared similar are as follows:

They are the same product, and just have the different model name, the rest are the same.

Please contact me should there be need for any additional clarification or information.

Best Regards,

Jackie Wen
Manager



***** END OF REPORT *****