



## Appendix B

### RF Test Data for BT (BLE) (Conducted Measurement)

Product Name: Infinity Dodecahedron

Trade Mark: PIBAOGU

Test Model: leida-2

#### Environmental Conditions

|                    |             |
|--------------------|-------------|
| Temperature:       | 24.6° C     |
| Relative Humidity: | 52.4%       |
| ATM Pressure:      | 100.0 kPa   |
| Test Engineer:     | Emiya lin   |
| Supervised by:     | Simba Haung |



## Contents

Page

### COVER PAGE

|     |                                            |    |
|-----|--------------------------------------------|----|
| 1   | Duty Cycle .....                           | 3  |
| 1.1 | Test Result .....                          | 3  |
| 1.2 | Test Graphs .....                          | 4  |
| 2   | Maximum Conducted Output Power .....       | 6  |
| 2.1 | Test Result .....                          | 6  |
| 2.2 | Test Graphs .....                          | 7  |
| 3   | -6dB Bandwidth .....                       | 9  |
| 3.1 | Test Result .....                          | 9  |
| 3.2 | Test Graphs .....                          | 10 |
| 4   | Maximum Power Spectral Density Level ..... | 12 |
| 4.1 | Test Result .....                          | 12 |
| 4.2 | Test Graphs .....                          | 13 |
| 5   | Band Edge .....                            | 15 |
| 5.1 | Test Result .....                          | 15 |
| 5.2 | Test Graphs .....                          | 16 |
| 6   | Conducted RF Spurious Emission .....       | 18 |
| 6.1 | Test Result .....                          | 18 |
| 6.2 | Test Graphs .....                          | 19 |
| 7   | Restrict Band .....                        | 22 |
| 7.1 | Test Result .....                          | 22 |
| 7.2 | Test Graphs .....                          | 23 |





# 1 Duty Cycle

## 1.1 Test Result

| Mode   | Frequency (MHz) | Duty Cycle (%) | Correction Factor | 1/T (kHz) |
|--------|-----------------|----------------|-------------------|-----------|
| BLE 1M | 2402            | 64.52          | 1.9               | 2.56      |
| BLE 1M | 2440            | 64.79          | 1.88              | 2.56      |
| BLE 1M | 2480            | 64.36          | 1.91              | 2.56      |

## 1.2 Test Graphs

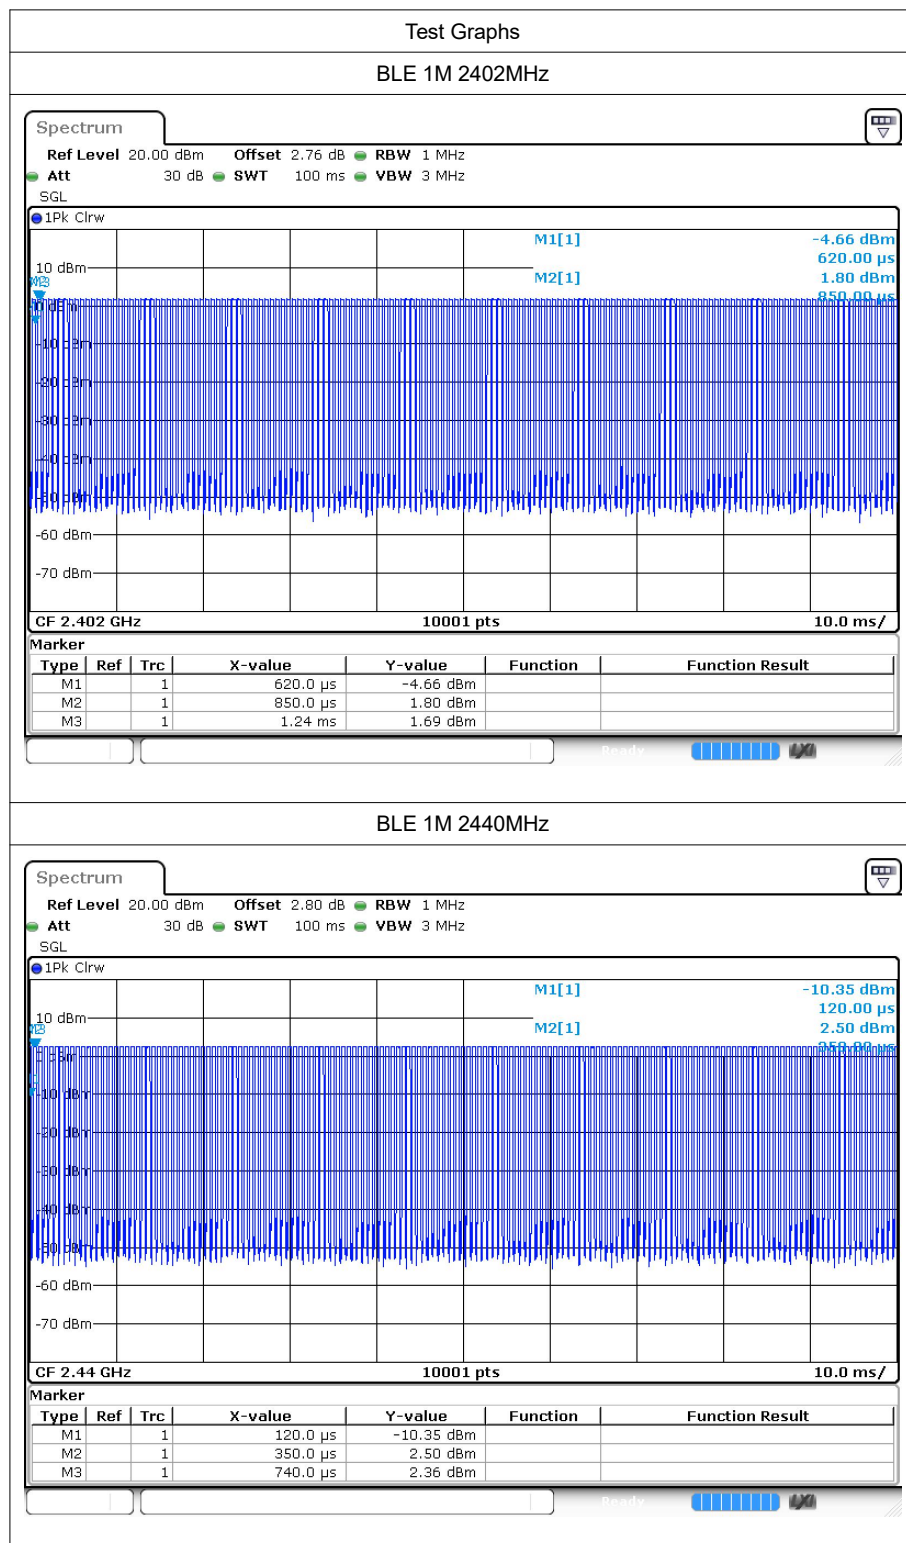

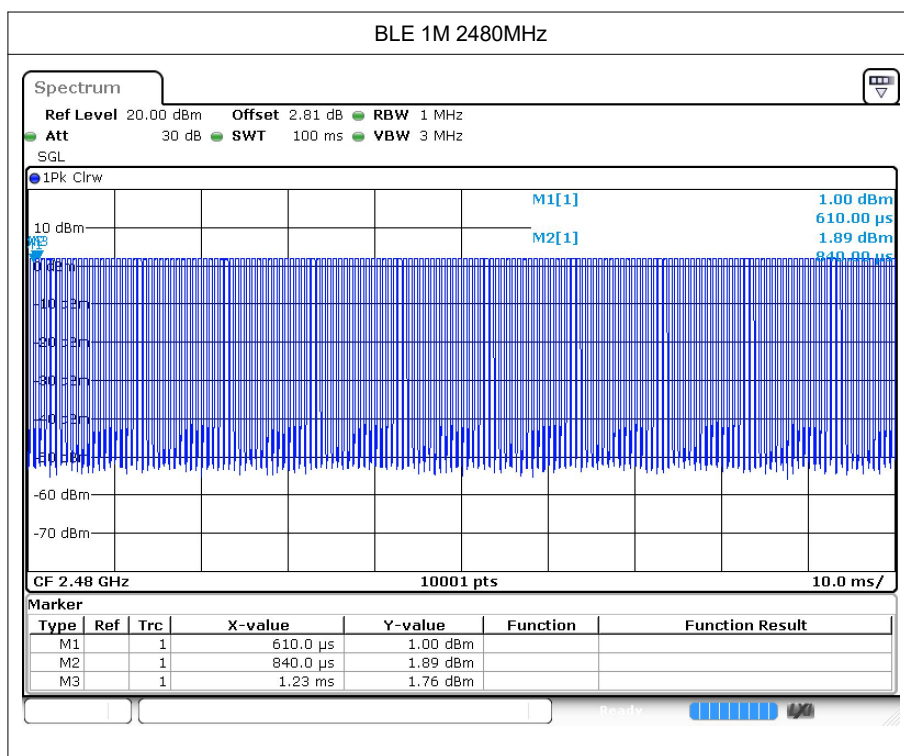





## 2 Maximum Conducted Output Power

### 2.1 Test Result

| Mode   | Frequency (MHz) | Conducted Power<br>(dBm) | Limit (dBm) | Verdict |
|--------|-----------------|--------------------------|-------------|---------|
| BLE 1M | 2402            | 1.81                     | 30          | Pass    |
| BLE 1M | 2440            | 2.5                      | 30          | Pass    |
| BLE 1M | 2480            | 1.88                     | 30          | Pass    |

## 2.2 Test Graphs

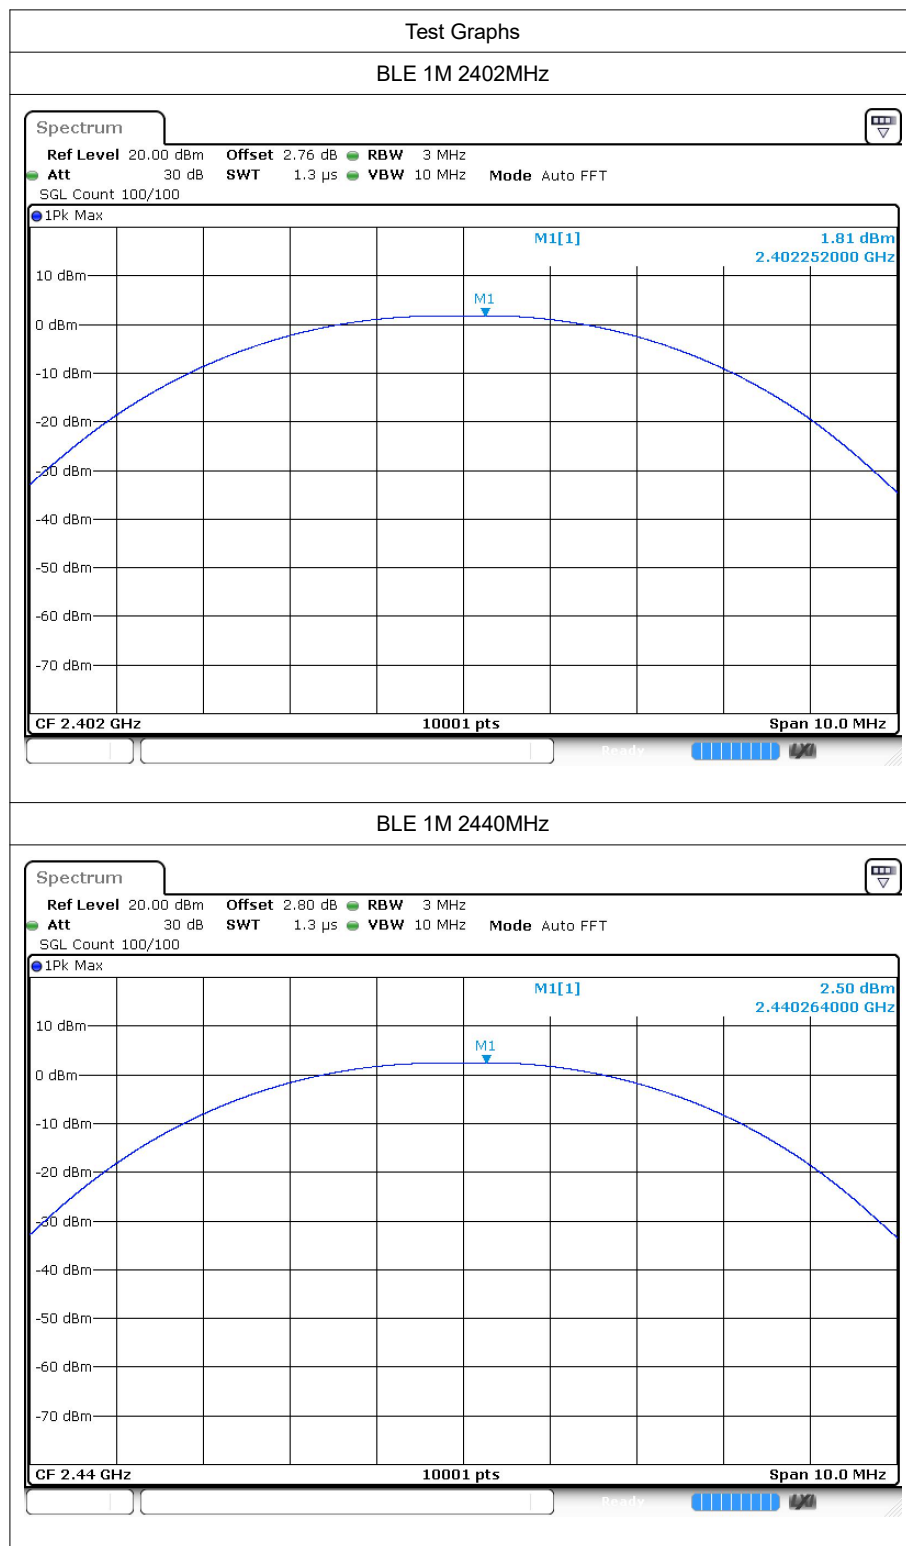

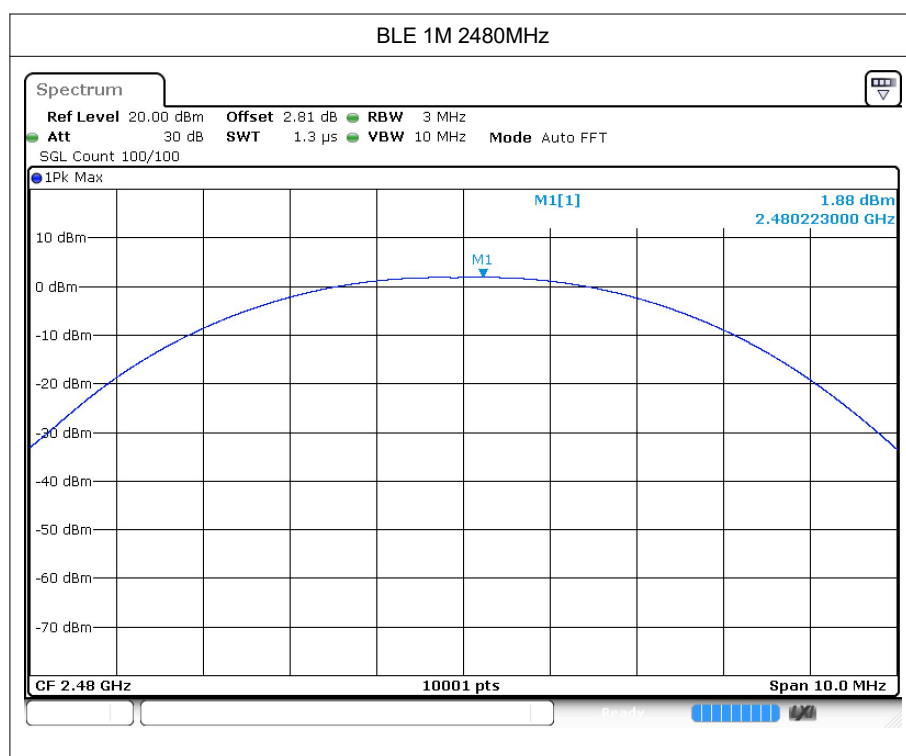





### 3 -6dB Bandwidth

#### 3.1 Test Result

| Mode   | Frequency (MHz) | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|--------|-----------------|-----------------------|-----------------------------|---------|
| BLE 1M | 2402            | 0.662                 | 0.5                         | Pass    |
| BLE 1M | 2440            | 0.623                 | 0.5                         | Pass    |
| BLE 1M | 2480            | 0.671                 | 0.5                         | Pass    |

## 3.2 Test Graphs

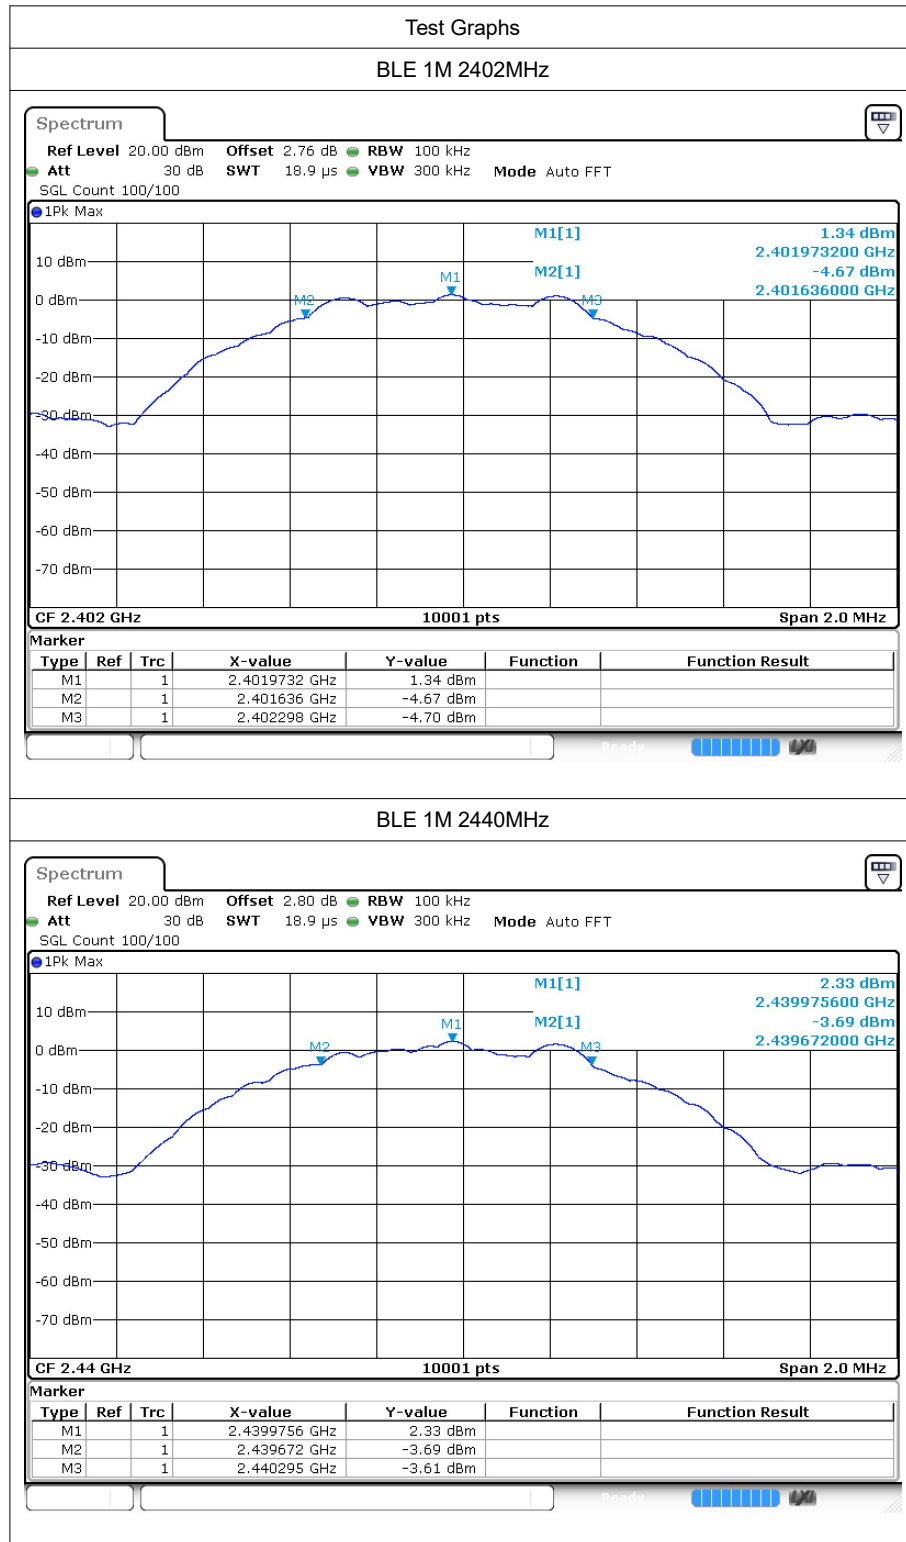

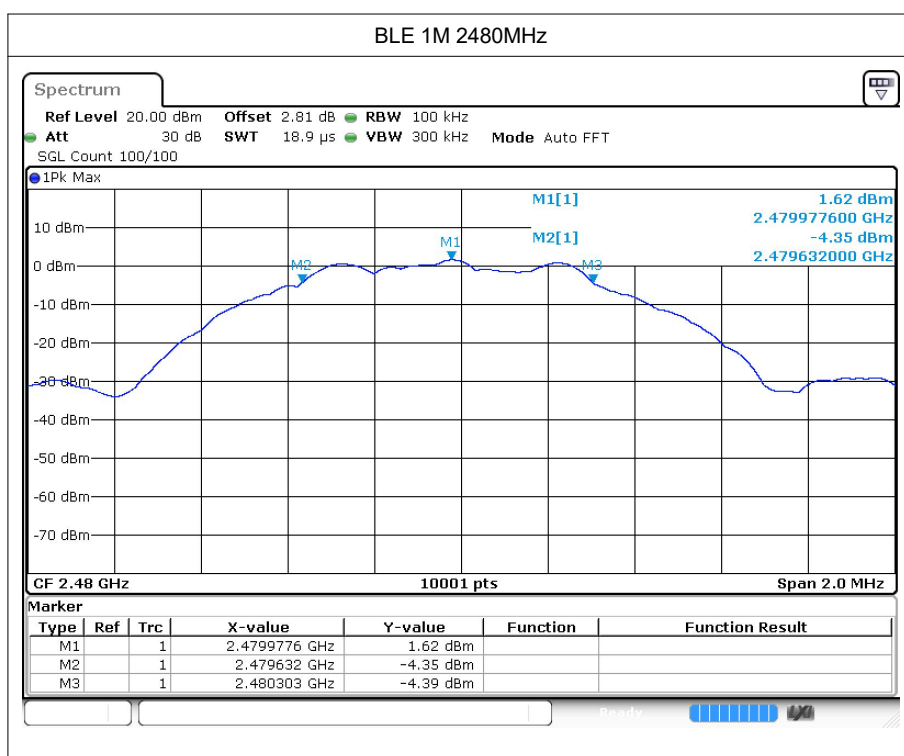





## 4 Maximum Power Spectral Density Level

### 4.1 Test Result

| Mode   | Frequency (MHz) | Conducted PSD<br>(dBm/3-100kHz) | Limit<br>(dBm/3kHz) | Verdict |
|--------|-----------------|---------------------------------|---------------------|---------|
| BLE 1M | 2402            | -13.39                          | $\leq 8$            | Pass    |
| BLE 1M | 2440            | -12.89                          | $\leq 8$            | Pass    |
| BLE 1M | 2480            | -13.61                          | $\leq 8$            | Pass    |

## 4.2 Test Graphs

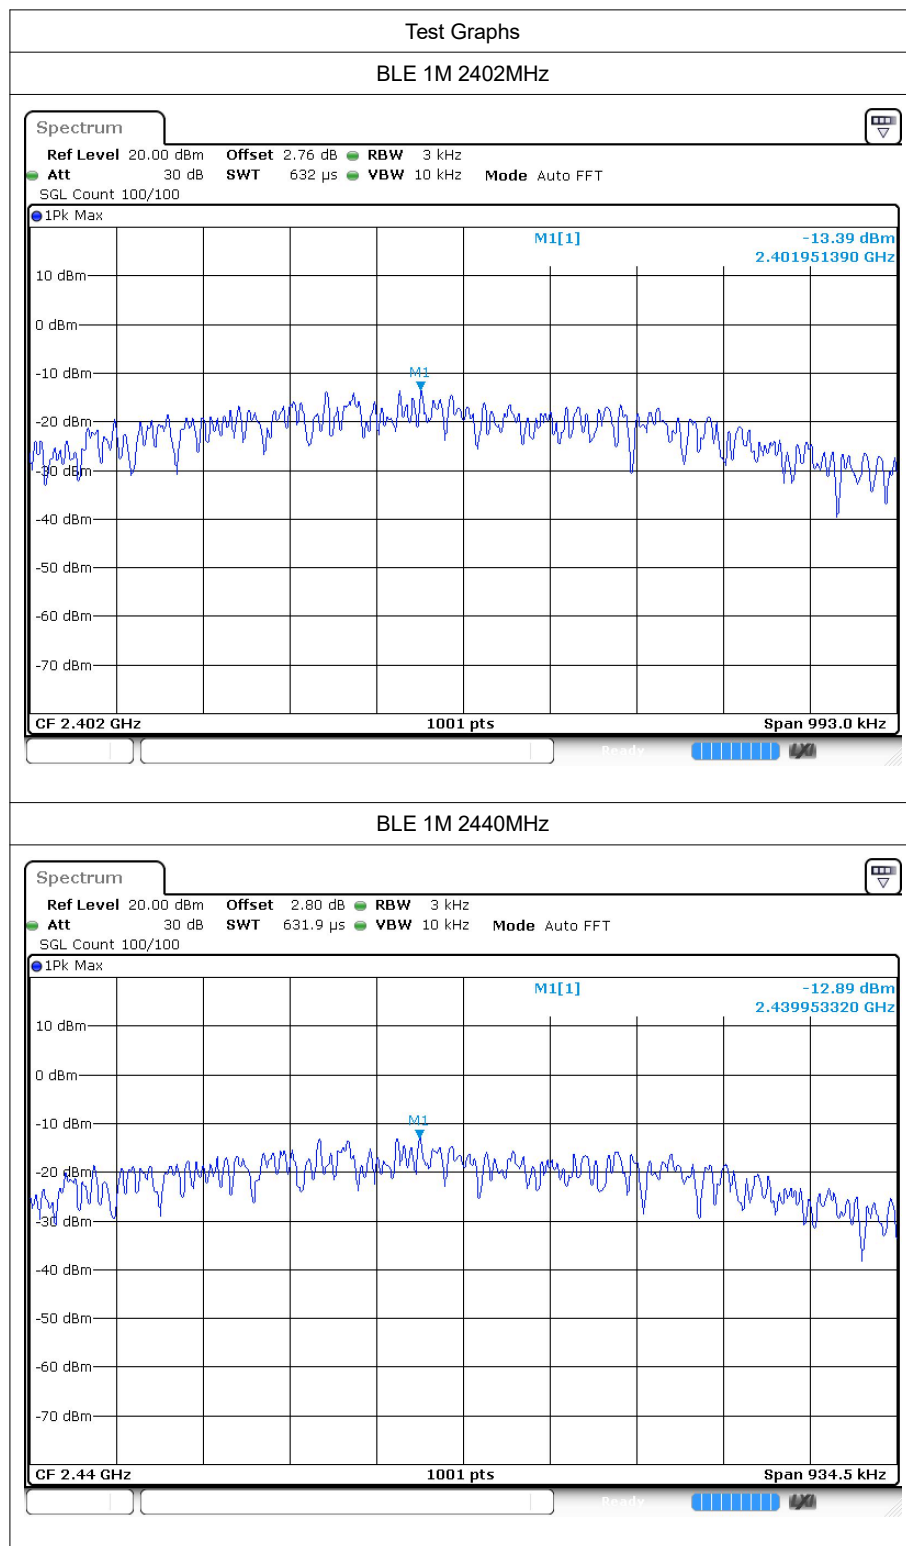

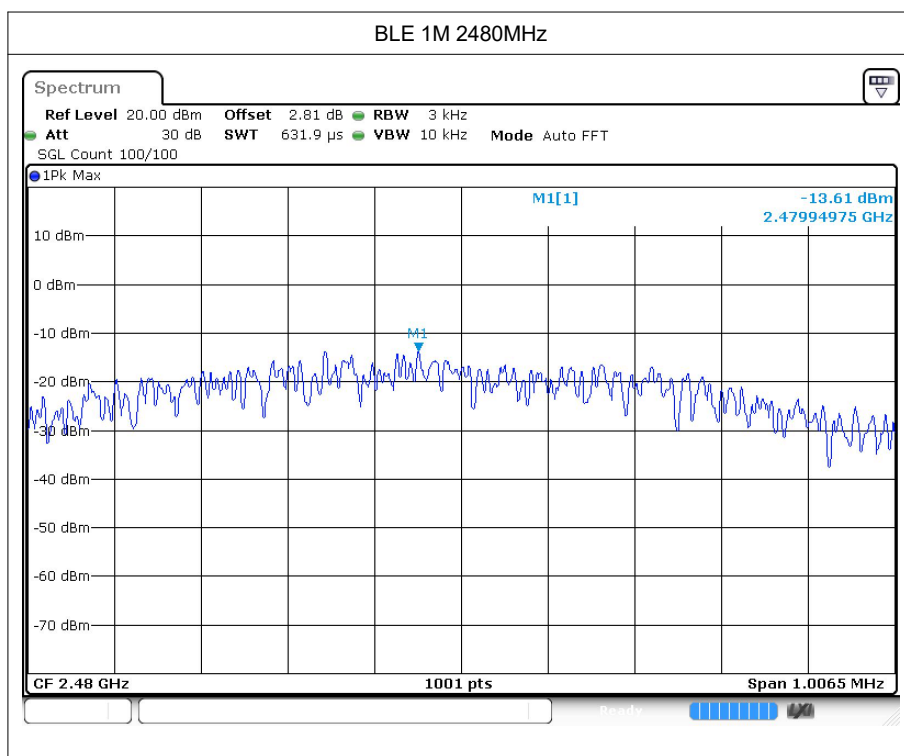





## 5 Band Edge

### 5.1 Test Result

| Mode   | Frequency (MHz) | Max Value (dBc) | Limit (dBc) | Verdict |
|--------|-----------------|-----------------|-------------|---------|
| BLE 1M | 2402            | -57.05          | -20         | Pass    |
| BLE 1M | 2480            | -52.66          | -20         | Pass    |

## 5.2 Test Graphs

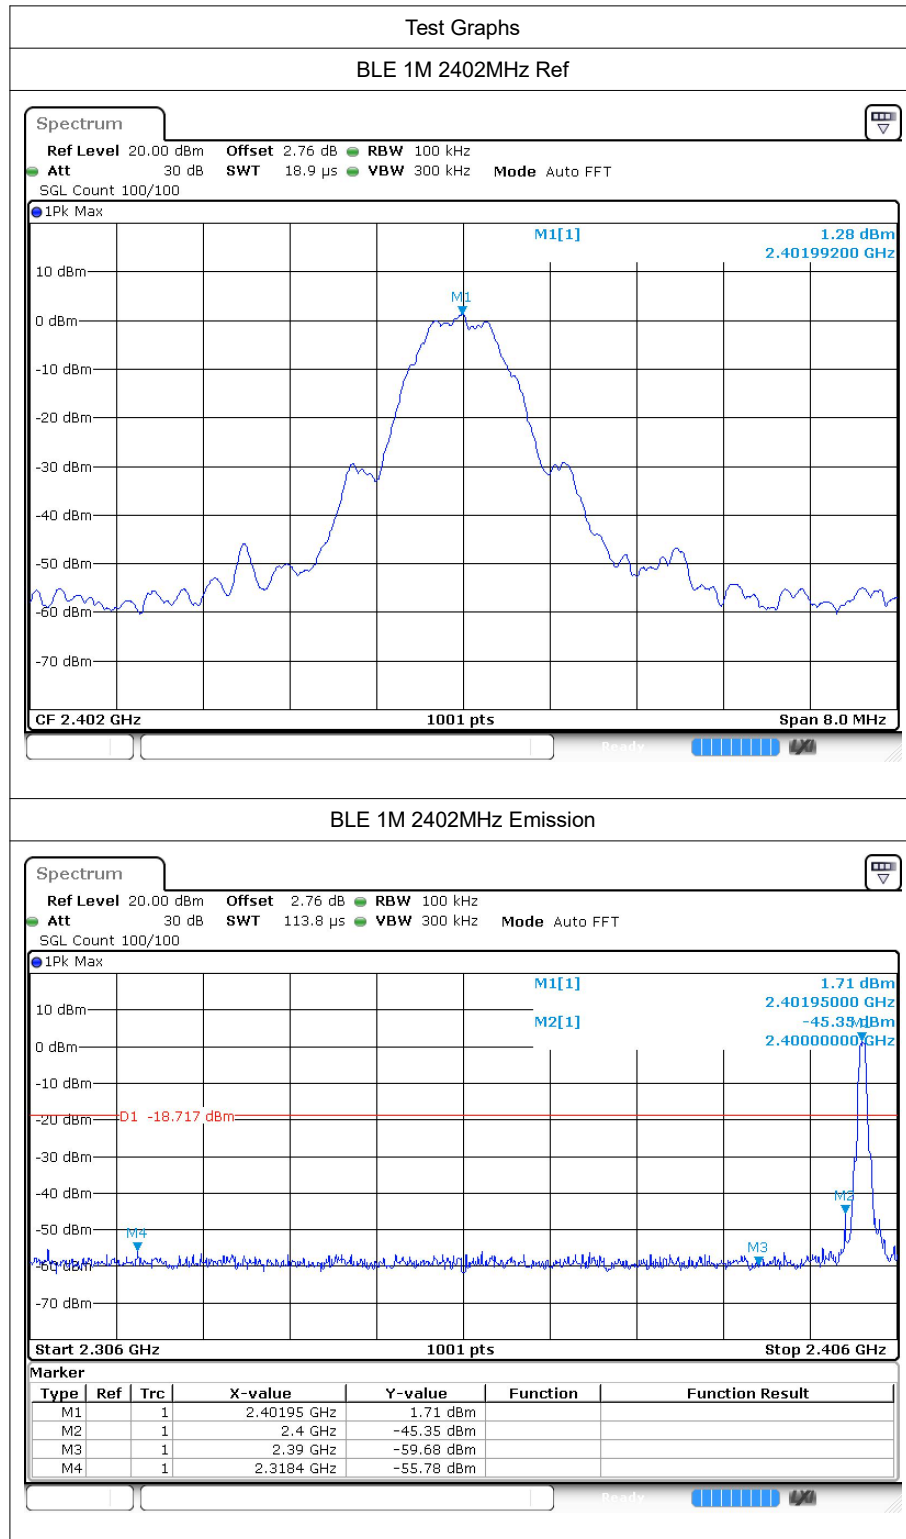

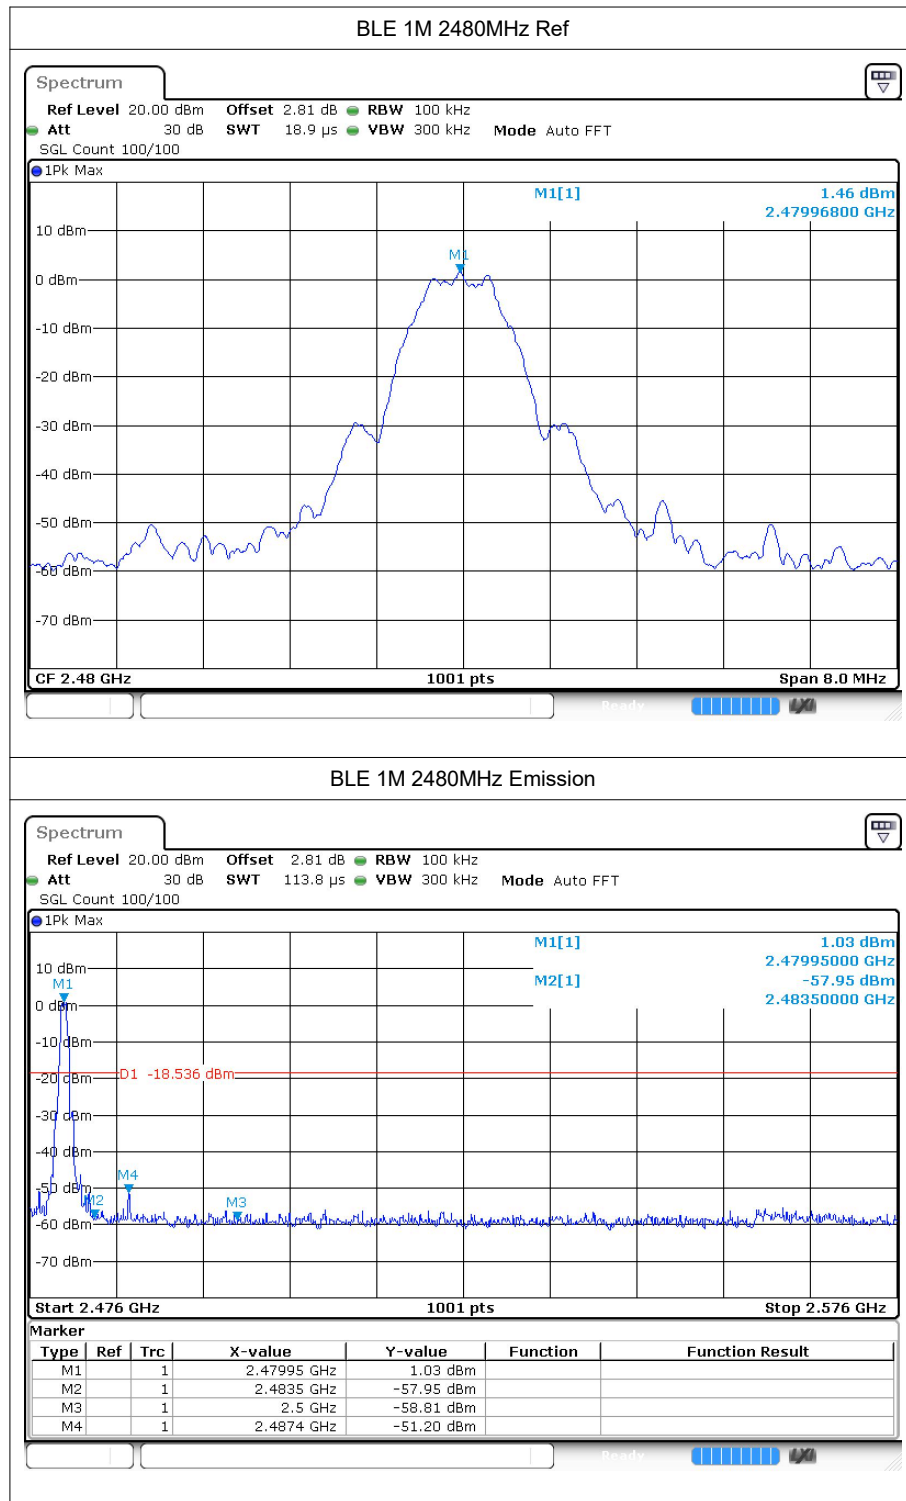



## 6 Conducted RF Spurious Emission


### 6.1 Test Result

| Mode   | Frequency (MHz) | Max Value (dBc) | Limit (dBc) | Verdict |
|--------|-----------------|-----------------|-------------|---------|
| BLE 1M | 2402            | -43.64          | -20         | Pass    |
| BLE 1M | 2440            | -45             | -20         | Pass    |
| BLE 1M | 2480            | -44.52          | -20         | Pass    |

## 6.2 Test Graphs

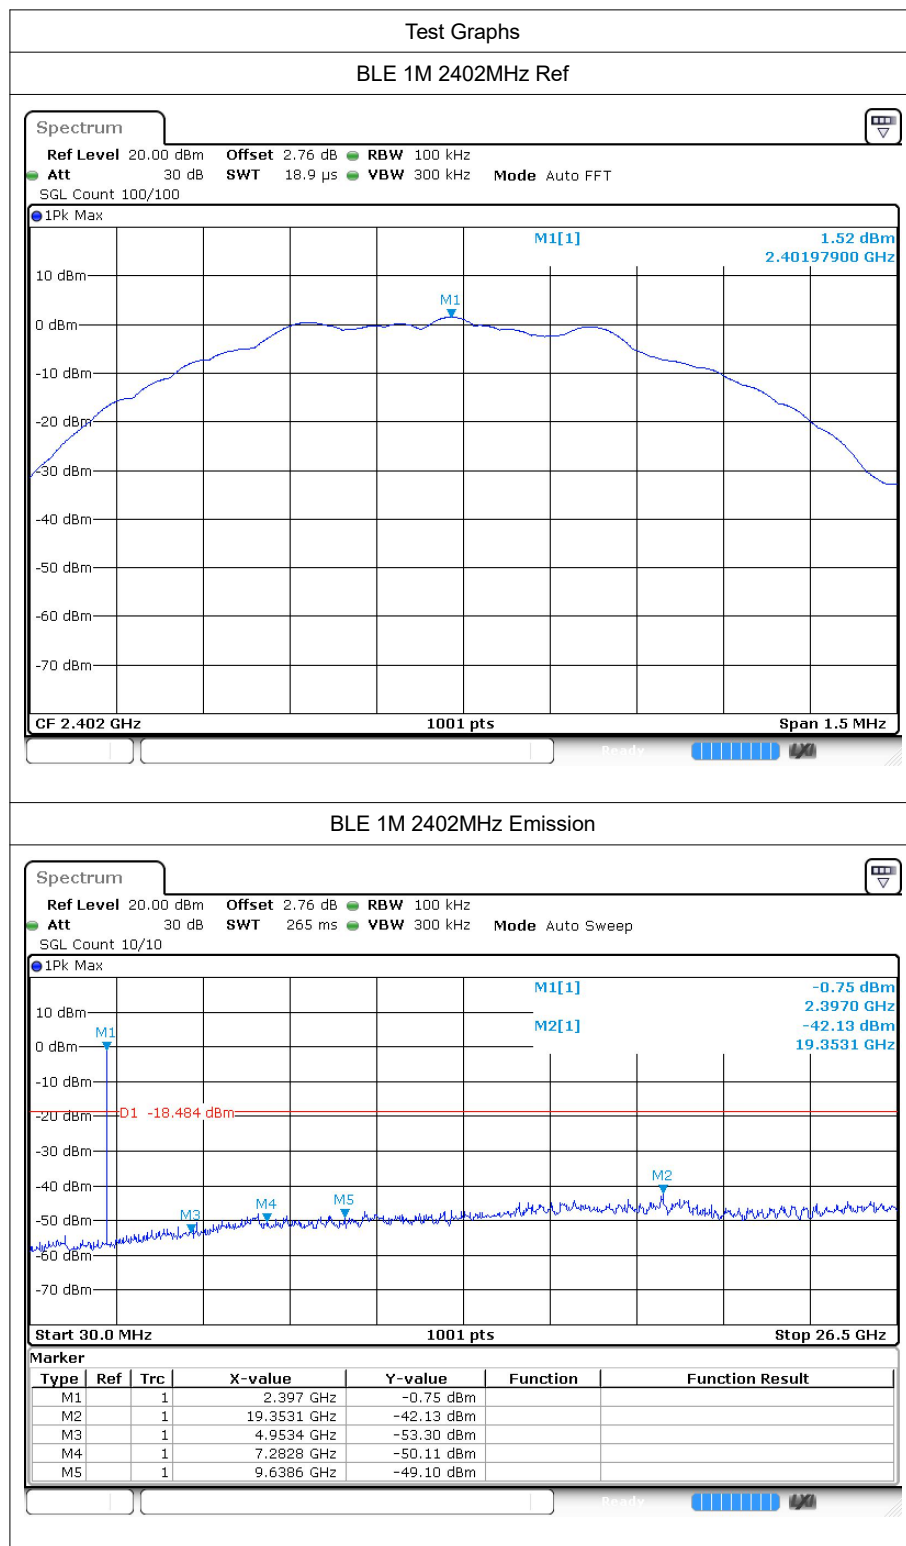

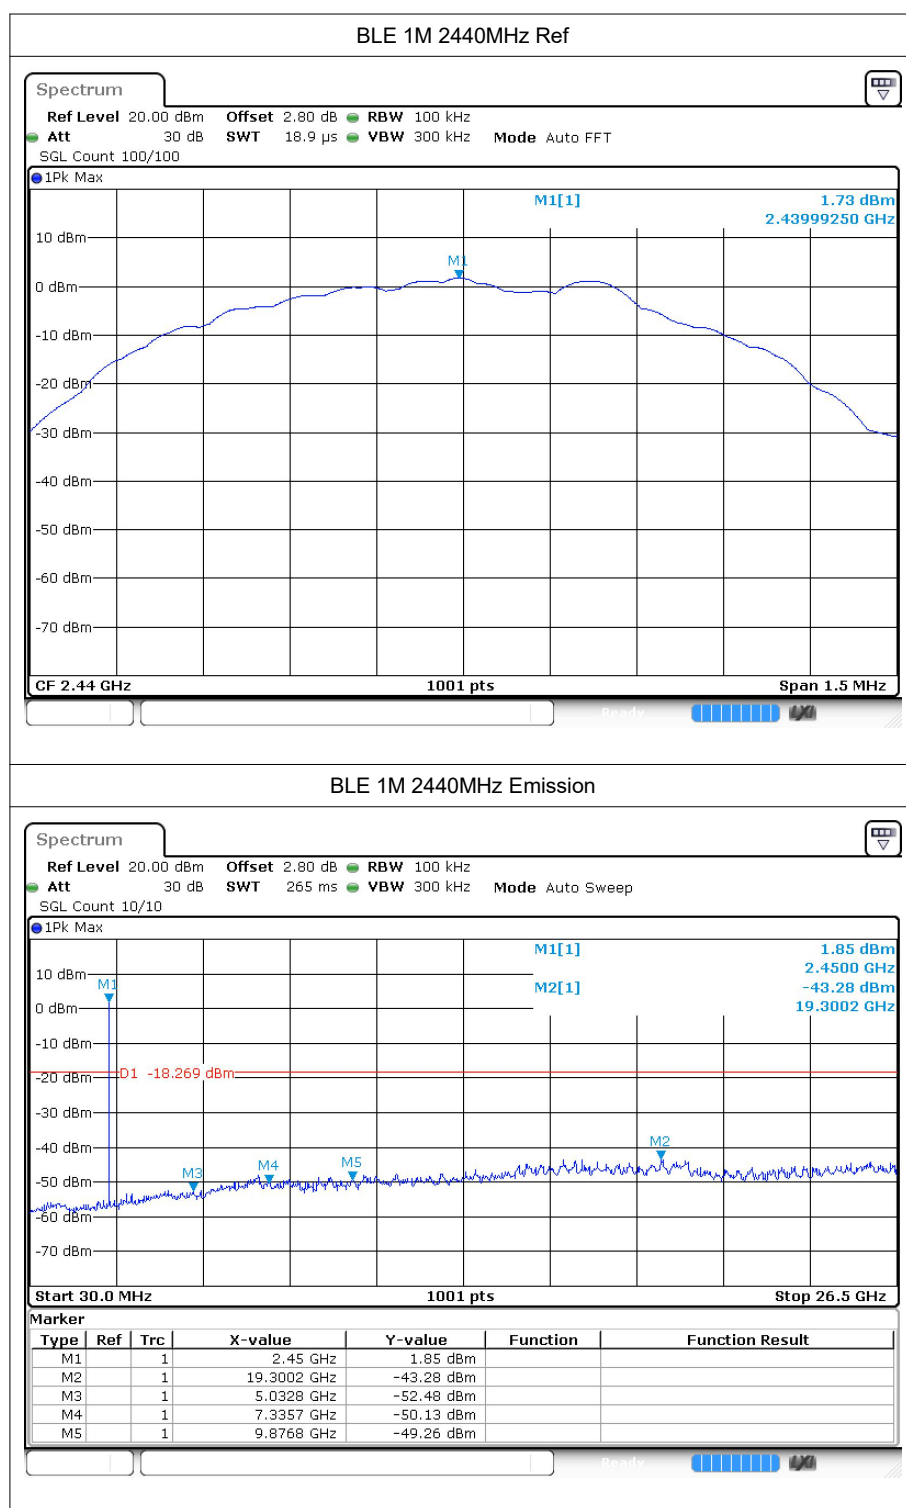

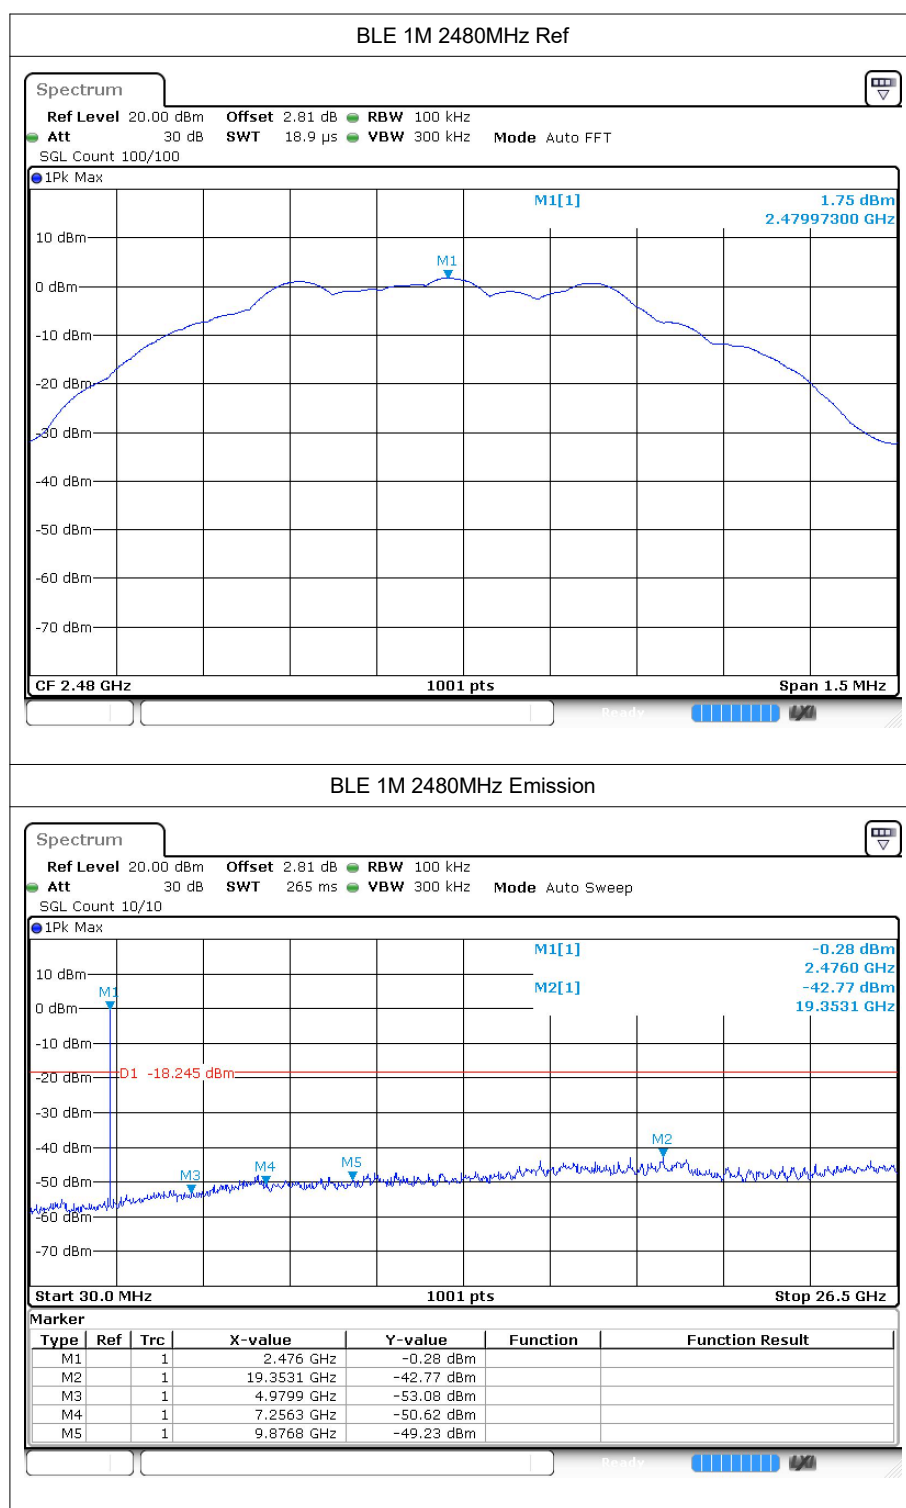





## 7 Restrict Band

### 7.1 Test Result

| Mode   | Frequency<br>(MHz) | Spur Freq<br>(MHz) | Power<br>(dBm) | Gain<br>(dBi) | Duty<br>Factor | E<br>(dBuV/m) | Detector | Limit<br>(dBuV/m) | Verdict |
|--------|--------------------|--------------------|----------------|---------------|----------------|---------------|----------|-------------------|---------|
| BLE 1M | 2402               | 2310               | -49.83         | 2.71          | -              | 48.11         | Peak     | 74                | Pass    |
| BLE 1M | 2402               | 2310               | -56.6          | 2.71          | 1.9            | 43.24         | Average  | 54                | Pass    |
| BLE 1M | 2402               | 2338.032           | -46.41         | 2.71          | -              | 51.53         | Peak     | 74                | Pass    |
| BLE 1M | 2402               | 2338.704           | -54.47         | 2.71          | 1.9            | 45.37         | Average  | 54                | Pass    |
| BLE 1M | 2402               | 2390               | -49.23         | 2.71          | -              | 48.71         | Peak     | 74                | Pass    |
| BLE 1M | 2402               | 2390               | -57.56         | 2.71          | 1.9            | 42.28         | Average  | 54                | Pass    |
| BLE 1M | 2480               | 2483.5             | -46.27         | 2.71          | -              | 51.67         | Peak     | 74                | Pass    |
| BLE 1M | 2480               | 2483.5             | -55.13         | 2.71          | 1.91           | 44.72         | Average  | 54                | Pass    |
| BLE 1M | 2480               | 2487.352           | -44.74         | 2.71          | -              | 53.20         | Peak     | 74                | Pass    |
| BLE 1M | 2480               | 2487.424           | -54.45         | 2.71          | 1.91           | 45.40         | Average  | 54                | Pass    |
| BLE 1M | 2480               | 2500               | -49.36         | 2.71          | -              | 48.58         | Peak     | 74                | Pass    |
| BLE 1M | 2480               | 2500               | -56.56         | 2.71          | 1.91           | 43.29         | Average  | 54                | Pass    |

## 7.2 Test Graphs

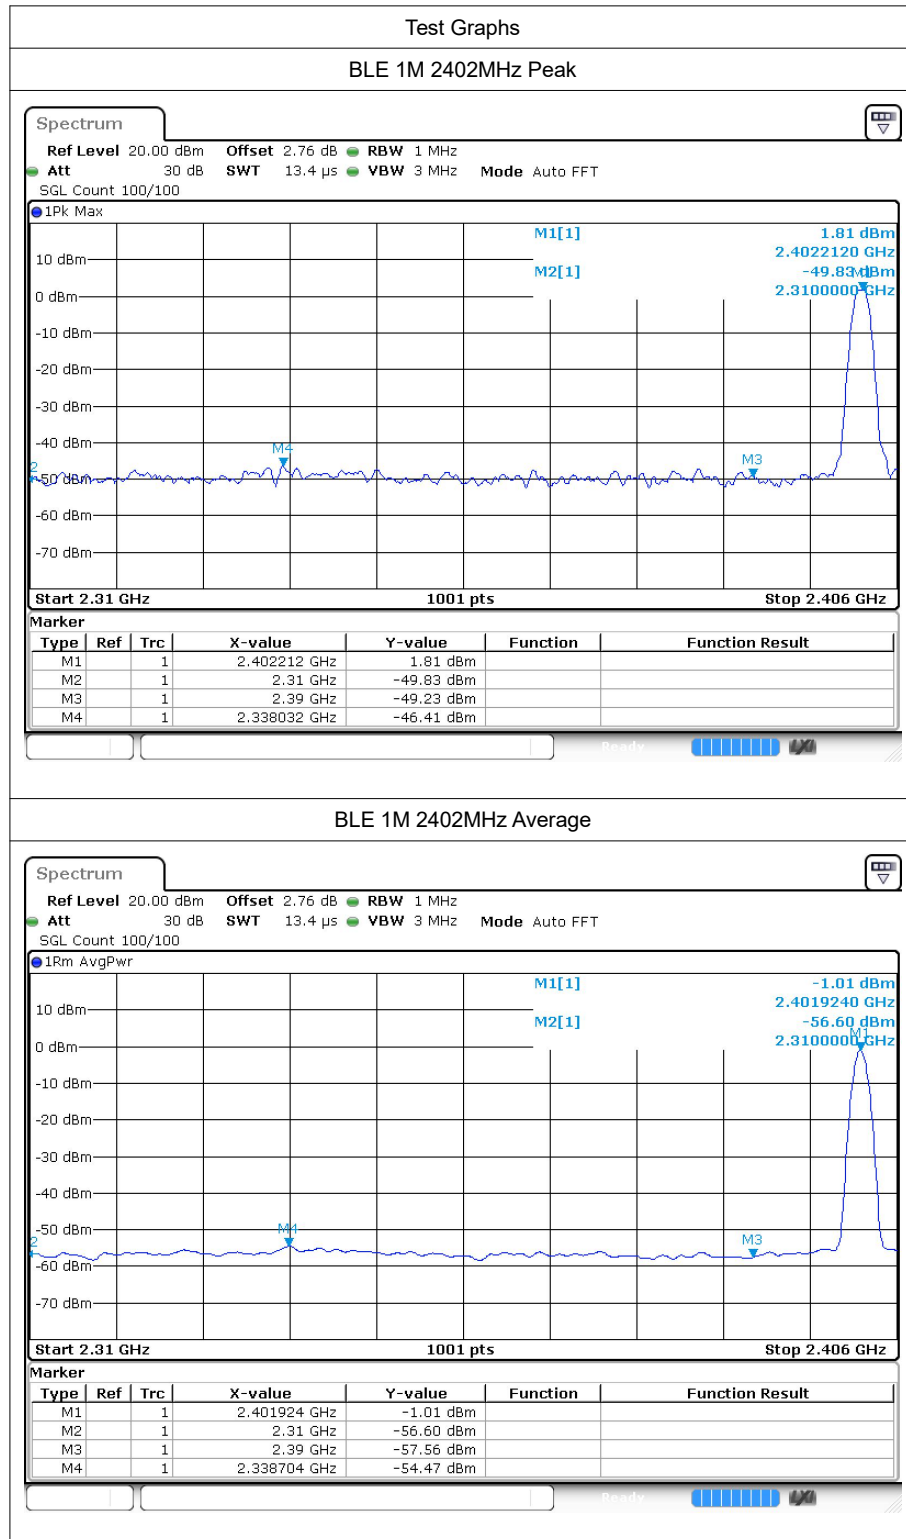

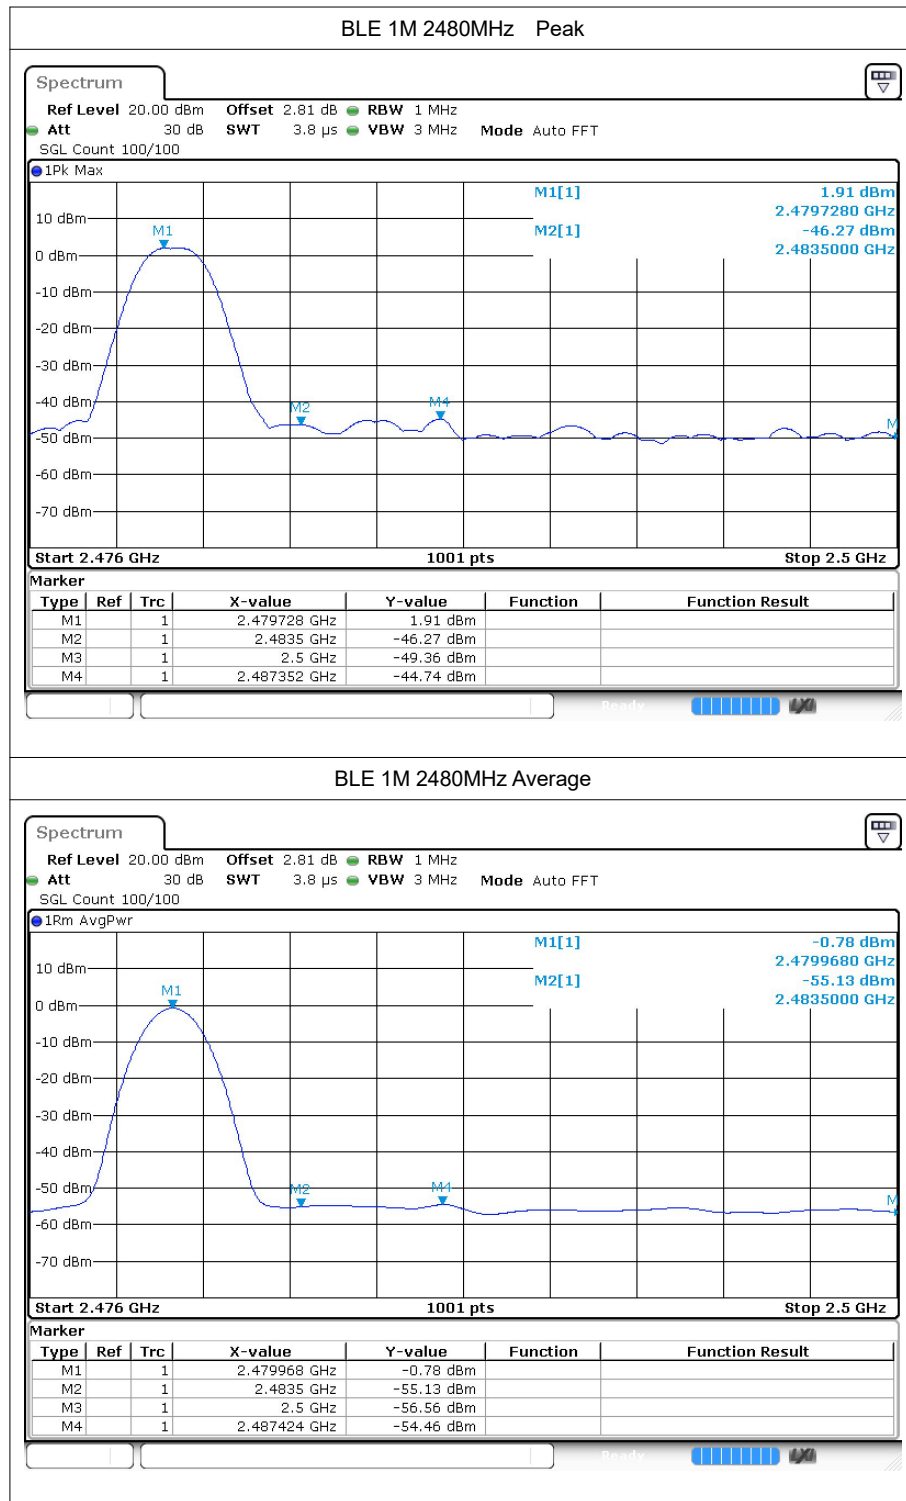

---The End---