

FCC Test Report

Report No.: AGC00210210705FE02

FCC ID : 2AVUHVA-SP003

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION : VAVA Chroma 4K UST Triple Laser Projector

BRAND NAME : VAVA

MODEL NAME : VA-SP003

APPLICANT Shenzhen NearbyExpress Technology Development

Company Limited

DATE OF ISSUE : Apr. 01, 2022

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 63

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 01, 2022	Valid	Initial Release



Page 3 of 63

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION 2.2. TABLE OF CARRIER FREQUENCYS 2.3. RELATED SUBMITTAL(S)/GRANT(S). 2.4. TEST METHODOLOGY. 2.5. SPECIAL ACCESSORIES. 2.6. EQUIPMENT MODIFICATIONS. 2.7. ANTENNA REQUIREMENT.	
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	g
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
8. BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	26
10.1. MEASUREMENT PROCEDURE	
11. RADIATED EMISSION	28
11.1. MEASUREMENT PROCEDURE	
12. LINE CONDUCTED EMISSION TEST	53
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	53 55



Page 4 of 63

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	54
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	54
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	55
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	63
APPENDIX B: PHOTOGRAPHS OF EUT	63



Page 5 of 63

1. VERIFICATION OF COMPLIANCE

Applicant	Shenzhen NearbyExpress Technology Development Company Limited		
Address	Room 701, 702, 703, 705, 706, 708, 709, Building E, Galaxy World Phase II, Minle Community, Minzhi Street, Longhua District, Shenzhen, Guangdong, China 518000		
Manufacturer	Shenzhen NearbyExpress Technology Development Company Limited		
Address	Room 701, 702, 703, 705, 706, 708, 709, Building E, Galaxy World Phase II, Minle Community, Minzhi Street, Longhua District, Shenzhen, Guangdong, China 518000		
Factory	Appotronics Co., Ltd Bao'an Branch		
Address	301, 1 Block &101 and 301, 3 Block, Yaochuan Industrial Park, Tangwei Community, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, P.R.China		
Product Designation	VAVA Chroma 4K UST Triple Laser Projector		
Brand Name	VAVA		
Test Model	VA-SP003		
Date of test	Jul. 19, 2021 to Apr. 01, 2022		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BLE/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Reviewed By

Cool Cheng
(Project Engineer)

Calvin Liu
(Reviewer)

Apr. 01, 2022



Page 6 of 63

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "VAVA Chroma 4K UST Triple Laser Projector". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
RF Output Power	1.340dBm (Max)		
Bluetooth Version	V5.0		
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps		
Number of channels	40 Channels		
Antenna Designation	Dipole Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	3.12dBi		
Hardware Version	VER:1.0		
Software Version	V1.0		
Power Supply	AC 100-240V, 4A, 50/60Hz		
Test Voltage	AC 120V/60Hz		

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band Channel Number		Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	38	2478 MHz		
	39	2480 MHz		



Page 7 of 63

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AVUHVA-SP003** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 8 of 63

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$		
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %		




Page 9 of 63

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION		
1	Low channel TX		
2	Middle channel TX		
3	High channel TX		

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

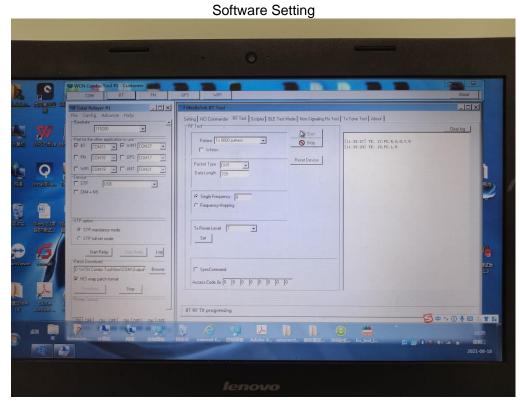



Page 10 of 63

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:

EUT

Conducted Emission Configure:

EUT

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Item Equipment Model No.		ID or Specification	Remark
1	VAVA Chroma 4K UST	VA-SP003	2AVUHVA-SP003	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant

Note: All models will be sold with power board A (MPL_360-FM-3S) or power board B (MPL_360-FM-3TH), and both power boards have been tested Radiated Emission and Conducted Emission and recorded in this report (The only difference between the two power boards is the red and green laser constant current driver IC, and t he product supply voltage is the same. The above changes will not cause any difference in the RF of the Bluet ooth and wifi parts, so the RF part does not need to be re-evaluated.).



Page 11 of 63

6. TEST FACILITY

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Communication Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259	
FCC Test Firm Registration Number	975832	
A2LA Cert. No.	5054.02	
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA	

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
TEST RECEIVER	R&S	ESPI	101206	May 15, 2021	May 14, 2022	
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022	
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A	

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2021	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	May 22, 2020	May 21, 2022
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2022
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 12 of 63

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

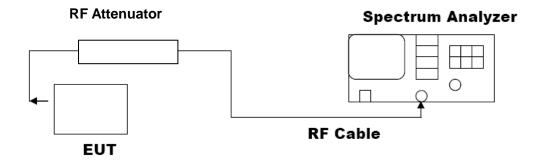




Page 13 of 63

7.3. LIMITS AND MEASUREMENT RESULT

10. 1 7.1.2 7								
Test Data of Conducted Output Power								
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail				
GFSK 1M	2402	0.585	≤30	Pass				
	2440	-0.741	≤30	Pass				
	2480	1.340	≤30	Pass				

Test Graphs of Conducted Output Power













Page 15 of 63

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth									
Test Mode	Test Channel (MHz)	99% Occupied -6dB Bandwidth (MHz) Bandwidth (MH		Limits (MHz)	Pass or Fail				
GFSK 1M	2402	1.037	0.708	≥0.5	Pass				
	2440	1.037	0.703	≥0.5	Pass				
	2480	1.036	0.705	≥0.5	Pass				















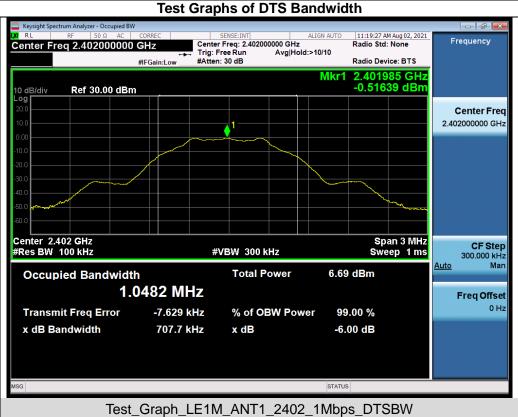







Test_Graph_LE1M_ANT1_2480_1Mbps_DTSBW

STATUS



Page 19 of 63

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

0.1. Emilio / 11.0 mE/1001/Emilio / 1200 E							
LIMITS AND MEASUREMENT RESULT							
Applicable Limite	Measurement Result						
Applicable Limits	Test Data	Criteria					
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS					



Scale Type

<u>Lin</u>

Stop 2.390 GHz Sweep 226.0 ms (30000 pts)



Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands Keysight Special RF 50 2 AC Center Freq 2.402000000 GHz
PNO: Wide IFGain:Low Frequency Avg Type: Log-Pwr Avg|Hold: 10/10 Trig: Free Run **Auto Tune** Mkr1 2.401 984 5 GHz -0.510 dBm Ref 20.00 dBm Center Freq 2.402000000 GHz Start Freq 2.400500000 GHz Stop Freq 2.403500000 GHz **CF Step** 300.000 kHz Auto Man Freq Offset 0 Hz **Scale Type** Center 2.402000 GHz #Res BW 100 kHz Span 3.000 MHz Sweep 2.000 ms (30000 pts) <u>Lin</u> **#VBW** 300 kHz Test_Graph_LE1M_ANT1_2402_1Mbps_Reference Level Keysight Spectrum

RL RF 50 Ω AC UNRAC

Center Freq 1.210000000 GHz


PNO: Fast +
IFGain:Low Avg Type: Log-Pwr Avg|Hold: 10/10 Frequency Trig: Free Run **Auto Tune** Mkr1 1.763 16 GHz -54.548 dBm Ref 20.00 dBm Center Freq 1.210000000 GHz Start Freq 30.000000 MHz Stop Freq 2.390000000 GHz CF Step 236.000000 MHz Man <u>Auto</u> Freq Offset 0 Hz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Emissions

#VBW 300 kHz


Start 0.030 GHz #Res BW 100 kHz






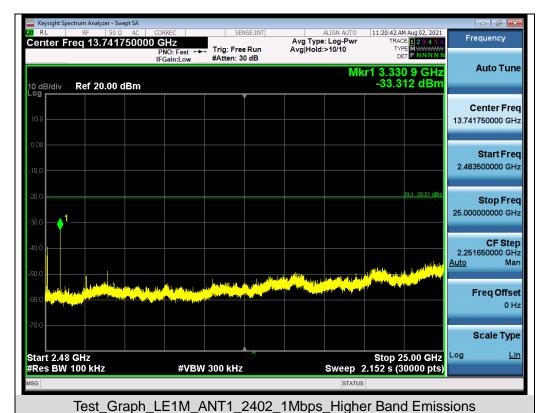








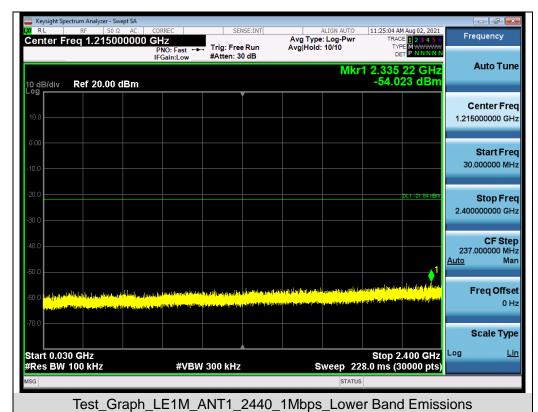













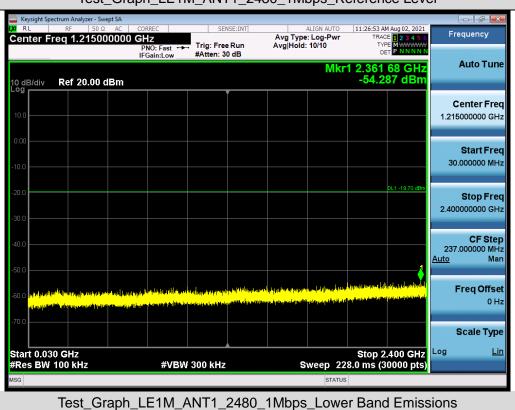





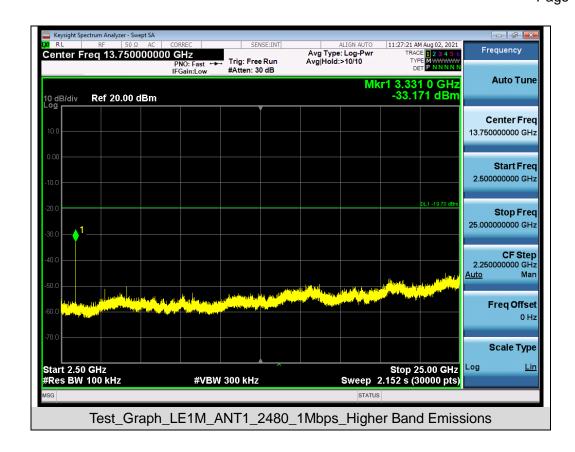





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands Center Freq 2.398500000 GHz
PNO: Fast
IFGain:Low Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run **Auto Tune** Mkr2 2.400 000 0 GHz -55.348 dBm Ref 20.00 dBm Center Freq 2.398500000 GHz Start Freq 2.390000000 GHz Stop Freq 2.407000000 GHz Start 2.390000 GHz #Res BW 100 kHz Stop 2.407000 GHz 2.000 ms (30000 pts) **CF Step #VBW** 300 kHz 1.700000 MHz <u>Auto</u> Man -0.387 dBm -55.348 dBm Frea Offset 0 Hz **Scale Type** Log <u>Lin</u> STATUS Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Edge Emissions ON RL RF 50 Ω AL CONTROL OF REST PNO: Fast PRO: Fast Fedin:Low Frequency Trig: Free Run **Auto Tune** Mkr2 2.483 500 0 GHz -56.224 dBm Ref 20.00 dBm Center Freq 2.487500000 GHz Start Freq 2.475000000 GHz 2 Stop Freq 2.500000000 GHz Start 2.47500 GHz #Res BW 100 kHz Stop 2.50000 GHz 4.000 ms (30000 pts) **CF Step #VBW** 300 kHz 2.500000 MHz <u>Auto</u> 0.346 dBm -56.224 dBm Freq Offset 0 Hz **Scale Type** Log <u>Lin</u>

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Edge Emissions



Page 26 of 63

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.


10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.


10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2402	-14.991	≤8	Pass			
GFSK 1M	2440	-16.294	≤8	Pass			
	2480	-14.193	≪8	Pass			


Test Graphs of Conducted Output Power Spectral Density

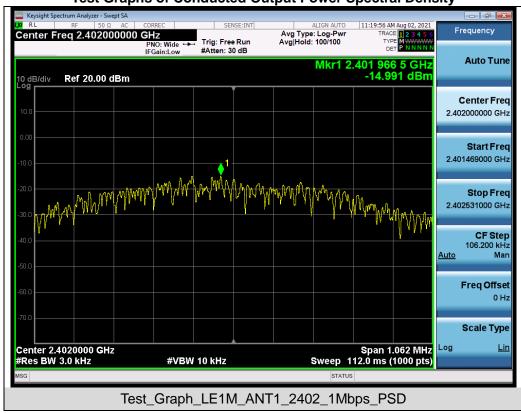

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





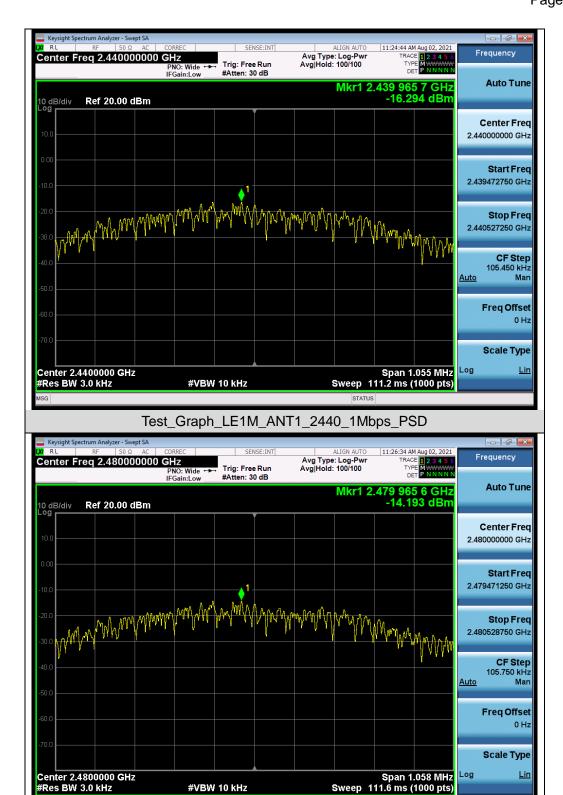

Test_Graph_LE1M_ANT1_2480_1Mbps_PSD




Page 28 of 63

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

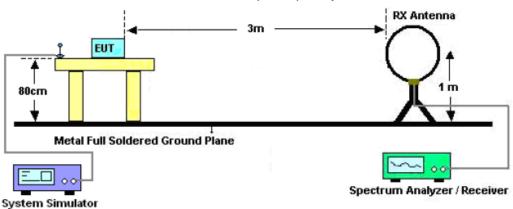

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

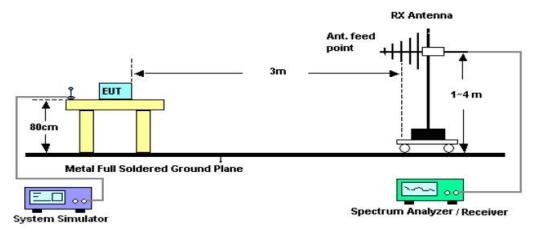

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

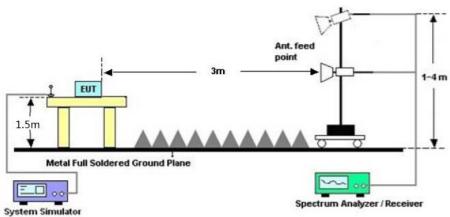



Page 30 of 63

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.




Page 31 of 63

Radiated emission from 30MHz to 1000MHz

Power board A

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

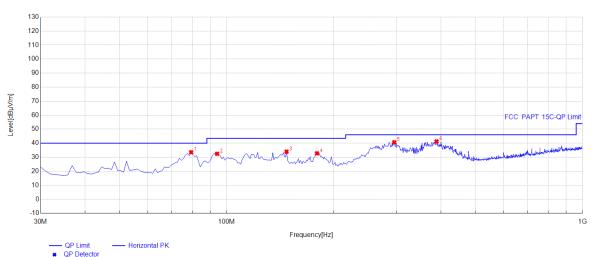


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	79.47	33.55	7.26	40.00	6.45	100	118	Horizontal
2	94.02	32.44	8.92	43.50	11.06	100	281	Horizontal
3	147.37	33.99	14.88	43.50	9.51	100	33	Horizontal
4	179.38	32.81	13.06	43.50	10.69	100	359	Horizontal
5	295.78	40.65	15.97	46.00	5.35	100	276	Horizontal
6	388.9	41.27	19.39	46.00	4.73	100	349	Horizontal

RESULT: PASS



Page 32 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

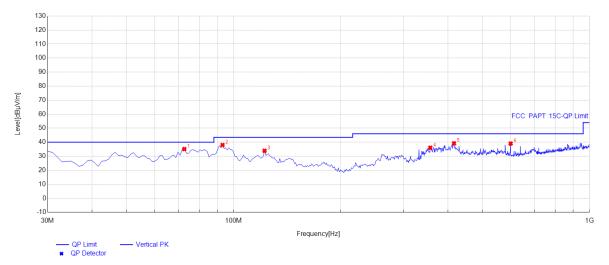


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	72.68	35.12	8.67	40.00	4.88	100	340	Vertical
2	93.05	37.99	8.52	43.50	5.51	100	141	Vertical
3	122.15	33.91	13.62	43.50	9.59	100	184	Vertical
4	356.89	36.07	18.09	46.00	9.93	100	197	Vertical
5	416.06	39.21	20.14	46.00	6.79	100	192	Vertical
6	600.36	39.05	24.33	46.00	6.95	100	238	Vertical

RESULT: PASS



Page 33 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

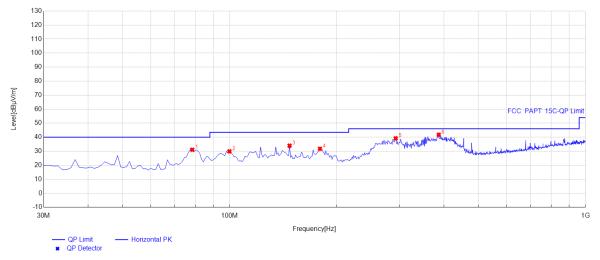


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	78.5	31.06	7.46	40.00	8.94	100	94	Horizontal
2	99.84	29.89	11.30	43.50	13.61	100	228	Horizontal
3	147.37	33.97	14.88	43.50	9.53	100	8	Horizontal
4	179.38	31.75	13.06	43.50	11.75	100	359	Horizontal
5	292.87	39.20	16.04	46.00	6.80	100	115	Horizontal
6	386.96	41.79	19.33	46.00	4.21	100	0	Horizontal

RESULT: PASS



Page 34 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003	
Temperature	25° C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 2	Antenna	Vertical	

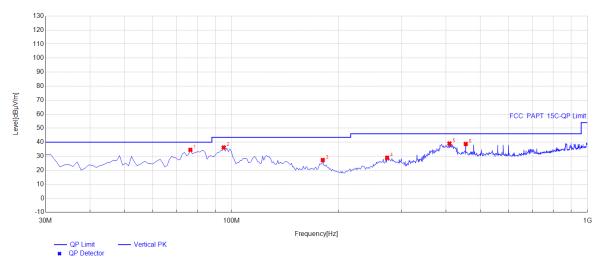


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	76.56	34.54	7.87	40.00	5.46	100	166	Vertical
2	94.99	36.22	9.32	43.50	7.28	100	318	Vertical
3	180.35	27.28	12.98	43.50	16.22	100	278	Vertical
4	273.47	28.93	15.71	46.00	17.07	100	143	Vertical
5	409.27	39.06	20.01	46.00	6.94	100	187	Vertical
6	454.86	38.75	21.08	46.00	7.25	100	358	Vertical

RESULT: PASS



Page 35 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003	
Temperature	25° C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 3	Antenna	Horizontal	

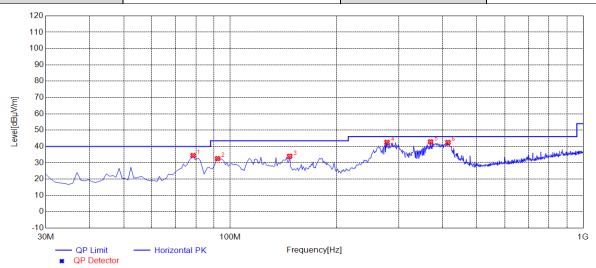


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	78.5000	34.41	7.46	40.00	5.59	100	73	Horizontal
2	92.0800	32.55	8.12	43.50	10.95	100	292	Horizontal
3	147.3700	33.99	14.88	43.50	9.51	100	33	Horizontal
4	278.3200	42.53	16.14	46.00	3.47	100	281	Horizontal
5	369.5000	42.85	18.59	46.00	3.15	100	20	Horizontal
6	414.1200	42.49	20.10	46.00	3.51	100	36	Horizontal

RESULT: PASS



Page 36 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003	
Temperature	25° C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 3	Antenna	Vertical	

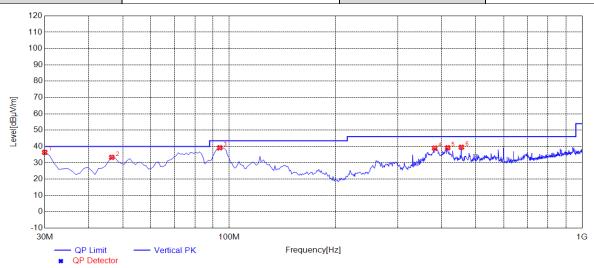

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.0000	36.39	9.85	40.00	3.61	100	256	Vertical
2	46.4900	33.35	11.77	40.00	6.65	100	230	Vertical
3	94.0200	39.22	8.92	43.50	4.28	100	173	Vertical
4	382.1100	38.99	19.14	46.00	7.01	100	206	Vertical
5	416.0600	39.21	20.14	46.00	6.79	100	192	Vertical
6	454.8600	39.54	21.08	46.00	6.46	100	32	Vertical

RESULT: PASS

Note:


1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.



Page 37 of 63

Power board B

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

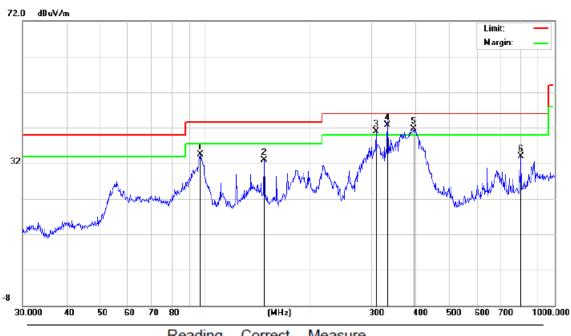


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		96.7749	24.70	9.76	34.46	43.50	-9.04	peak
2		147.4036	20.73	12.10	32.83	43.50	-10.67	peak
3	İ	307.8313	24.30	16.62	40.92	46.00	-5.08	peak
4	*	332.5187	25.53	17.17	42.70	46.00	-3.30	QP
5	İ	394.8545	23.09	18.56	41.65	46.00	-4.35	peak
6		801.7863	14.34	19.47	33.81	46.00	-12.19	peak

RESULT: PASS



Page 38 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

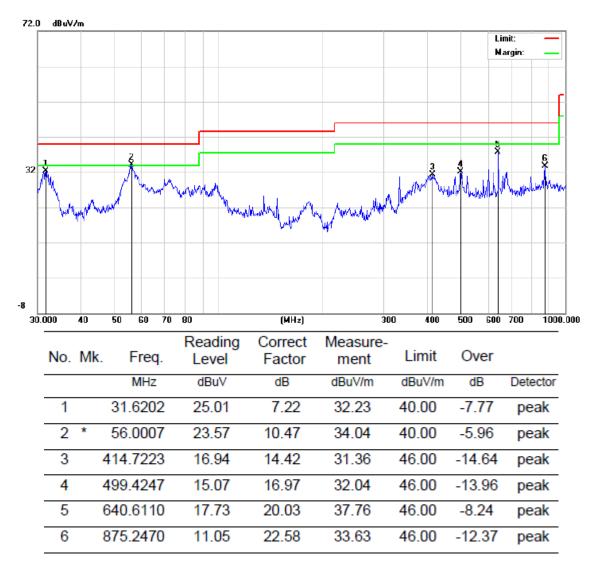


RESULT: PASS




Page 39 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

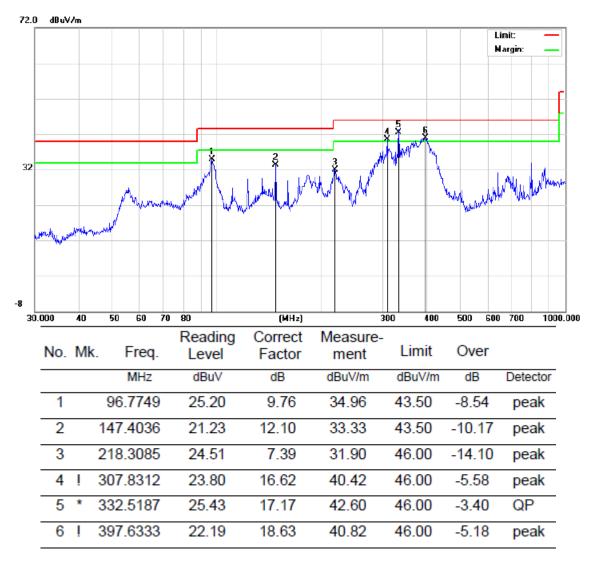


RESULT: PASS





VAVA Chroma 4K UST Triple **EUT** VA-SP003 **Model Name** Laser Projector **Temperature** 25° C **Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Mode 2 **Antenna** Vertical

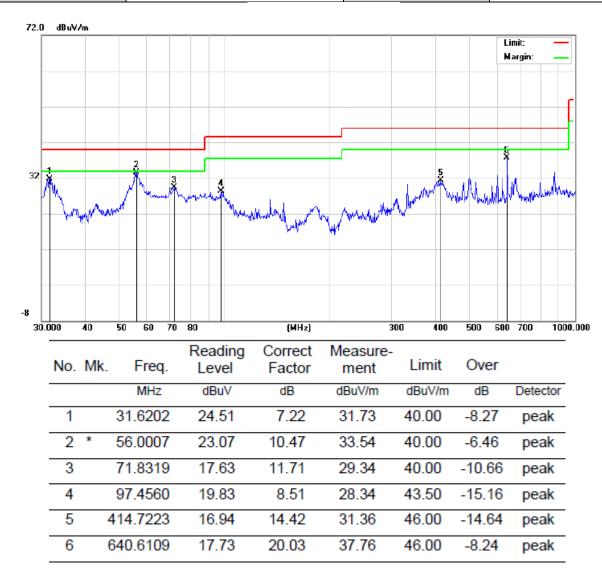


RESULT: PASS



Page 41 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

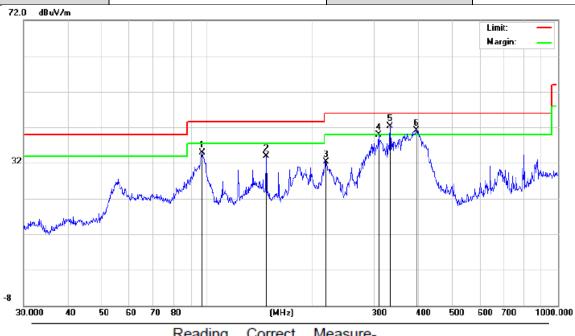

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		96.7749	25.20	9.76	34.96	43.50	-8.54	peak
2		147.4036	21.73	12.10	33.83	43.50	-9.67	peak
3		218.3085	25.01	7.39	32.40	46.00	-13.60	peak
4		307.8312	23.30	16.62	39.92	46.00	-6.08	peak
5	*	332.5187	25.19	17.17	42.36	46.00	-3.64	QP
6	İ	394.8543	22.59	18.56	41.15	46.00	-4.85	peak

RESULT: PASS



Page 42 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		31.6202	24.51	7.22	31.73	40.00	-8.27	peak
2	*	56.0007	23.07	10.47	33.54	40.00	-6.46	peak
3		71.8319	17.63	11.71	29.34	40.00	-10.66	peak
4		414.7223	17.44	14.42	31.86	46.00	-14.14	peak
5		640.6109	17.23	20.03	37.26	46.00	-8.74	peak
6		875.2469	11.55	22.58	34.13	46.00	-11.87	peak

RESULT: PASS Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



Page 43 of 63

Radiated emission above 1GHz

Power board A

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.29	0.08	45.37	74	-28.63	peak
4804.000	34.28	0.08	34.36	54	-19.64	AVG
7206.000	40.12	2.21	42.33	74	-31.67	peak
7206.000	31.59	2.21	33.8	54	-20.2	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	45.39	0.08	45.47	74	-28.53	peak	
4804.000	34.28	0.08	34.36	54	-19.64	AVG	
7206.000	38.49	2.21	40.7	74	-33.3	peak	
7206.000	29.37	2.21	31.58	54	-22.42	AVG	
Remark:							



Page 44 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	44.65	0.14	44.79	74	-29.21	peak
4880.000	35.74	0.14	35.88	54	-18.12	AVG
7320.000	39.72	2.36	42.08	74	-31.92	peak
7320.000	31.53	2.36	33.89	54	-20.11	AVG

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.12	0.14	46.26	74	-27.74	peak
4880.000	38.54	0.14	38.68	54	-15.32	AVG
7320.000	40.15	2.36	42.51	74	-31.49	peak
7320.000	31.59	2.36	33.95	54	-20.05	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 45 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.25	0.22	46.47	74	-27.53	peak
4960.000	35.87	0.22	36.09	54	-17.91	AVG
7440.000	38.42	2.64	41.06	74	-32.94	peak
7440.000	29.11	2.64	31.75	54	-22.25	AVG
		·				
Remark:						•

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4960.000	45.28	0.22	45.5	74	-28.5	peak	
4960.000	34.15	0.22	34.37	54	-19.63	AVG	
7440.000	40.15	2.64	42.79	74	-31.21	peak	
7440.000	30.57	2.64	33.21	54	-20.79	AVG	
Remark:	Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: PASS



Page 46 of 63

Power board B

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.39	0.08	44.47	74	-29.53	peak
4804.000	35.27	0.08	35.35	54	-18.65	AVG
7206.000	39.67	2.21	41.88	74	-32.12	peak
7206.000	30.04	2.21	32.25	54	-21.75	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.26	0.08	46.34	74	-27.66	peak
4804.000	37.42	0.08	37.5	54	-16.5	AVG
7206.000	40.15	2.21	42.36	74	-31.64	peak
7206.000	30.59	2.21	32.8	54	-21.2	AVG
·						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 47 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dB) (dBµV/m)		(dB)	value Type			
4880.000	45.97	0.08	46.05	74	-27.95	peak			
4880.000	36.25	0.08	36.33	54	-17.67	AVG			
7320.000	40.15	2.21	42.36	74	-31.64	peak			
7320.000	320.000 29.86 2.21		32.07	54	-21.93	AVG			
Remark:									

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Frequency Meter Reading		Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.35	0.08	46.43	74	-27.57	peak
4880.000	35.98	0.08	36.06	54	-17.94	AVG
7320.000	41.57	2.21	43.78	74	-30.22	peak
7320.000	7320.000 32.16 2		34.37	54	-19.63	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 48 of 63

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	45.91	0.22	46.13	74	-27.87	peak	
4960.000	36.57	0.22	36.79	54	-17.21	AVG	
7440.000	39.46	2.64	42.1	74	-31.9	peak	
7440.000	28.43	2.64	31.07	54	-22.93	AVG	

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading Factor		Emission Level	Emission Level Limits		Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.16	0.22	45.38	74	-28.62	peak
4960.000	35.27	0.22	.22 35.49 54 -18		-18.51	AVG
7440.000	40.16	2.64	42.8	74	-31.2	peak
7440.000	30.57	2.64	33.21	54	-20.79	AVG
Remark:	_		_			

RESULT: PASS


Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

The "Factor" value can be calculated automatically by software of measurement system.







Test result for band edge emission at restricted bands

EUT	VAVA Chroma 4K UST Triple Laser Projector		VA-SP003
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

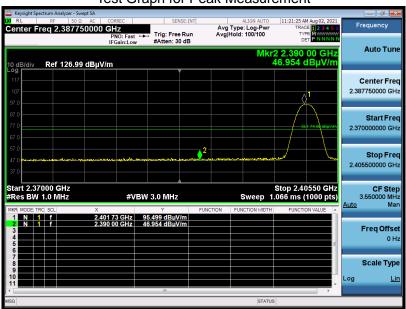



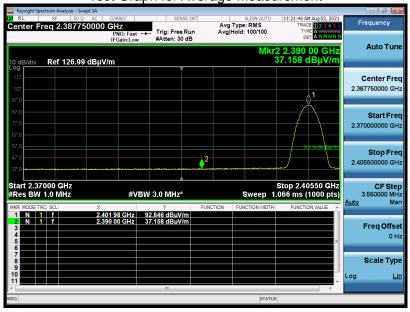


RESULT: PASS






VAVA Chroma 4K UST Triple **EUT** VA-SP003 **Model Name** Laser Projector 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Mode 1 **Antenna** Vertical


Test Graph for Peak Measurement

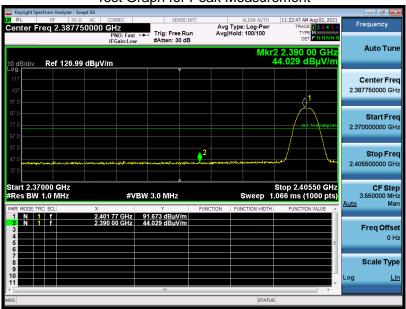

Test Graph for Average Measurement

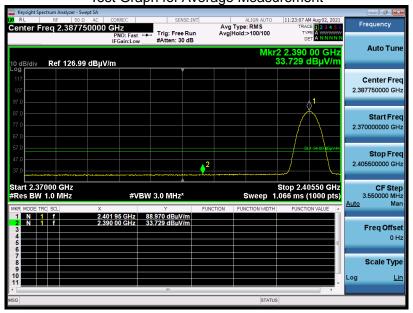


RESULT: PASS







VAVA Chroma 4K UST Triple **EUT Model Name** VA-SP003 Laser Projector 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Horizontal Mode 3 **Antenna**




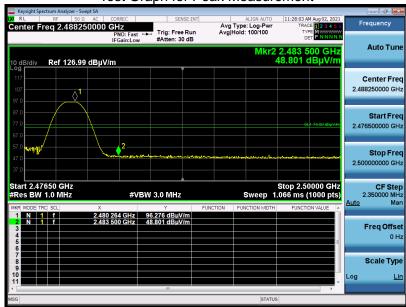



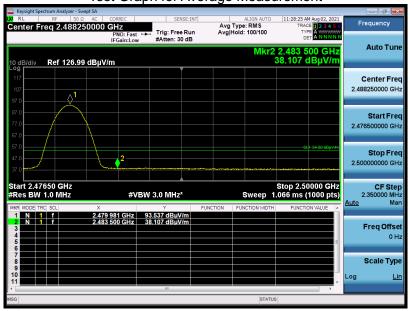


RESULT: PASS






VAVA Chroma 4K UST Triple **EUT** VA-SP003 **Model Name** Laser Projector 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Mode 3 **Antenna** Vertical



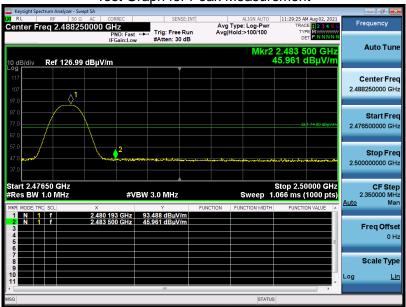

Test Graph for Average Measurement

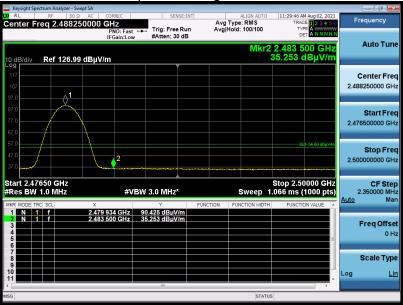

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 53 of 63

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF	Line Voltage
Frequency	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

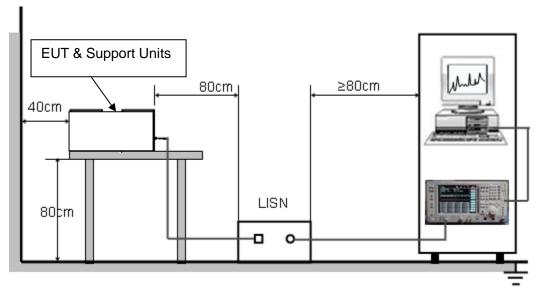



Page 54 of 63


12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST


- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.





12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Power board A at Mode 1 Line Conducted Emission Test Line 1-L

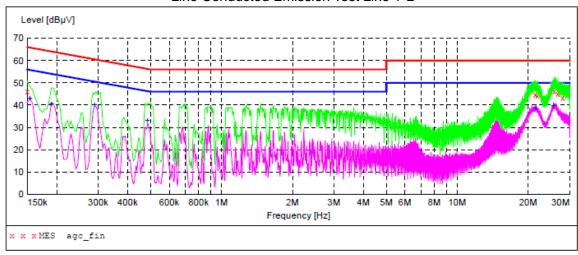

MEASUREMENT RESULT: "agc_fin"

2	U	2	1	/	7	/	2	U		1	÷	4	8	

2022/ //20 2.						
Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
0.150000	46.00	6.9	66	20.0	QP	L1
21.390000	44.60	8.9	60	15.4	QP	L1
21.862000	44.30	8.9	60	15.7	QP	L1
25.746000	46.00	9.2	60	14.0	QP	L1
26.658000	45.00	9.3	60	15.0	QP	L1
27.970000	43.10	9.4	60	16.9	QP	L1


MEASUREMENT RESULT: "agc fin2"

-	021/	/	100	-	48
	11/11/		/ / []		4 24

_	021///20 1:10										
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line				
	0.154000	43.30	6.9	56	12.5	AV	L1				
	0.190000	40.80	6.6	54	13.2	AV	L1				
	0.290000	40.40	6.1	51	10.1	AV	L1				
	0.486000	33.30	5.4	46	12.9	AV	L1				
	21.526000	38.70	8.9	50	11.3	AV	L1				
	25.578000	39.80	9.2	50	10.2	AV	L1				



Line Conducted Emission Test Line 2-N

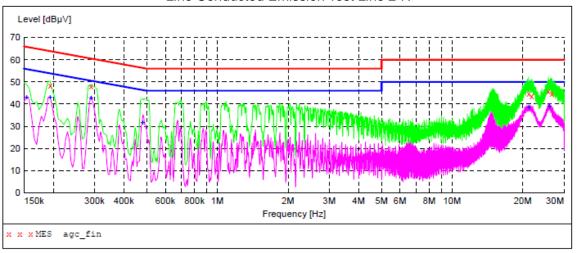

MEASUREMENT RESULT: "agc_fin"

2	021/7/20 2:10)					
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.194000	48.50	6.6	64	15.4	QP	N
	0.290000	47.90	6.1	61	12.6	QP	N
	21.154000	44.80	8.9	60	15.2	QP	N
	21.810000	43.60	8.9	60	16.4	QP	N
	25.686000	45.70	9.2	60	14.3	QP	N
	26.610000	44.80	9.3	60	15.2	QP	N


MEASUREMENT RESULT: "agc_fin2"

2021/7/20 2:10 Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	43.30	6.9	56		AV	N
0.194000	43.20	6.6	54	10.7	AV	N
0.290000	42.70	6.1	51	7.8	AV	N
0.482000	31.90	5.4	46	14.4	AV	N
21.246000	38.70	8.9	50	11.3	AV	N
26.034000	39.10	9.3	50	10.9	AV	N

RESULT: PASS



Power board A at Mode 2 Line Conducted Emission Test Line 1-L

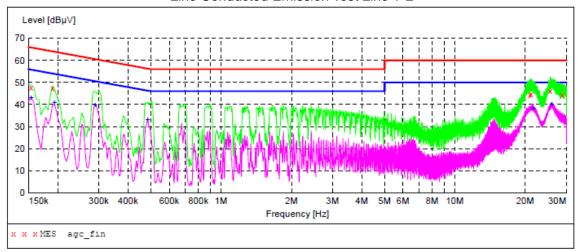

MEASUREMENT RESULT: "agc_fin"


2021/7/20 1:51

2021/1/20 1.	J1					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	47.80	6.9	66	18.0	QP	L1
0.190000	47.20	6.6	64	16.8	QP	L1
20.874000	44.40	8.9	60	15.6	QP	L1
21.154000	44.70	8.9	60	15.3	QP	L1
25.518000	46.20	9.2	60	13.8	QP	L1
28.790000	44.40	9.5	60	15.6	QP	L1

MEASUREMENT RESULT: "agc_fin2"


2021/7/20 1:51

_	.022///20 2.	-					
	Frequency MHz	Level dBµV		Limit dBµV	Margin dB	Detector	Line
	0.154000	43.20	6.9	56	12.6	AV	L1
	0.194000	41.00	6.6	54	12.9	AV	L1
	0.290000	39.90	6.1	51	10.6	AV	L1
	0.486000	33.40	5.4	46	12.8	AV	L1
	21.594000	38.60	8.9	50	11.4	AV	L1
	25.966000	40.20	9.2	50	9.8	AV	L1







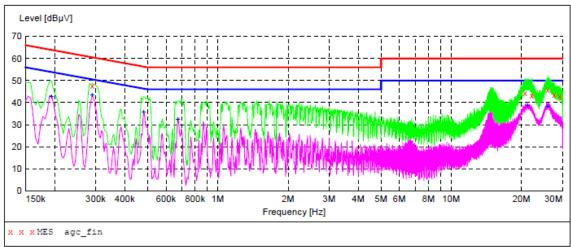

MEASUREMENT RESULT: "agc_fin"

2	021/7/20 2:13 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.290000	47.80	6.1	61	12.7	QP	N
	20.682000	44.30	8.9	60	15.7	QP	N
	22.130000	43.20	9.0	60	16.8	QP	N
	25.902000	45.80	9.2	60	14.2	QP	N
	27.626000	43.50	9.4	60	16.5	QP	N
	29.158000	42.80	9.5	60	17.2	QP	N


MEASUREMENT RESULT: "agc_fin2"

2021/7/20	2:13						
-	cy Hz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.1940	00	43.00	6.6	54	10.9	AV	N
0.2900	00	43.50	6.1	51	7.0	AV	N
0.4820	00	35.80	5.4	46	10.5	AV	N
0.6740	00	32.50	5.4	46	13.5	AV	N
21.1780	00	38.70	8.9	50	11.3	AV	N
25.8460	00	38.50	9.2	50	11.5	AV	N

RESULT: PASS



Power board A at Mode 3 Line Conducted Emission Test Line 1-L

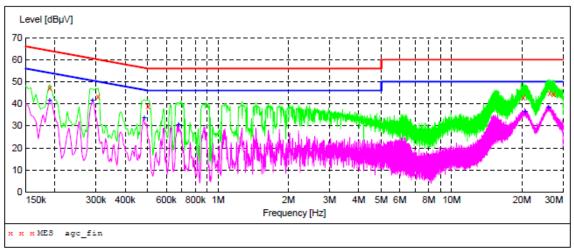

MEASUREMENT RESULT: "agc_fin"


2021/7/20 0:2 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.190000	47.20	6.6	64	16.8	QP	L1
0.306000	43.40	6.0	60	16.7	QP	L1
0.502000	38.70	5.4	56	17.3	QP	L1
20.294000	43.00	8.8	60	17.0	QP	L1
26.274000	44.80	9.3	60	15.2	QP	L1
27.410000	44.30	9.4	60	15.7	QP	L1

MEASUREMENT RESULT: "agc_fin2"

2021/7/20 0:2 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.190000	41.80	6.6	54	12.2	AV	L1
0.290000	41.70	6.1	51	8.8	AV	L1
0.482000	33.90	5.4	46	12.4	AV	L1
0.678000	30.40	5.4	46	15.6	AV	L1
20.610000	36.40	8.8	50	13.6	AV	L1
25.978000	38.40	9.2	50	11.6	AV	L1



Line Conducted Emission Test Line 2-N

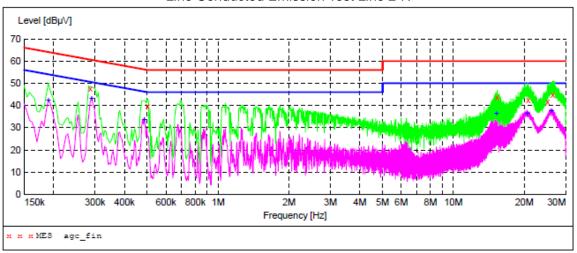


MEASUREMENT RESULT: "agc fin"

2021/7/20 0:30)					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.286000	47.60	6.1	61	13.0	QP	N
0.502000	39.70	5.4	56	16.3	QP	N
15.358000	43.50	8.4	60	16.5	QP	N
20.766000	42.30	8.9	60	17.7	QP	N
25.130000	41.80	9.2	60	18.2	QP	N
26.414000	44.90	9.3	60	15.1	QP	N

MEASUREMENT RESULT: "agc fin2"


Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
42.60	6.6	54	11.4	AV	N
43.40	6.1	51	7.1	AV	N
33.60	5.4	46	12.6	AV	N
36.30	8.3	50	13.7	AV	N
36.30	8.8	50	13.7	AV	N
37.80	9.3	50	12.2	AV	N
	Level dBµV 42.60 43.40 33.60 36.30 36.30	Level Transd dB dB 42.60 6.6 43.40 6.1 33.60 5.4 36.30 8.3 36.30 8.8	Level Transd Limit dBµV dB dBµV 42.60 6.6 54 43.40 6.1 51 33.60 5.4 46 36.30 8.3 50 36.30 8.8 50	Level dBμV Transd dB dBμV Limit dBμV Margin dB 42.60 6.6 54 11.4 43.40 6.1 51 7.1 33.60 5.4 46 12.6 36.30 8.3 50 13.7 36.30 8.8 50 13.7	Level dBμV Transd dB dBμV Limit dBμV Margin dB Detector dB 42.60 6.6 54 11.4 AV 43.40 6.1 51 7.1 AV 33.60 5.4 46 12.6 AV 36.30 8.3 50 13.7 AV 36.30 8.8 50 13.7 AV

RESULT: PASS





Power board B at Mode 3 Line Conducted Emission Test Line 1-L

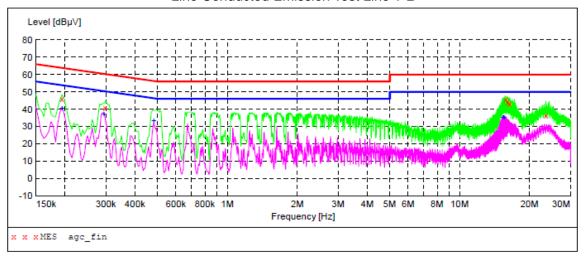

MEASUREMENT RESULT: "agc_fin"


2022/3/9 17:04 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.194000	45.90	6.6	64	18.0	QP	L1
0.298000	40.90	6.0	60	19.4	QP	L1
15.790000	45.50	8.4	60	14.5	QP	L1
16.118000	44.00	8.4	60	16.0	QP	L1
16.442000	43.20	8.5	60	16.8	QP	L1
23.542000	36.40	9.1	60	23.6	QP	L1

MEASUREMENT RESULT: "agc fin2"

2022/3/9 17: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.194000	40.80	6.6	54	13.1	AV	L1
0.294000	37.50	6.1	50	12.9	AV	L1
0.482000	33.60	5.4	46	12.7	AV	L1
15.402000	35.50	8.4	50	14.5	AV	L1
15.466000	35.50	8.4	50	14.5	AV	L1
15.534000	35.50	8.4	50	14.5	AV	L1





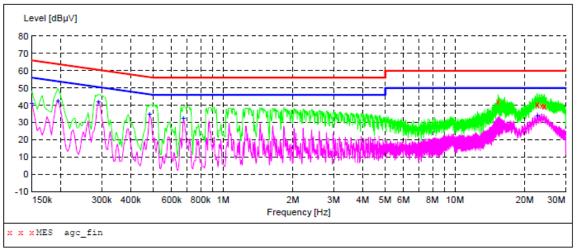

MEASUREMENT RESULT: "agc_fin"

17:07	l Transd	Limit	Margin	Detector	Line
_		dΒμV	dB	Detector	Line
000 41.9	0 8.4	60	18.1	QP	N
000 40.2	9.0	60	19.8	QP	N
000 40.5	9.0	60	19.5	QP	N
000 39.9	9.1	60	20.1	QP	N
000 39.5	9.1	60	20.5	QP	N
000 40.0	9.1	60	20.0	QP	N
	100 Level dBut 000 41.90 40.20 40.50 000 39.90 000 39.50	hcy Level Transd MHz dBμV dB 000 41.90 8.4 000 40.20 9.0 000 40.50 9.0 000 39.90 9.1 000 39.50 9.1	hcy Level Transd Limit MHz dBμV dB dBμV 000 41.90 8.4 60 000 40.20 9.0 60 000 40.50 9.0 60 000 39.90 9.1 60 000 39.50 9.1 60	hcy Level Transd Dimit Margin dB dBμV Margin dB dBμ	hcy Level Transd dB μV Limit dB μV Margin dB Detector dB μV 000 41.90 8.4 60 18.1 QP 000 40.20 9.0 60 19.8 QP 000 40.50 9.0 60 19.5 QP 000 39.90 9.1 60 20.1 QP 000 39.50 9.1 60 20.5 QP

MEASUREMENT RESULT: "agc fin2"

2022/3/9 17: Frequency	Level			_	Detector	Line
MHz	dΒμV	dB	dΒμV	dB		
0.150000	41.10	6.9	56	14.9	AV	N
0.194000	42.60	6.6	54	11.3	AV	N
0.290000	42.30	6.1	51	8.2	AV	N
0.482000	34.80	5.4	46	11.5	AV	N
0.674000	32.40	5.4	46	13.6	AV	N
22.662000	34.00	9.0	50	16.0	AV	N

RESULT: PASS

Note: All test modes had been tested. The power board A all the case is recorded in the report, and the power board B of the mode 3 is the worst case and recorded in the report.



Page 63 of 63

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC00210210705AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC00210210705AP04

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.