

		document number:	
Specification For Approval			
Customer Name: Customer:			
Supplier Name: Customer:	Dongguan Zhongyida Electronic Technology Co., LTD		
Customer No. :		Supplier No. :	
product descripti on:	2.4G Thumb antenna	Equipped with models :	
Supplier recognition (seal):		Customer recognition (seal):	
Production: Zhou Jingfeng	Structure: Zhou Jingfeng		
examine and verify:	Date: 2024.08.20		

catalogue

the title page of a thread-bound book.....	1
catalogue.....	2
1. product picture.	3-4
2 .Product parameters.....	5
4 .Antenna efficiency and gain.....	6
3 . Product size drawings.....	7
4 . Environmental reliability experiment report.....	8

1. product picture




2. Product Parameter

Product test, test parameters			
Product Name (Name)	2. 4G Thumb antenna	Product Model Number (Model Type)	
Electrical performance index (Electrical Specifications)			
Frequency Range (Frenquency Range)	2400-2500Mhz	Polarization mode (Polarization)	perpendicular
Input impedance (Impedance)	50 Ω	radiation direction	omnidirectional
Standing Bobby (VSWR)	≤2	Power capacity (Power)	50W
Gain (Gain)	-3.32dBi	Bandwidth (Bandwidth	100MHz



Mechanical index (Mechanical Specifications)			
Dimensions (Dimensions)	14MM \pm 2MM	Antenna Color (Chassis Color)	black
Connector model number (Connector)	SMA needle	Lead length (Cable Length)	
Antenna material (Chassis Material)	AB S		
working temperature (Working Temperature)	-40°C \pm 85°C	Storage temperature (Limit Temperature)	-40°C \pm 85°C

III. S 11 (VSWR, Return loss, Smith) data



1. one. The Network Analyzer Report

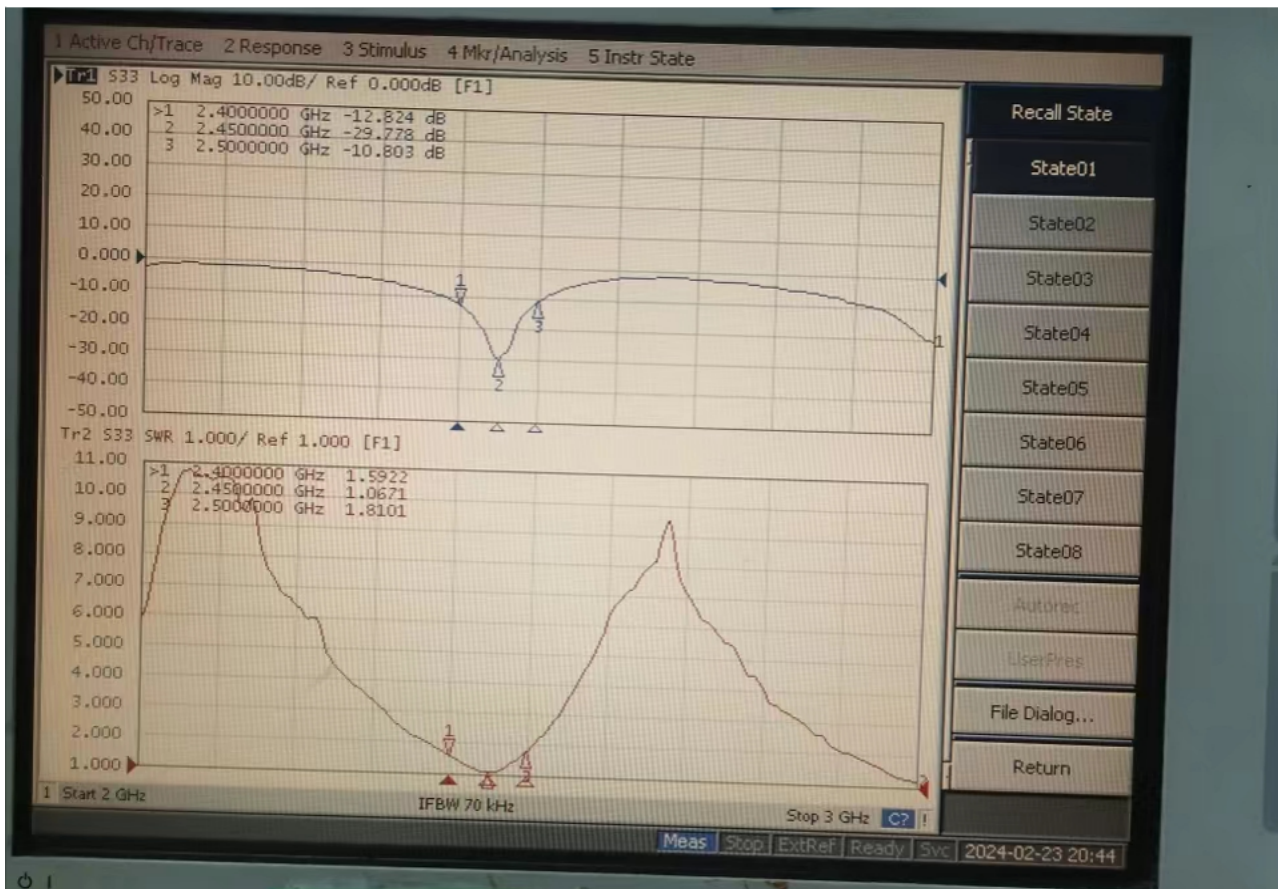



2.2D-3D pattern

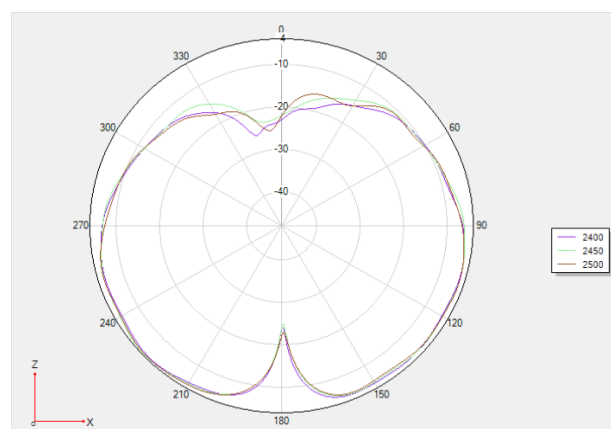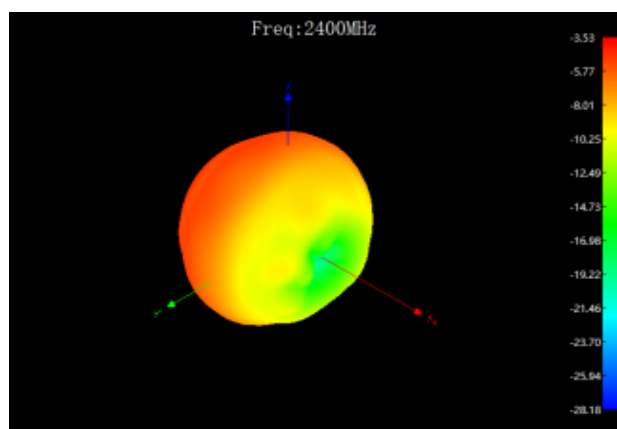

2400HMZ

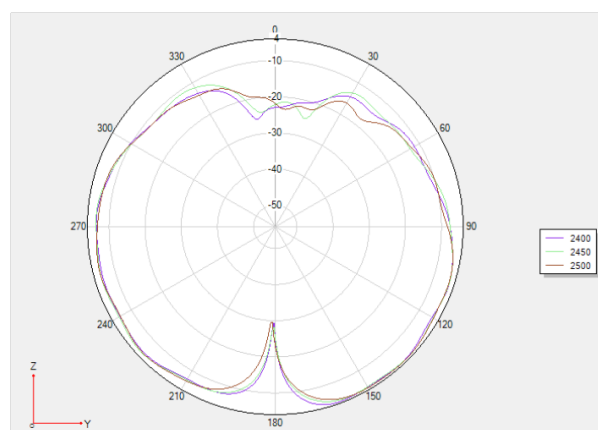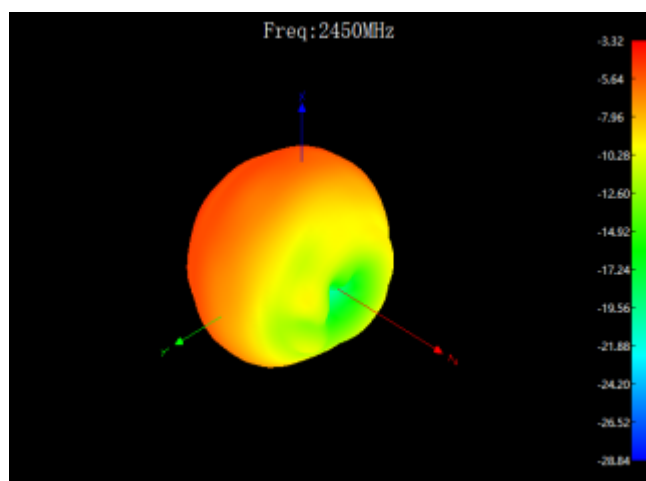

2450HMZ

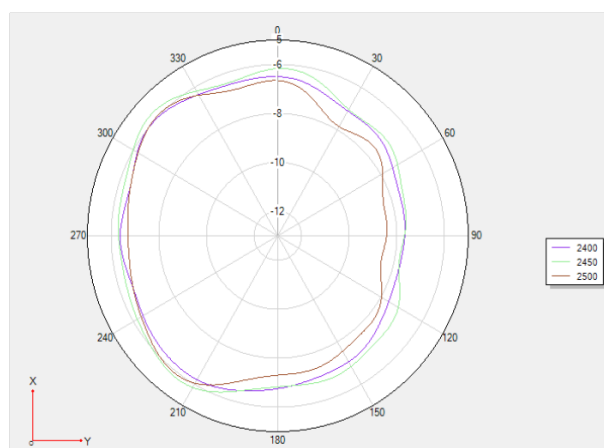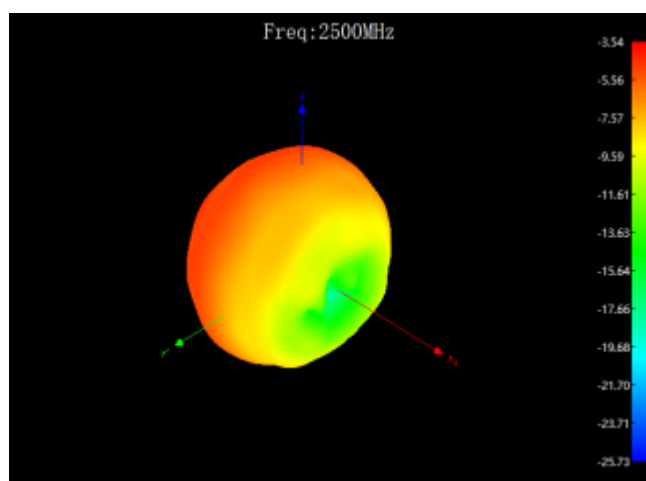

2500HMZ

4.Antenna efficiency and gain

Frequenc	Efficiency	Efficiency / %		Frequenc	MaxGain/	AvgGain/dBi	
2400	-7.25	18.84		2400	-3.53	-7.25	
2450	-7.03	19.82		2450	-3.32	-7.03	
2500	-7.28	18.71		2500	-3.54	-7.28	

[illegible]

IV. Environmental performance test

Storage environment	Test temperature, humidity and air pressure are as follows: 1. Temperature is $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$ 2. Relative humidity is 45% - 85% 3. Air pressure is 86 kpa-106 kpa	Electrical and mechanical properties are normal
thermocycling	Five cycles were performed between 70°C and 40°C and then 1-2H under normal conditions.	Dimensions shall meet the requirements and shall be Meet the satisfaction In the mechanical and electrical performance
Constant humidity and heat trial	Relative humidity: $95 \pm 3\%$, test temperature: 40°C . After a sustained 2H action, Electrical performance is measured within 5min after its removal. The test article is 1-2H under normal conditions to check the appearance quality	Dimensions shall meet the requirements and shall be Meet the satisfaction In the mechanical and electrical performance
vibration test	.0Dynamic frequency range: 10-55 HZ, displacement amplitude: 0.35MM, acceleration amplitude: 50M / S, sweep cycle number: 30 times	Electrical and mechanical properties are normal
fall-down test	1M falls 3 times in the axis direction vertical to each other	Electrical and mechanical properties are normal