



Report No: FCC 1706170-02 File reference No: 2017-07-10

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC

Model No: ST7150, P7100, EM795, T7000, M710R

Trademark: Polaroid, Emerson, Packard Bell, Smartab

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: July 10, 2017

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Date: 2017-07-10



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

Page 2 of 97

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

Page 3 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample.	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB & 99% Bandwidth	22
8.0	Maximum Output Power.	46
9.0	Carrier Frequency Separation.	49
10.0	Number of Hopping Channel.	53
11.0	Time of Occupancy (Dwell Time)	57
12.0	Out of Band Measurement.	70
13.0	Antenna Requirement.	83
14.0	FCC ID Label.	84
15.0	Photo of Test Setup and EUT View.	85

Date: 2017-07-10



Page 4 of 97

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian

District, Shenzhen, Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg, 4, Jing Hua Square, Jinghua Street, Shennan Road Centre, Shenzhen, Guangdong,

China

Telephone: -Fax: --

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg, 4, Jing Hua Square, Jinghua Street, Shennan Road Centre,

Shenzhen, Guangdong, China

Brand Name: Polaroid, Emerson, Packard Bell, Smartab

Model Number: ST7150

Additional Model Number: P7100, EM795, T7000, M710R Power Adapter Model No.: TPA-95A050100UU

Input: 100-240V, 50/60Hz, 0.15A; Output: 5V, 1000mA

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: Integral Antenna and the maximum Gain of this antenna is 0dBi;

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1706170-02 Page 5 of 97

Date: 2017-07-10



Remark: 1. There are alternative manufacturers for USB cable and EMMC.

Name	Manufacturer	Model				
USB Cable	USB Cable Shenzhen Xinhuai Ronghui Technology Co,Ltd.					
	DongGuan MinTai Electronic Co.,LTD					
EMMC	Samsung	KLMAG2GE4A				
	FORESEE					
Note: During test, each configure are considered and tested. Only worst case are recorded in the test						

Note: During test, each configure are considered and tested. Only worst case are recorded in the test report

- 2. There are two different layout for G-sensor I^2C_7 OTG test, Volume adjustment and Amplifier enable. But the part placement is the same. Please see internal photos for the detail. For the different layout, We did relative tests and only worse cased were recorded in the test report
- 1.4 Submitted Sample: 2 Samples
- 1.5 Test Duration 2017-06-19 to 2017-07-08
- 1.6 Test Uncertainty
 Conducted Emissions Uncertainty = 3.6dB
 Radiated Emissions Uncertainty = 4.7dB
- 1.7 Test Engineer Terry Tang

 The sample tested by

Print Name: Terry Tang

Page 6 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2016-08-22	2017-08-21
TWO	R&S	EZH3-Z5	100294	2016-08-22	2017-08-21
Line-V-NETW		EZN3-Z3	100294	2010-08-22	2017-08-21
TWO	R&S	EZH3-Z5	100253	2016-08-22	2017-08-21
Line-V-NETW		EZII3-Z3	100233	2010-06-22	2017-08-21
	R&S				
Ultra Broadband		HL562	100157	2016-08-23	2017-08-22
ANT					
	R&S	ESDV	100008	2016-08-22	2017-08-21
ESDV Test Receiver					
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-22	2017-08-21
System Controller	СТ	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-22	2017-08-21
3m OATS		-	N/A	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-22	2017-08-21
Power sensor	Anritsu	MA2491A	32263	2016-08-22	2017-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-23	2017-08-21
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-23	2017-08-22
9*6*6 Anechoic			N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-22	2017-08-21
DE C-1-1-	SCHWARZBEC			2016 00 22	2017 00 22
RF Cable	K			2016-08-23	2017-08-22
Pre-Amplifier	НР	8447D	2727A05017	2016-08-05	2017-08-04
Pre-Amplifier	EM	EM30265		2016-08-05	2017-08-04

Page 7 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

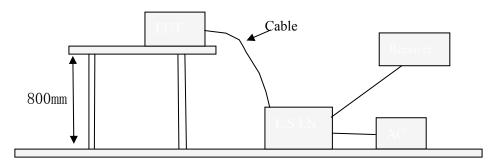

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Page 9 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



A. EUT

Device	Manufacturer	Model	FCC ID
Tablet PC	Shenzhen Jingwah Information	ST7150, P7100, EM795,	RBD-M710R2
Tablet PC	Technology Co., Ltd.	T7000, M710R	KDD-W1/10K2

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

	Frequency	Class A Lim	its (dB µ V)	$(dB \ \mu \ V) \hspace{1cm} Class \ B \hspace{1cm} Limits \ (dB \ \mu \ V)$		
	(MHz)	Quasi-peak Level Average Level		Quasi-peak Level	Average Level	
	0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*	
	$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
Ī	5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2017-07-10



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

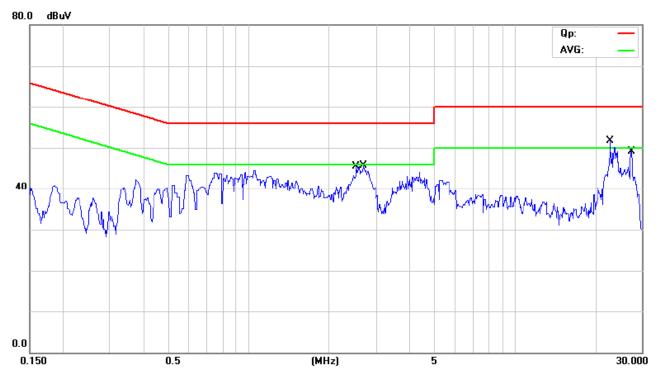

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	2.5211	22.40	10.87	33.27	56.00	-22.73	QP	
2		2.5211	9.30	10.87	20.17	46.00	-25.83	AVG	
3		2.6802	20.30	10.87	31.17	56.00	-24.83	QP	
4		2.6802	7.30	10.87	18.17	46.00	-27.83	AVG	
5		22.8908	19.90	11.27	31.17	60.00	-28.83	QP	
6		22.8908	1.30	11.27	12.57	50.00	-37.43	AVG	
7		27.3221	14.90	11.35	26.25	60.00	-33.75	QP	
8		27.3221	1.20	11.35	12.55	50.00	-37.45	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2017-07-10



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

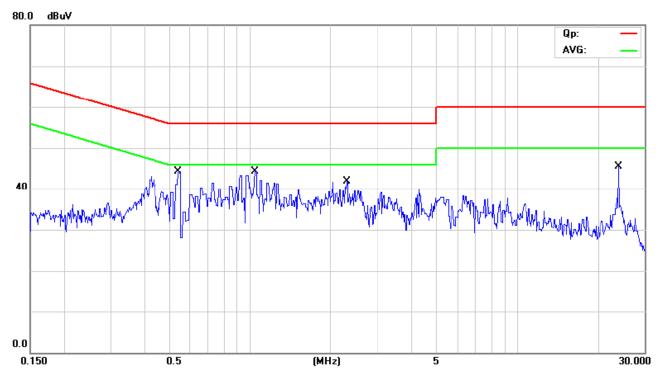

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.5375	26.40	10.32	36.72	56.00	-19.28	QP	
2	0.5375	12.10	10.32	22.42	46.00	-23.58	AVG	
3	1.0436	24.30	10.90	35.20	56.00	-20.80	QP	
4	1.0436	0.50	10.90	11.40	46.00	-34.60	AVG	
5	2.2914	20.40	10.87	31.27	56.00	-24.73	QP	
6	2.2914	2.60	10.87	13.47	46.00	-32.53	AVG	
7 *	24.0006	33.40	11.34	44.74	60.00	-15.26	QP	
8	24.0006	20.30	11.34	31.64	50.00	-18.36	AVG	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1706170-02 Page 12 of 97


Date: 2017-07-10



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 8999988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

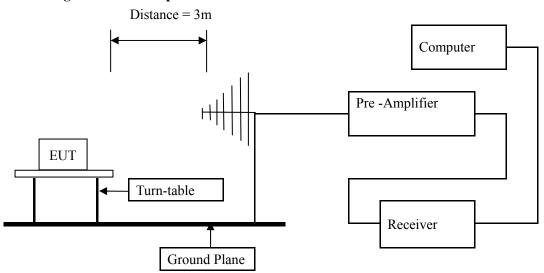

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1706170-02 Page 13 of 97

Date: 2017-07-10



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. GFSK was the worse case because it has highest output power

Report No.: FCC1706170-02 Page 14 of 97

Date: 2017-07-10



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
388.400	39.45	Н	46.00
932.960	39.97	Н	46.00
182.800	36.16	Н	43.50
137.080	32.68	Н	43.50
31.240	32.73	V	40.00
936.360	39.83	V	46.00
182.760	34.12	V	43.50
137.080	30.85	V	43.50

Page 15 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

H MARKER 2 RBW 120 kHz Marker 2 [T1] 388.4 MHz 50 µs 39.45 dBµV/m МТ 388.400000000 MHz Att 10 dB PREAMP ON dΒμV 100 MHz Marker /m 39 97 dBuV 932 960000000 MHz 1 PK MAXH 36.16 dΒμV 182,800000000 MHz -60 dВ 32 68 μV TDF 080000000 137 MHz -50 6DB 30 MHz 1 GHz


Page 16 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

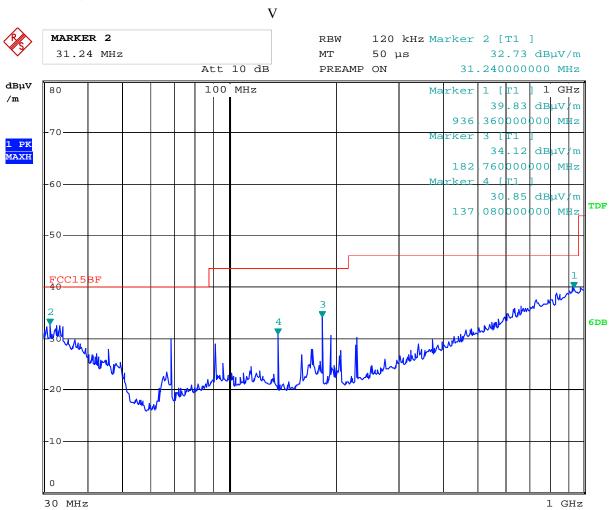

Report No.: FCC1706170-02 Page 17 of 97

Date: 2017-07-10



Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4882	-	Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323	1	H/V	74(Peak)/ 54(AV)
9764	-	H/V	74(Peak)/ 54(AV)
12205	-	H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 18 of 97 Report No.: FCC1706170-02

Date: 2017-07-10



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured


Date: 2017-07-10



Please refer to the following test plots for details:

Low Channel: Horizontal



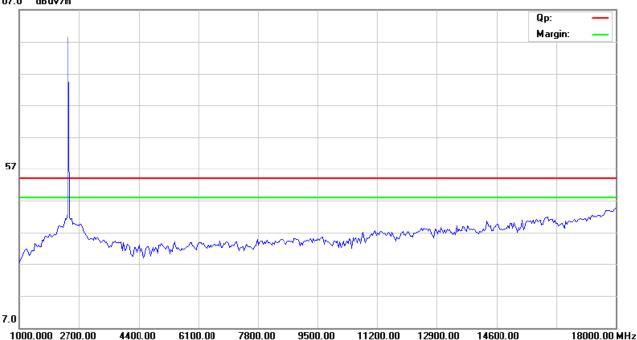

Low Channel: Vertical

107.0 dBuV/m



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 20 of 97


Report No.: FCC1706170-02

Date: 2017-07-10




Middle Channel: Horizontal



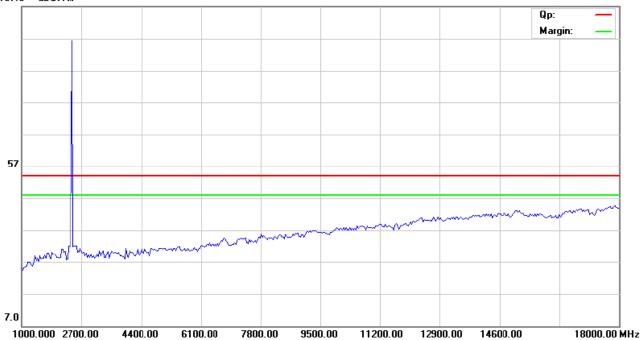

Middle Channel: Vertical

107.0 dBuV/m

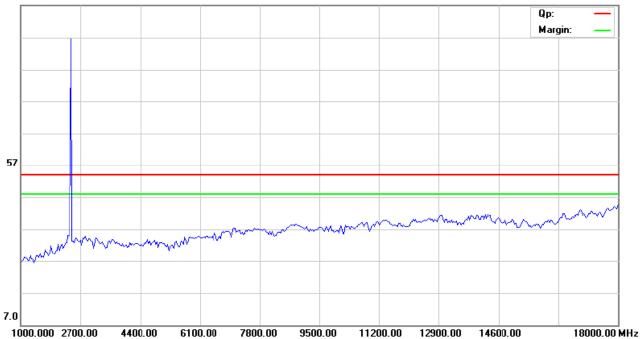

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 21 of 97

Report No.: FCC1706170-02


Date: 2017-07-10



High Channel: Horizontal

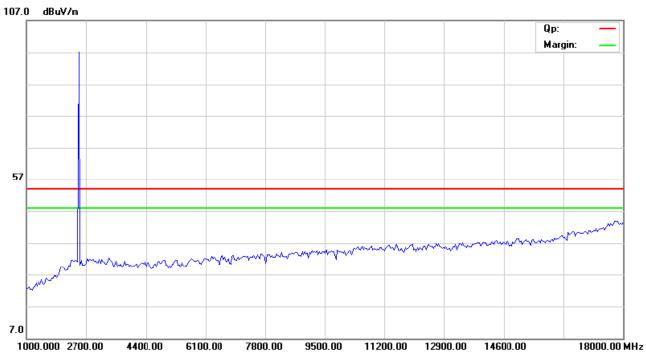

High Channel: Vertical

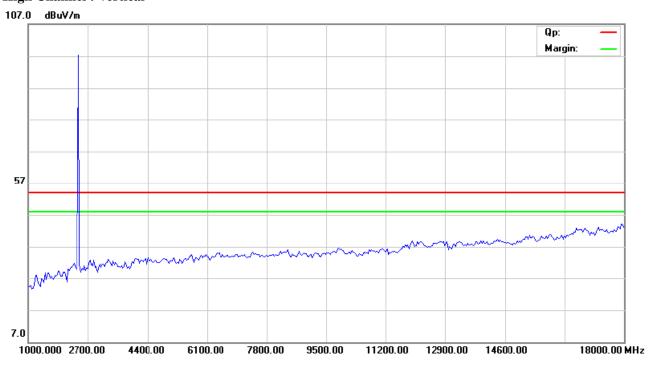

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2017-07-10



Page 22 of 97

7.0 20dB & 99% Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

Type of Modulation of ST					
EUT		Tablet PC		ST7150	
Mode	Ke	ep Transmitting	Input Voltage	DC3.7V	
Temperat	ure	24 deg. C,	Humidity	56% RH	
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail	
Low	2402	1022		Pass	
Middle	2441	1016		Pass	
High	2480	1016		Pass	

Page 23 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

1. Condition: Low Channel

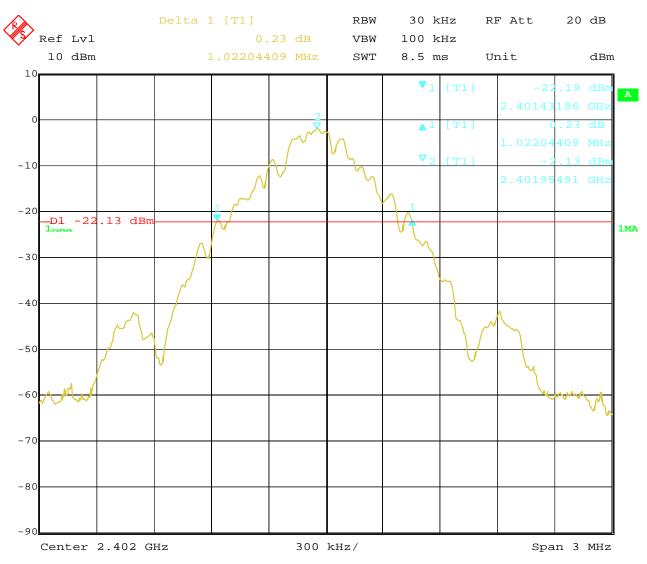


Page 24 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



2. Condition: Middle Channel

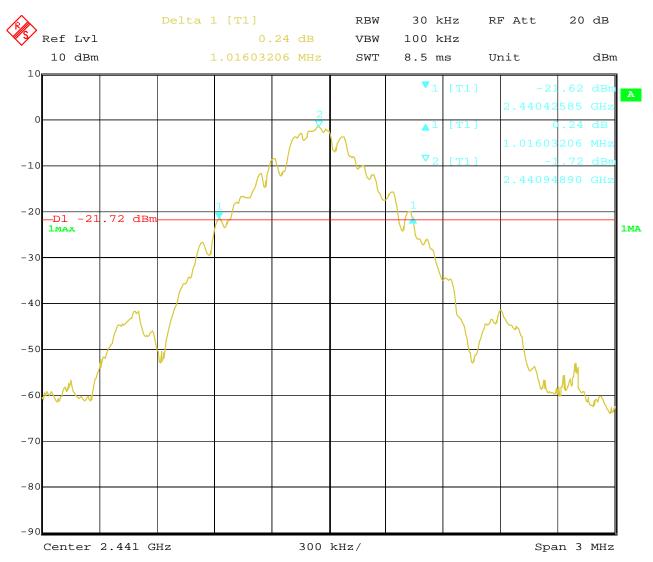


4.JUL.2017 Date: 16:31:49 Report No.: FCC1706170-02 Page 25 of 97

Date: 2017-07-10



3. High Channel

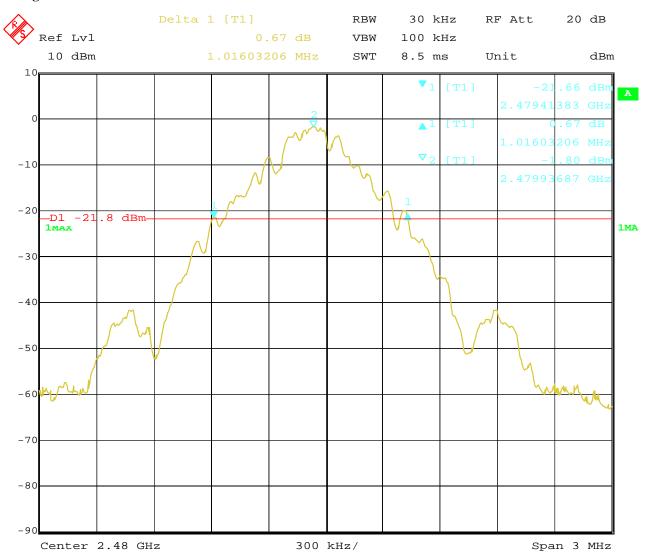

4.JUL.2017 16:39:05 Date:

Date: 2017-07-10



Page 26 of 97

Test Result

Type of Modulation: Л/4DQPSK

EUT		Tablet PC		ST7150
Mode	K	Keep Transmitting		DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1317		Pass
Middle	2441	1317		Pass
High	2480	1323		Pass

Page 27 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

1. Condition: Low Channel

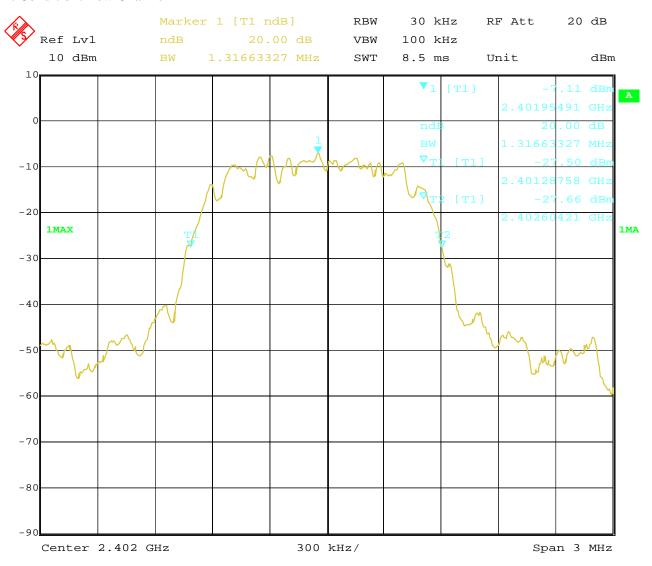


Date: 4.JUL.2017 16:53:48 Report No.: FCC1706170-02 Page 28 of 97

Date: 2017-07-10



2. Condition: Middle Channel

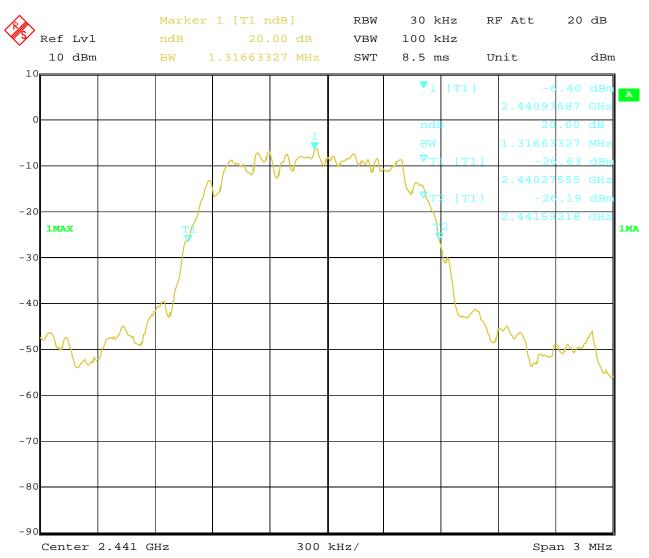


4.JUL.2017 17:09:08 Date:

Page 29 of 97 Report No.: FCC1706170-02

Date: 2017-07-10



3. High Channel

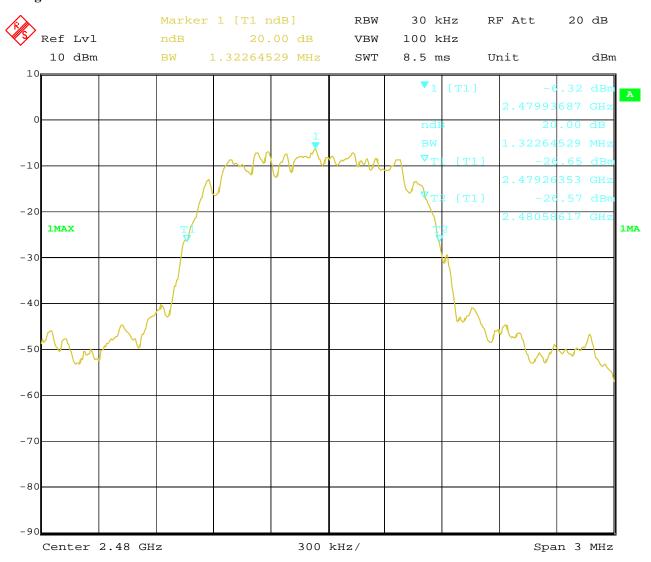

4.JUL.2017 Date: 16:50:14

Date: 2017-07-10



Page 30 of 97

Test Result

Type of Modulation: 8DPSK

EUT		Tablet PC		ST7150
Mode	Tode Keep Transmitting		Input Voltage	DC3.7V
Temperati	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1371		Pass
Middle	2441	1371		Pass
High	2480	1371		Pass

Page 31 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

1. Condition: Low Channel

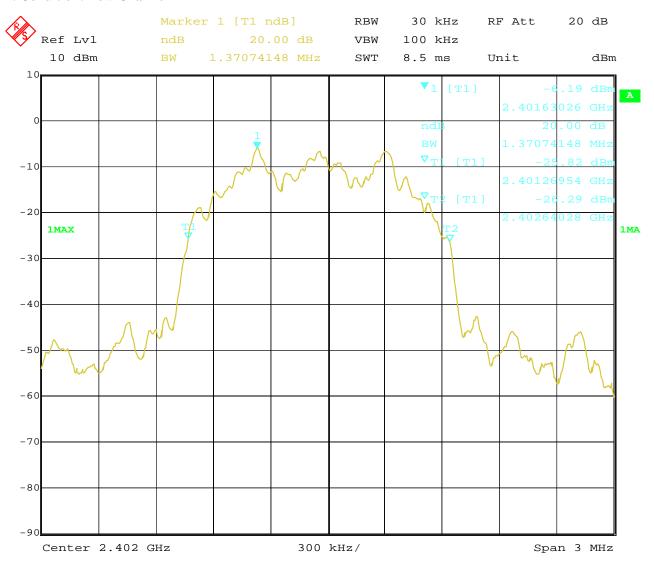


Date: 4.JUL.2017 17:48:34 Report No.: FCC1706170-02 Page 32 of 97

Date: 2017-07-10



2. Condition: Middle Channel

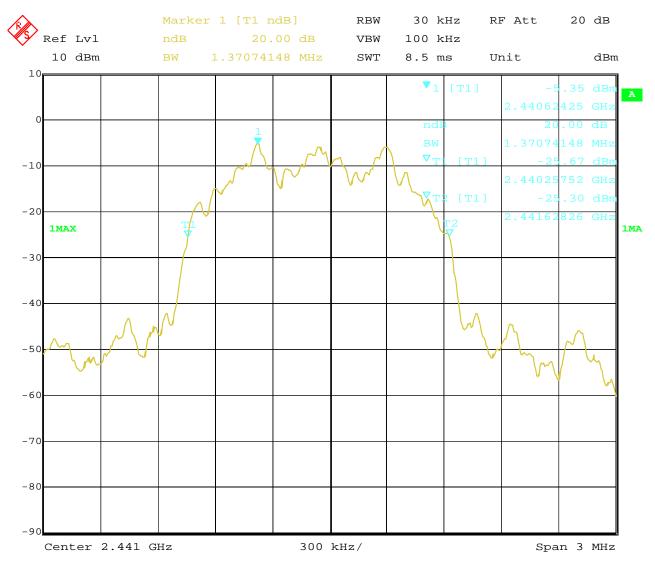


4.JUL.2017 Date: 17:38:10 Report No.: FCC1706170-02 Page 33 of 97

Date: 2017-07-10



3. High Channel

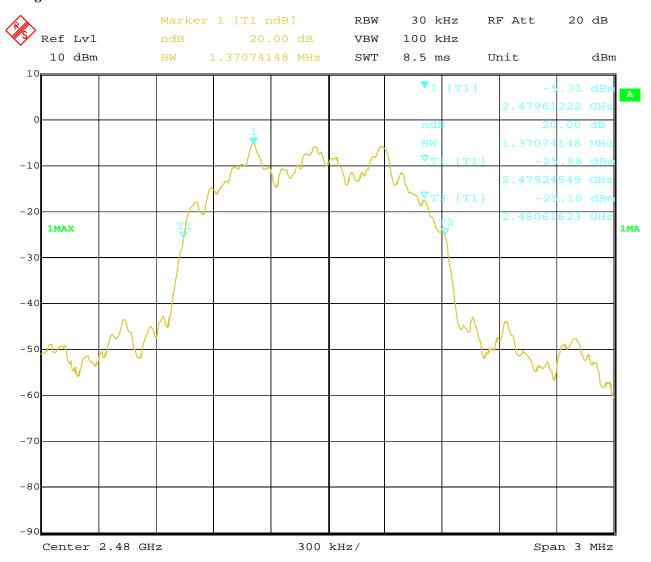

4.JUL.2017 Date: 17:29:04

Date: 2017-07-10



Page 34 of 97

Type of Modulation: GFSK

Type of Modulation. G1513					
EUT		Tablet PC	Model	ST7150	
Mode	Ke	ep Transmitting	Input Voltage	DC3.7V	
Temperat	ure	24 deg. C,	Humidity	56% RH	
Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail	
Low	2402	860	1	Pass	
Middle	2441	866	1	Pass	
High	2480	866		Pass	

Page 35 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

1. Condition: Low Channel

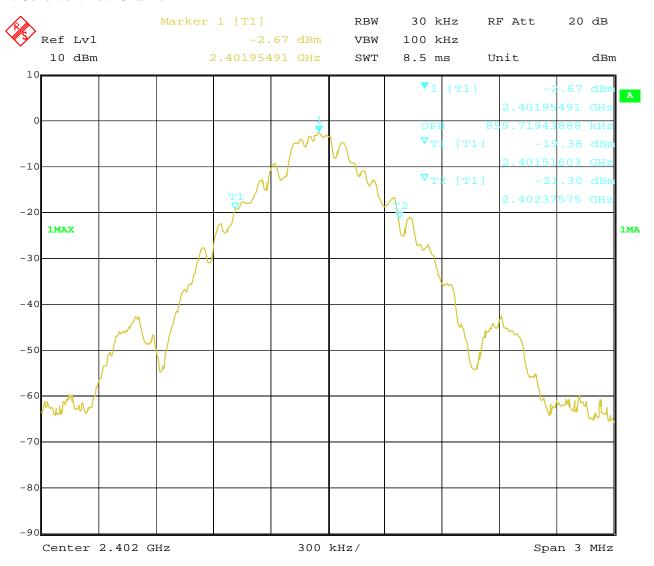

Date: 5.JUL.2017 18:32:02


Page 36 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



2. Condition: Middle Channel

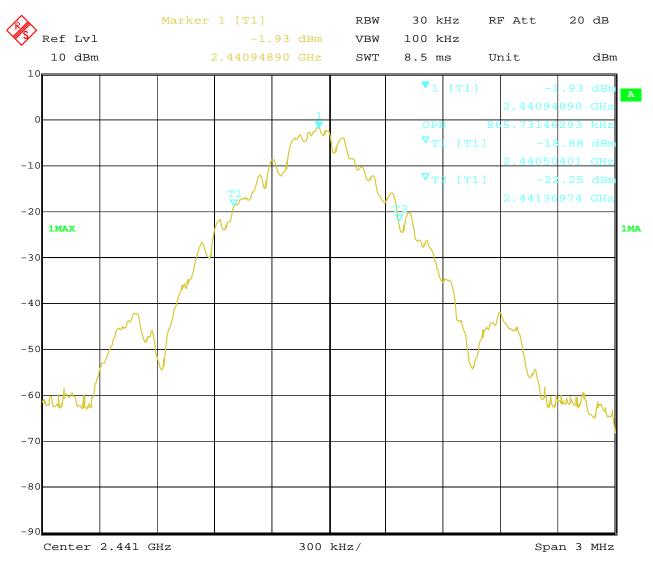


5.JUL.2017 Date: 18:33:15

Page 37 of 97 Report No.: FCC1706170-02

Date: 2017-07-10



3. High Channel

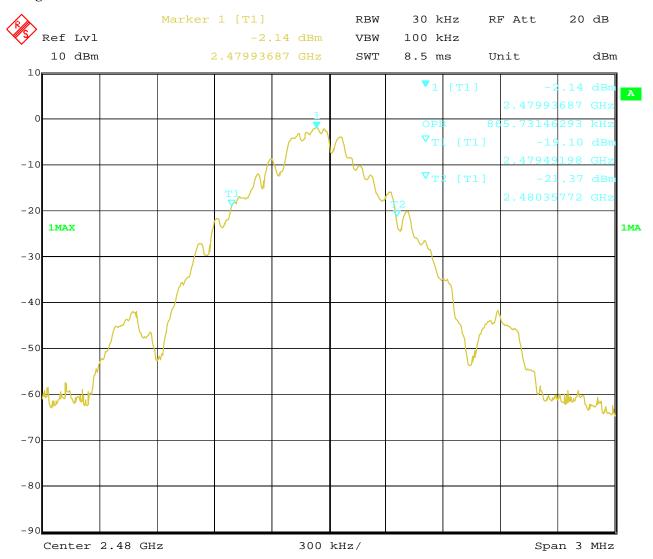

5.JUL.2017 Date: 18:34:49

Date: 2017-07-10



Page 38 of 97

Test Result

Type of Modulation: Л/4DQPSK

EUT		Tablet PC		Tablet PC Model		ST7150
Mode	K	eep Transmitting	Input Voltage	DC3.7V		
Temperat	ure	re 24 deg. C,		56% RH		
Channel	Channel Frequency (MHz)			Pass/ Fail		
Low	2402	1184		Pass		
Middle	2441	2441 1184		Pass		
High	2480	2480 1184		Pass		

Page 39 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

1. Condition: Low Channel

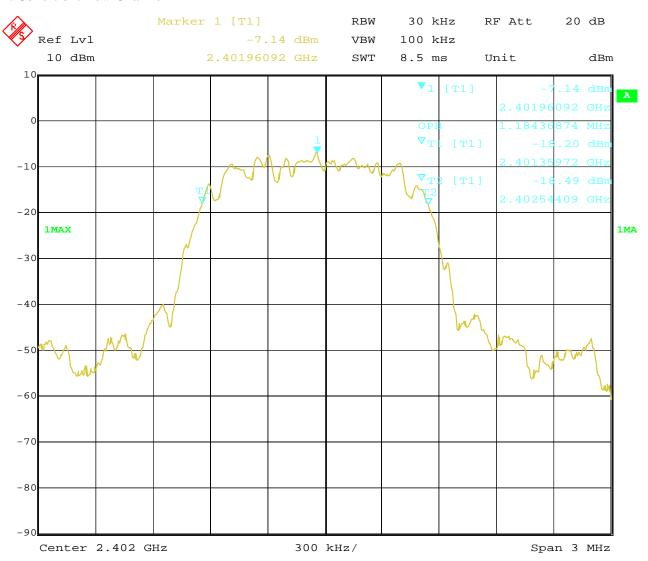


Date: 5.JUL.2017 18:40:52

Page 40 of 97 Report No.: FCC1706170-02

Date: 2017-07-10



2. Condition: Middle Channel

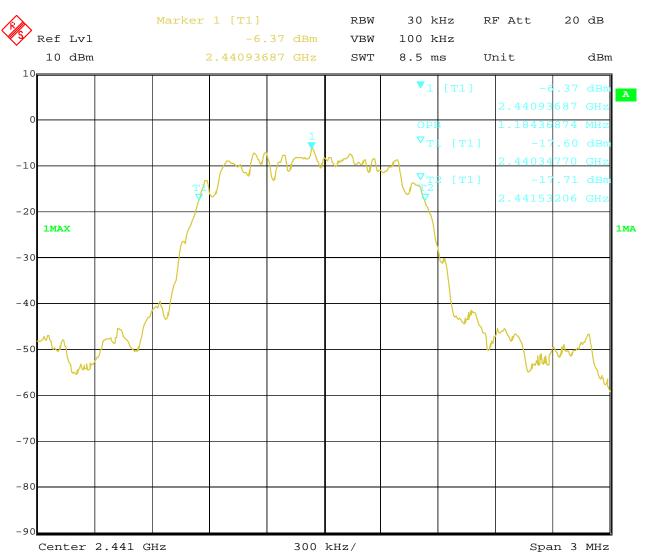


5.JUL.2017 Date: 18:37:50

Page 41 of 97 Report No.: FCC1706170-02

Date: 2017-07-10



3. High Channel

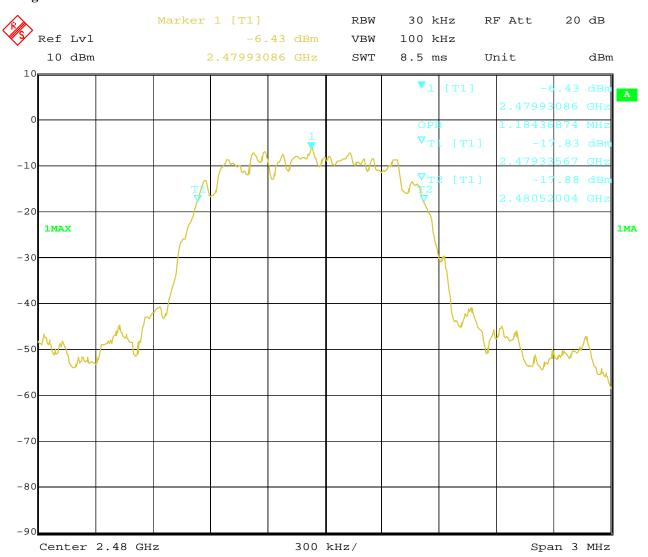

5.JUL.2017 Date: 18:36:00

Date: 2017-07-10



Page 42 of 97

Test Result

Type of Modulation: 8DPSK

EUT		Tablet PC		ST7150		
Mode	Ko	Keep Transmitting		Keep Transmitting Input Voltage		DC3.7V
Temperat	ure	24 deg. C,		56% RH		
Channel	Channel Frequency (MHz)	-		Pass/ Fail		
Low	2402	1220		Pass		
Middle	2441	1226		Pass		
High	2480	1226		Pass		

Page 43 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Figure:

1. Condition: Low Channel

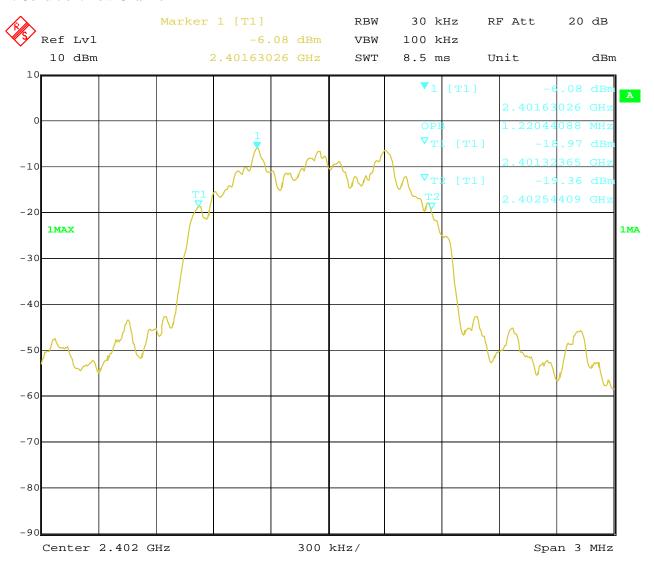

Date: 5.JUL.2017 18:46:12


Page 44 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



2. Condition: Middle Channel

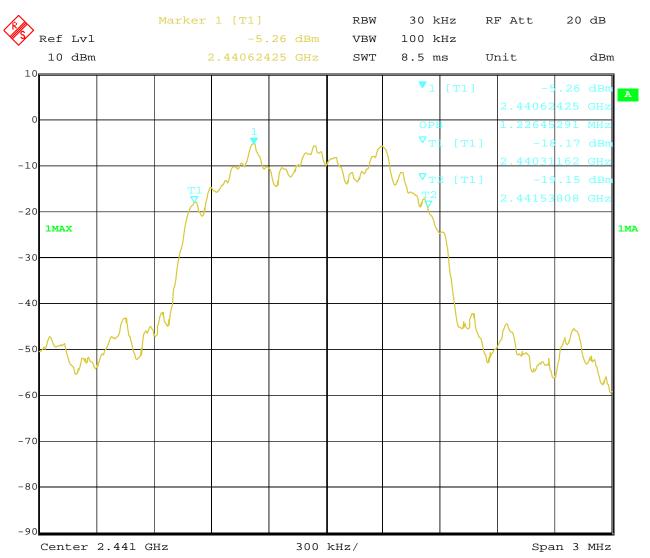


5.JUL.2017 Date: 18:47:50

Page 45 of 97 Report No.: FCC1706170-02

Date: 2017-07-10



3. High Channel

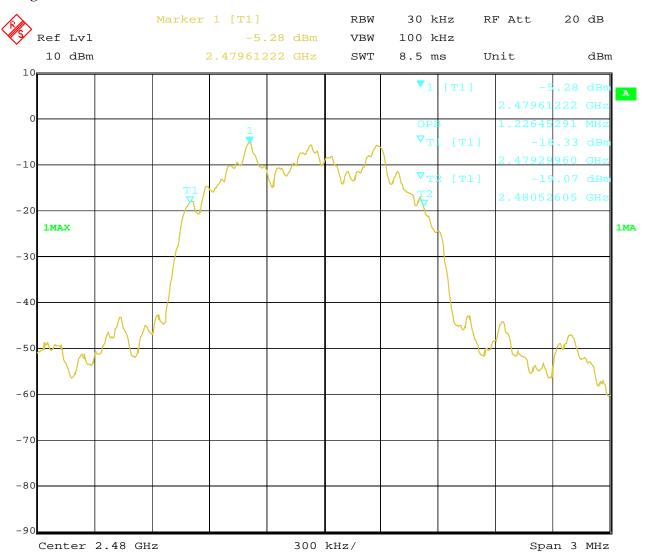

5.JUL.2017 Date: 18:49:48

Date: 2017-07-10



Page 46 of 97

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = RMS; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 47 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



8.4Test Results

Type of Modulation: GFSK

EUT	Tablet PC Model		Model		Tablet PC Model S'		ST7150
Mode	Tode Keep Transmitting Input		Input Voltage		ep Transmitting Input Vo		DC3.7V
Temperature	е	24 deg. C,	Humidity		56% RH		
Channel	Channel Channel Frequency (MHz) Max. Power O)	Peak Power Limit	Pass/ Fail		
т	2402	Peak		(dBm)	D.		
Low	2402	4.71		30	Pass		
Middle	2441	5.28		30	Pass		
High	2480	5.10		30	Pass		

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

EUT		Tablet PC Mod		el	ST7150		
Mode	Ke	eep Transmitting	Input Voltage		DC3.7V		
Temperature	е	24 deg. C,		24 deg. C, Hum		dity	56% RH
Channel	Channel Frequency	Max. Power Output (dBm) Peak		Peak Power	Pass/ Fail		
	(MHz)			Limit (dBm)			
Low	2402	4.13		30	Pass		
Middle	2441	4.72		30	Pass		
High	2480	4.60	·	30	Pass		

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2017-07-10



Page 48 of 97

Type of Modulation: 8DPSK

EUT		Tablet PC		Model	ST7150
Mode	Ke	ep Transmitting	Input Voltage		DC3.7V
Temperature		24 deg. C, Humidity		umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) Peak		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	4.26		30	Pass
Middle	2441	4.90		30	Pass
High	2480	4.72		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Date: 2017-07-10



Page 49 of 97

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 50 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




9.4Test Result

Type of Modulation: GFSK

J P +					
EUT	Tablet PC	Model		ST7150	
Mode	Hopping On I		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	3 of the 20 dB ban	dwidth	Pass

Test Plots

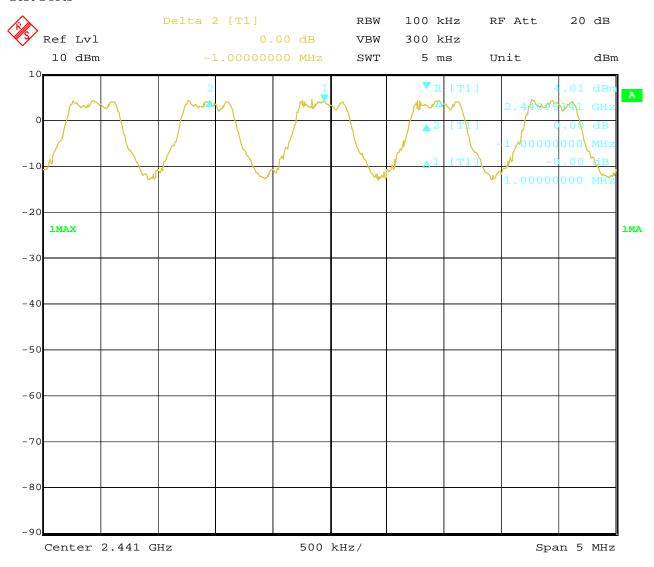

4.JUL.2017 12:44:10 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 51 of 97

Report No.: FCC1706170-02


Date: 2017-07-10



Type of Modulation: Л/4DQPSK

EUT	Tablet PC	Model		ST7150	
Mode	Hopping O	Input Voltage		DC3.7V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier F	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

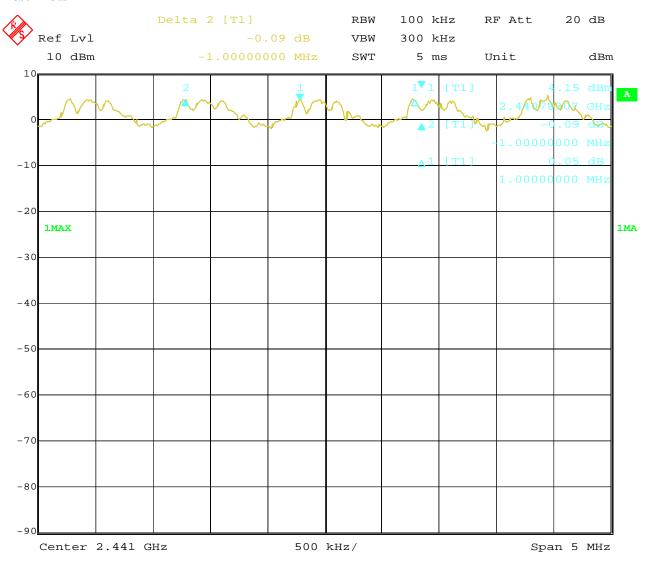

4.JUL.2017 12:55:16

Page 52 of 97

Report No.: FCC1706170-02


Date: 2017-07-10



Type of Modulation: 8DPSK

EUT	Tablet PC	Model		ST7150	
Mode	Hopping On I		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass

Test Plots

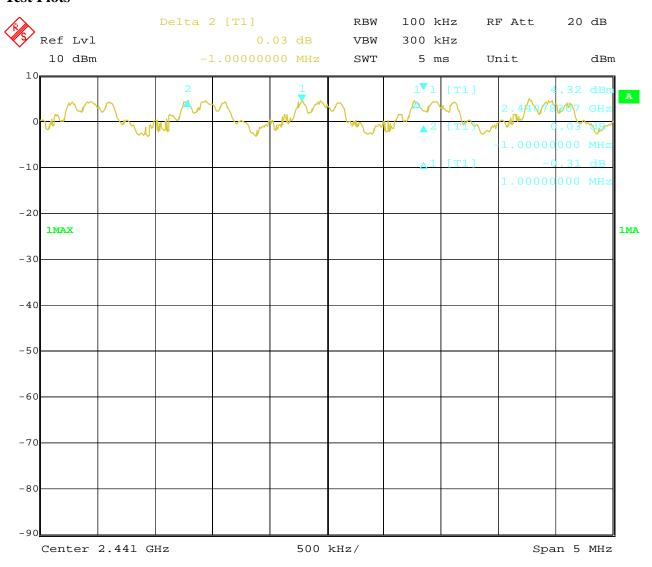

4.JUL.2017 15:34:00 Date:

Date: 2017-07-10



Page 53 of 97

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 54 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




10.4Test Result

Type of Modulation: GFSK

EUT		Tablet PC	Tablet PC Model		ST7150
Mode		Hopping On	Input Voltage	DC3.7V	
Temperature		24 deg. C,	Humidity		56% RH
Operating Frequen	perating Frequency Number of hopping channels			Limit	Pass/ Fail
2402-2480MHz		79	≥ 15	Pass	

Test Plot

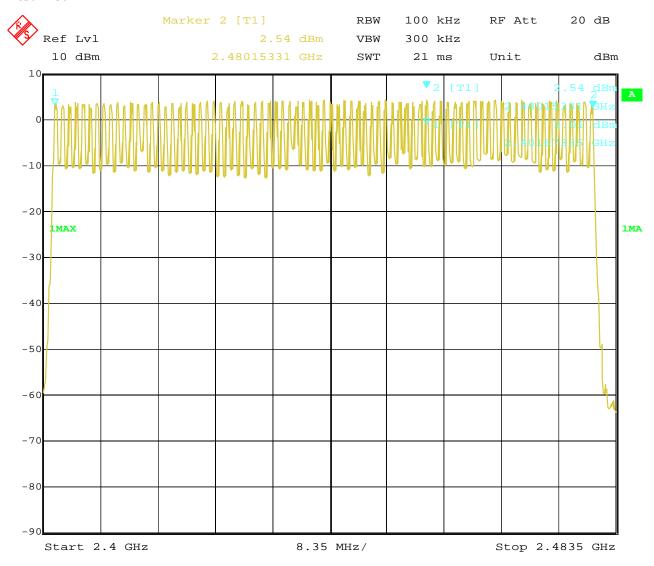

Date: 4.JUL.2017 12:32:55

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 55 of 97

Report No.: FCC1706170-02


Date: 2017-07-10



Type of Modulation: $\sqrt{J/4DQPSK}$

EUT		Tablet PC	Model			ST7150
Mode		Hopping On	Input Voltage		DC3.7V	
Temperature		24 deg. C,	Humidi	ity		56% RH
Operating Frequency		Number of hopp channels	oing	Lin	nit	Pass/ Fail
2402-2480MHz		79		≥	15	Pass

Test Plot

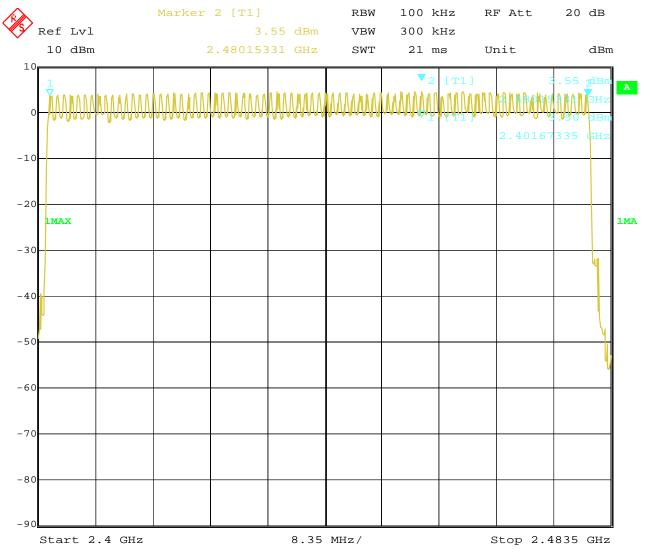

4.JUL.2017 14:49:25

Page 56 of 97

Report No.: FCC1706170-02


Date: 2017-07-10



Type of Modulation: 8DPSK

EUT	Tablet PC		Model			ST7150
Mode		Hopping On	Input V	oltage		DC3.7V
Temperature		24 deg. C,	Humidi	ity		56% RH
Operating Frequency		Number of hopp channels	oing	Liı	nit	Pass/ Fail
2402-2480MHz		79		<u> </u>	15	Pass

Test Plot

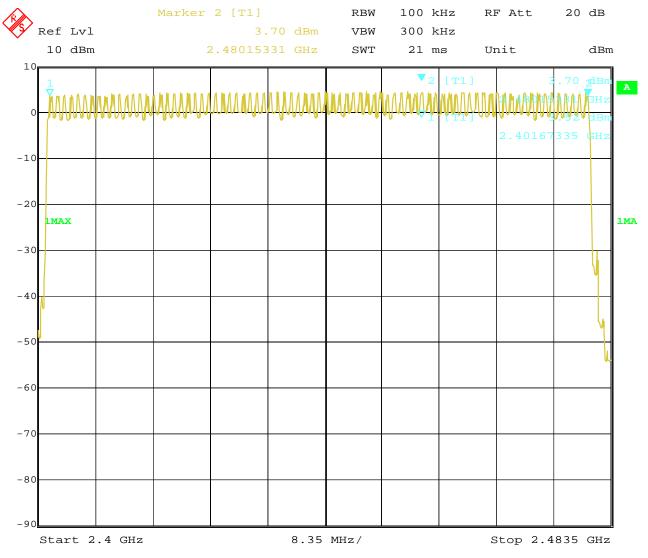

4.JUL.2017 15:07:19 Date:

Date: 2017-07-10



Page 57 of 97

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geqslant RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Date: 2017-07-10



Page 58 of 97

11.4 Test Result

Type of Modulation: GFSK

EUT	Tabl	Tablet PC		\$	ST7150		
Mode	Keep Tra	ansmitting	Input Voltage	I	DC3.7V		
Temperatur	re 24 d	leg. C, Humidity		24 deg. C,		5	56% RH
Channel	Reading	Hoping	Hoping Rate		Limit		
			DH5				
High	2.95ms	266.667	7 hop/s	0.315s	0.4s		
Middle	2.99ms	266.667	7 hop/s	0.319s	0.4s		
Low	2.97ms	266.667	7 hop/s	0.317s	0.4s		

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 59 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Plots:

DH5

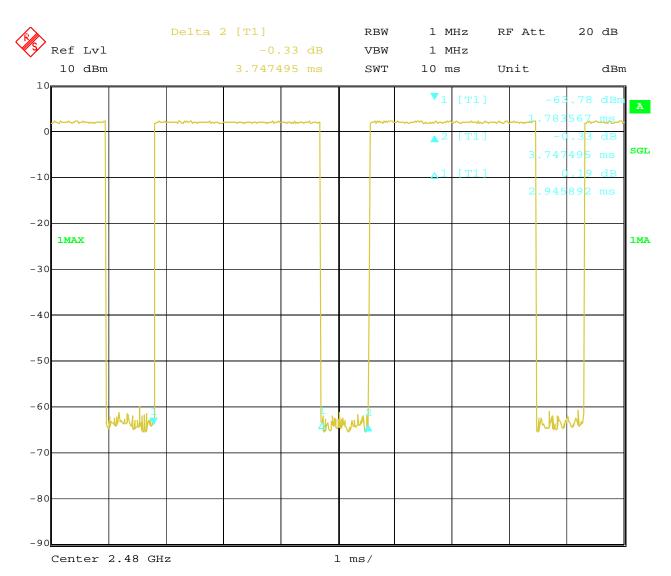


6.JUL.2017 10:41:21 Date:

Page 60 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



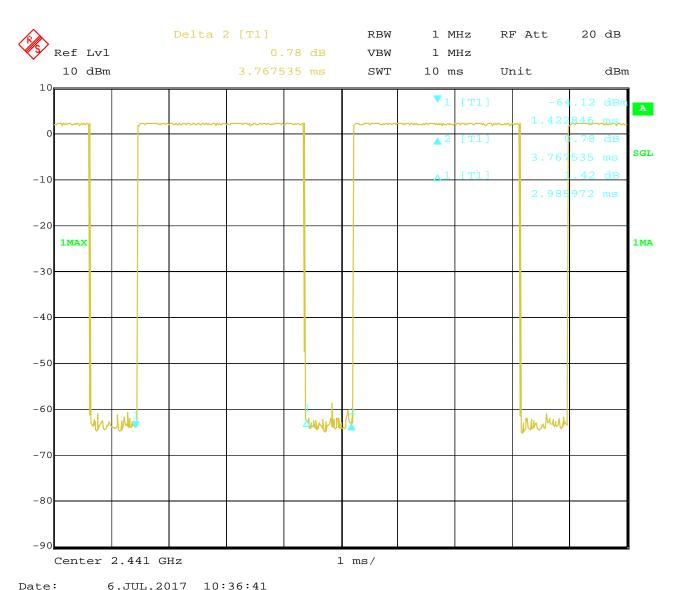


Page 61 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



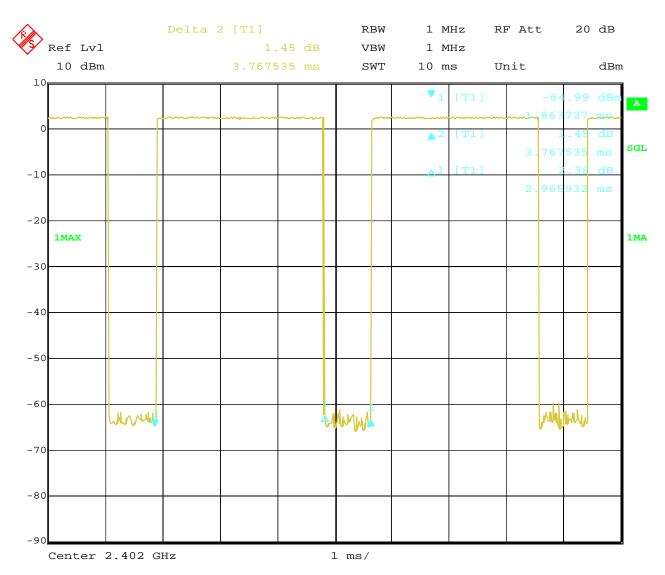

6.JUL.2017 Date: 10:32:27

Date: 2017-07-10



Page 62 of 97

Test Result

Type of Modulation: Л/4DQPSK

EUT	Tablet PC		Model	ST7150		
Mode	Keep Tra	ansmitting	Input Voltage	I	DC3.7V	
Temperatur	re 24 d	deg. C, Humidity		5	56% RH	
Channel	Reading	Hoping Rate		Actual	Limit	
DH5						
High	2.97ms	266.667	7 hop/s	0.317s	0.4s	
Middle	2.99ms	266.667 hop/s		0.319s	0.4s	
Low	3.01ms	266.667 hop/s		0.321s	0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.


Report No.: FCC1706170-02 Page 63 of 97

Date: 2017-07-10



Test Plots:

2DH5

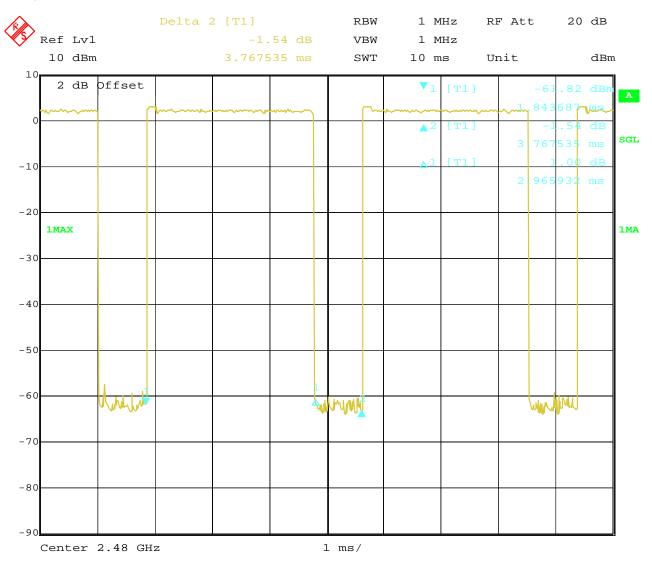


Date: 6.JUL.2017 10:49:52

Page 64 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



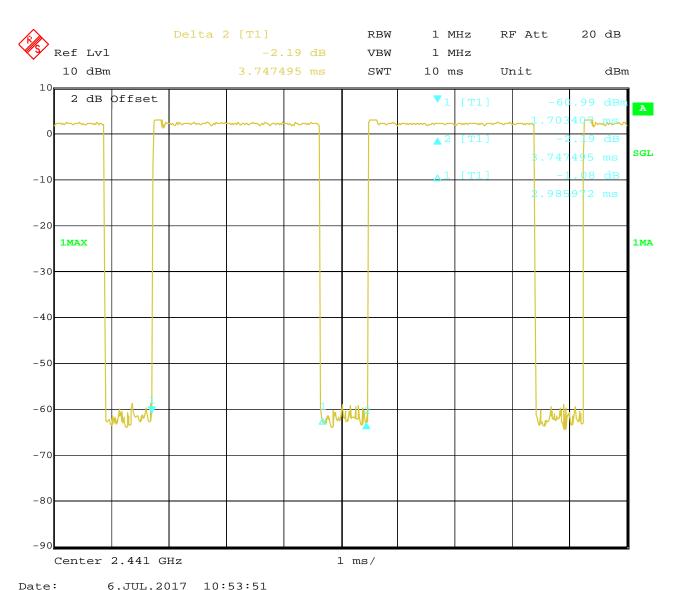


Page 65 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



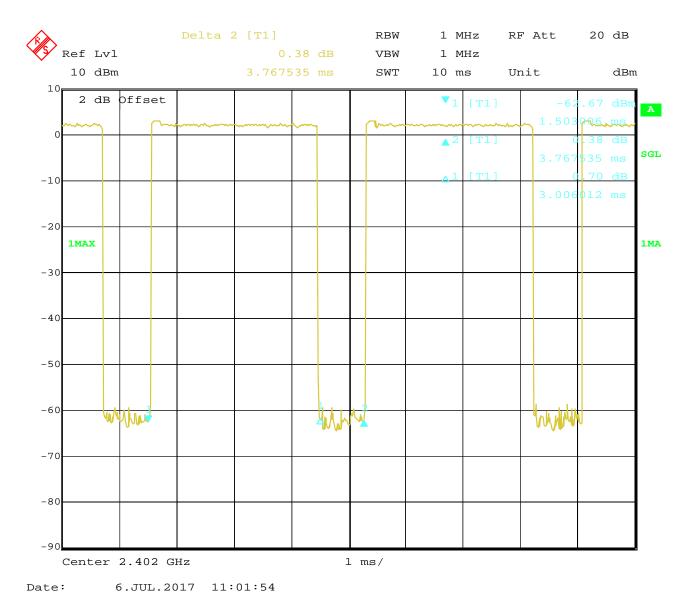

Report No.: FCC1706170-02 Page 66 of 97

Date: 2017-07-10



Type of Modulation: 8DPSK

	-JF:					
EUT	EUT Tablet PC		Model	ST7150		
Mode	Keep Tra	Keep Transmitting		DC3.7V		
Temperatur	re 24 d	leg. C, Humidity		56% RH		
Channel	Reading	Hoping Rate Actual		Limit		
DH5						
High	2.97ms	266.667	7 hop/s	0.317s	0.4s	
Middle	2.97ms	266.667 hop/s		0.317s	0.4s	
Low	2.97ms	266.667 hop/s		0.317s	0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 67 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



Test Plots:

3DH5

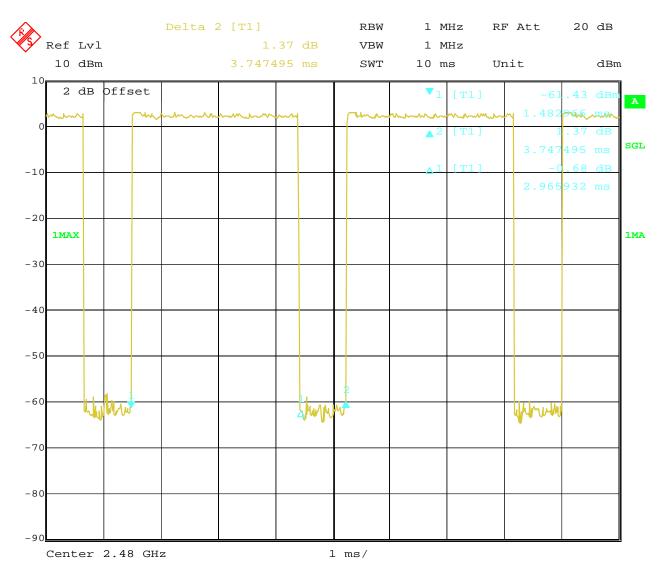


6.JUL.2017 11:09:44 Date:

Page 68 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



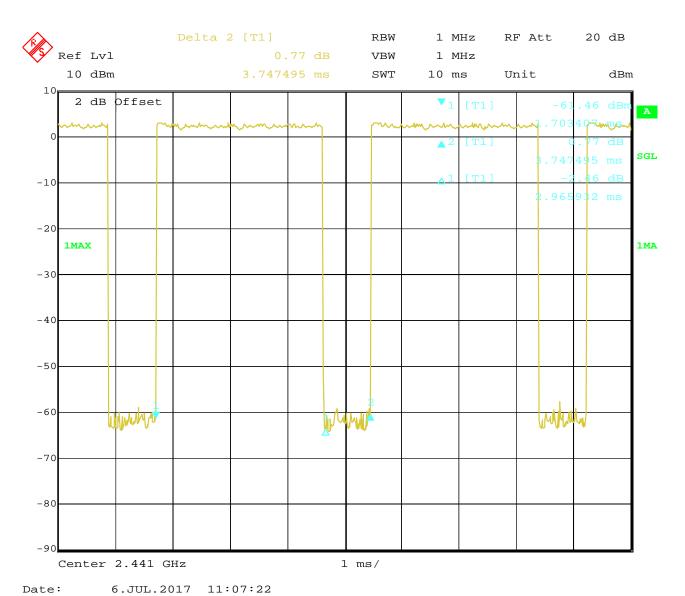


Page 69 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



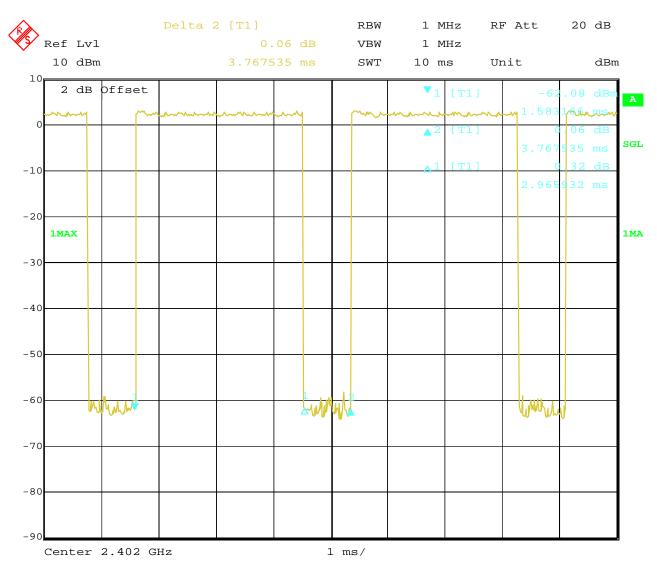

6.JUL.2017 11:03:46 Date:


Date: 2017-07-10



Page 70 of 97

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

- Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.
- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 71 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: GFSK

Out of Band Test Result 12.4

Product:	Tablet PC		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	47.9		74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

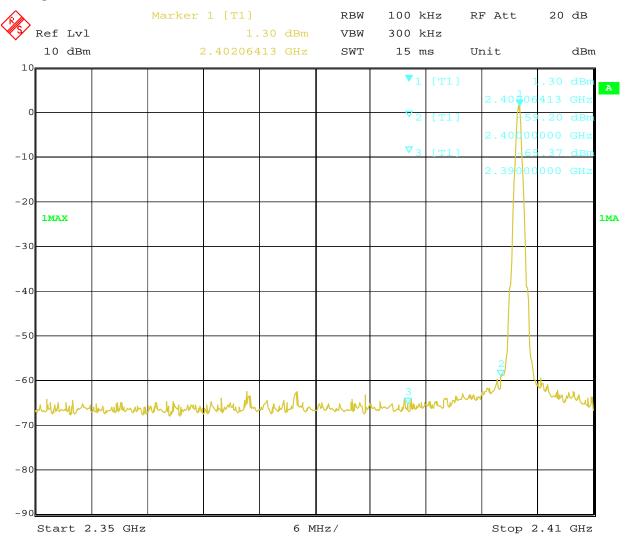

4.JUL.2017 16:18:21 Date:

Page 72 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Tablet PC		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	43.7		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

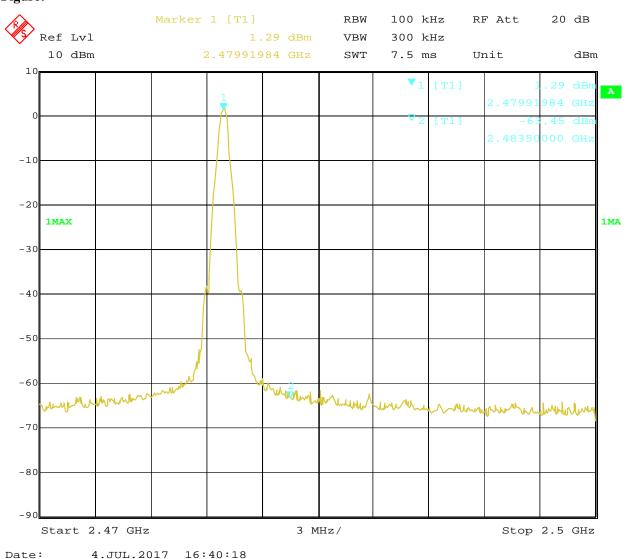

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 73 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: GFSK

Out of Band Test Result

Product:		Tablet PC	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	46.6		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:

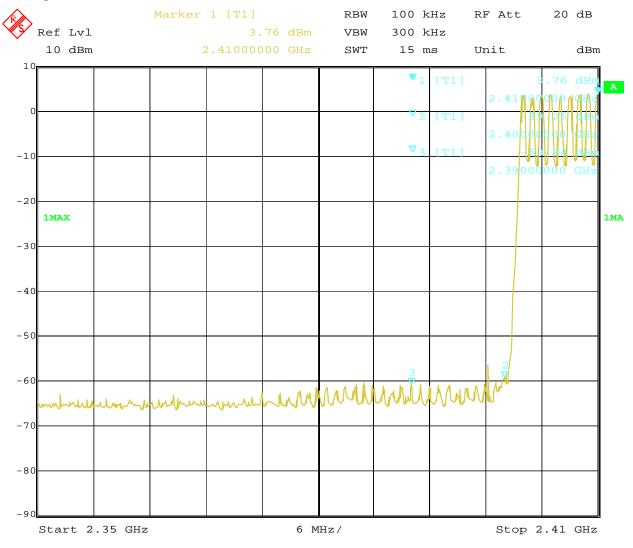

4.JUL.2017 16:03:04 Date:

Page 74 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: GFSK

Out of Band Test Result

Product:		Tablet PC	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	43.8		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

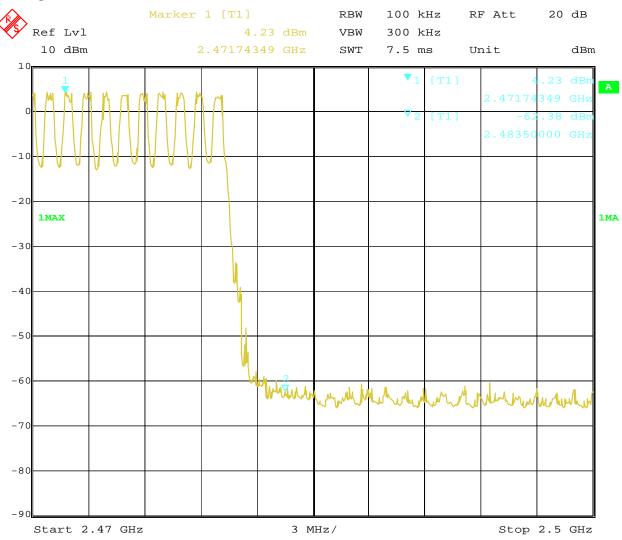

4.JUL.2017 Date: 15:59:36

Page 75 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:		Tablet PC	Test Mode:	Low Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 48.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

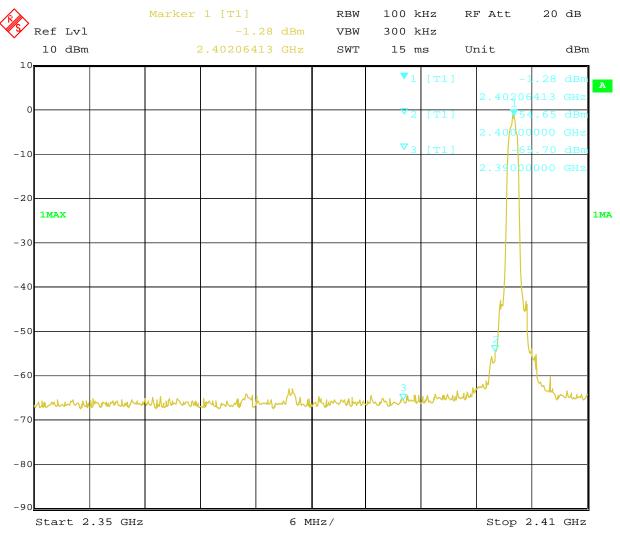

Date: 4.JUL.2017 16:53:17

Page 76 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:		Tablet PC	Test Mode:	High Channel
Mode	Keej	ping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

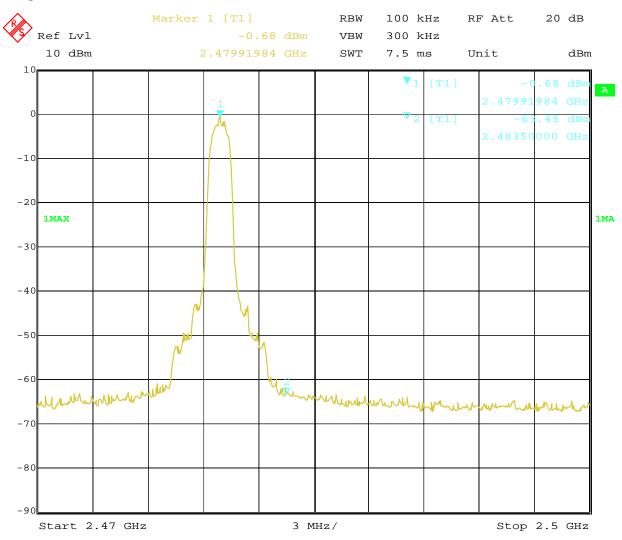

Date: 4.JUL.2017 16:51:45

Page 77 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:		Tablet PC	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	49.3		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

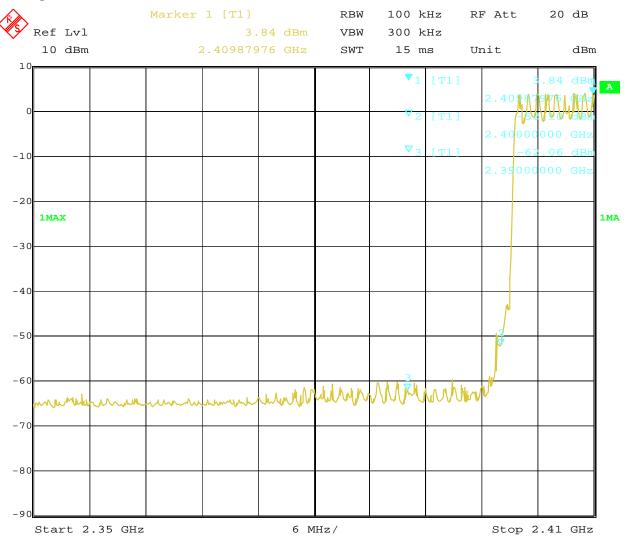

4.JUL.2017 Date: 15:51:08

Date: 2017-07-10




Type of Modulation: $\sqrt{1/4}$ DQPSK

12.4 Out of Band Test Result

Product:		Tablet PC	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 45.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

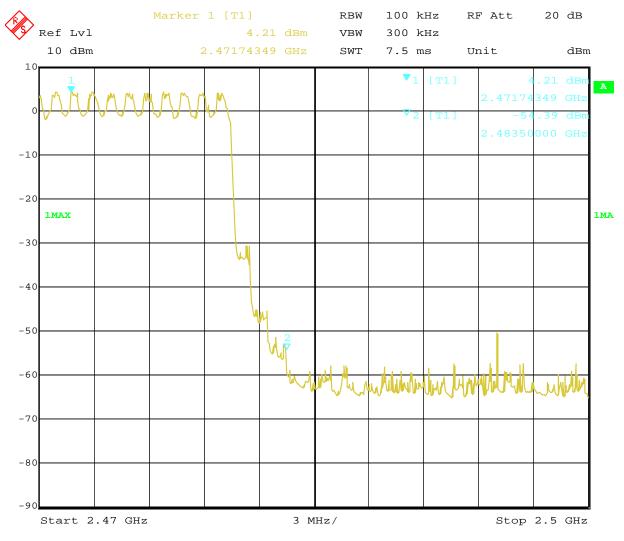

Date: 4.JUL.2017 15:56:58

Page 79 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: 8DPSK

Out of Band Test Result 12.4

Product:	Tablet PC		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 48.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

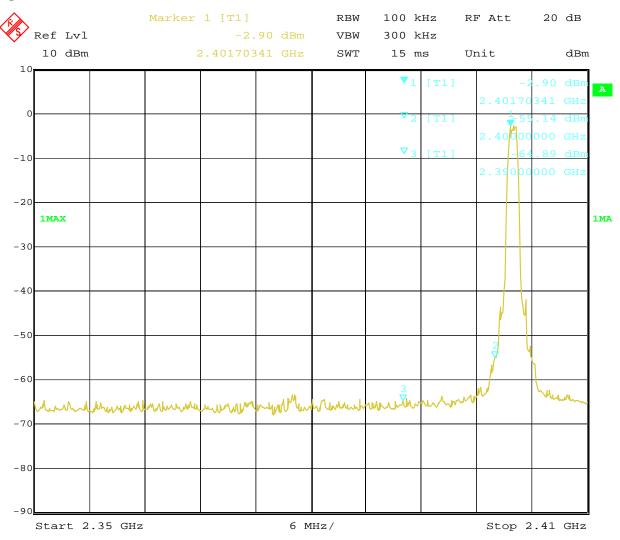

Date: 4.JUL.2017 17:49:12

Page 80 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:		Tablet PC	Test Mode:	High Channel
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

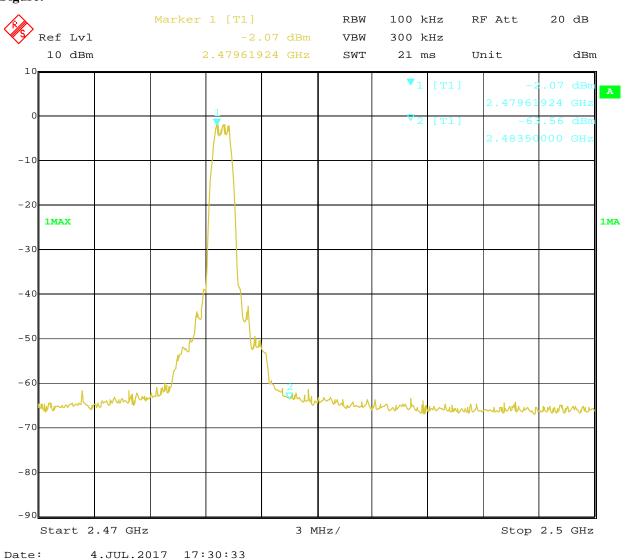

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 81 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: 8DPSK

Out of Band Test Result

Product:		Tablet PC	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	46.1		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

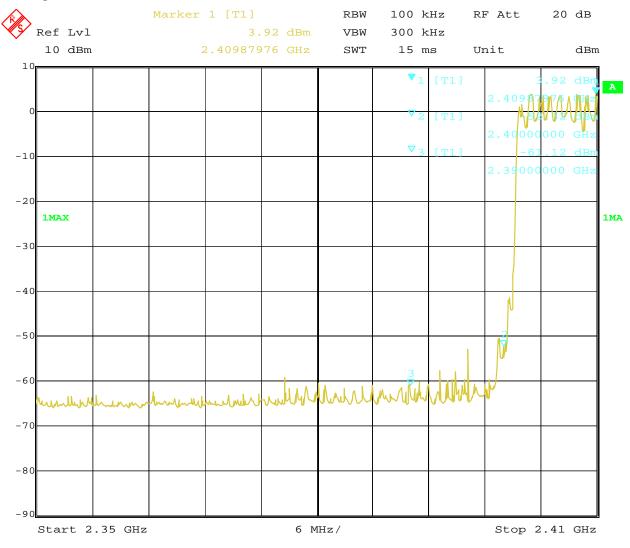

4.JUL.2017 Date: 15:45:52

Page 82 of 97

Report No.: FCC1706170-02

Date: 2017-07-10




Type of Modulation: 8DPSK

Out of Band Test Result

Product:		Tablet PC	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.3			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

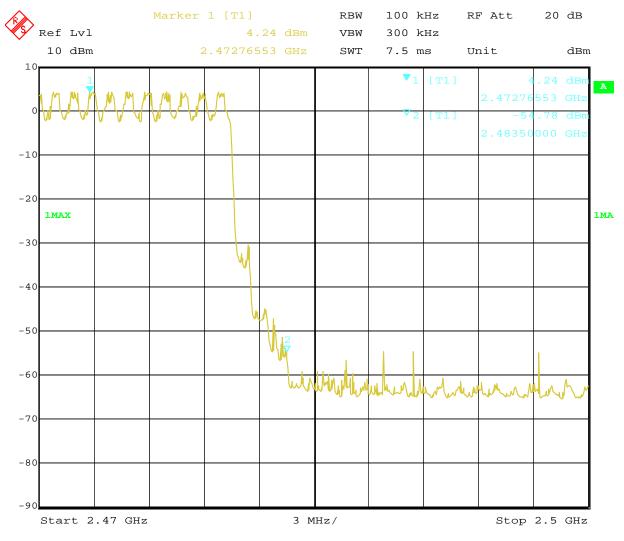

Date: 4.JUL.2017 15:40:08

Date: 2017-07-10



Page 83 of 97

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral antenna used. The maximum Gain of the antennas is 0dBi.

Report No.: FCC1706170-02 Page 84 of 97

Date: 2017-07-10




14.0 FCC ID Label

FCC ID: RBD-M710R2

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

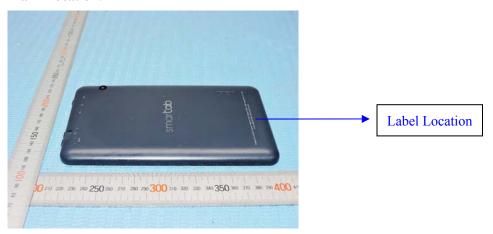

Page 85 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



15.0 Photo of testing

Conducted Emission Test Setup:



Date: 2017-07-10



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2017-07-10



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 88 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 89 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 90 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 91 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 92 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Inside view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 93 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Inside view

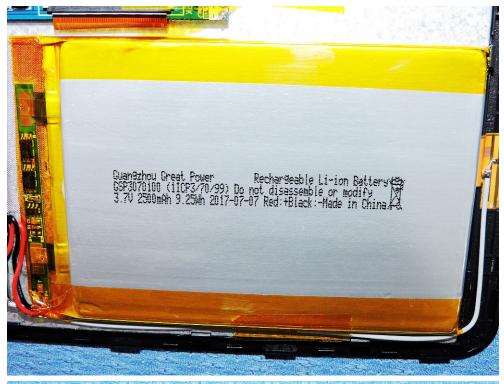



The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2017-07-10



Inside view Main Board with Samsung's EMMC

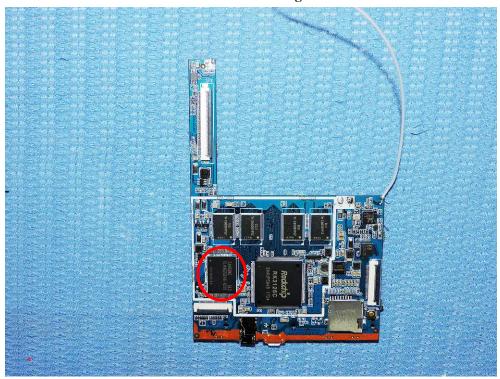

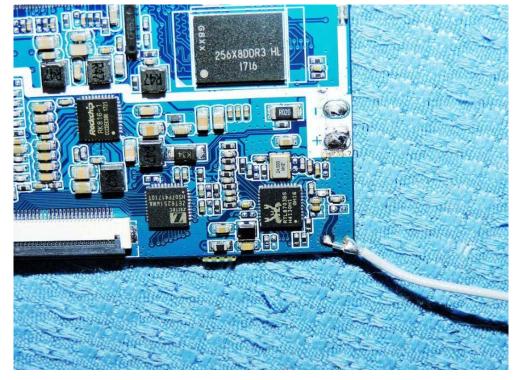

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 95 of 97

Report No.: FCC1706170-02

Date: 2017-07-10



Inside view

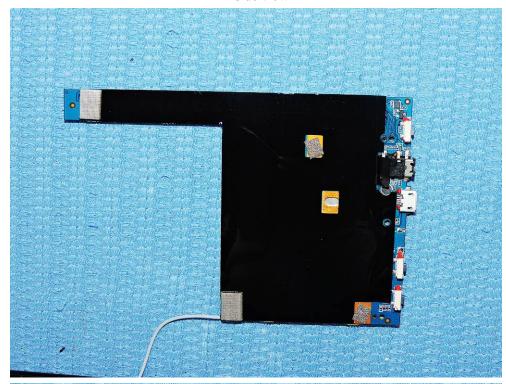



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 96 of 97 Report No.: FCC1706170-02

Date: 2017-07-10



Inside view Main Board with FORESEE's EMMC




Page 97 of 97


Report No.: FCC1706170-02

Date: 2017-07-10



$Internal\ Photos-different\ layout\ for\ G-sensor\ I^2C\text{, }OTG\ test, Volume\ adjustment\ and\ Amplifier\ enable$

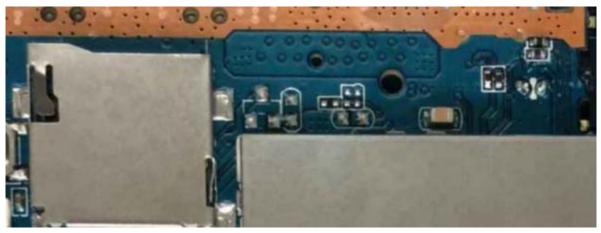

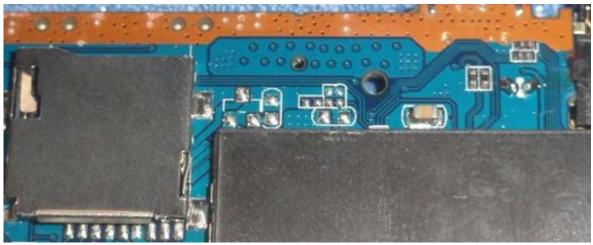

End of Report