

Radio Test Report

FCC ID: 2A2GJ-M2808**IC: 27498-M2808**

Report No. : TB-RF183071
Applicant : Heltec Automation Technology Co., Ltd
Equipment Under Test (EUT)
EUT Name : Heltec Indoor Hotspot
Model No. : HT-M2808
Series Model No. : HT-M2802
Brand Name : ----
Sample ID : 20210603-15-1#& 20210603-15-2#
Receipt Date : 2021-06-04
Test Date : 2021-07-15 to 2021-08-19
Issue Date : 2021-08-20
Standards : FCC Part 15 Subpart C 15.247
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 March 2019
Test Method : ANSI C63.10: 2013
KDB 558074 D01 15.247 Meas Guidance v05r02
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above.

Witness Engineer :**Engineer Supervisor** :**Engineer Manager** :

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	7
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility.....	9
2. TEST SUMMARY.....	10
3. TEST SOFTWARE.....	10
4. TEST EQUIPMENT.....	11
5. CONDUCTED EMISSION.....	12
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	12
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode	13
5.6 Test Data.....	13
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS.....	14
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Mode	17
6.6 Test Data.....	17
7. EMISSIONS IN NONRESTRICTED FREQUENCY BANDS	18
7.1 Test Standard and Limit.....	18
7.2 Test Setup.....	18
7.3 Test Procedure.....	18
7.4 Deviation From Test Standard.....	19
7.5 EUT Operating Mode	19
7.6 Test Data.....	19
8. BANDWIDTH TEST.....	20
8.1 Test Standard and Limit.....	20
8.2 Test Setup.....	20
8.3 Test Procedure.....	20
8.4 Deviation From Test Standard.....	21
8.5 EUT Operating Mode	21
8.6 Test Data.....	21

9.	PEAK OUTPUT POWER.....	22
9.1	Test Standard and Limit.....	22
9.2	Test Setup.....	22
9.3	Test Procedure.....	22
9.4	Deviation From Test Standard.....	22
9.5	EUT Operating Mode	22
9.6	Test Data.....	22
10.	POWER SPECTRAL DENSITY.....	23
10.1	Test Standard and Limit	23
10.2	Test Setup.....	23
10.3	Test Procedure.....	23
10.4	Deviation From Test Standard.....	23
10.5	Antenna Connected Construction.....	23
10.6	Test Data.....	23
11.	ANTENNA REQUIREMENT.....	24
11.1	Test Standard and Limit	24
11.2	Deviation From Test Standard.....	24
11.3	Antenna Connected Construction.....	24
11.4	Test Data.....	24
	ATTACHMENT A--CONDUCTED EMISSION TEST DATA	25
	ATTACHMENT B--UNWANTED EMISSIONS DATA	27
	ATTACHMENT C--EMISSIONS IN NONRESTRICTED FREQUENCY BANDS DATA	48
	ATTACHMENT D--BANDWIDTH DATA	50
	ATTACHMENT E—PEAK OUTPUT POWER DATA.....	54
	ATTACHMENT F—POWER SPECTRAL DENSITY DATA.....	56

Revision History

Report No.	Version	Description	Issued Date
TB-RF183071	Rev.01	Initial issue of report	2021-08-20

1. General Information about EUT

1.1 Client Information

Applicant	:	Heltec Automation Technology Co., Ltd
Address	:	2-208, Block A, Yusha Building, 64 Hangtian Road, Longtan Industrial Park, Chenghua District, Chengdu, Sichuan, China
Manufacturer	:	Heltec Automation Technology Co., Ltd
Address	:	2-208, Block A, Yusha Building, 64 Hangtian Road, Longtan Industrial Park, Chenghua District, Chengdu, Sichuan, China

1.2 General Description of EUT (Equipment Under Test)


EUT Name	:	Heltec Indoor Hotspot	
HVIN/Models No.	:	HT-M2808, HT-M2802	
Model Different	:	All these models are identical in the same PCB, layout and electrical circuit, The only difference is model name.	
Product Description	:	Operation Frequency:	LoRa(500KHz): 923.3MHz-927.5MHz
		Number of Channel:	8 channels
		Antenna Gain:	Antenna 1: 0.5dBi External Antenna Antenna 2: 4dBi External Antenna Antenna 3: 2dBi External Antenna
		Bit Rate of Transmitter:	5.4kbps
Power Rating	:	Adapter: Input: 90-264V~, 50/60Hz, 1.5A Output: DC 12V3.0A	
Software Version	:	N/A	
Hardware Version	:	N/A	
Remark:			
(1) The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.			
(2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			
(3) Antenna information provided by the applicant. And the type of antenna please see the external photos.			

(4) Channel List:


Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	923.3	04	925.1	07	926.9
02	923.9	05	925.7	08	927.5
03	924.5	06	926.3		

1.3 Block Diagram Showing the Configuration of System Tested

Conducted Test

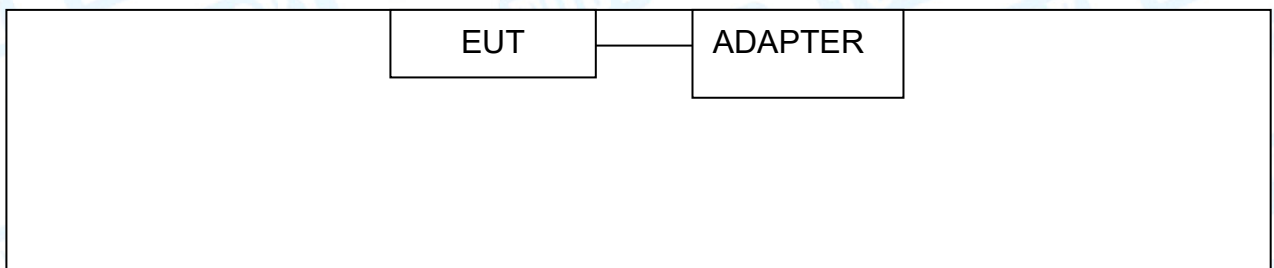

Radiated Test

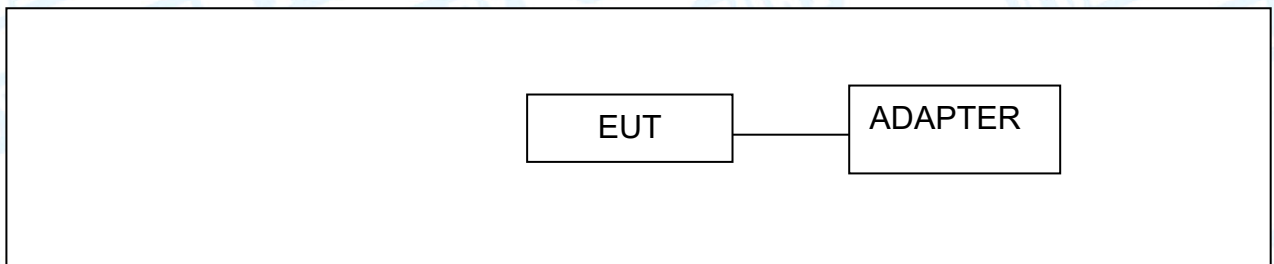

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
---	----	----	---	---
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging+TX Mode
For Radiated Test	
Final Test Mode	Description
Mode 2	TX Mode
Mode 3	TX Mode (Channel 01/04/08)

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a Mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software Version	Putty.exe		
Frequency	923.3MHz	925.1MHz	927.5MHz
LoRa	10	10	10

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.

2. Test Summary

Standard Section		Test Item	Test Sample(s)	Judgment	Remark
FCC	IC				
FCC 15.207(a)	RSS-Gen 8.8	Conducted Emission	20210603-15-1#	PASS	N/A
FCC 15.209 & 15.247(d)	RSS-Gen 8.9 & RSS 247 5.5	Radiated Unwanted Emissions	20210603-15-1#	PASS	N/A
FCC 15.203	RSS-247 6.8	Antenna Requirement	20210603-15-2#	PASS	N/A
FCC 15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	20210603-15-2#	N/A	N/A
/	RSS-Gen 6.7	99% Occupied bandwidth	20210603-15-2#	PASS	N/A
FCC 15.247(b)(3)	RSS-247 5.4(d)	Peak Output Power and E.I.R.P	20210603-15-2#	PASS	N/A
FCC 15.247(e)	RSS-247 5.2(b)	Power Spectral Density	20210603-15-2#	PASS	N/A
FCC 15.207(a)	RSS-Gen 8.9 & RSS 247 5.5	Conducted Unwanted Emissions	20210603-15-2#	PASS	N/A
FCC 15.247(d)	RSS-Gen 8.10& RSS-247 5.5	Emissions in nonrestricted frequency bands	20210603-15-2#	PASS	N/A
/	/	On Time and Duty Cycle	20210603-15-2#	/	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFTtest	V2.0.0.0
RF Test System	JS1120	Tonscend	V2.6.88.0336

4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 02, 2021	Jul. 01, 2022
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 02, 2021	Jul. 01, 2022
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 02, 2021	Jul. 01, 2022
LISN	Rohde & Schwarz	ENV216	101131	Jul. 02, 2021	Jul. 01, 2022
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 02, 2021	Jul. 01, 2022
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 02, 2021	Jul. 01, 2022
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 02, 2021	Jul. 01, 2022
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 06, 2021	Jul. 05, 2022
Pre-amplifier	Sonoma	310N	185903	Feb. 25, 2021	Feb. 24, 2022
Pre-amplifier	HP	8449B	3008A00849	Feb. 25, 2021	Feb. 24, 2022
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Feb. 25, 2021	Feb. 24, 2022
Cable	HUBER+SUHNER	100	SUCOFLEX	Feb. 25, 2021	Feb. 24, 2022
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 02, 2021	Jul. 01, 2022
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 02, 2021	Jul. 01, 2022
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 11, 2020	Sep. 10, 2021

5. Conducted Emission

5.1 Test Standard and Limit

5.1.1 Test Standard

RSS-Gen 8.8

FCC Part 15.207

5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

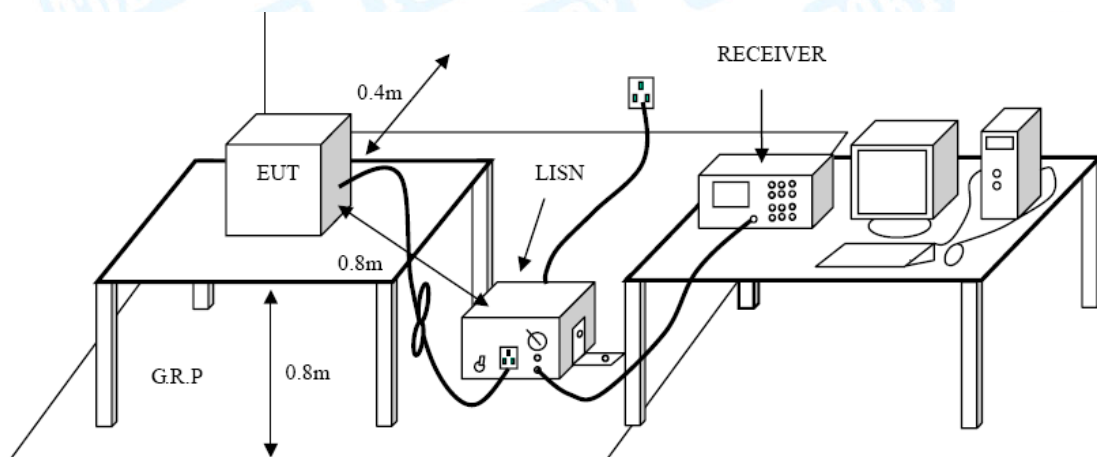

5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated and Conducted Unwanted Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard

RSS-Gen 8.9 & RSS 247 5.5

FCC Part 15.209 & FCC Part 15.247(d)

6.1.2 Test Limit

General field strength limits at frequencies Below 30MHz			
Frequency (MHz)	Field Strength ($\mu\text{A/m}$)*	Field Strength (microvolt/meter)**	Measurement Distance (meters)
0.009~0.490	6.37/F (F in kHz)	2400/F(KHz)	300
0.490~1.705	63.7/F (F in kHz)	24000/F(KHz)	30
1.705~30.0	0.08	30	30
Note: 1, The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector. 2, *is for RSS Standard, **is for FCC Standard.			


General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54
Note: (1) The tighter limit applies at the band edges. (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)		


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 Test Setup


Radiated measurement

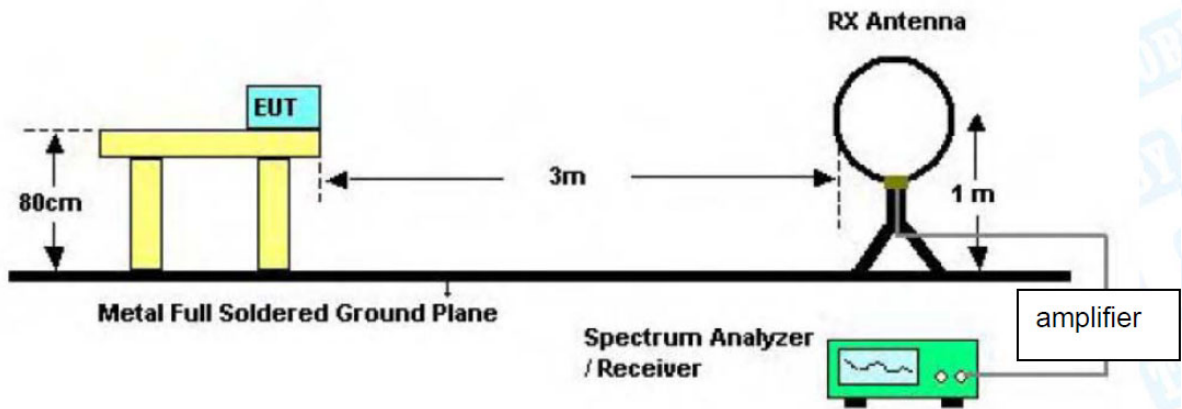

Below 30MHz Test Setup

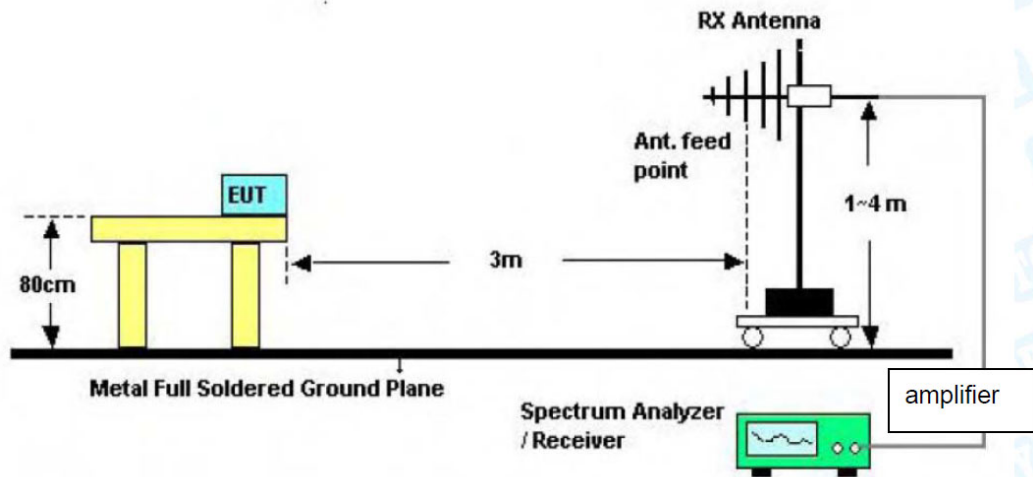


Below 1000MHz Test Setup

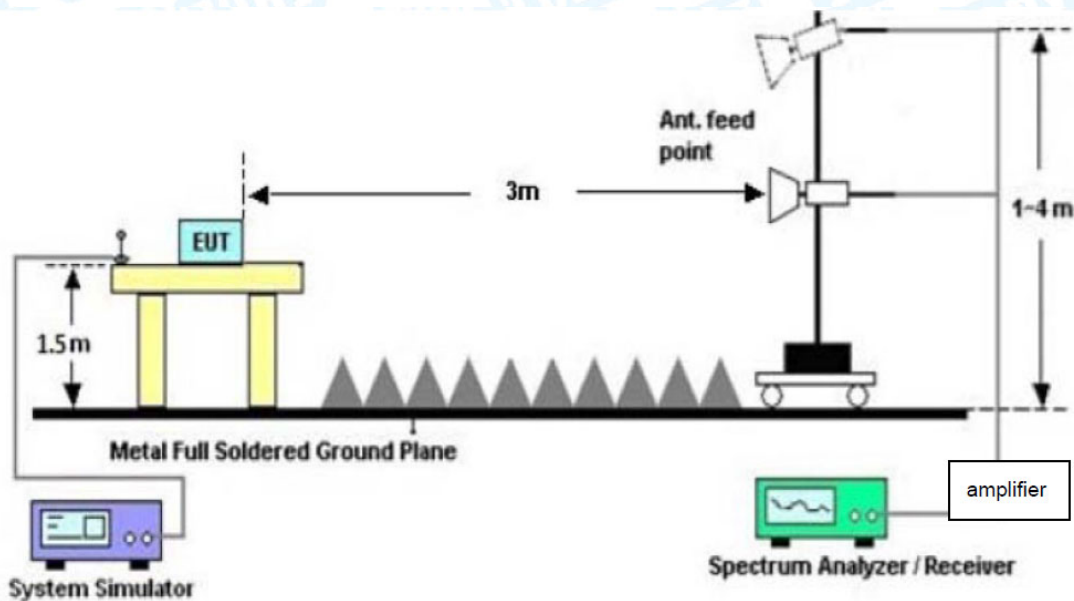

Above 1GHz Test Setup

Conducted measurement

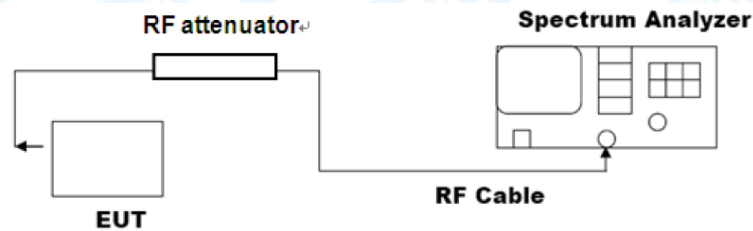

6.3 Test Procedure

---Radiated measurement

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.

--- Conducted measurement

● Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

● Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

Please refer to the Attachment B.

7. Emissions in nonrestricted frequency bands

7.1 Test Standard and Limit

7.1.1 Test Standard


RSS-Gen 8.10 & RSS 247 5.5

FCC Part 15.205 & FCC Part 15.247(d)

7.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Setup

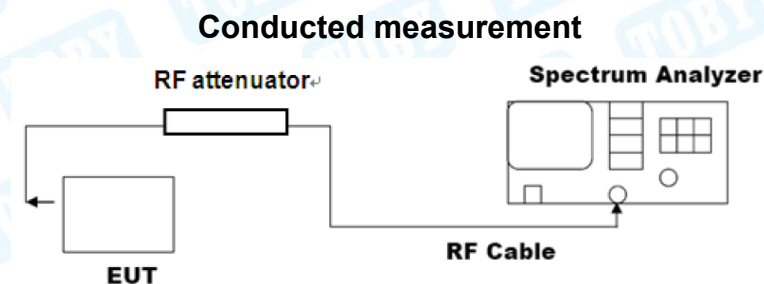

7.3 Test Procedure

Reference level measurement

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW \geq [3*RBW].
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Please refer to the Attachment C.

8. Bandwidth Test

8.1 Test Standard and Limit

8.1.1 Test Standard


RSS-Gen 6.7 & RSS 247 5.2(a)

FCC Part 15.205 & FCC Part 15.247(d)

8.1.2 Test Limit

Test Item	Limit
-6dB bandwidth (DTS bandwidth)	≥ 500 KHz
99% occupied bandwidth	/

8.2 Test Setup

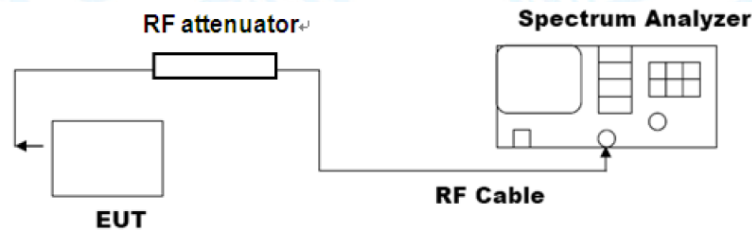

8.3 Test Procedure

---DTS bandwidth

● The steps for the first option are as follows:

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

---occupied bandwidth

● The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Mode

Please refer to the description of test mode.

8.6 Test Data

Please refer to the Attachment D.

9. Peak Output Power

9.1 Test Standard and Limit

9.1.1 Test Standard


RSS 247 5.4

FCC Part 15.247(b)(3)

9.1.2 Test Limit

Test Item	Limit
Peak Output Power	not exceed 1 W or 30dBm
E.I.R.P	not exceed 4 W or 36dBm

9.2 Test Setup

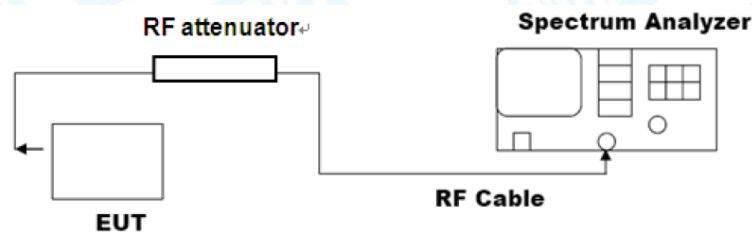

9.3 Test Procedure

---RBW≥DTS bandwidth

● The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW≥DTS bandwidth.
- Set VBW≥[3*RBW].
- Set span≥[3*RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Mode

Please refer to the description of test mode.

9.6 Test Data

Please refer to the Attachment E.

10. Power Spectral Density

10.1 Test Standard and Limit

10.1.1 Test Standard


RSS 247 5.2(b)

FCC Part 15.247(e)

10.1.2 Test Limit

Test Item	Limit
Power Spectral Density	8dBm(in any 3 kHz)

10.2 Test Setup

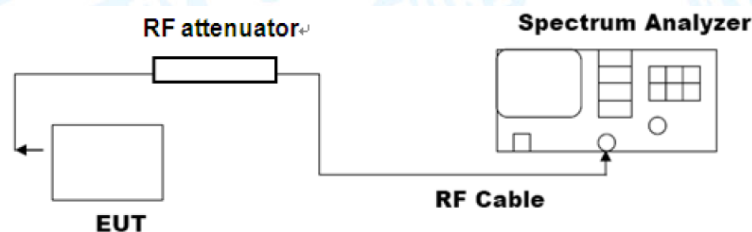

10.3 Test Procedure

- The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:
 - a) Set analyzer center frequency to DTS channel center frequency.
 - b) Set the span to 1.5 times the DTS bandwidth.
 - c) Set the RBW to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
 - d) Set the VBW $\geq [3 * \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

10.4 Deviation From Test Standard

No deviation

10.5 Antenna Connected Construction

Please refer to the description of test mode.

10.6 Test Data

Please refer to the Attachment F.

11. Antenna Requirement

11.1 Test Standard and Limit

11.1.1 Test Standard

RSS 247 6.8

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Deviation From Test Standard

No deviation

11.3 Antenna Connected Construction

The gains of the antenna used for transmitting is (Ant1: 0.4dBi; Ant1: 4dBi; Ant1: 2dBi), and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


11.4 Test Data

The EUT antenna is a External Antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A--Conducted Emission Test Data

Temperature:	24.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

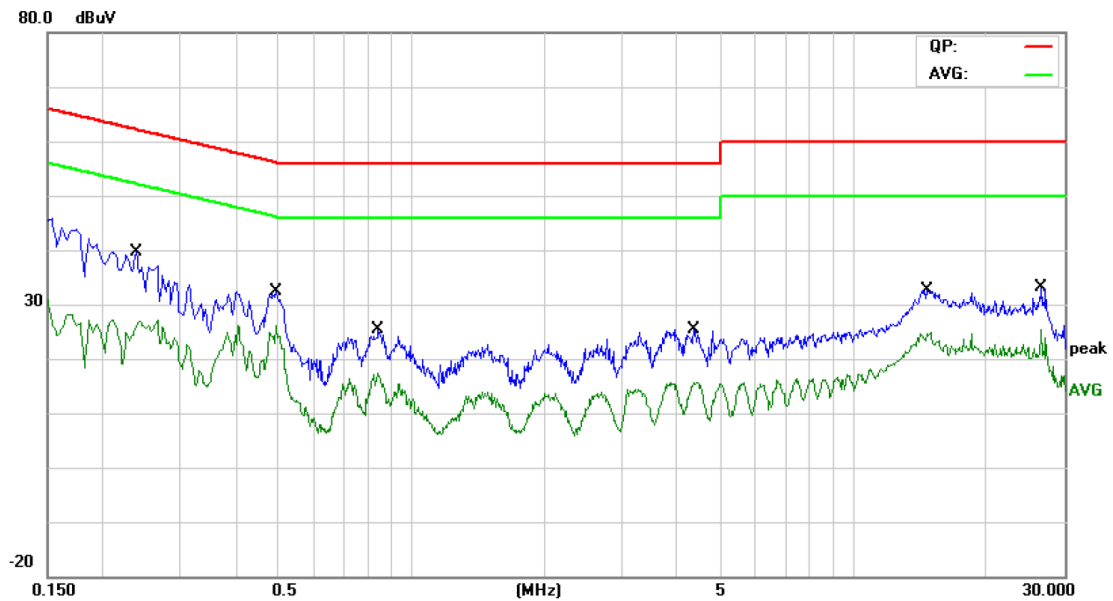


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.2380	23.72	9.70	33.42	62.16	-28.74	QP
2		0.2380	14.18	9.70	23.88	52.16	-28.28	AVG
3		0.4940	19.68	9.70	29.38	56.10	-26.72	QP
4	*	0.4940	13.38	9.70	23.08	46.10	-23.02	AVG
5		0.8420	13.17	9.75	22.92	56.00	-33.08	QP
6		0.8420	7.51	9.75	17.26	46.00	-28.74	AVG
7		4.3580	9.92	9.90	19.82	56.00	-36.18	QP
8		4.3580	4.48	9.90	14.38	46.00	-31.62	AVG
9		14.6220	19.28	9.98	29.26	60.00	-30.74	QP
10		14.6220	13.96	9.98	23.94	50.00	-26.06	AVG
11		26.6100	18.19	10.11	28.30	60.00	-31.70	QP
12		26.6100	12.92	10.11	23.03	50.00	-26.97	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

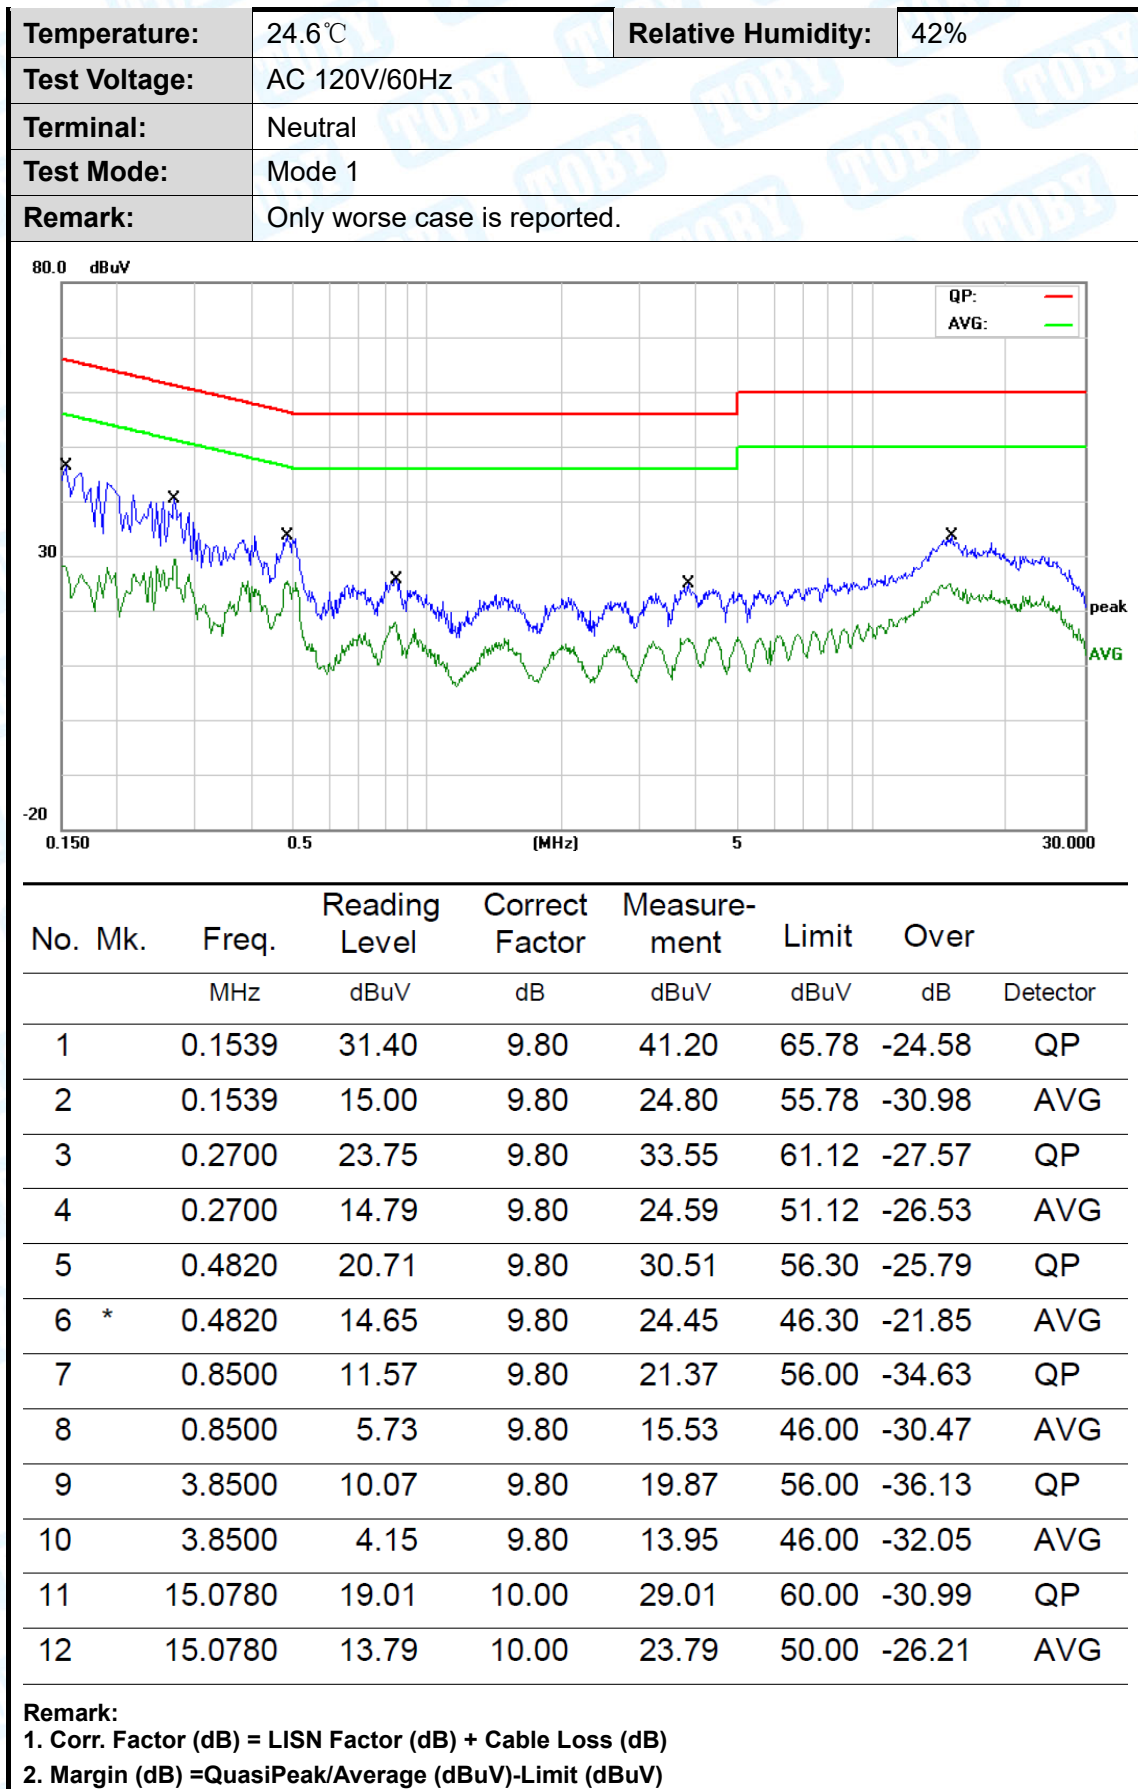

Attachment B--Unwanted Emissions Data

---Radiated Unwanted Emissions


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB
Below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.9℃	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (923.3MHz-Antenna 1)		
Remark:	Only worse case is reported.		

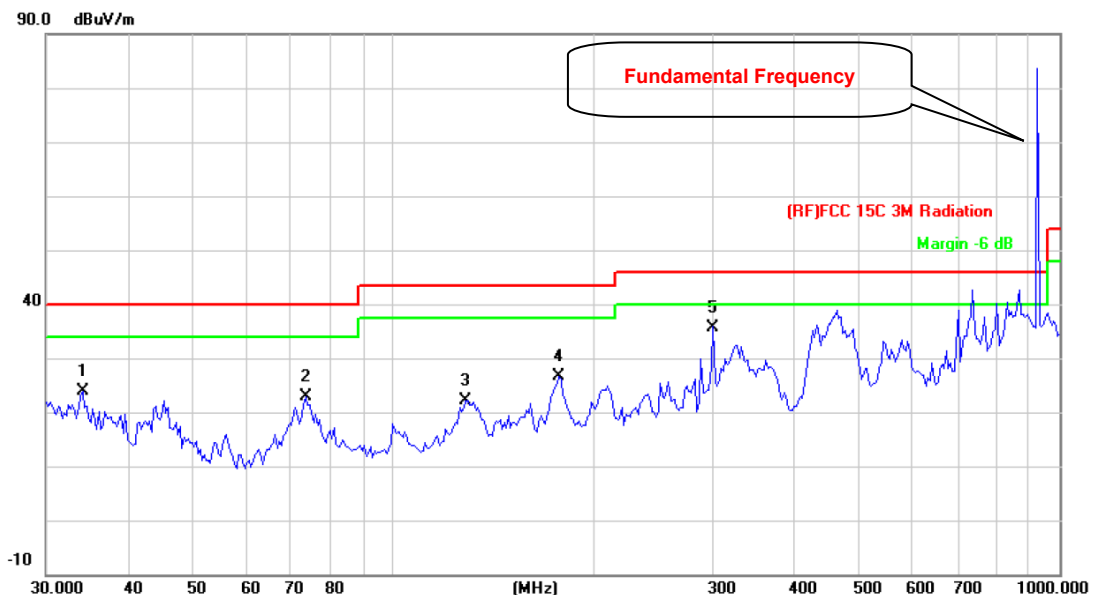


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		34.0365	40.37	-16.42	23.95	40.00	-16.05	peak
2		73.6170	46.13	-23.31	22.82	40.00	-17.18	peak
3		128.1130	44.68	-22.55	22.13	43.50	-21.37	peak
4		176.8878	46.95	-20.41	26.54	43.50	-16.96	peak
5	*	301.4224	52.00	-16.25	35.75	46.00	-10.25	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (923.3MHz-Antenna 1)		
Remark:	Only worse case is reported.		

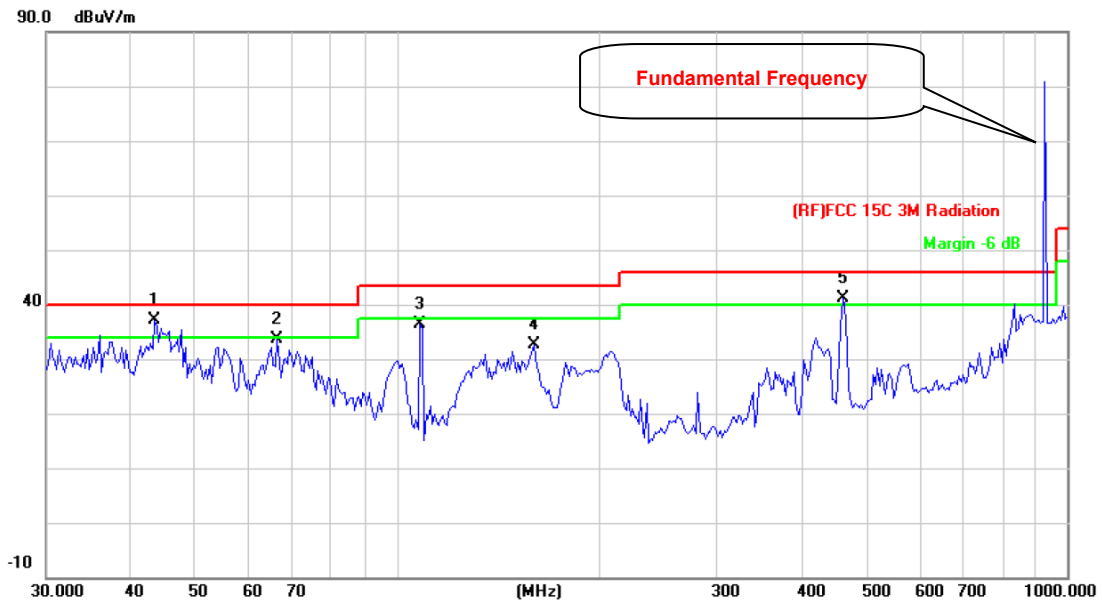


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	43.5057	58.41	-21.18	37.23	40.00	-2.77	peak
2		66.2662	57.70	-24.04	33.66	40.00	-6.34	peak
3		108.2667	58.98	-22.53	36.45	43.50	-7.05	peak
4		160.3456	53.53	-21.00	32.53	43.50	-10.97	peak
5	!	462.3455	52.84	-11.73	41.11	46.00	-4.89	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (925.1MHz-Antenna 1)		
Remark:	Only worse case is reported.		

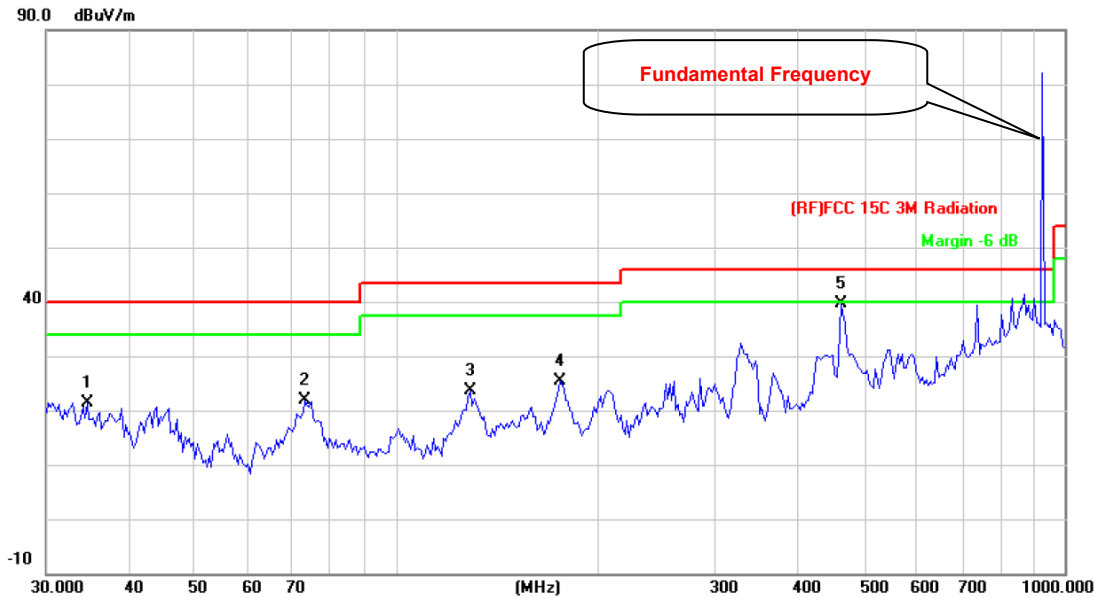


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		34.5173	38.23	-16.77	21.46	40.00	-18.54	peak
2		73.1025	45.27	-23.38	21.89	40.00	-18.11	peak
3		129.0146	46.15	-22.57	23.58	43.50	-19.92	peak
4		175.6516	45.89	-20.46	25.43	43.50	-18.07	peak
5	*	462.3455	51.24	-11.73	39.51	46.00	-6.49	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (925.1MHz-Antenna 1)		
Remark:	Only worse case is reported.		

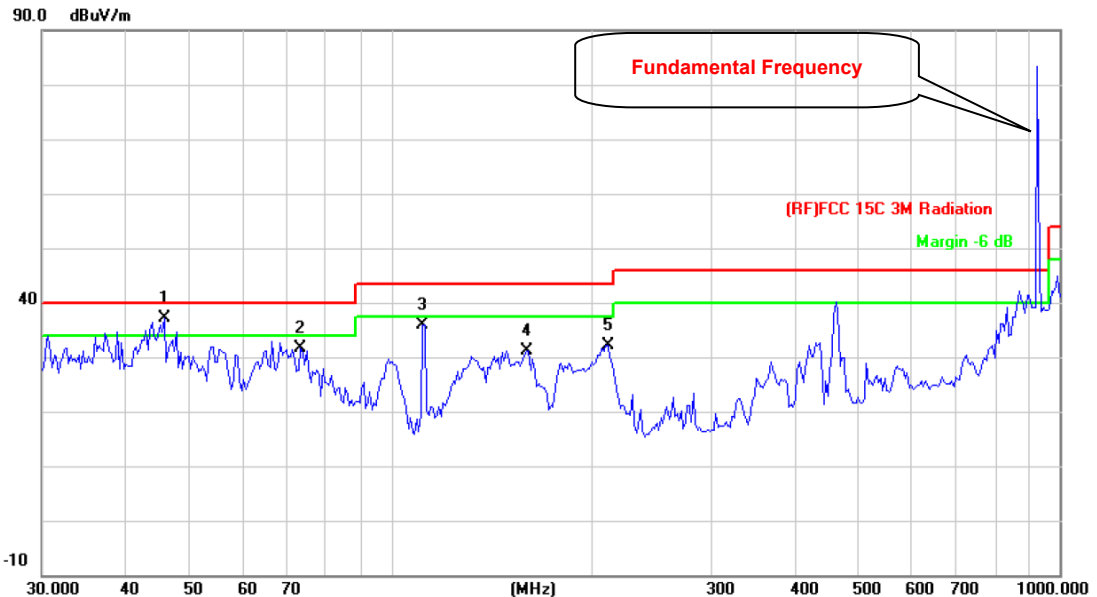


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	45.6948	59.21	-22.14	37.07	40.00	-2.93	peak
2		73.1025	55.09	-23.38	31.71	40.00	-8.29	peak
3		111.3468	58.47	-22.56	35.91	43.50	-7.59	peak
4		159.2251	52.24	-21.06	31.18	43.50	-12.32	peak
5		210.7860	51.73	-19.49	32.24	43.50	-11.26	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (927.5MHz-Antenna 1)		
Remark:	Only worse case is reported.		

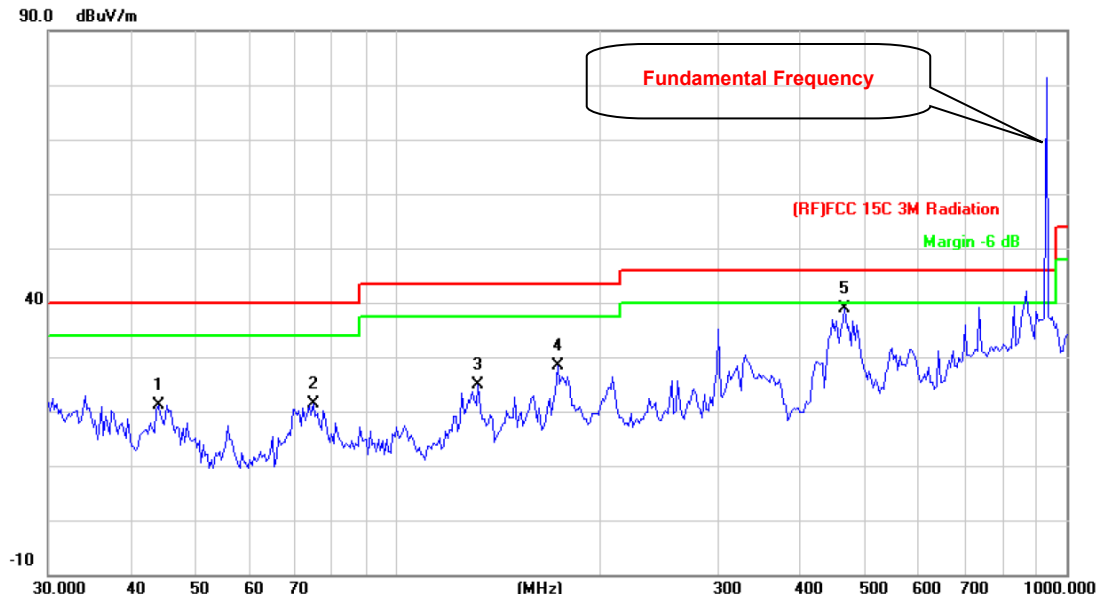

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		43.8119	42.46	-21.33	21.13	40.00	-18.87	peak
2		74.6569	44.55	-23.22	21.33	40.00	-18.67	peak
3		131.7577	47.54	-22.58	24.96	43.50	-18.54	peak
4		173.2051	49.01	-20.54	28.47	43.50	-15.03	peak
5	*	465.5994	50.42	-11.64	38.78	46.00	-7.22	peak


*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (923.3MHz-Antenna 2)		
Remark:	Only worse case is reported.		

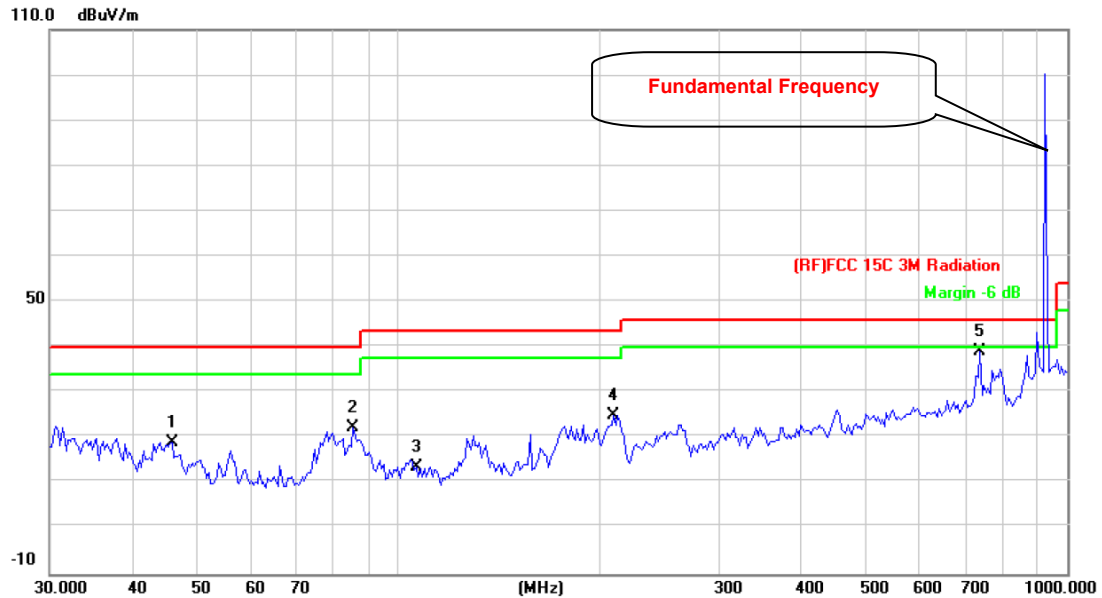


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		45.6948	41.18	-22.14	19.04	40.00	-20.96	peak
2		85.2980	44.49	-22.37	22.12	40.00	-17.88	peak
3		106.0126	36.06	-22.45	13.61	43.50	-29.89	peak
4		209.3129	44.47	-19.59	24.88	43.50	-18.62	peak
5	*	739.6604	45.51	-6.59	38.92	46.00	-7.08	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = QuasiPeak (dBuV/m)-Limit QPK(dBuV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (923.3MHz-Antenna 2)		
Remark:	Only worse case is reported.		

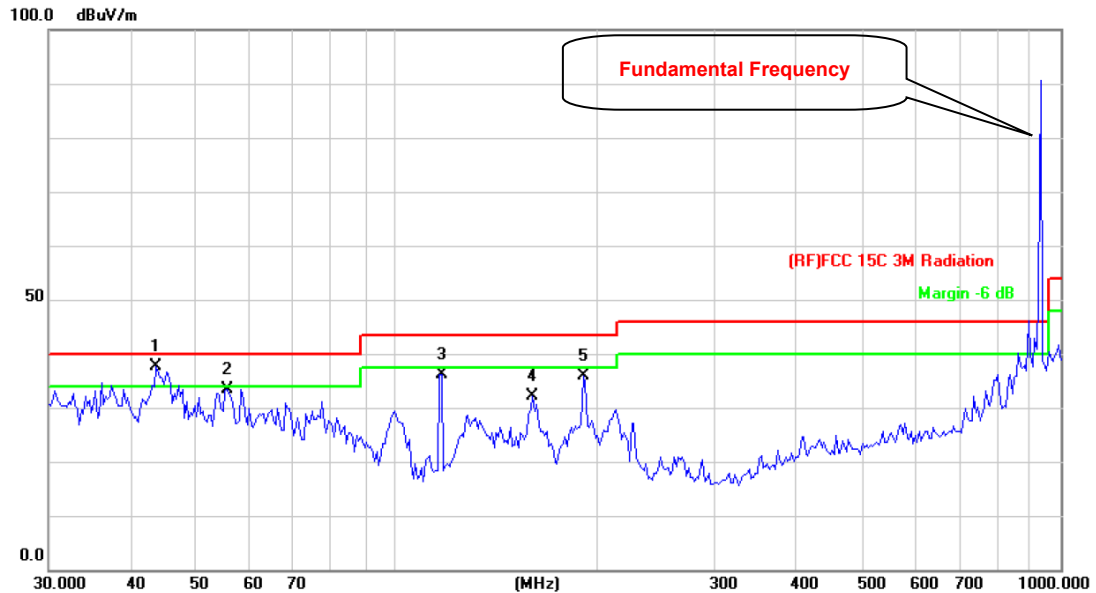


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	43.5057	58.81	-21.18	37.63	40.00	-2.37	peak
2		55.6094	57.64	-24.14	33.50	40.00	-6.50	peak
3		116.9495	58.71	-22.48	36.23	43.50	-7.27	peak
4		160.3456	53.05	-21.00	32.05	43.50	-11.45	peak
5		191.0738	55.89	-19.96	35.93	43.50	-7.57	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (925.1MHz-Antenna 2)		
Remark:	Only worse case is reported.		

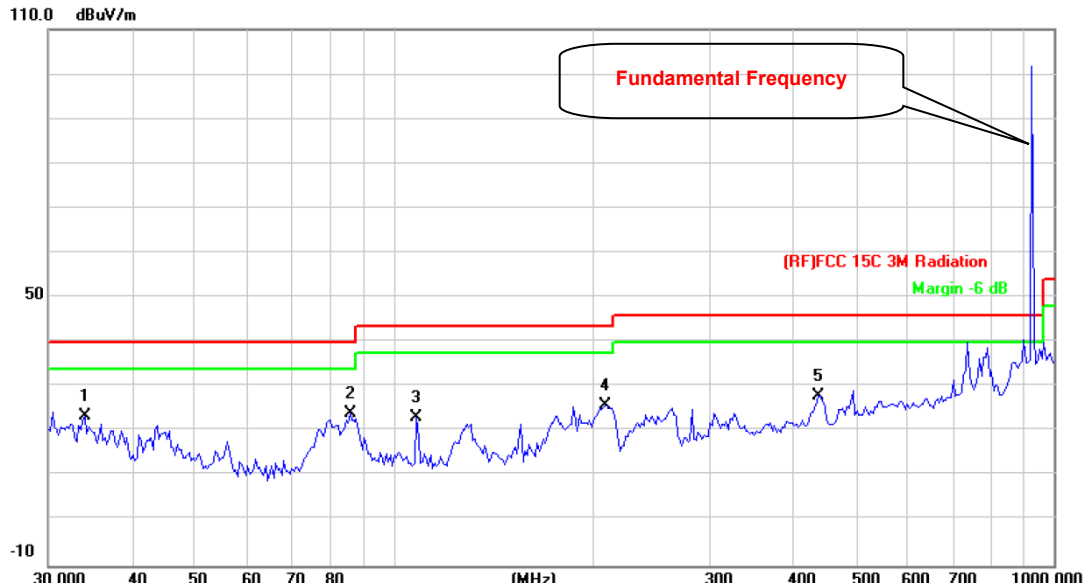


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		34.0365	40.01	-16.42	23.59	40.00	-16.41	peak
2	*	85.8984	46.36	-22.34	24.02	40.00	-15.98	peak
3		108.2667	45.80	-22.53	23.27	43.50	-20.23	peak
4		209.3129	45.49	-19.59	25.90	43.50	-17.60	peak
5		440.1963	40.07	-12.14	27.93	46.00	-18.07	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (925.1MHz-Antenna 2)		
Remark:	Only worse case is reported.		

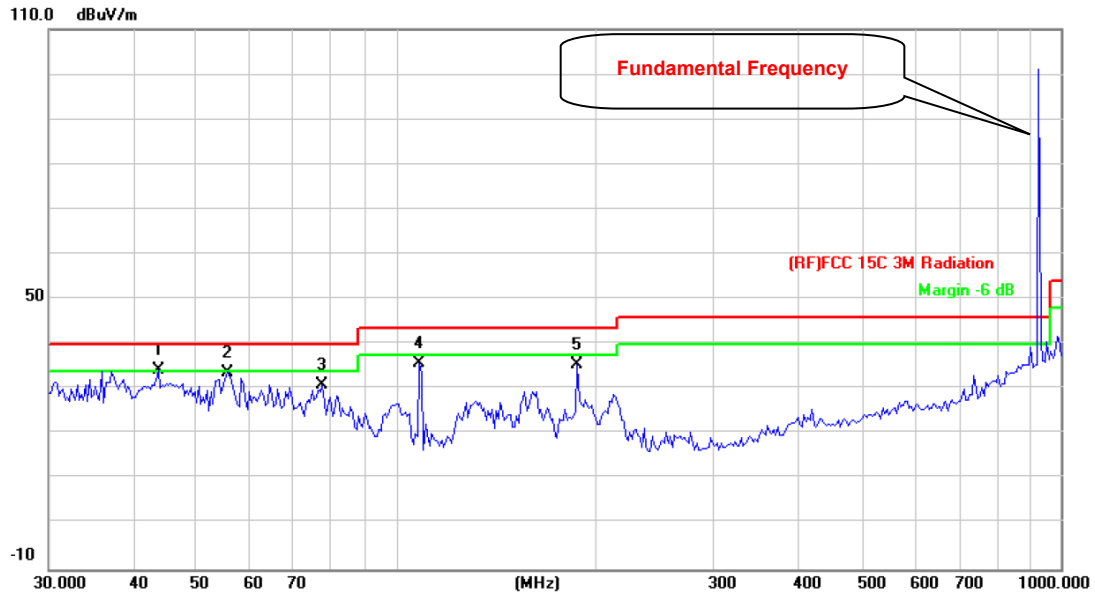


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	43.8119	55.63	-21.33	34.30	40.00	-5.70	peak
2		55.6094	57.94	-24.14	33.80	40.00	-6.20	peak
3		77.3212	53.78	-22.94	30.84	40.00	-9.16	peak
4		108.2667	58.17	-22.53	35.64	43.50	-7.86	peak
5		187.0958	55.43	-20.06	35.37	43.50	-8.13	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (927.5MHz-Antenna 2)		
Remark:	Only worse case is reported.		

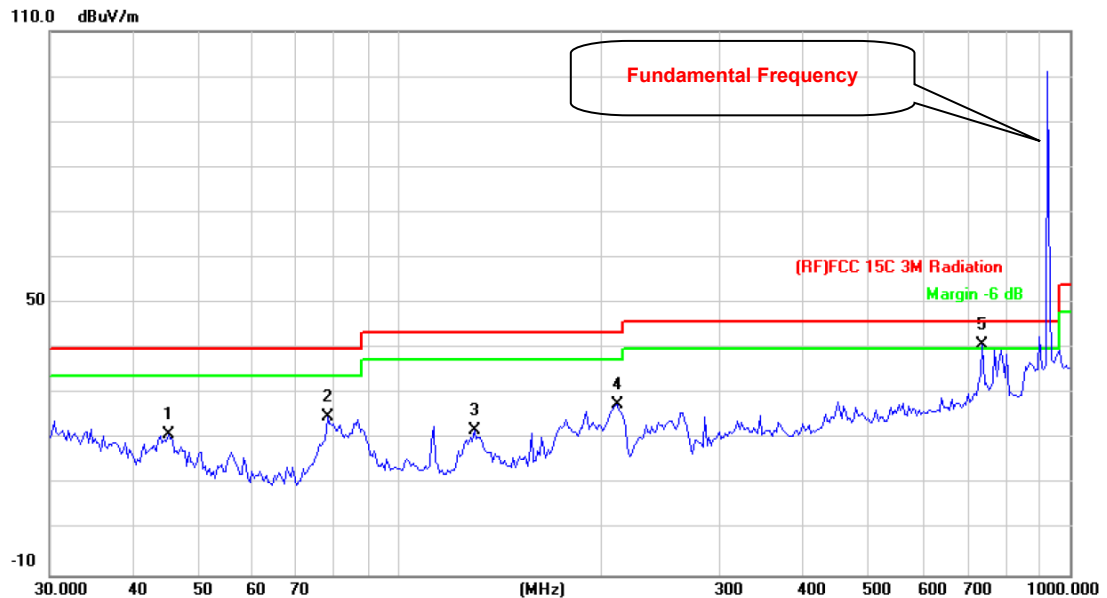


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		45.0583	42.94	-21.92	21.02	40.00	-18.98	peak
2		77.8653	47.74	-22.88	24.86	40.00	-15.14	peak
3		129.0146	44.63	-22.57	22.06	43.50	-21.44	peak
4		210.7860	47.24	-19.49	27.75	43.50	-15.75	peak
5	*	739.6604	47.40	-6.59	40.81	46.00	-5.19	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (927.5MHz-Antenna 2)		
Remark:	Only worse case is reported.		

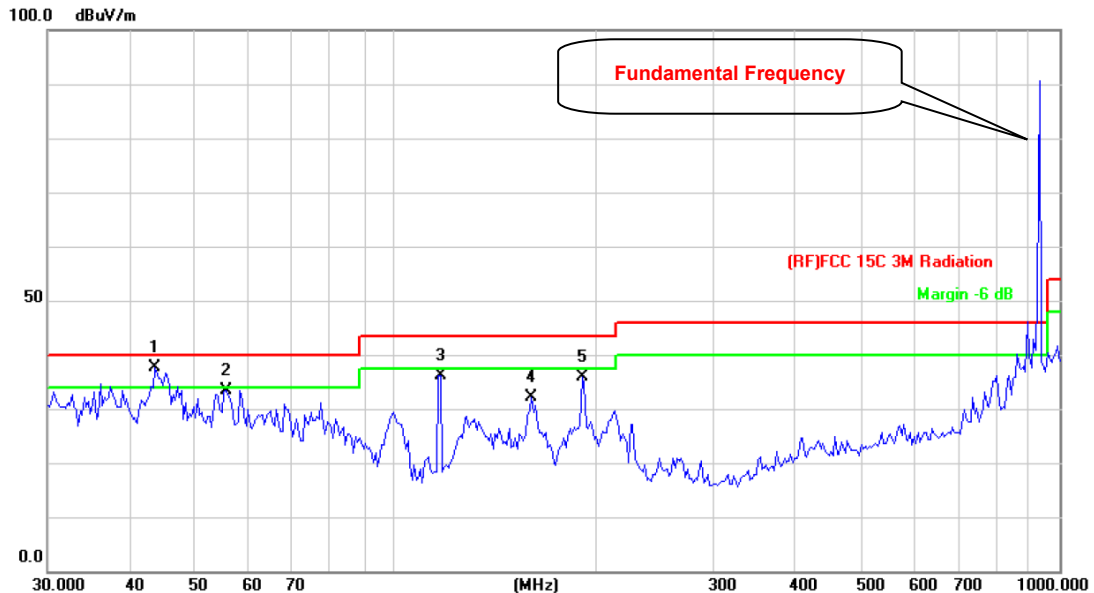


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	43.5057	58.81	-21.18	37.63	40.00	-2.37	peak
2		55.6094	57.64	-24.14	33.50	40.00	-6.50	peak
3		116.9495	58.71	-22.48	36.23	43.50	-7.27	peak
4		160.3456	53.05	-21.00	32.05	43.50	-11.45	peak
5		191.0738	55.89	-19.96	35.93	43.50	-7.57	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (923.3MHz-Antenna 3)		
Remark:	Only worse case is reported.		

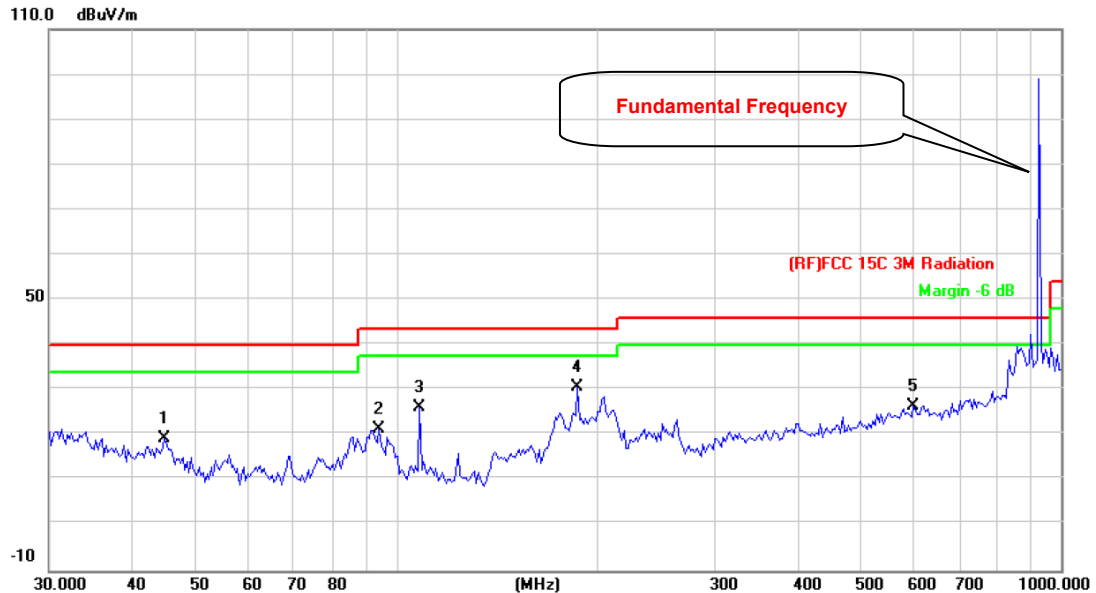


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		44.7433	41.05	-21.79	19.26	40.00	-20.74	peak
2		94.0979	43.37	-22.16	21.21	43.50	-22.29	peak
3		108.2667	48.72	-22.53	26.19	43.50	-17.31	peak
4	*	187.0958	50.64	-20.06	30.58	43.50	-12.92	peak
5		599.3212	34.98	-8.41	26.57	46.00	-19.43	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (923.3MHz-Antenna 3)		
Remark:	Only worse case is reported.		

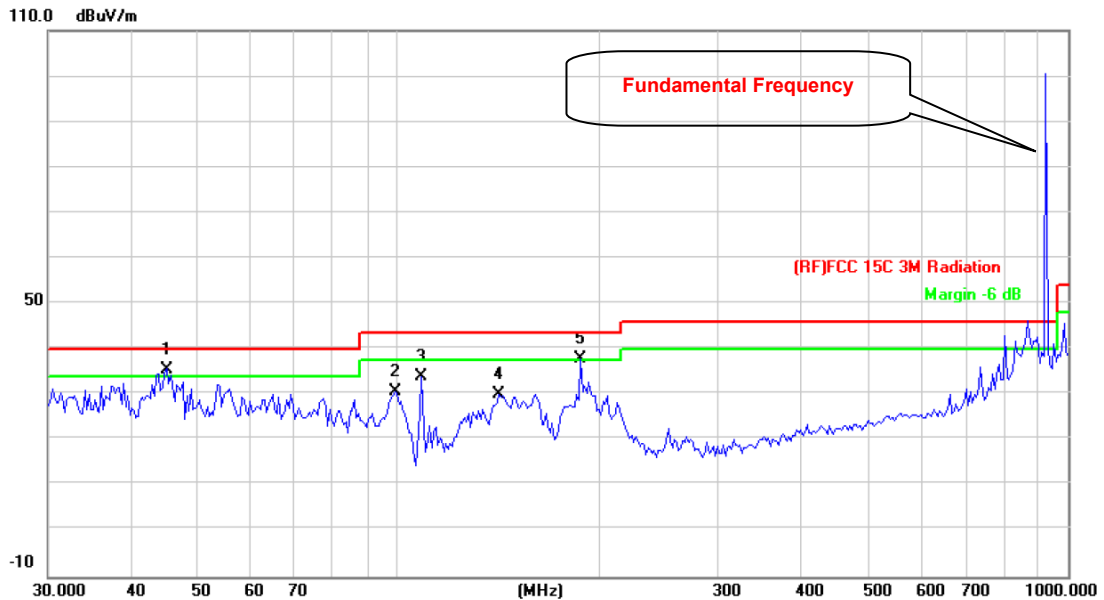


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	45.0583	57.52	-21.92	35.60	40.00	-4.40	peak
2		98.8326	52.74	-22.23	30.51	43.50	-12.99	peak
3		108.2667	56.35	-22.53	33.82	43.50	-9.68	peak
4		141.3298	52.40	-22.49	29.91	43.50	-13.59	peak
5	!	187.0958	57.89	-20.06	37.83	43.50	-5.67	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (925.1MHz-Antenna 3)		
Remark:	Only worse case is reported.		

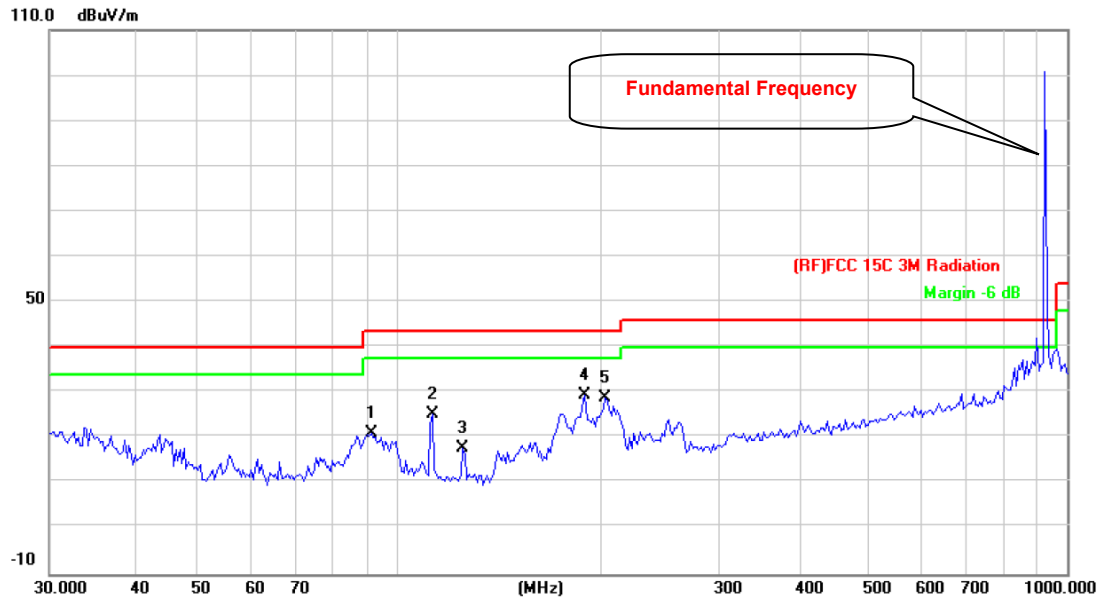


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		90.8554	43.15	-22.12	21.03	43.50	-22.47 peak
2		112.1305	47.86	-22.55	25.31	43.50	-18.19 peak
3		124.5690	40.14	-22.50	17.64	43.50	-25.86 peak
4	*	189.7385	49.44	-19.96	29.48	43.50	-14.02 peak
5		203.5228	48.85	-19.91	28.94	43.50	-14.56 peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (925.1MHz-Antenna 3)		
Remark:	Only worse case is reported.		

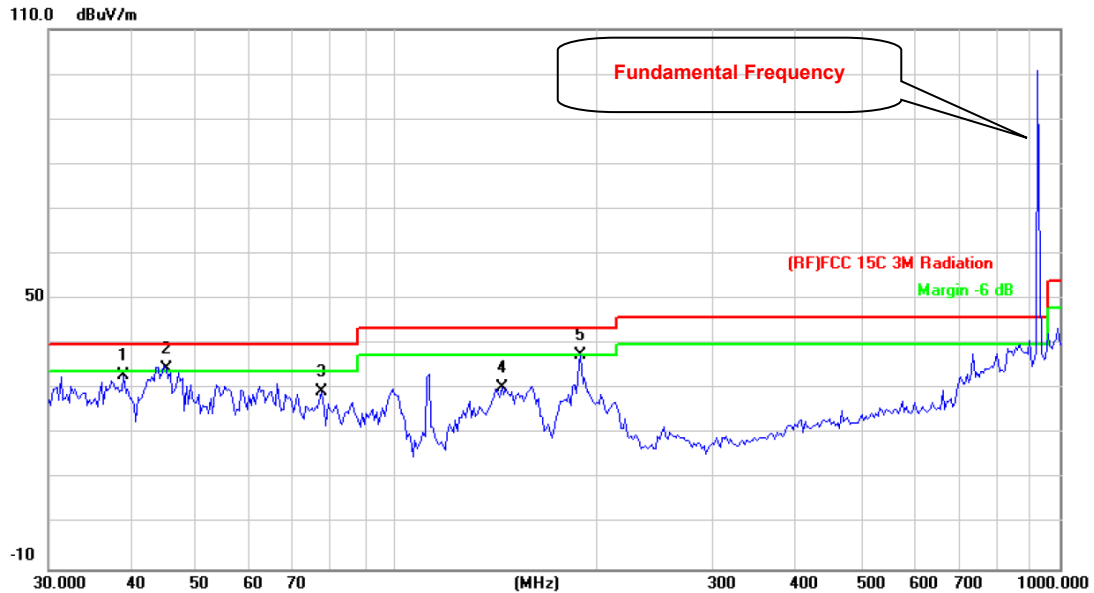


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		38.8878	51.88	-18.96	32.92	40.00	-7.08	peak
2	*	45.0583	56.44	-21.92	34.52	40.00	-5.48	peak
3		77.3212	52.28	-22.94	29.34	40.00	-10.66	peak
4		144.3348	52.49	-22.17	30.32	43.50	-13.18	peak
5	!	189.7384	57.51	-19.96	37.55	43.50	-5.95	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (927.5MHz-Antenna 3)		
Remark:	Only worse case is reported.		

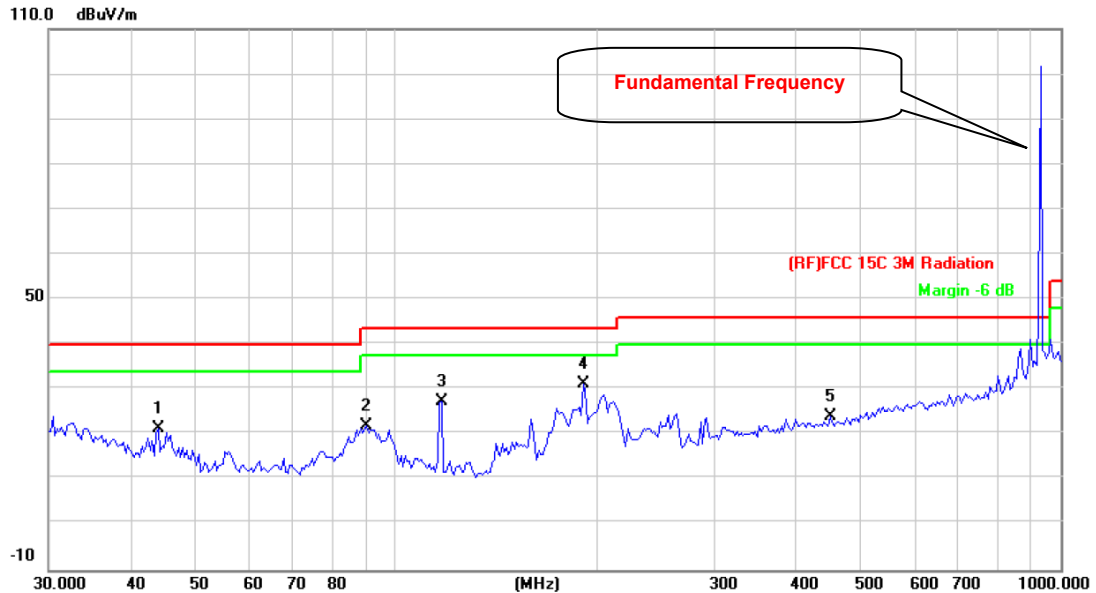


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		43.8119	42.66	-21.33	21.33	40.00	-18.67	peak
2		90.2205	44.19	-22.11	22.08	43.50	-21.42	peak
3		116.9495	49.73	-22.48	27.25	43.50	-16.25	peak
4	*	191.0738	51.11	-19.96	31.15	43.50	-12.35	peak
5		449.5558	36.07	-12.09	23.98	46.00	-22.02	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (927.5MHz-Antenna 3)		
Remark:	Only worse case is reported.		

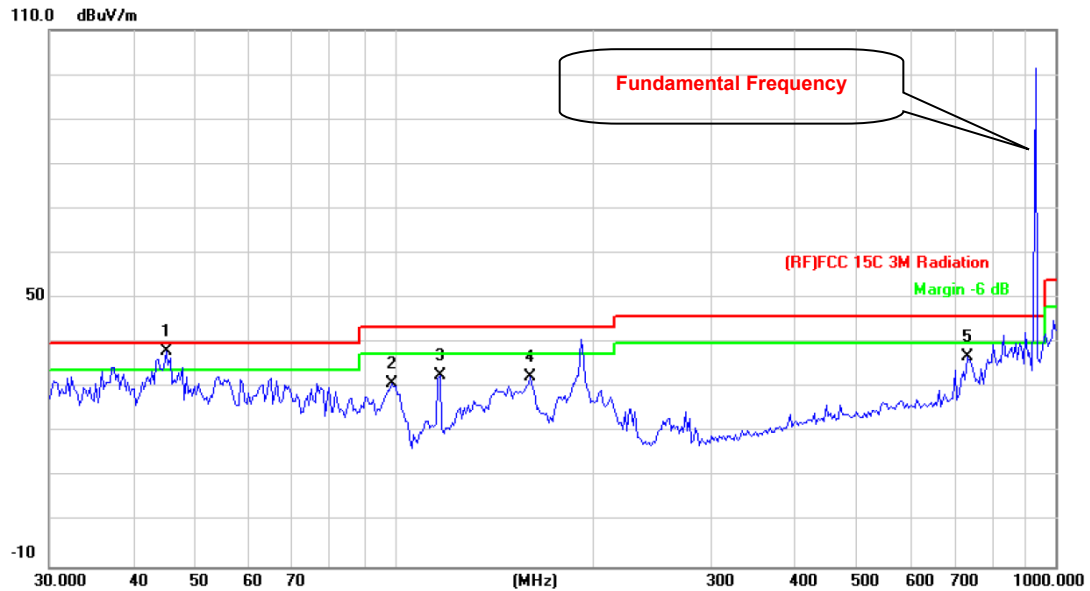

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	45.0583	59.95	-21.92	38.03	40.00	-1.97	peak
2		98.8326	53.13	-22.23	30.90	43.50	-12.60	peak
3		116.9495	55.11	-22.48	32.63	43.50	-10.87	peak
4		160.3456	53.53	-21.00	32.53	43.50	-10.97	peak
5		734.4913	43.67	-6.62	37.05	46.00	-8.95	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Above 1GHz(only show the worst case Mid CH antenna 2)

Temperature:	23.2℃	Relative Humidity:	41%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 927.5MHz-Antenna 2		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		1850.043	53.00	-1.75	51.25	74.00	-22.75 peak
2	*	1850.043	34.29	-1.75	32.54	54.00	-21.46 AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)


4. The tests evaluated1-10GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.

5. No report for the emission which more than 20dB below the prescribed limit.


Temperature:	23.2℃	Relative Humidity:	41%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 927.5MHz-Antenna 2		

---Conduction Unwanted Emissions


Tx. Spurious NVNT LoRa 923.3MHz Ant1 Ref

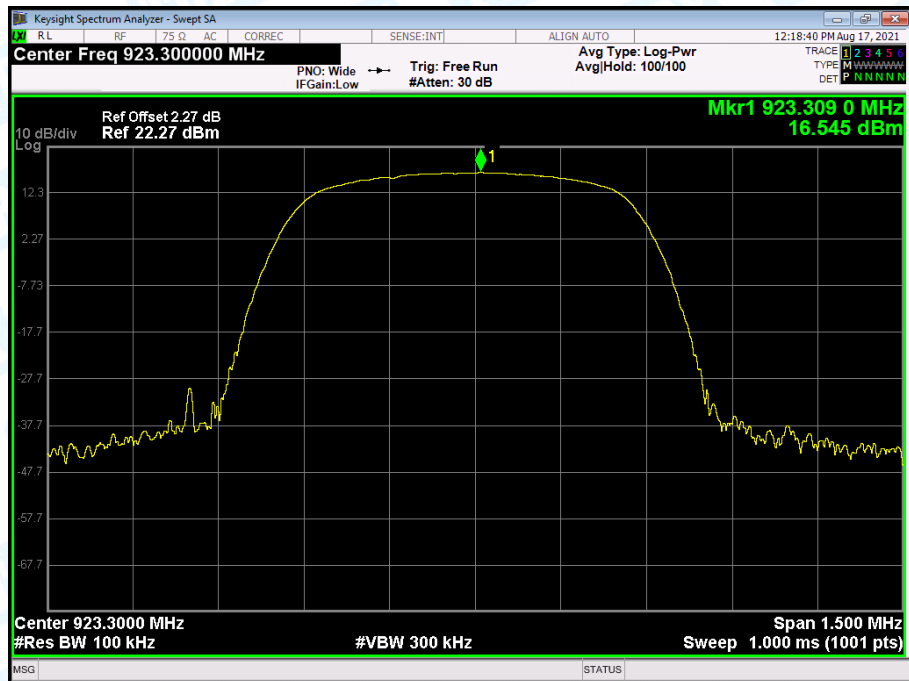


Tx. Spurious NVNT LoRa 923.3MHz Ant1 Emission

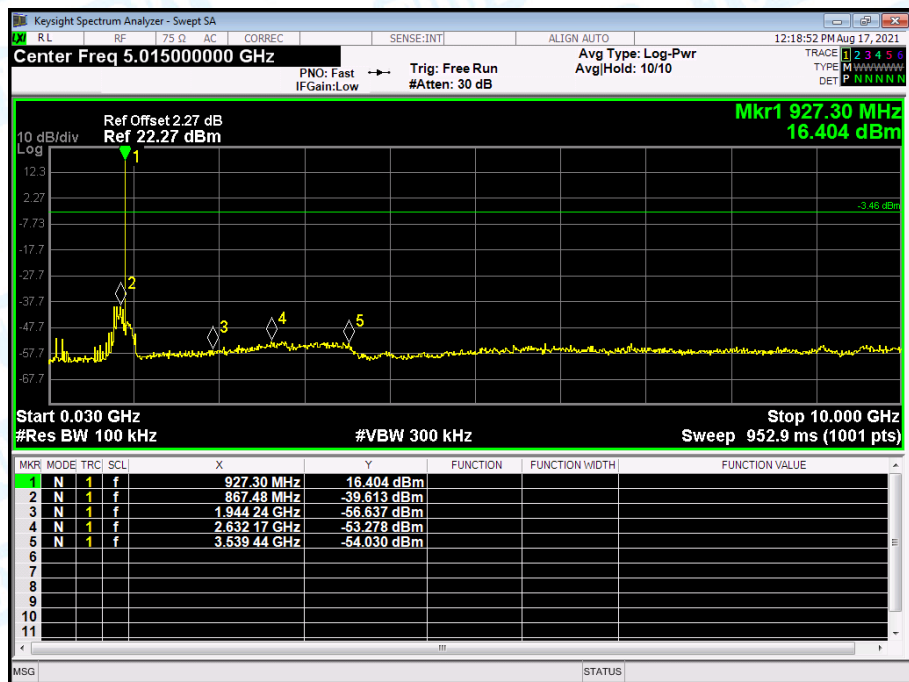

Tx. Spurious NVNT LoRa 927.5MHz Ant1 Ref

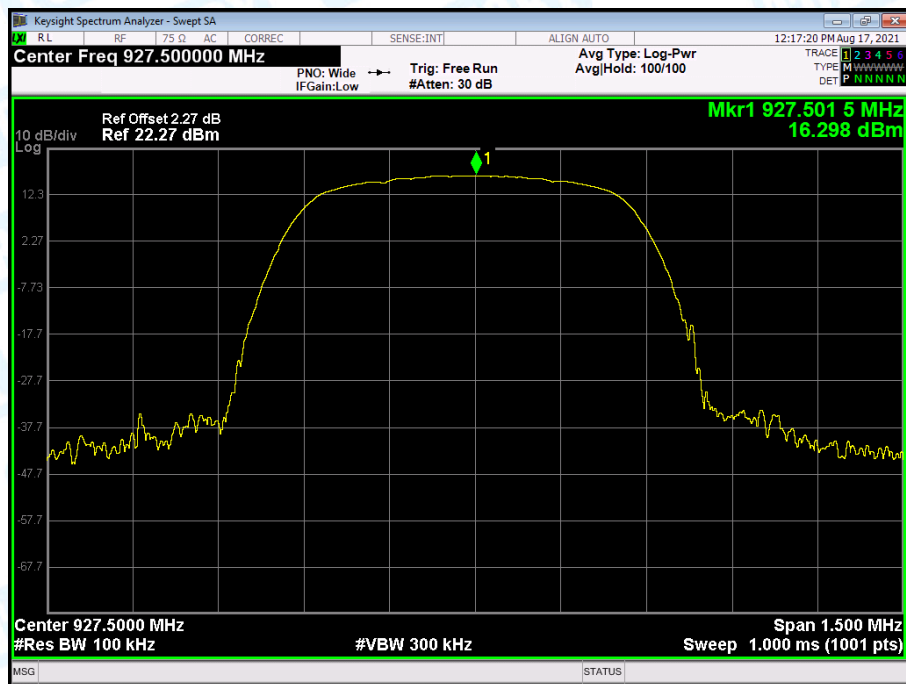


Tx. Spurious NVNT LoRa 927.5MHz Ant1 Emission

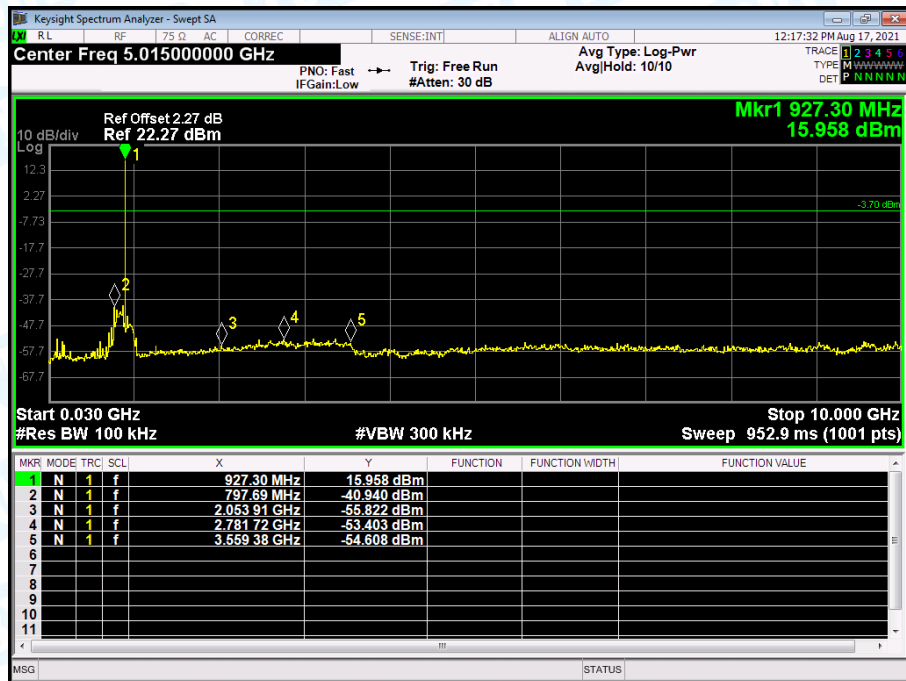


Attachment C--Emissions In Nonrestricted Frequency Bands Data


Band Edge NVNT LoRa 923.3MHz Ant1 Ref

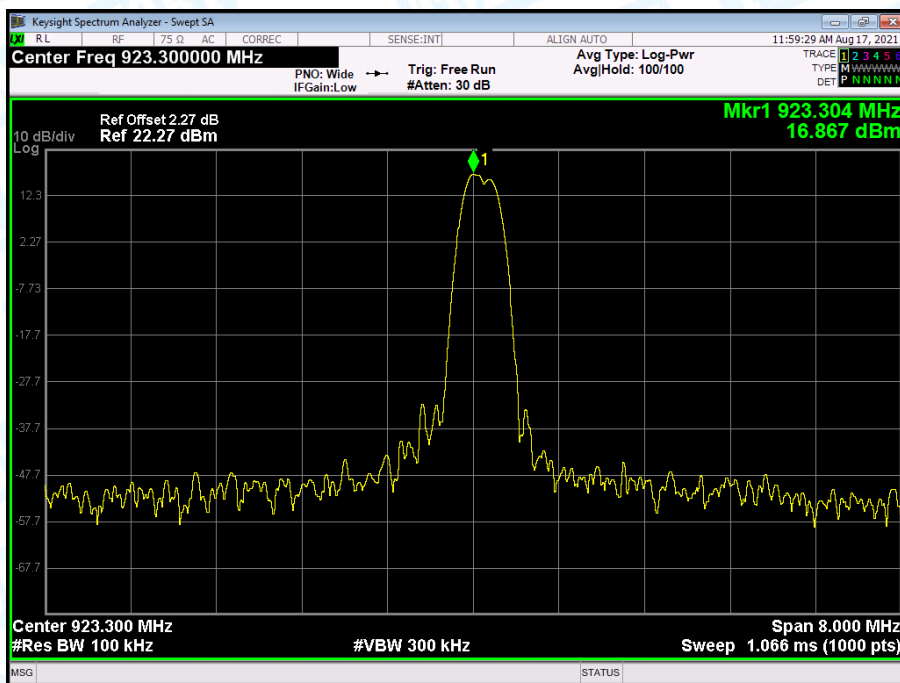


Band Edge NVNT LoRa 923.3MHz Ant1 Emission

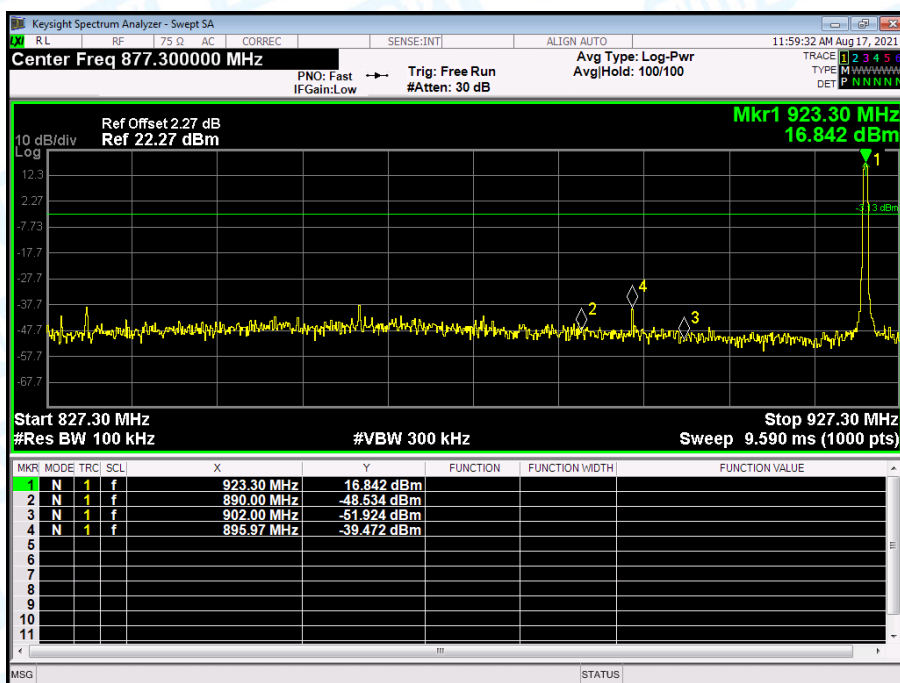

Band Edge NVNT LoRa 927.5MHz Ant1 Ref

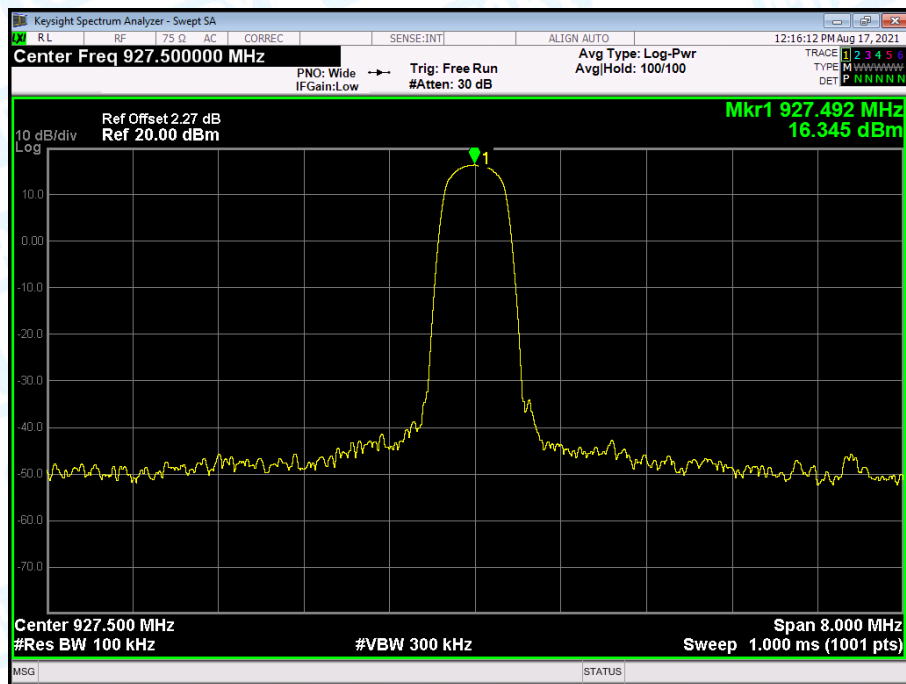

Band Edge NVNT LoRa 927.5MHz Ant1 Emission

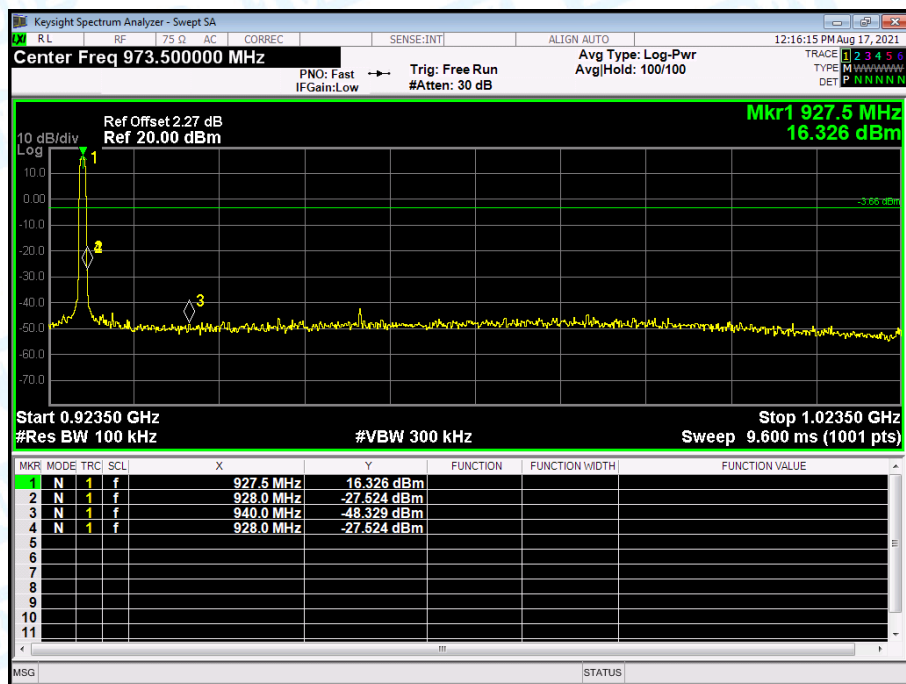

Attachment D--Bandwidth Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	
923.3	564.8	>=500	
925.1	581.9		
927.5	582.6		

923.3MHz

Keysight Spectrum Analyzer - Occupied BW

Center Freq 923.300000 MHz
Trig: Free Run
#Gain: Low
#Atten: 30 dB
Avg/Hold: 100/100
Radio Std: None
Radio Device: BTS


Ref Offset 2.27 dB
Ref 32.27 dBm
Mkr1 923.3 MHz
16.498 dBm

Center 923.3 MHz
#Res BW 100 kHz
#VBW 300 kHz
Span 2 MHz
Sweep 1.333 ms


Occupied Bandwidth	Total Power	22.6 dBm
614.05 kHz		
Transmit Freq Error	-15.267 kHz	% of OBW Power 99.00 %
x dB Bandwidth	564.8 kHz	x dB -6.00 dB

MSG STATUS


925.1MHz

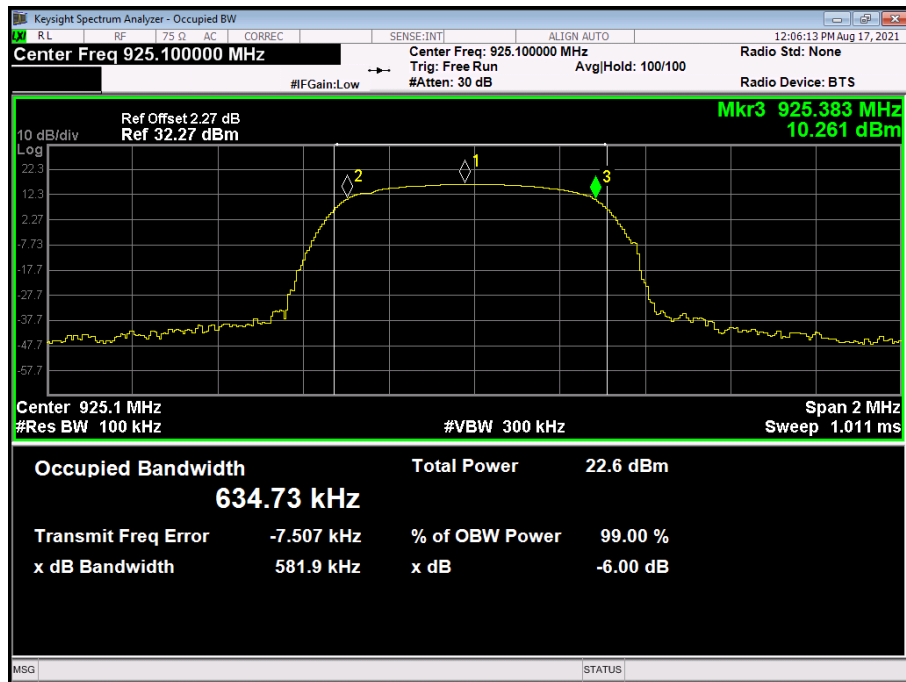

927.5MHz

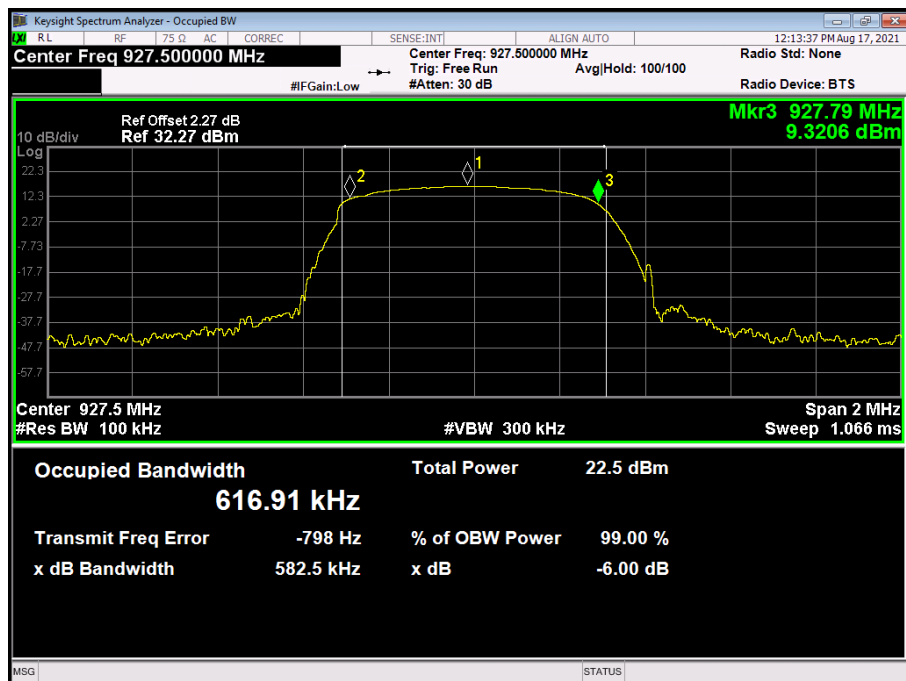

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	
923.3	505.25	/	
925.1	503.36		
927.5	497.99		
923.3MHz			

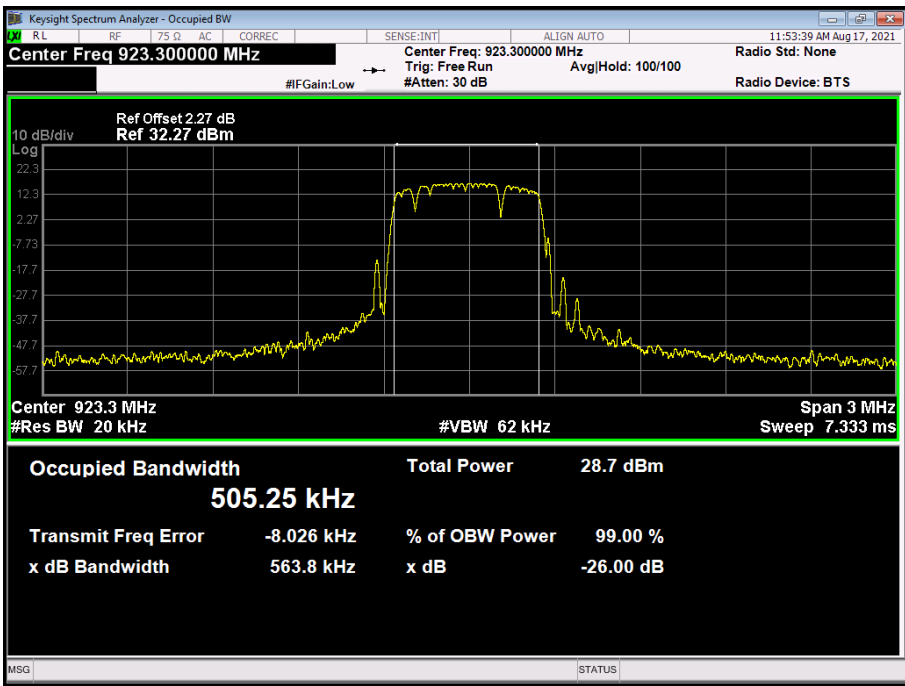

Keysight Spectrum Analyzer - Occupied BW


Center Freq: 923.300000 MHz
Trig: Free Run
Avg/Hold: 100/100
Radio Std: None
Radio Device: BTS

Ref Offset 2.27 dB
Ref 32.27 dBm


Center 923.3 MHz
#Res BW 20 kHz
#VBW 62 kHz
Span 3 MHz
Sweep 7.333 ms

Occupied Bandwidth	Total Power	28.7 dBm	
505.25 kHz			
Transmit Freq Error	-8.026 kHz	% of OBW Power	99.00 %
x dB Bandwidth	563.8 kHz	x dB	-26.00 dB

925.1MHz

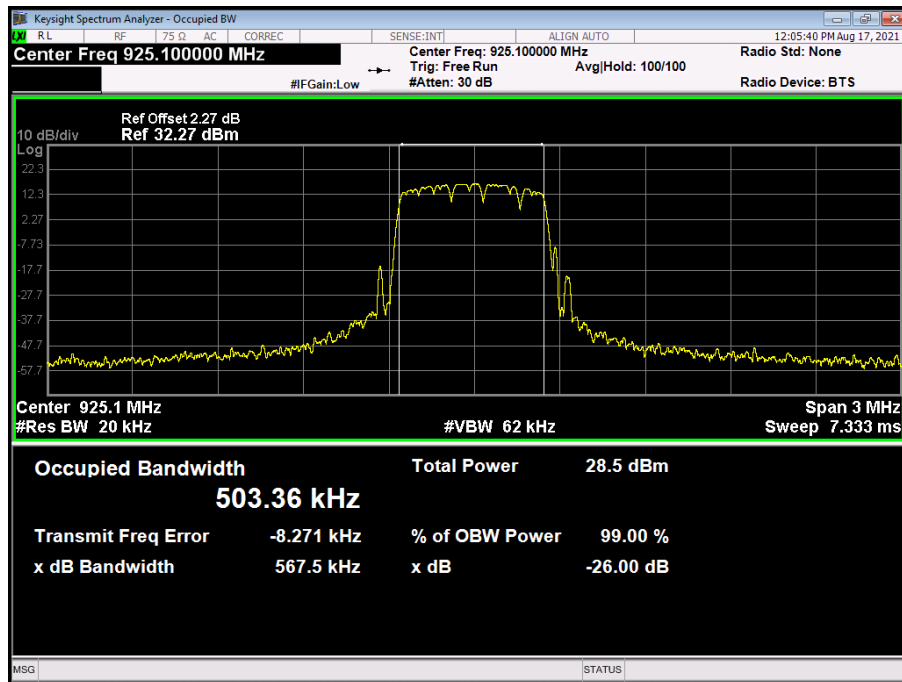


927.5MHz

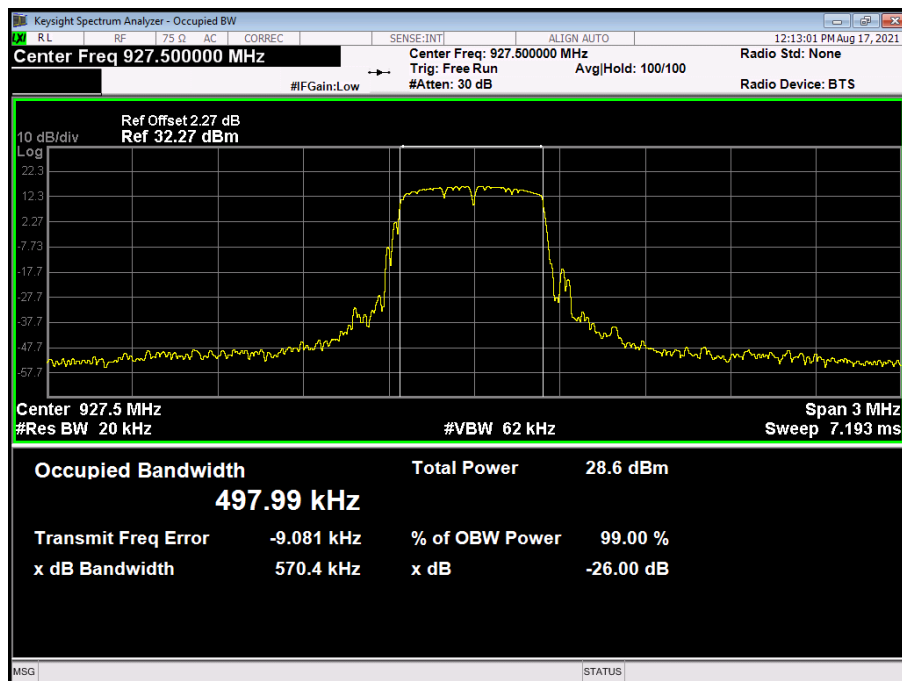


Attachment E—Peak Output Power Data


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
923.3	16.434	30	
925.1	16.404		
927.5	16.296		

923.3MHz

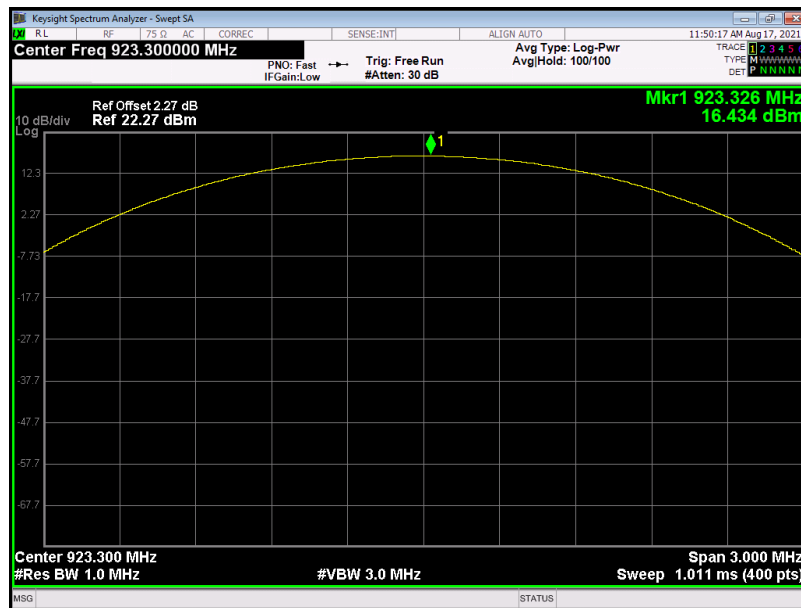

925.1MHz

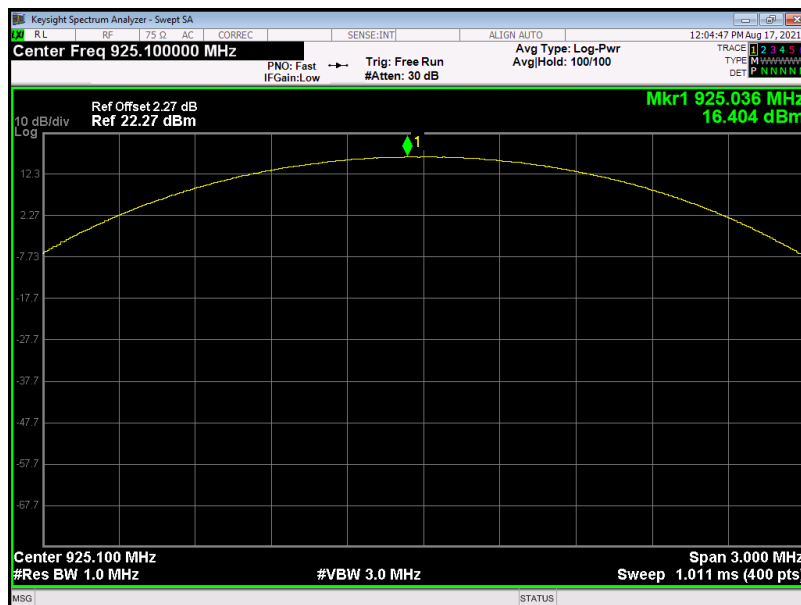


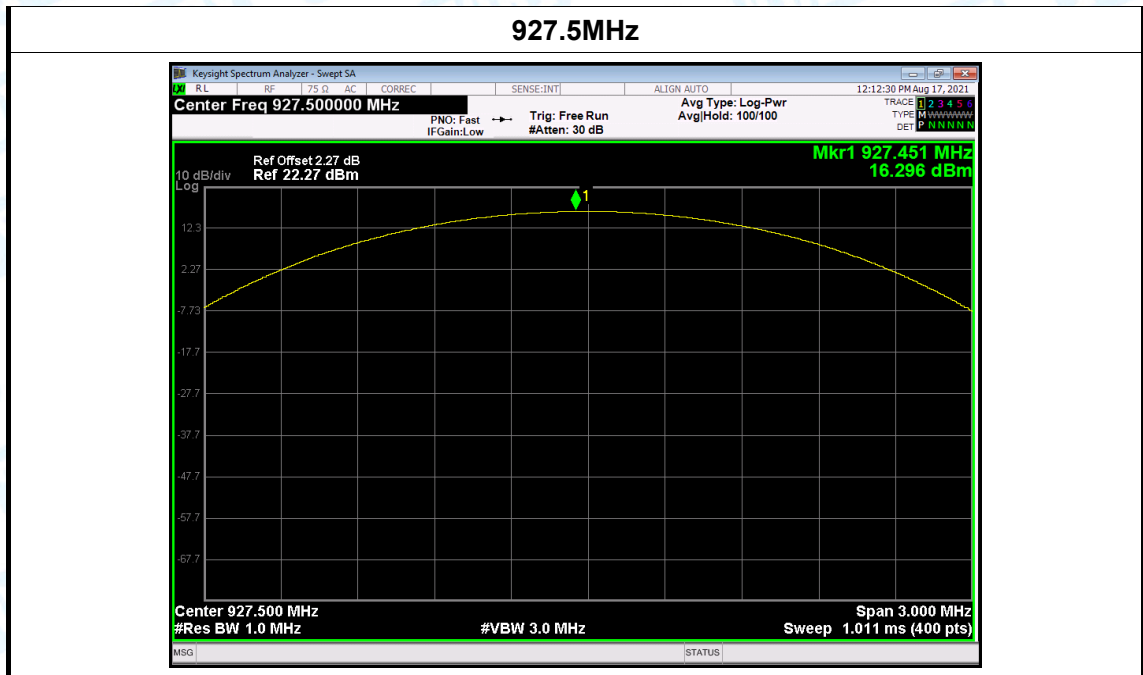


Attachment F—Power Spectral Density Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
923.3	2.594	8	PASS
925.1	2.395		
927.5	2.933		


923.3MHz

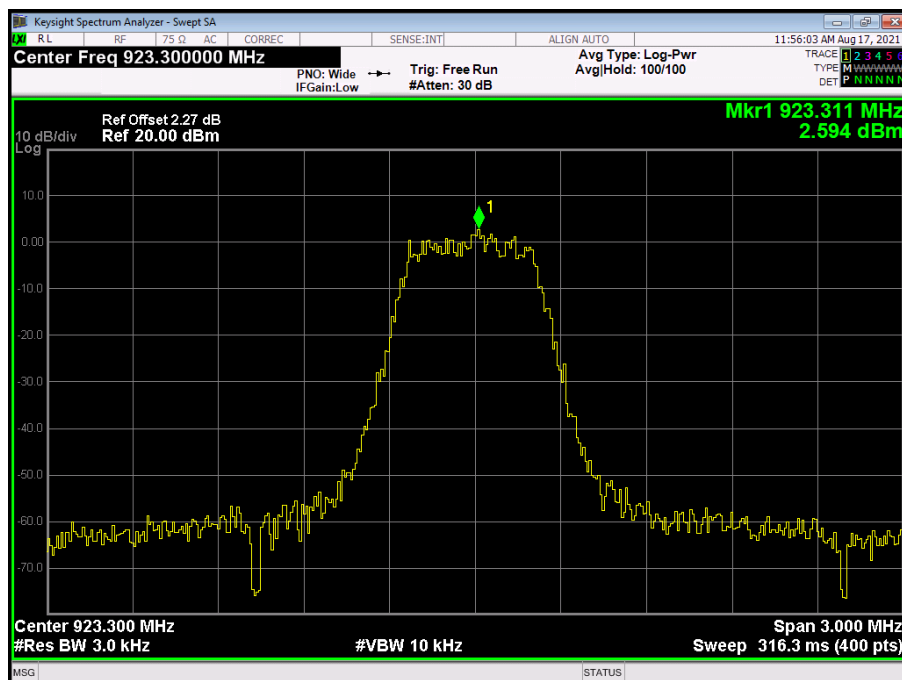

925.1MHz

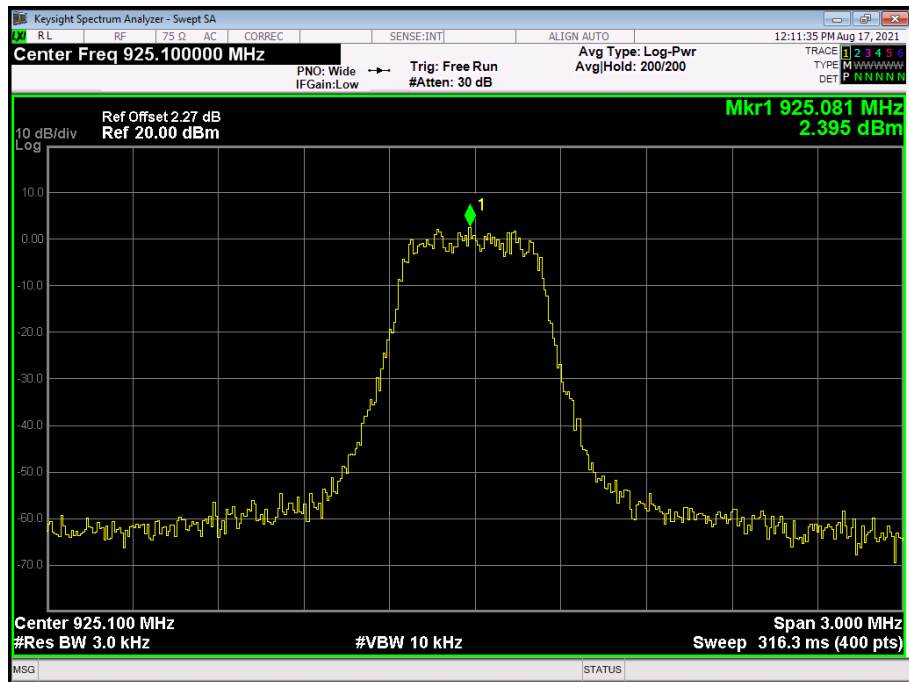

927.5MHz

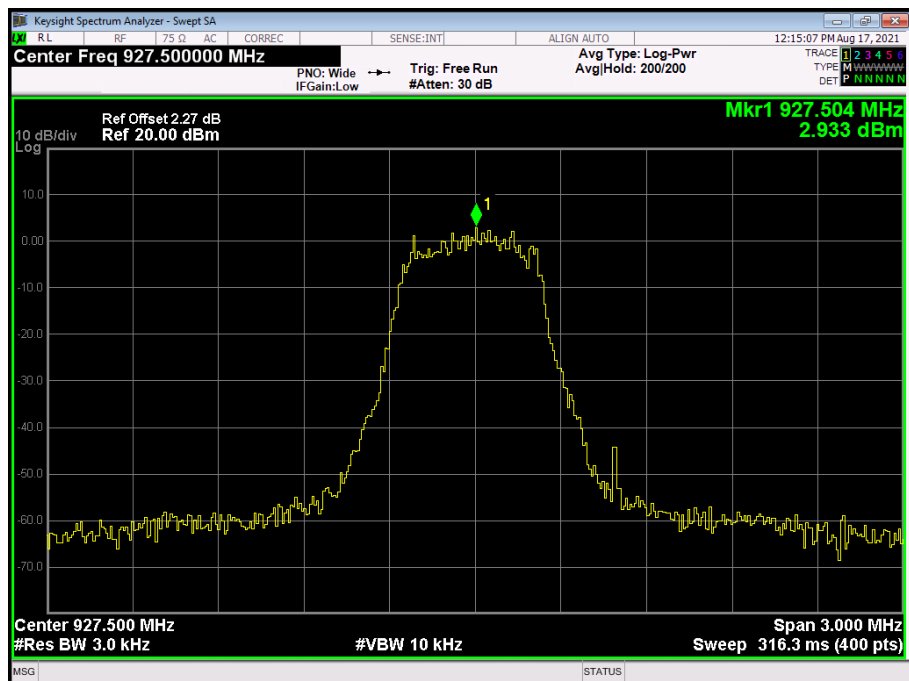

-----END OF REPORT-----