



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: FJ Dynamics Co.,Ltd.

Address: 1709, WeiXing Building 61 GaoXin South 9th Rd Nanshan District, Shenzhen, China

FCC ID: 2A2LL-V1-V1T

Product Name: GNSS Receiver

Standard(s): 47 CFR Part 15, Subpart C(15.247)

ANSI C63.10-2013

KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR221045858-00B

Date Of Issue: 2022/11/25

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	16
3.2.5 Corrected Amplitude & Margin Calculation.....	16
3.3 20 DB BANDWIDTH.....	17
3.3.1 Applicable Standard.....	17
3.3.2 EUT Setup.....	17
3.3.3 Test Procedure	17
3.4 CHANNEL SEPARATION	18
3.4.1 Applicable Standard.....	18
3.4.2 EUT Setup.....	18
3.4.3 Test Procedure	18
3.5 NUMBER OF HOPPING FREQUENCY	19
3.5.1 Applicable Standard.....	19
3.5.2 EUT Setup.....	19
3.5.3 Test Procedure	19
3.6 TIME OF OCCUPANCY(DWELL TIME).....	20
3.6.1 Applicable Standard.....	20
3.6.2 EUT Setup.....	20
3.6.3 Test Procedure	20
3.7 PEAK OUTPUT POWER.....	21
3.7.1 Applicable Standard.....	21

3.7.2 EUT Setup.....	21
3.7.3 Test Procedure	21
3.8 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	22
3.8.1 Applicable Standard.....	22
3.8.2 EUT Setup.....	22
3.8.3 Test Procedure	22
3.9 ANTENNA REQUIREMENT.....	23
3.9.1 Applicable Standard.....	23
3.9.2 Judgment.....	23
4. TEST DATA AND RESULTS	24
4.1 AC LINE CONDUCTED EMISSIONS.....	24
4.2 RADIATION SPURIOUS EMISSIONS	27
4.3 20 dB EMISSION BANDWIDTH:	34
4.4 CHANNEL SEPARATION:	36
4.5 NUMBER OF HOPPING FREQUENCY:	38
4.6 TIME OF OCCUPANCY(DWELL TIME):.....	40
4.7 PEAK CONDUCTED OUTPUT POWER:	42
4.8 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE:	43
5. RF EXPOSURE EVALUATION	46
5.1 APPLICABLE STANDARD.....	46
5.2 PROCEDURE.....	46
5.3 MEASUREMENT RESULT	48

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	GNSS Receiver
EUT Model:	V1t
Multiple Model:	V1
Operation Frequency:	902.6-927.8 MHz
Maximum Peak Output Power (Conducted):	28.58 dBm
Modulation Type:	FSK
Rated Input Voltage:	DC 9-36V
Serial Number:	CR221045858-RF-S1
EUT Received Date:	2022/10/10
EUT Received Status:	Good
Note: The Multiple model is electrically identical with test model, please refer to the declaration letter for more detail, which was provided by manufacturer. Test only performed at USB-C Power Supply since the worst USB-C Power Supply is per test for DTS report.	

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.6	33	915.8
2	903	34	916.2
3	903.4	35	916.6
4	903.8	36	917.0
5	904.2	37	917.4
6	904.6	38	917.8
7	905	39	918.2
8	905.4	40	918.6
9	905.8	41	919.0
10	906.2	42	919.4
11	906.6	43	919.8
12	907	44	920.2
13	907.4	45	920.6
14	907.8	46	921.0
15	908.2	47	921.4
16	908.6	48	921.8
17	909	49	922.2
18	909.4	50	922.6
19	910.2	51	923.0
20	910.6	52	923.4
21	911	53	923.8
22	911.4	54	924.2
23	911.8	55	924.6
24	912.2	56	925.0
25	912.6	57	925.4
26	913	58	925.8
27	913.4	59	926.2
28	913.8	60	926.6
29	914.2	61	927.0
30	914.6	62	927.4
31	915.0	63	927.8
32	915.4	/	/
Per section 15.31(m), the below frequencies were performed the test as below:			
Test Channel		Frequency (MHz)	
Lowest		902.6	
Middle		915.0	
Highest		927.8	

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	/Frequency Range	Antenna Gain
Monopole	50	902-928MHz	2.98 dBi
The Method of §15.203 Compliance: <input type="checkbox"/> Antenna must be permanently attached to the unit. <input type="checkbox"/> Antenna must use a unique type of connector to attach to the EUT. <input checked="" type="checkbox"/> Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Unknown	RH-PD30W	Input: AC 100-240V~50/60Hz 0.8A Output: USB-A:4.5V=5A 5V=4.5A 9V=2A 12V=1.5A USB-C:5V=3A 9V=3A 12V=2.5A 15V=2A 20V=1.5A USB-A+C:5V=3A
USB-C Cable	Unknown	Unknown	Shieled, 1m
USB Cable	Unknown	Unknown	Shieled, 1m
Configuration Cable	Unknown	Unknown	Unshieled, 1m

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	aithinker_serial_tool_v1.2.3		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲：			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
FHSS	default	default	default

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Huawei	Smartphone	EVR-AL00	A000009E3F501E
Lenovo	Laptop	G510	CB30920865
CAMEL	Battery	55D23L	BAT01


1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DB9 Cable	No	No	2	EUT	Laptop
Power Cable	No	No	1.5	EUT	Battery

1.2.4 Block Diagram of Test Setup


AC line conducted emissions:

USB Power Supply:

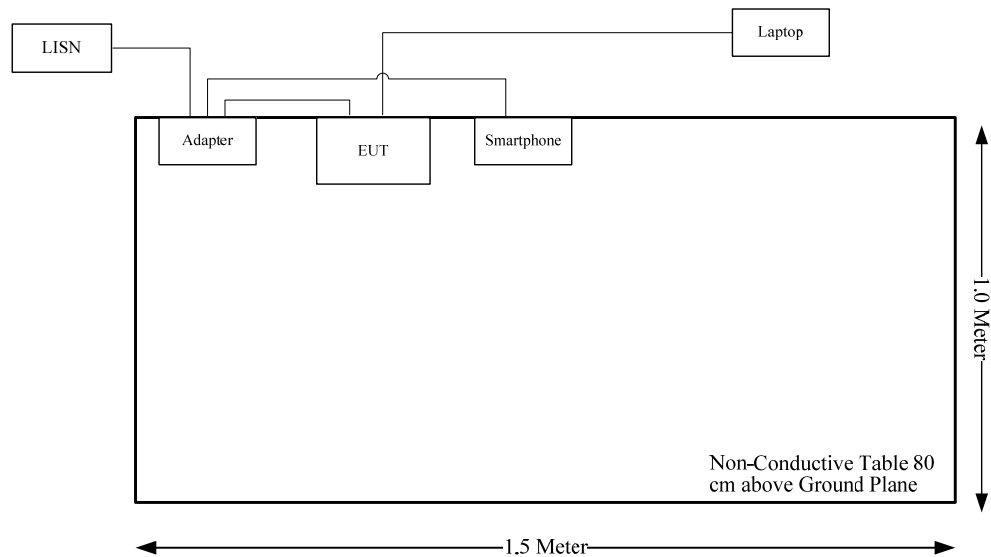

Spurious Emissions:

USB Power Supply:

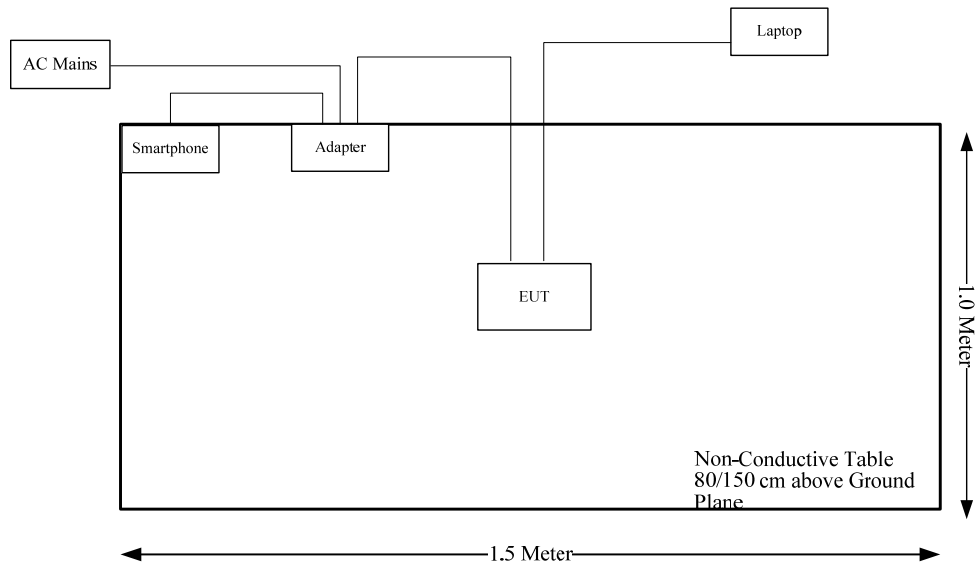

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Power Spectral Density, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.26\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC line conducted emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious emissions	Compliant
FCC §15.247(a)(1)	20 dB bandwidth	Compliant
FCC §15.247(a)(1)	Channel separation	Compliant
FCC §15.247(a)(1)(i)	Number of hopping Frequency	Compliant
FCC §15.247(a)(1)(i)	Time of occupancy (dwell time)	Compliant
FCC §15.247(b)(2)	Peak output power measurement	Compliant
FCC §15.247(d)	Band edges	Compliant
FCC §15.203	Antenna requirement	Compliant
FCC§15.247 (i) & §1.1307	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

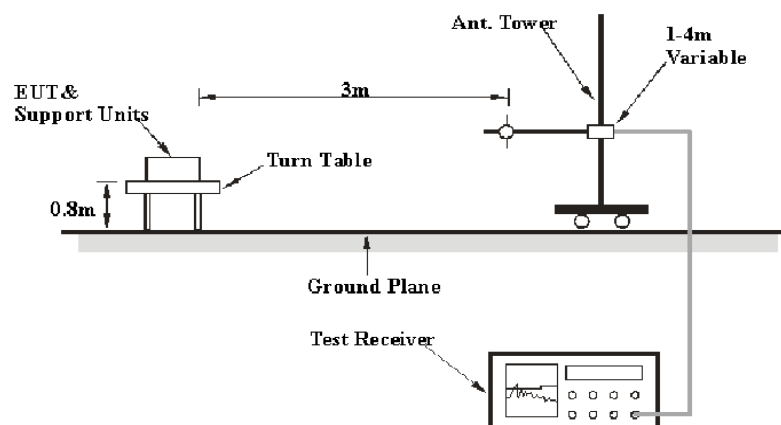

Above 1GHz:

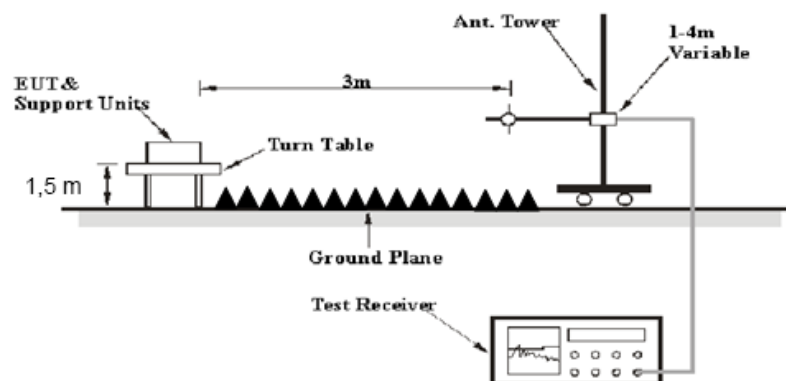

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.3.2 EUT Setup

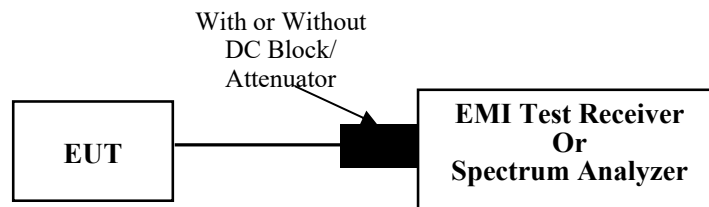

3.3.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.


3.4 Channel Separation

3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.4.2 EUT Setup

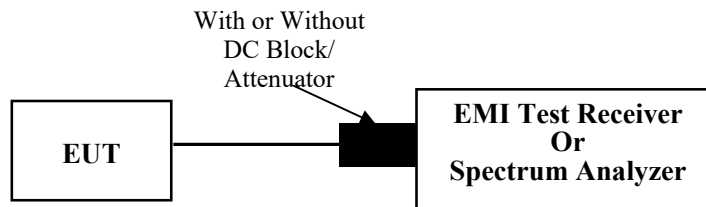

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


3.5 Number Of Hopping Frequency

3.5.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.5.2 EUT Setup

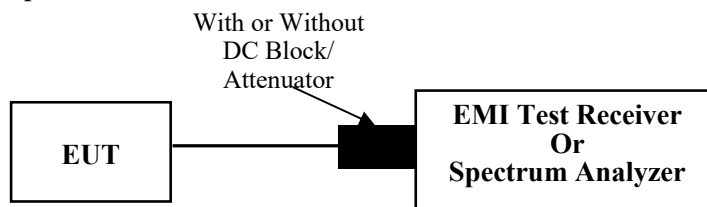

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.


3.6 Time Of Occupancy(Dwell Time)

3.6.1 Applicable Standard

FCC §15.247 (a)(1)(i)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.6.2 EUT Setup

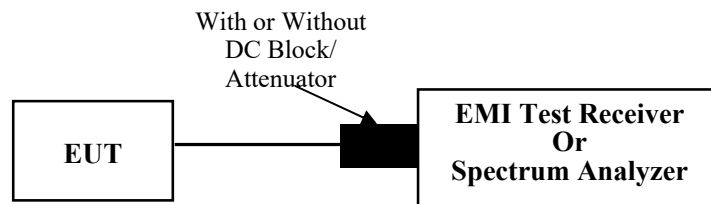

3.6.3 Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.


3.7 Peak Output Power

3.7.1 Applicable Standard

FCC §15.247 (b)(2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

3.7.2 EUT Setup

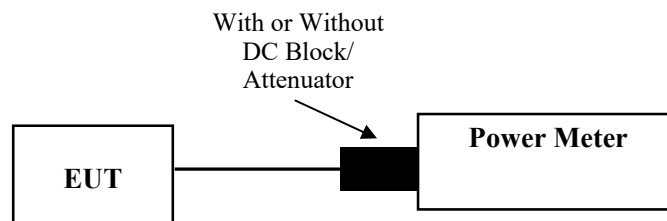

3.7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
2. Add a correction factor to the display.


3.8 100 kHz Bandwidth of Frequency Band Edge

3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.8.2 EUT Setup

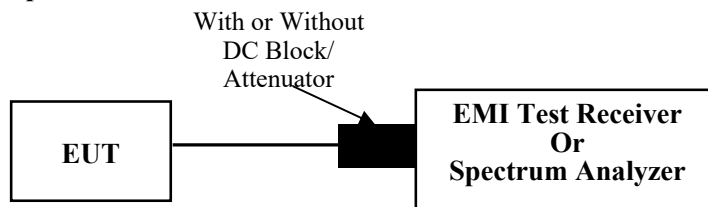

3.8.3 Test Procedure

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR221045858-RF-S1	Test Date:	2022/10/28
Test Site:	CE	Test Mode:	Transmitting(Low Channel was the worst)
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	64	ATM Pressure: (kPa)	100.9
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022/04/01	2023/03/31
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


USB-C Power Supply:

Test Mode: Transmitting
Port: Line
Note:

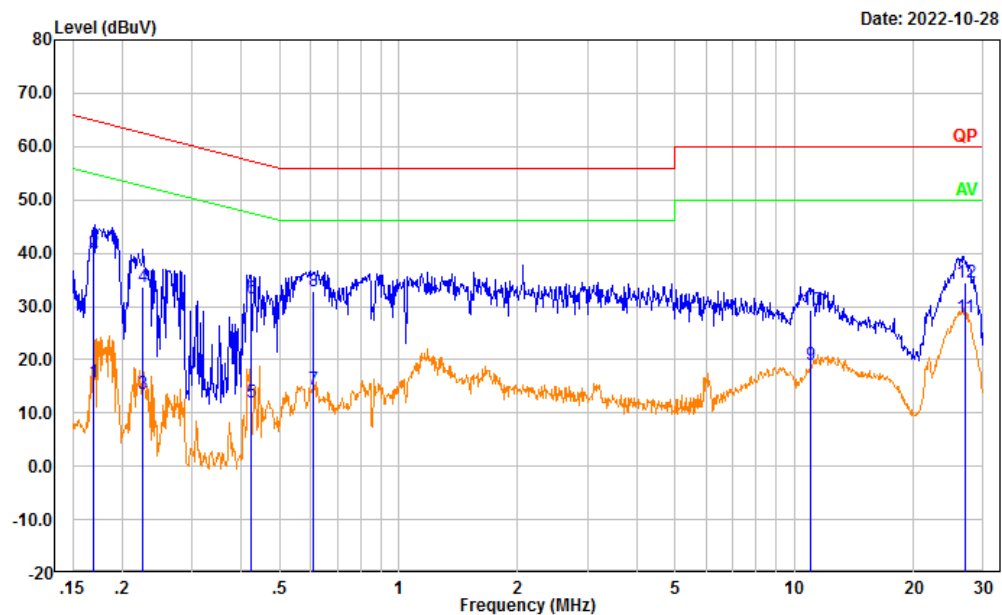

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.169	6.05	9.61	15.66	55.01	39.35	Average
2	0.169	30.50	9.61	40.11	65.01	24.90	QP
3	0.225	3.96	9.61	13.57	52.65	39.08	Average
4	0.225	24.09	9.61	33.70	62.65	28.95	QP
5	0.425	2.46	9.61	12.07	47.35	35.28	Average
6	0.425	21.99	9.61	31.60	57.35	25.75	QP
7	0.609	4.68	9.62	14.30	46.00	31.70	Average
8	0.609	23.13	9.62	32.75	56.00	23.25	QP
9	10.971	9.26	9.67	18.93	50.00	31.07	Average
10	10.971	19.55	9.67	29.22	60.00	30.78	QP
11	26.935	18.11	9.83	27.94	50.00	22.06	Average
12	26.935	24.56	9.83	34.39	60.00	25.61	QP

Test Mode: Transmitting
Port: neutral
Note:

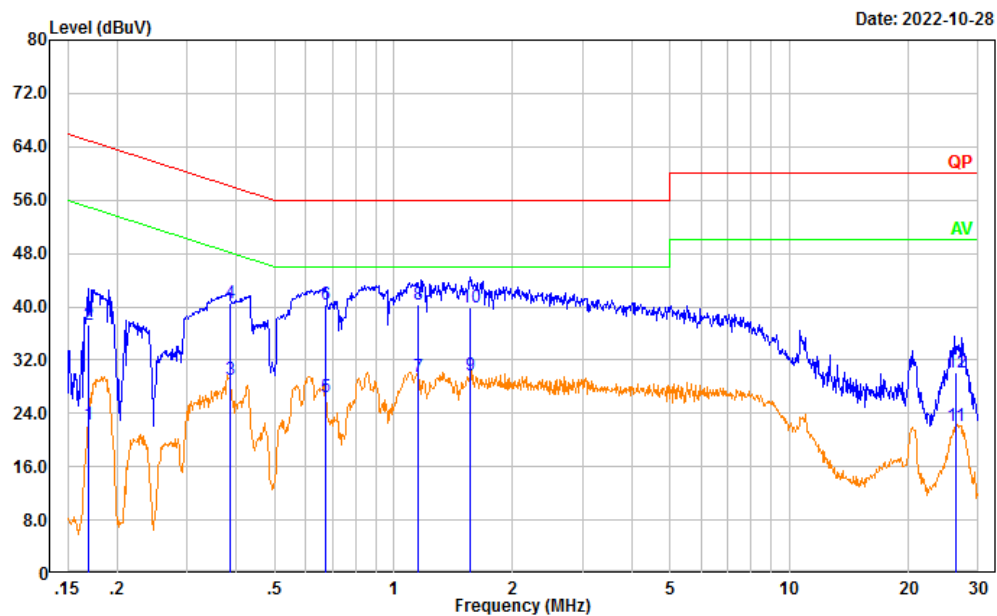

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.169	12.73	9.61	22.34	55.01	32.67	Average
2	0.169	27.78	9.61	37.39	65.01	27.62	QP
3	0.385	19.54	9.61	29.15	48.16	19.01	Average
4	0.385	30.91	9.61	40.52	58.16	17.64	QP
5	0.675	16.77	9.62	26.39	46.00	19.61	Average
6	0.675	30.71	9.62	40.33	56.00	15.67	QP
7	1.157	19.95	9.62	29.57	46.00	16.43	Average
8	1.157	30.79	9.62	40.41	56.00	15.59	QP
9	1.564	20.02	9.63	29.65	46.00	16.35	Average
10	1.564	30.24	9.63	39.87	56.00	16.13	QP
11	26.345	12.35	9.78	22.13	50.00	27.87	Average
12	26.345	20.29	9.78	30.07	60.00	29.93	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR221045858-RF-S1	Test Date:	2022/10/28~2022/11/3
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Mack Huang, Carl Xue	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1~26.4	Relative Humidity: (%)	52~57	ATM Pressure: (kPa)	100.5~100.9
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021/11/10	2022/11/09
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.


1) 30MHz-1GHz(Low channel was the worst)
USB-C Power Supply:

Test Mode: Transmitting
Polarization: horizontal
Note:

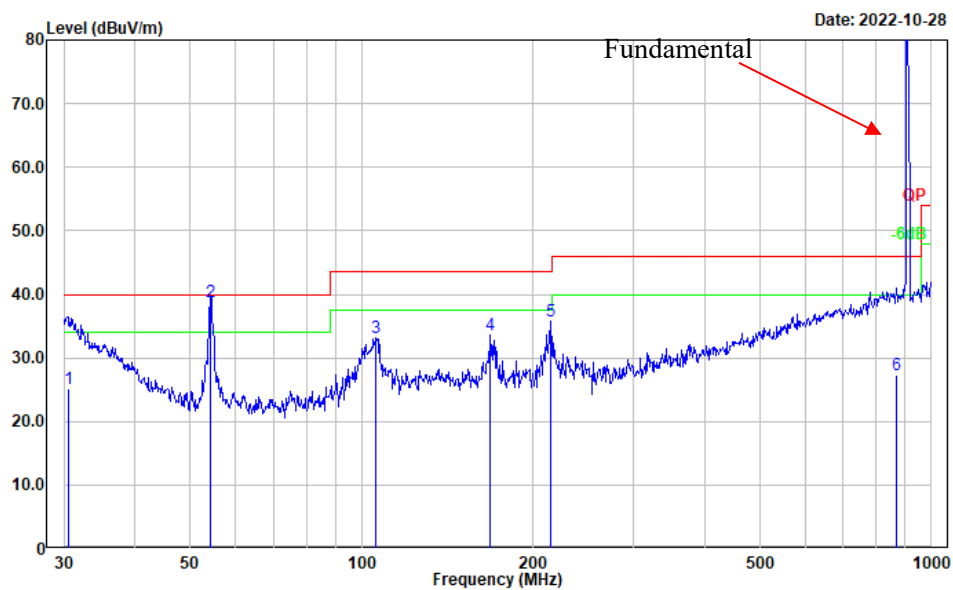

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	-2.24	27.47	25.23	40.00	14.77	QP
2	54.258	24.64	14.23	38.87	40.00	1.13	QP
3	105.642	14.98	18.25	33.23	43.50	10.27	Peak
4	168.414	15.01	18.62	33.63	43.50	9.87	Peak
5	214.514	17.07	18.78	35.85	43.50	7.65	Peak
6	866.088	-2.27	29.59	27.32	46.00	18.68	QP

Test Mode: Transmitting
Polarization: vertical
Note:

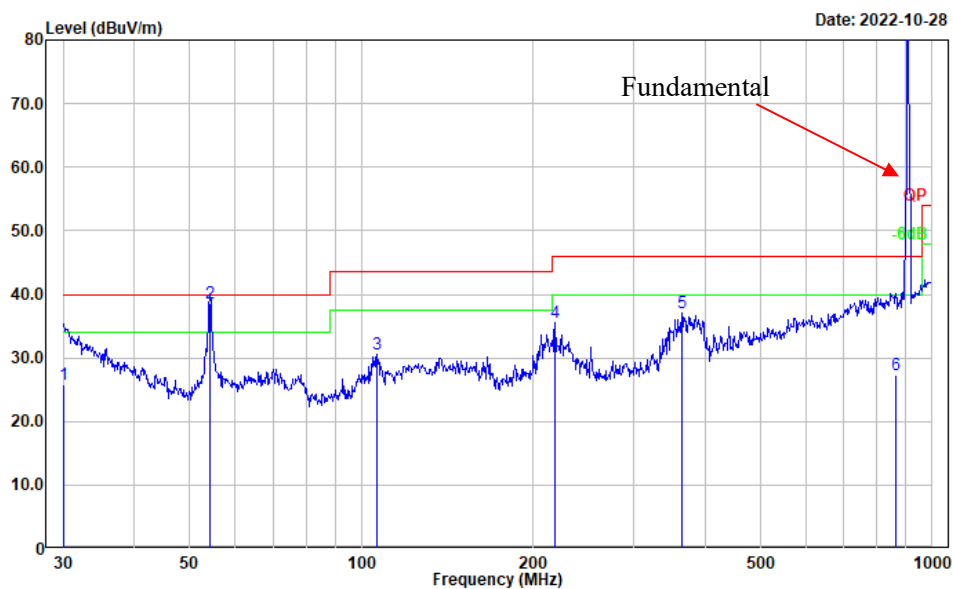


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	-1.99	27.80	25.81	40.00	14.19	QP
2	54.261	24.37	14.23	38.60	40.00	1.40	QP
3	106.385	12.10	18.41	30.51	43.50	12.99	Peak
4	218.309	16.77	18.68	35.45	46.00	10.55	Peak
5	364.260	15.43	21.69	37.12	46.00	8.88	Peak
6	863.056	-2.30	29.60	27.30	46.00	18.70	QP



2) Bandedge and 1-10GHz(USB-C Power Supply was the worst):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 902.6 MHz							
902.60	94.75	QP	H	29.47	124.22	N/A	N/A
902.60	92.36	QP	V	29.47	121.83	N/A	N/A
902.00	62.34	QP	H	29.46	91.80	104.22	12.42
1805.200	57.65	PK	H	1.31	58.96	74.00	15.04
1805.200	49.32	AV	H	1.31	50.63	54.00	3.37
1805.200	50.12	PK	V	1.31	51.43	74.00	22.57
1805.200	42.75	AV	V	1.31	44.06	54.00	9.94
2707.800	35.46	PK	H	4.75	40.21	74.00	33.79
2707.800	23.23	AV	H	4.75	27.98	54.00	26.02
2707.800	34.78	PK	V	4.75	39.53	74.00	34.47
2707.800	22.39	AV	V	4.75	27.14	54.00	26.86
8123.400	35.33	PK	H	16.13	51.46	74.00	22.54
8123.400	23.17	AV	H	16.13	39.30	54.00	14.70
8123.400	34.36	PK	V	16.13	50.49	74.00	23.51
8123.400	22.18	AV	V	16.13	38.31	54.00	15.69
9026.000	35.68	PK	H	17.68	53.36	74.00	20.64
9026.000	23.34	AV	H	17.68	41.02	54.00	12.98
9026.000	35.08	PK	V	17.68	52.76	74.00	21.24
9026.000	23.04	AV	V	17.68	40.72	54.00	13.28
Middle Channel: 915 MHz							
915.00	93.89	QP	H	29.62	123.51	N/A	N/A
915.00	91.48	QP	V	29.62	121.10	N/A	N/A
1830.000	49.66	PK	H	1.43	51.09	74.00	22.91
1830.000	37.33	AV	H	1.43	38.76	54.00	15.24
1830.000	45.36	PK	V	1.43	46.79	74.00	27.21
1830.000	33.18	AV	V	1.43	34.61	54.00	19.39
2745.000	37.85	PK	H	4.91	42.76	74.00	31.24
2745.000	25.43	AV	H	4.91	30.34	54.00	23.66
2745.000	36.21	PK	V	4.91	41.12	74.00	32.88
2745.000	24.11	AV	V	4.91	29.02	54.00	24.98
8235.000	36.12	PK	H	16.28	52.40	74.00	21.60
8235.000	24.06	AV	H	16.28	40.34	54.00	13.66
8235.000	35.47	PK	V	16.28	51.75	74.00	22.25
8235.000	23.24	AV	V	16.28	39.52	54.00	14.48
9150.000	36.47	PK	H	18.05	54.52	74.00	19.48
9150.000	24.24	AV	H	18.05	42.29	54.00	11.71
9150.000	35.33	PK	V	18.05	53.38	74.00	20.62
9150.000	23.17	AV	V	18.05	41.22	54.00	12.78

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
High Channel: 927.8 MHz							
927.80	94.23	QP	H	29.70	123.93	N/A	N/A
927.80	92.10	QP	V	29.70	121.80	N/A	N/A
928.00	71.09	QP	H	29.70	100.79	103.93	3.14
1855.600	54.68	PK	H	1.57	56.25	74.00	17.75
1855.600	46.89	AV	H	1.57	48.46	54.00	5.54
1855.600	51.47	PK	V	1.57	53.04	74.00	20.96
1855.600	43.11	AV	V	1.57	44.68	54.00	9.32
2783.400	37.86	PK	H	5.04	42.90	74.00	31.10
2783.400	25.43	AV	H	5.04	30.47	54.00	23.53
2783.400	35.19	PK	V	5.04	40.23	74.00	33.77
2783.400	23.10	AV	V	5.04	28.14	54.00	25.86
8350.200	36.66	PK	H	16.48	53.14	74.00	20.86
8350.200	24.33	AV	H	16.48	40.81	54.00	13.19
8350.200	35.28	PK	V	16.48	51.76	74.00	22.24
8350.200	23.14	AV	V	16.48	39.62	54.00	14.38
9278.000	35.78	PK	H	18.27	54.05	74.00	19.95
9278.000	23.39	AV	H	18.27	41.66	54.00	12.34
9278.000	35.06	PK	V	18.27	53.33	74.00	20.67
9278.000	23.03	AV	V	18.27	41.30	54.00	12.70

Worst Test plots(Low channel)

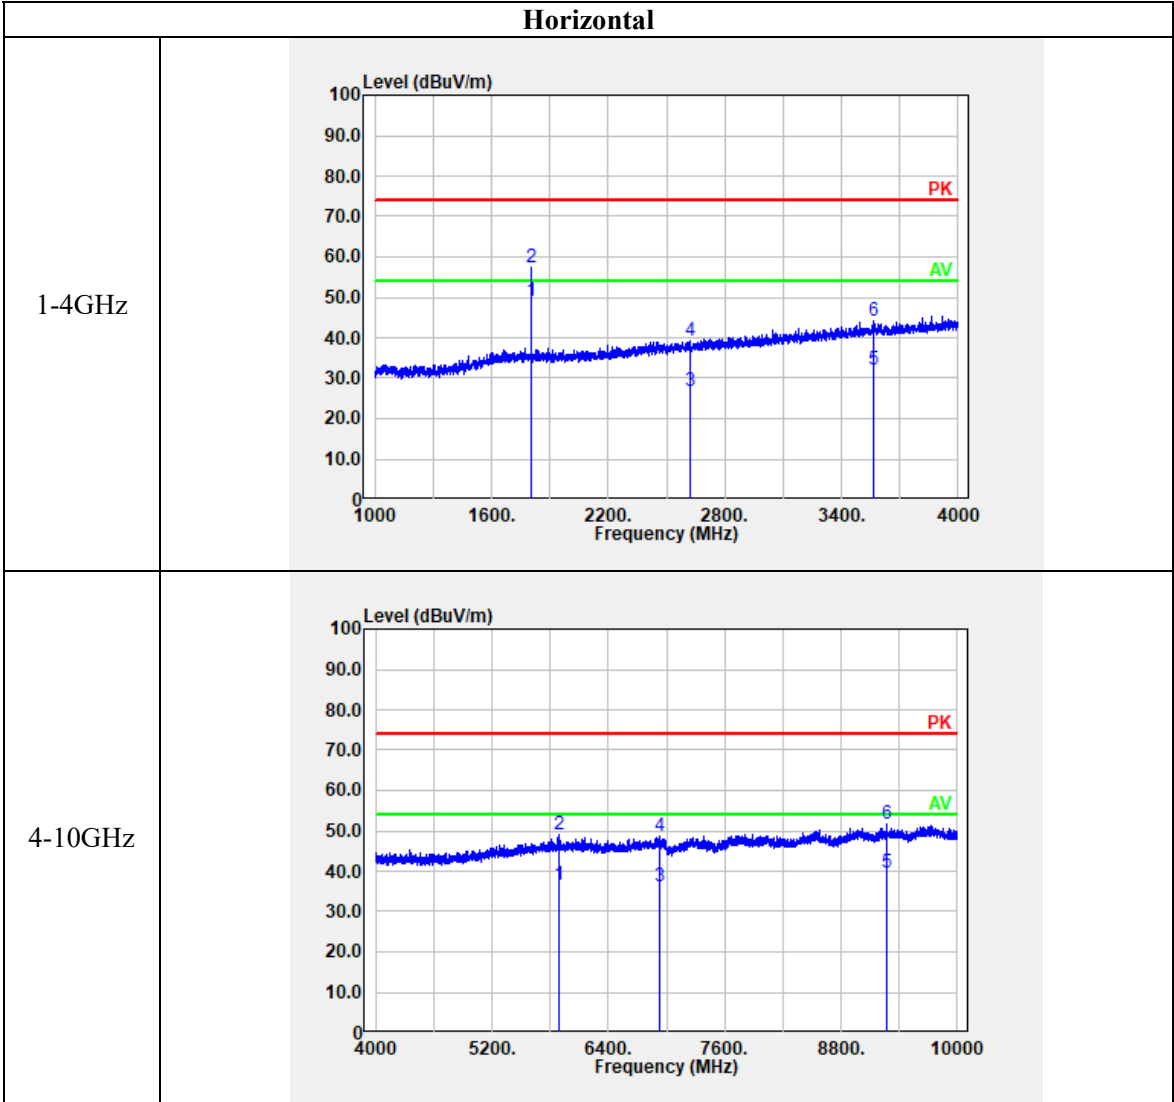

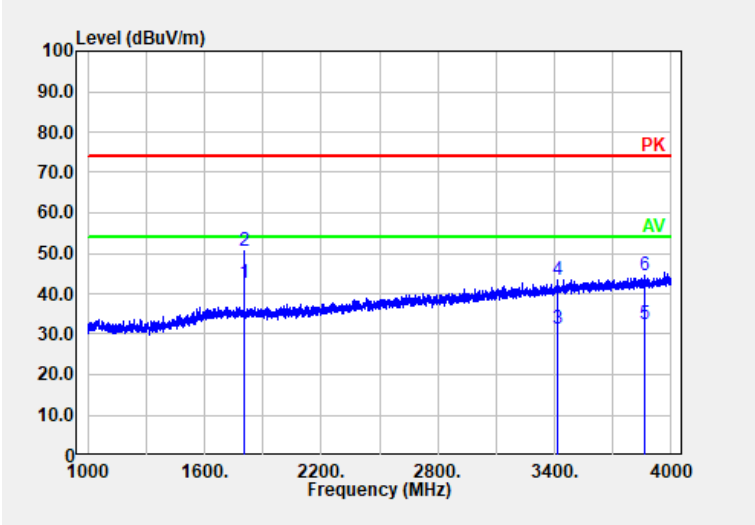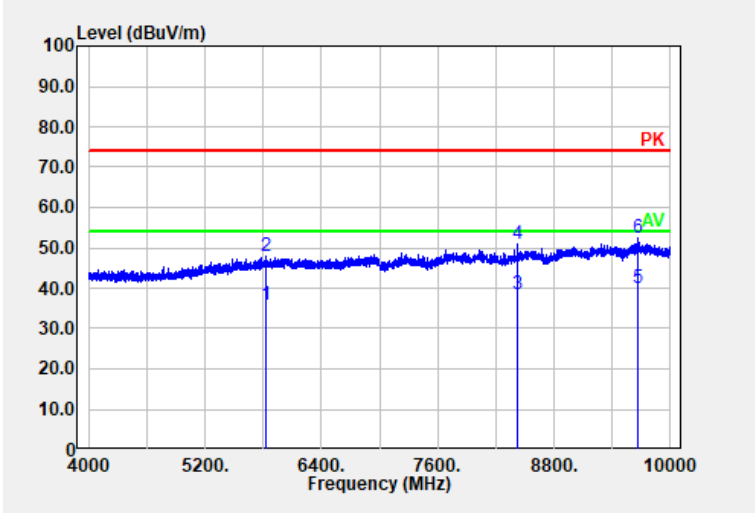Vertical	
1-4GHz	
4-10GHz	

4.3 20 dB Emission Bandwidth:

Serial Number:	CR221045858-RF-S1	Test Date:	2022/11/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	61	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/04/05	2023/04/04
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)
Lowest	902.6	0.136	<0.25
Middle	915	0.136	<0.25
Highest	927.8	0.138	<0.25


20 dB Bandwidth

Lowest Channel

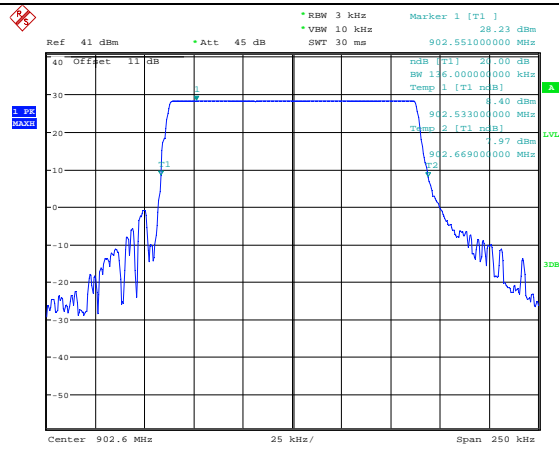


Date: 8.NOV.2022 10:15:23

Middle Channel

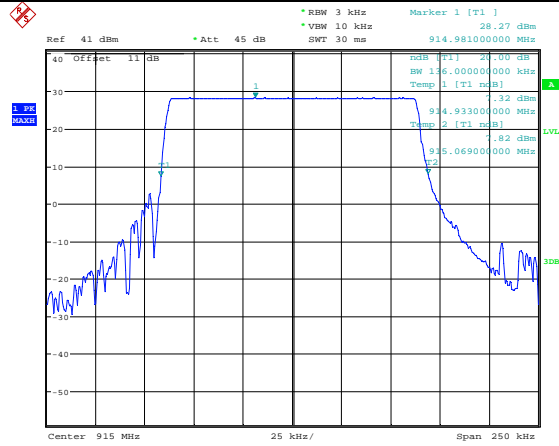

Date: 8.NOV.2022 10:30:26

Highest Channel

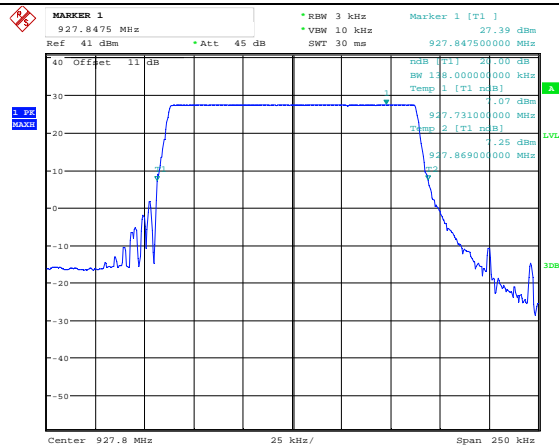

Date: 8.NOV.2022 10:35:17

4.4 Channel Separation:

Serial Number:	CR221045858-RF-S1	Test Date:	2022/11/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	61	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/04/05	2023/04/04
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
Lowest	902.6	0.399	0.136
Middle	915	0.400	0.136
Highest	927.8	0.402	0.138


Channel Separation

Lowest Channel

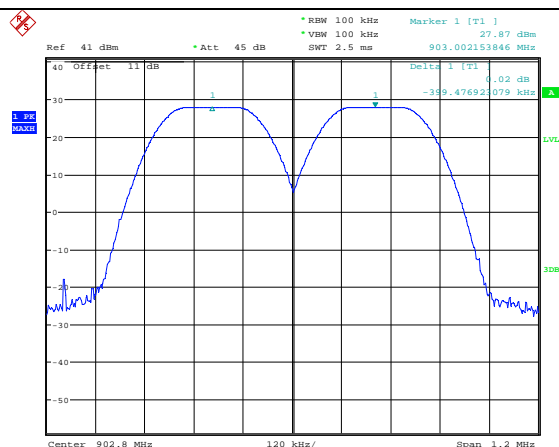


Date: 8.NOV.2022 10:55:10

Middle Channel

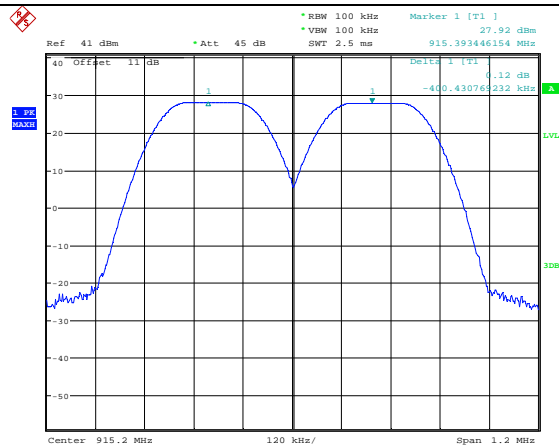

Date: 8.NOV.2022 10:53:25

Highest Channel

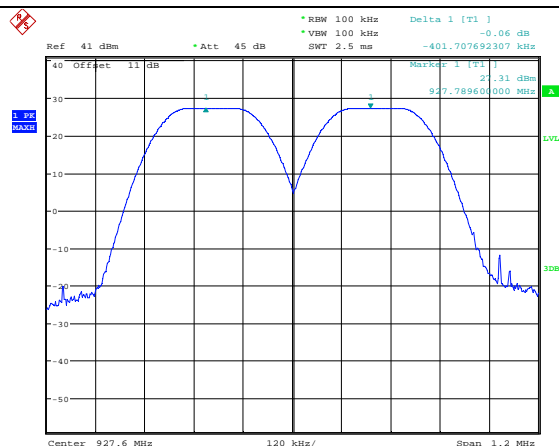

Date: 8.NOV.2022 10:51:11

4.5 Number Of Hopping Frequency:

Serial Number:	CR221045858-RF-S1	Test Date:	2022/11/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	46	ATM Pressure: (kPa)	100.9
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/04/05	2023/04/04
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Frequency Range (MHz)	Number of Hopping Channel	Limits
902-928	63	≥ 50

Number Of Hopping Frequency

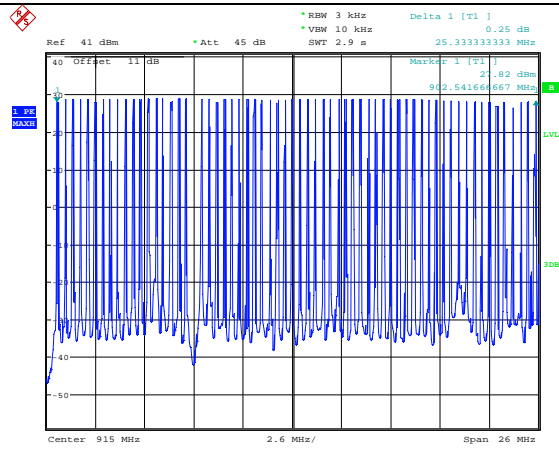902-928
MHz

Date: 8.NOV.2022 14:46:01

4.6 Time Of Occupancy(Dwell Time):

Serial Number:	CR221045858-RF-S1	Test Date:	2022/11/8~2022/11/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2~25.8	Relative Humidity: (%)	61~63	ATM Pressure: (kPa)	101~101.2
----------------------	-----------	------------------------------	-------	------------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/04/05	2023/04/04
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Frequency (MHz)	Pulse width (ms)	Observation time (s)	Hopping Numbers in Observation time	Dwell Time (s)	Limit (s)
915	291.474	20	1	0.291	0.400

Note: Observation time= 20s

Pulse width



Date: 25.NOV.2022 13:22:03

4.7 Peak Conducted Output Power:

Serial Number:	CR221045858-RF-S1	Test Date:	2022/11/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	61	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/04/05	2023/04/04
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Channel	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
Lowest	902.6	28.58	30
Middle	915	28.29	30
Highest	927.8	28.29	30

4.8 100 kHz Bandwidth of Frequency Band Edge:

Serial Number:	CR221045858-RF-S1	Test Date:	2022/11/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass


Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	61	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/04/05	2023/04/04
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

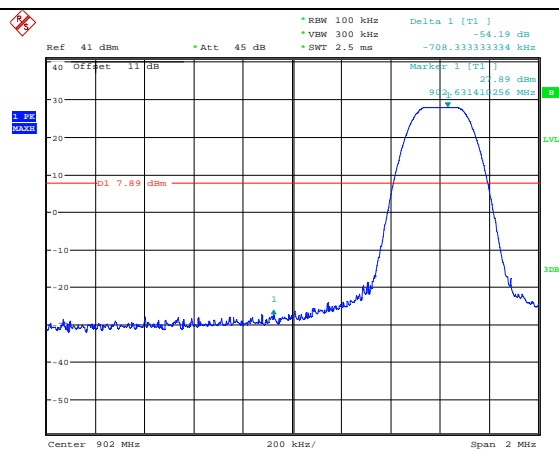100 kHz Bandwidth of Frequency Band Edge-Single Mode**Band Edge,
Left Side**


Date: 8.NOV.2022 10:21:33

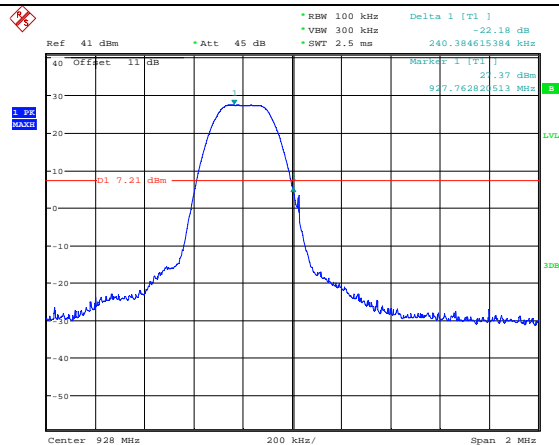**Band Edge,
Right Side**

Date: 8.NOV.2022 10:36:45

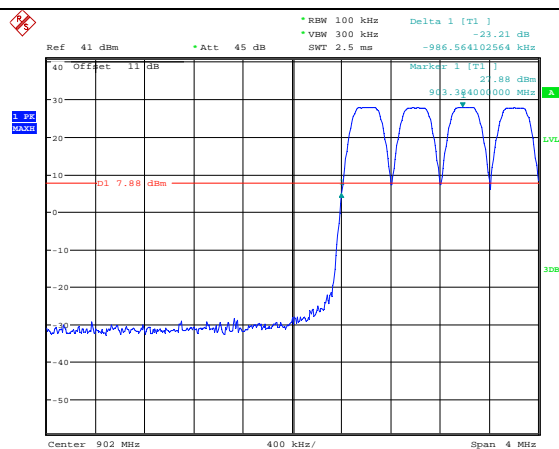100 kHz Bandwidth of Frequency Band Edge-Hopping Mode**Band Edge,
Left Side**

Date: 8.NOV.2022 12:33:54

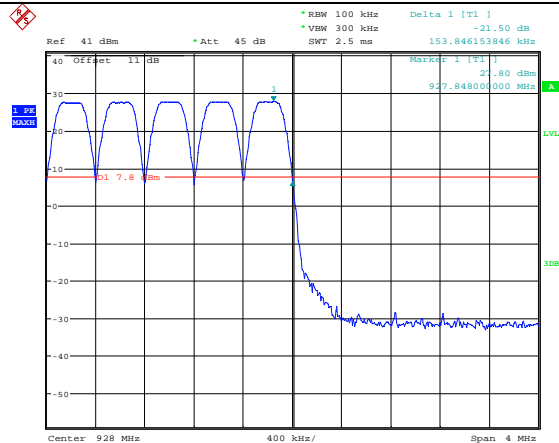**Band Edge,
Right Side**

Date: 8.NOV.2022 12:38:20

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

FCC §15.247 (i) & §15.407 (f) & §1.1307

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

5.2 Procedure

According to §1.1307(b)(3)(ii)(B)

Simultaneous Transmission with both SAR-based and MPE-Based Test Exemptions

This case is described in detail in § 1.1307(b)(3)(ii)(B) and covers the situations where both SAR-based and MPE-based exemption may be considered for test exemption in fixed, mobile, or portable device exposure conditions. For these cases, a device with multiple RF sources transmitting simultaneously will be considered an RF exempt device if the condition of Formula (1) is satisfied.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure\ Limit_k} \leq 1 \quad (1)$$

Where:

a = number of fixed, mobile, or portable RF sources claiming exemption using [paragraph \(b\)\(3\)\(i\)\(B\)](#) of this section for P_{th} , including existing exempt transmitters and those being added.

b = number of fixed, mobile, or portable RF sources claiming exemption using [paragraph \(b\)\(3\)\(i\)\(C\)](#) of this section for Threshold ERP, including existing exempt transmitters and those being added.

c = number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance including existing evaluated transmitters.

P_i = the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source i at a distance between 0.5 cm and 40 cm (inclusive).

$P_{th,i}$ = the exemption threshold power (P_{th}) according to [paragraph \(b\)\(3\)\(i\)\(B\)](#) of this section for fixed, mobile, or portable RF source i .

ERP_j = the ERP of fixed, mobile, or portable RF source j .

$ERP_{th,j}$ = exemption threshold ERP for fixed, mobile, or portable RF source j , at a distance of at least $\lambda/2\pi$ according to the applicable formula of [paragraph \(b\)\(3\)\(i\)\(C\)](#) of this section.

$Evaluated_k$ = the maximum reported SAR or MPE of fixed, mobile, or portable RF source k either in the device or at the transmitter site from an existing evaluation at the location of exposure.

$Exposure\ Limit_k$ = either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable RF source k , as applicable from [§ 1.1310 of this chapter](#).

5.3 Measurement Result

Radio	Frequency (MHz)	Distance (mm)	P _{th} (mW)	Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	The Greater of Conducted Power or ERP	
						dBm	mW
WiFi	2412-2462	200	3060	17	2.00	17	50.12
BLE	2402-2480	200	3060	4	2.00	4	2.51
SRD	902.6-927.8	200	1841	29	2.98	29.83	961.61

Note:

The WiFi or BLE and SRD can transmit simultaneously.

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k}$$

$$= P_{WiFi} / P_{th} + P_{SRD} / P_{th}$$

$$= 50.12/3060 + 961.61/1841$$

$$= 0.539$$

$$< 1.0$$

Result: The device compliant the SAR-Based Exemption at 20cm distances.

===== END OF REPORT =====