



FCC 47 CFR PART 15 SUBPART C

for

Digital Projector

**Model: GS1, GS1+, GS541, GS3041, G310, G310T, G310JD,
G310P, G310E, G310H, G310F, G310N, G310J, GS1T, GS1JD,
GS1AM, GS1A, TS1, TS541, S3041**

Brand: BenQ

Test Report Number:

C160622Z04-RP1-3

Issued for

BENQ Corporation

16 Jihu Road, Neihu, Taipei 114, Taiwan

Issued by:

Compliance Certification Services (Shenzhen) Inc.

No.10-1, Mingkeda Logistics Park, No.18 Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: August 11, 2016



TESTING CERT #2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Data	Revisions	Effect Page	Revised By
00	August 11, 2016	Initial Issue	ALL	Sabrina Wang



TABLE OF CONTENTS

1	TEST CERTIFICATION	4
2	TEST RESULT SUMMARY	5
3	EUT DESCRIPTION	6
4	TEST METHODOLOGY	7
4.1.	DESCRIPTION OF TEST MODES	7
5	SETUP OF EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF SUPPORT UNITS	8
5.2.	CONFIGURATION OF SYSTEM UNDER TEST	8
6	FACILITIES AND ACCREDITATIONS	9
6.1.	FACILITIES	9
6.2.	ACCREDITATIONS	9
6.3.	MEASUREMENT UNCERTAINTY	9
7	FCC PART 15.247 REQUIREMENTS	10
7.1.	POWER LINE CONDUCTED EMISSIONS MEASUREMENT	10
7.2.	SPURIOUS EMISSIONS MEASUREMENT	17
7.3.	6dB BANDWIDTH MEASUREMENT	31
7.4.	ANTENNA GAIN	34
7.5.	PEAK OUTPUT POWER	35
7.6.	BAND EDGES MEASUREMENT	38
7.7.	PEAK POWER SPECTRAL DENSITY MEASUREMENT	40



1 TEST CERTIFICATION

Product	Digital Projector
Model	GS1, GS1+, GS541, GS3041, G310, G310T, G310JD, G310P, G310E, G310H, G310F, G310N, G310J, GS1T, GS1JD, GS1AM, GS1A, TS1, TS541, S3041
Brand	BenQ
Tested	June 22~ August 11, 2016
Applicant	BENQ Corporation 16 Jihu Road, Neihu, Taipei 114, Taiwan
Manufacturer	BENQ Corporation 16 Jihu Road, Neihu, Taipei 114, Taiwan

APPLICABLE STANDARDS

Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen)
Inc.

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen)
Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	Digital Projector
Model	GS1, GS1+, GS541, GS3041, G310, G310T, G310JD, G310P, G310E, G310H, G310F, G310N, G310J, GS1T, GS1JD, GS1AM, GS1A, TS1, TS541, S3041
Brand	BenQ
Model Discrepancy	All models are identical with each other except for model designation and trading purpose.
Identify Number	C160622Z04-RP1-3
Received Date	June 22, 2016
Power Supply	DC19V supply by the adapter or DC7.4V supply by the battery
Adapter Manufacturer / Model No.	JQH / NSA60ED-190300 Input: 100-240V ~ 50/60Hz 1.5A Output: DC19V 3A Max. AC Input Cable: Unshielded 1.50m DC Output Cable: Unshielded 1.50m
Battery Spec.	BP11 DC7.4V 59.2Wh 8000mAh
Frequency Range	2402MHz ~2480MHz
Transmit Power	-4.08dBm
Modulation Technique	GFSK for 1Mbps
Number of Channels	40 Channels
Antenna Specification	Embedded Antenna with 1.8dBi gain (Max)
Temperature Range	0°C ~ +40°C

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: JVPGS1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

	Hardware Version	Software Version
Product	9344C,V5.0	v0.0.0.18_ww
Radio	JEDI.L0.MP1.mt76x2u.wifi.v2.1	zk-7662M v1.40
Test	N/A	LZ-RF / CCS-SZ-3A2
RF power setting in TEST	N/A	MT7662_BT_v0.0.2.0



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charge with adapter (120V/60Hz)	<input checked="" type="checkbox"/>
	Mode 2: Charge with adapter (240V/50Hz)	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	E335	R9-WN1EF	DoC	Thinkpad	Unshielded 1.50m	Shielded 1.60m (AC Cable) Unshielded 1.80m (DC Cable)

Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No. 10-1, Mingkeda Logistics Park, No.18 Huanguan South RD. Guan Lan Town, Baoan District, Shenzhen China**

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815, R-4320, T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccscsz.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/21/2016	02/20/2017
LISN	EMCO	3825/2	8901-1459	02/21/2016	02/20/2017
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.




7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



7.1.4. TEST SETUP

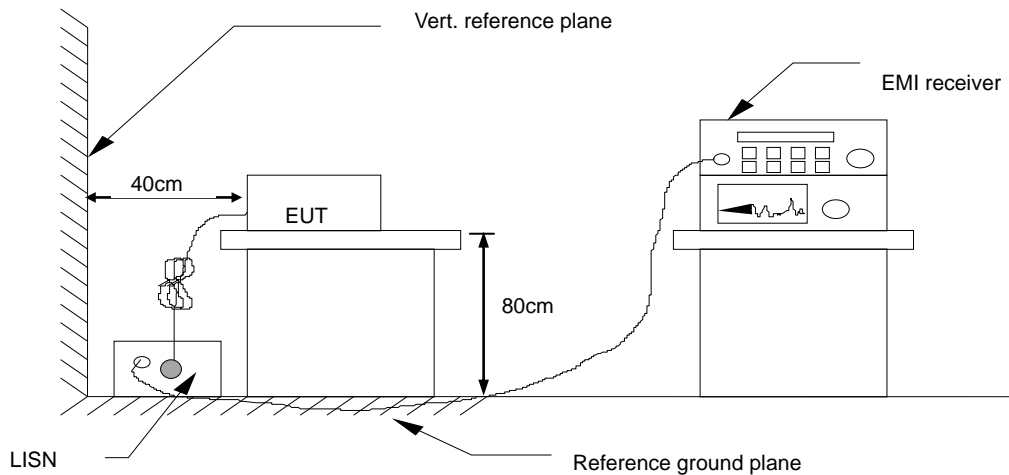

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	34.99	19.33	10.15	45.14	29.48	65.99	56.00	-20.85	-26.52	Pass


Factor = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Reading/ Average Reading + Factor
Limit = Limit stated in standard
Margin = Result (dBuV) – Limit (dBuV)



7.1.6. TEST RESULTS

Test Data

Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eve Wang	Line	L1
Test Date	August 10, 2016		

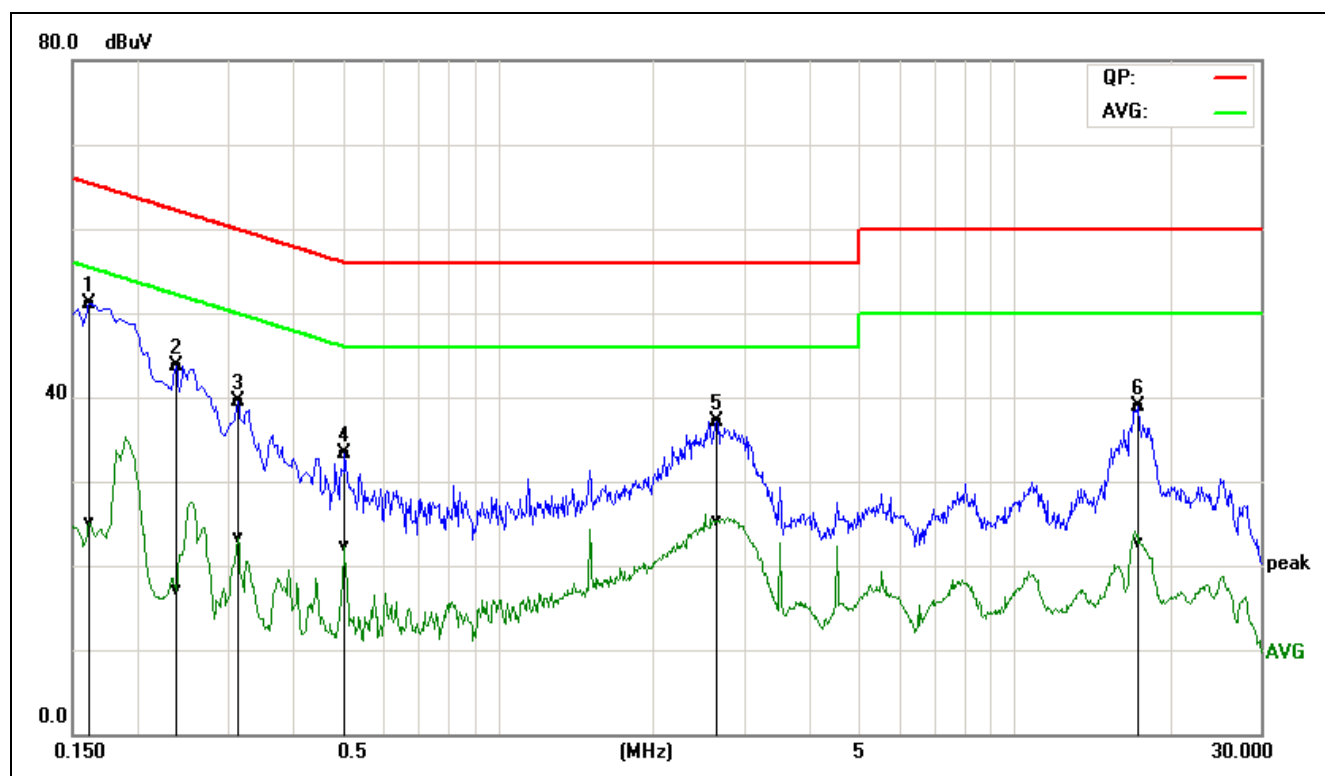


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1620	41.63	15.59	9.54	51.17	25.13	65.36	55.36	-14.19	-30.23	Pass	L1
0.2380	34.08	7.52	9.64	43.72	17.16	62.16	52.17	-18.44	-35.01	Pass	L1
0.3140	29.82	13.57	9.64	39.46	23.21	59.86	49.86	-20.40	-26.65	Pass	L1
0.5060	23.71	12.65	9.63	33.34	22.28	56.00	46.00	-22.66	-23.72	Pass	L1
2.6500	27.32	15.57	9.70	37.02	25.27	56.00	46.00	-18.98	-20.73	Pass	L1
17.4300	29.04	12.88	9.91	38.95	22.79	60.00	50.00	-21.05	-27.21	Pass	L1

REMARKS: L1 = Line One (Live Line)



Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 1
Tested by	Eve Wang	Line	L2
Test Date	August 10, 2016		

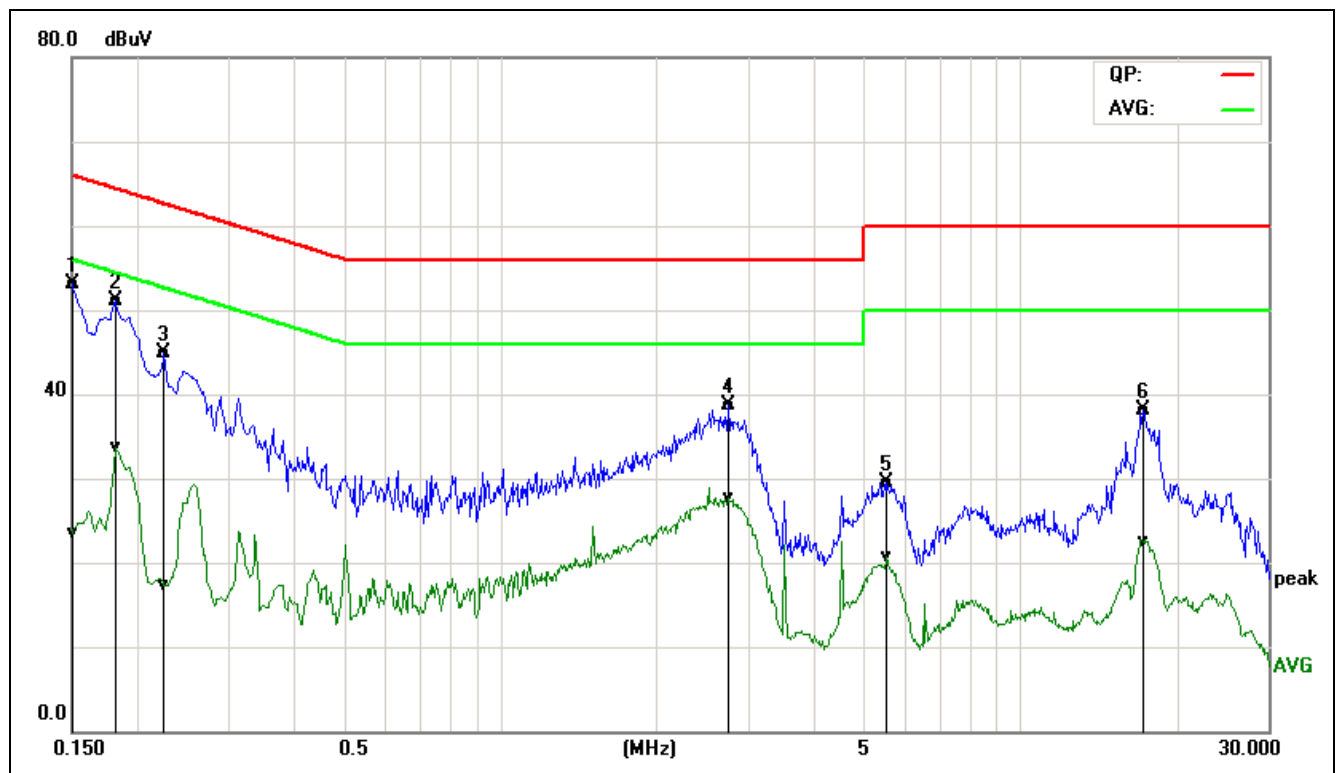


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1500	43.37	13.82	9.72	53.09	23.54	65.99	56.00	-12.90	-32.46	Pass	L2
0.1819	41.42	24.04	9.73	51.15	33.77	64.39	54.40	-13.24	-20.63	Pass	L2
0.2260	35.21	7.62	9.73	44.94	17.35	62.59	52.60	-17.65	-35.25	Pass	L2
2.7620	28.90	17.93	9.72	38.62	27.65	56.00	46.00	-17.38	-18.35	Pass	L2
5.5380	19.81	11.05	9.73	29.54	20.78	60.00	50.00	-30.46	-29.22	Pass	L2
17.2300	28.43	12.75	9.76	38.19	22.51	60.00	50.00	-21.81	-27.49	Pass	L2

REMARKS: L2 = Line Two (Neutral Line)



Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Eve Wang	Line	L1
Test Date	August 10, 2016		

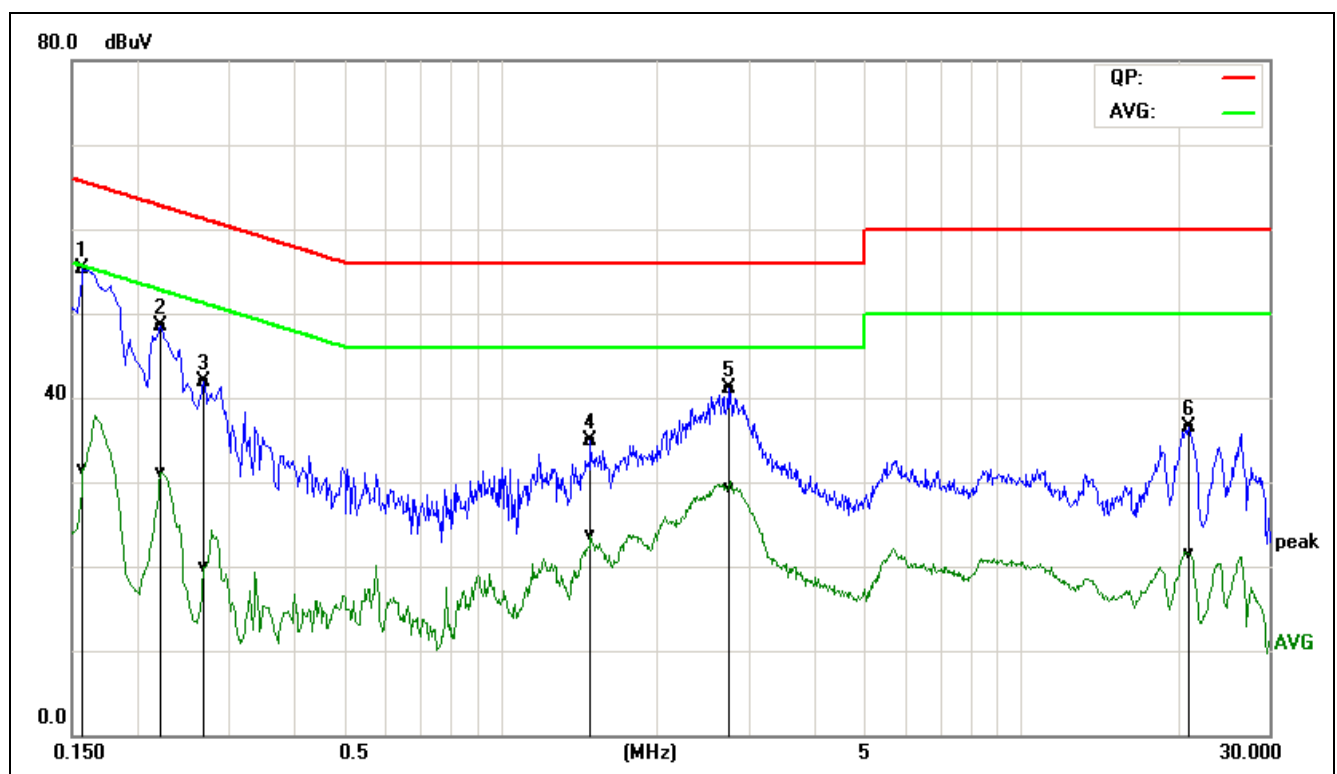


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1580	45.44	21.70	9.78	55.22	31.48	65.56	55.57	-10.34	-24.09	Pass	L1
0.2220	38.74	21.31	9.78	48.52	31.09	62.74	52.74	-14.22	-21.65	Pass	L1
0.2700	32.12	10.19	9.77	41.89	19.96	61.12	51.12	-19.23	-31.16	Pass	L1
1.4900	25.15	13.90	9.77	34.92	23.67	56.00	46.00	-21.08	-22.33	Pass	L1
2.7380	31.42	19.59	9.74	41.16	29.33	56.00	46.00	-14.84	-16.67	Pass	L1
21.0220	26.82	11.76	9.74	36.56	21.50	60.00	50.00	-23.44	-28.50	Pass	L1

REMARKS: L1 = Line One (Live Line)



Model No.	GS1	RBW,VBW	9 kHz
Environmental Conditions	22°C, 45% RH	Test Mode	Mode 2
Tested by	Eve Wang	Line	L2
Test Date	August 10, 2016		

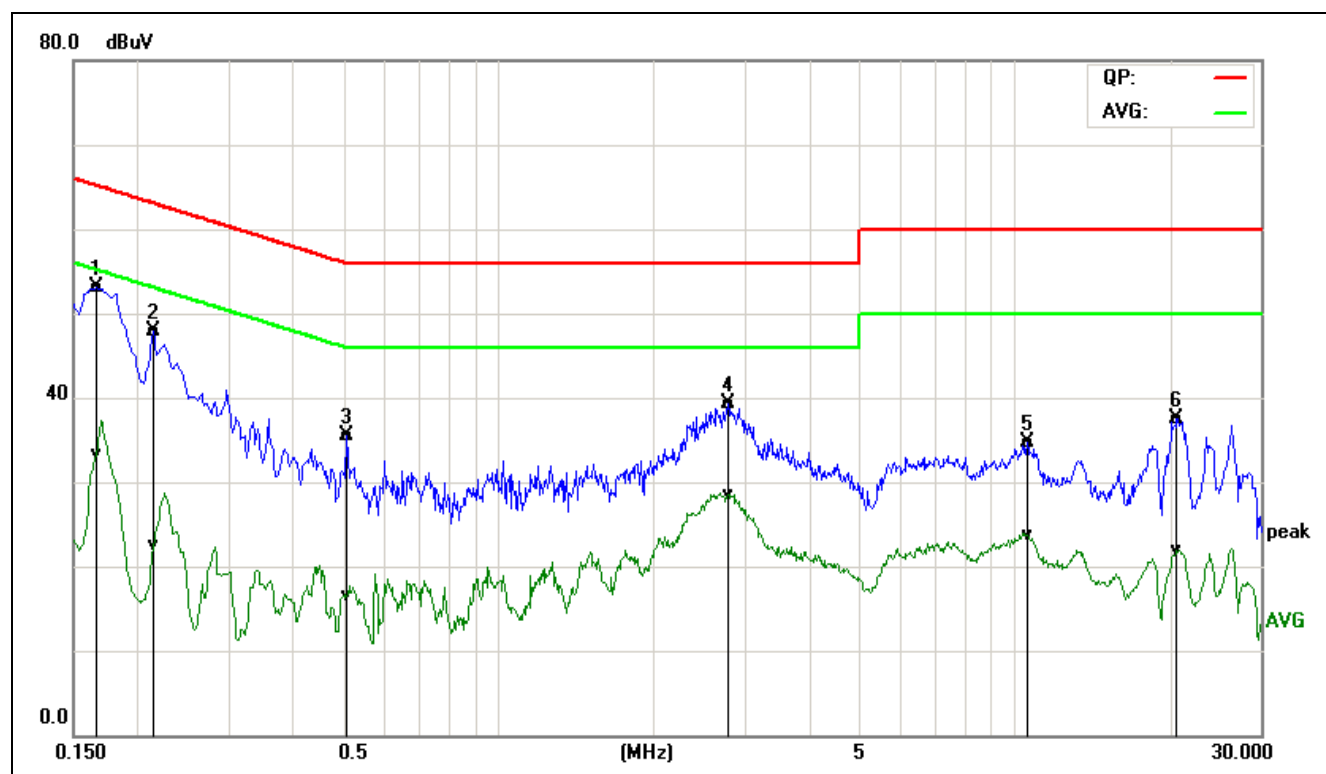

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)	Line (L1/L2)
0.1660	43.23	23.55	9.78	53.01	33.33	65.15	55.16	-12.14	-21.83	Pass	L2
0.2140	38.14	12.70	9.79	47.93	22.49	63.04	53.05	-15.11	-30.56	Pass	L2
0.5100	25.78	6.92	9.68	35.46	16.60	56.00	46.00	-20.54	-29.40	Pass	L2
2.7940	29.62	18.73	9.74	39.36	28.47	56.00	46.00	-16.64	-17.53	Pass	L2
10.5780	24.83	13.79	9.85	34.68	23.64	60.00	50.00	-25.32	-26.36	Pass	L2
20.6700	27.70	12.08	9.74	37.44	21.82	60.00	50.00	-22.56	-28.18	Pass	L2

REMARKS: L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

7.2.3. TEST PROCEDURE (please refer to measurement standard)


Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 10MHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz , it is only recorded 10MHz to 26GHz.




7.2.4. TEST RESULTS

Test Plot

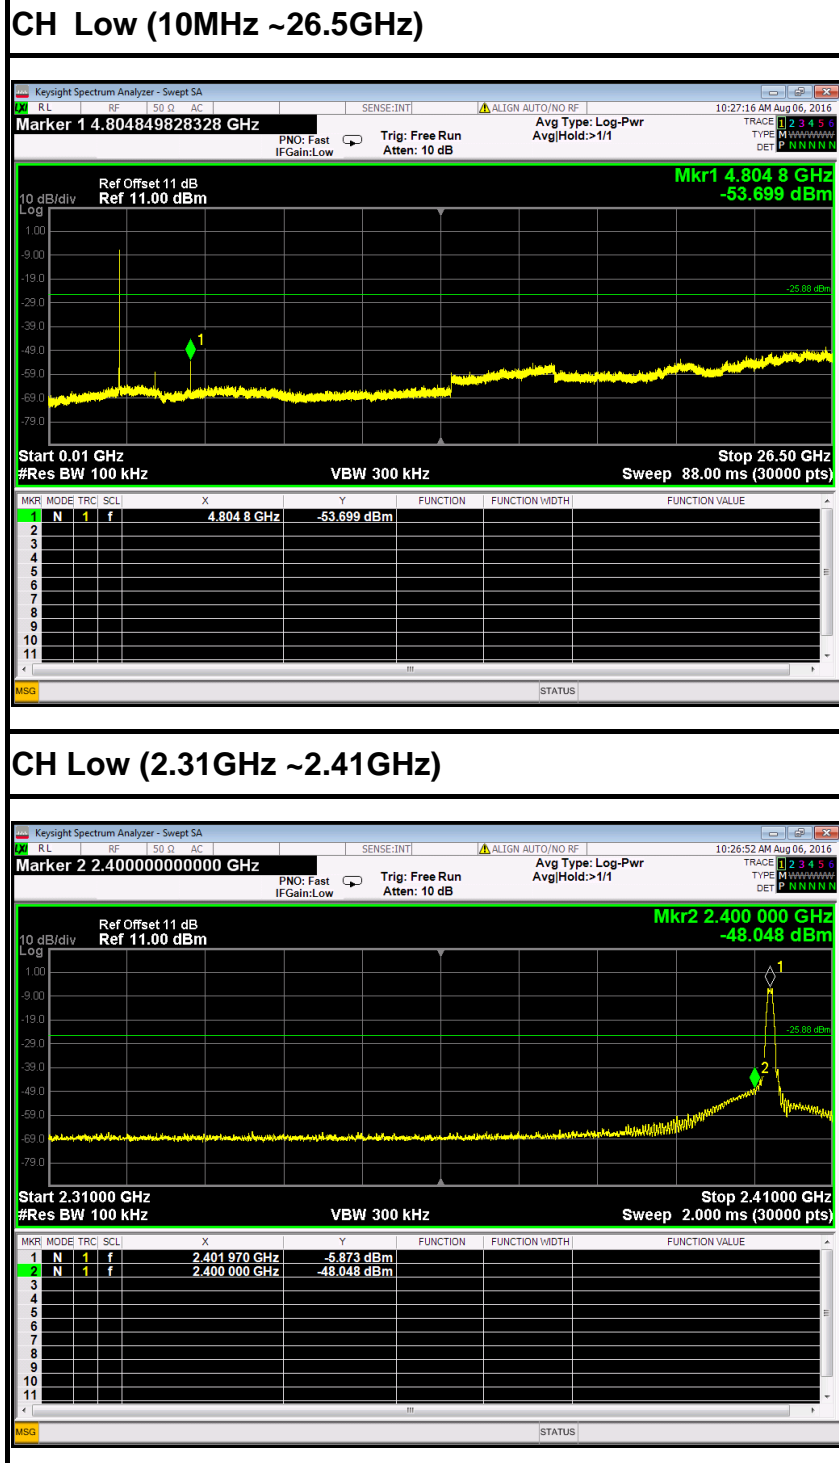




CH Mid (10MHz ~26.5GHz)

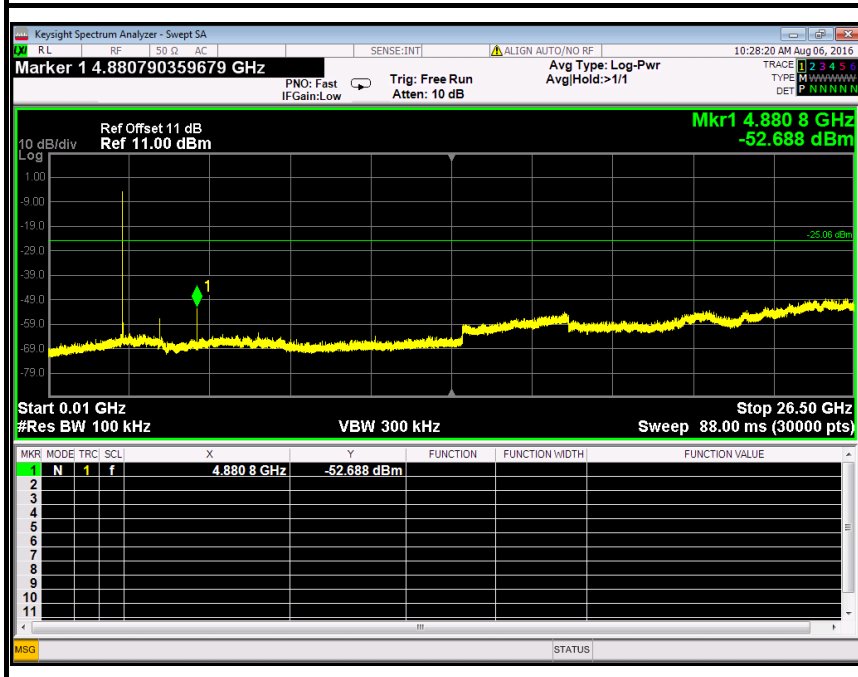




CH High (10MHz ~26.5GHz)

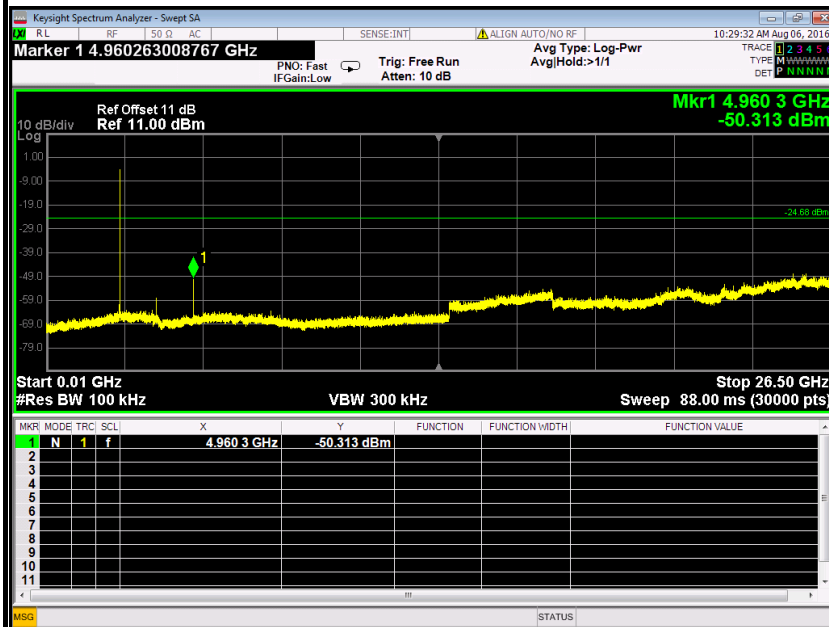

CH High(2.475GHz ~2.5GHz)

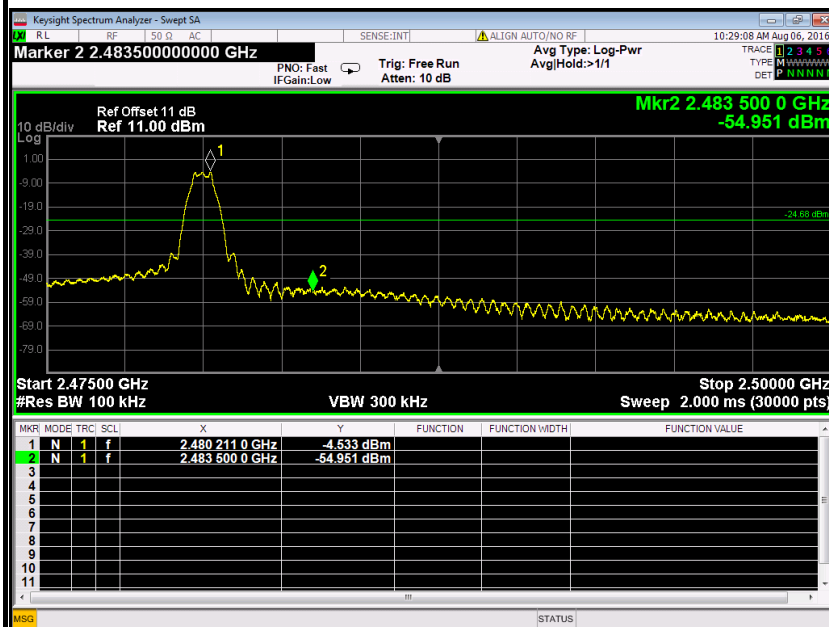

**7.2.4.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT**

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

**7.2.4.2. TEST INSTRUMENTS**

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2015	09/24/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.



7.2.4.3. TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=2.7kHz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.


7.2.4.4. TEST SETUP

Below 30MHz

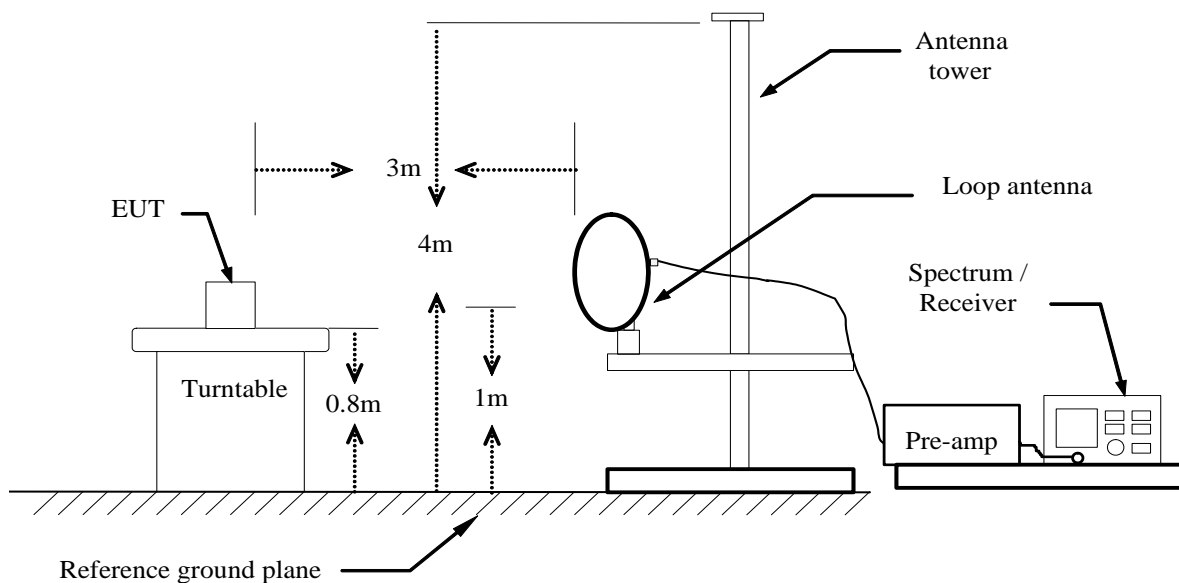




Below 1 GHz

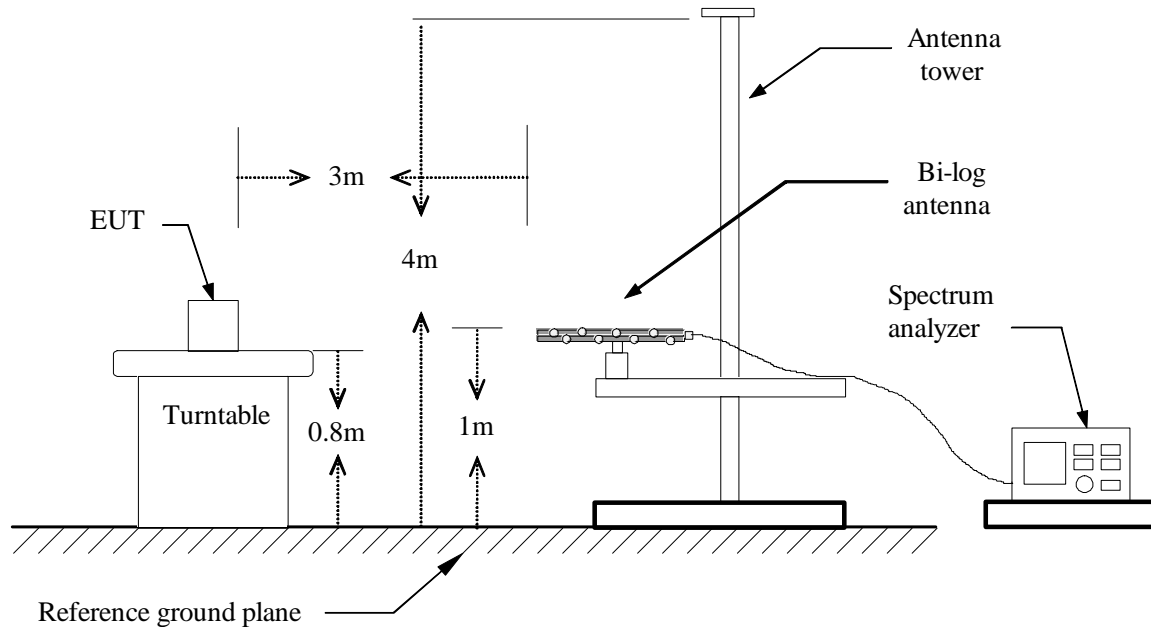

Above 1 GHz

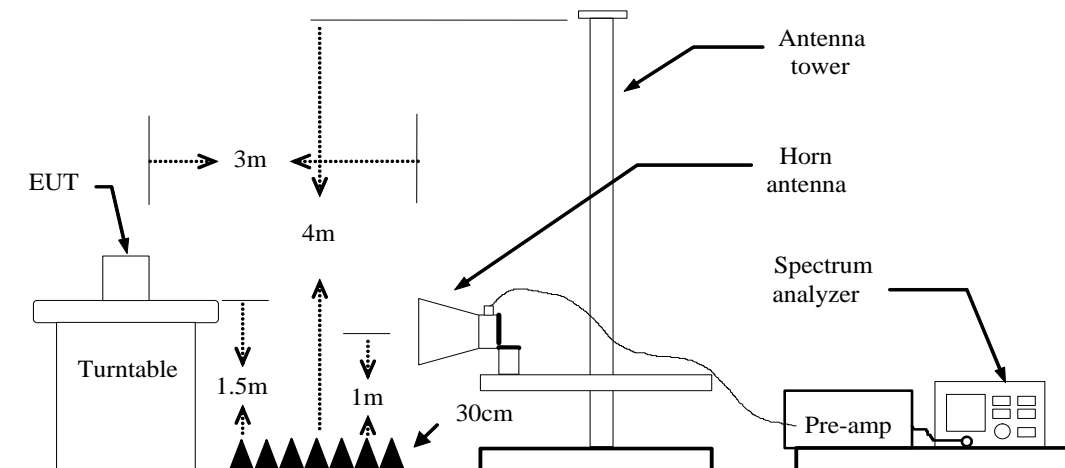

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.2.4.5. DATA SAMPLE****Below 1GHz**

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	53.41	-18.63	34.78	43.50	-8.72	V	QP

Frequency (MHz)

= Emission frequency in MHz

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correct Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Corr. Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Result (dBuV/m) – Limit (dBuV/m)

Q.P.

= Quasi-peak Reading

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz)

= Emission frequency in MHz

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Corr. Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Result (dBuV/m) – Limit (dBuV/m)

Peak

= Peak Reading

AVG

= Average Reading

Calculation Formula

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)

Result (dBuV/m) = Reading (dBuV) + Correction Factor

**7.2.4.6. TEST RESULTS****Below 1 GHz****Test Mode:** TX**Tested by:** Eve Wang**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** August 5, 2016


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
63.5356	49.13	-13.78	35.35	40.00	-4.65	V	QP
119.8556	44.67	-13.01	31.66	43.50	-11.84	V	QP
148.4410	49.45	-11.88	37.57	43.50	-5.93	V	QP
187.0958	48.34	-13.19	35.15	43.50	-8.35	V	QP
346.8092	41.24	-9.44	31.80	46.00	-14.20	V	QP
701.7610	40.02	-4.73	35.29	46.00	-10.71	V	QP
48.5016	39.94	-12.13	27.81	40.00	-12.19	H	QP
63.5356	39.64	-13.78	25.86	40.00	-14.14	H	QP
148.4410	43.55	-11.88	31.67	43.50	-11.83	H	QP
190.4050	42.58	-12.93	29.65	43.50	-13.85	H	QP
333.6865	43.57	-9.67	33.90	46.00	-12.10	H	QP
400.4318	46.77	-8.59	38.18	46.00	-7.82	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.**Notes:**


1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz). = Emission frequency in MHz
 Reading (dBuV/m) = Receiver reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Measured (dBuV/m) – Limits (dBuV/m)
 Antenna Pol e(H/V) = Current carrying line of reading



Vertical

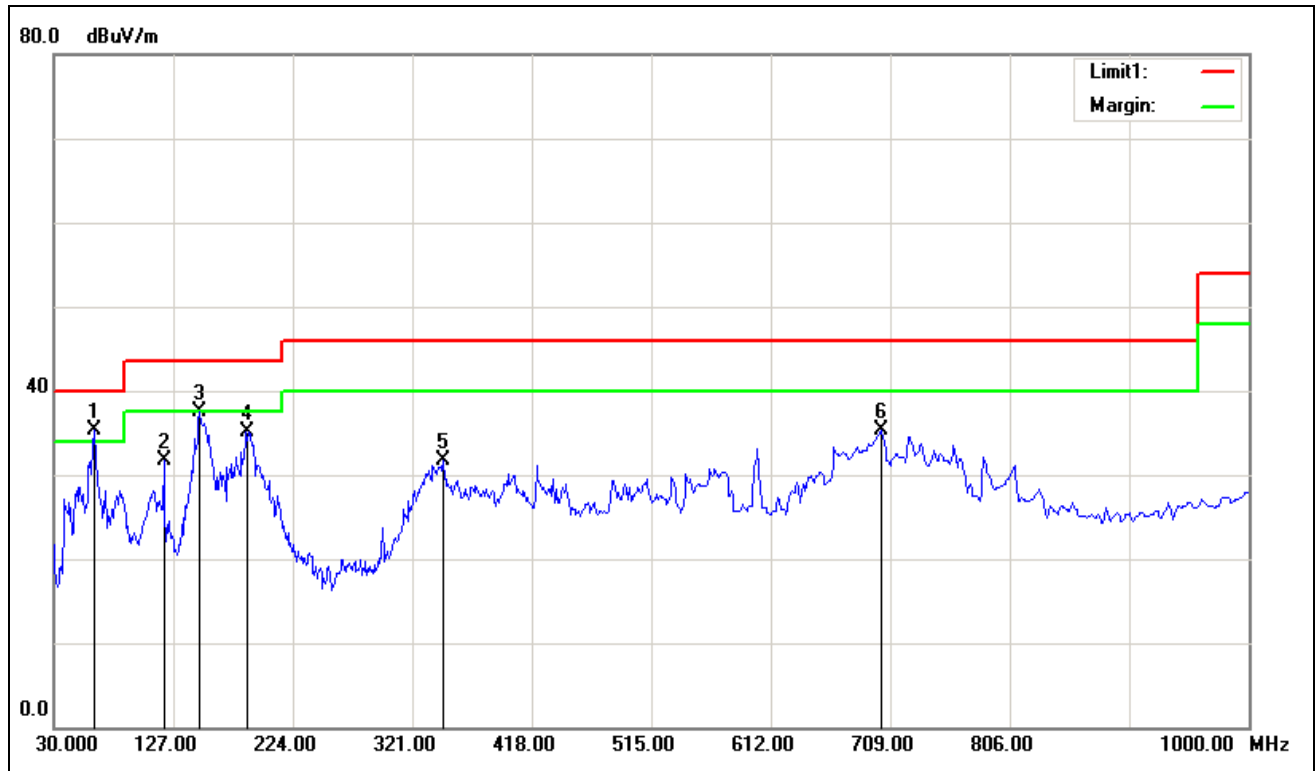

Horizontal

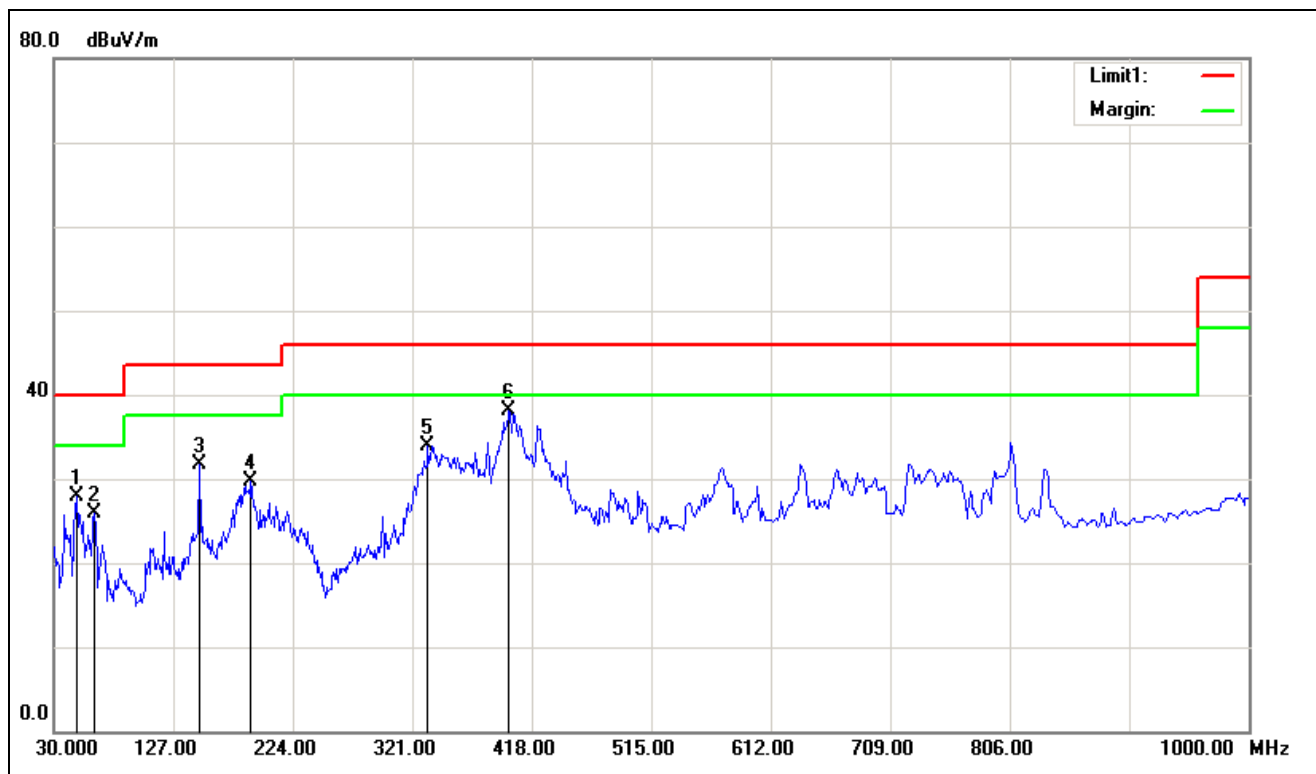

**Above 1 GHz****Test Mode:** GFSK (CH Low)**Tested by:** Eve Wang**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** July 21, 2016

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1990.0000	49.10	-5.06	44.04	74.00	-29.96	V	peak
3997.0000	45.79	1.58	47.37	74.00	-26.63	V	peak
5248.0000	40.51	5.42	45.93	74.00	-28.07	V	peak
5599.0000	42.16	5.91	48.07	74.00	-25.93	V	peak
6913.0000	41.34	7.56	48.90	74.00	-25.10	V	peak
7948.0000	40.05	9.55	49.60	74.00	-24.40	V	peak
1990.0000	47.44	-5.06	42.38	74.00	-31.62	H	peak
2566.0000	44.51	-2.14	42.37	74.00	-31.63	H	peak
3817.0000	42.58	0.82	43.40	74.00	-30.60	H	peak
4159.0000	41.49	2.15	43.64	74.00	-30.36	H	peak
4996.0000	40.47	4.97	45.44	74.00	-28.56	H	peak
5599.0000	42.37	5.91	48.28	74.00	-25.72	H	peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. $\text{Margin (dB)} = \text{Remark result (dBuV/m)} - \text{Average limit (dBuV/m)}$.

Test Mode: GFSK (CH Mid)Tested by: Eve WangAmbient temperature: 24°C Relative humidity: 52% RHDate: July 21, 2016

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	49.71	-5.01	44.70	74.00	-29.30	V	peak
2845.0000	44.25	-1.64	42.61	74.00	-31.39	V	peak
3790.0000	42.41	0.70	43.11	74.00	-30.89	V	peak
3997.0000	44.39	1.58	45.97	74.00	-28.03	V	peak
4744.0000	40.92	4.15	45.07	74.00	-28.93	V	peak
5743.0000	43.64	5.97	49.61	74.00	-24.39	V	peak
1990.0000	46.42	-5.06	41.36	74.00	-32.64	H	peak
2845.0000	43.32	-1.64	41.68	74.00	-32.32	H	peak
3808.0000	41.70	0.78	42.48	74.00	-31.52	H	peak
4879.0000	41.69	4.59	46.28	74.00	-27.72	H	peak
5599.0000	41.47	5.91	47.38	74.00	-26.62	H	peak
6193.0000	40.16	6.39	46.55	74.00	-27.45	H	peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: GFSK (CH High)Tested by: Eve WangAmbient temperature: 24°C Relative humidity: 52% RHDate: July 21, 2016

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.0000	51.33	-5.01	46.32	74.00	-27.68	V	peak
3997.0000	45.36	1.58	46.94	74.00	-27.06	V	peak
5599.0000	42.69	5.91	48.60	74.00	-25.40	V	peak
6931.0000	40.23	7.59	47.82	74.00	-26.18	V	peak
7741.0000	41.66	9.14	50.80	74.00	-23.20	V	peak
8569.0000	40.76	9.34	50.10	74.00	-23.90	V	peak
1279.0000	47.85	-7.50	40.35	74.00	-33.65	H	peak
1999.0000	48.33	-5.01	43.32	74.00	-30.68	H	peak
3367.0000	44.22	-0.74	43.48	74.00	-30.52	H	peak
5599.0000	42.13	5.91	48.04	74.00	-25.96	H	peak
6724.0000	40.63	7.25	47.88	74.00	-26.12	H	peak
8308.0000	41.03	9.48	50.51	74.00	-23.49	H	peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

7.3.3. TEST PROCEDURES (please refer to measurement standard)

8.1 Option 1:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. TEST SETUP

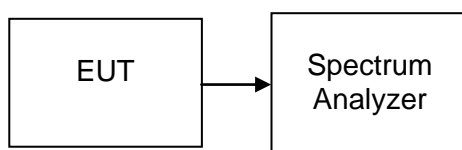

7.3.5. TEST RESULTS

No non-compliance noted


Test Data

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2402	723.5	>500	PASS
Mid	2440	719.5		PASS
High	2480	722.0		PASS





Test Plot

6dB Bandwidth (CH Low)

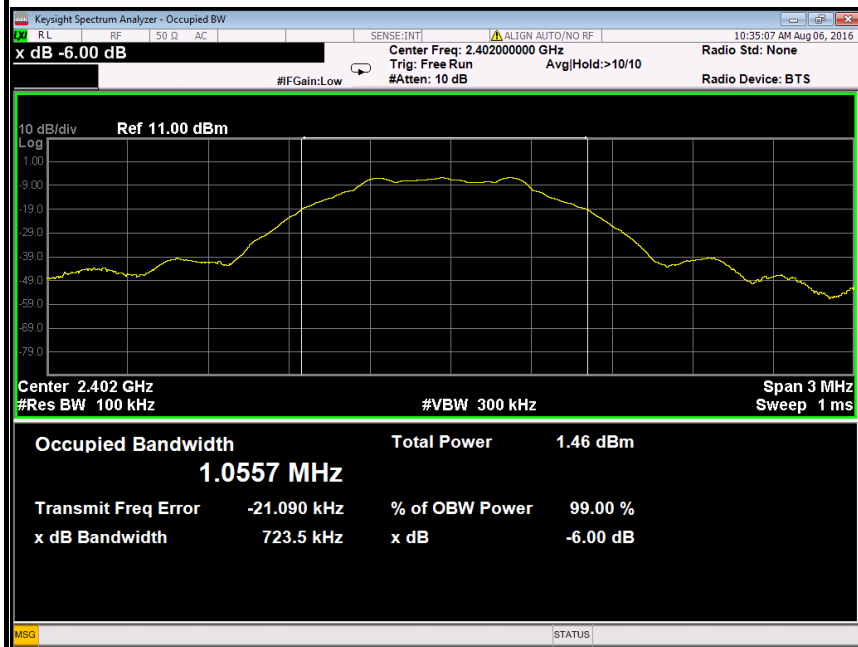

6dB Bandwidth (CH Mid)

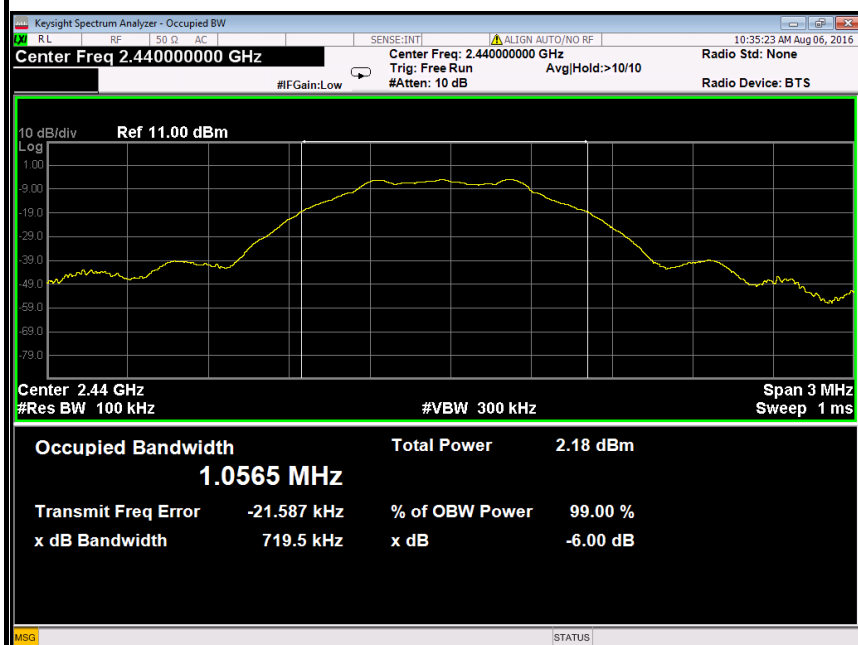

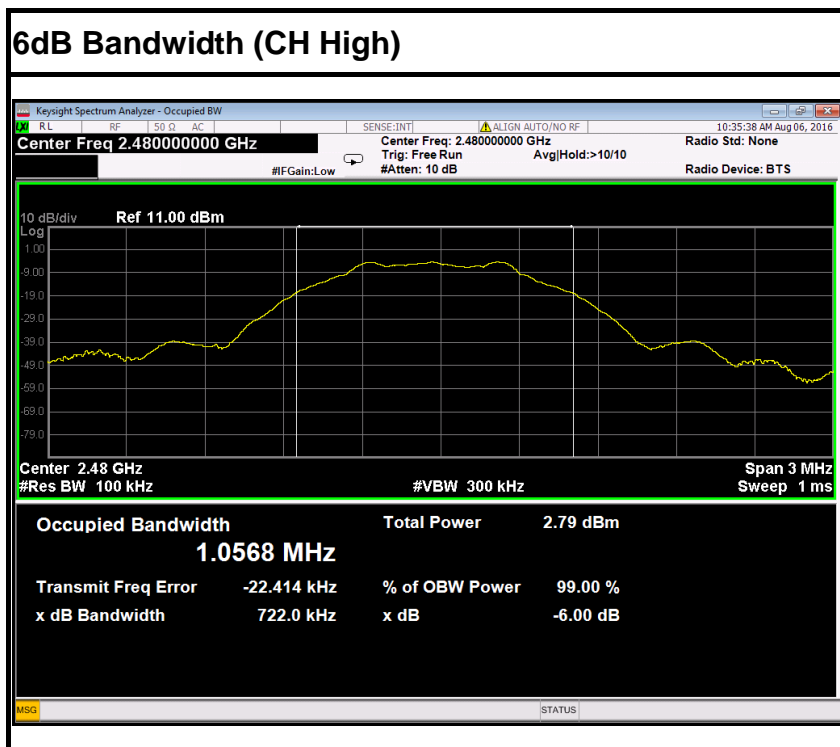



7.4. ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

Please refer to the internal photo.



7.5. PEAK OUTPUT POWER

7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.5.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2016	02/20/2017
Power Sensor	Anritsu	MA2411B	1126150	02/21/2016	02/20/2017

7.5.3. TEST PROCEDURES (please refer to measurement standard)

9.1.1 RBW \geq DTS bandwidth

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3 RBW.
- c) Set span \geq 3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



9.1.2 Integrated band power method

This procedure may be used when the maximum available RBW of the measurement instrument is less than the *DTS bandwidth*.


- a) Set the RBW = 1 MHz.
- b) Set the VBW ≥ 3 RBW
- c) Set the span $\geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.



7.5.4. TEST SETUP

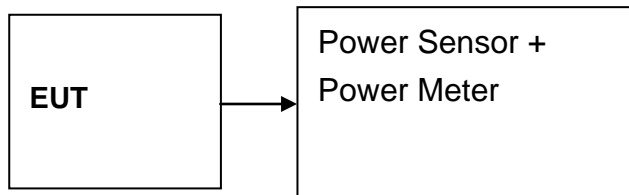


7.5.5. TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-4.36	0.00037	1	peak	PASS
Mid	2440	-4.57	0.00035			PASS
High	2480	-4.08	0.00039			PASS
Low	2402	-4.58	0.00035	1	AVG	PASS
Mid	2440	-4.83	0.00033			PASS
High	2480	-4.28	0.00037			PASS

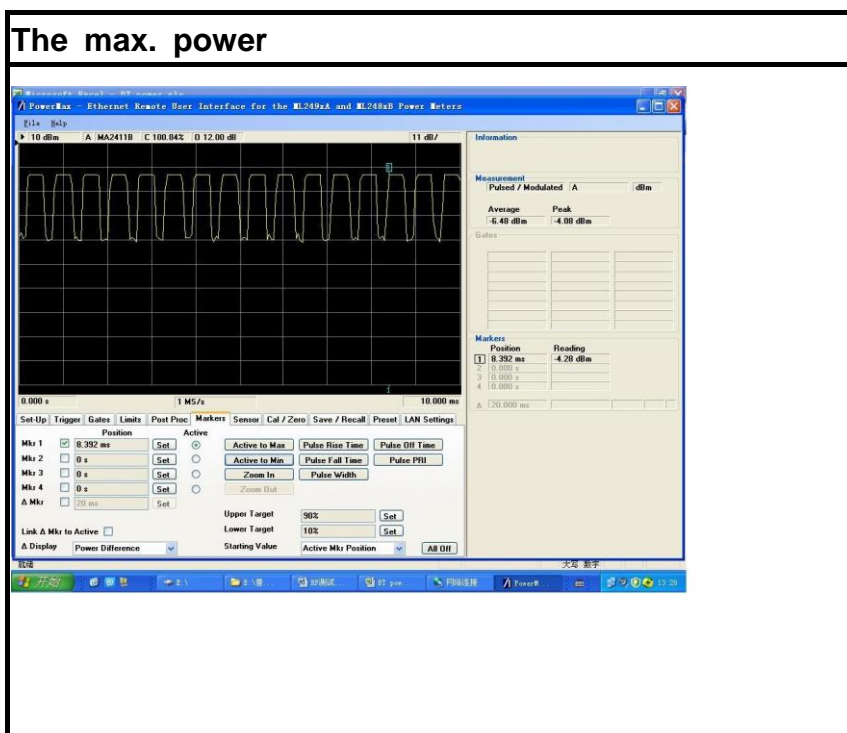



7.6. BAND EDGES MEASUREMENT

7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.6.2. TEST INSTRUMENTS

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2016	02/20/2017
Amplifier	EMEC	EM330	060661	03/18/2016	03/17/2017
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2016	02/20/2017
Loop Antenna	COM-POWER	AL-130	121044	09/25/2015	09/24/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2016	02/20/2017
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2016	02/27/2017
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2016	02/27/2017
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2016	02/20/2017
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.


3. N.C.R = No Calibration Required.



7.6.3. TEST PROCEDURES (please refer to measurement standard)



1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=2.7kHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

7.6.4. TEST SETUP

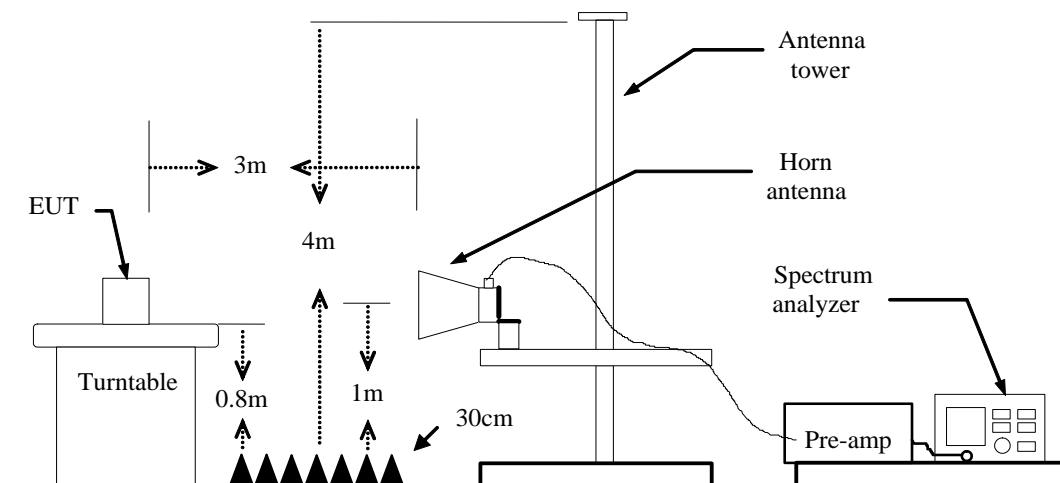




7.6.5. TEST RESULTS

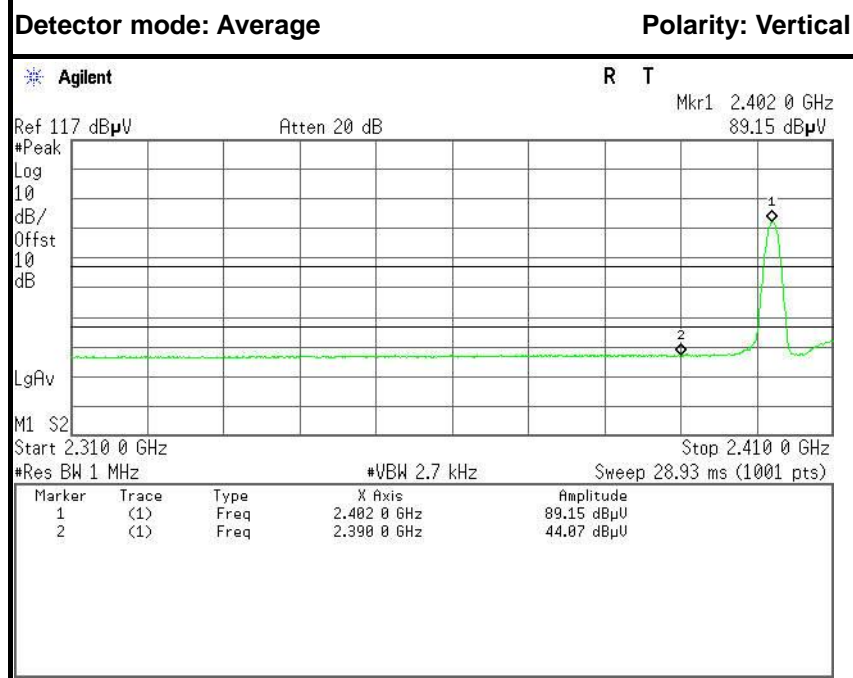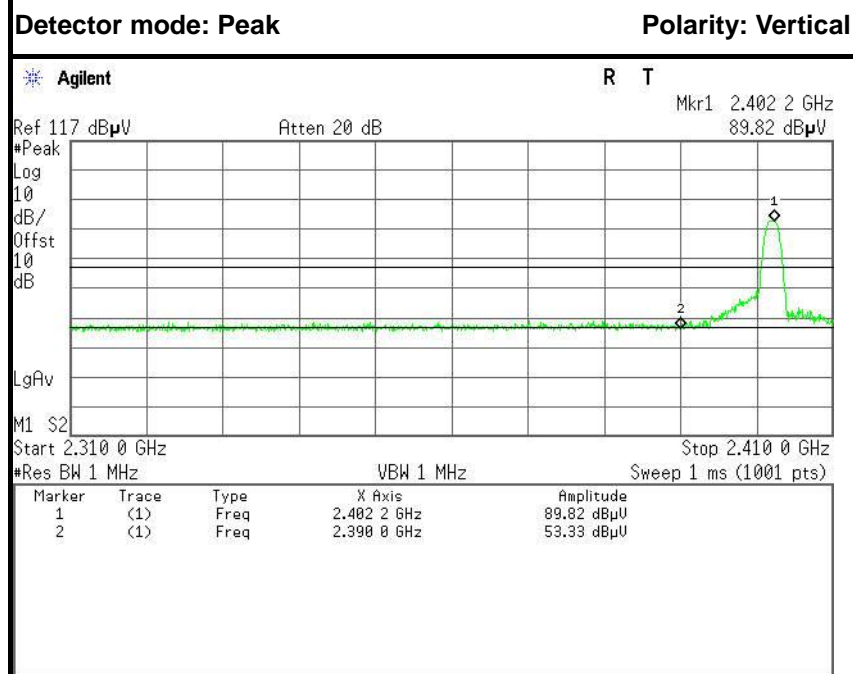Test Plot**Band Edges (CH Low)**


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	46.73	-6.60	53.33	74.00	-20.67	Peak	Vertical
2	2390.0000	37.47	-6.60	44.07	54.00	-9.93	Average	Vertical

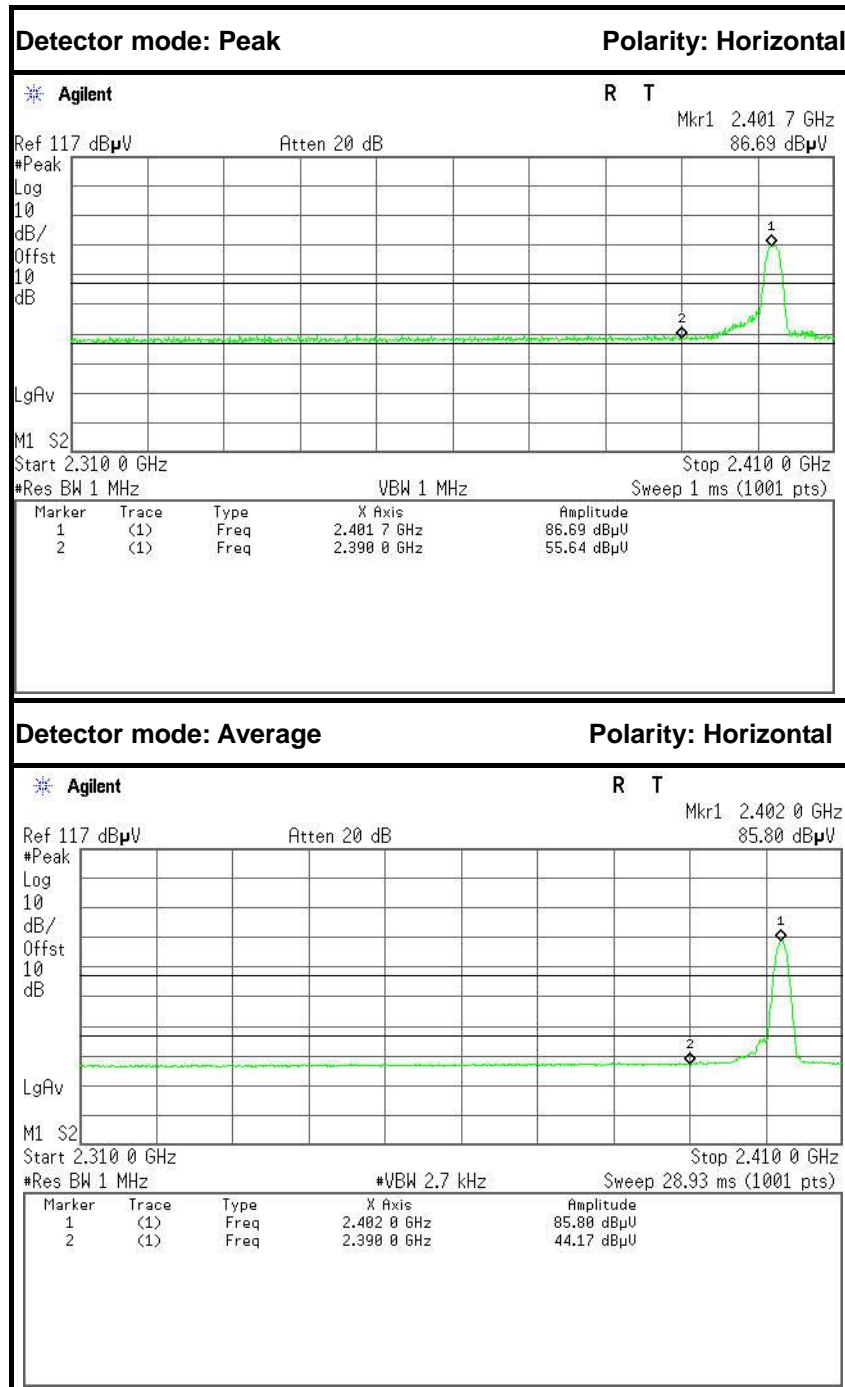


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	49.04	-6.60	55.64	74.00	-18.36	Peak	Horizontal
2	2390.0000	37.57	-6.60	44.17	54.00	-9.83	Average	Horizontal



Band Edges (CH-High)

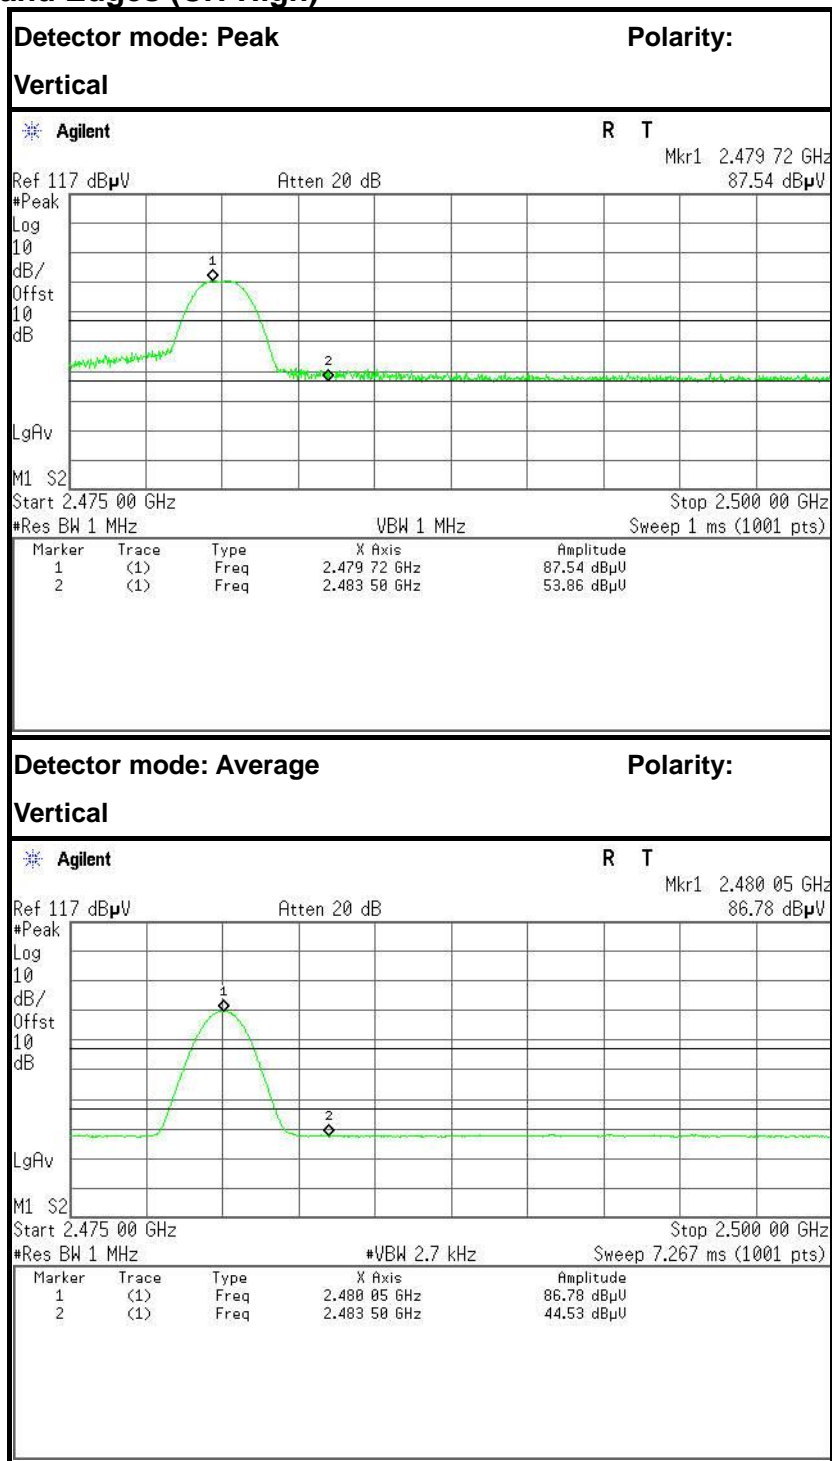

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	47.62	-6.24	53.86	74.00	-20.14	Peak	Vertical
2	2483.5000	38.29	-6.24	44.53	54.00	-9.47	Average	Vertical

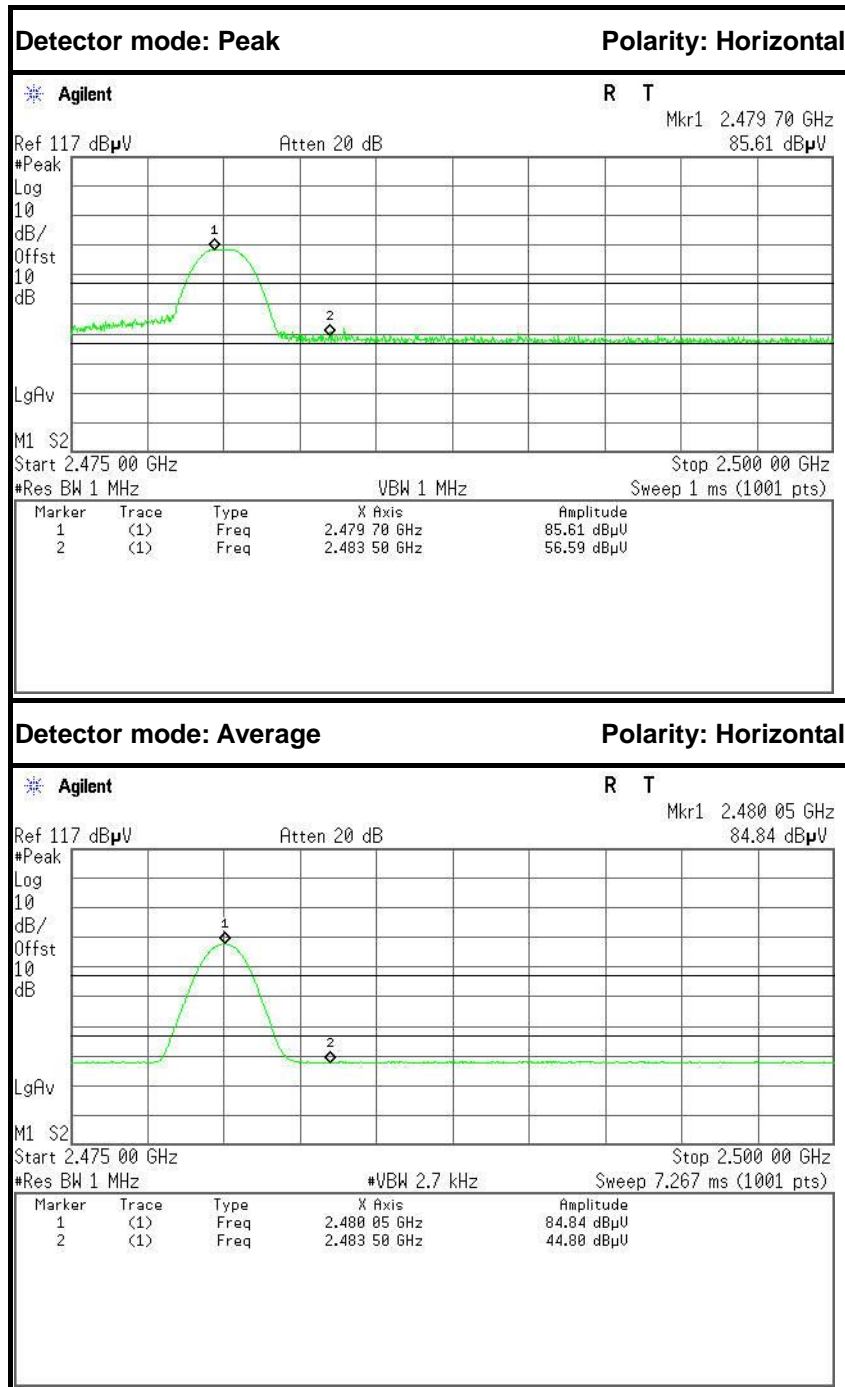

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	50.35	-6.24	56.59	74.00	-17.41	Peak	Horizontal
2	2483.5000	38.56	-6.24	44.80	54.00	-9.20	Average	Horizontal



7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2016	02/20/2017

7.7.3. TEST PROCEDURES (please refer to measurement standard)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.4. TEST SETUP





7.7.5. TEST RESULTS

No non-compliance noted


Test Data

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2402	-20.359	8.00	PASS
Mid	2440	-19.639		PASS
High	2480	-18.951		PASS



Test Plot

PPSD (CH Low)

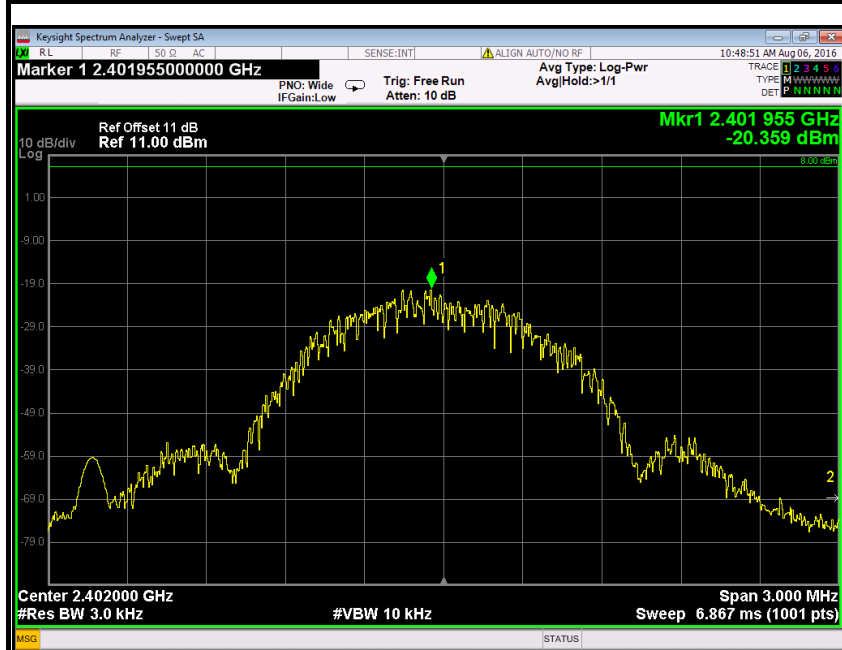

PPSD (CH Mid)

