

Anova Applied Electronics, Inc.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISSED RSS-247 RF report

Model:

AN300-10,
AN350-10

REPORT NUMBER:

240301065SHA-001

ISSUE DATE:

July 25, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.247-02_V1 © 2018 Intertek



Applicant: Anova Applied Electronics, Inc.
180 Steuart Street #192843, San Francisco, CA 94105, U.S.A

Manufacturer: Anova Applied Electronics, Inc.
180 Steuart Street #192843, San Francisco, CA 94105, U.S.A

Factory: Ningbo Careline Electric Appliance Co., Ltd.
No.888, WeiYi Road, Hangzhou Bay New Area, Ningbo, 315327
Zhejiang, China.

FCC ID: 2APBOAN300

IC: 23717-AN300

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 3 (February 2023): Digital Transmission Systems (DTs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (March 2019) Amendment 1: General Requirements for Compliance of Radio Apparatus

PREPARED BY:**REVIEWED BY:**

Project Engineer

Eric Li



Reviewer

Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 DESCRIPTION OF TEST FACILITY	8
2 TEST SPECIFICATIONS	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST	9
2.3 TEST SOFTWARE LIST	10
2.4 TEST PERIPHERALS LIST	10
2.5 TEST ENVIRONMENT CONDITION	10
2.6 INSTRUMENT LIST	11
2.7 MEASUREMENT UNCERTAINTY	13
3 MINIMUM 6DB BANDWIDTH	14
3.1 LIMIT	14
3.2 MEASUREMENT PROCEDURE	14
3.3 TEST CONFIGURATION	14
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	14
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.	15
4.1 LIMIT	15
4.2 MEASUREMENT PROCEDURE	15
4.3 TEST CONFIGURATION	16
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	16
5 POWER SPECTRUM DENSITY	17
5.1 LIMIT	17
5.2 MEASUREMENT PROCEDURE	17
5.3 TEST CONFIGURATION	18
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	18
6 EMISSION OUTSIDE THE FREQUENCY BAND	19
6.1 LIMIT	19
6.2 MEASUREMENT PROCEDURE	19
6.3 TEST CONFIGURATION	20
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND	20
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS	21
7.1 LIMIT	21
7.2 MEASUREMENT PROCEDURE	21
7.3 TEST CONFIGURATION	23
7.4 TEST RESULTS OF RADIATED EMISSIONS	25
8 POWER LINE CONDUCTED EMISSION	28
8.1 LIMIT	28
8.2 TEST CONFIGURATION	28
8.3 MEASUREMENT PROCEDURE	29
8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION	30

TEST REPORT

9	OCCUPIED BANDWIDTH	32
9.1	LIMIT	32
9.2	MEASUREMENT PROCEDURE	32
9.3	TEST CONFIGURATION	32
9.4	THE RESULTS OF OCCUPIED BANDWIDTH	32
10	ANTENNA REQUIREMENT	33
	APPENDIX A: TEST RESULTS	34

Revision History

Report No.	Version	Description	Issued Date
240301065SHA-001	Rev. 01	Initial issue of report	July 25, 2024

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 3 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 3 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 3 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 3 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Sous Vide Immersion Circulator
Type/Model/PMN/HVIN:	AN300-10, AN350-10
Description of EUT:	EUT is a Sous Vide Immersion Circulator with BLE and WIFI functions, there are two models, they are the same except declared power. We tested AN300-10 as representative and listed the worst results in this report.
Rating:	120V AC, 60Hz, AN300-10: 850W; AN350-10: 800W
Category of EUT:	Class B
EUT type:	☒ Table top ☐ Floor standing
Software Version:	/
Hardware Version:	/
Sample Identification No.:	0221028-11-003
Sample received date:	October 28, 2022
Date of test:	November 6, 2022~ November 17, 2022

1.2 Technical Specification

Frequency Band:	2402MHz to 2480MHz
Support Standards:	Bluetooth Low Energy
Type of Modulation:	GFSK
Channel Number:	40
Data Rate	1Mbps, 2Mbps
Channel Separation:	2MHz
Antenna Information:	PCB Antenna, gain is 2.24dBi

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)
 ANSI C63.10 (2013)
 KDB 558074 (v05r02)
 RSS-247 Issue 3 (August 2023)
 RSS-Gen Issue 5 (March 2019) Amendment 1

2.2 Mode of operation during the test

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)				2402 ~ 2480			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Data rate VS Power:

Test software and Power Setting parameter			
Test Software	RTLBTAPP.exe		
Working Mode	BLE		
Test Channel	2402MHz	2440MHz	2480MHz
Power Setting	7	7	7

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	25°C	52% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	24°C	53% RH
Power line conducted emission	24°C	52% RH

2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESCS 30	EC 2107	2023-07-09
☒	A.M.N.	R&S	ESH2-Z5	EC 3119	2023-11-09
☐	A.M.N.	R&S	ENV 216	EC 3393	2023-07-09
☐	A.M.N.	R&S	ENV4200	EC 3558	2023-06-09
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Test Receiver	R&S	ESIB 26	EC 3045	2023-10-19
☐	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-08-06
☒	TRILOG broadband Antenna	Schwarzbeck	VULB9168	EC6402	2023-01-17
☒	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2023-06-09
☒	Pre-amplifier	tonscend	tap01018050	EC 6432-1	2022-12-26
☒	Horn antenna	tonscend	bha9120d	EC 6432-2	2023-01-09
☒	Horn antenna	ETS	3117	EC 4792-1	2023-08-28
☐	Horn antenna	ETS	3116C	EC 5955	2023-06-17
☐	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2023-07-08
☐	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2023-04-24
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☐	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2023-03-14
☐	Power sensor	Agilent	U2021XA	EC 5338-1	2023-03-14
☐	Vector Signal Generator	Agilent	N5182B	EC 5175	2023-03-14
☐	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2023-03-14
☐	Mobile Test System	Litepoint	Iqxel	EC 5176	2023-01-11
☐	Test Receiver	R&S	ESCI 7	EC 4501	2022-12-09
☐	Climate chamber	GWS	MT3065	EC 6021	2023-03-06
☒	Spectrum Analyzer	Keysight	N9030b	EC 6078	2023-06-09
☐	Signal generator	Agilent	N5182A	Ec6172	2023-08-19
☐	Signal generator	Agilent	N5181A	Ec6171	2023-08-19

TEST REPORT

Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Shielded room	Zhongyu	-	EC 2838	2023-01-11
☐	Shielded room	Zhongyu	-	EC 2839	2023-01-11
☒	Semi-anechoic chamber	Albatross project	-	EC 3048	2023-08-22
☒	Fully-anechoic chamber	Albatross project	-	EC 3047	2023-08-22
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
☒	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2023-03-24
☐	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2023-03-08
☒	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3442	2023-01-03
☒	Thermo-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5844	2023-03-08
☐	Pressure meter	YM3	Shanghai Mengde	EC 3320	2023-07-22

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	$\pm 0.74\text{dB}$
Radiated Emissions in restricted frequency bands below 1GHz	$\pm 4.90\text{dB}$
Radiated Emissions in restricted frequency bands above 1GHz	$\pm 5.02\text{dB}$
Emission outside the frequency band	$\pm 2.89\text{dB}$
Power line conducted emission	$\pm 3.19\text{dB}$

3 Minimum 6dB bandwidth

Test result: Pass


3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

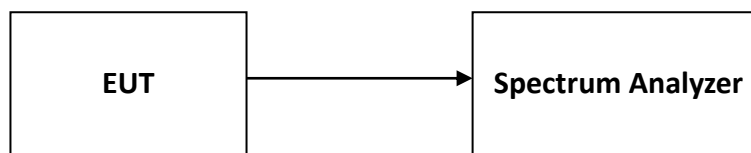

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

4 Maximum conducted output power and e.i.r.p.

Test result: Pass

4.1 Limit


For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

4.3 Test Configuration

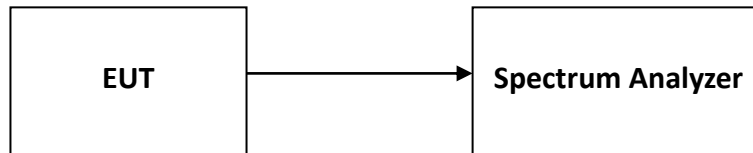

4.4 Test Results of Maximum conducted output power

Please refer to Appendix A

TEST REPORT

5 Power spectrum density

Test result: Pass

5.1 Limit


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.

5.2 Measurement Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Test Configuration

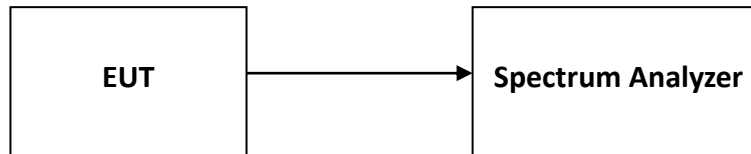

5.4 Test Results of Power spectrum density

Please refer to Appendix A

TEST REPORT

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

Reference level measurement

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration

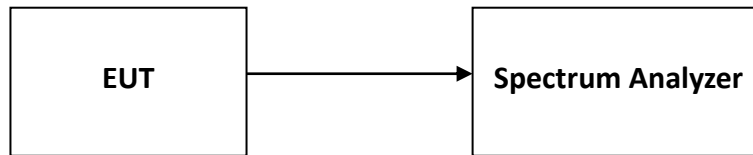

6.4 The results of Emission outside the frequency band

Please refer to Appendix A

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

The EUT was tested according to Subclause 11.12 of ANSI C63.10.

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT

For Radiated emission above 30MHz:


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detector function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were and the worst-case emissions were reported.

7.3 Test Configuration


For Radiated emission below 30MHz:

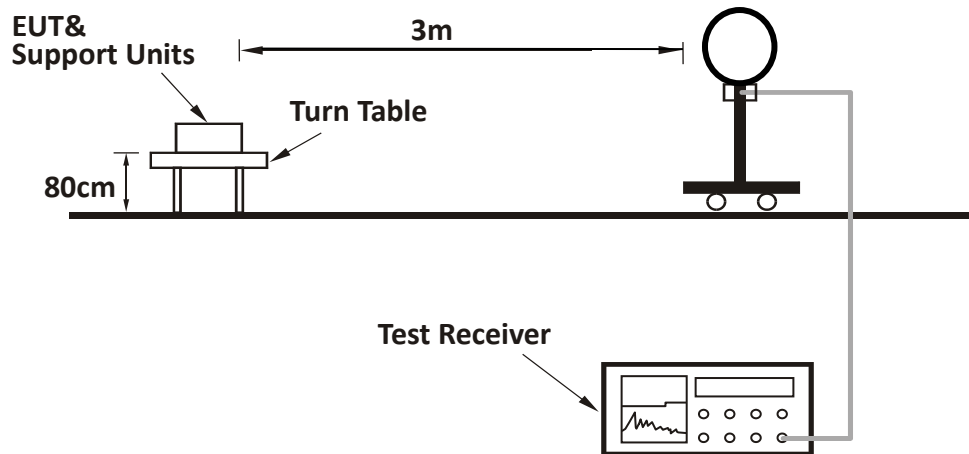

For Radiated emission 30MHz to 1GHz:

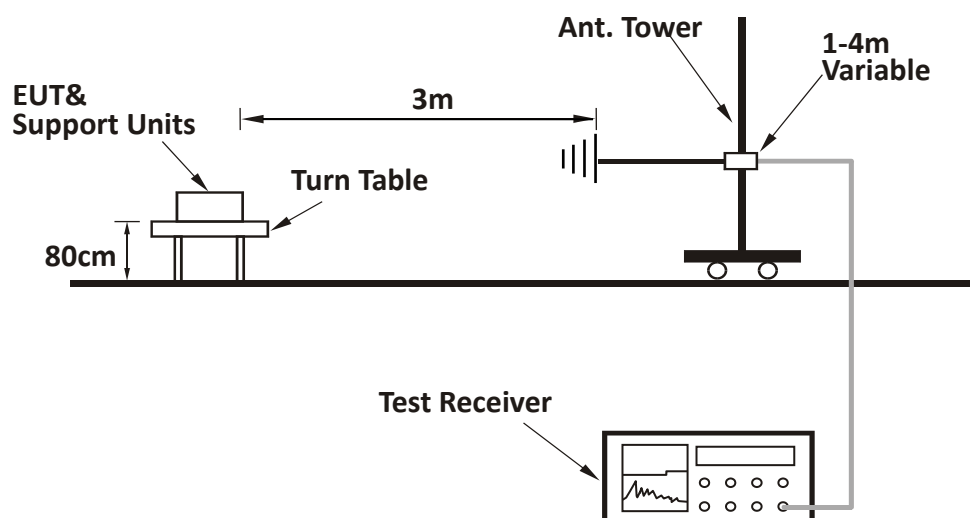

For Radiated emission above 1GHz:

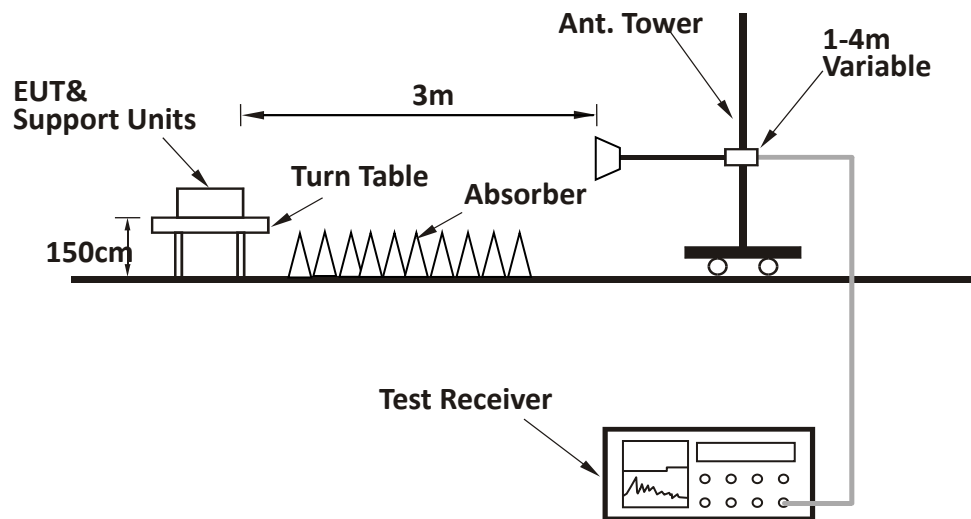


TEST REPORT

7.4 Test Results of Radiated Emissions


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform of BLE-2M listed as below:

Horizontal

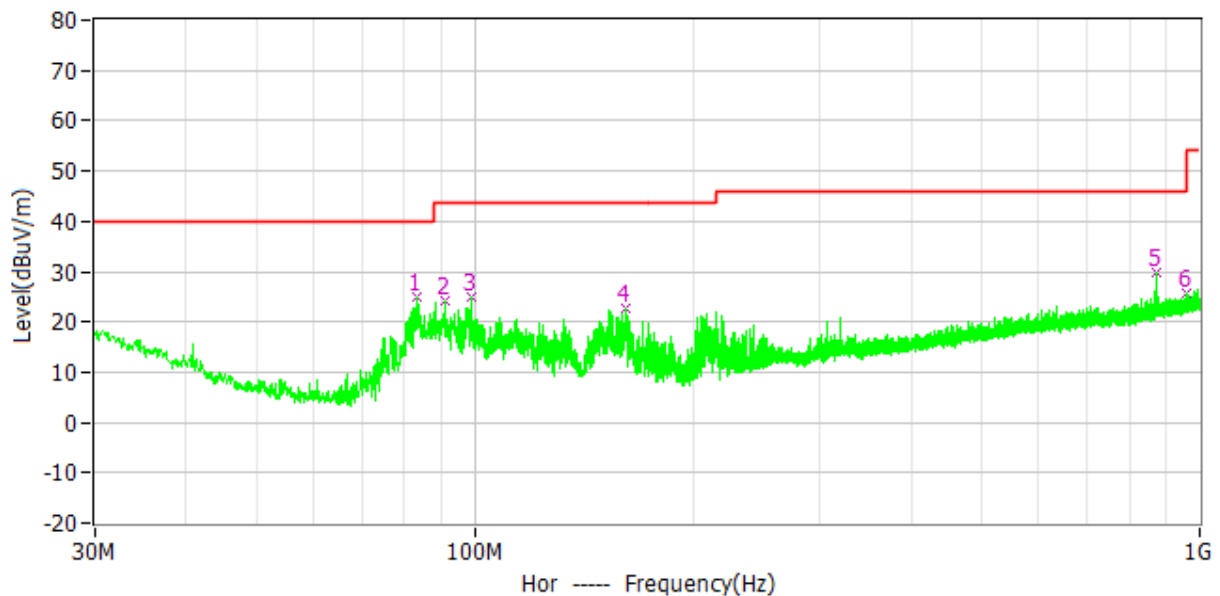

Vertical

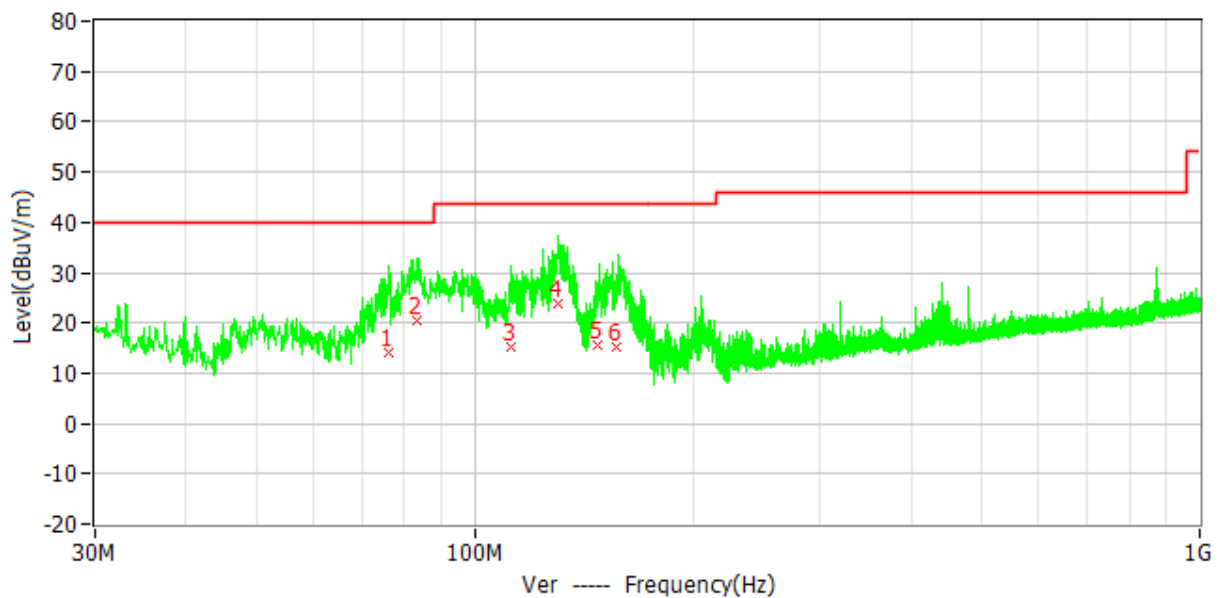

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	83.156MHz	25.00	40.00	15.00	PK
H	91.401MHz	24.30	43.50	19.20	PK
H	98.967MHz	25.10	43.50	18.40	PK
H	161.823MHz	22.60	43.50	20.90	PK
H	869.147MHz	29.90	46.00	16.10	PK
H	959.842MHz	25.80	46.00	20.20	PK
V	76.358MHz	14.00	40.00	26.00	PK
V	83.483MHz	20.40	40.00	19.60	QP
V	112.547MHz	15.10	43.50	28.40	QP
V	130.556MHz	23.90	43.50	19.60	QP
V	148.135MHz	15.40	43.50	28.10	QP
V	156.948MHz	15.10	43.50	28.40	PK

Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	50.40	74.00	23.60	PK
	V	2390.00	51.20	74.00	22.80	PK
	V	4804.00	43.90	74.00	30.10	PK
M	H	4880.00	47.60	74.00	26.40	PK
	V	4880.00	48.10	74.00	25.90	PK
H	H	2483.50	50.70	74.00	23.30	PK
	V	2483.50	51.60	74.00	22.40	PK
	V	4960.00	44.30	74.00	29.70	PK

TEST REPORT

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

8 Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

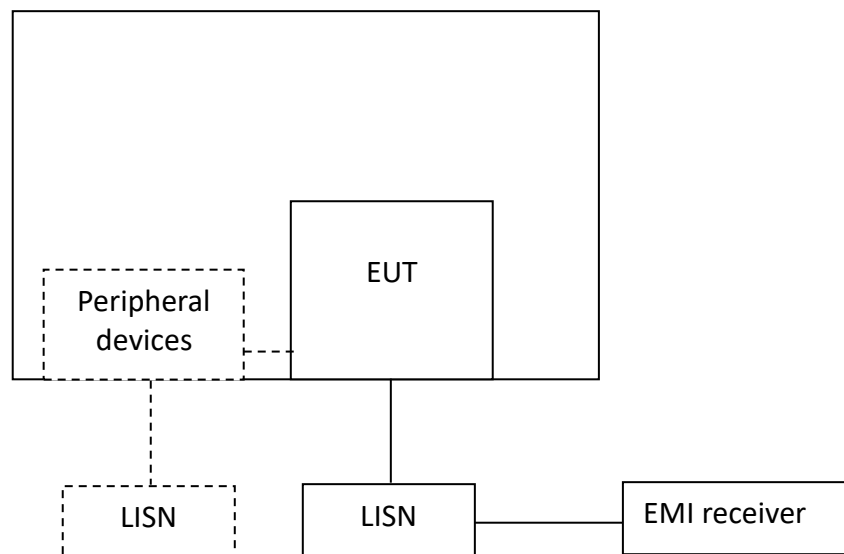

TEST REPORT

8.3 Measurement Procedure



Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

8.4 Test Results of Power line conducted emission

Test Curve:

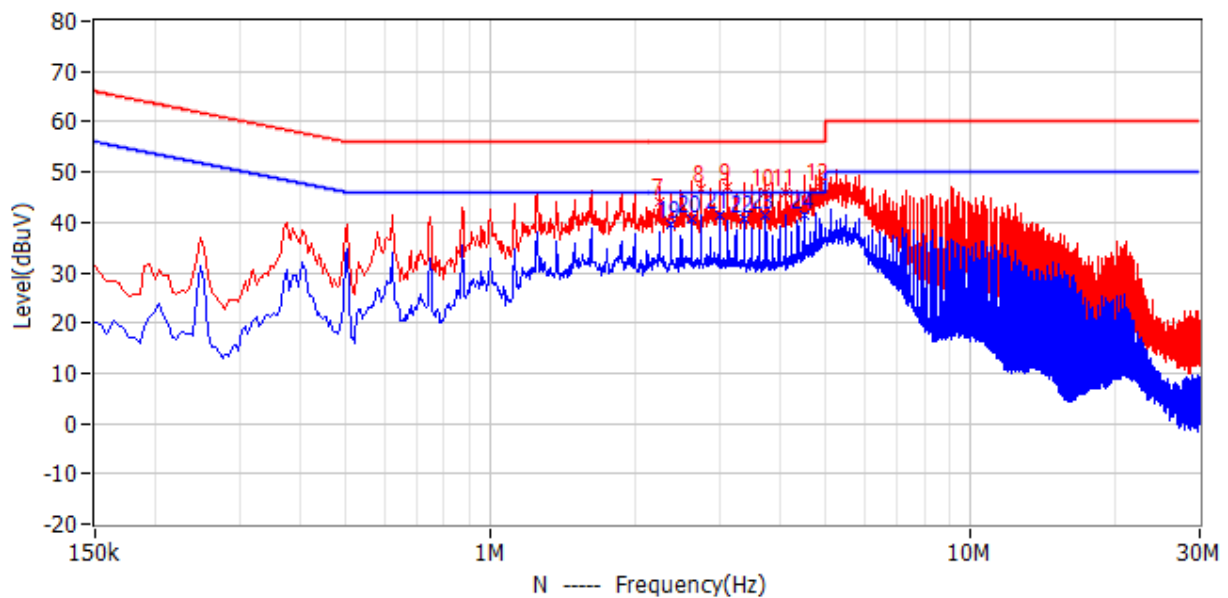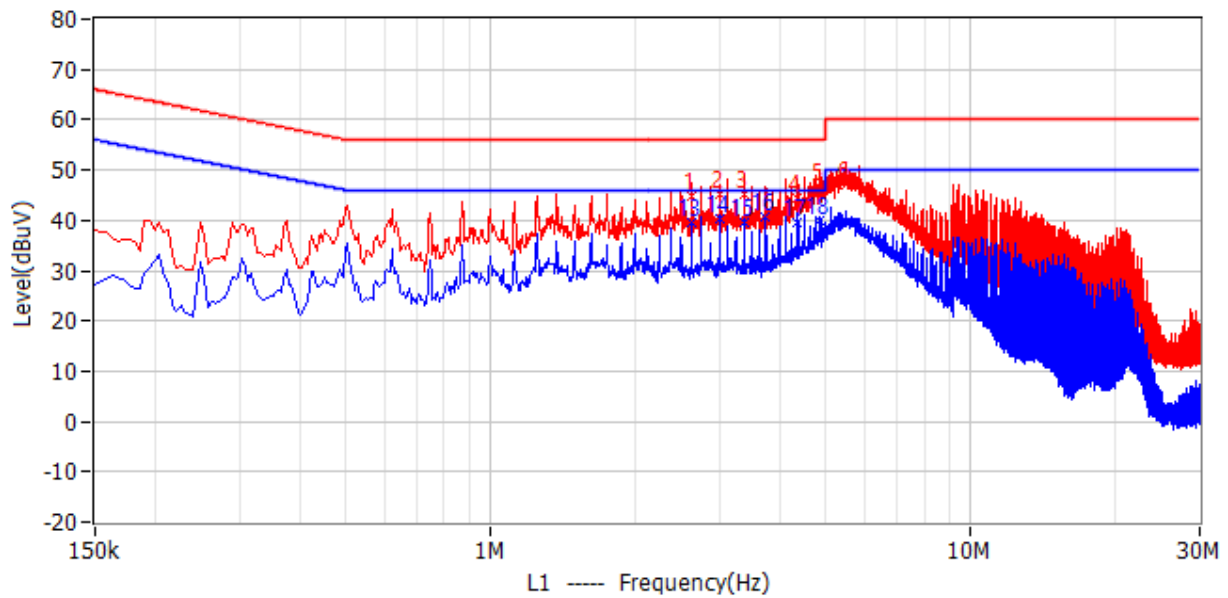

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	2.621MHz	56.0	44.7	-11.3	38.5	6.2	QP	L1
2	2.994MHz	56.0	45.2	-10.8	38.9	6.3	QP	L1
3	3.368MHz	56.0	45.1	-10.9	38.8	6.3	QP	L1
4	4.367MHz	56.0	44.6	-11.4	38.3	6.3	QP	L1
5	4.866MHz	56.0	46.5	-9.5	40.1	6.4	QP	L1
6	5.492MHz	60.0	47.0	-13.0	40.6	6.4	QP	L1
7	2.247MHz	56.0	43.9	-12.1	37.7	6.2	QP	N
8	2.747MHz	56.0	46.6	-9.4	40.4	6.2	QP	N
9	3.120MHz	56.0	47.2	-8.8	40.9	6.3	QP	N
10	3.746MHz	56.0	46.1	-9.9	39.8	6.3	QP	N
11	4.119MHz	56.0	46.0	-10.0	39.7	6.3	QP	N
12	4.866MHz	56.0	47.0	-9.0	40.6	6.4	QP	N
13	2.621MHz	46.0	39.5	-6.5	33.3	6.2	CAV	L1
14	2.994MHz	46.0	40.3	-5.7	34.0	6.3	CAV	L1
15	3.368MHz	46.0	39.5	-6.5	33.2	6.3	CAV	L1
16	3.746MHz	46.0	40.6	-5.4	34.3	6.3	CAV	L1
17	4.367MHz	46.0	39.6	-6.4	33.3	6.3	CAV	L1
18	4.866MHz	46.0	40.1	-5.9	33.7	6.4	CAV	L1
19	2.373MHz	46.0	39.7	-6.3	33.5	6.2	CAV	N
20	2.621MHz	46.0	40.5	-5.5	34.3	6.2	CAV	N
21	2.994MHz	46.0	41.4	-4.6	35.1	6.3	CAV	N
22	3.372MHz	46.0	40.8	-5.2	34.5	6.3	CAV	N
23	3.746MHz	46.0	41.5	-4.5	35.2	6.3	CAV	N
24	4.493MHz	46.0	41.6	-4.4	35.3	6.3	CAV	N

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Reading + Correct Factor

3. Delta= Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

9 Occupied Bandwidth

Test result: **Tested**

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

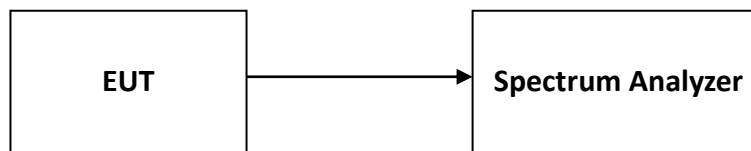

9.4 The results of Occupied Bandwidth

Please refer to Appendix A

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT

Appendix A: Test results

1. Conducted Output Power


1.1 Test Data


BLE-1M Maximum Output Power		
Test Frequency (MHz)	Power (dBm)	Result
2402	1.60	Pass
2440	2.20	Pass
2480	2.04	Pass

BLE-2M Maximum Output Power		
Test Frequency (MHz)	Power (dBm)	Result
2402	2.05	Pass
2440	2.71	Pass
2480	2.45	Pass

BLE EIRP			
Max power (dBm)	Max EIRP (dBm)	Max EIRP (W)	Result
2.71	4.95	0.0031	Pass

1.2 Test Plots

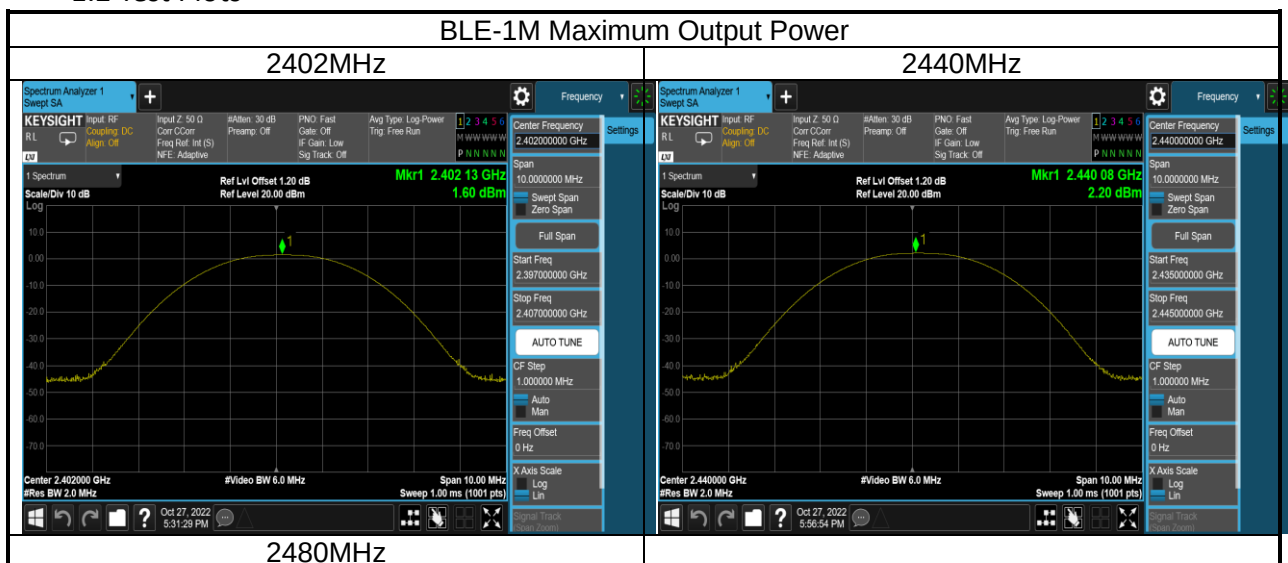

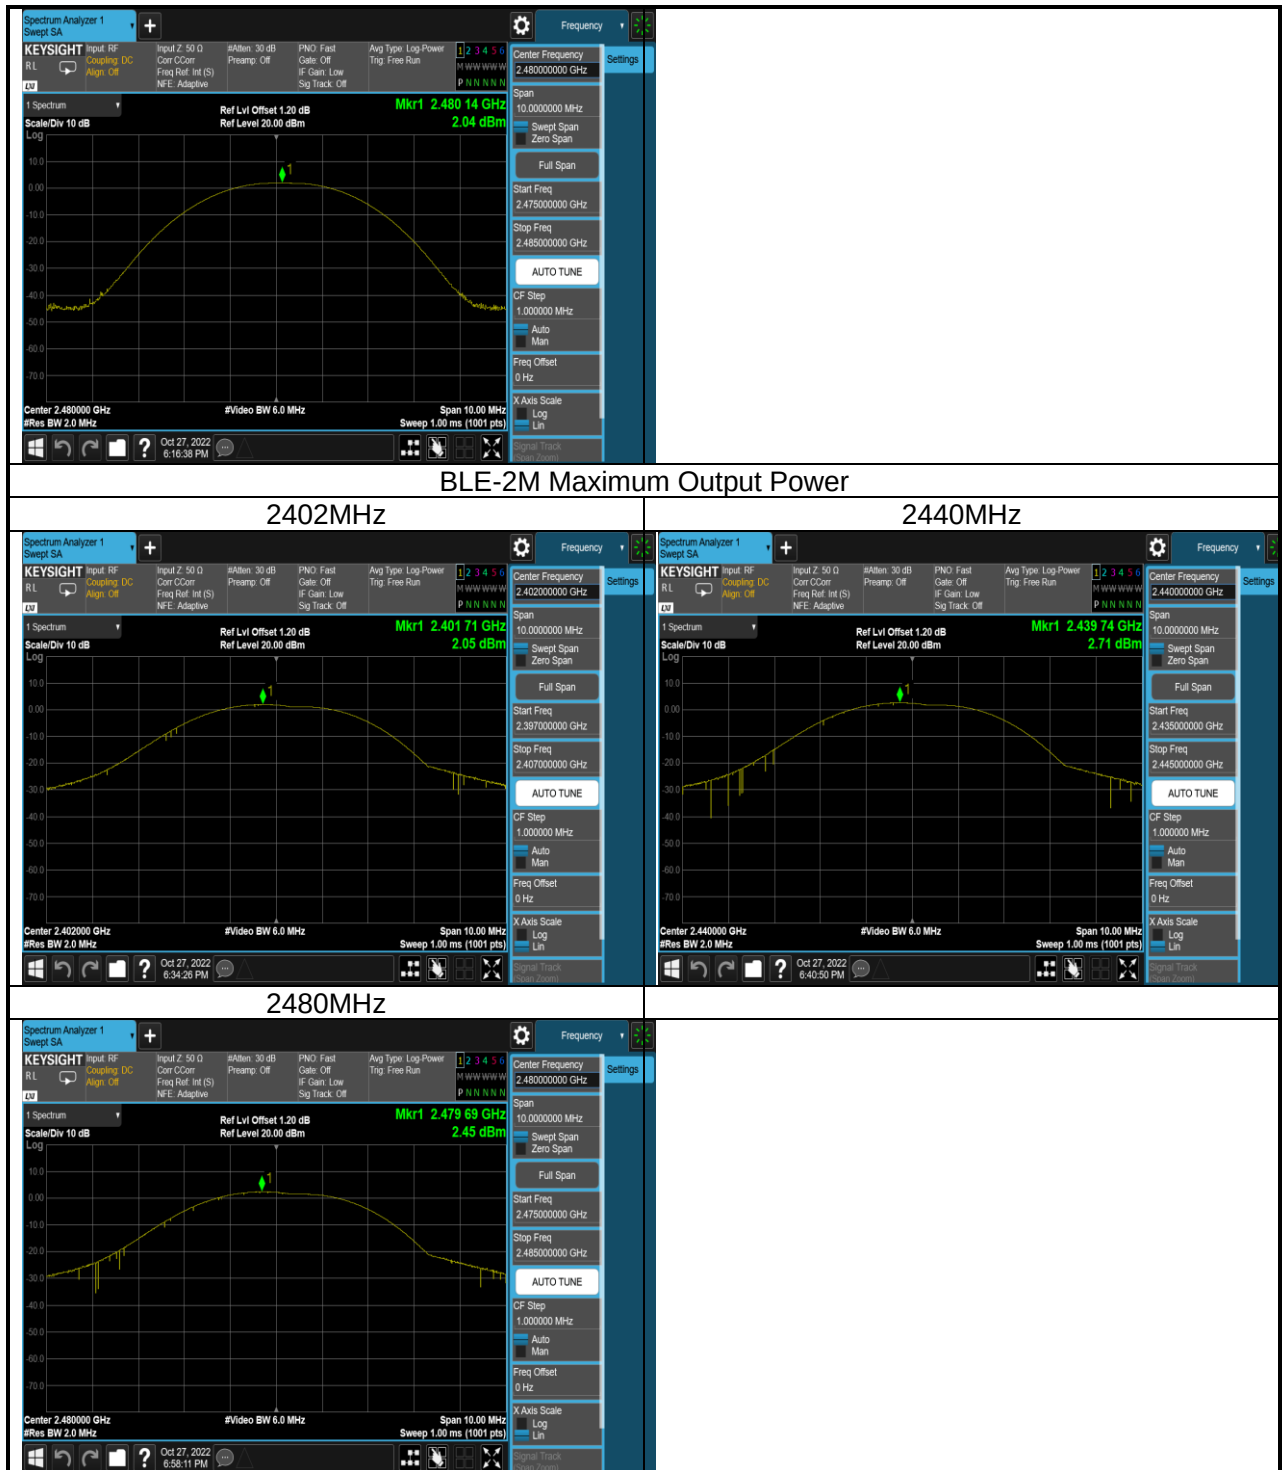


2. Power Spectral Density


2.1 Test Data

BLE-1M Peak Power Spectral Density		
Test Frequency (MHz)	PSD (dBm/3kHz)	Result
2402	-13.81	Pass
2440	-14.14	Pass
2480	-12.14	Pass

BLE-2M Peak Power Spectral Density		
Test Frequency (MHz)	PSD (dBm/3kHz)	Result
2402	-14.53	Pass
2440	-16.62	Pass
2480	-16.89	Pass

2.2 Test Plots

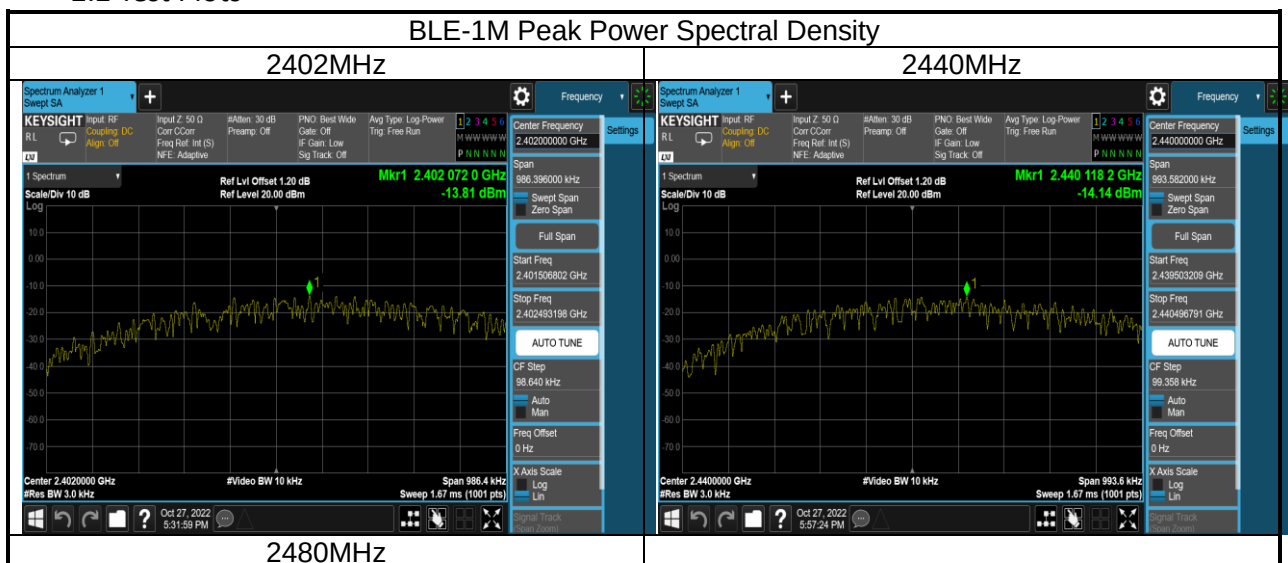

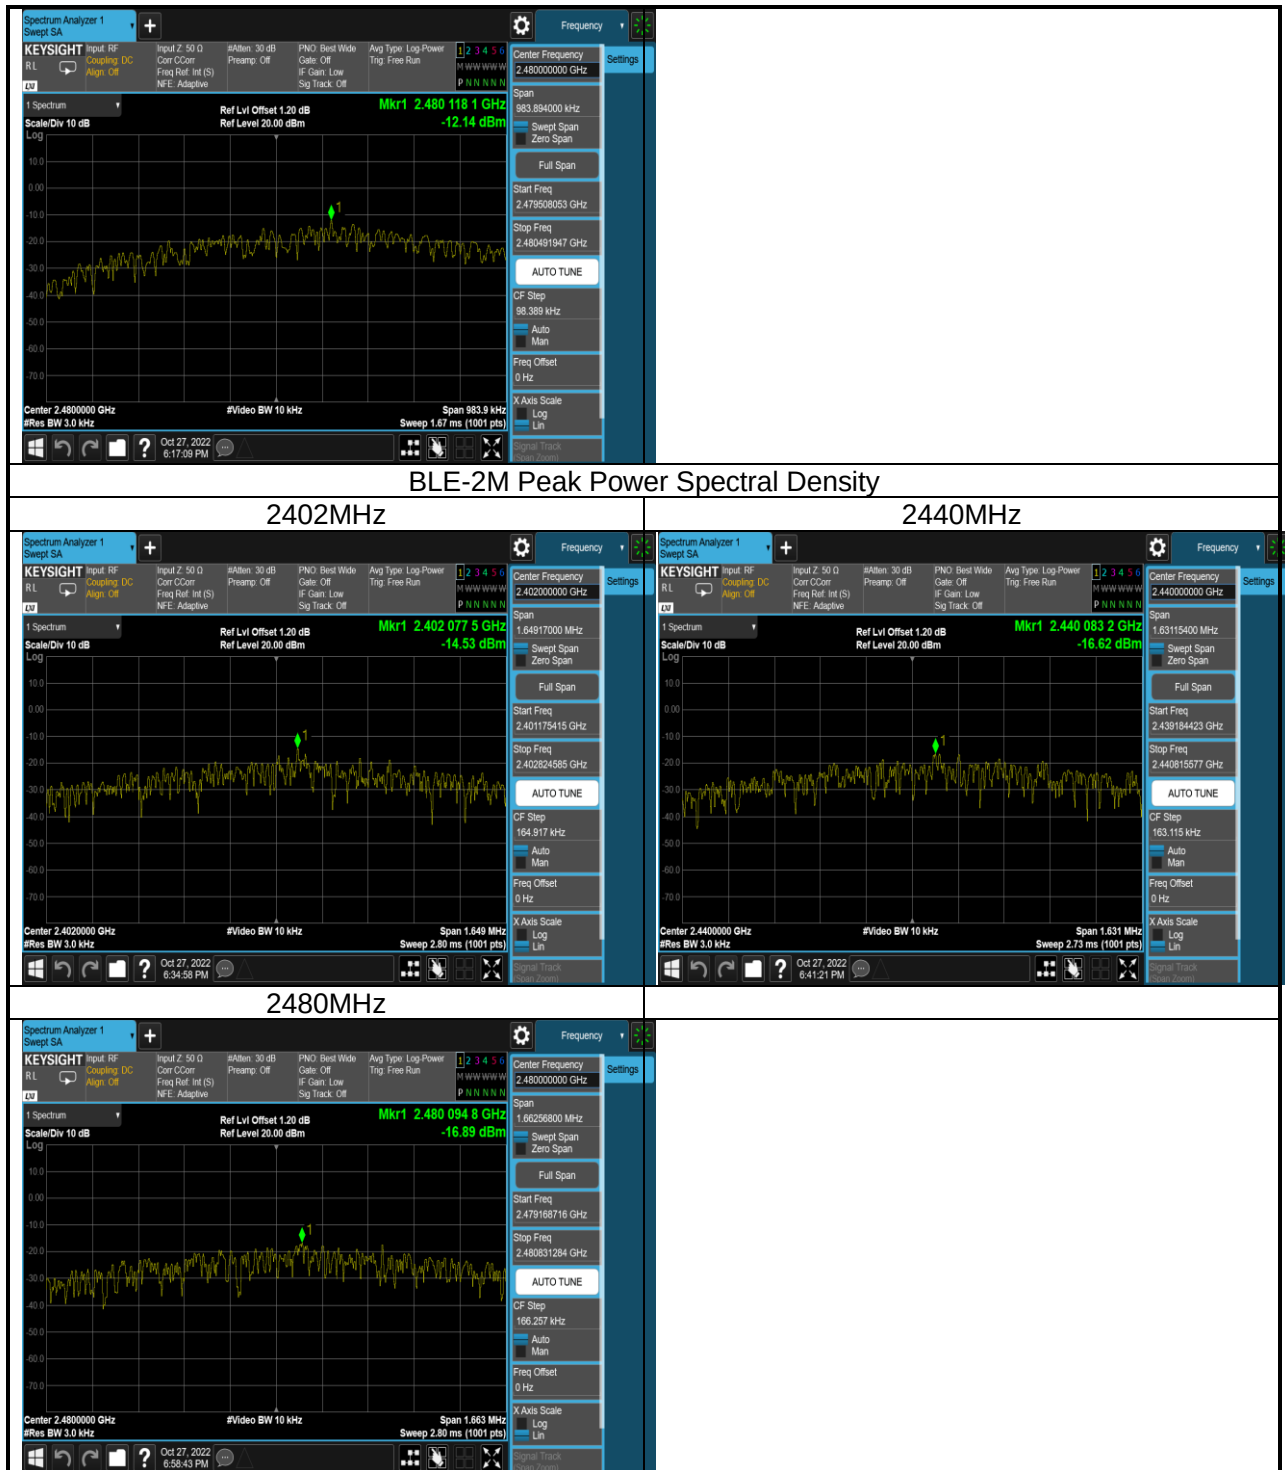

TEST REPORT


3. Minimum 6dB bandwidth


3.1 Test Data

BLE-1M Occupied 6dB Bandwidth			
Test Frequency (MHz)	Occupied Bandwidth (kHz)	Min Limit (kHz)	Result
2402	657.6	500	Pass
2440	662.4	500	Pass
2480	655.9	500	Pass

BLE-2M Occupied 6dB Bandwidth			
Test Frequency (MHz)	Occupied Bandwidth (kHz)	Min Limit (kHz)	Result
2402	1099.4	500	Pass
2440	1087.4	500	Pass
2480	1108.4	500	Pass

3.2 Test Plots

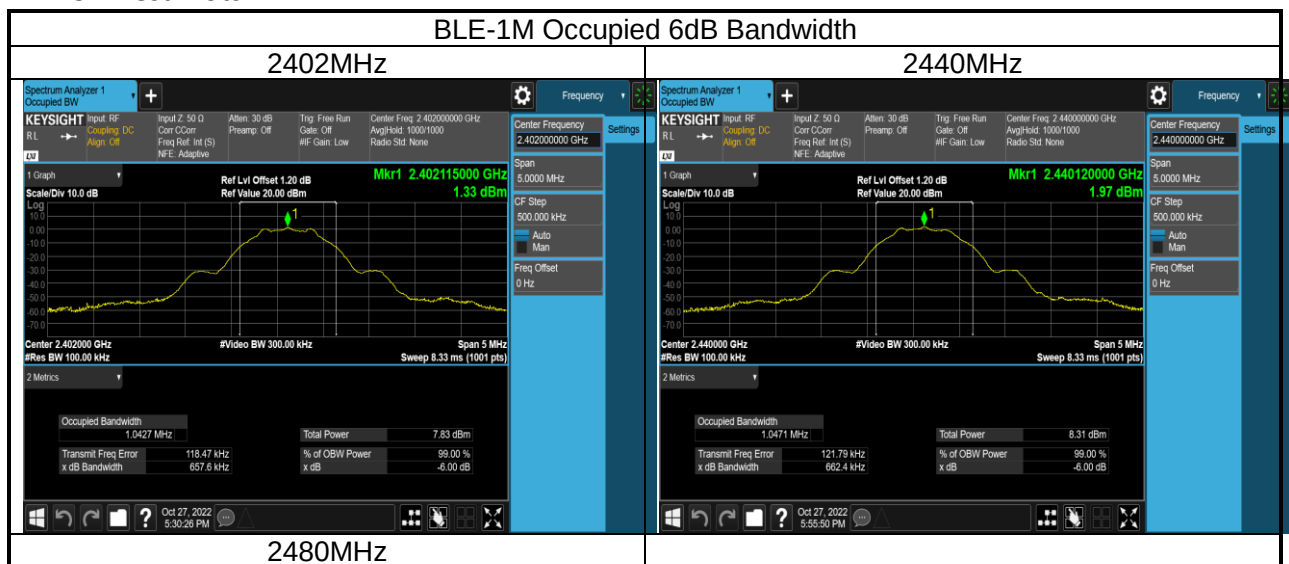

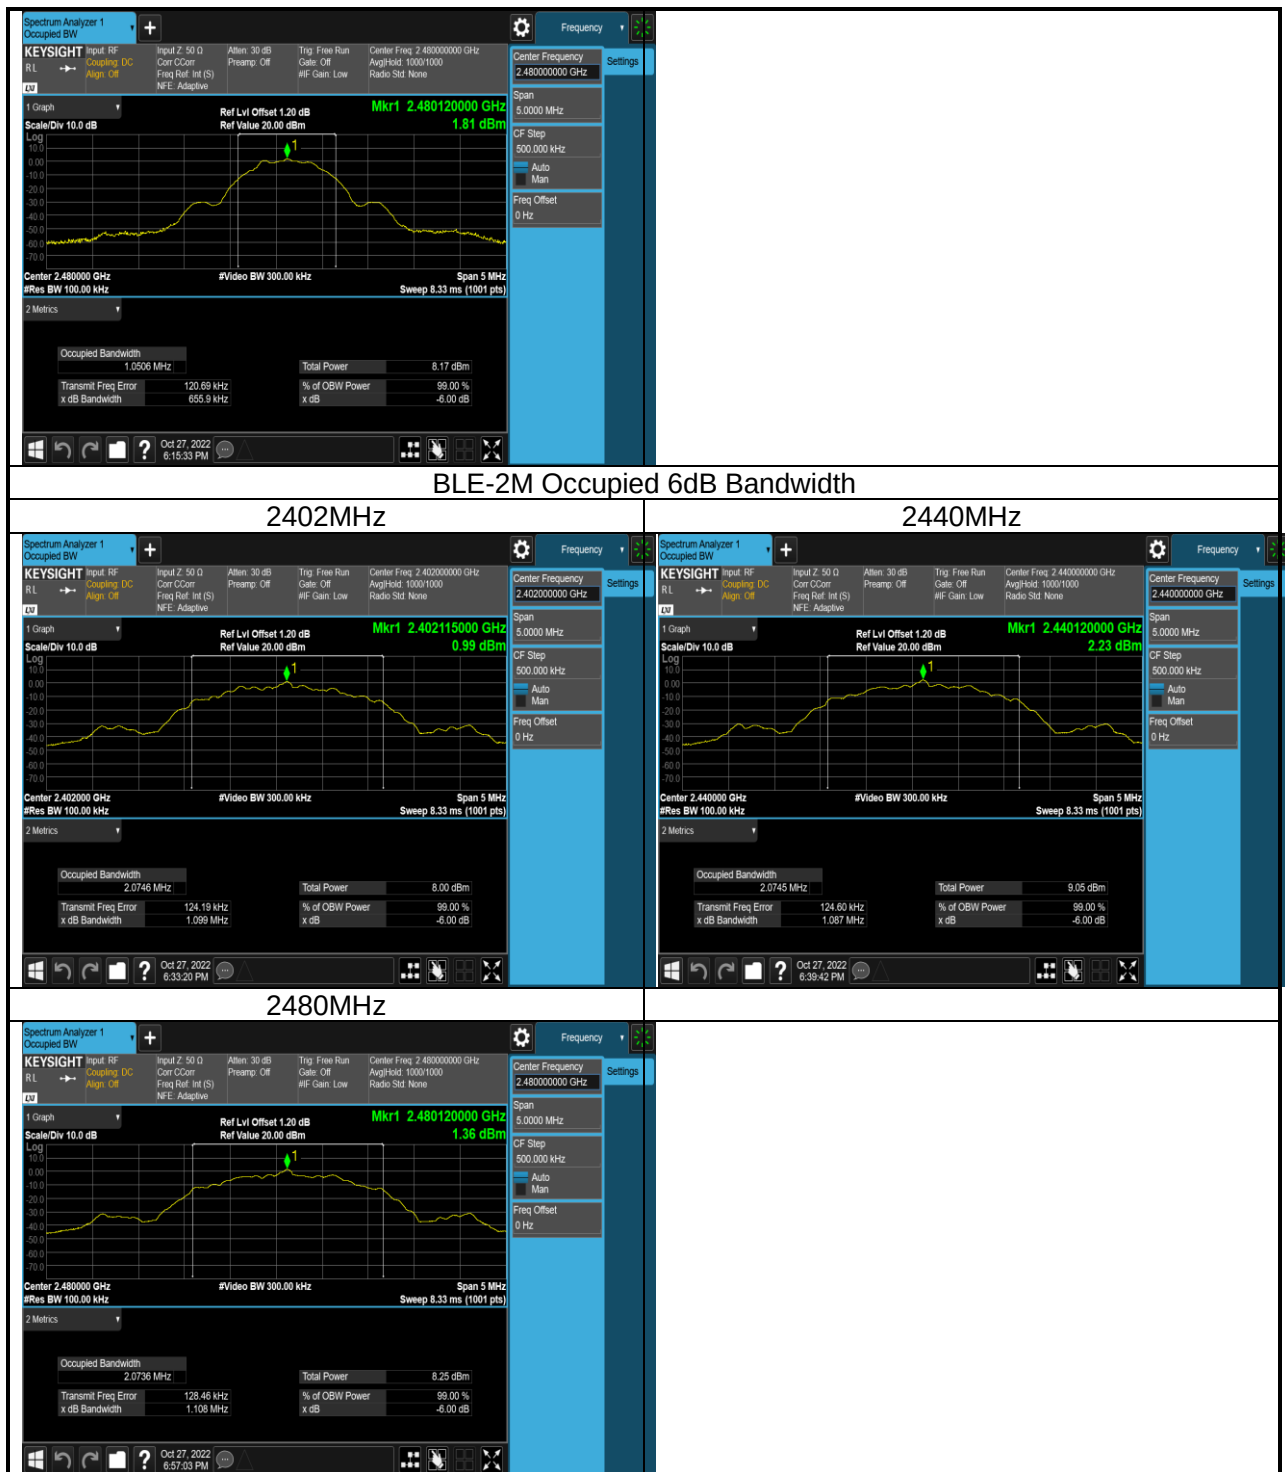


4. Occupied Bandwidth


4.1 Test Data

BLE-1M 99% Occupied Bandwidth		
Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	Result
2402	1.0201	Pass
2440	1.0198	Pass
2480	1.0430	Pass

BLE-2M 99% Occupied Bandwidth		
Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	Result
2402	2.0341	Pass
2440	2.0404	Pass
2480	2.0406	Pass

4.2 Test Plots

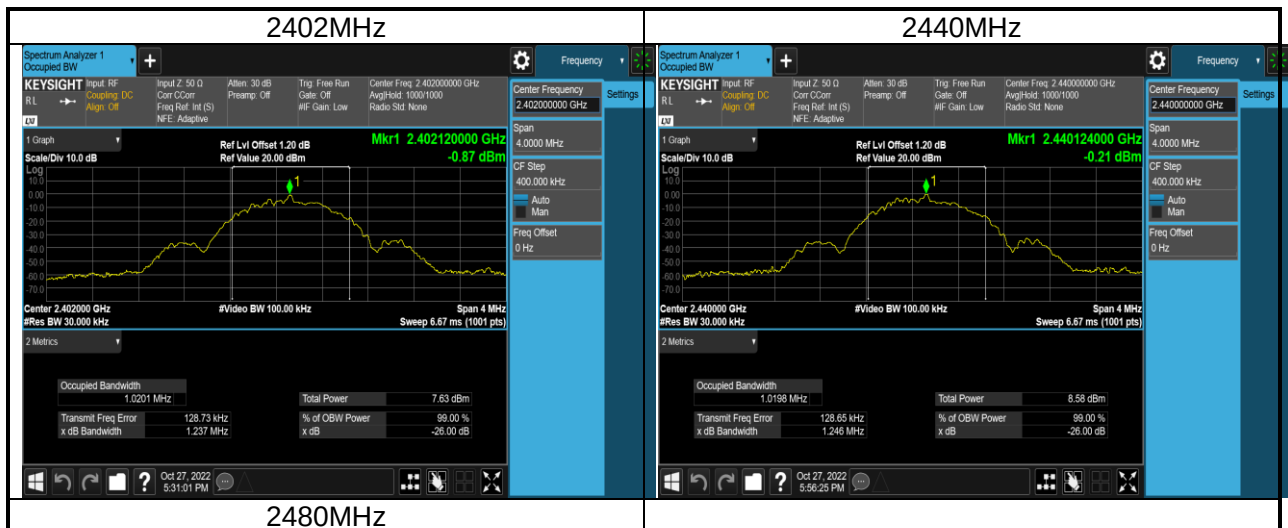

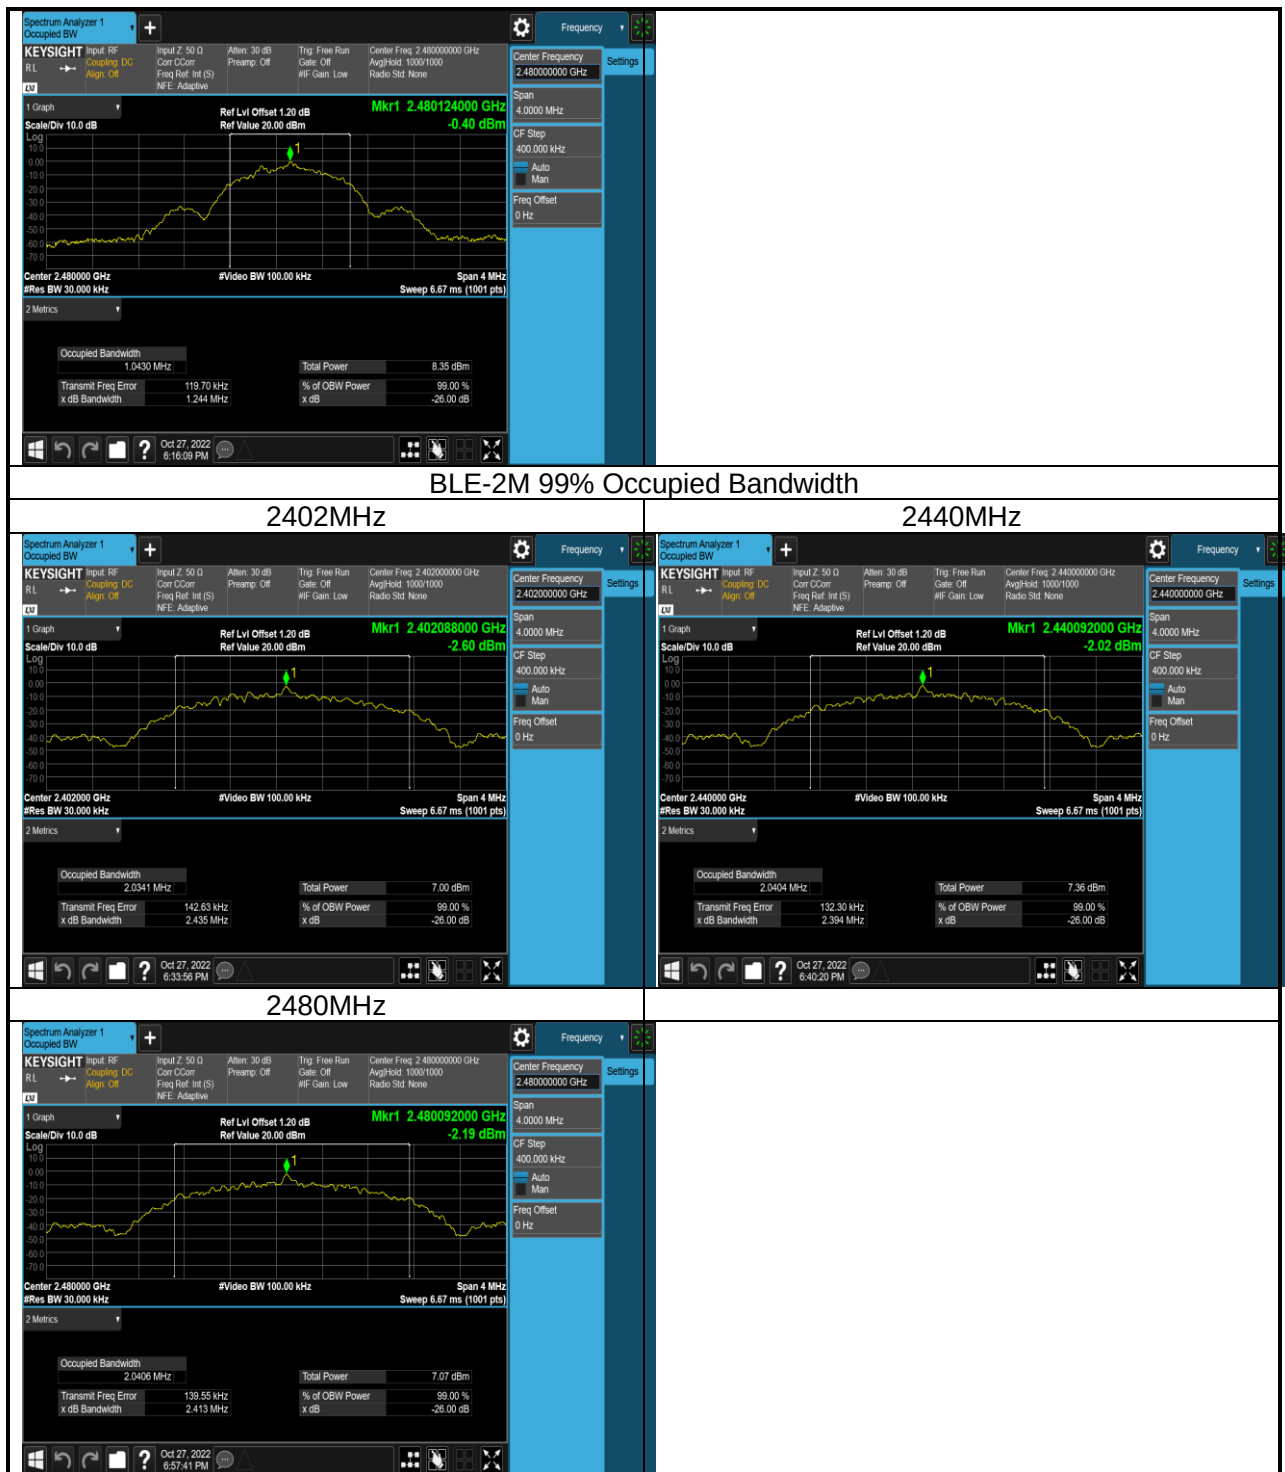


5. Emission outside the frequency band


5.1 Test Data

BLE-1M Transmitter Spurious Emission			
Test Frequency (MHz)	Test Range	Power (dBm)	Result
2402	1MHz~2310MHz	-57.01	Pass
2402	2500MHz~5000MHz	-55.60	Pass
2402	5000MHz~25000MHz	-42.68	Pass
2402	Band Edge	-54.12	Pass
2402	Reference Level	2.19	Pass
2440	1MHz~2310MHz	-57.88	Pass
2440	2500MHz~5000MHz	-47.13	Pass
2440	5000MHz~25000MHz	-42.66	Pass
2440	Band Edge	-58.54	Pass
2440	Reference Level	1.88	Pass
2480	1MHz~2310MHz	-57.09	Pass
2480	2500MHz~5000MHz	-49.02	Pass
2480	5000MHz~25000MHz	-42.71	Pass
2480	Band Edge	-53.36	Pass
2480	Reference Level	1.72	Pass

BLE-2M Transmitter Spurious Emission			
Test Frequency (MHz)	Test Range	Power (dBm)	Result
2402	1MHz~2310MHz	-57.07	Pass
2402	2500MHz~5000MHz	-50.99	Pass
2402	5000MHz~25000MHz	-41.96	Pass
2402	Band Edge	-37.39	Pass
2402	Reference Level	1.58	Pass
2440	1MHz~2310MHz	-57.41	Pass
2440	2500MHz~5000MHz	-56.69	Pass
2440	5000MHz~25000MHz	-42.10	Pass
2440	Band Edge	-58.97	Pass
2440	Reference Level	1.49	Pass
2480	1MHz~2310MHz	-55.36	Pass
2480	2500MHz~5000MHz	-55.93	Pass
2480	5000MHz~25000MHz	-43.15	Pass
2480	Band Edge	-49.43	Pass
2480	Reference Level	1.96	Pass


9.2 Test Plots

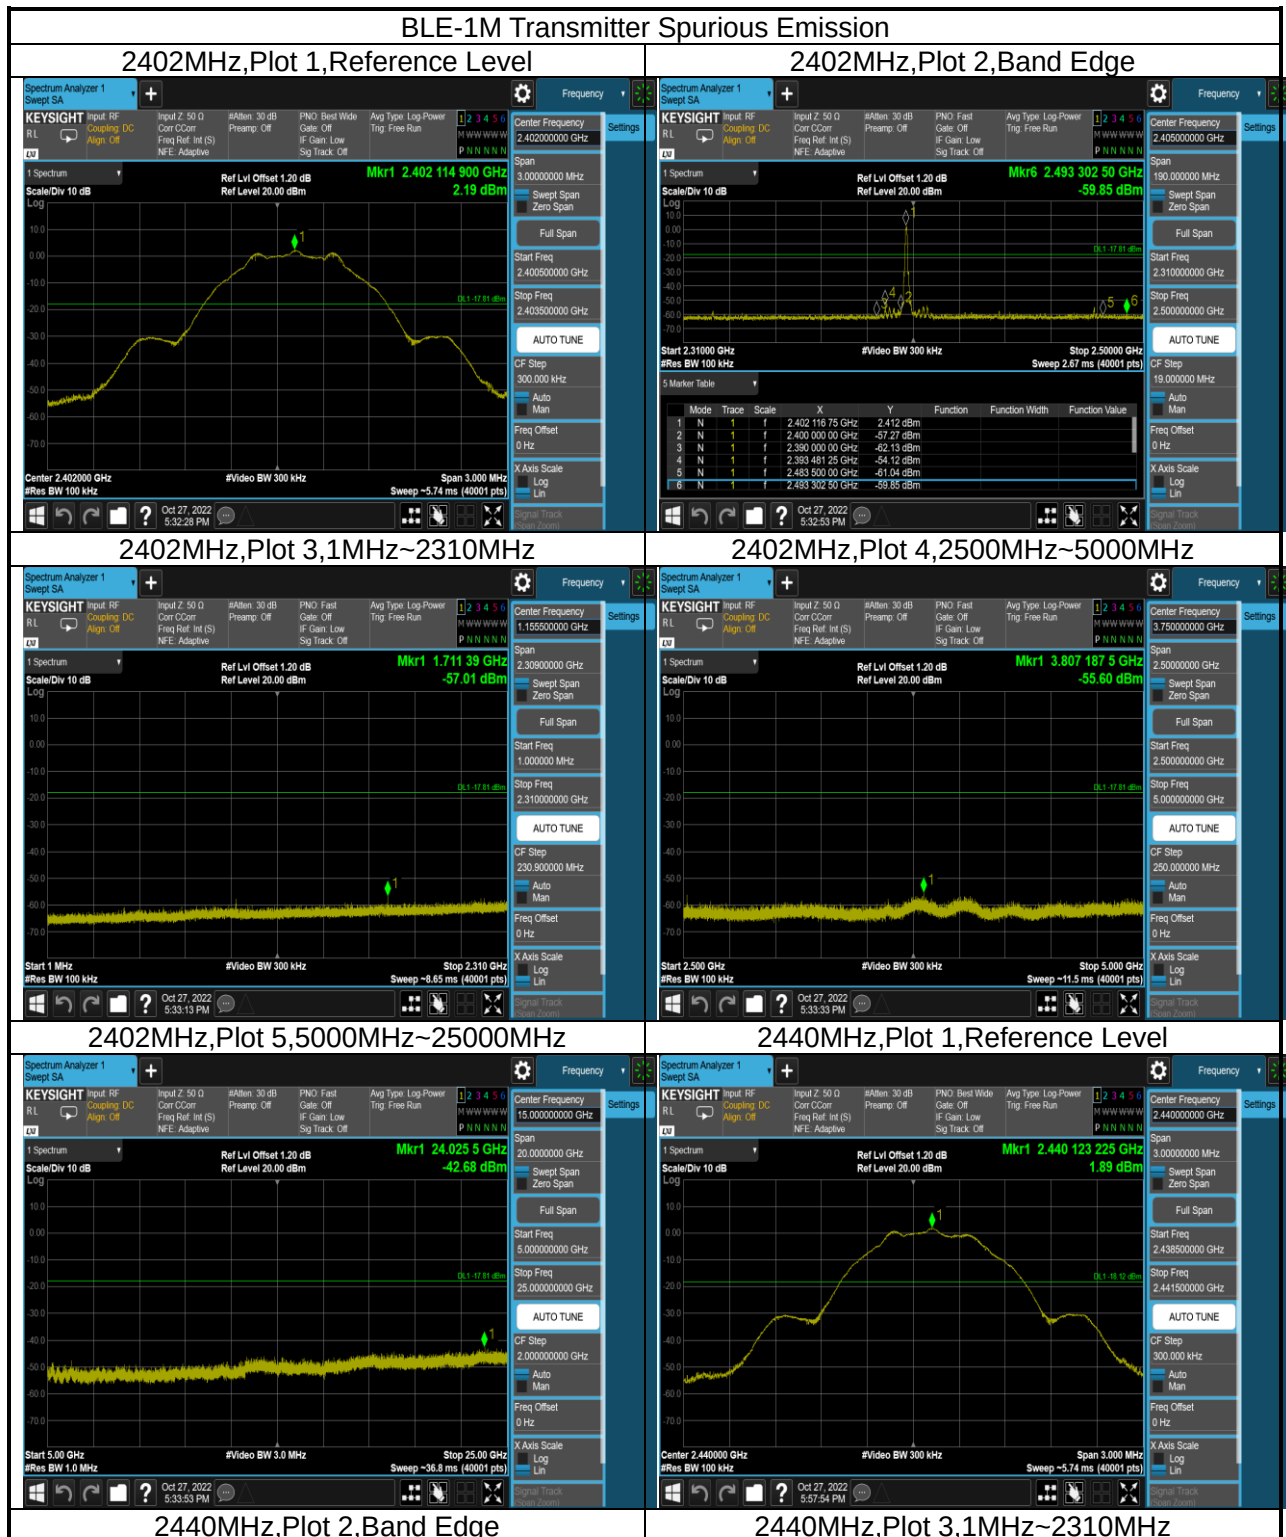

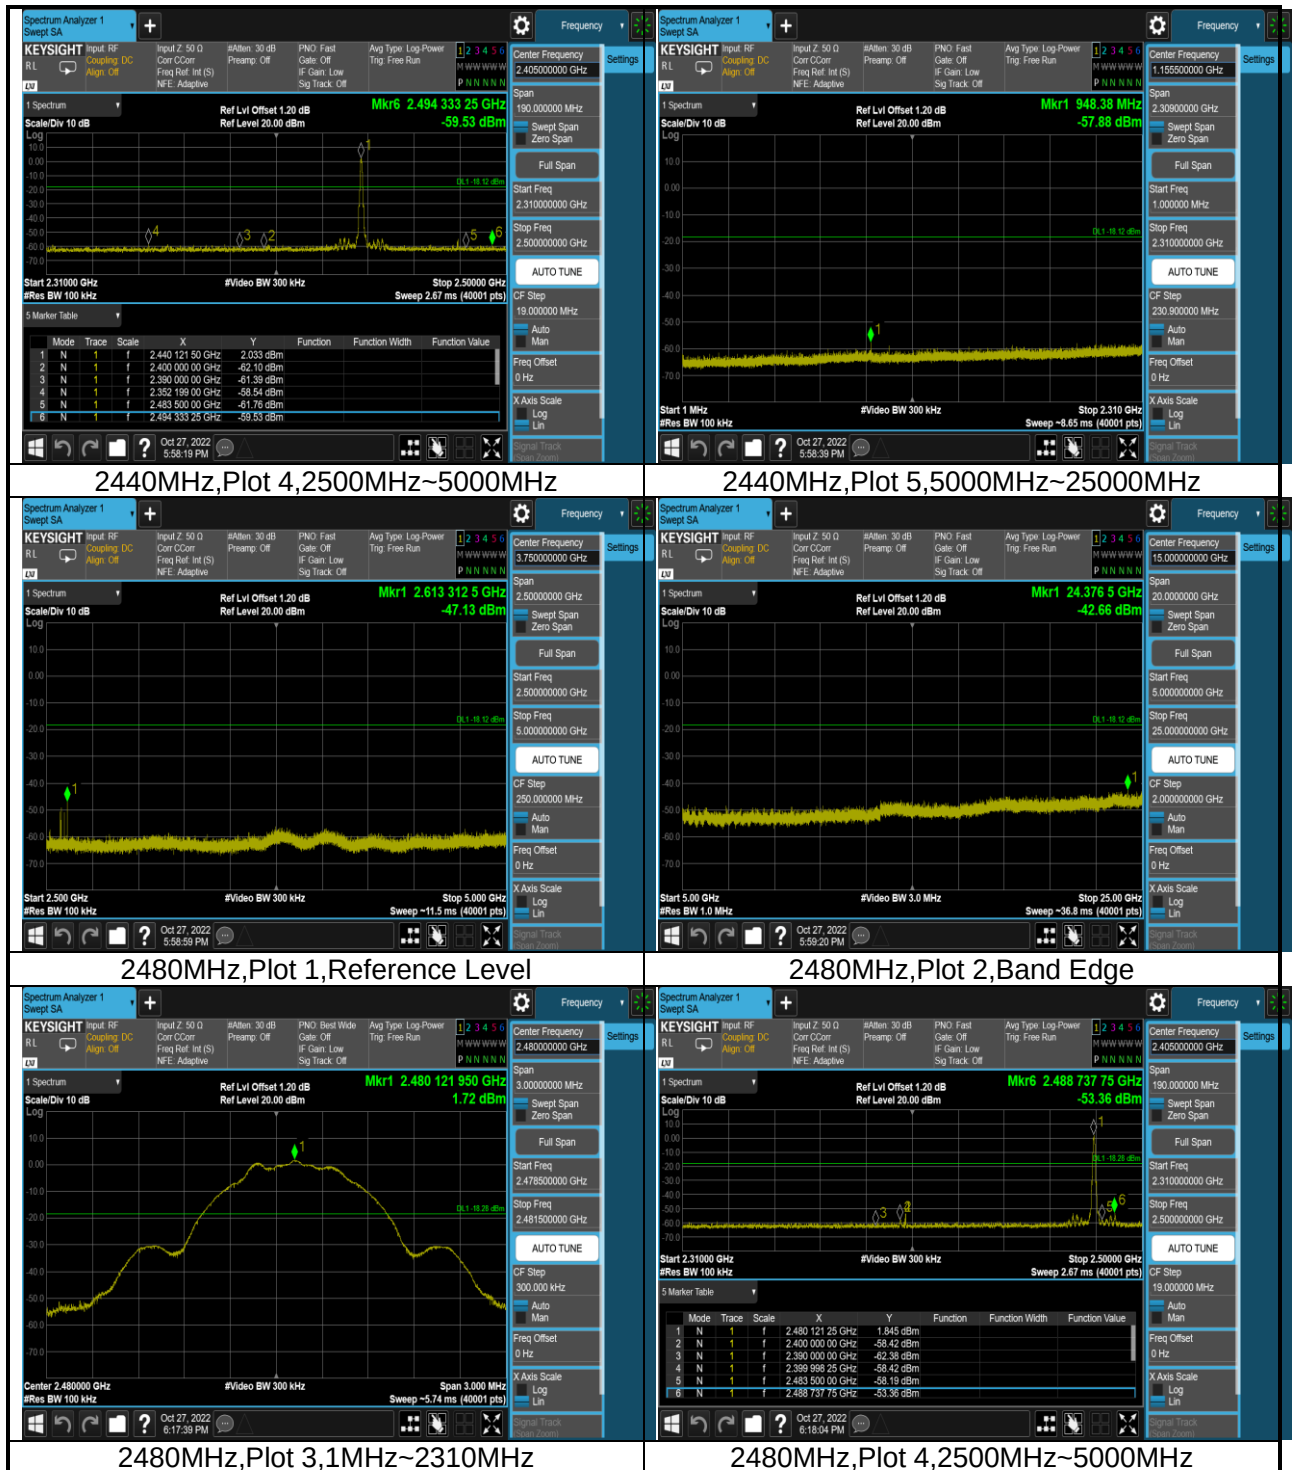



2480MHz,Plot 5,5000MHz~25000MHz

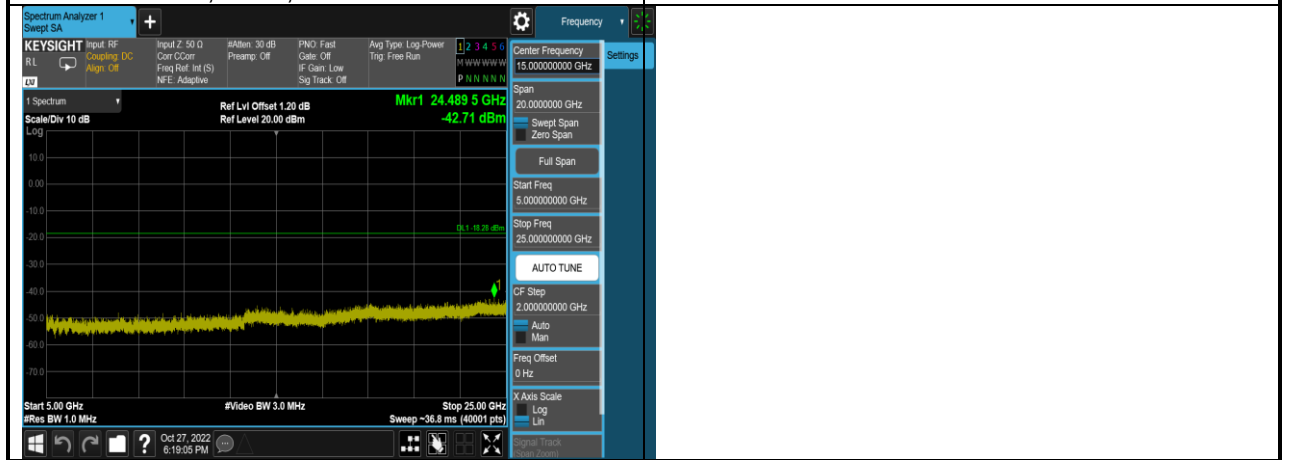


BLE-2M Transmitter Spurious Emission

2402MHz,Plot 1,Reference Level





2402MHz,Plot 3,1MHz~2310MHz


2402MHz,Plot 2,Band Edge

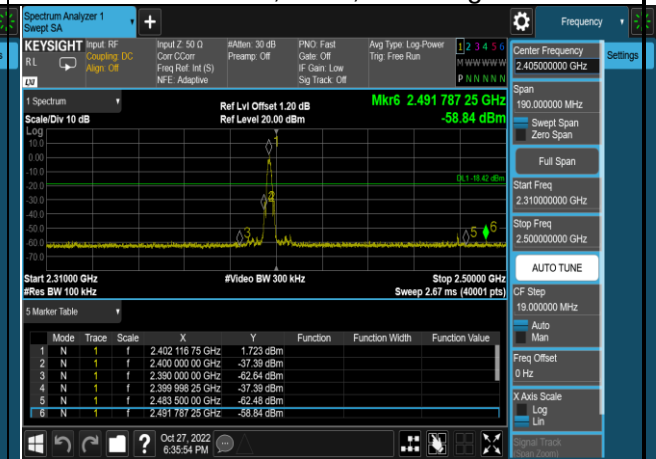

2402MHz,Plot 4,2500MHz~5000MHz

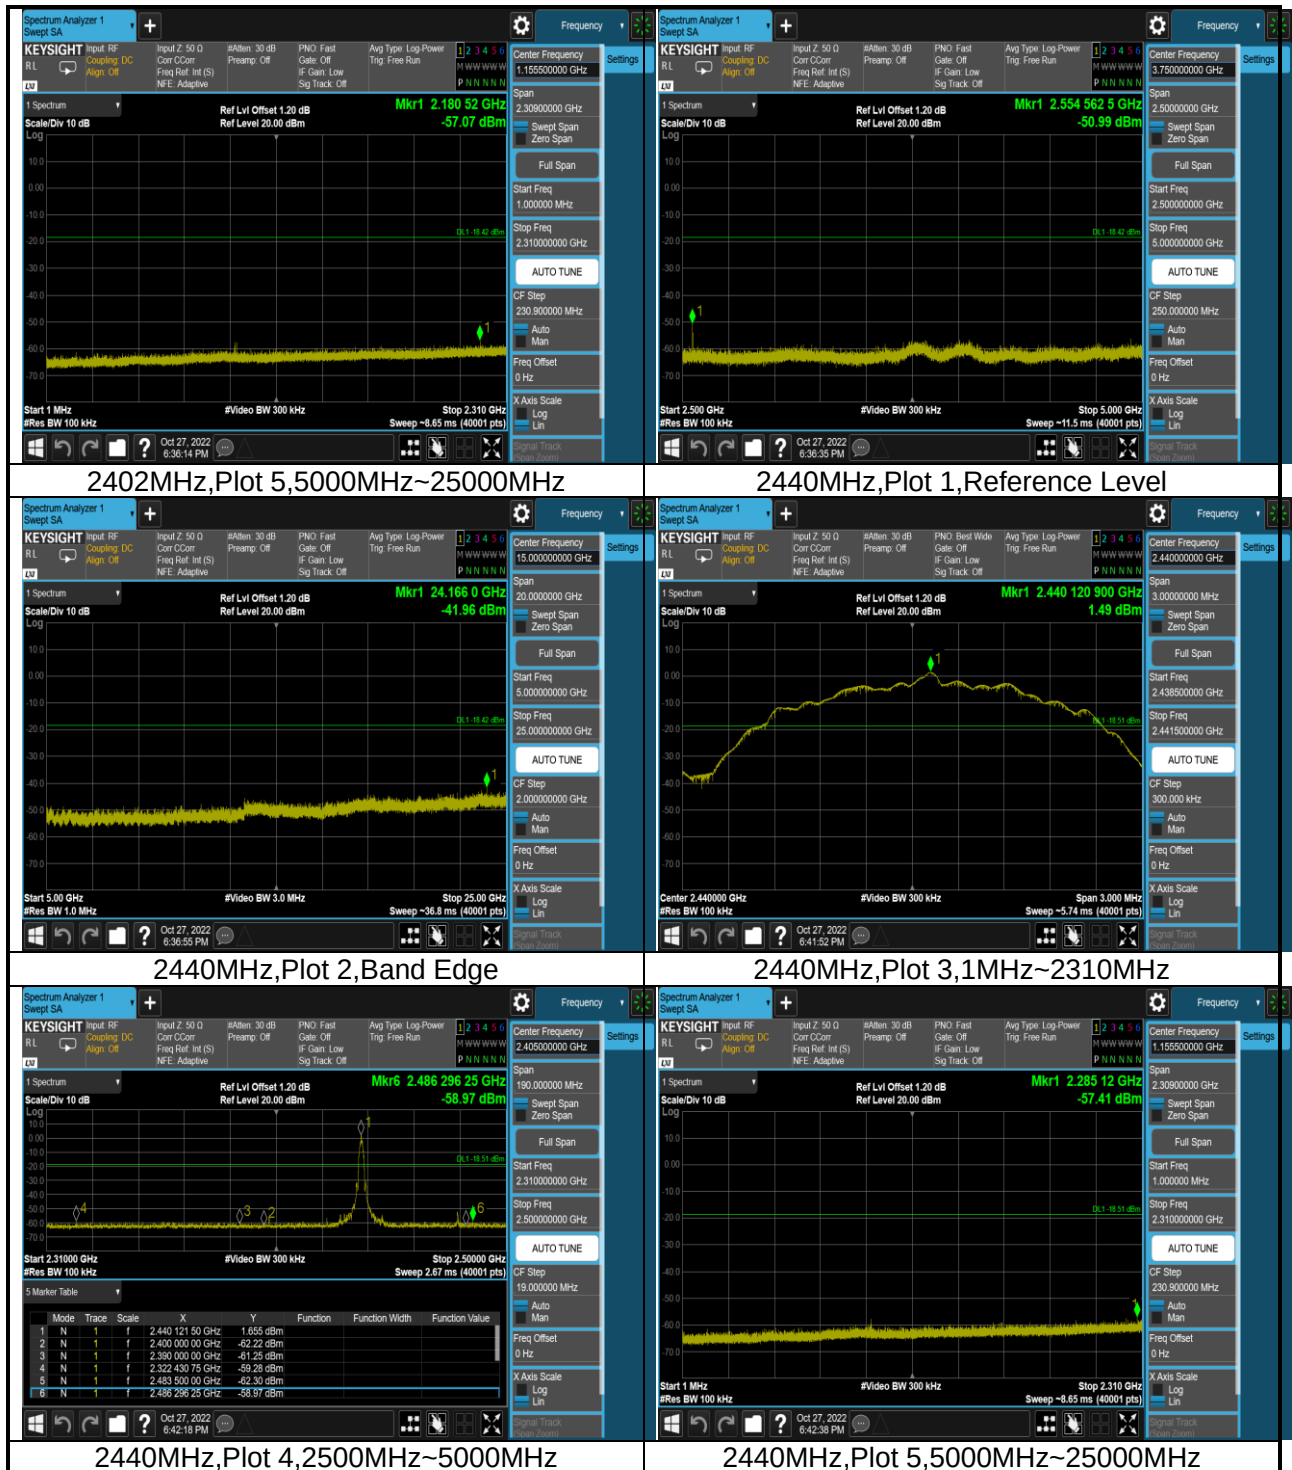

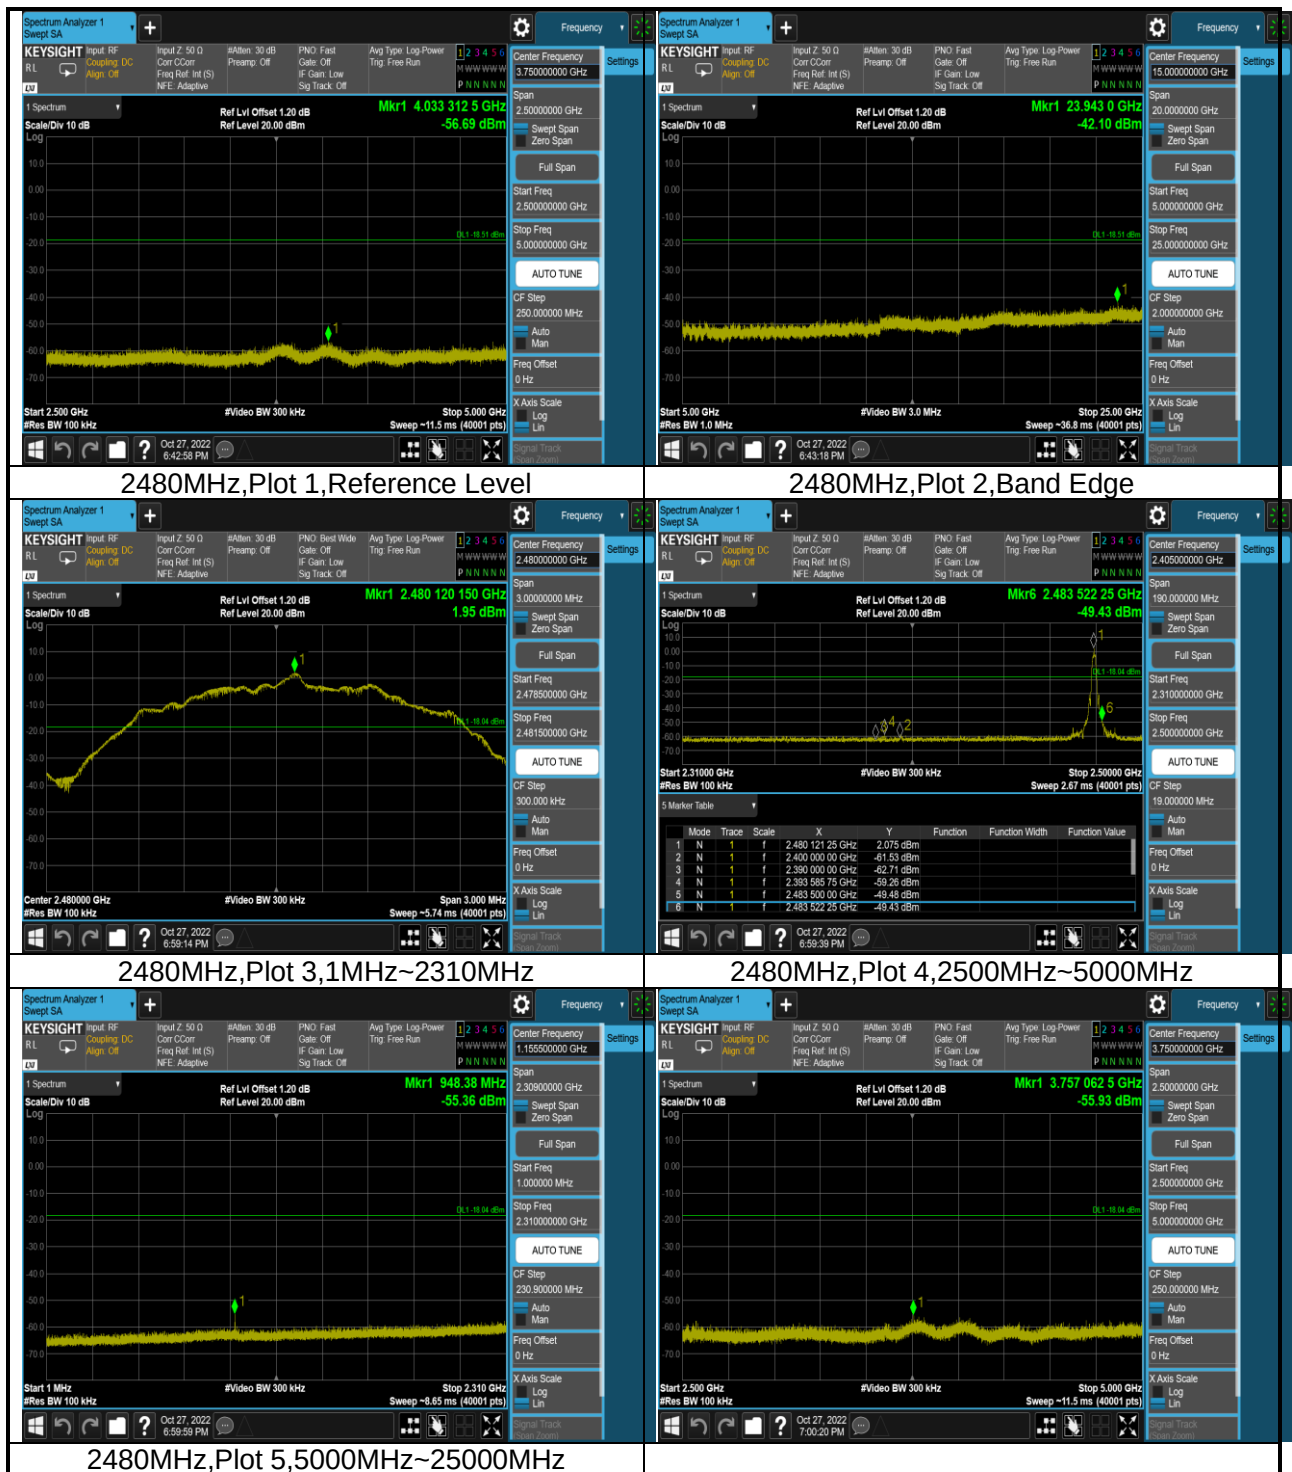

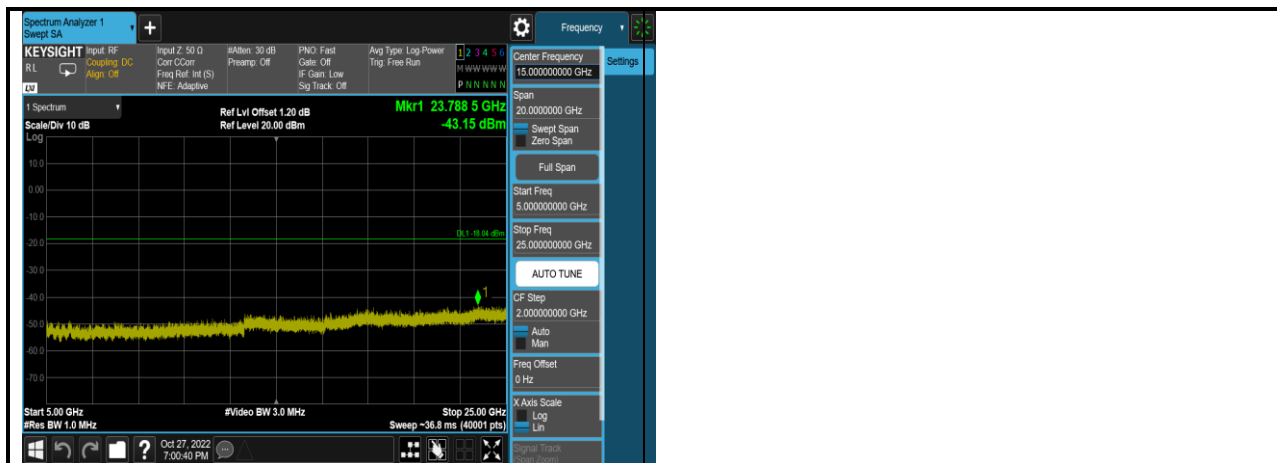

***** END *****