



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

Report Reference No..... : CTA24112800202

FCC ID..... : 2BEEDC7011E

Compiled by

(position+printed name+signature) : File administrators Xudong Zhang

Supervised by

(position+printed name+signature) : Project Engineer Zoey Cao

Approved by

(position+printed name+signature) : RF Manager Eric Wang

Date of issue : Dec. 07, 2024

Testing Laboratory Name : Shenzhen CTA Testing Technology Co., Ltd.

Address..... : Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name..... : ALLIED VANTAGE INTERNATIONAL LIMITED

Address..... : Unit 1805, 18/F., Stelux House, 698 Prince Edward Road East, San Po Kong, Kowloon, Hong Kong, China

Test specification : FCC CFR 47 PART 1, § 1.1310

Standard : KDB 680106 D01 Wireless Power Transfer v04

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : C7011E Charger

Manufacturer : ALLIED VANTAGE INTERNATIONAL LIMITED

Trade Mark : N/A

Model/Type reference : C7011E

Modulation Type : ASK

Operation Frequency..... : From 110KHz~205KHz

Rating : Input: DC 5V 2A
Output: 5W(Max)

Result : PASS

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST REPORT

Equipment under Test : C7011E Charger

Model /Type : C7011E

Listed Models : C7011EA1, C7011EA2, C7011EA3, C7011EA4, C7011EA5, C7011EA6, C7011EA7, C7011EA8, C7011EA9, C7011EA0, C7011EB1, C7011EB2, C7011EB3, C7011EB4, C7011EB5, C7011EB6, C7011EB7, C7011EB8, C7011EB9, C7011EB0, C7011EC1, C7011EC2, C7011EC3, C7011EC4, C7011EC5, C7011EC6, C7011EC7, C7011EC8, C7011EC9, C7011EC0, C7011ED1, C7011ED2, C7011ED3, C7011ED4, C7011ED5, C7011ED6, C7011ED7, C7011ED8, C7011ED9, C7011ED0, C7011EA1V1, C7011EA1V2, C7011EA1V3, C7011EA1V4, C7011EA1V5, C7011EB1V1, C7011EB1V2, C7011EB1V3, C7011EB1V4, C7011EB1V5, C7011EC1V1, C7011EC1V2, C7011EC1V3, C7011EC1V4, C7011EC1V5, C7011ED1V1, C7011ED1V2, C7011ED1V3, C7011ED1V4, C7011ED1V5

Model difference : The PCB board, circuit, structure and internal of these models are the same, Only model number is different for these model.

Applicant : **ALLIED VANTAGE INTERNATIONAL LIMITED**

Address : Unit 1805, 18/F., Stelux House, 698 Prince Edward Road East, San Po Kong, Kowloon, Hong Kong, China

Manufacturer : **ALLIED VANTAGE INTERNATIONAL LIMITED**

Address : Unit 1805, 18/F., Stelux House, 698 Prince Edward Road East, San Po Kong, Kowloon, Hong Kong, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

Contents

<u>1</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2</u>	<u>SUMMARY</u>	<u>5</u>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Description of the test mode	5
2.4	Special Accessories	5
2.5	Modifications	5
<u>3</u>	<u>TEST ENVIRONMENT</u>	<u>5</u>
3.1	Address of the test laboratory	5
3.2	Test Facility	6
3.3	Statement of the measurement uncertainty	6
3.4	Equipments Used during the Test	6
<u>4</u>	<u>TEST LIMIT</u>	<u>7</u>
4.1	Requirement	7
4.2	Test setup	8
4.3	Test Procedures	9
4.4	Equipment Approval Considerations of KDB 680106 D01v04	9
4.5	Test results	9
4.6	Conclusion	9
<u>5</u>	<u>PHOTOGRAPHS OF THE TEST SETUP</u>	<u>10</u>

1 TEST STANDARDS

The tests were performed according to following standards:

[680106 D01 Wireless Power Transfer v04:](#) EQUIPMENT AUTHORIZATION OF WIRELESS POWER TRANSFER DEVICES.

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: <http://www.cta-test.cn>

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Nov. 28, 2024
Testing commenced on	:	Nov. 28, 2024
Testing concluded on	:	Dec. 07, 2024

2.2 Product Description

Product Name:	C7011E Charger
Model/Type reference:	C7011E
Power supply:	Input: DC 5V 2A Output: 5W(Max)
Test samples ID:	CTA241128002-1# (Engineer sample) CTA241128002-2# (Normal sample)
Hardware version:	V1.0
Software version:	V1.0
Operation frequency:	110KHz - 205KHz
Modulation type:	ASK
Antenna type:	Loop coil antenna

2.3 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Modes:		
Mode 1	Wireless Charging	Recorded
Mode 2	Standby	Pre-tested

2.4 Special Accessories

The following is the EUT test of the auxiliary equipment provided by the laboratory:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
Phone	/	IPhone 11	/	/	/
Adapter	/	EP-TA20CBC	/	/	/

2.5 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

Fuhai Street, Bao'an District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Statement of the measurement uncertainty

Test	Measurement Uncertainty	Notes
Magnetic field measurement (9kHz~30MHz)	$\pm 7.8 \%$	(1)
Electric field measurements (9kHz~ 30MHz)	$\pm 7.8 \%$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	N-0231	June 24 2024	June 23 2025
Magnetic field probe 100cm2	Narda	ELT probe 100cm2	M0675	June 24 2024	June 23 2025

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

4 Test limit

4.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	/	/	f/300	<6
1500-100000	/	/	5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	/	/	f/1500	<30
1500-100000	/	/	1.0	<30

f = frequency in MHz


* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

4.2 Test setup

For mobile exposure conditions:

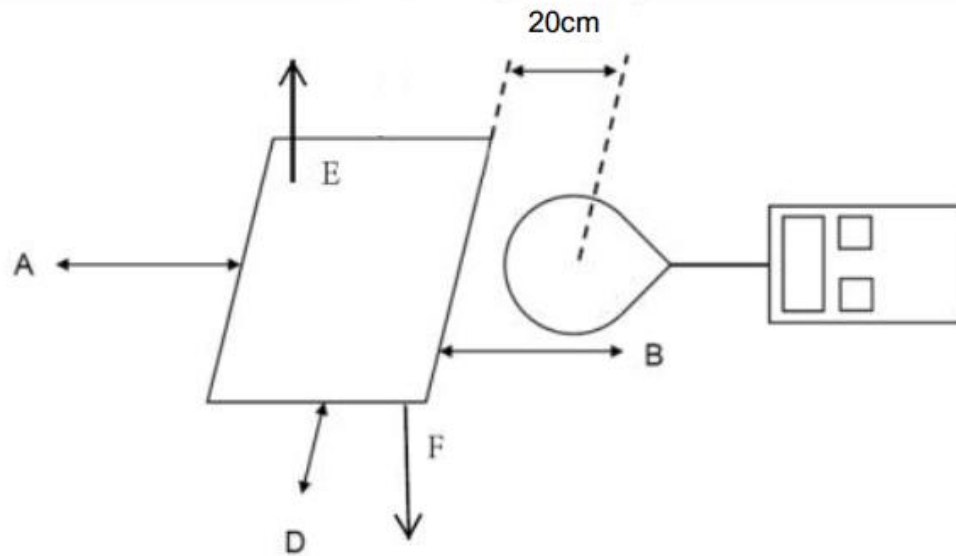

Note: The distance of the points A/B/C/D/E is 20cm.

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: <http://www.cta-test.cn>

4.3 Test Procedures

For mobile exposure conditions:

- The RF exposure test was performed in anechoic chamber.
- E and H-field measurements should be made with the center of the probe at a distance of 20 cm surrounding the primary/client pair.
- The highest emission level was recorded and compared with limit.
- The EUT was measured according to the KDB 680106 D01 Wireless Power Transfer v04.

4.4 Equipment Approval Considerations of KDB 680106 D01v04

Requirements of KDB 680106 D01	Yes / No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 110KHz - 205KHz
RF Exposure compliance may be ensured only for a minimum separation distance that is greater than 20 cm, while use conditions at smaller distances can still be considered unlikely.	Yes	The EUT H-field strengths at 20 cm surrounding the device.

4.5 Test results

H-Field Strength at 20 cm from the edges surrounding the EUT

Charging Battery Level	Unit	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)					FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	
1%	uT	0.122	0.405	0.389	0.393	0.380	0.384	--
1%	A/m	0.122	0.324	0.311	0.314	0.304	0.307	1.63
50%	uT	0.122	0.298	0.286	0.301	0.280	0.289	--
50%	A/m	0.122	0.238	0.229	0.241	0.224	0.231	1.63
99%	uT	0.122	0.180	0.174	0.179	0.183	0.171	--
99%	A/m	0.122	0.144	0.139	0.143	0.146	0.137	1.63

Note:1. $A/m = uT/1.25$

Note: 2. During test the frequencies less than 1 MHz and E/H ratio less than 1/10 of the 377-ohm free space wave impedance, only record H-field measurements result.

4.6 Conclusion

A minimum safety distance of 20 cm to the antenna is required when the device is charging a smart phone for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106 and confirmed by the FCC according to KDB Inquire..

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

5 Photographs of the Test Setup



***** End of Report *****

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: <http://www.cta-test.cn>