



[IEEE802.11ac (VHT80)]


5.6 GHz Band, Channel Low Horizontal Peak

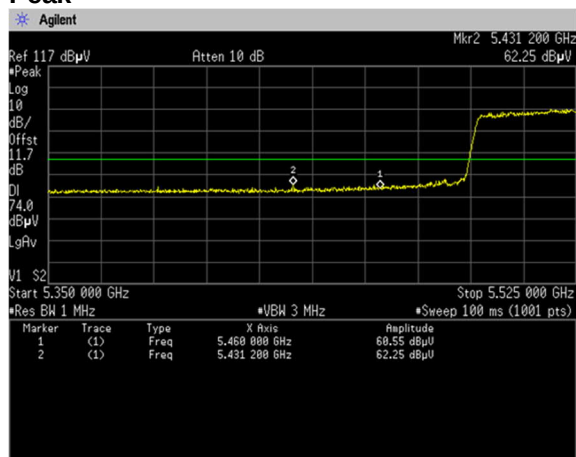


Average

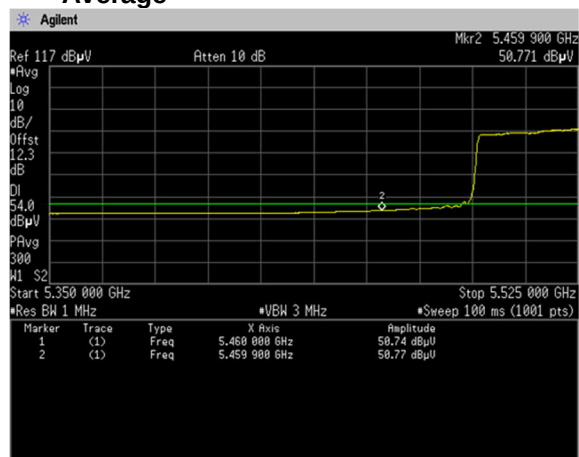

Vertical Peak

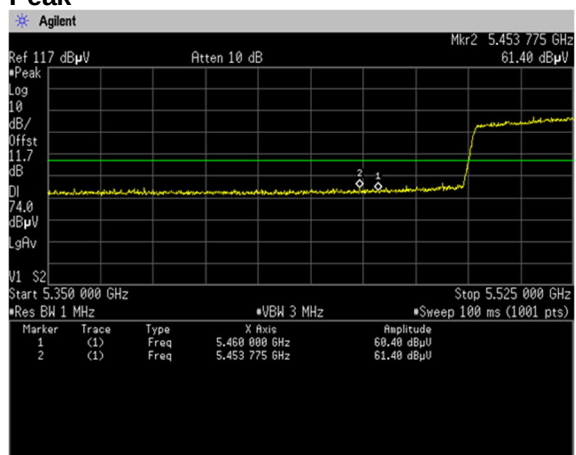

Average

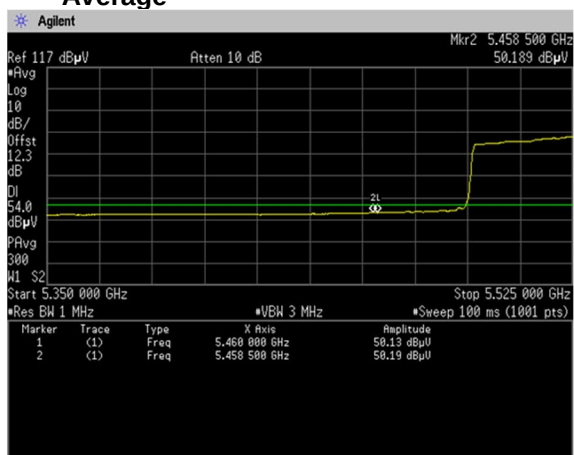


4.4.4.2 Non-Restricted Bandedge

[IEEE802.11a]


5.6 GHz Band, Channel High (140)

Peak

Horizontal

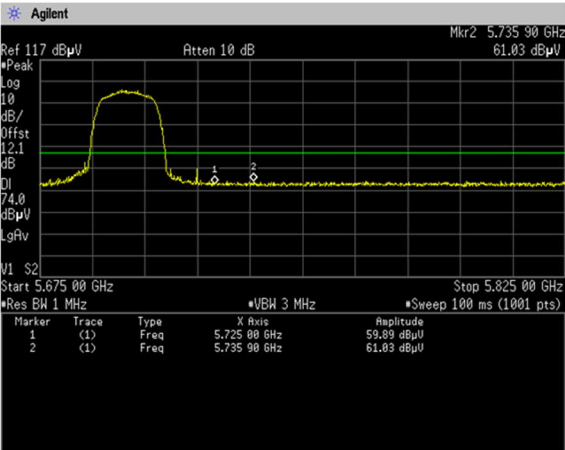


Vertical

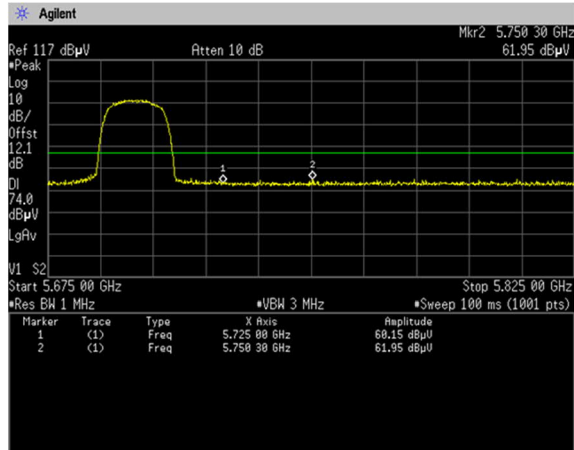


5.6 GHz Band, Channel High (144)

Peak

Horizontal

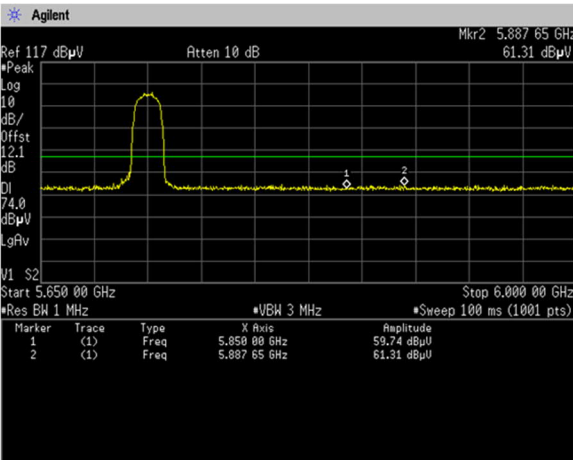

Vertical

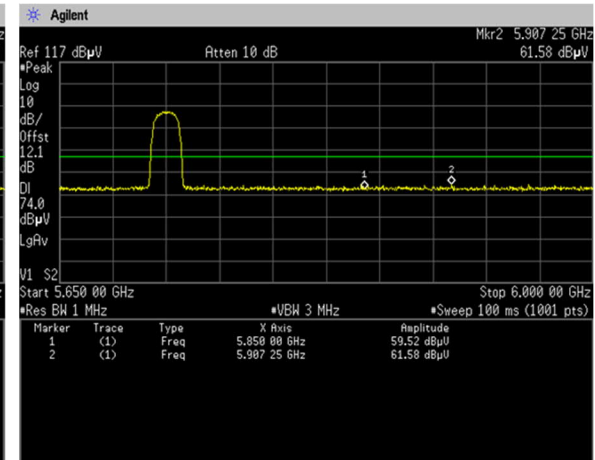


[IEEE802.11n (HT20)]


5.6GHz Band, Channel High (140)

Peak

Horizontal

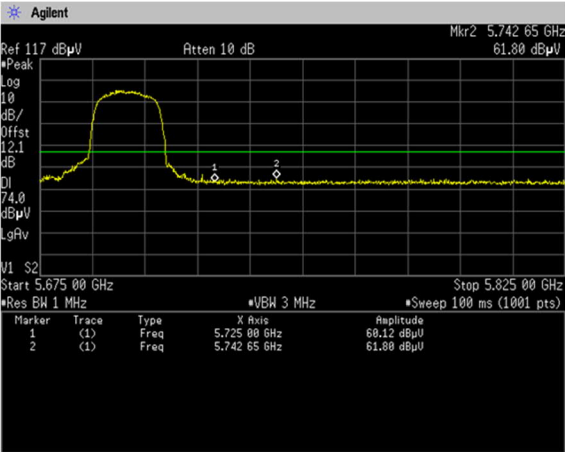


Vertical

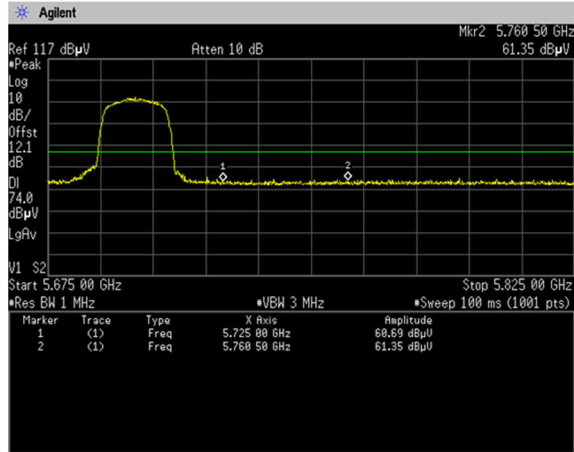


5.6GHz Band, Channel High (144)

Peak

Horizontal

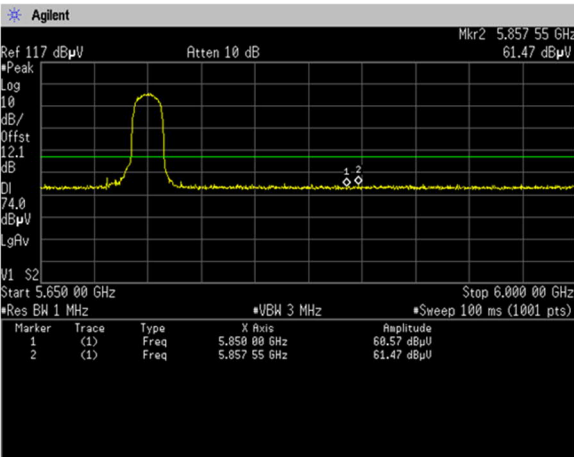

Vertical

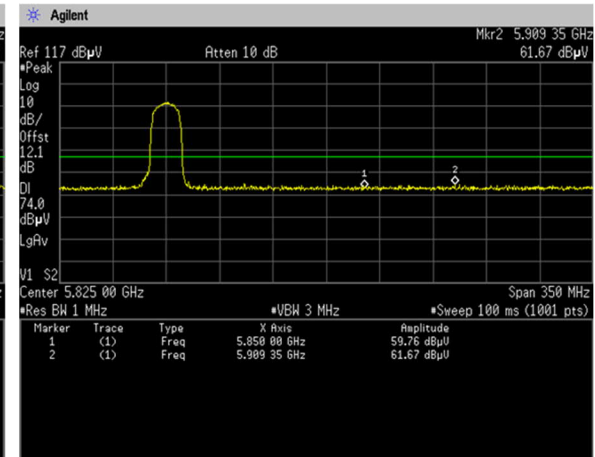


[IEEE802.11n (HT40)]


5.6GHz Band, Channel High (134)

Peak

Horizontal

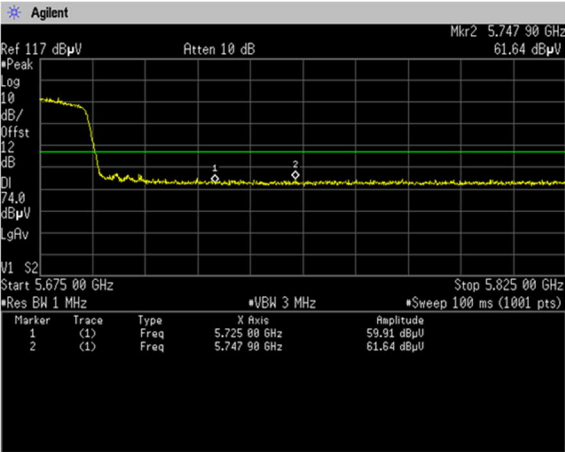


Vertical

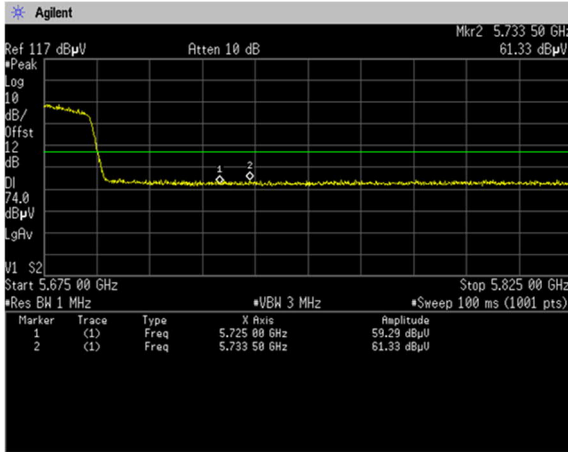


5.6GHz Band, Channel High (142)

Peak

Horizontal

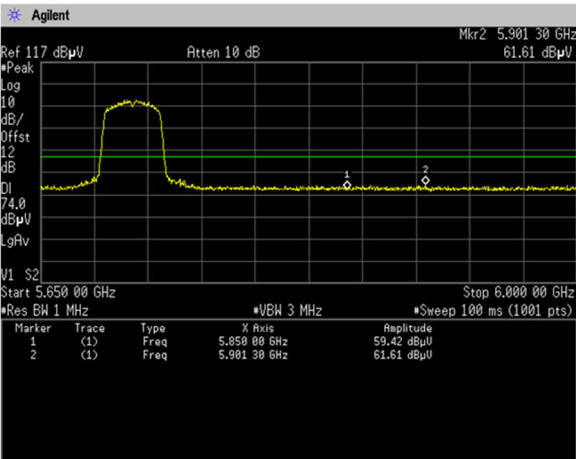

Vertical

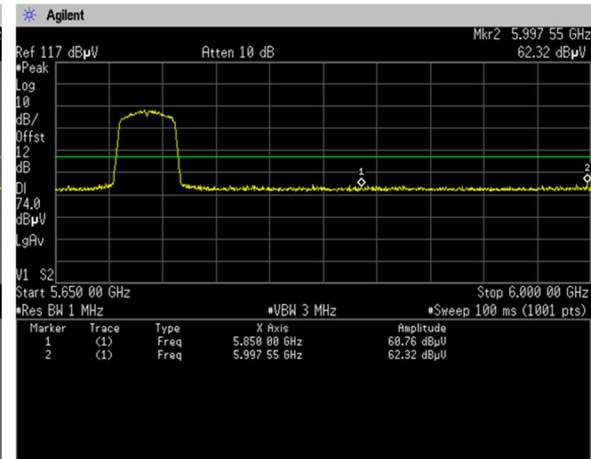


[IEEE802.11ac (VHT80)]


5.6GHz Band, Channel High (122)

Peak

Horizontal

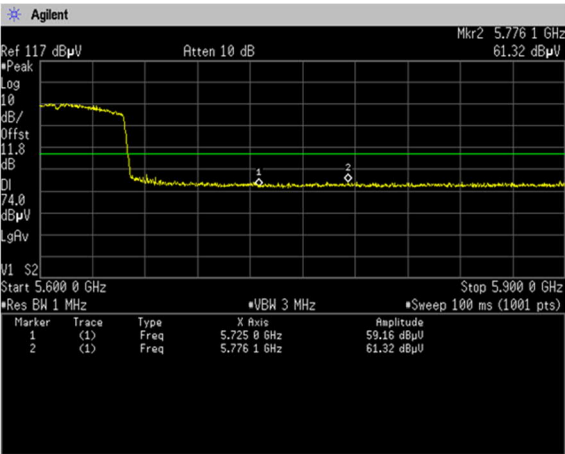


Vertical

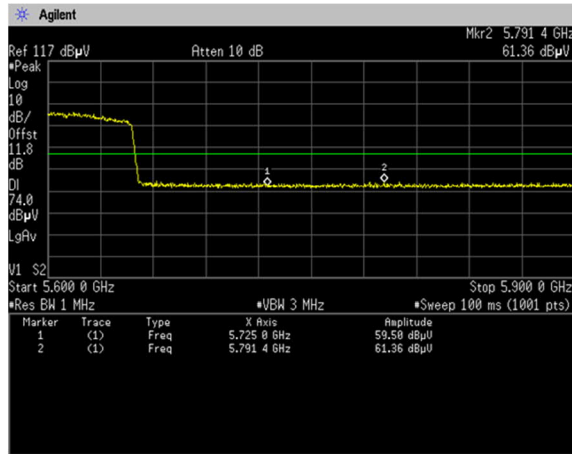


5.6GHz Band, Channel High (138)

Peak

Horizontal

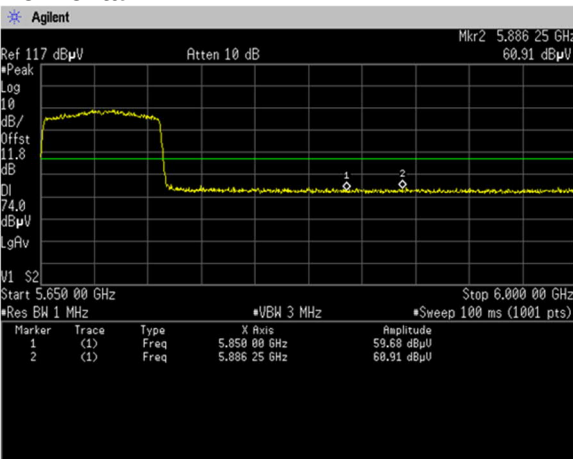

Vertical

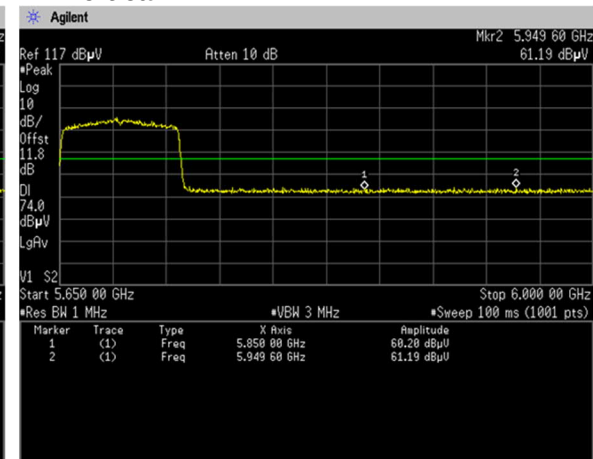

**4.4.4.3 Radiated Emissions**

Date	: 8-November-2021		
Temperature	: 22.1 [°C]		
Humidity	: 31.5 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 9-10-November-2021		
Temperature	: 23.5 [°C]		
Humidity	: 47.7 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 11-November-2021		
Temperature	: 22.6 [°C]		
Humidity	: 31.3 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Kazunori Saito</u>
Date	: 12-November-2021		
Temperature	: 24.4 [°C]		
Humidity	: 30.5 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>
Date	: 16-November-2021		
Temperature	: 22.1 [°C]		
Humidity	: 36.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Tadahiro Seino</u>

**[IEEE802.11a]
(5.2 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	36	5180	10360.00	H	PK	45.6	11.2		56.8	68.2	11.4
	40	5200	10400.00	H	PK	44.6	11.3		55.9	68.2	12.3
	48	5240	10480.00	H	PK	44.5	11.4		55.9	68.2	12.3

(5.3 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	52	5260	10520.00	H	PK	45.2	11.5		56.7	68.2	11.5
	56	5280	10560.00	H	PK	45.4	11.5		56.9	68.2	11.3
	64	5320	10640.00	H	PK	46.0	11.7		57.7	74.0	16.3
			10640.00	H	AV	32.1	11.7	0.141	43.9	54.0	10.1

(5.6 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a	100	5500	5465.30	H	PK	48.9	11.8		60.7	68.2	7.5
			5467.60	V	PK	49.3	11.8		61.1	68.2	7.1
			11000.00	H	PK	45.3	12.3		57.6	74.0	16.4
			11000.00	H	AV	31.7	12.3	0.135	44.1	54.0	9.9
	116	5580	11160.00	H	PK	45.3	12.3		57.6	74.0	16.4
			11160.00	H	AV	32.0	12.3	0.135	44.4	54.0	9.6
	140	5700	11400.00	H	PK	46.1	12.5		58.6	74.0	15.4
			11400.00	H	AV	31.0	12.5	0.135	43.6	54.0	10.4
	144	5720	11440.00	H	PK	46.0	12.5		58.5	74.0	15.5
			11440.00	H	AV	30.8	12.5	0.135	43.4	54.0	10.6

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

[IEEE802.11n (HT20)]
(5.2 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	36	5180	10360.00	V	PK	46.0	11.2		57.2	68.2	11.0
	40	5200	10400.00	V	PK	46.3	11.3		57.6	68.2	10.6
	48	5240	10480.00	V	PK	45.9	11.4		57.3	68.2	10.9

(5.3 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	52	5260	10520.00	V	PK	46.0	11.5		57.5	68.2	10.7
	56	5280	10560.00	V	PK	46.2	11.5		57.7	68.2	10.5
	64	5320	10640.00	V	PK	46.7	11.7		58.4	74.0	15.6
			10640.00	V	AV	32.1	11.7	0.146	43.9	54.0	10.1

(5.6 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (20MHz)	100	5500	5468.98	H	PK	50.5	11.8		62.3	68.2	5.9
			5467.01	V	PK	50.0	11.8		61.8	68.2	6.4
			11000.00	V	PK	46.0	12.3		58.3	74.0	15.7
			11000.00	V	AV	30.8	12.3	0.152	43.3	54.0	10.7
	116	5580	11160.00	V	PK	45.8	12.3		58.1	74.0	15.9
			11160.00	V	AV	31.3	12.3	0.152	43.8	54.0	10.2
	140	5700	11400.00	V	PK	46.1	12.5		58.6	74.0	15.4
			11400.00	V	AV	31.1	12.5	0.152	43.8	54.0	10.2
	144	5720	11440.00	V	PK	46.2	12.5		58.7	74.0	15.3
			11440.00	V	AV	31.1	12.5	0.152	43.8	54.0	10.2

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

[IEEE802.11n (HT40)]**(5.2 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	38	5190	10380.00	H	PK	46.2	11.2		57.4	68.2	10.8
	46	5230	10460.00	H	PK	45.9	11.4		57.3	68.2	10.9

(5.3 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	54	5270	10540.00	H	PK	46.2	11.5		57.7	68.2	10.5
	62	5310	10620.00	H	PK	46.9	11.7		58.6	74.0	15.4
			10620.00	H	AV	31.9	11.7	0.291	43.9	54.0	10.1

(5.6 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11n (40MHz)	102	5510	5466.40	H	PK	49.8	11.8		61.6	68.2	6.6
			5467.60	V	PK	49.6	11.8		61.4	68.2	6.8
			11020.00	H	PK	45.8	12.3		58.1	74.0	15.9
			11020.00	H	AV	32.0	12.3	0.304	44.6	54.0	9.4
	110	5550	11100.00	H	PK	46.3	12.3		58.6	74.0	15.4
			11100.00	H	AV	31.8	12.3	0.304	44.4	54.0	9.6
			11340.00	H	PK	46.4	12.4		58.8	74.0	15.2
	134	5670	11340.00	H	AV	31.4	12.4	0.304	44.1	54.0	9.9
			11420.00	H	PK	46.0	12.5		58.5	74.0	15.5
	142	5710	11420.00	H	PK	46.0	12.5		58.5	74.0	15.5
			11420.00	H	AV	31.0	12.5	0.304	43.8	54.0	10.2

Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

[IEEE802.11ac (VHT80)]**(5.2 GHz Band)**

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	42	5210	10420.00	H	PK	45.7	11.3		57.0	68.2	11.2

(5.3 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	58	5290	10580.00	H	PK	46.7	11.6		58.3	68.2	9.9

(5.6 GHz Band)

Mode	Channel	Frequency (MHz)	Frequency (MHz)	ANT H/V	Detector PK/AV	Reading (dBμV)	C.F (dB)	DCF (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11ac (80MHz)	106	5530	5461.20	H	PK	50.6	11.8		62.4	68.2	5.8
			5469.10	V	PK	50.3	11.8		62.1	68.2	6.1
			11060.00	H	PK	46.4	12.3		58.7	74.0	15.3
			11060.00	H	AV	32.1	12.3	0.558	45.0	54.0	9.0
	122	5610	11220.00	H	PK	46.1	12.4		58.5	74.0	15.5
			11220.00	H	AV	31.7	12.4	0.556	44.7	54.0	9.3
	138	5690	11380.00	H	PK	46.0	12.5		58.5	74.0	15.5
			11380.00	H	AV	31.3	12.5	0.564	44.4	54.0	9.6


Note:

1. Emission Level (Margin) = Limit - [Reading + C.F (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 30 MHz to 1000 MHz at the 3 meters distance.
3. No emission was detected in the receive mode.

4.4.4.4 Measurement chart

Transmission mode

[11a]

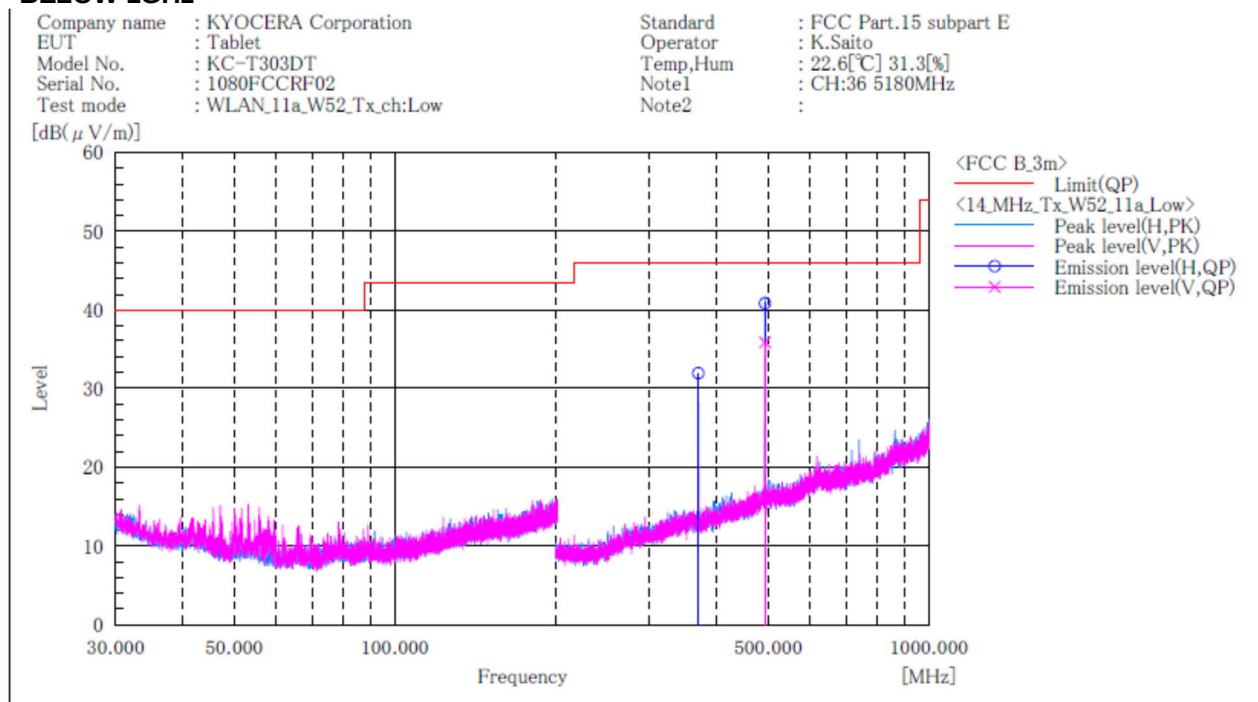
W52 / Channel Low
BELOW 1GHz

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.744	H	44.1	-12.2	31.9	46.0	14.1	100.0	88.0	
2	493.001	H	50.1	-9.2	40.9	46.0	5.1	193.0	33.0	
3	493.001	V	45.0	-9.2	35.8	46.0	10.2	207.0	328.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

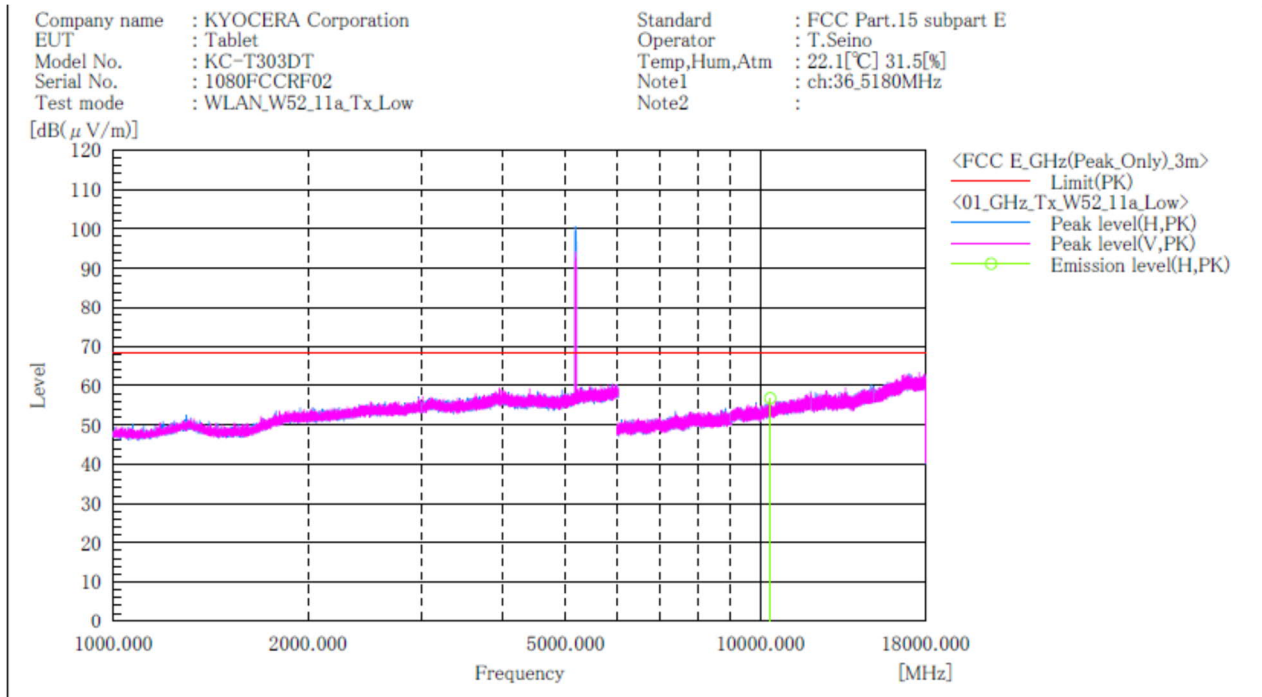[11a]**W52 / Channel Low
ABOVE 1GHz****Final Result**

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		PK [dB(μV)]	[dB(1/m)]	PK [dB(μV/m)]	PK [dB(μV/m)]	PK [dB]	[cm]	[°]	
1	10360.000	H	45.6	11.2	56.8	68.2	11.4	100.0	67.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W52 / Channel Middle
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11a_W52_Tx_ch:Mid

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:40 5200MHz
 Note2 :

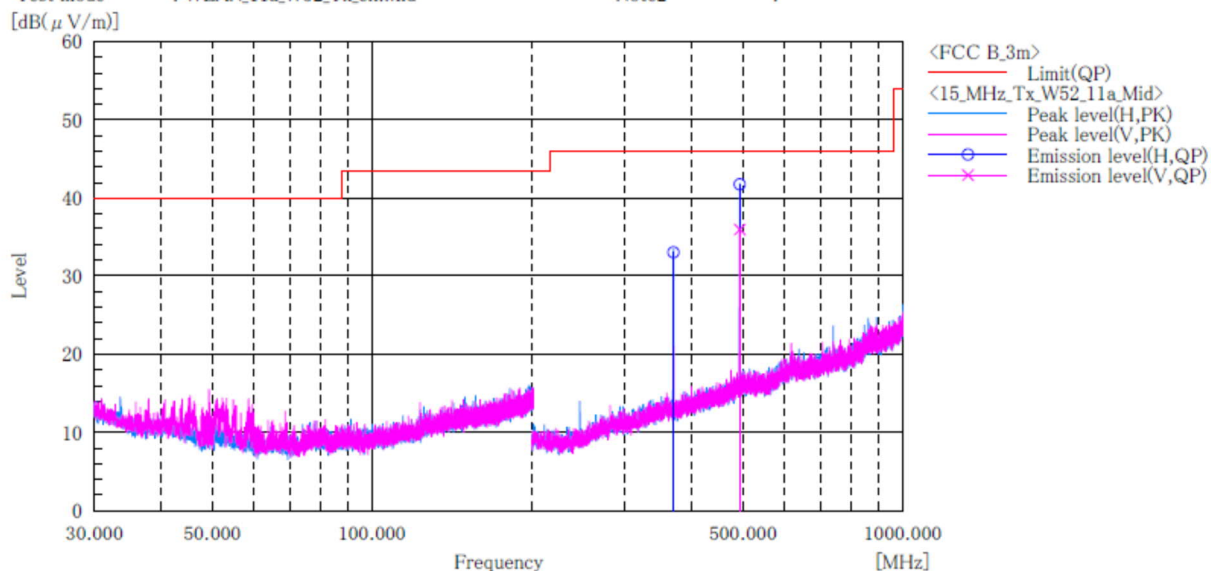


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.750	H	45.2	-12.2	33.0	46.0	13.0	100.0	237.0	
2	493.001	H	51.0	-9.2	41.8	46.0	4.2	203.0	265.0	
3	493.001	V	45.1	-9.2	35.9	46.0	10.1	210.0	340.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

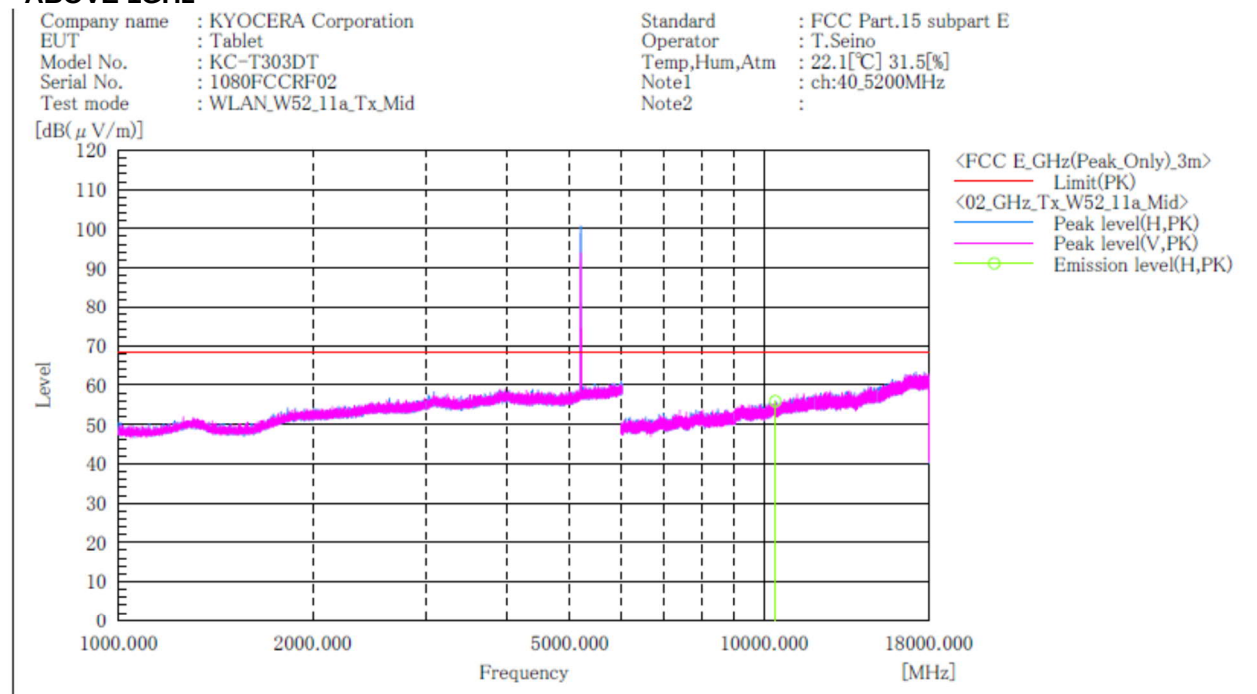[11a]**W52 / Channel Middle
ABOVE 1GHz****Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10400.000	H	44.6	11.3	55.9	68.2	12.3	100.0	69.0	


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W52 / Channel High
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCRF02
 Test mode : WLAN_11a_W52_Tx_ch:High

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:48 5240MHz
 Note2 :

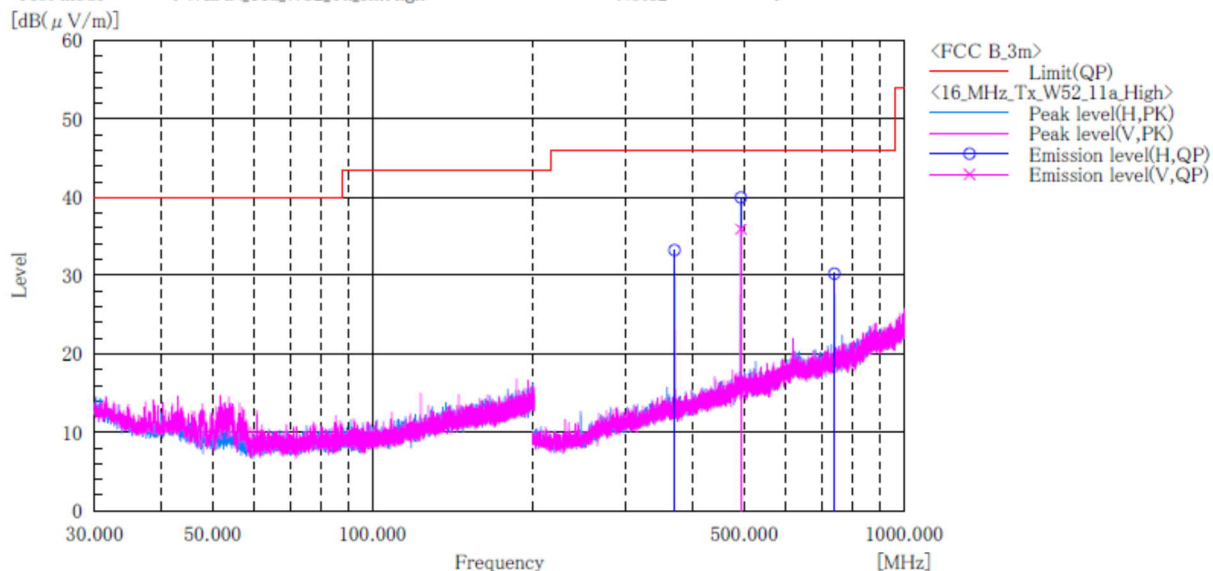

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.753	H	45.4	-12.2	33.2	46.0	12.8	100.0	248.0	
2	493.001	H	49.2	-9.2	40.0	46.0	6.0	190.0	40.0	
3	493.001	V	45.1	-9.2	35.9	46.0	10.1	209.0	331.0	
4	739.488	H	36.2	-6.0	30.2	46.0	15.8	129.0	281.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11a]

W52 / Channel High
ABOVE 1GHz

Company name : KYOCERA Corporation
EUT : Tablet
Model No. : KC-T303DT
Serial No. : 1080FCCR02
Test mode : WLAN_W52_11a_Tx_High

Standard : FCC Part.15 subpart E
Operator : T.Seino
Temp,Hum,Atm : 22.1[°C] 31.5[%]
Note1 : ch:48_5240MHz
Note2 :

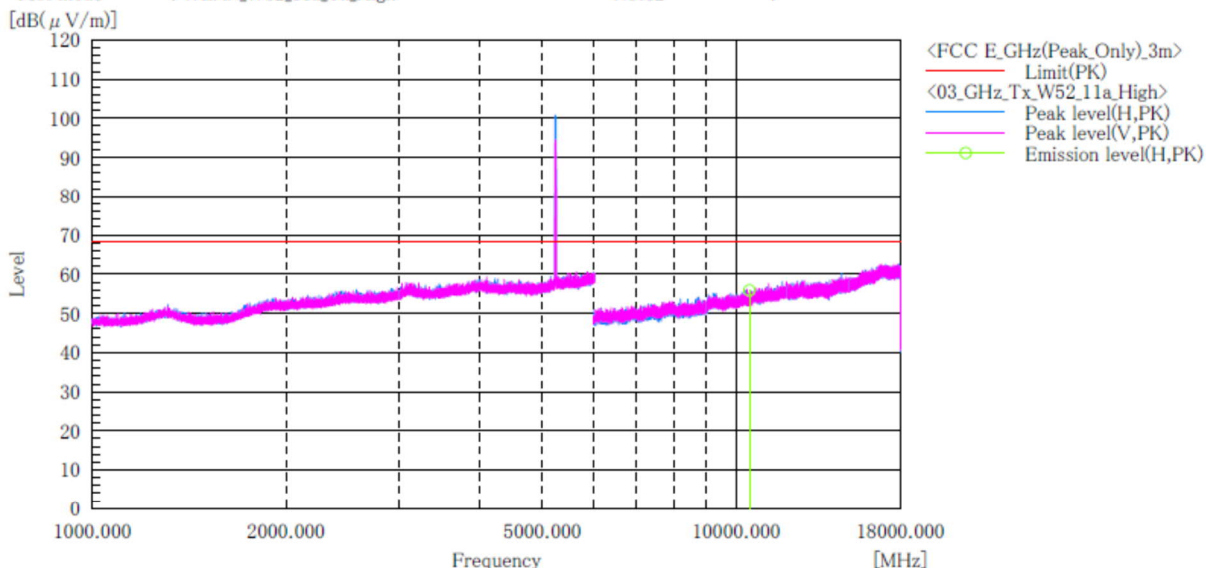

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10480.000	H	44.5	11.4	55.9	68.2	12.3	100.0	83.0	

Note:


- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]**W53 / Channel Low
BELOW 1GHz**

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11a_W52_Tx_ch:High

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:52 5260MHz
 Note2 :

[dB(μV/m)]

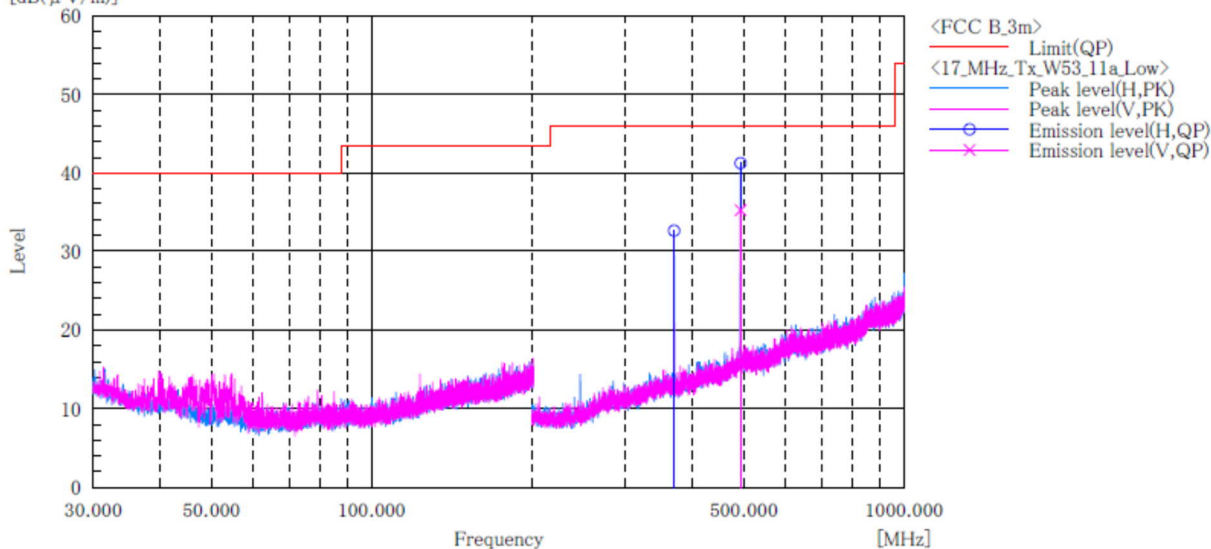**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.759	H	44.8	-12.2	32.6	46.0	13.4	100.0	246.0	
2	493.001	H	50.5	-9.2	41.3	46.0	4.7	198.0	262.0	
3	493.001	V	44.4	-9.2	35.2	46.0	10.8	202.0	344.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]

[11a]**W53 / Channel Low****ABOVE 1GHz**

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W53_11a_Tx_Low

Standard : FCC Part.15 subpart E
 Operator : T.Seino
 Temp,Hum,Atm : 22.1[°C] 31.5[%]
 Note1 : ch:52_5260MHz
 Note2 :

[dB(μV/m)]

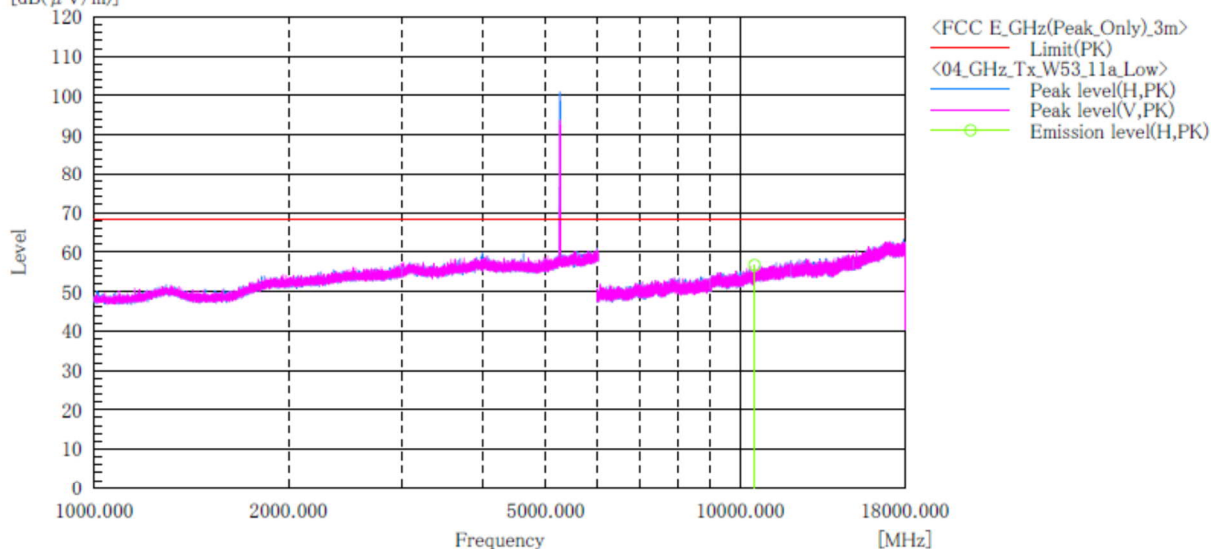**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10520.000	H	45.2	11.5	56.7	68.2	11.5	100.0	82.0	


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W53 / Channel Middle
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCRF02
 Test mode : WLAN_11a_W53_Tx_ch:Mid

Standard : FCC Part.15 subpartE
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:56 5280MHz
 Note2 :

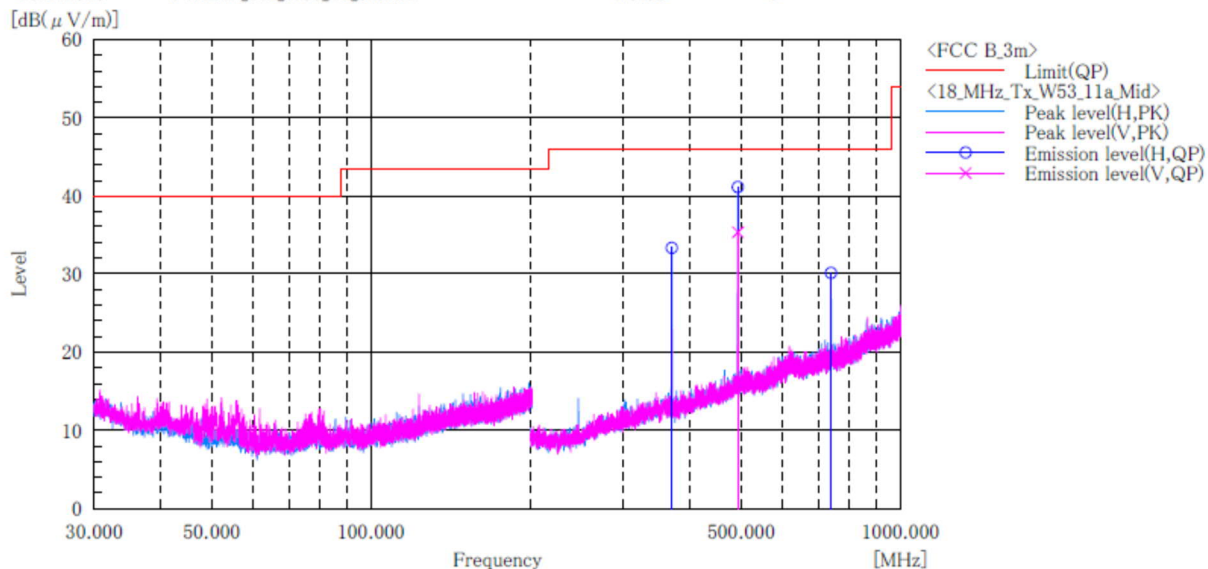


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.749	H	45.5	-12.2	33.3	46.0	12.7	100.0	87.0	
2	493.001	H	50.4	-9.2	41.2	46.0	4.8	205.0	260.0	
3	493.001	V	44.5	-9.2	35.3	46.0	10.7	212.0	329.0	
4	739.508	H	36.1	-6.0	30.1	46.0	15.9	116.0	293.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

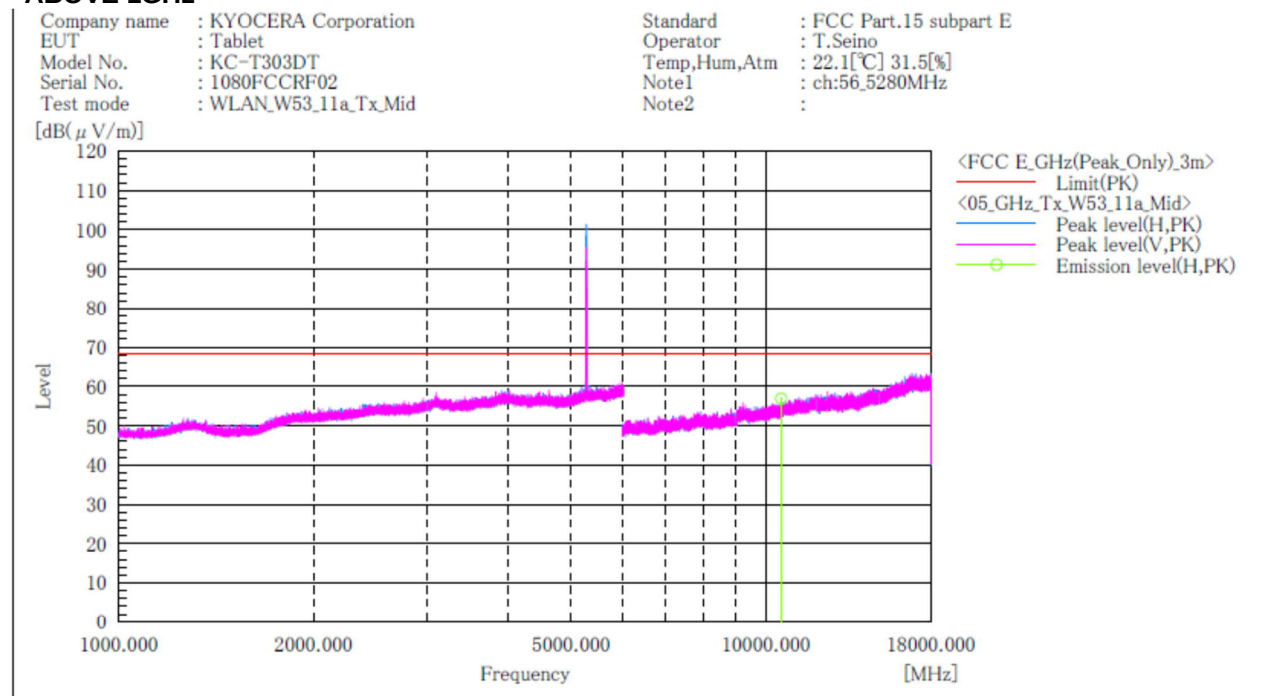[11a]**W53 / Channel Middle
ABOVE 1GHz****Final Result**

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]	
1	10560.000	H	45.4	11.5	56.9	68.2	11.3	100.0	79.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]
W53 / Channel High
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11a_W53_Tx_ch:High

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:64 5320MHz
 Note2 :

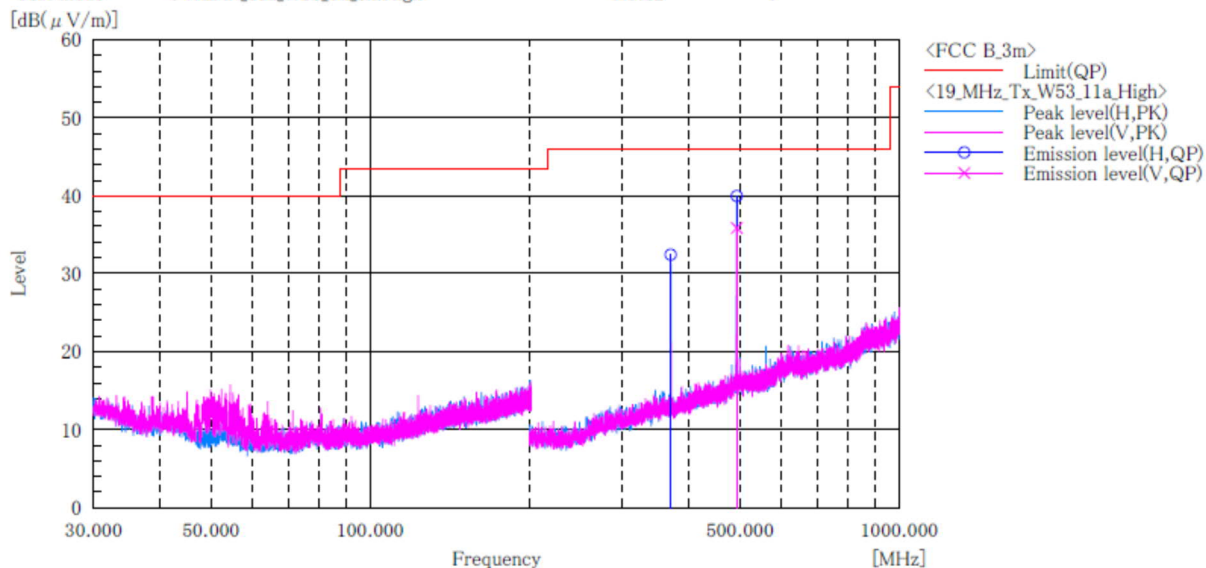

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.749	H	44.6	-12.2	32.4	46.0	13.6	100.0	242.0	
2	493.001	H	49.2	-9.2	40.0	46.0	6.0	202.0	45.0	
3	493.001	V	45.0	-9.2	35.8	46.0	10.2	206.0	327.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable - Amp)]

[11a]
W53 / Channel High
ABOVE 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W53_11a_Tx_High

Standard : FCC Part.15 subpart C
 Operator : T.Seino
 Temp,Hum,Atm : 23.4[°C] 44.5[%]
 Note1 : ch:64_5320MHz
 Note2 :

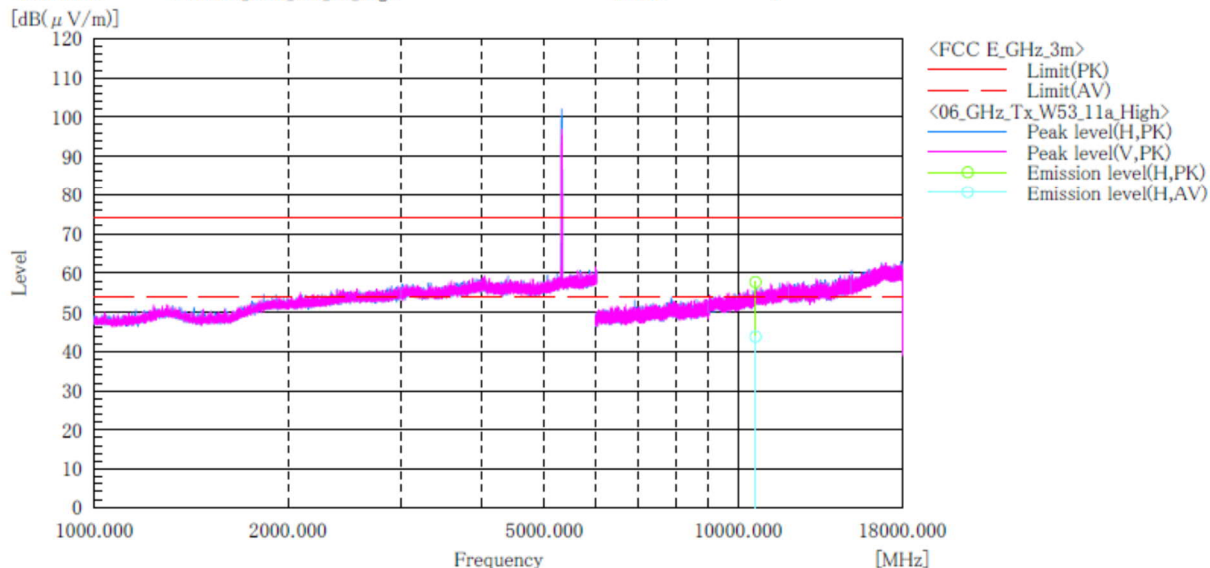

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	10640.000	H	46.0	32.1	11.7	57.7	43.8	74.0	54.0	16.3	10.2	100.0	79.0	


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]**W56 / Channel Low
BELOW 1GHz**

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11a_W56_Tx_ch:Low

Standard : FCC Part.15 subpartE
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:100 5500MHz
 Note2 :

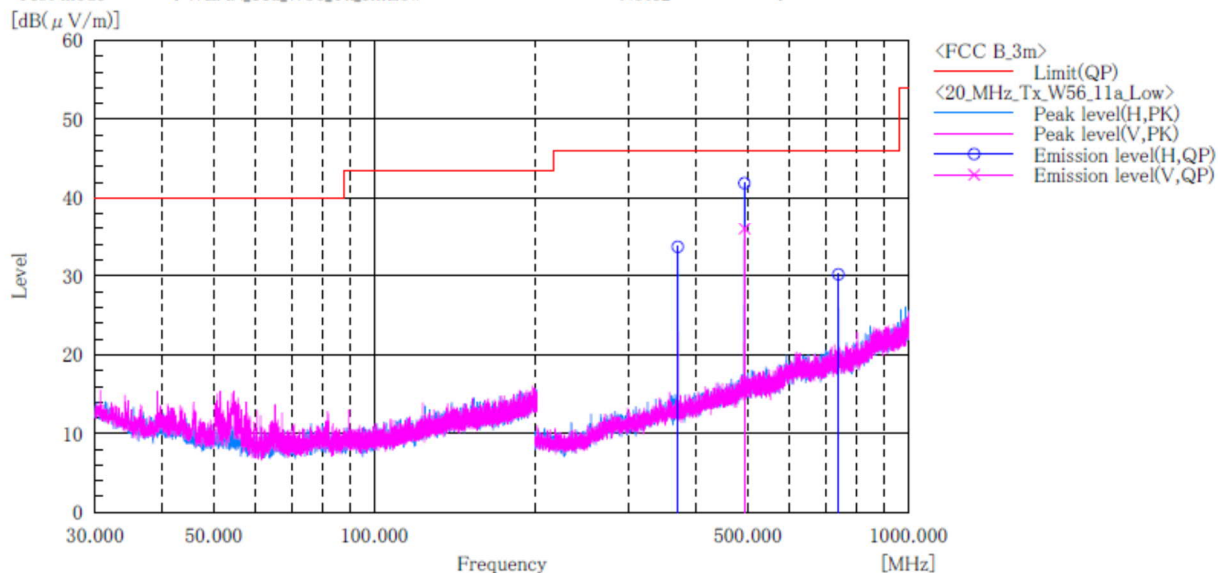**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.750	H	45.9	-12.2	33.7	46.0	12.3	100.0	98.0	
2	493.001	H	51.1	-9.2	41.9	46.0	4.1	203.0	271.0	
3	493.001	V	45.2	-9.2	36.0	46.0	10.0	217.0	343.0	
4	739.489	H	36.2	-6.0	30.2	46.0	15.8	124.0	289.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]


[11a]

W56 / Channel Low

ABOVE 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W56_11a_Tx_Low

Standard : FCC Part.15 subpart E
 Operator : C.Kanno
 Temp,Hum,Atm : 23.5[°C] 47.7[%]
 Note1 : ch:100.5500MHz
 Note2 :

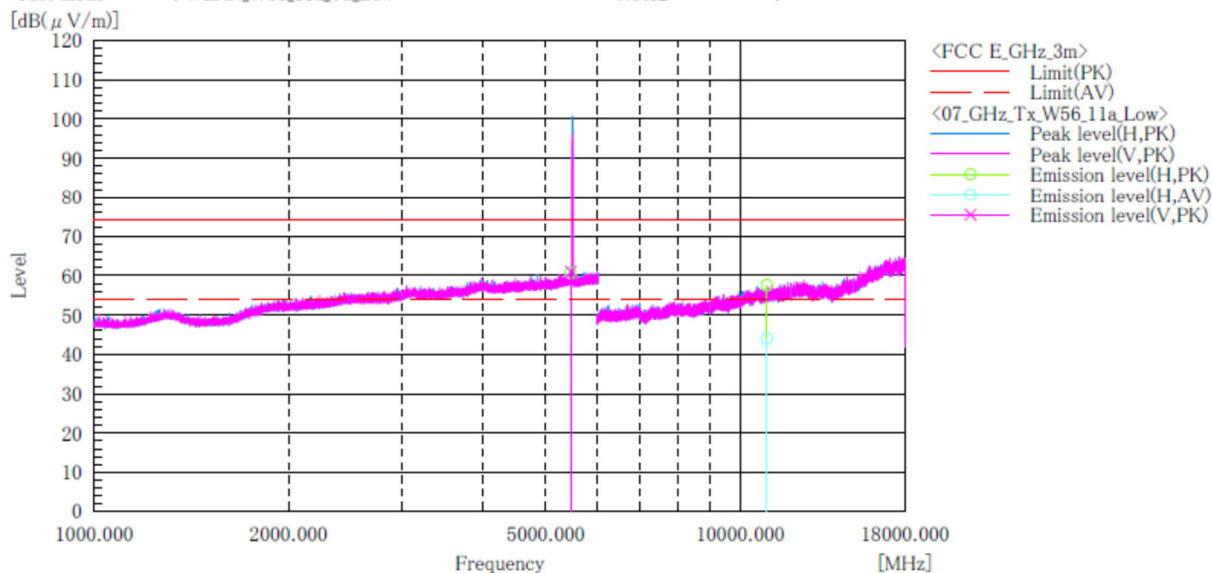

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]	Remark
1	5465.300	H	48.9		11.8	60.7		68.2	54.0	7.5		100.0	2.0	
2	5467.600	V	49.3		11.8	61.1		68.2	54.0	7.1		100.0	347.0	
3	11000.000	H	45.3	31.7	12.3	57.6	44.0	74.0	54.0	16.4	10.0	200.0	0.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11a]**W56 / Channel Middle
BELOW 1GHz**

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11a_W56_Tx_ch:Mid

Standard : FCC Part.15 subpart E
 Operator : T.Watanabe
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:116 5580MHz
 Note2 :

[dB(μV/m)]

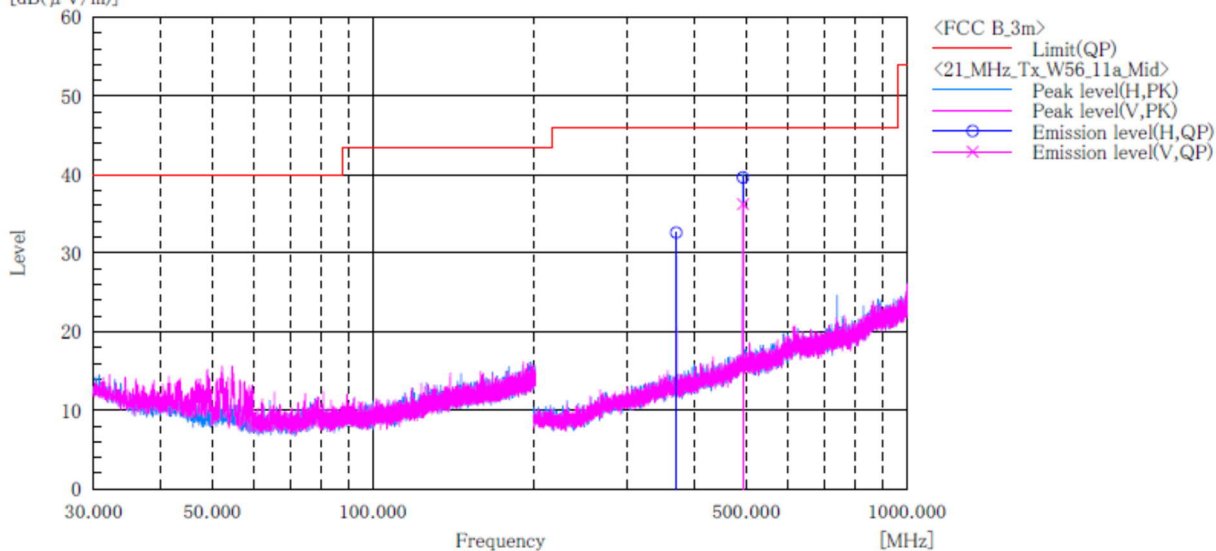
**Final Result**

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.738	H	44.8	-12.2	32.6	46.0	13.4	100.0	93.0	
2	493.001	H	48.9	-9.2	39.7	46.0	6.3	189.0	29.0	
3	493.001	V	45.4	-9.2	36.2	46.0	9.8	214.0	336.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11a]

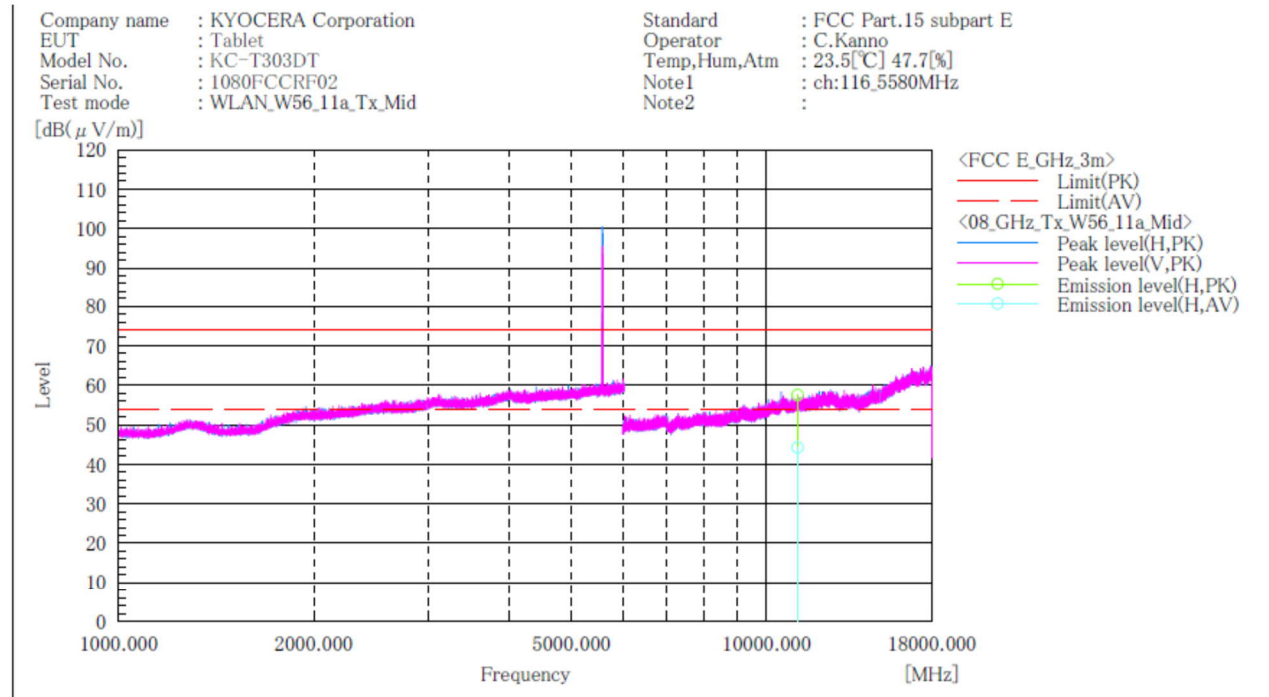W56 / Channel Middle
ABOVE 1GHz


Final Result

No.	Frequency (P)	Reading PK	Reading AV	c. f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	11160.000	H	45.3	32.0	12.3	57.6	44.3	74.0	54.0	16.4	9.7	200.0	75.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.


[11a]

W56 / Channel High

BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11a_W56_Tx_ch:High

Standard : FCC Part.15 subpartE
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:140 5700MHz
 Note2 :

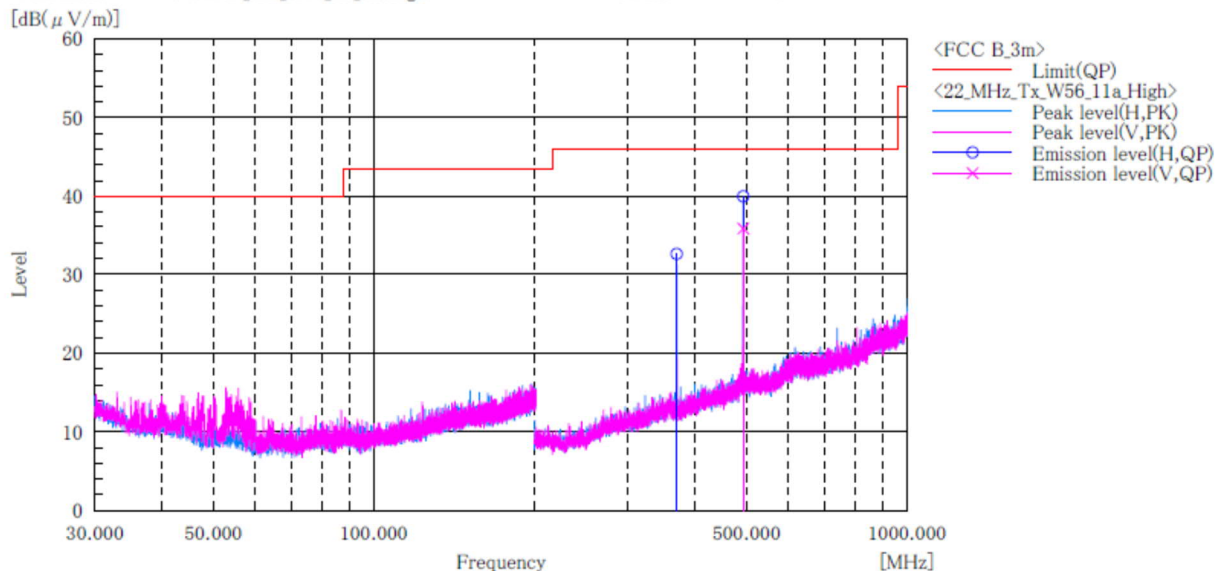

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.752	H	44.8	-12.2	32.6	46.0	13.4	100.0	256.0	
2	493.001	H	49.2	-9.2	40.0	46.0	6.0	186.0	49.0	
3	493.001	V	45.0	-9.2	35.8	46.0	10.2	204.0	355.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11a]


W56 / Channel High

ABOVE 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W56_11a_Tx_High

Standard : FCC Part.15 subpart E
 Operator : C.Kanno
 Temp,Hum,Atm : 23.5[°C] 47.7[%]
 Note1 : ch:140_5700MHz
 Note2 :

[dB(μV/m)]

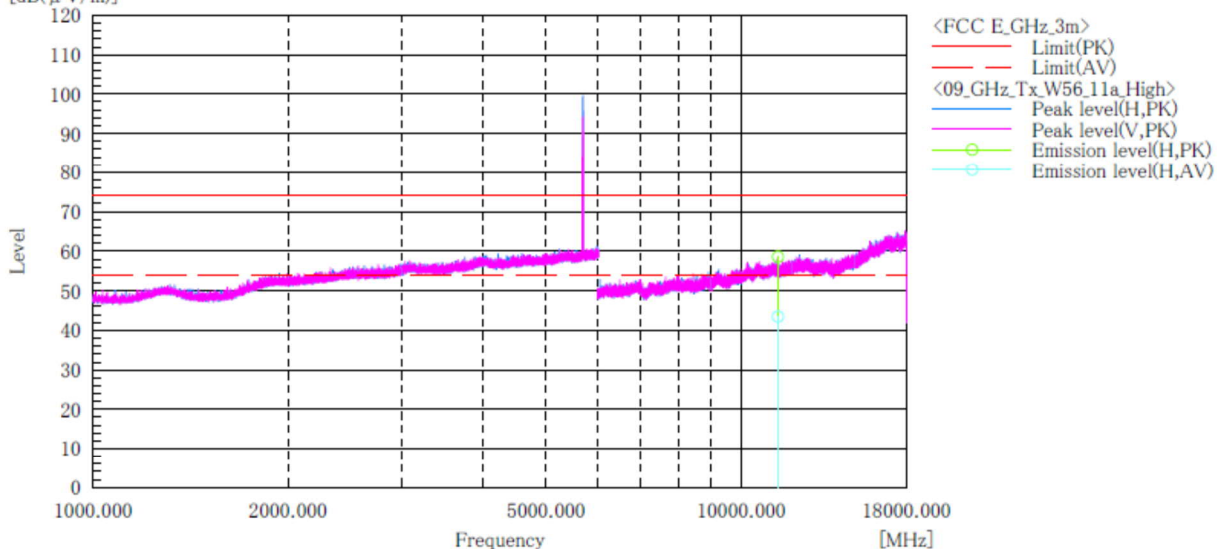

Final Result

No.	Frequency (P)	Reading PK	Reading AV	c. f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	11400.000	H	46.1	31.0	12.5	58.6	43.5	74.0	54.0	15.4	10.5	100.0	125.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.


[11a]

W56 / Channel High

BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11a_W56_Tx_ch:High

Standard : FCC Part.15 subpartE
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:144 5720MHz
 Note2 :

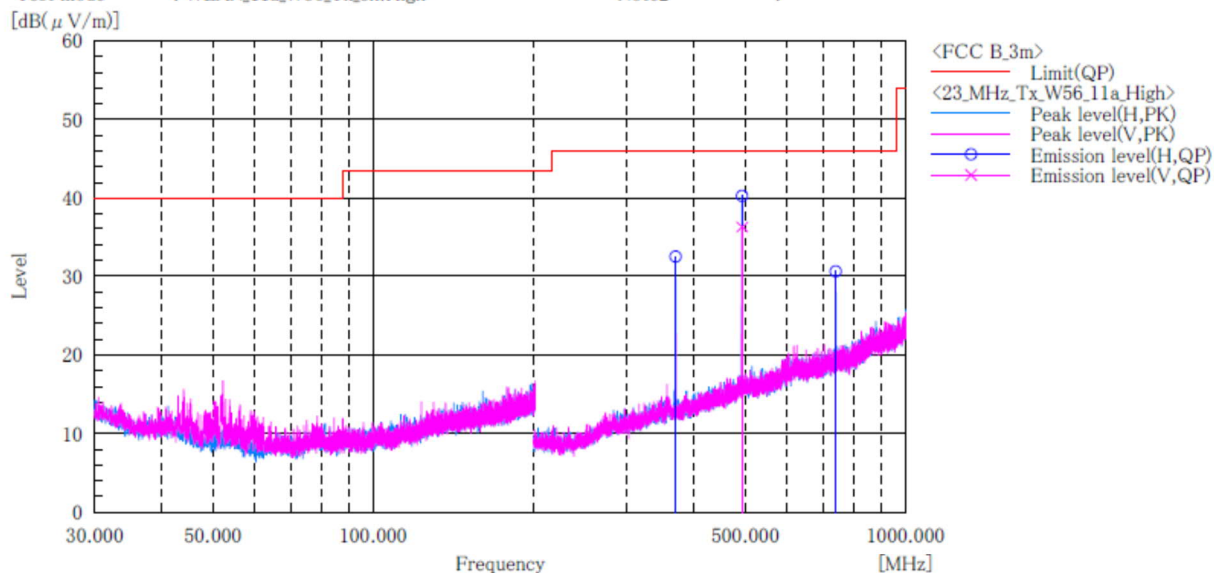

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.742	H	44.7	-12.2	32.5	46.0	13.5	100.0	249.0	
2	493.001	H	49.5	-9.2	40.3	46.0	5.7	195.0	50.0	
3	493.001	V	45.5	-9.2	36.3	46.0	9.7	212.0	338.0	
4	739.509	H	36.6	-6.0	30.6	46.0	15.4	124.0	280.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]


[11a]

W56 / Channel High

ABOVE 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W56_11a_Tx_High

Standard : FCC Part.15 subpart E
 Operator : C.Kanno
 Temp,Hum,Atm : 23.5[°C] 47.7[%]
 Note1 : ch:144_5720MHz
 Note2 :

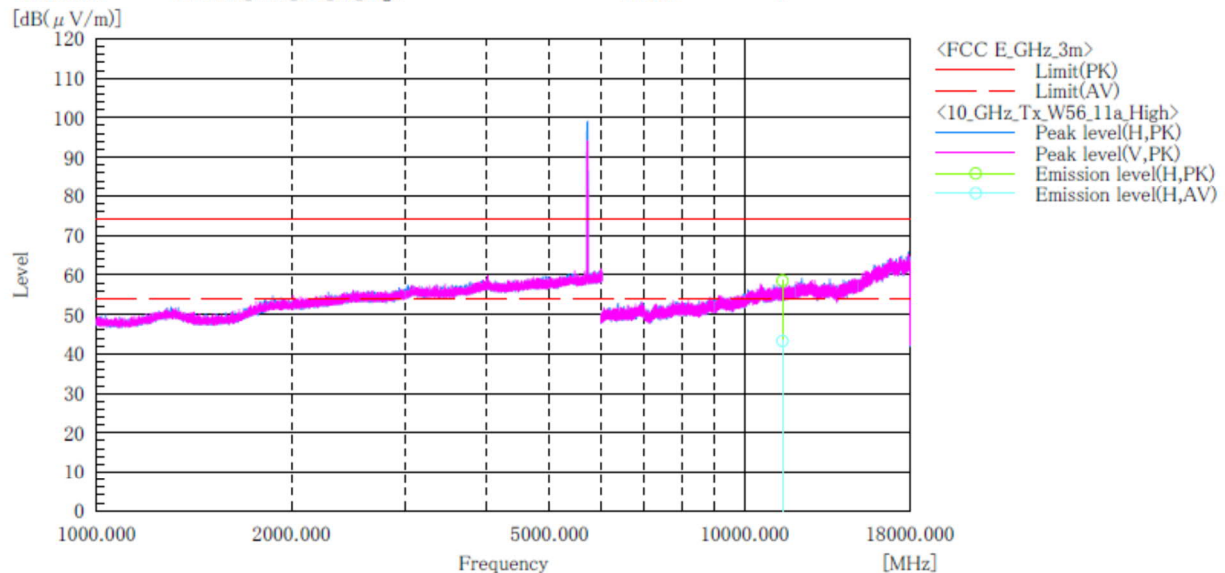

Final Result

No.	Frequency (P)	Reading PK	Reading AV	c. f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	11440.000	H	46.0	30.8	12.5	58.5	43.3	74.0	54.0	15.5	10.7	100.0	174.0


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11n(HT20)]
W52 / Channel Low
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11n(HT20)_W52_Tx_ch:Low

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:36 5180MHz
 Note2 :

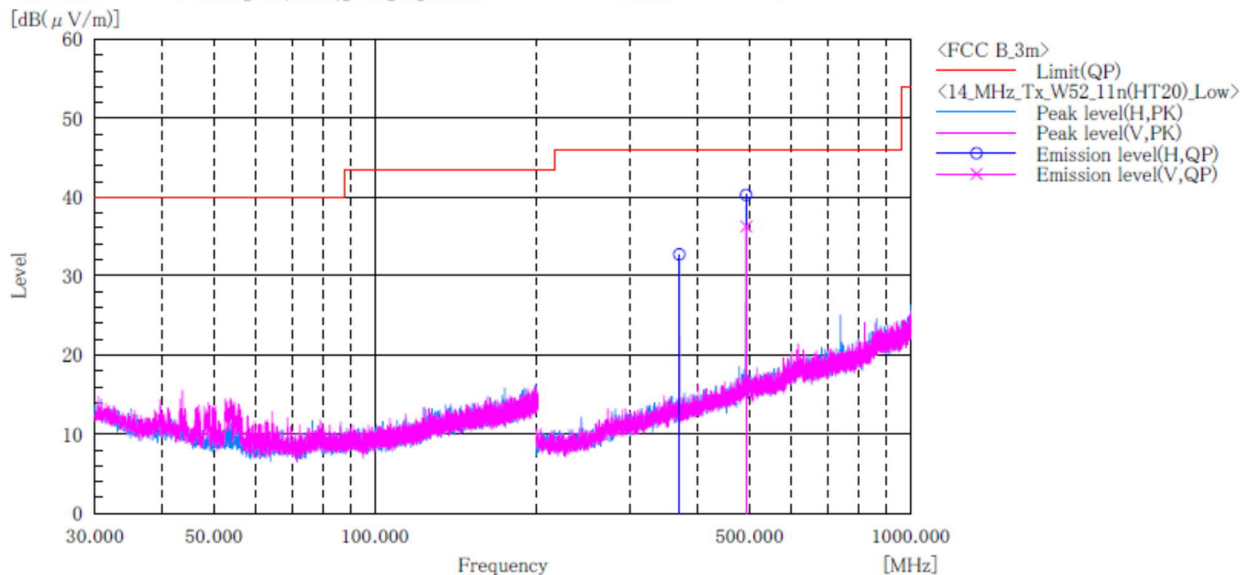

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.747	H	44.9	-12.2	32.7	46.0	13.3	100.0	92.0	
2	493.001	H	49.5	-9.2	40.3	46.0	5.7	195.0	48.0	
3	493.001	V	45.4	-9.2	36.2	46.0	9.8	209.0	332.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11n(HT20)]
W52 / Channel Low
ABOVE 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W52_11n(HT20)_Tx_Low

Standard : FCC Part.15 subpart E
 Operator : C.Kanno
 Temp,Hum,Atm : 23.5[°C] 47.7[%]
 Note1 : ch:36,5180MHz
 Note2 :

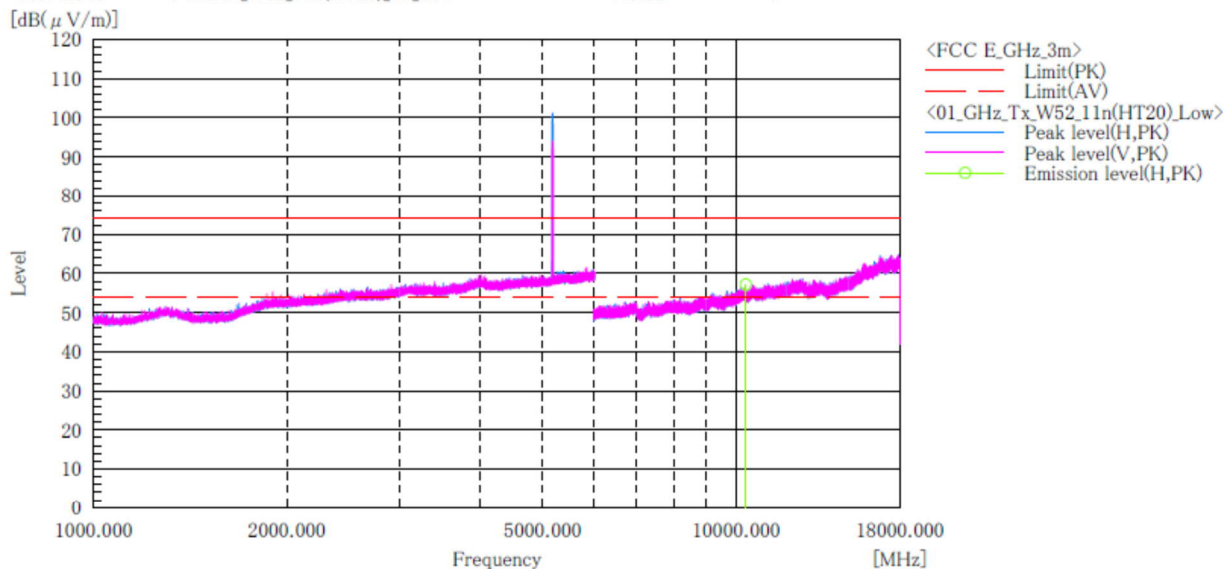

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10360.000	H	46.0	11.2	57.2	68.2	11.0	100.0	221.0	


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11n(HT20)]
W52 / Channel Middle
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11n(HT20)_W52_Tx_ch:Mid

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:40 5200MHz
 Note2 :

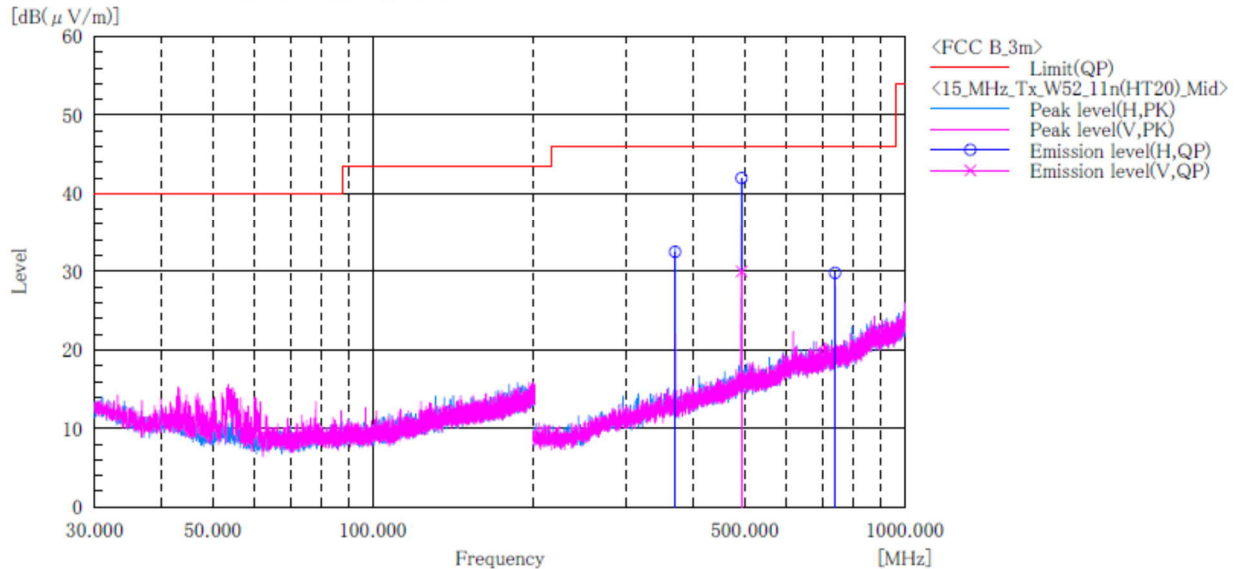


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.753	H	44.7	-12.2	32.5	46.0	13.5	100.0	83.0	
2	739.511	H	35.8	-6.0	29.8	46.0	16.2	129.0	275.0	
3	493.001	H	51.2	-9.2	42.0	46.0	4.0	192.0	267.0	
4	493.001	V	39.2	-9.2	30.0	46.0	16.0	208.0	175.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11n(HT20)]
W52 / Channel Middle
ABOVE 1GHz

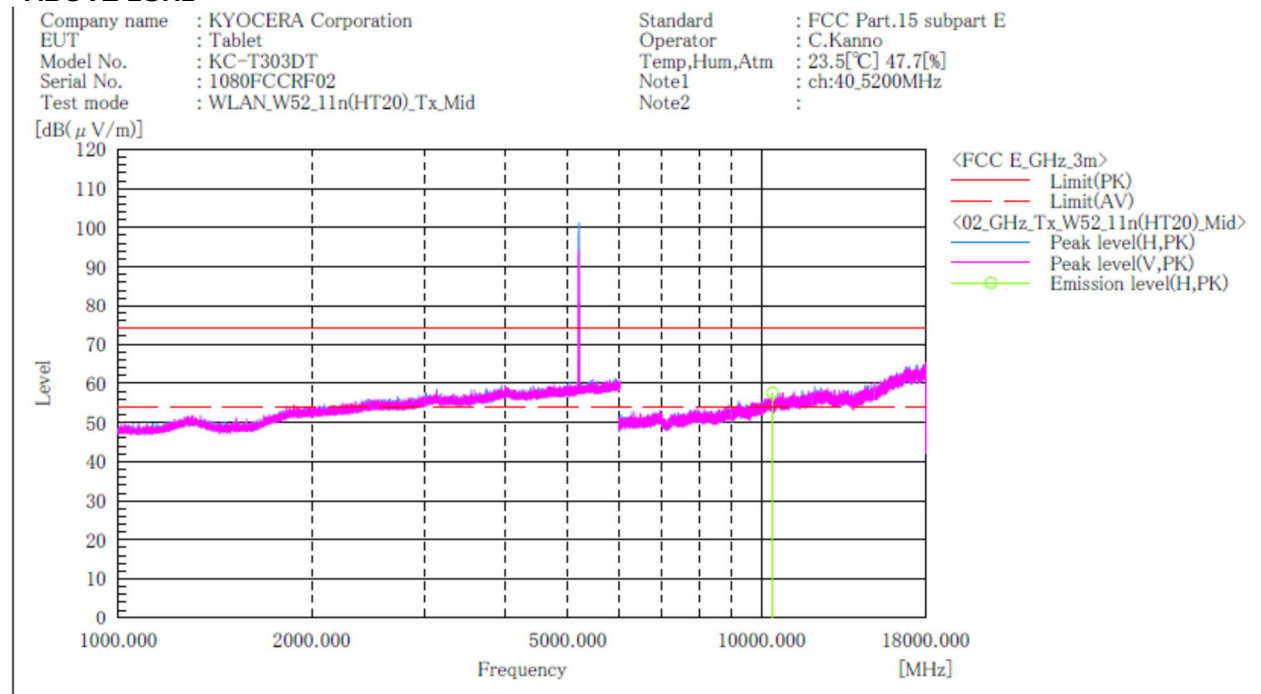

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10400.000	H	46.3	11.3	57.6	68.2	10.6	138.0	162.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11n(HT20)]
W52 / Channel High
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_11n(HT20)_W52_Tx_ch:High

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:48 5240MHz
 Note2 :

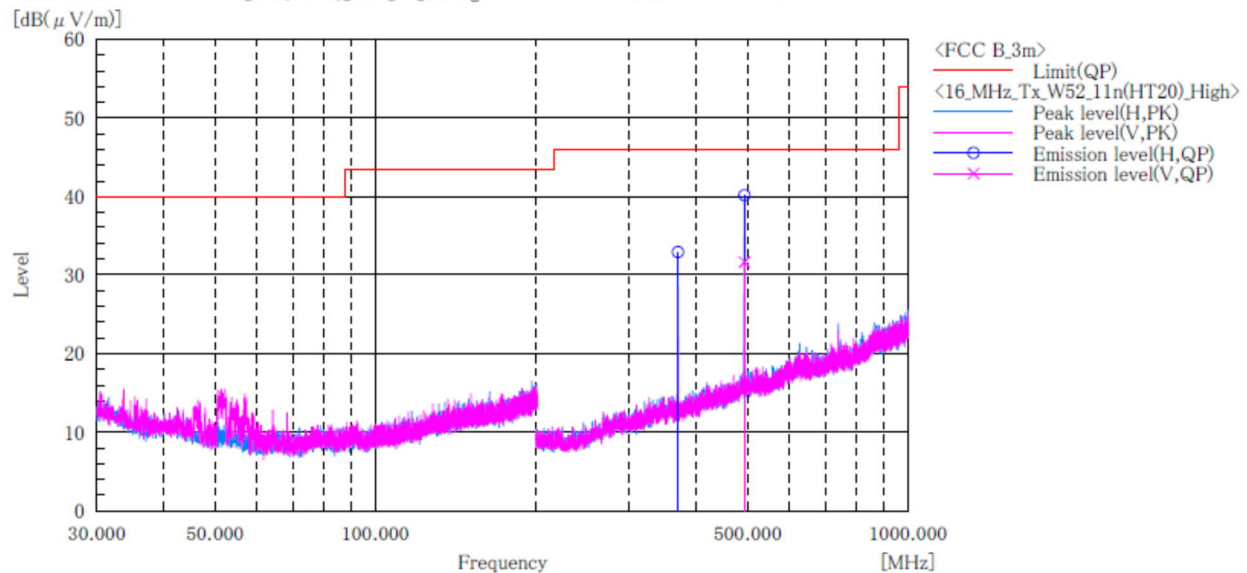

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.749	H	45.1	-12.2	32.9	46.0	13.1	100.0	86.0	
2	493.001	H	49.4	-9.2	40.2	46.0	5.8	187.0	43.0	
3	493.001	V	40.8	-9.2	31.6	46.0	14.4	209.0	105.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11n(HT20)]
W52 / Channel High
ABOVE 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCRF02
 Test mode : WLAN_W52_11n(HT20)_Tx_High

Standard : FCC Part.15 subpart E
 Operator : C.Kanno
 Temp,Hum,Atm : 23.5[°C] 47.7[%]
 Note1 : ch:48_5240MHz
 Note2 :

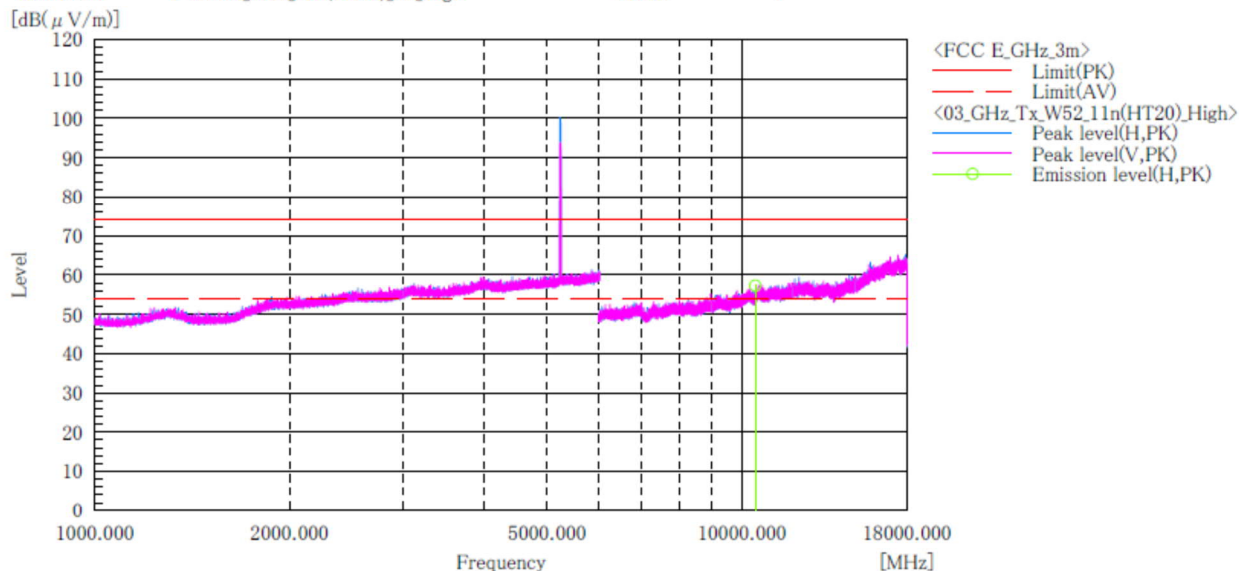

Final Result

No.	Frequency	(P)	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		PK [dB(μV)]	[dB(1/m)]	PK [dB(μV/m)]	PK [dB(μV/m)]	PK [dB]	[cm]	[°]	
1	10480.000	H	45.9	11.4	57.3	68.2	10.9	121.0	103.0	


Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11n(HT20)]
W53 / Channel Low
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCRF02
 Test mode : 5GHz_W53_11n(HT20)_Tx_ch:Low

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:52 5260MHz
 Note2 :

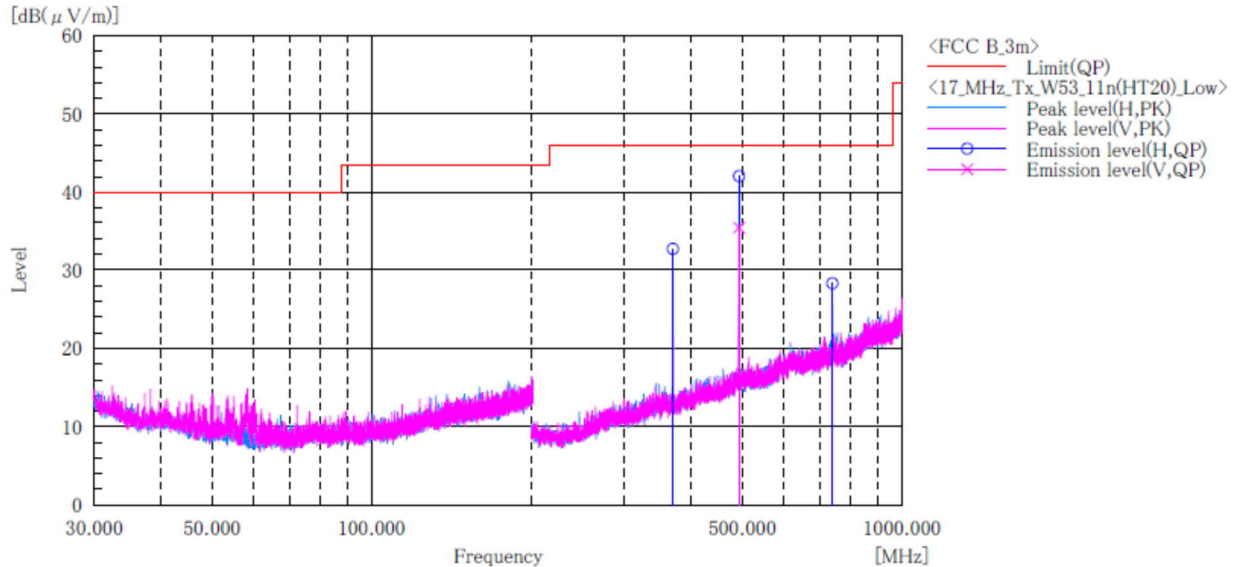

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.744	H	44.9	-12.2	32.7	46.0	13.3	100.0	83.0	
2	739.497	H	34.3	-6.0	28.3	46.0	17.7	133.0	265.0	
3	493.001	H	51.3	-9.2	42.1	46.0	3.9	202.0	258.0	
4	493.001	V	44.6	-9.2	35.4	46.0	10.6	205.0	0.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11n(HT20)]
W53 / Channel Low
ABOVE 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W53_11n(HT20)_Tx_Low

Standard : FCC Part.15 subpart E
 Operator : C.Kanno
 Temp,Hum,Atm : 23.5[°C] 47.7[%]
 Note1 : ch:52_5260MHz
 Note2 :

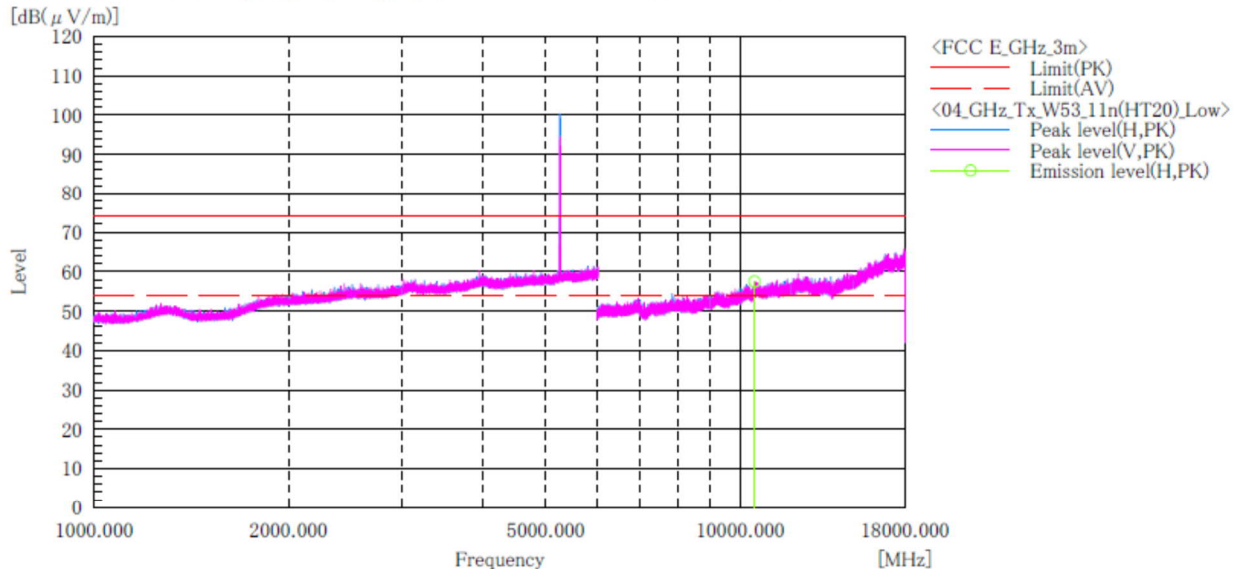

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10520.000	H	46.0	11.5	57.5	68.2	10.7	142.0	168.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11n(HT20)]
W53 / Channel Middle
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : 5GHz_W53_11n(HT20)_Tx_ch:Mid

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:56 5280MHz
 Note2 :

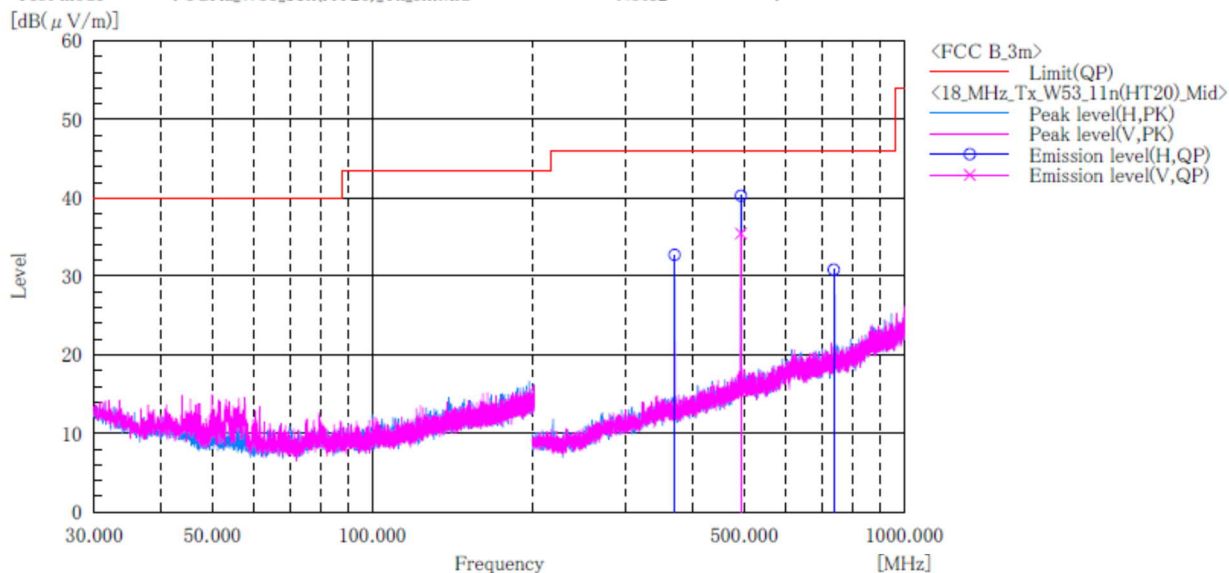

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.745	H	44.9	-12.2	32.7	46.0	13.3	100.0	86.0	
2	493.001	H	49.5	-9.2	40.3	46.0	5.7	189.0	36.0	
3	493.001	V	44.6	-9.2	35.4	46.0	10.6	223.0	321.0	
4	736.496	H	36.8	-6.0	30.8	46.0	15.2	124.0	293.0	

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11n(HT20)]**W53 / Channel Middle****ABOVE 1GHz**

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : WLAN_W53_11n(HT20)_Tx_Mid

Standard : FCC Part.15 subpart E
 Operator : C.Kanno
 Temp,Hum,Atm : 23.5[°C] 47.7[%]
 Note1 : ch:56_5280MHz
 Note2 :

[dB(μV/m)]

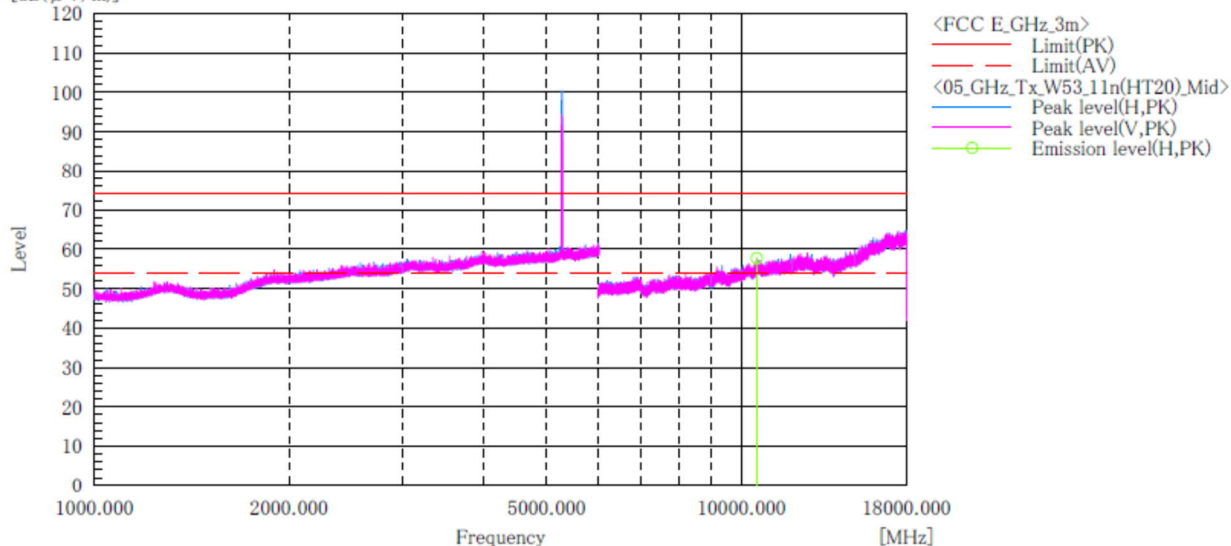**Final Result**

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Limit PK [dB(μV/m)]	Margin PK [dB]	Height [cm]	Angle [°]	Remark
1	10560.000	H	46.2	11.5	57.7	68.2	10.5	131.0	189.0	


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.

[11n(HT20)]
W53 / Channel High
BELOW 1GHz

Company name : KYOCERA Corporation
 EUT : Tablet
 Model No. : KC-T303DT
 Serial No. : 1080FCCR02
 Test mode : 5GHz_W53_11n(HT20)_Tx_ch:High

Standard : FCC Part.15 subpart E
 Operator : K.Saito
 Temp,Hum : 22.6[°C] 31.3[%]
 Note1 : CH:64 5320MHz
 Note2 :

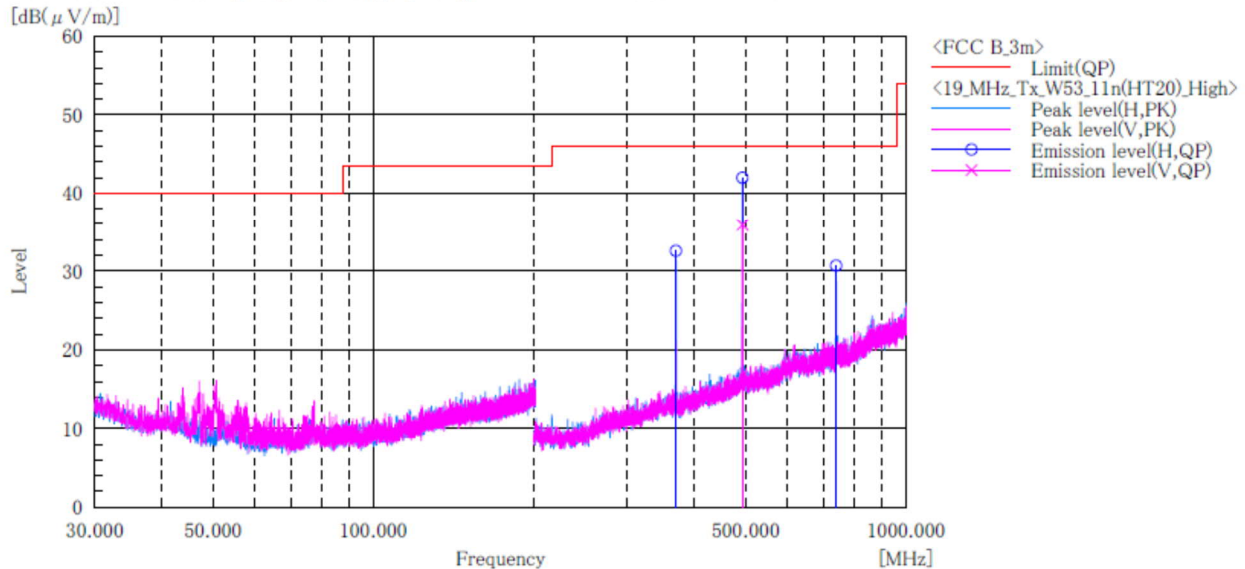


Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c.f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]	Remark
1	369.752	H	44.8	-12.2	32.6	46.0	13.4	100.0	253.0	
2	493.001	H	51.2	-9.2	42.0	46.0	4.0	209.0	261.0	
3	493.001	V	45.1	-9.2	35.9	46.0	10.1	218.0	326.0	
4	739.504	H	36.7	-6.0	30.7	46.0	15.3	116.0	287.0	

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[11n(HT20)]
W53 / Channel High
ABOVE 1GHz

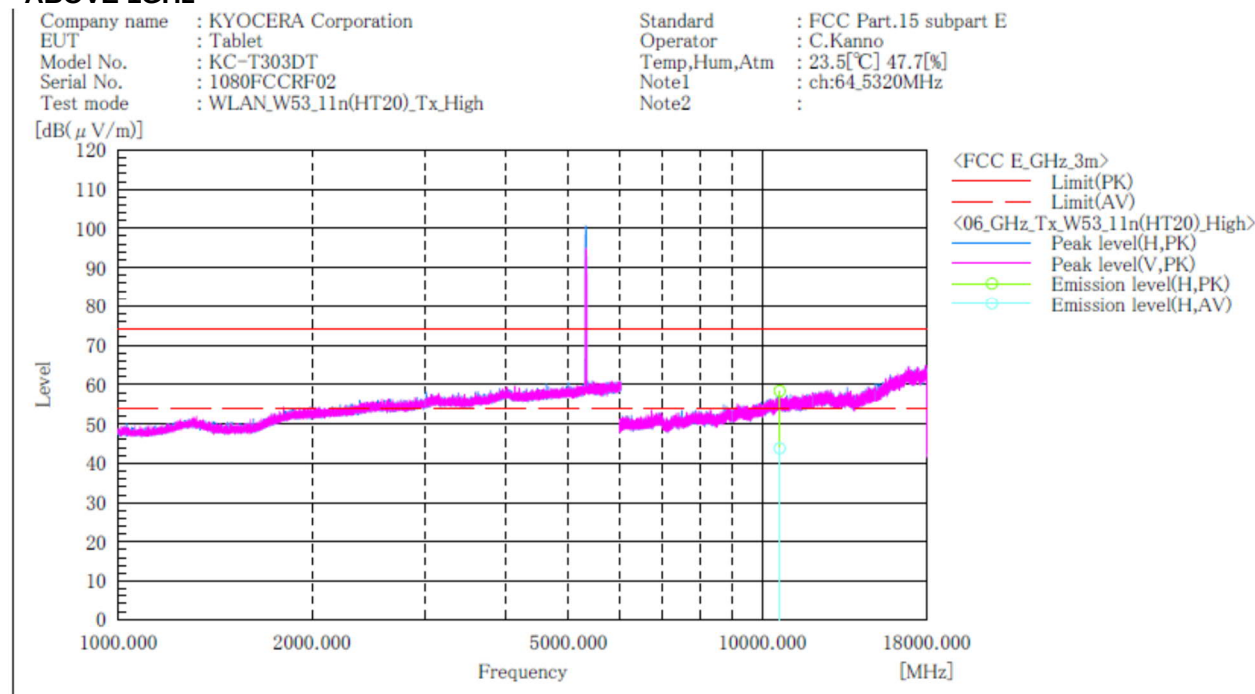

Final Result

No.	Frequency (P)	Reading PK	Reading AV	c.f	Result PK	Result AV	Limit PK	Limit AV	Margin PK	Margin AV	Height	Angle	Remark
	[MHz]	[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]	
1	10640.000	H	46.7	32.1	11.7	58.4	43.8	74.0	54.0	15.6	10.2	118.0	168.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 40GHz at the 3 meters distance.