

FCC Test Report (WLAN)

Report No.: RF170419E07A

FCC ID: HD5-3GSTTHALPC1

Test Model: 3G-ST-THALP-C1

Received Date: Apr. 24, 2017

Test Date: May 04 to June 01, 2017

Issued Date: June 15, 2017

Applicant: Honeywell International Inc.

Address: 9680 Old Bailes Road, Fort Mill, SC 29707 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Radiated Emission and Bandedge Measurement.....	16
4.1.1 Limits of Radiated Emission and Bandedge Measurement	16
4.1.2 Test Instruments	17
4.1.3 Test Procedures.....	19
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Conditions.....	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results (Mode 1).....	34
4.2.8 Test Results (Mode 2).....	36
4.3 6dB Bandwidth Measurement	38
4.3.1 Limits of 6dB Bandwidth Measurement	38
4.3.2 Test Setup.....	38
4.3.3 Test Instruments	38
4.3.4 Test Procedure	38
4.3.5 Deviation from Test Standard	38
4.3.6 EUT Operating Conditions.....	38
4.3.7 Test Result.....	39
4.4 Occupied Bandwidth Measurement	41
4.4.1 Test Setup.....	41
4.4.2 Test Instruments	41
4.4.3 Test Procedure	41
4.4.4 Deviation from Test Standard	41
4.4.5 EUT Operating Conditions.....	41
4.4.6 Test Results	42
4.5 Conducted Output Power Measurement.....	44
4.5.1 Limits of Conducted Output Power Measurement	44
4.5.2 Test Setup.....	44
4.5.3 Test Instruments	44
4.5.4 Test Procedures.....	44
4.5.5 Deviation from Test Standard	44
4.5.6 EUT Operating Conditions.....	44

4.5.7 Test Results	45
4.6 Power Spectral Density Measurement.....	47
4.6.1 Limits of Power Spectral Density Measurement	47
4.6.2 Test Setup.....	47
4.6.3 Test Instruments	47
4.6.4 Test Procedure	47
4.6.5 Deviation from Test Standard	47
4.6.6 EUT Operating Condition	47
4.6.7 Test Results	48
4.7 Conducted Out of Band Emission Measurement.....	50
4.7.1 Limits of Conducted Out of Band Emission Measurement.....	50
4.7.2 Test Setup.....	50
4.7.3 Test Instruments	50
4.7.4 Test Procedure	50
4.7.5 Deviation from Test Standard	50
4.7.6 EUT Operating Condition	50
4.7.7 Test Results	50
5 Pictures of Test Arrangements.....	54
Appendix – Information on the Testing Laboratories	55

Release Control Record

Issue No.	Description	Date Issued
RF170419E07A	Original release.	June 15, 2017

1 Certificate of Conformity

Product: Gateway

Brand: Honeywell

Test Model: 3G-ST-THALP-C1

Sample Status: ENGINEERING SAMPLE

Applicant: Honeywell International Inc.

Test Date: May 04 to June 01, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** June 15, 2017
Wendy Wu / Specialist

Approved by : May Chen , **Date:** June 15, 2017
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -10.8dB at 0.47031MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.1dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.30 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.16 dB
	6GHz ~ 18GHz	4.91 dB
	18GHz ~ 40GHz	5.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	Gateway
Brand	Honeywell
Test Model	3G-ST-THALP-C1
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 5V from power adapter or DC 3.6V from battery
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 72.2Mbps
Operating Frequency	2.412 ~ 2.462GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20): 11
Output Power	112.98mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	NA

Note:

1. The EUT is a WLAN, Bluetooth, NFC, WWAN and Zigbee device.
2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN	WWAN	Zigbee
2	Bluetooth	WWAN	Zigbee

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a battery as following table:

Brand	Model No.	Spec.
Palladium Energy Inc.	CT50-BTSC	3.6Vdc, 4040mAh

4. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
Phihong	PSA10F-050Q	AC Input: 100-240V, 0.35A, 50-60Hz DC Output: 5V, 2A

5. The antennas provided to the EUT, please refer to the following table:

Item	Antenna Type	Antenna Gain (dBi)	Antenna Connector	Frequency range
WLAN	PIFA	2.7	NA	2.4~2.4835GHz
Zigbee	PIFA	3.7	NA	2.4~2.4835GHz
WWAN	PIFA	2	UFL ipex	800~900MHz
		2.5		1800~2100MHz
GPS	Chip	2.72	NA	1575MHz
		4.38		1602MHz
Buletooth	PIFA	2.7	NA	2.4~2.4835GHz

6. For radiated emission test, the EUT was pre-tested under the following test modes :

Pre-test Mode	Power
Mode A	Power from Adapter
Mode B	Power from Battery

The worst radiated emission was found in **Mode A**. Therefore only the test data of the modes were recorded in this report.

7. The EUT incorporates a SISO function.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	1TX	1RX
802.11g	6 ~ 54Mbps	1TX	1RX
802.11n (HT20)	MCS 0~7	1TX	1RX

8. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	√	√	√	√	Power from adapter
2	-	-	√	-	Power from Laptop

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	22deg. C, 65%RH	120Vac, 60Hz	Rey Chen
RE $<$ 1G	25deg. C, 64%RH	120Vac, 60Hz	Rey Chen
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 Duty Cycle of Test Signal


If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $1.213/1.24 = 0.978$

802.11g: Duty cycle = $0.197/0.221 = 0.891$, Duty factor = $10 * \log(1/0.891) = 0.5$

802.11n (HT20): Duty cycle = $0.202/0.226 = 0.894$, Duty factor = $10 * \log(1/0.894) = 0.49$

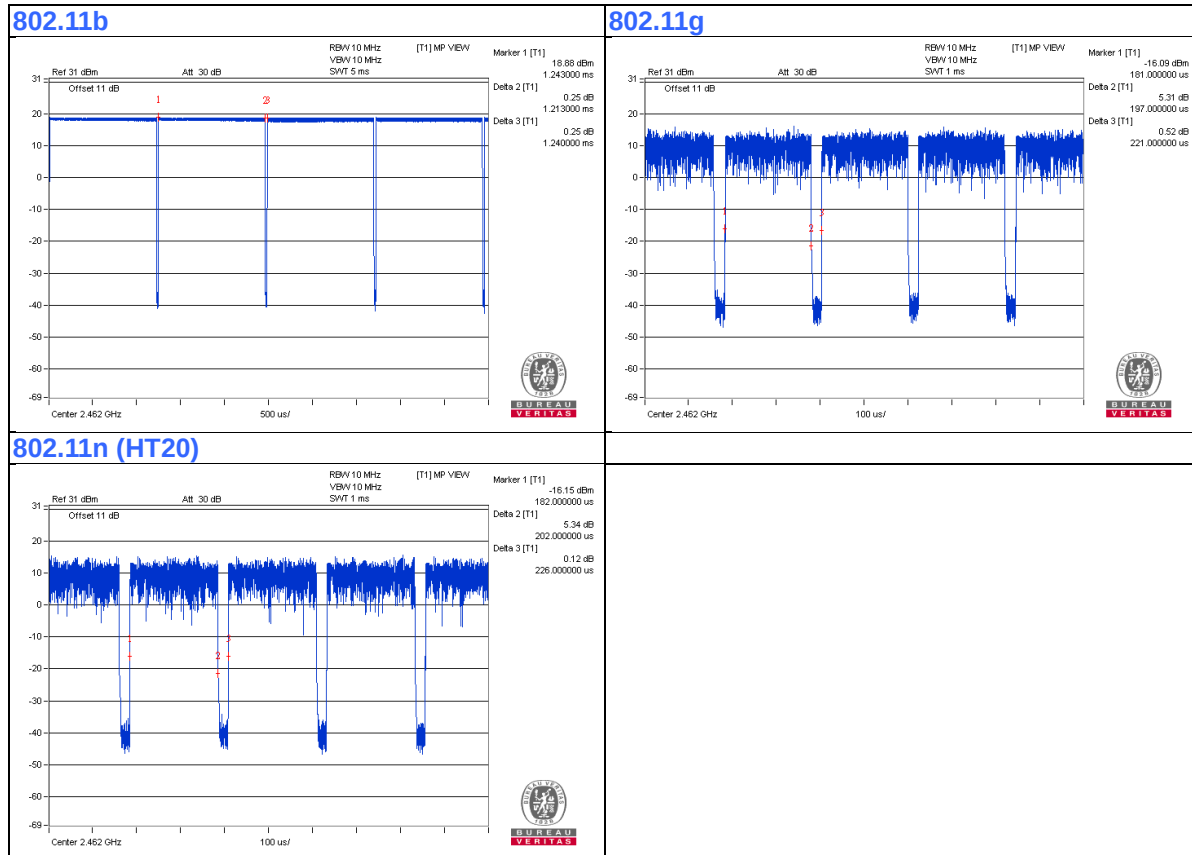

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	SIM Card	R&S CMW-Z04	Mini UICC Test Card	NA	NA	Provided by Lab
B.	Laptop	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	1.5	No	0	Supplied by client
2.	Micro USB Cable	1	1	No	0	Provided by Lab

3.4.1 Configuration of System under Test

Mode 1:

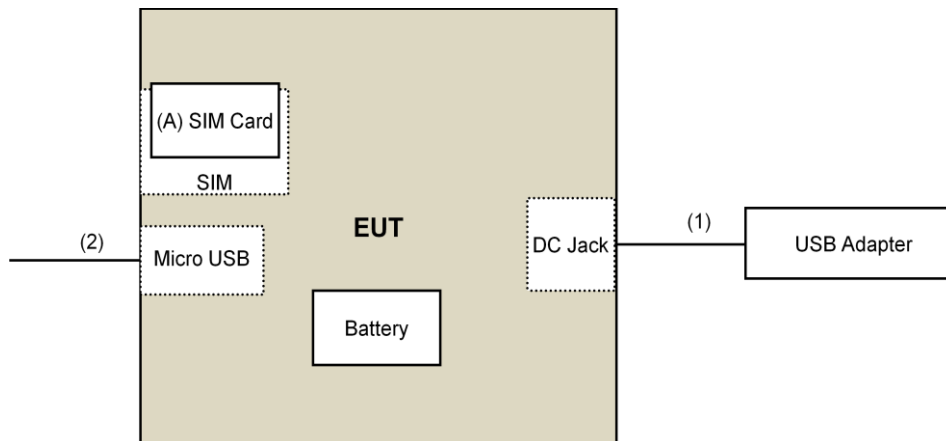

Mode 2:

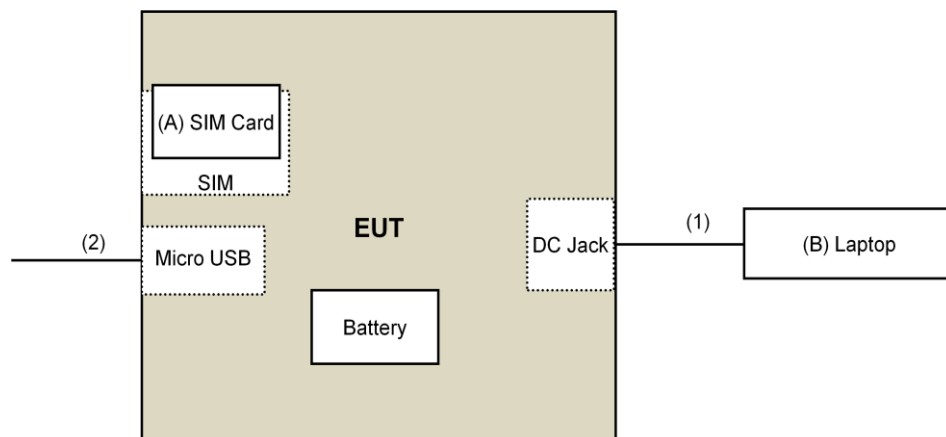

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v04

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Dec. 13, 2016	Dec. 12, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 05, 2016	Oct. 04, 2017
Software	ADT_Radiated _V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
- 6 Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: May 04, 2017

For other test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 27, 2016	Dec. 26, 2017
Pre-Amplifier EMCI	EMC12630SE	980385	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200	160923	Feb. 02, 2017	Feb. 01, 2018
	EMC104-SM-SM-2000	150318	Mar. 29, 2017	Mar. 28, 2018
	EMC104-SM-SM-5000	150321	Mar. 29, 2017	Mar. 28, 2018
Pre-Amplifier EMCI	EMC184045SE	980387	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSv40	100964	June 28, 2016	June 27, 2017
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The FCC Site Registration No. is 292998
4. The CANADA Site Registration No. is 20331-2
5. Tested Date: May 31 to June 01, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

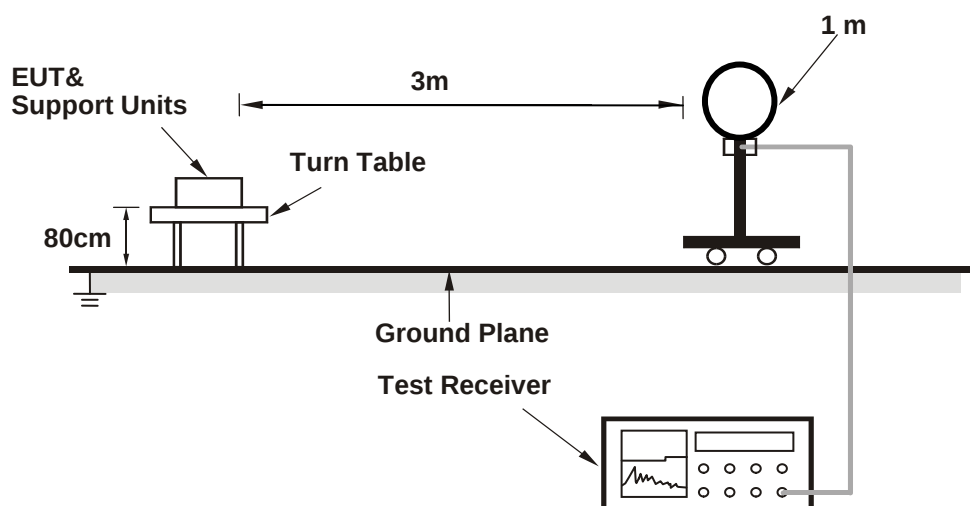

For Radiated emission 30MHz to 1GHz

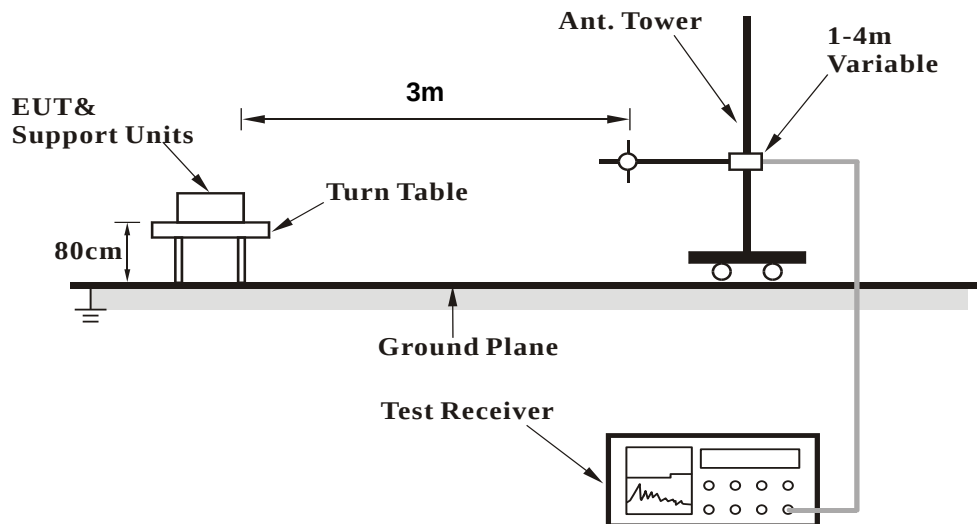

For Radiated emission above 1GHz



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Contorlling software (PhoneTool 218.exe) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	1.21 H	0	59.4	-2.1
2	2390.00	52.2 AV	54.0	-1.8	1.21 H	0	54.3	-2.1
3	*2412.00	102.0 PK			1.21 H	0	104.0	-2.0
4	*2412.00	99.1 AV			1.21 H	0	101.1	-2.0
5	4824.00	46.3 PK	74.0	-27.7	4.00 H	295	44.1	2.2
6	4824.00	41.5 AV	54.0	-12.5	4.00 H	295	39.3	2.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.7 PK	74.0	-16.3	3.80 V	212	59.8	-2.1
2	2390.00	52.5 AV	54.0	-1.5	3.80 V	212	54.6	-2.1
3	*2412.00	103.6 PK			3.80 V	212	105.6	-2.0
4	*2412.00	100.9 AV			3.80 V	212	102.9	-2.0
5	4824.00	47.0 PK	74.0	-27.0	1.00 V	204	44.8	2.2
6	4824.00	42.5 AV	54.0	-11.5	1.00 V	204	40.3	2.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.4 PK			1.28 H	355	105.4	-2.0
2	*2437.00	100.7 AV			1.28 H	355	102.7	-2.0
3	4874.00	48.9 PK	74.0	-25.1	4.00 H	301	46.6	2.3
4	4874.00	46.3 AV	54.0	-7.7	4.00 H	301	44.0	2.3
5	7311.00	43.4 PK	74.0	-30.6	1.50 H	100	34.8	8.6
6	7311.00	32.1 AV	54.0	-21.9	1.50 H	100	23.5	8.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.1 PK			3.65 V	217	107.1	-2.0
2	*2437.00	102.2 AV			3.65 V	217	104.2	-2.0
3	4874.00	50.5 PK	74.0	-23.5	1.07 V	201	48.2	2.3
4	4874.00	47.7 AV	54.0	-6.3	1.07 V	201	45.4	2.3
5	7311.00	43.5 PK	74.0	-30.5	1.50 V	150	34.9	8.6
6	7311.00	32.3 AV	54.0	-21.7	1.50 V	150	23.7	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.4 PK			1.37 H	359	104.3	-1.9
2	*2462.00	99.3 AV			1.37 H	359	101.2	-1.9
3	2483.50	57.0 PK	74.0	-17.0	1.37 H	359	58.8	-1.8
4	2483.50	51.2 AV	54.0	-2.8	1.37 H	359	53.0	-1.8
5	4924.00	48.1 PK	74.0	-25.9	4.00 H	302	45.6	2.5
6	4924.00	45.7 AV	54.0	-8.3	4.00 H	302	43.2	2.5
7	7386.00	43.1 PK	74.0	-30.9	1.45 H	90	34.5	8.6
8	7386.00	31.6 AV	54.0	-22.4	1.45 H	90	23.0	8.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.6 PK			4.00 V	212	104.5	-1.9
2	*2462.00	99.9 AV			4.00 V	212	101.8	-1.9
3	2483.50	57.9 PK	74.0	-16.1	4.00 V	212	59.7	-1.8
4	2483.50	52.9 AV	54.0	-1.1	4.00 V	212	54.7	-1.8
5	4924.00	50.2 PK	74.0	-23.8	1.09 V	193	47.7	2.5
6	4924.00	47.0 AV	54.0	-7.0	1.09 V	193	44.5	2.5
7	7386.00	43.2 PK	74.0	-30.8	1.48 V	150	34.6	8.6
8	7386.00	31.2 AV	54.0	-22.8	1.48 V	150	22.6	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.5 PK	74.0	-9.5	1.43 H	345	66.6	-2.1
2	2390.00	52.2 AV	54.0	-1.8	1.43 H	345	54.3	-2.1
3	*2412.00	101.6 PK			1.43 H	345	103.6	-2.0
4	*2412.00	93.1 AV			1.43 H	345	95.1	-2.0
5	4824.00	41.4 PK	74.0	-32.6	2.56 H	212	39.2	2.2
6	4824.00	29.8 AV	54.0	-24.2	2.56 H	212	27.6	2.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.9 PK	74.0	-9.1	3.73 V	215	67.0	-2.1
2	2390.00	52.5 AV	54.0	-1.5	3.73 V	215	54.6	-2.1
3	*2412.00	103.4 PK			3.80 V	224	105.4	-2.0
4	*2412.00	94.7 AV			3.80 V	224	96.7	-2.0
5	4824.00	41.6 PK	74.0	-32.4	1.03 V	119	39.4	2.2
6	4824.00	30.1 AV	54.0	-23.9	1.03 V	119	27.9	2.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.7 PK	74.0	-13.3	1.42 H	360	62.8	-2.1
2	2390.00	45.6 AV	54.0	-8.4	1.42 H	360	47.7	-2.1
3	*2437.00	106.0 PK			1.42 H	360	108.0	-2.0
4	*2437.00	96.8 AV			1.42 H	360	98.8	-2.0
5	2483.50	66.0 PK	74.0	-8.0	1.42 H	360	67.8	-1.8
6	2483.50	51.3 AV	54.0	-2.7	1.42 H	360	53.1	-1.8
7	4874.00	41.6 PK	74.0	-32.4	2.54 H	201	39.3	2.3
8	4874.00	30.1 AV	54.0	-23.9	2.54 H	201	27.8	2.3
9	7311.00	44.0 PK	74.0	-30.0	1.50 H	100	35.4	8.6
10	7311.00	33.8 AV	54.0	-20.2	1.50 H	100	25.2	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	3.64 V	225	64.3	-2.1
2	2390.00	47.2 AV	54.0	-6.8	3.64 V	225	49.3	-2.1
3	*2437.00	107.6 PK			3.64 V	225	109.6	-2.0
4	*2437.00	98.6 AV			3.64 V	225	100.6	-2.0
5	2483.50	67.7 PK	74.0	-6.3	3.64 V	225	69.5	-1.8
6	2483.50	52.9 AV	54.0	-1.1	3.64 V	225	54.7	-1.8
7	4874.00	41.8 PK	74.0	-32.2	1.00 V	105	39.5	2.3
8	4874.00	30.5 AV	54.0	-23.5	1.00 V	105	28.2	2.3
9	7311.00	43.7 PK	74.0	-30.3	1.50 V	100	35.1	8.6
10	7311.00	33.7 AV	54.0	-20.3	1.50 V	100	25.1	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.1 PK			1.38 H	345	103.0	-1.9
2	*2462.00	93.0 AV			1.38 H	345	94.9	-1.9
3	2483.50	67.7 PK	74.0	-6.3	1.38 H	345	69.5	-1.8
4	2483.50	50.8 AV	54.0	-3.2	1.38 H	345	52.6	-1.8
5	4924.00	41.5 PK	74.0	-32.5	2.53 H	204	39.0	2.5
6	4924.00	29.9 AV	54.0	-24.1	2.53 H	204	27.4	2.5
7	7386.00	43.2 PK	74.0	-30.8	1.52 H	112	34.6	8.6
8	7386.00	33.0 AV	54.0	-21.0	1.52 H	112	24.4	8.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.7 PK			3.67 V	226	104.6	-1.9
2	*2462.00	94.6 AV			3.67 V	226	96.5	-1.9
3	2483.50	68.6 PK	74.0	-5.4	3.67 V	226	70.4	-1.8
4	2483.50	52.4 AV	54.0	-1.6	3.67 V	226	54.2	-1.8
5	4924.00	41.7 PK	74.0	-32.3	1.05 V	119	39.2	2.5
6	4924.00	30.1 AV	54.0	-23.9	1.05 V	119	27.6	2.5
7	7386.00	43.5 PK	74.0	-30.5	1.52 V	96	34.9	8.6
8	7386.00	33.2 AV	54.0	-20.8	1.52 V	96	24.6	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	1.52 H	359	65.6	-2.1
2	2390.00	51.1 AV	54.0	-2.9	1.52 H	359	53.2	-2.1
3	*2412.00	101.9 PK			1.52 H	359	103.9	-2.0
4	*2412.00	92.8 AV			1.52 H	359	94.8	-2.0
5	4824.00	41.4 PK	74.0	-32.6	2.55 H	217	39.2	2.2
6	4824.00	30.0 AV	54.0	-24.0	2.55 H	217	27.8	2.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.3 PK	74.0	-8.7	3.80 V	224	67.4	-2.1
2	2390.00	52.7 AV	54.0	-1.3	3.80 V	224	54.8	-2.1
3	*2412.00	103.5 PK			3.80 V	224	105.5	-2.0
4	*2412.00	94.5 AV			3.80 V	224	96.5	-2.0
5	4824.00	42.3 PK	74.0	-31.7	1.02 V	109	40.1	2.2
6	4824.00	30.6 AV	54.0	-23.4	1.02 V	109	28.4	2.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.6 PK	74.0	-12.4	1.48 H	355	63.7	-2.1
2	2390.00	46.5 AV	54.0	-7.5	1.48 H	355	48.6	-2.1
3	*2437.00	106.6 PK			1.48 H	355	108.6	-2.0
4	*2437.00	98.0 AV			1.48 H	355	100.0	-2.0
5	2483.50	66.0 PK	74.0	-8.0	1.48 H	355	67.8	-1.8
6	2483.50	51.1 AV	54.0	-2.9	1.48 H	355	52.9	-1.8
7	4874.00	42.0 PK	74.0	-32.0	2.56 H	202	39.7	2.3
8	4874.00	30.5 AV	54.0	-23.5	2.56 H	202	28.2	2.3
9	7311.00	43.9 PK	74.0	-30.1	1.51 H	113	35.3	8.6
10	7311.00	33.6 AV	54.0	-20.4	1.51 H	113	25.0	8.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.2 PK	74.0	-10.8	3.67 V	225	65.3	-2.1
2	2390.00	48.1 AV	54.0	-5.9	3.67 V	225	50.2	-2.1
3	*2437.00	108.2 PK			3.67 V	225	110.2	-2.0
4	*2437.00	99.7 AV			3.67 V	225	101.7	-2.0
5	2483.50	67.5 PK	74.0	-6.5	3.67 V	225	69.3	-1.8
6	2483.50	52.7 AV	54.0	-1.3	3.67 V	225	54.5	-1.8
7	4874.00	42.0 PK	74.0	-32.0	1.00 V	115	39.7	2.3
8	4874.00	30.7 AV	54.0	-23.3	1.00 V	115	28.4	2.3
9	7311.00	44.3 PK	74.0	-29.7	1.54 V	88	35.7	8.6
10	7311.00	34.1 AV	54.0	-19.9	1.54 V	88	25.5	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.2 PK			1.41 H	358	103.1	-1.9
2	*2462.00	92.5 AV			1.41 H	358	94.4	-1.9
3	2483.50	67.7 PK	74.0	-6.3	1.41 H	358	69.5	-1.8
4	2483.50	50.8 AV	54.0	-3.2	1.41 H	358	52.6	-1.8
5	4924.00	41.8 PK	74.0	-32.2	2.52 H	216	39.3	2.5
6	4924.00	30.0 AV	54.0	-24.0	2.52 H	216	27.5	2.5
7	7386.00	42.9 PK	74.0	-31.1	1.54 H	124	34.3	8.6
8	7386.00	32.8 AV	54.0	-21.2	1.54 H	124	24.2	8.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	102.7 PK			3.67 V	227	104.6	-1.9
2	*2462.00	94.2 AV			3.67 V	227	96.1	-1.9
3	2483.50	69.2 PK	74.0	-4.8	3.67 V	227	71.0	-1.8
4	2483.50	52.4 AV	54.0	-1.6	3.67 V	227	54.2	-1.8
5	4924.00	42.0 PK	74.0	-32.0	1.04 V	129	39.5	2.5
6	4924.00	30.4 AV	54.0	-23.6	1.04 V	129	27.9	2.5
7	7386.00	43.8 PK	74.0	-30.2	1.56 V	111	35.2	8.6
8	7386.00	33.2 AV	54.0	-20.8	1.56 V	111	24.6	8.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.87	20.1 QP	40.0	-19.9	2.00 H	182	34.5	-14.4
2	148.07	22.4 QP	43.5	-21.1	2.00 H	73	35.4	-13.0
3	196.14	20.3 QP	43.5	-23.2	1.00 H	92	36.7	-16.4
4	233.87	19.5 QP	46.0	-26.5	2.00 H	20	34.8	-15.3
5	639.98	27.5 QP	46.0	-18.5	3.00 H	28	32.6	-5.1
6	826.39	29.6 QP	46.0	-16.4	1.00 H	360	31.7	-2.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.72	23.8 QP	40.0	-16.2	1.00 V	10	36.9	-13.1
2	153.14	19.6 QP	43.5	-23.9	1.00 V	72	32.5	-12.9
3	199.65	19.4 QP	43.5	-24.1	2.00 V	177	35.8	-16.4
4	229.14	21.3 QP	46.0	-24.7	3.00 V	0	37.4	-16.1
5	558.43	27.8 QP	46.0	-18.2	3.00 V	105	34.6	-6.8
6	644.35	30.0 QP	46.0	-16.0	3.00 V	60	35.0	-5.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
50 ohms Terminator	N/A	EMC-02	Sep. 29, 2016	Sep. 28, 2017
RF Cable	5D-FB	COCCAB-001	Sep. 30, 2016	Sep. 29, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 20, 2016	June 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: May 18 to June 01, 2017

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

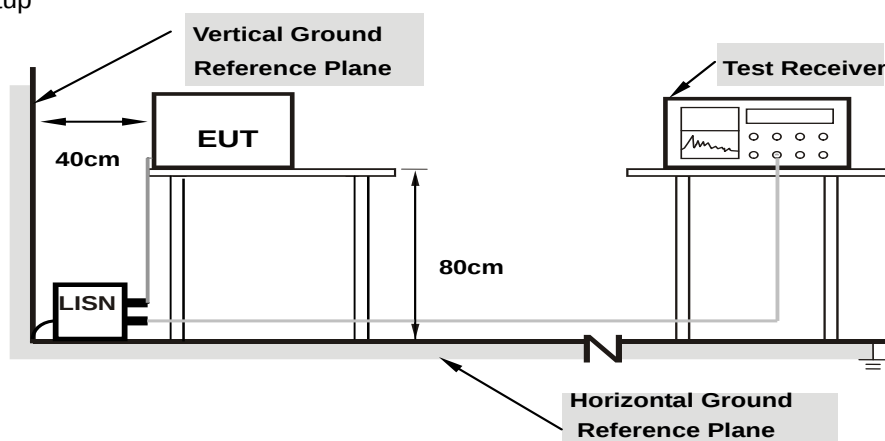

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	10.20	32.44	18.50	42.64	28.70	64.61	54.61	-21.97	-25.91
2	0.70078	10.27	30.54	13.81	40.81	24.08	56.00	46.00	-15.19	-21.92
3	1.21094	10.30	30.65	17.63	40.95	27.93	56.00	46.00	-15.05	-18.07
4	3.24609	10.30	30.01	19.03	40.31	29.33	56.00	46.00	-15.69	-16.67
5	4.25391	10.33	30.39	18.81	40.72	29.14	56.00	46.00	-15.28	-16.86
6	13.14687	11.09	31.50	22.73	42.59	33.82	60.00	50.00	-17.41	-16.18

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

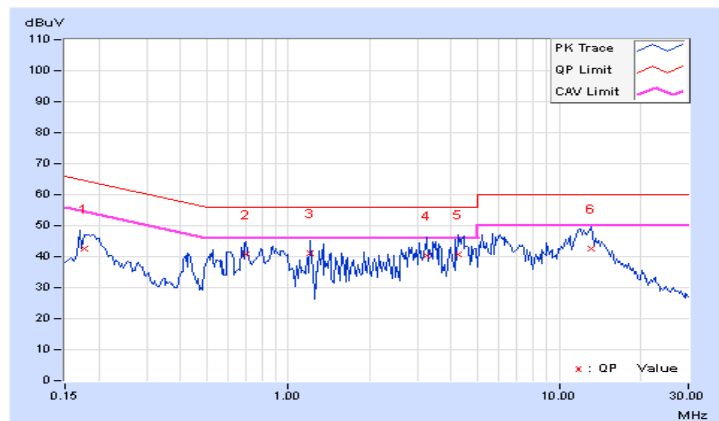


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	10.18	32.70	18.38	42.88	28.56	64.61	54.61	-21.73	-26.05
2	0.27500	10.20	25.75	13.50	35.95	23.70	60.97	50.97	-25.02	-27.27
3	0.54844	10.24	26.91	15.30	37.15	25.54	56.00	46.00	-18.85	-20.46
4	3.19141	10.26	26.51	16.02	36.77	26.28	56.00	46.00	-19.23	-19.72
5	6.17578	10.37	27.74	17.95	38.11	28.32	60.00	50.00	-21.89	-21.68
6	12.92188	10.90	31.49	22.56	42.39	33.46	60.00	50.00	-17.61	-16.54

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

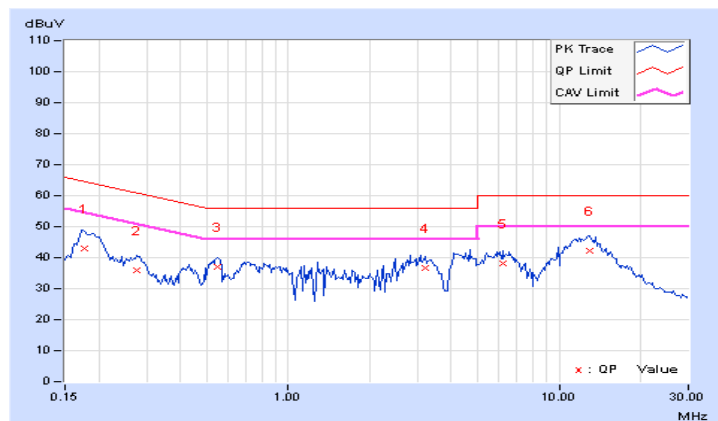


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.19	35.31	26.04	45.50	36.23	65.58	55.58	-20.08	-19.35
2	0.47031	10.22	30.46	25.49	40.68	35.71	56.51	46.51	-15.83	-10.80
3	0.55234	10.23	27.61	19.05	37.84	29.28	56.00	46.00	-18.16	-16.72
4	0.76719	10.24	25.96	15.57	36.20	25.81	56.00	46.00	-19.80	-20.19
5	0.94297	10.26	27.02	21.68	37.28	31.94	56.00	46.00	-18.72	-14.06
6	13.55859	10.91	14.86	9.37	25.77	20.28	60.00	50.00	-34.23	-29.72

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

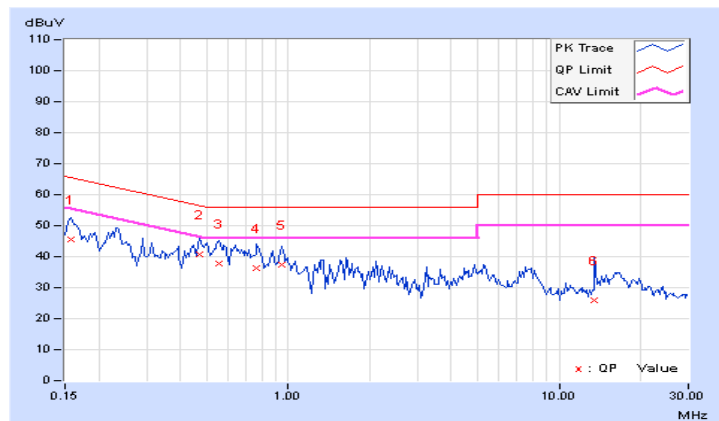


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18906	10.16	29.33	21.75	39.49	31.91	64.08	54.08	-24.59	-22.17
2	0.41953	10.21	25.49	17.76	35.70	27.97	57.46	47.46	-21.76	-19.49
3	0.59141	10.22	24.80	10.98	35.02	21.20	56.00	46.00	-20.98	-24.80
4	0.91172	10.23	21.53	9.63	31.76	19.86	56.00	46.00	-24.24	-26.14
5	2.48047	10.25	27.10	20.00	37.35	30.25	56.00	46.00	-18.65	-15.75
6	15.61719	10.91	21.30	13.49	32.21	24.40	60.00	50.00	-27.79	-25.60

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

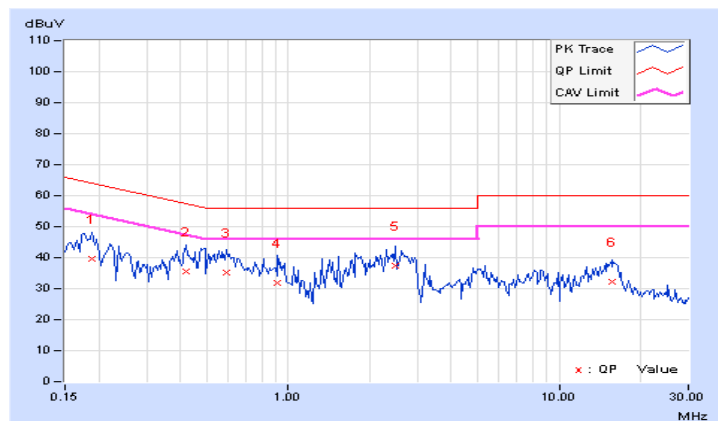


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	10.11	0.5	PASS
6	2437	10.14	0.5	PASS
11	2462	10.10	0.5	PASS

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.43	0.5	PASS
6	2437	16.39	0.5	PASS
11	2462	16.40	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.66	0.5	Pass
6	2437	17.66	0.5	Pass
11	2462	17.68	0.5	Pass

Spectrum Plot of Worst Value


802.11b : CH11

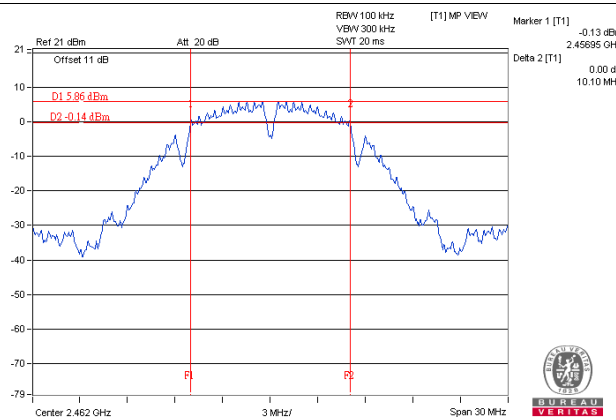

802.11g : CH6

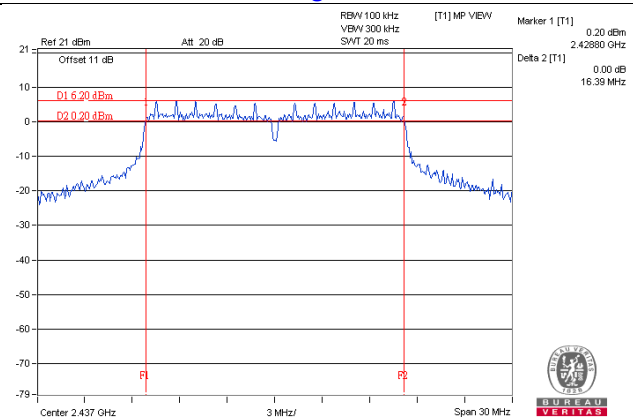


802.11n (HT20) : CH1

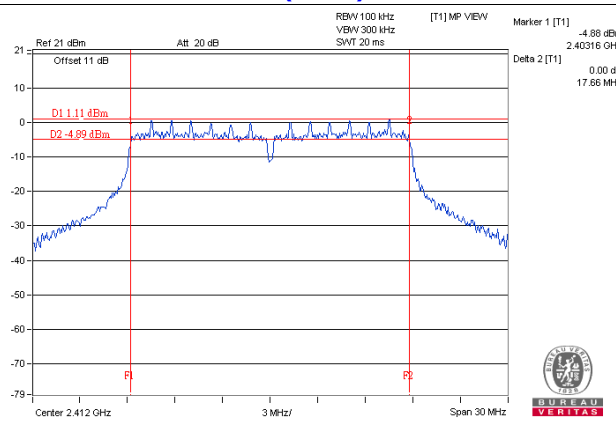

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Deviation from Test Standard

No deviation.

4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.6 Test Results

802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
1	2412	13.80
6	2437	15.00
11	2462	13.08

802.11g


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
1	2412	17.04
6	2437	18.48
11	2462	16.92

802.11n (HT20)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
1	2412	18.12
6	2437	18.96
11	2462	18.12

Spectrum Plot of Worst Value


802.11b : CH6

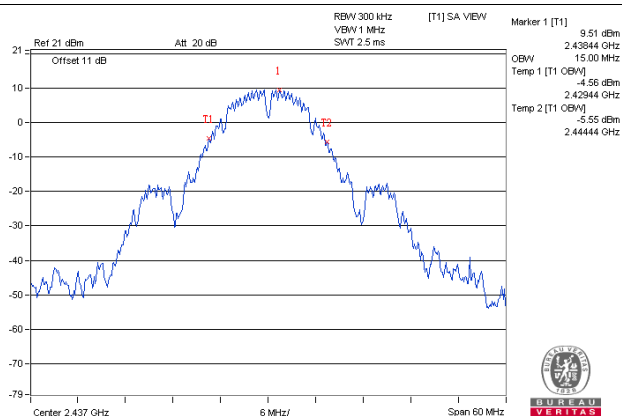

802.11g : CH6

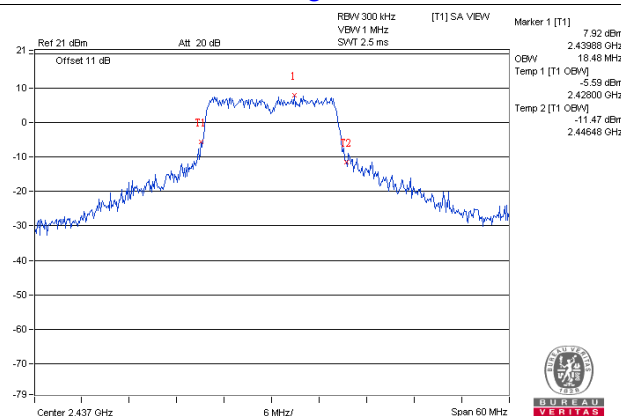

802.11n (HT20) : CH6

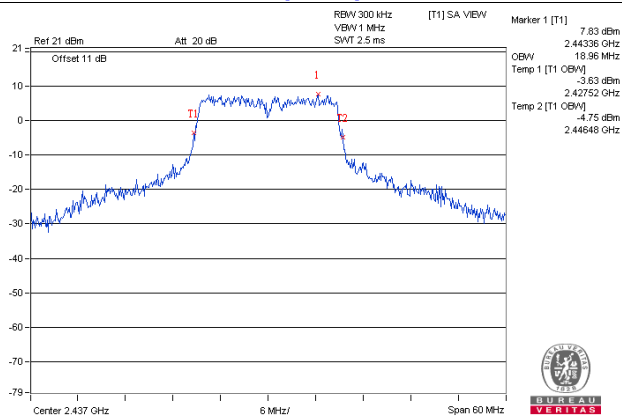


4.5 Conducted Output Power Measurement

4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

FOR PEAK POWER

802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	82.985	19.19	30	Pass
6	2437	100.693	20.03	30	Pass
11	2462	70.469	18.48	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	48.529	16.86	30	Pass
6	2437	112.98	20.53	30	Pass
11	2462	46.238	16.65	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass/Fail
1	2412	49.545	16.95	30	Pass
6	2437	112.46	20.51	30	Pass
11	2462	46.238	16.65	30	Pass

FOR AVERAGE POWER

802.11b

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	51.168	17.09
6	2437	68.391	18.35
11	2462	40.644	16.09

802.11g

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	14.825	11.71
6	2437	48.753	16.88
11	2462	14.158	11.51

802.11n (HT20)


Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)
1	2412	14.894	11.73
6	2437	46.989	16.72
11	2462	13.709	11.37

4.6 Power Spectral Density Measurement

4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Same as Item 4.3.6

4.6.7 Test Results

802.11b

Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-7.42	8	Pass
6	2437	-6.56	8	Pass
11	2462	-7.76	8	Pass

802.11g


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-14.56	8	Pass
6	2437	-9.29	8	Pass
11	2462	-13.71	8	Pass

802.11n (HT20)


Channel	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	2412	-12.84	8	Pass
6	2437	-9.43	8	Pass
11	2462	-13.60	8	Pass

Spectrum Plot of Worst Value


802.11b : CH6

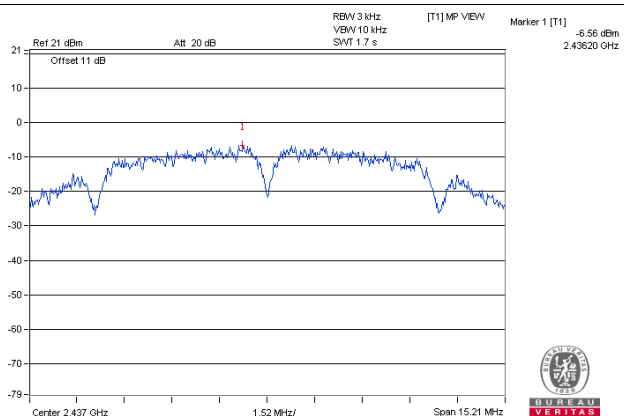

802.11g: CH6

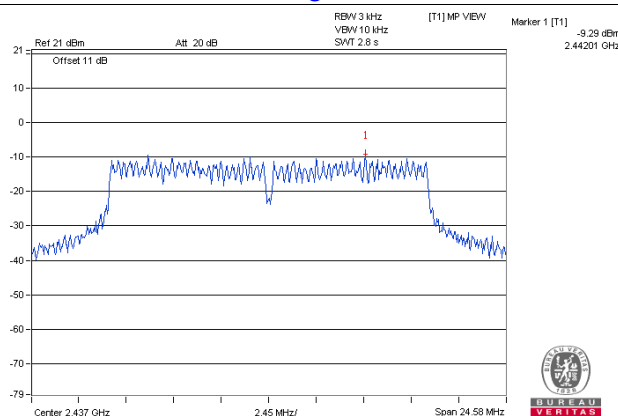

802.11n (HT20) : CH6

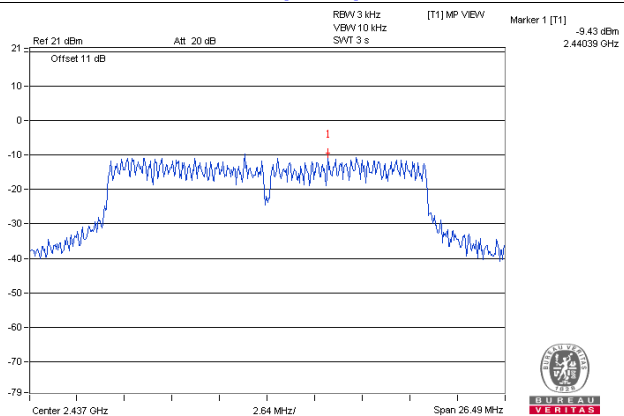


4.7 Conducted Out of Band Emission Measurement

4.7.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition



Same as Item 4.3.6

4.7.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB fset below D1. It shows compliance with the requirement.

802.11b



CH 1

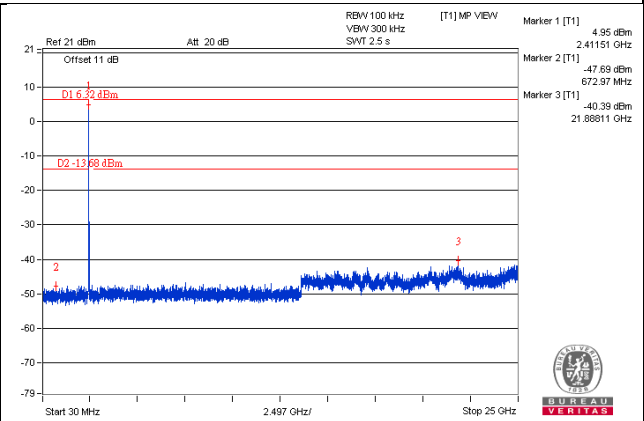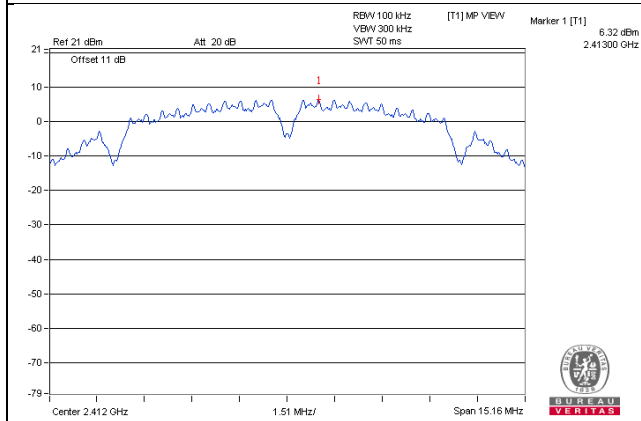


CH 6

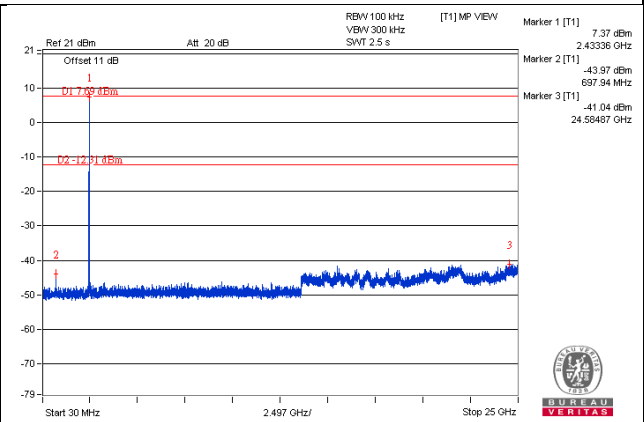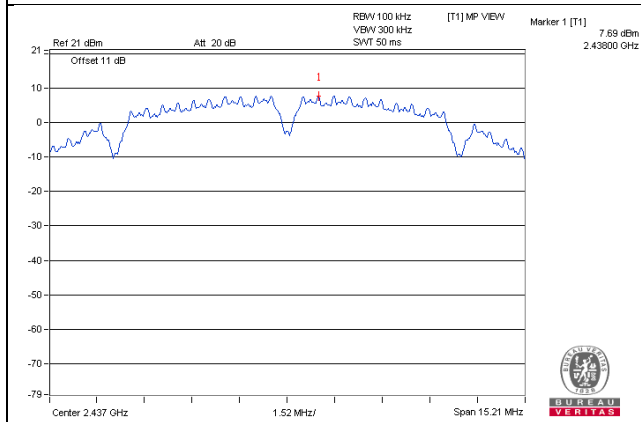


CH 11

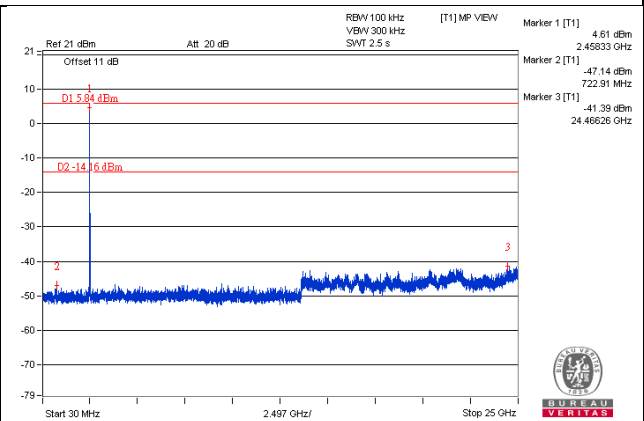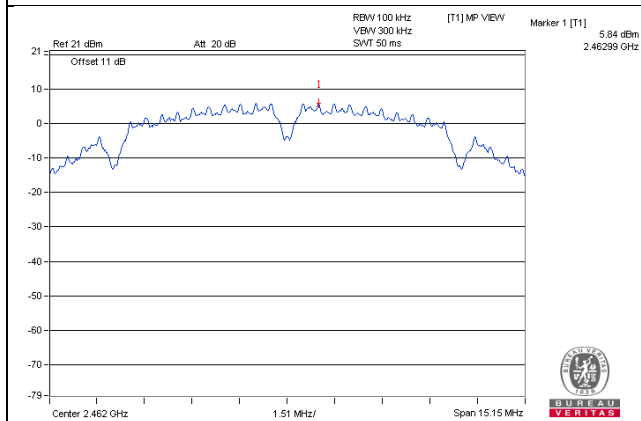

CH 1 Band edge


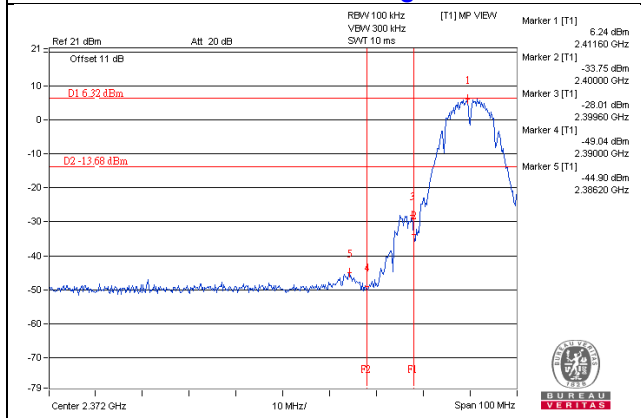


CH 11 Band edge


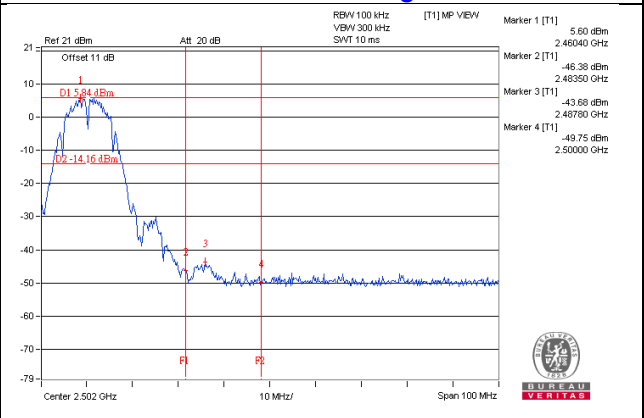


802.11g



CH 1

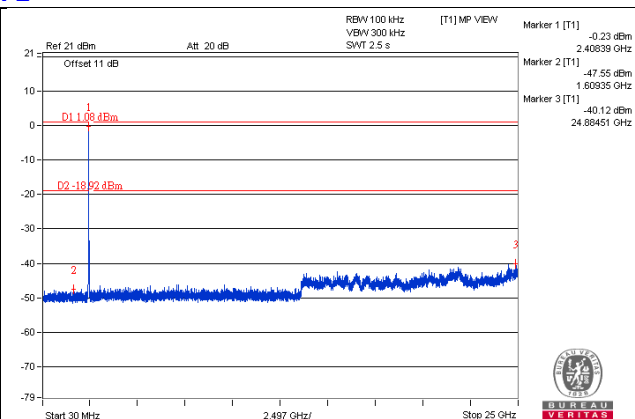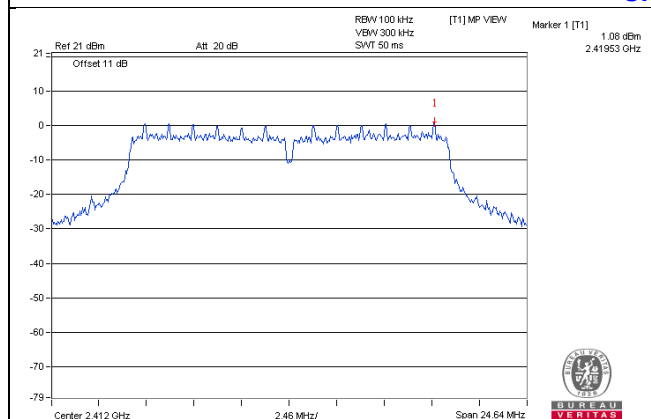


CH 6

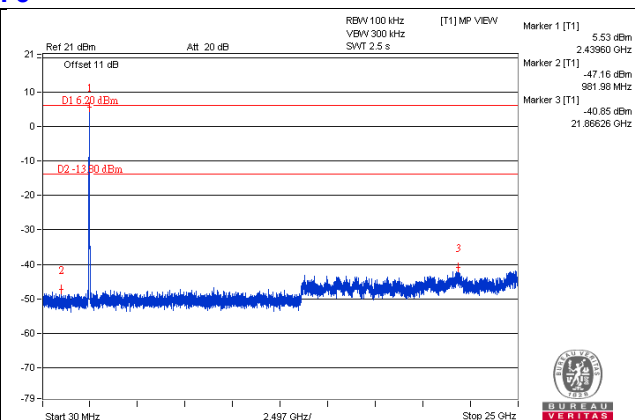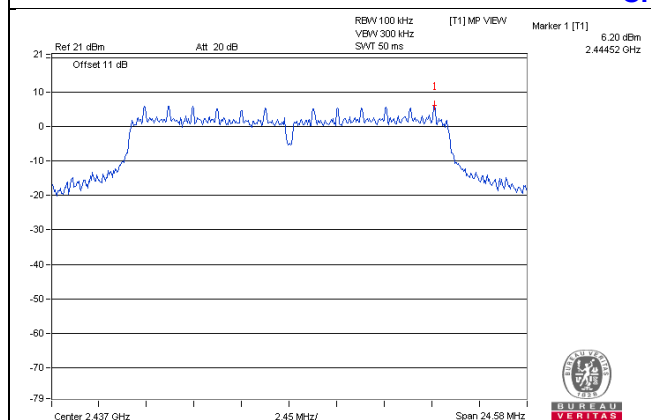


CH 11

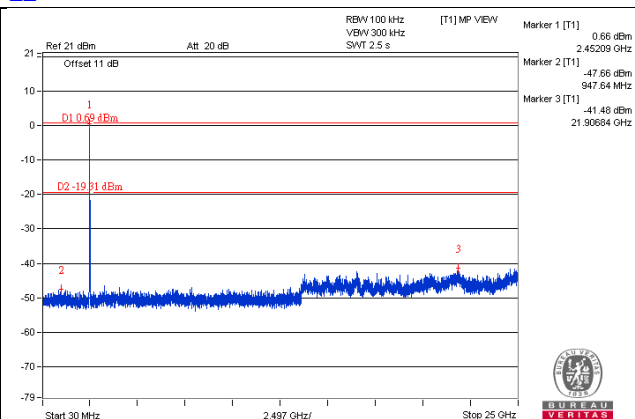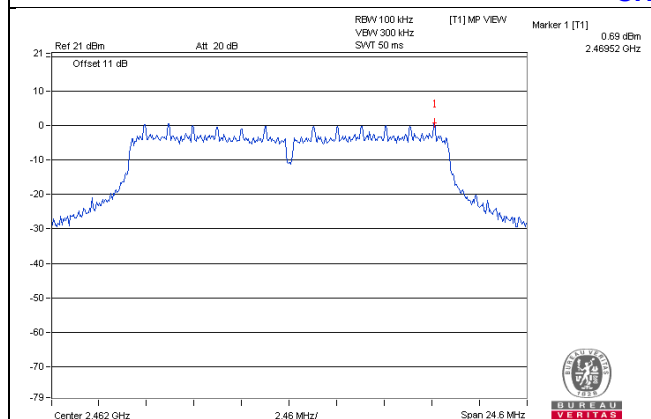

CH 1 Band edge


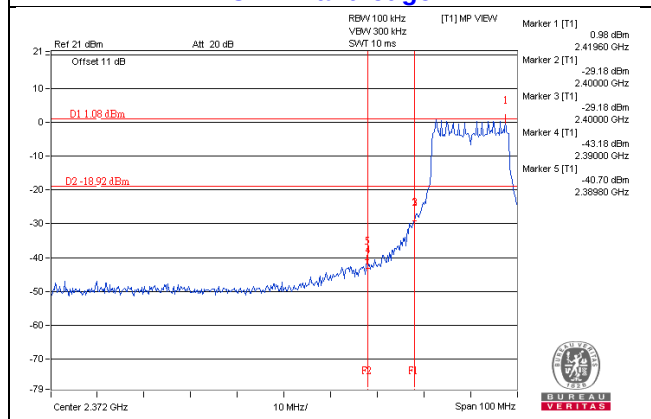


CH 11 Band edge


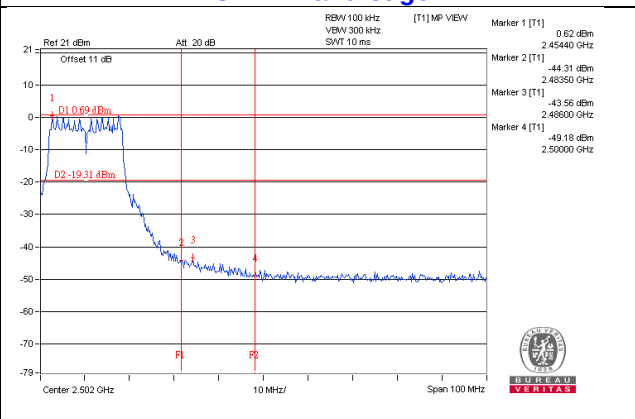


802.11n (HT20)



CH 1

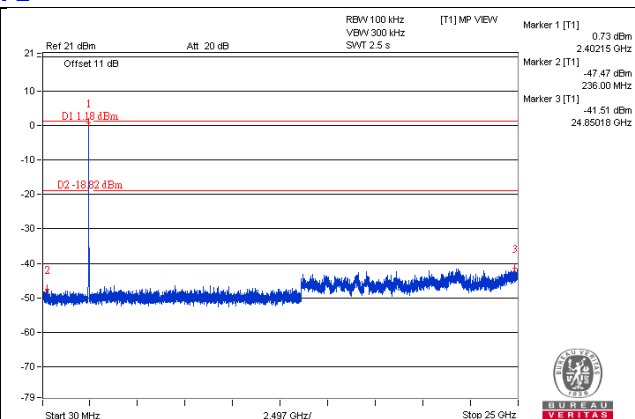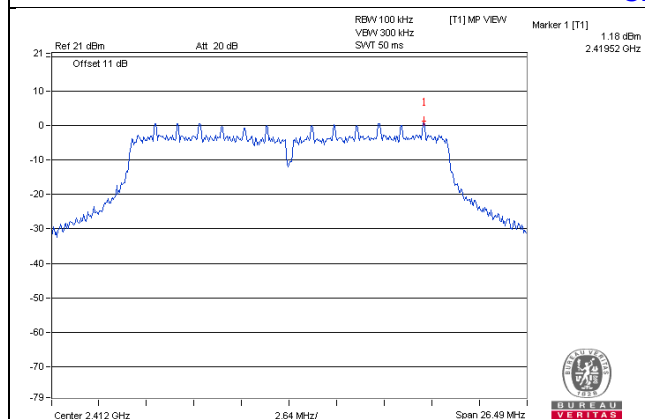


CH 6

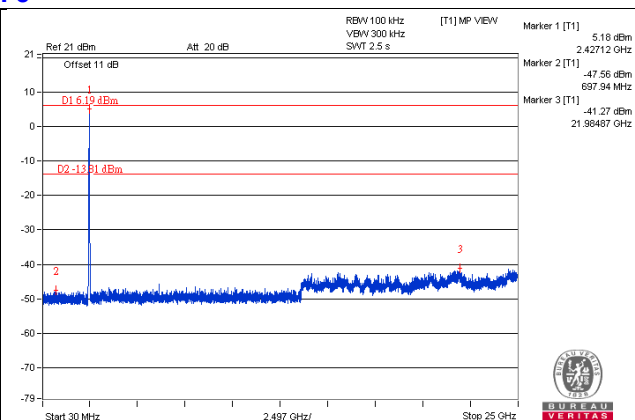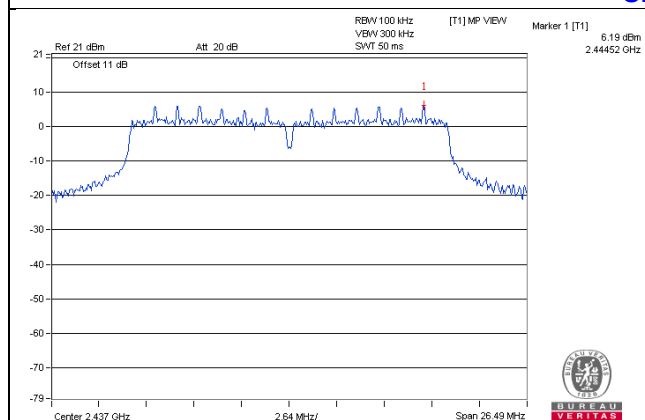


CH 11

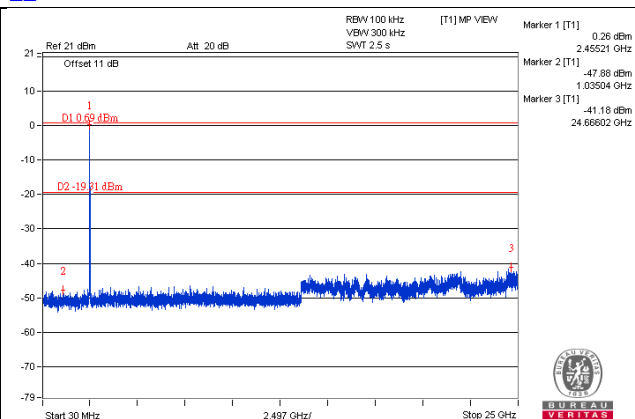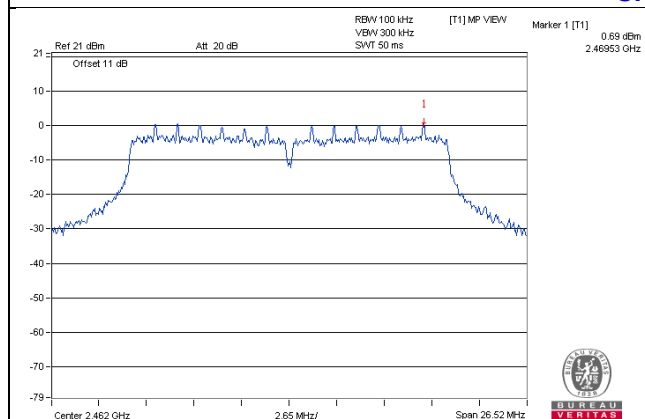

CH 1 Band edge

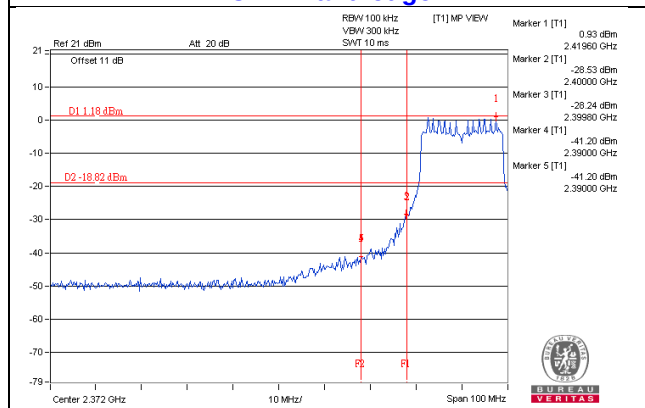

CH 11 Band edge

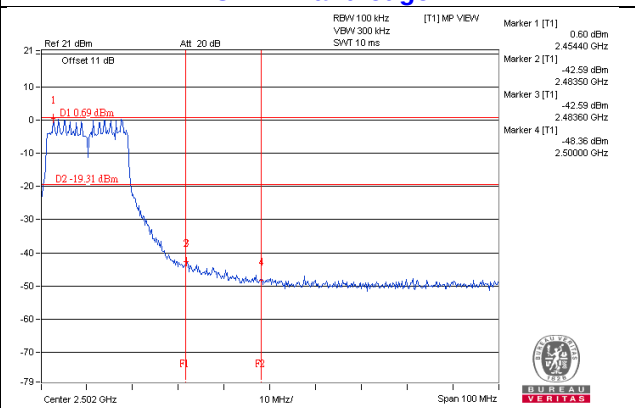

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---