

Nalloy, LLC

TEST REPORT FOR

A2D0US

Tested to The Following Standards:

FCC Part 15 Subpart E Section(s)

15.207 & 15.407
(NII 5.250 – 5.350GHz)

Report No.: 106407-35

Date of issue: February 8, 2022



Test Certificate # 803.01

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test	6
General Product Information	7
FCC Part 15 Subpart E	9
15.215 Occupied Bandwidth	9
15.407(a) Output Power	18
15.407(a) Power Spectral Density	27
15.407(b) Radiated Emissions & Band Edge	47
15.207 AC Conducted Emissions	96
Supplemental Information	104
Measurement Uncertainty	104
Emissions Test Details	104

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Nalloy, LLC
2301 5th Avenue
Seattle, WA 98108

Representative: Naga Suryadevara
Customer Reference Number: 2D-07350222

DATE OF EQUIPMENT RECEIPT:

DATE(S) OF TESTING:

REPORT PREPARED BY:

Lisa Bevington
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 106407

December 6, 2021

December 6, 2021

December 6-10, 16, 21, & 23, 2021

January 5-7, 10-13, 17-21 & 24-28, 2022

February 2, 2022

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink that reads "Steve Behm".

Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
Canyon Park
22116 23rd Drive S.E., Suite A
Bothell, WA 98021

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.20

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart E - 15.407 (NII)

Test Procedure	Description	Modifications	Results
15.215	Occupied Bandwidth	NA	PASS
15.407(a)	Output Power	NA	PASS
15.407(a)	Power Spectral Density	NA	PASS
15.407(b)	Radiated Emissions & Band Edge	NA	PASS
15.407(g)	Frequency Stability	NA	NP1
15.207	AC Conducted Emissions	NA	PASS

NA = Not Applicable

NP1 = CKC was not contracted to perform the required testing.

ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
The Test Setup Photos are incorporated by reference 106407-35_Test Setup_Photos

EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
None	Nalloy, LLC	A2D0US	G3A1VF021386000B

Support Equipment:

Device	Manufacturer	Model #	S/N
Headphones	Poly	C5220T	NA
Laptop	HP	14-fq0032od	5CD12654D3
None	Nalloy, LLC	Gala	XXX
None	Nalloy, LLC	Gala	XXX
USB to Ethernet Adapter	Amazon	Gigabit Ethernet Adapter	0050B6E212BA
AC Adapter	Delta Electronics, Inc.	MDS-030AAC15	NA

Configuration 2

Equipment Tested:

Device	Manufacturer	Model #	S/N
None	Nalloy, LLC	A2D0US	G3A1VF021386000G

Support Equipment:


Device	Manufacturer	Model #	S/N
Headphones	Sony	WH-1000X M3	NA
Laptop	ASUS	E210M	M9N0CX21R750387
None	Nalloy, LLC	Gala	XXX
None	Nalloy, LLC	Gala	XXX
USB to Ethernet Adapter	Amazon	Gigabit Ethernet Adapter	0050B6E212BA
AC Adapter	Delta Electronics, Inc.	MDS-030AAC15	NA

General Product Information:


Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	802.11a, 802.11ac (20, 40 and 80 MHz), 802.11n (20 and 40MHz BW)
Operating Frequency Range:	5250-5350 MHz
Modulation Type(s):	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Maximum Duty Cycle:	100% Modulated (tested worst-case)
Number of TX Chains:	1
Antenna Type(s) and Gain:	Omnidirectional / 3.8dBi
Beamforming Type:	N/A
Antenna Connection Type:	Integral (External connector provided to facilitate testing)
Nominal Input Voltage:	120VAC
Firmware / Software used for Test:	mainline-1.0.2137.0 Bin file- Golden 082621 Qualcomm radio control toolkit v4.0
The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility.	

Block Diagram of Test Setup(s)

Test Setup Block Diagram

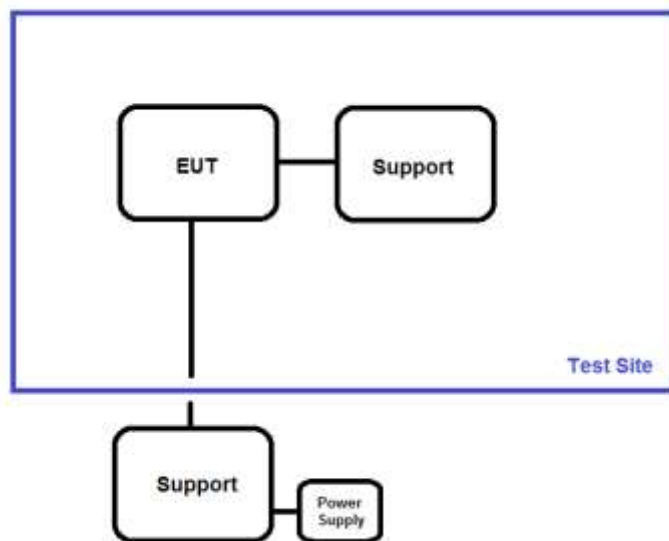

Radiated test setup

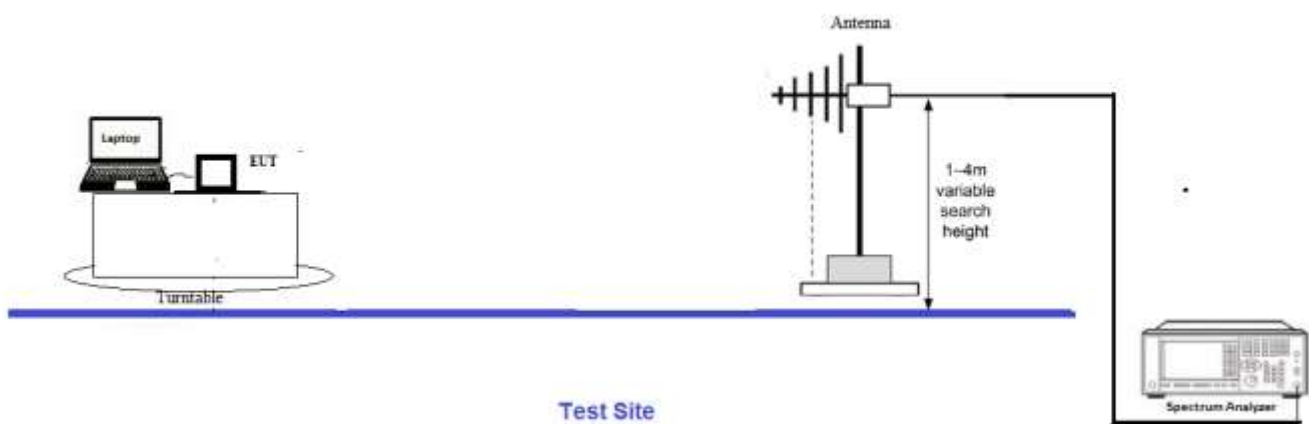

Rev C

FCC Part 15 Subpart E

15.215 Occupied Bandwidth

Test Setup/Conditions			
Test Location:	Bothell Lab C3	Test Engineer:	S. Pittsford
Test Method:	ANSI C63.10 (2013), KDB 789033 KDB 662911 (v02r01 10/31/2013)	Test Date(s):	1/18/2022
Configuration:	2		
Test Setup:	Duty Cycle: 100% (Test Mode) Test Mode: Continuously transmitting Test Setup: EUT is transmitting through the antenna port connector and is attached to the spectrum analyzer.		

Environmental Conditions			
Temperature (°C)	21	Relative Humidity (%):	45

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/29/2021	11/29/2023
P07229	Attenuator	Pasternack	PE7004-20	8/9/2021	8/9/2023
P07796	Cable	Andrews	Heliax	7/7/2021	7/7/2023

26dB Occupied Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5260	0	802.11a	30802	None	N/A
5280	0	802.11a	29372		
5320	0	802.11a	26718		
5260	0	802.11n20	29394	None	N/A
5280	0	802.11n20	29049		
5320	0	802.11n20	28010		
5270	0	802.11n40	51623	None	N/A
5310	0	802.11n40	42372		
5260	0	802.11ac20	29409		
5280	0	802.11ac20	29237	None	N/A
5320	0	802.11ac20	28695		
5270	0	802.11ac40	49622		
5310	0	802.11ac40	42576	None	N/A


Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5290	0	802.11ac80	99429		

99% Occupied Bandwidth


Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
5260	0	802.11a	17508.5	None	N/A
5280	0	802.11a	17723.3		
5320	0	802.11a	17513.8		
5260	0	802.11n20	18778.7	None	N/A
5280	0	802.11n20	18626.6		
5320	0	802.11n20	18601.5		
5270	0	802.11n40	37485.1	None	N/A
5310	0	802.11n40	37166.1		
5260	0	802.11ac20	18664.7		
5280	0	802.11ac20	18620.6	None	N/A
5320	0	802.11ac20	18592.0		
5270	0	802.11ac40	37433.7		
5310	0	802.11ac40	37343.6	None	N/A
5290	0	802.11ac80	76518.7		

Plot(s)


99% & 26dB Occupied Bandwidth 802.11a

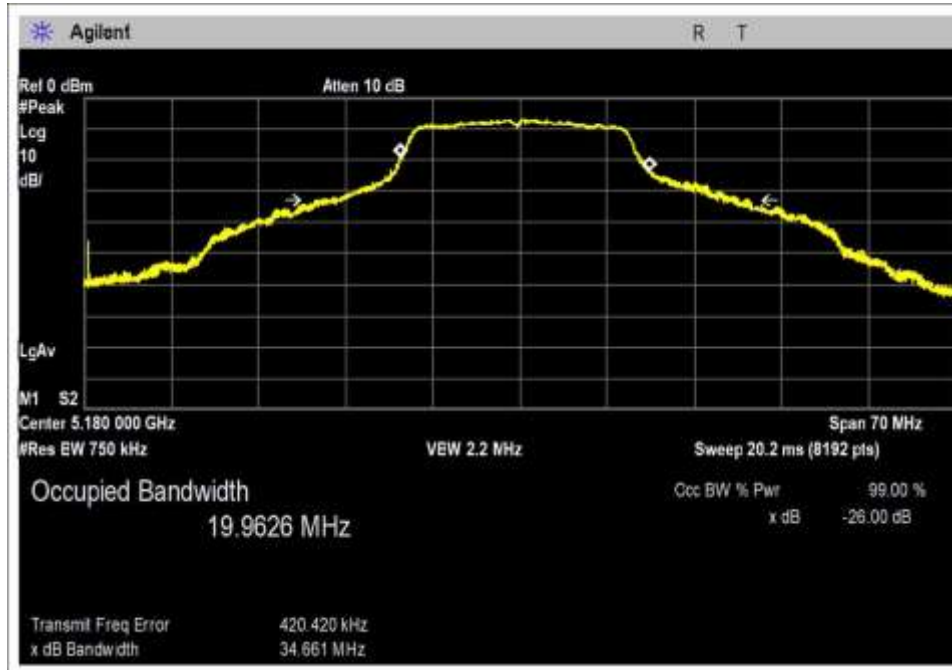

Low Channel

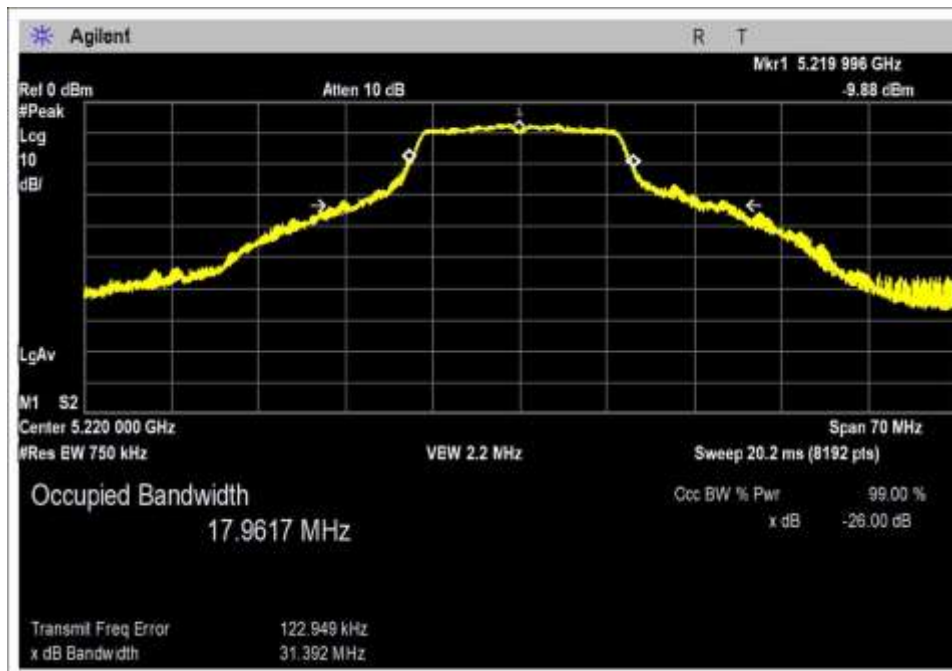


Middle Channel

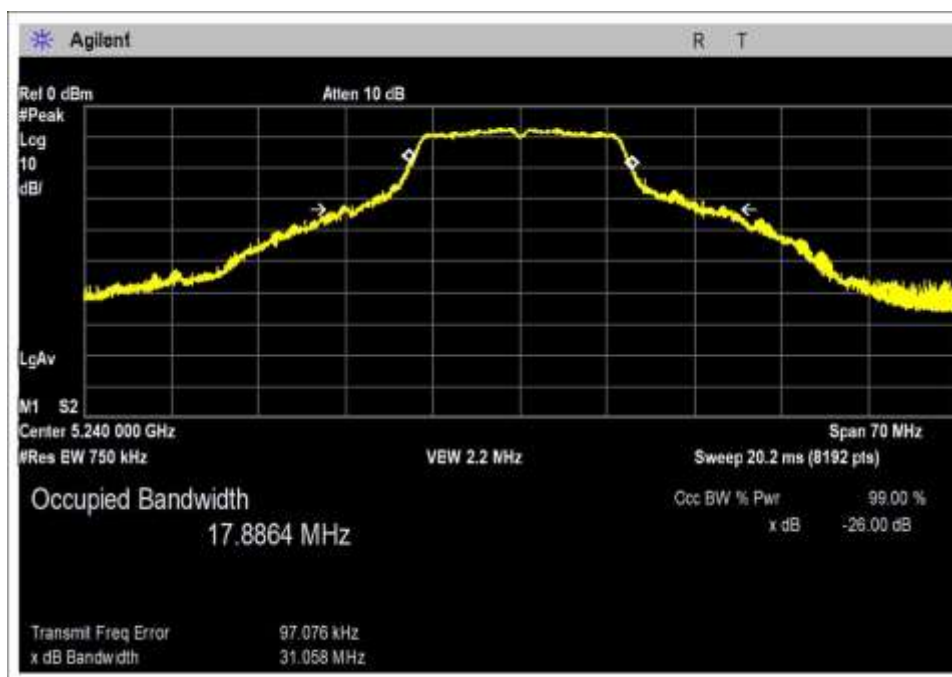


High Channel


99% & 26dB Occupied Bandwidth 802.11n20

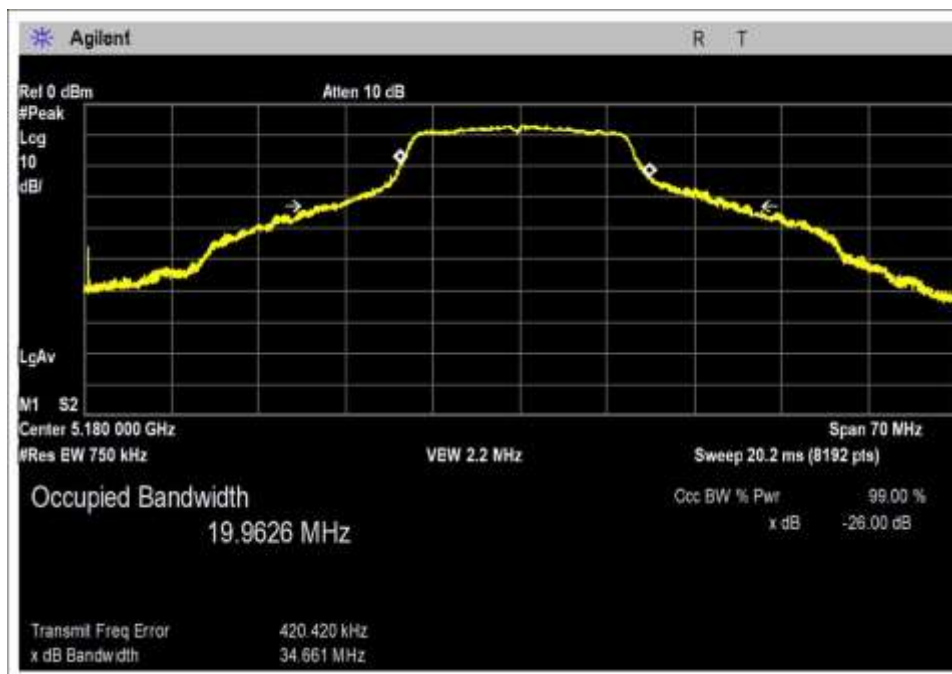

Low Channel

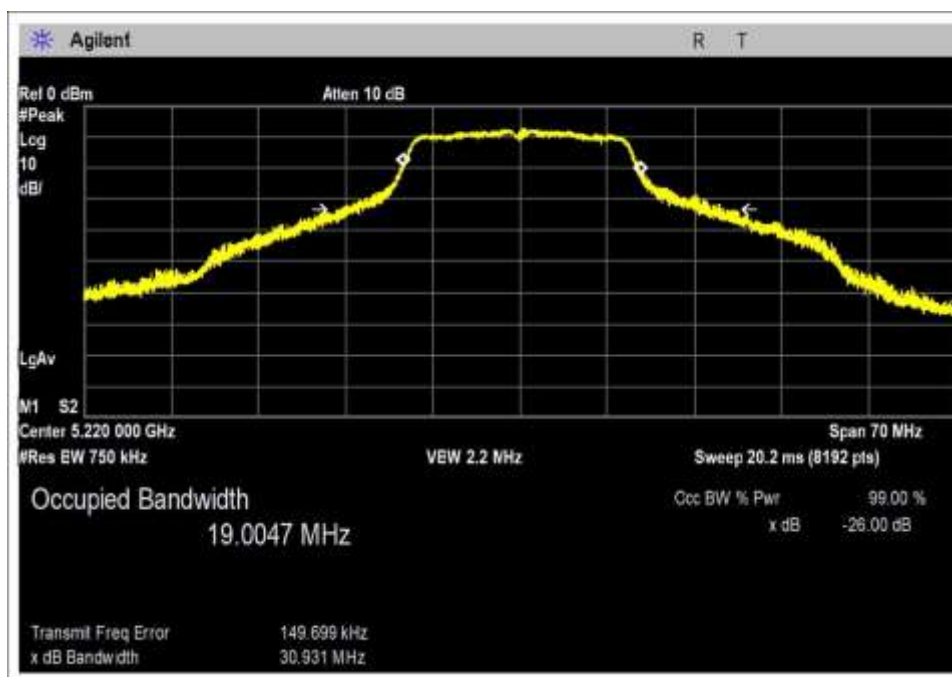


Middle Channel

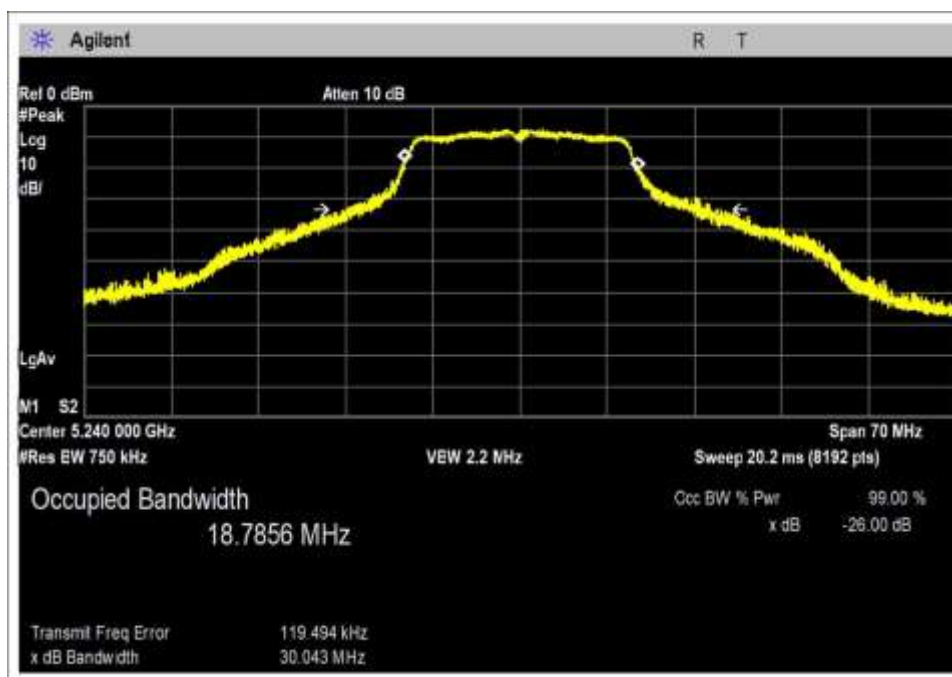


High Channel

99% & 26dB Occupied Bandwidth 802.11n40

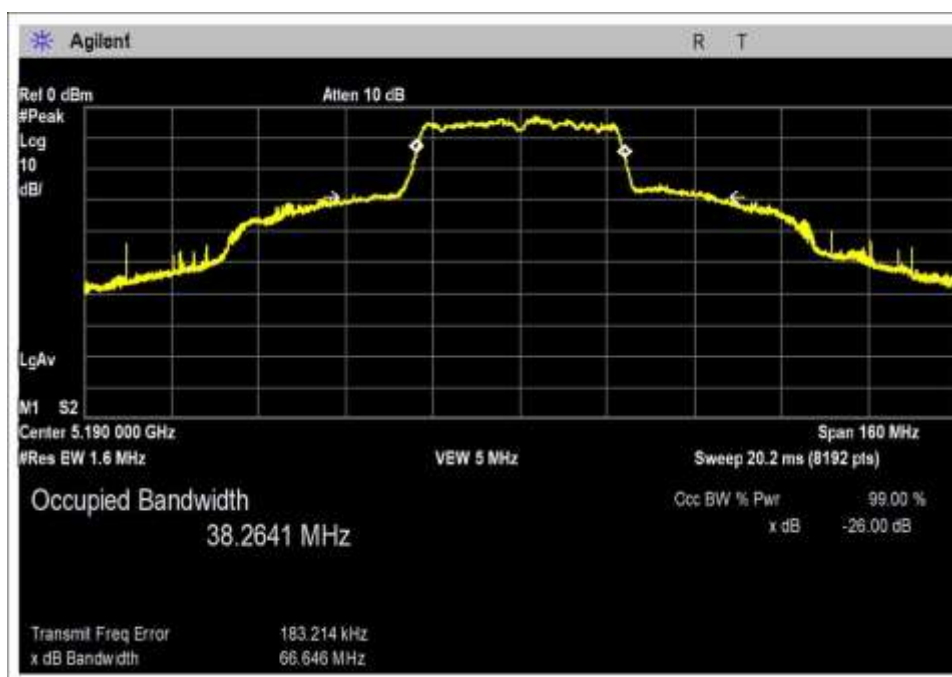


Low Channel

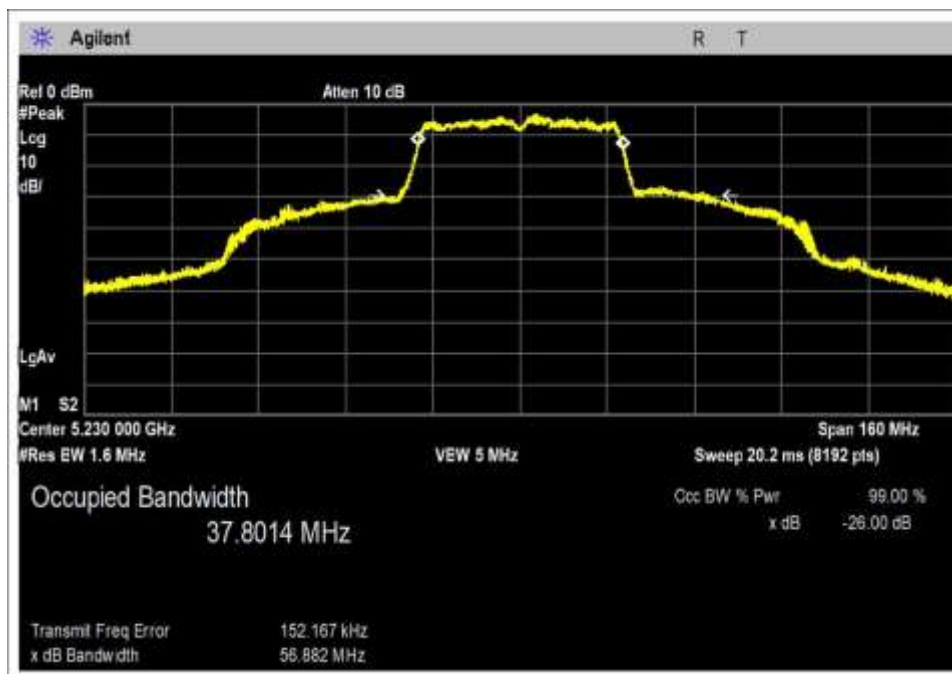


High Channel


99% & 26dB Occupied Bandwidth 802.11ac20

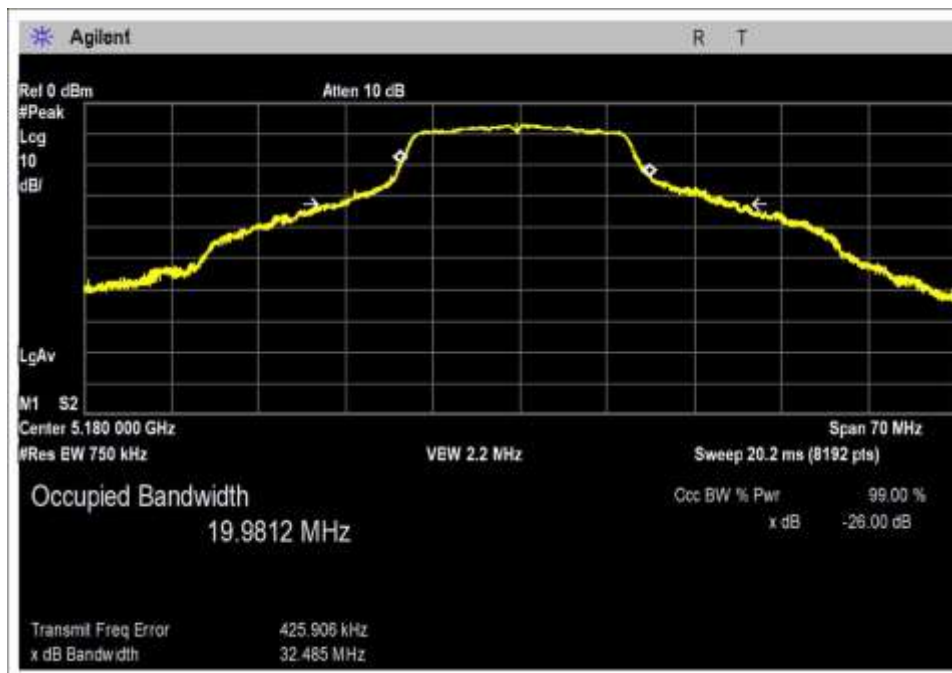

Low Channel

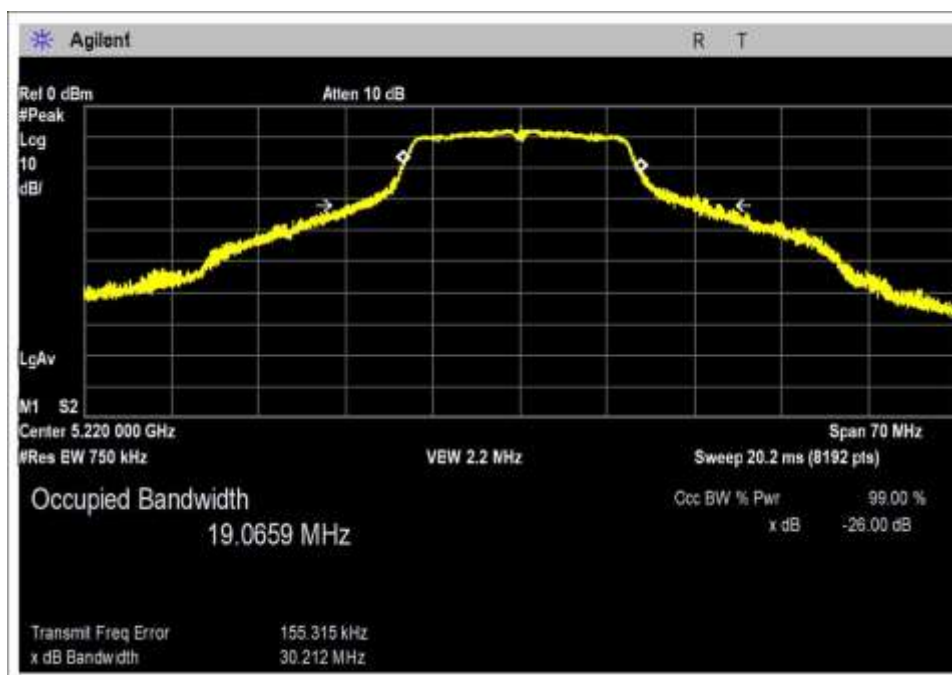


Middle Channel

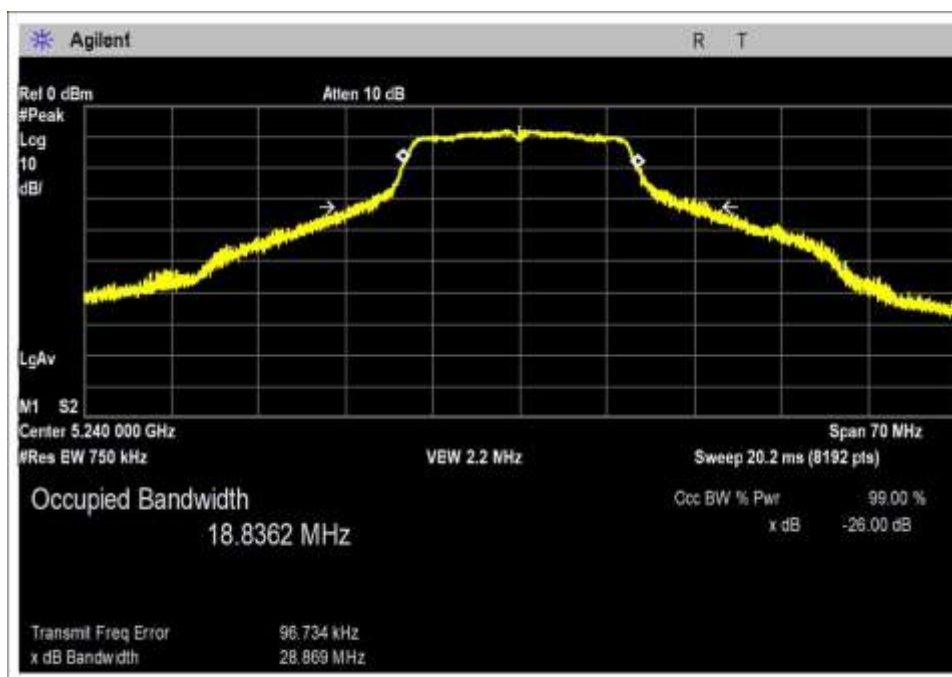


High Channel

99% & 26dB Occupied Bandwidth 802.11ac40

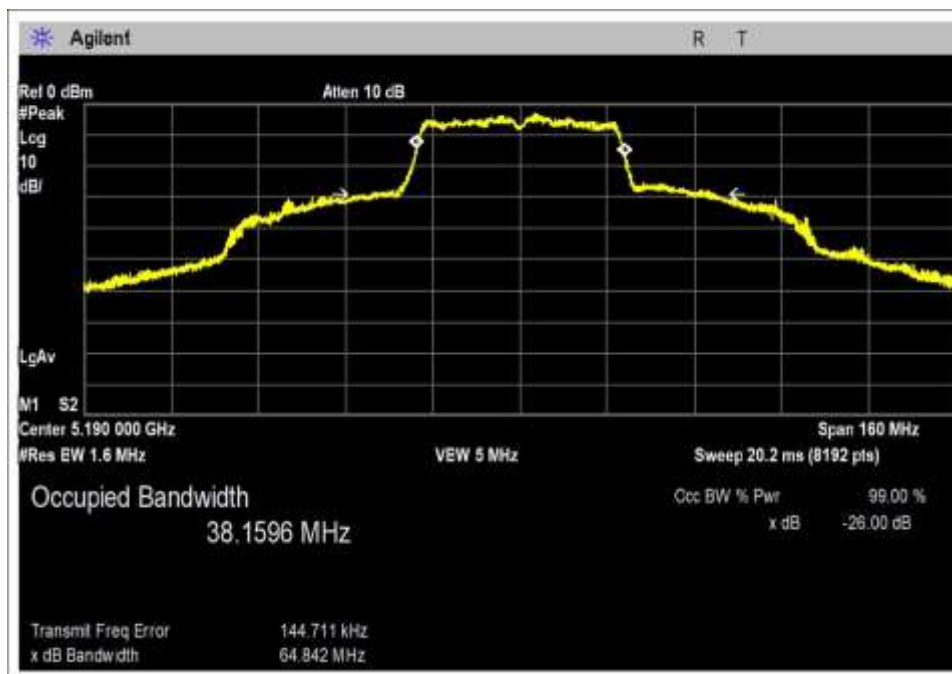


Low Channel

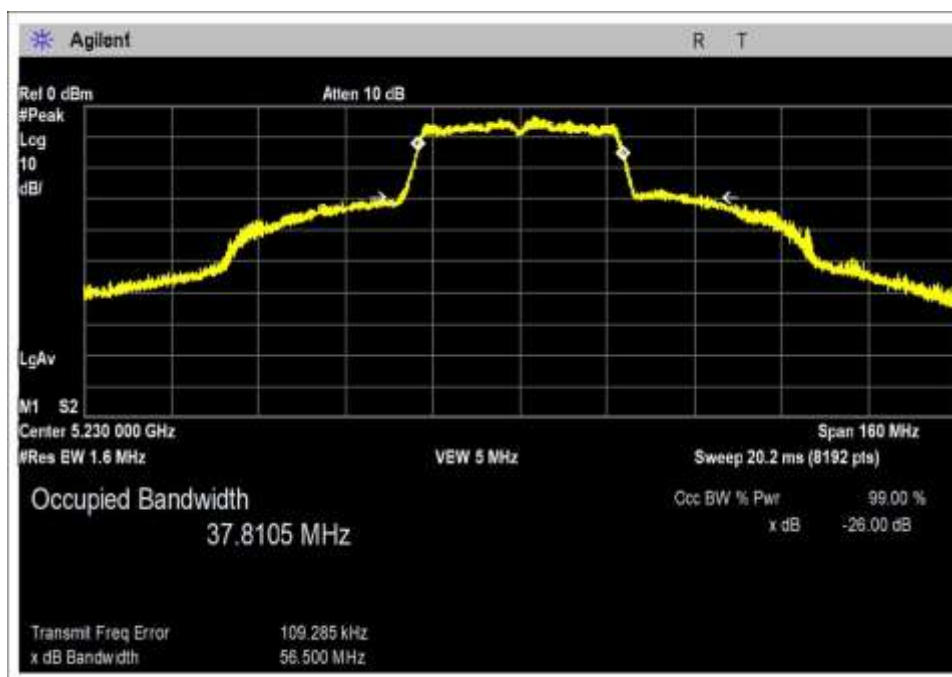

High Channel

99% & 26dB Occupied Bandwidth 802.11ac80

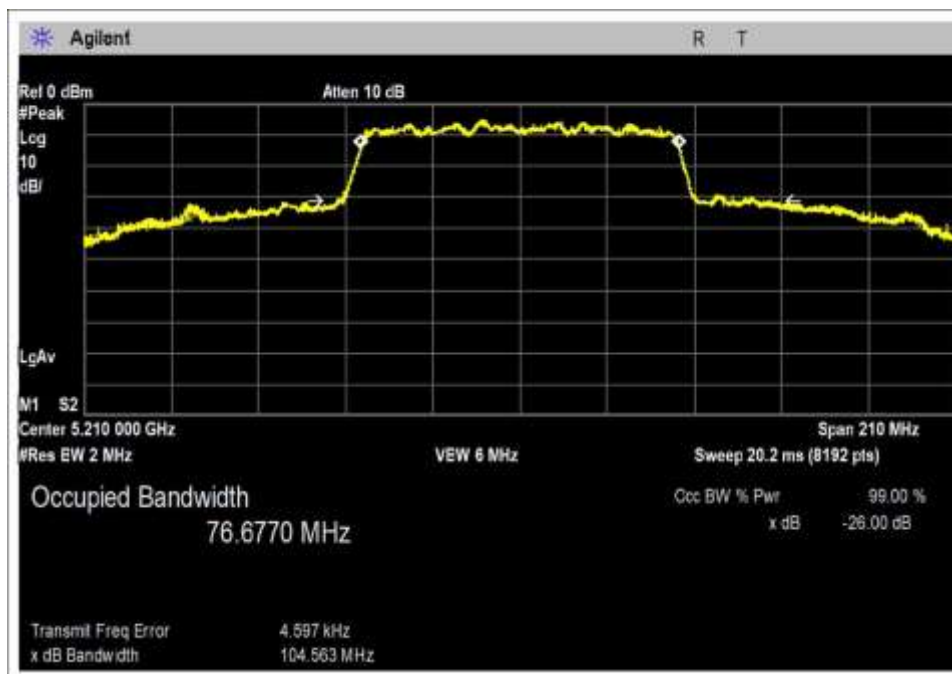

15.407(a) Output Power

Test Setup/Conditions			
Test Location:	Bothell Lab C3	Test Engineer:	M. Harrison
Test Method:	ANSI C63.10 (2013), KDB 789033	Test Date(s):	1/26/2022
Configuration:	1		
Test Setup:	Duty Cycle: 100% (Test Mode) Test Mode: Continuously transmitting Test Setup: EUT is transmitting through a temporary connection to antenna port connector via UFL adapter and is attached to the spectrum analyzer. The UFL adapter has a declared manufacturer loss of 0.9dB and will be accounted for in the measurement.		

Environmental Conditions			
Temperature (°C)	21	Relative Humidity (%):	45

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/29/2021	11/29/2023
P06011	Cable	Andrew	Heliast	8/7/2020	8/7/2022
03514	Multimeter	Fluke	87	12/3/2020	12/3/2022
01505B	AC Power Supply	PPS	345AMXT-UPC32	6/15/2021	6/15/2023

Test Data Summary - Voltage Variations					
Frequency (MHz)	Modulation / Ant Port	V _{Minimum} (dBm)	V _{Nominal} (dBm)	V _{Maximum} (dBm)	Max Deviation from V _{Nominal} (dB)
5260	802.11a	18.4	18.4	18.4	0.0
5280	802.11n20	18.0	18.0	18.0	0.0
5270	802.11n40	18.6	18.6	18.6	0.0
5280	802.11ac20	18.0	18.0	18.0	0.0
5270	802.11ac40	19.4	19.4	19.4	0.0
5290	802.11ac80	14.3	14.3	14.3	0.0

Test performed using operational mode with the highest output power, representing worst case.

Parameter Definitions:

Measurements performed at input voltage V_{Nominal} ± 15%.

Parameter	Value
V _{Nominal} :	120
V _{Minimum} :	102
V _{Maximum} :	138


Test Data Summary - RF Conducted Measurement					
Measurement Option: AVGSA-1					
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm)	Limit (dBm)	Results
5260	802.11a	Omnidirectional / 3.8dBi	18.4	≤24	Pass
5280	802.11a	Omnidirectional / 3.8dBi	18.2	≤24	Pass
5320	802.11a	Omnidirectional / 3.8dBi	17.0	≤24	Pass
5260	802.11n20	Omnidirectional / 3.8dBi	17.8	≤24	Pass
5280	802.11n20	Omnidirectional / 3.8dBi	18.0	≤24	Pass
5320	802.11n20	Omnidirectional / 3.8dBi	17.6	≤24	Pass
5270	802.11n40	Omnidirectional / 3.8dBi	18.6	≤24	Pass
5310	802.11n40	Omnidirectional / 3.8dBi	16.2	≤24	Pass
5260	802.11ac20	Omnidirectional / 3.8dBi	17.7	≤24	Pass
5280	802.11ac20	Omnidirectional / 3.8dBi	18.0	≤24	Pass
5320	802.11ac20	Omnidirectional / 3.8dBi	17.6	≤24	Pass
5270	802.11ac40	Omnidirectional / 3.8dBi	19.4	≤24	Pass
5310	802.11ac40	Omnidirectional / 3.8dBi	13.5	≤24	Pass
5290	802.11ac80	Omnidirectional / 3.8dBi	14.3	≤24	Pass

The limit is calculated in accordance with 15.407(a)(2):


$$Limit = \text{The lesser of } \begin{cases} 24 \text{ dBm} - (G - 6) \\ 11 \text{ dBm} + 10 \text{ LOG}(B) - (G - 6) \end{cases}$$

Plot Data – Radiated Measurement


Output Power 802.11a

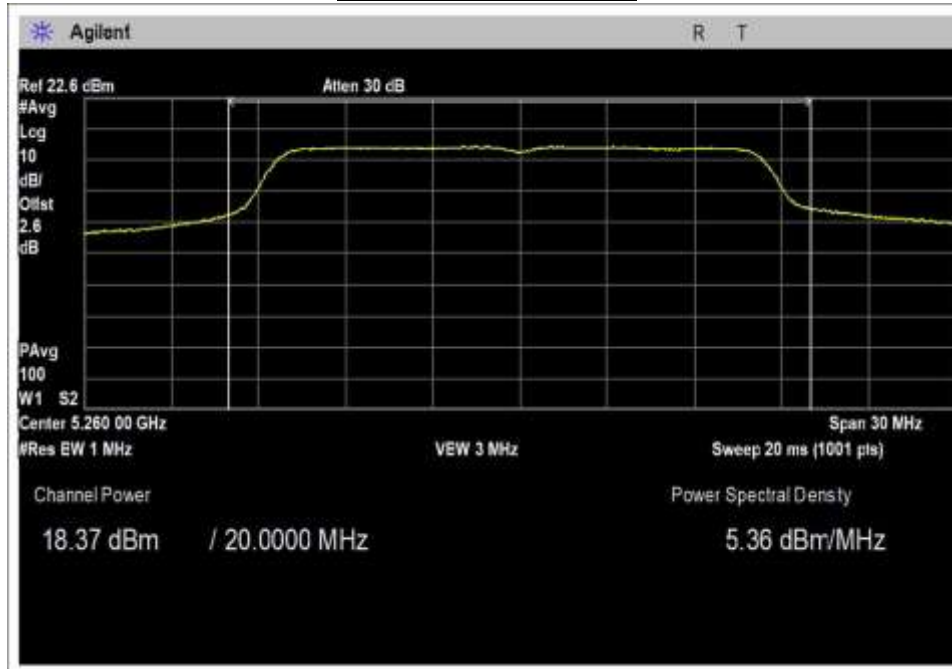

Low Channel

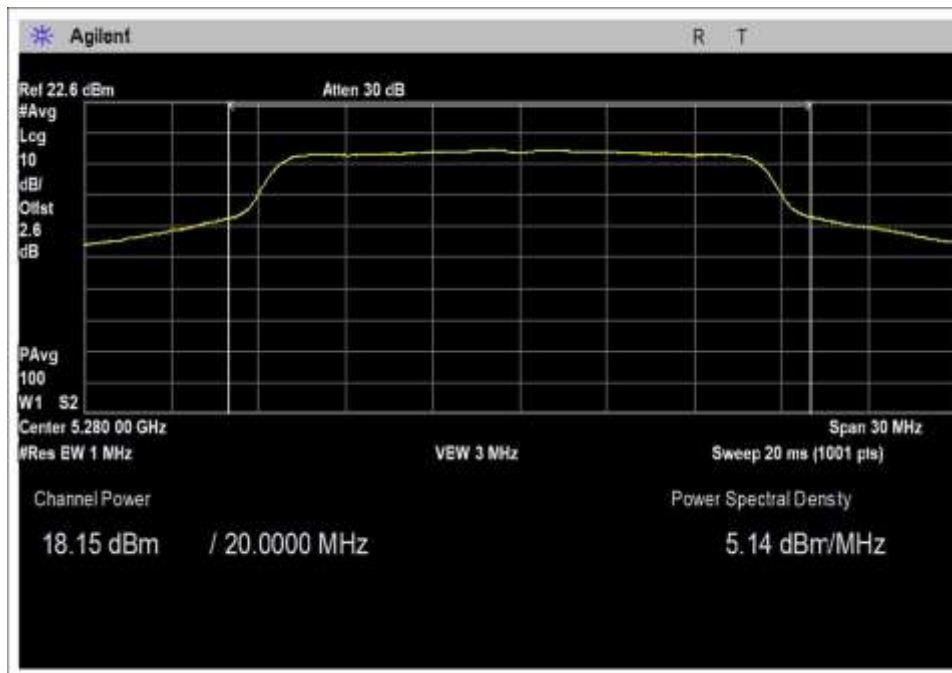


Middle Channel

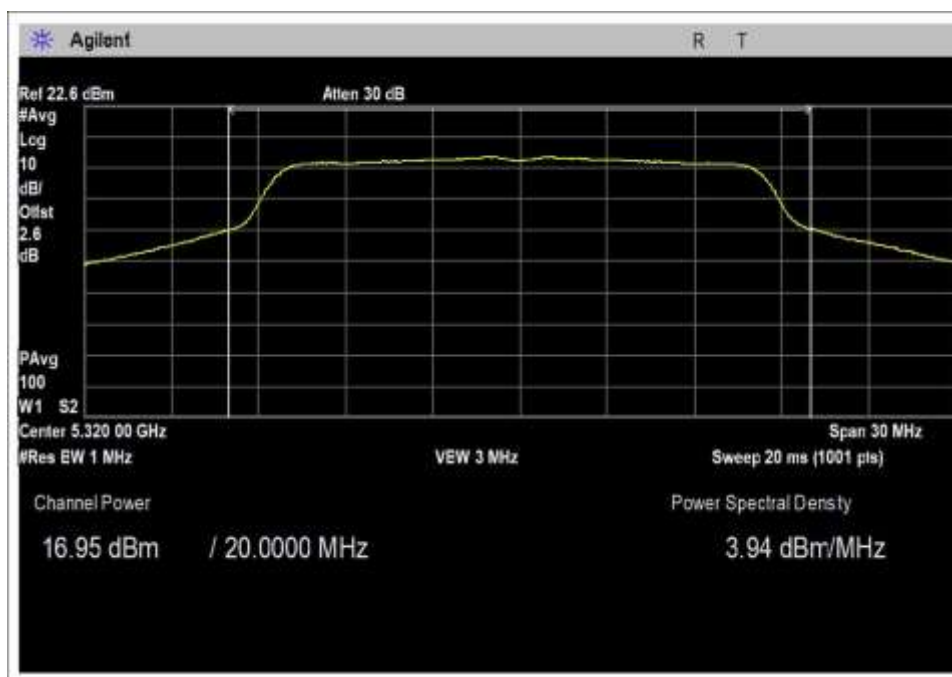


High Channel


Output Power 802.11n20

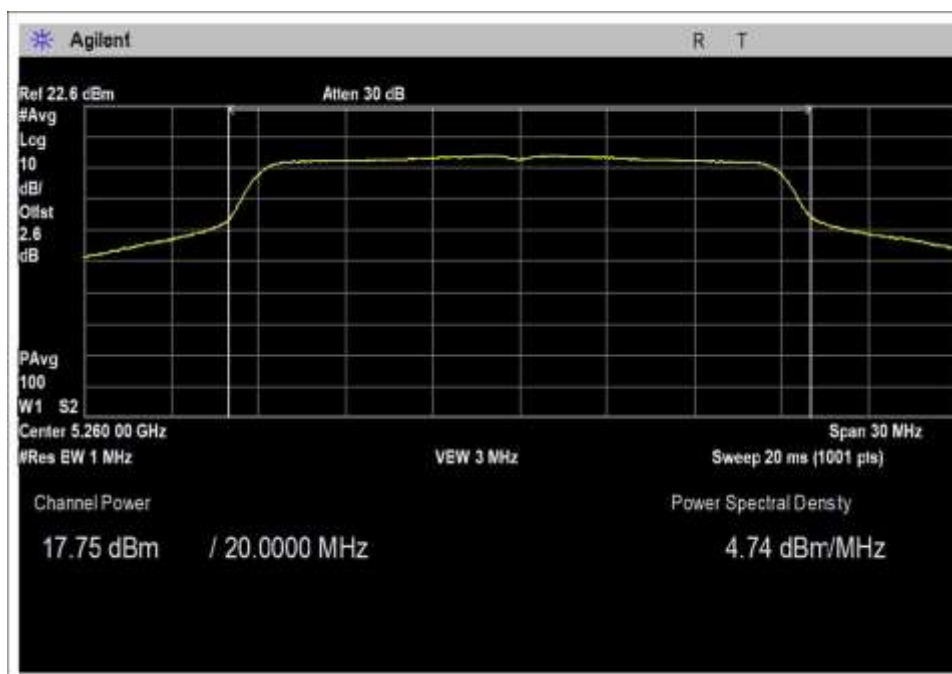

Low Channel

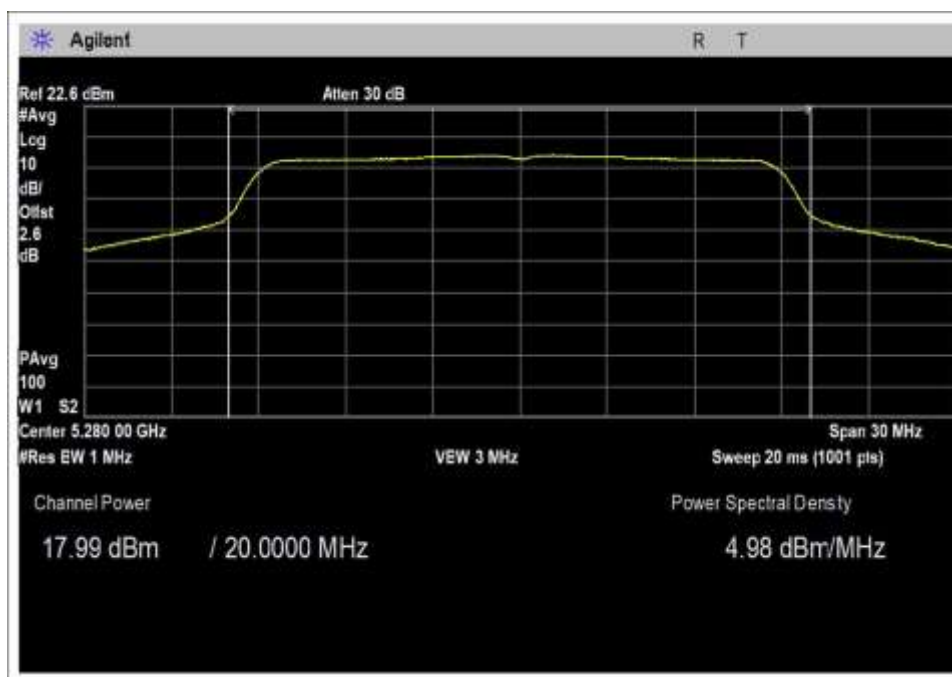


Middle Channel

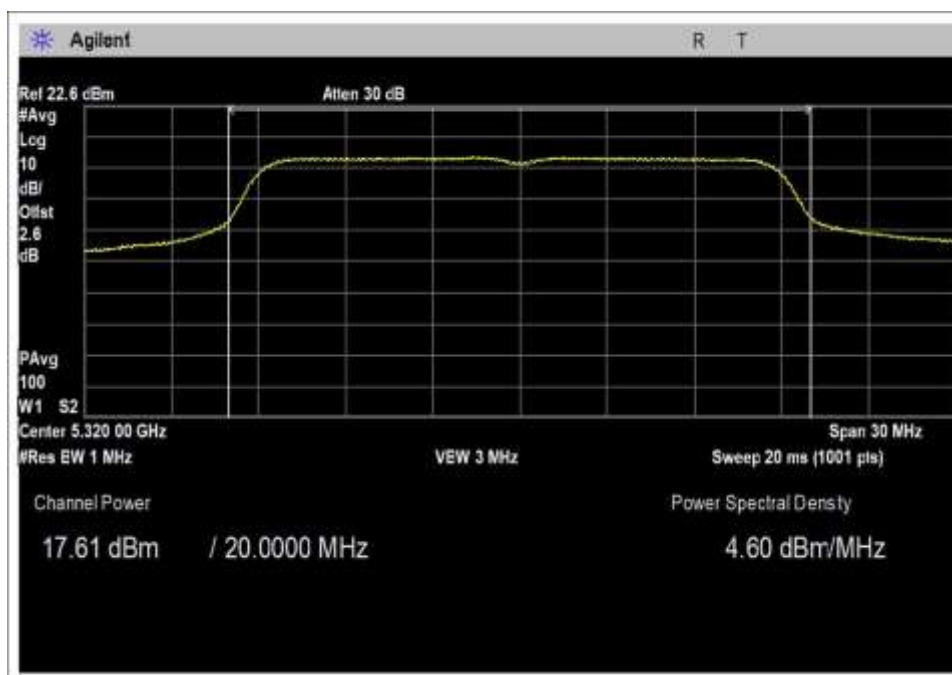


High Channel

Output Power 802.11n40

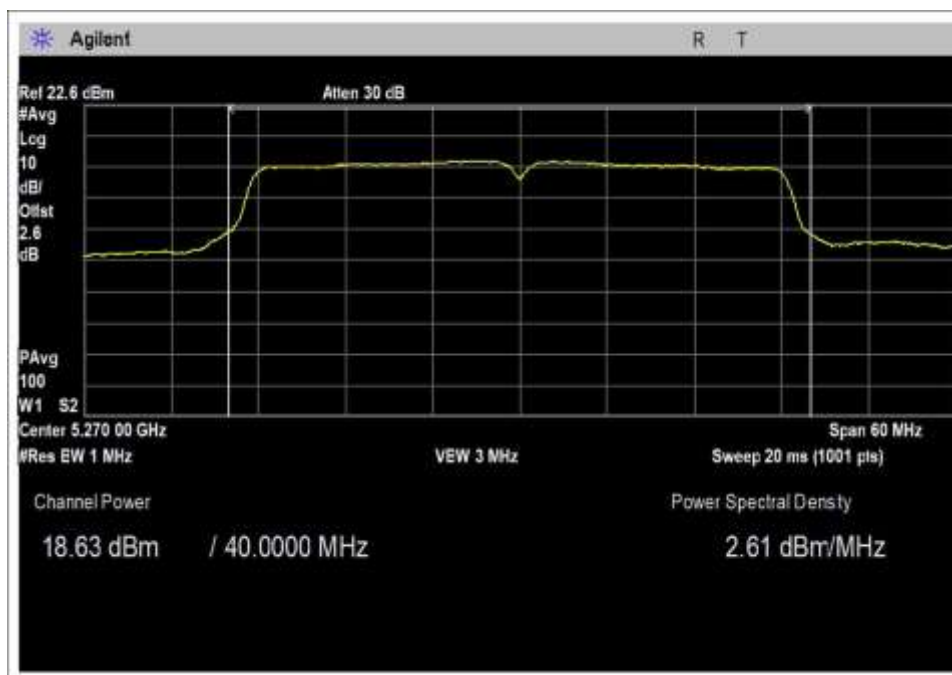


Low Channel

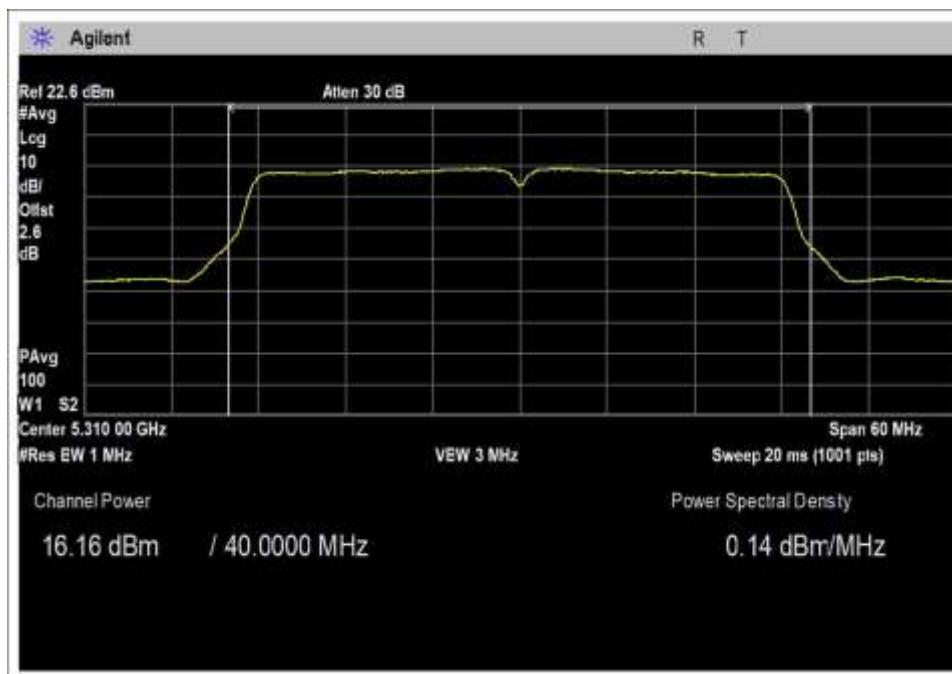


High Channel


Output Power 802.11ac20

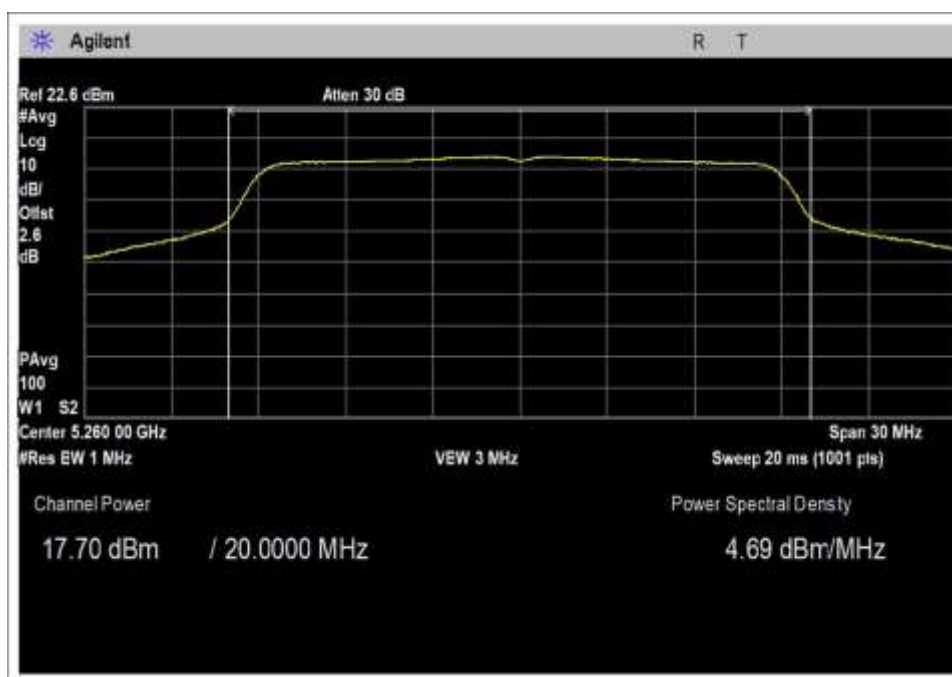

Low Channel

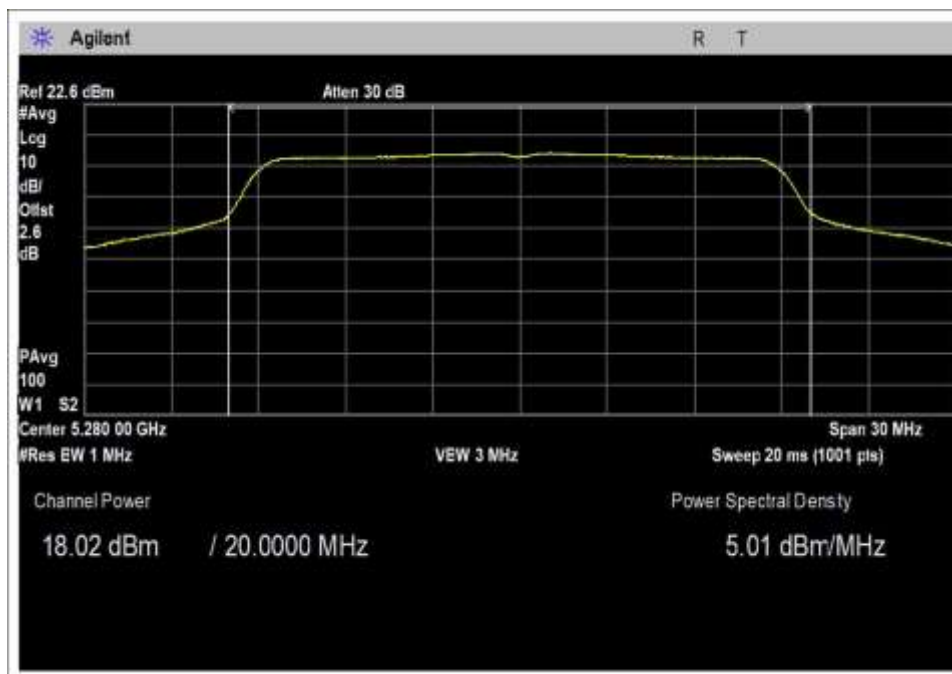


Middle Channel

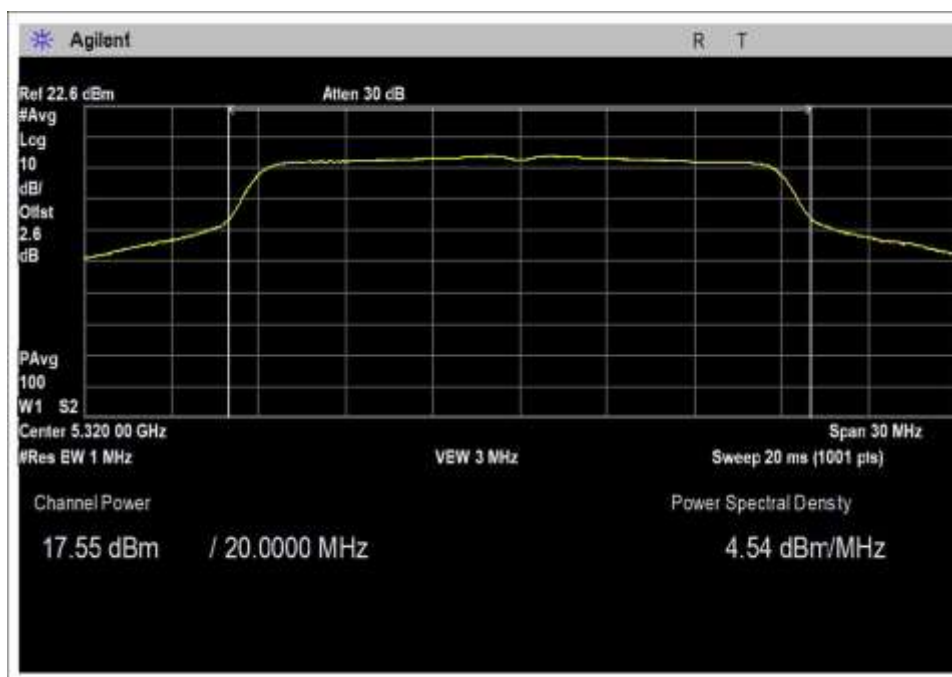


High Channel

Output Power 802.11ac40

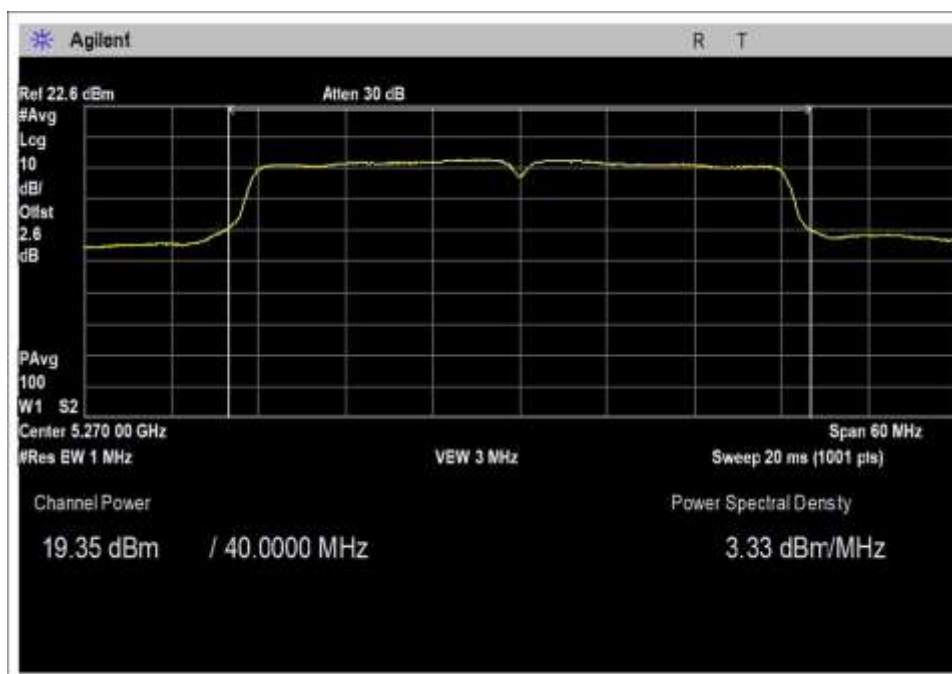


Low Channel

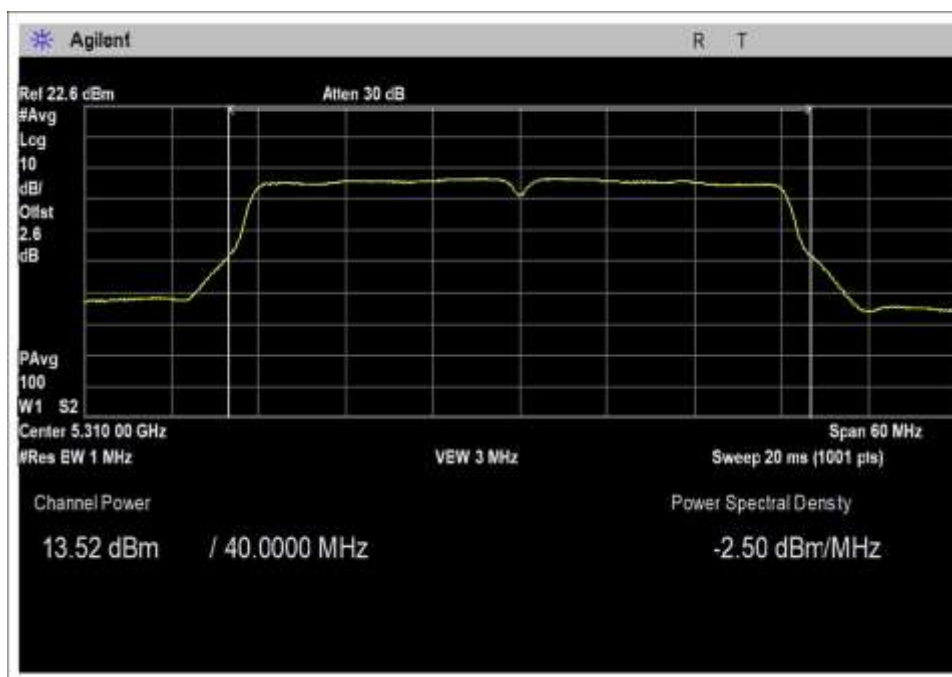

High Channel

Output Power 802.11ac80

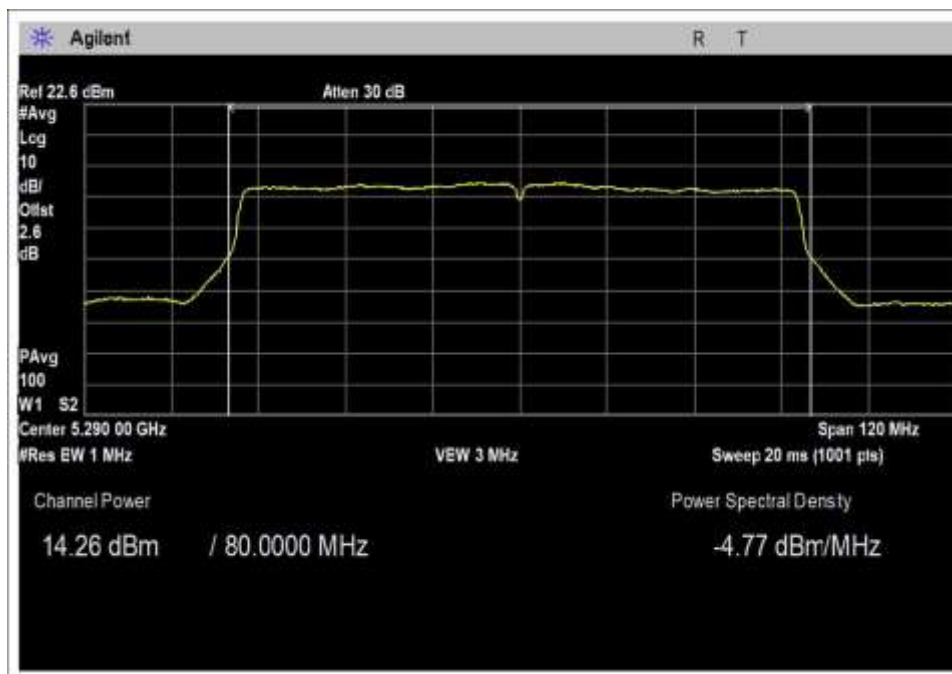

15.407(a) Power Spectral Density

Test Setup/Conditions			
Test Location:	Bothell Lab C3	Test Engineer:	M. Harrison
Test Method:	ANSI C63.10 (2013), KDB 789033	Test Date(s):	1/27/2022
Configuration:	1		
Test Setup:	Duty Cycle: 100% (Test Mode) Test Mode: Continuously transmitting Test Setup: EUT is transmitting through a temporary connection to antenna port connector via UFL adapter and is attached to the spectrum analyzer. The UFL adapter has a declared manufacturer loss of 0.9dB and will be accounted for in the measurement.		



Environmental Conditions			
Temperature (°C)	21	Relative Humidity (%):	45



Test Data Summary - RF Conducted Measurement					
Measurement Option: AVGSA-1					
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm/MHz)	Limit (dBm/MHz)	Results
5260	802.11a	Omnidirectional / 3.8dBi	8.0	≤11	Pass
5280	802.11a	Omnidirectional / 3.8dBi	7.5	≤11	Pass
5320	802.11a	Omnidirectional / 3.8dBi	5.9	≤11	Pass
5260	802.11n20	Omnidirectional / 3.8dBi	7.0	≤11	Pass
5280	802.11n20	Omnidirectional / 3.8dBi	6.3	≤11	Pass
5320	802.11n20	Omnidirectional / 3.8dBi	6.2	≤11	Pass
5270	802.11n40	Omnidirectional / 3.8dBi	4.7	≤11	Pass
5310	802.11n40	Omnidirectional / 3.8dBi	1.2	≤11	Pass
5260	802.11ac20	Omnidirectional / 3.8dBi	6.9	≤11	Pass
5280	802.11ac20	Omnidirectional / 3.8dBi	6.3	≤11	Pass
5320	802.11ac20	Omnidirectional / 3.8dBi	7.0	≤11	Pass
5270	802.11ac40	Omnidirectional / 3.8dBi	4.7	≤11	Pass
5310	802.11ac40	Omnidirectional / 3.8dBi	0.1	≤11	Pass
5290	802.11ac80	Omnidirectional / 3.8dBi	-3.5	≤11	Pass



The limit is calculated in accordance with 15.407(a)(2):



$$\text{Limit} = 11 - \text{Roundup}(G - 6)$$



Plots

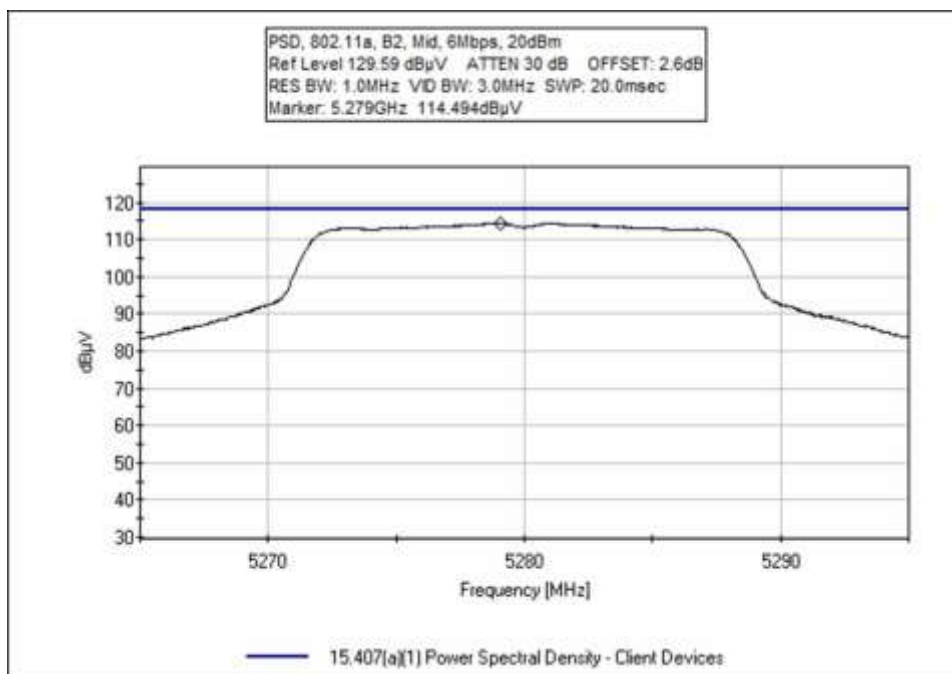
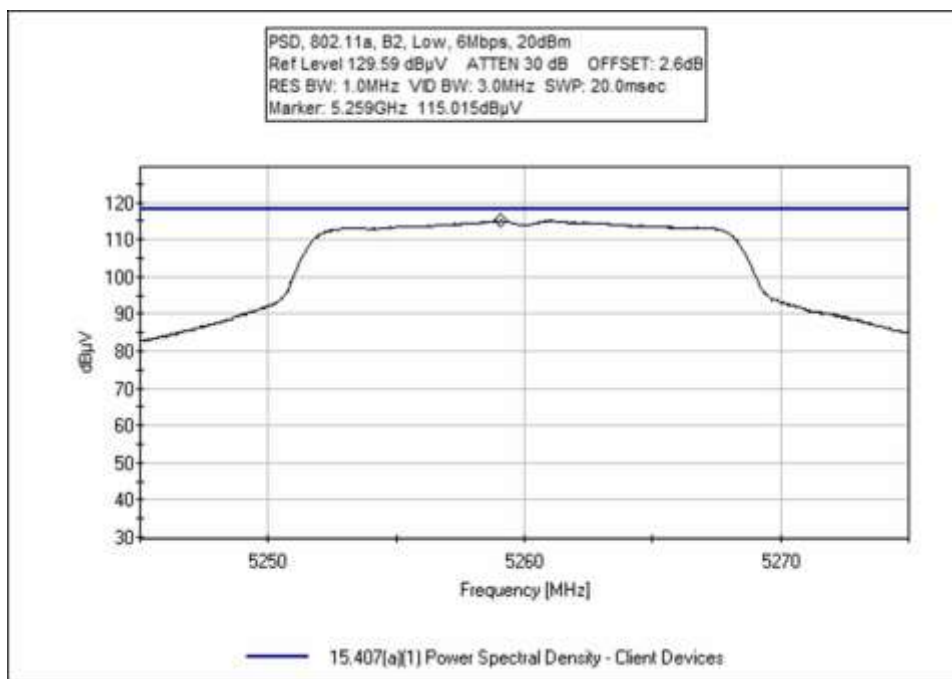


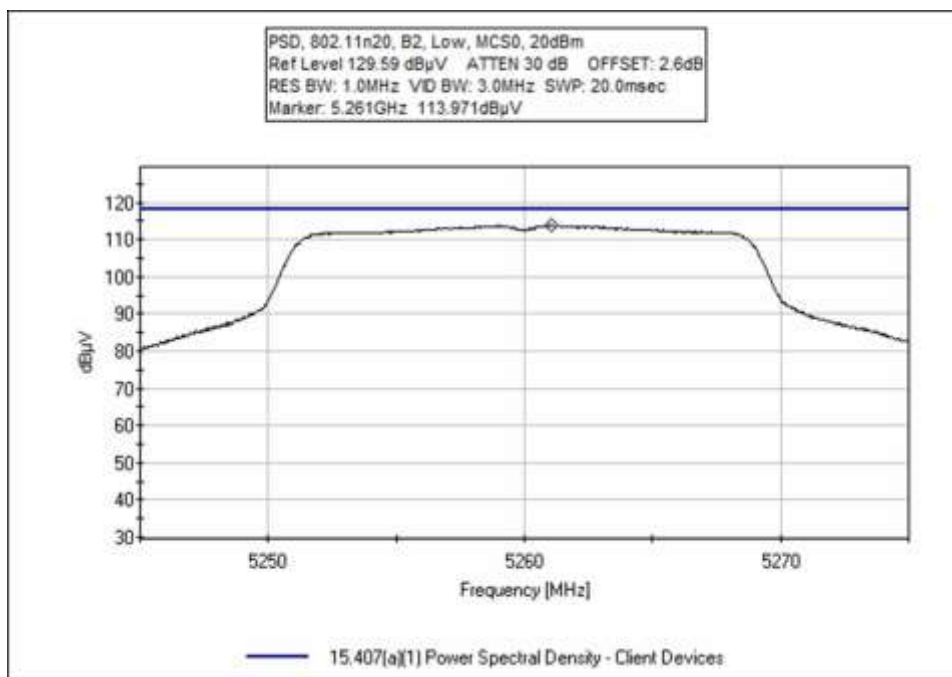
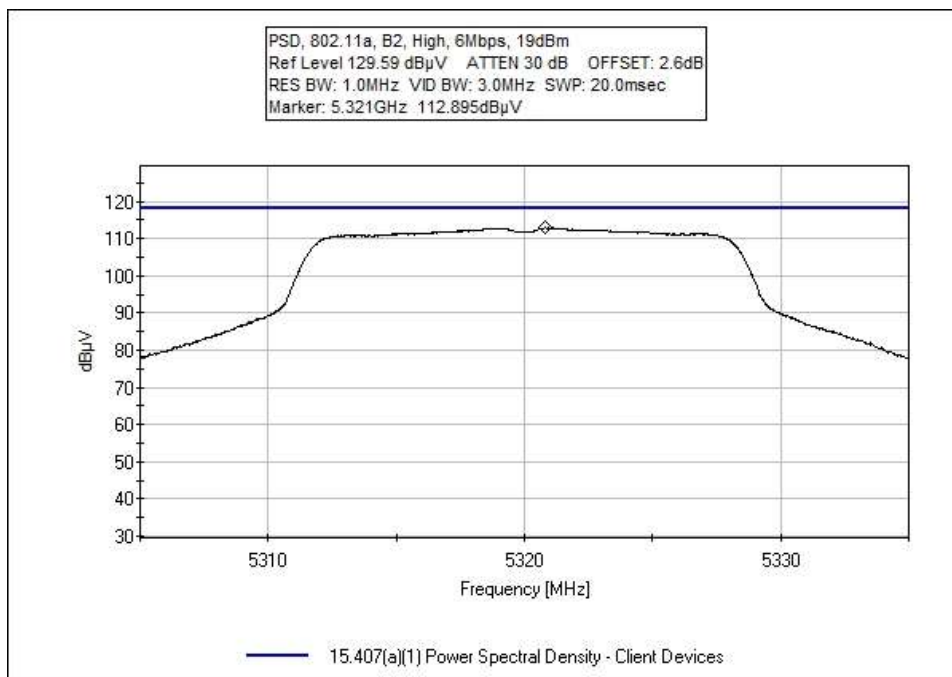


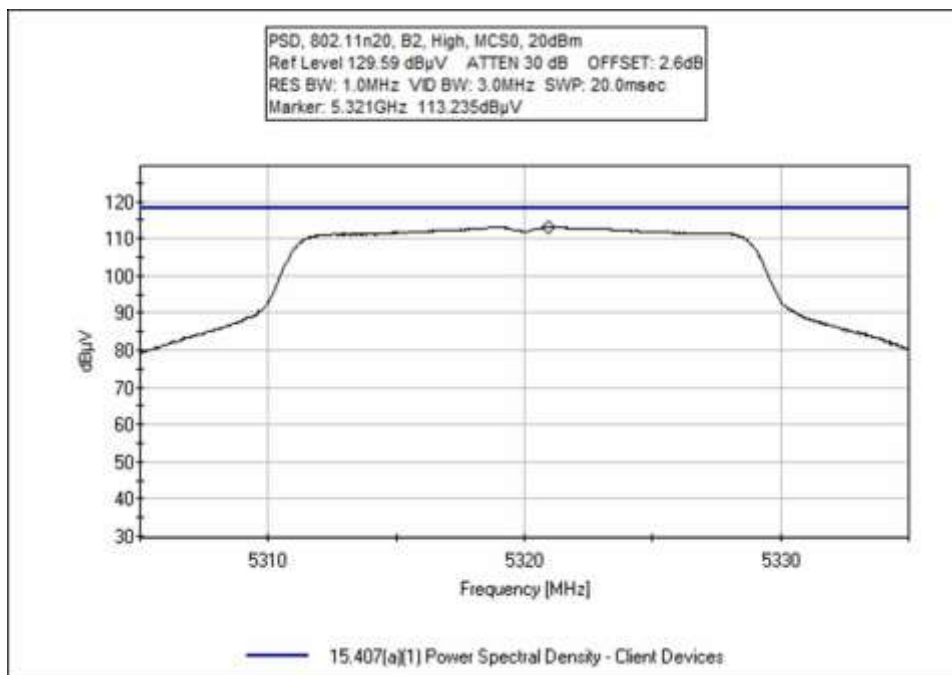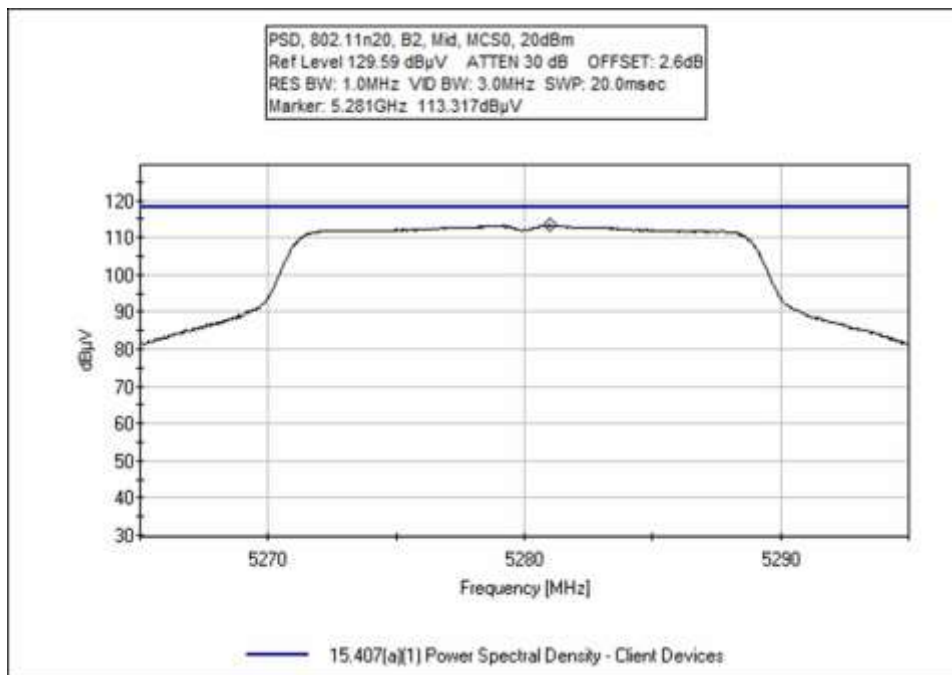

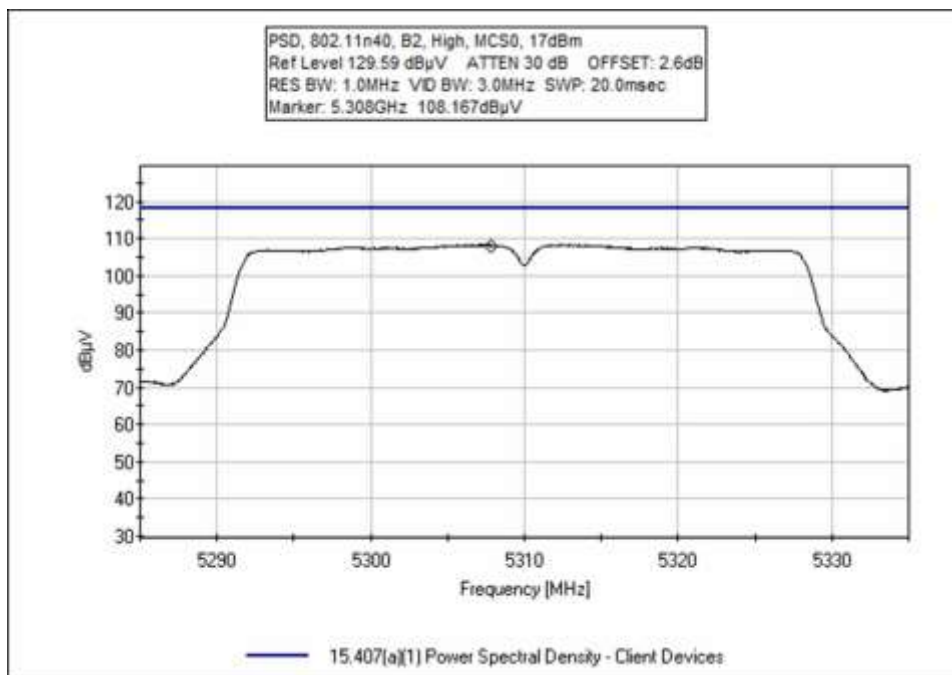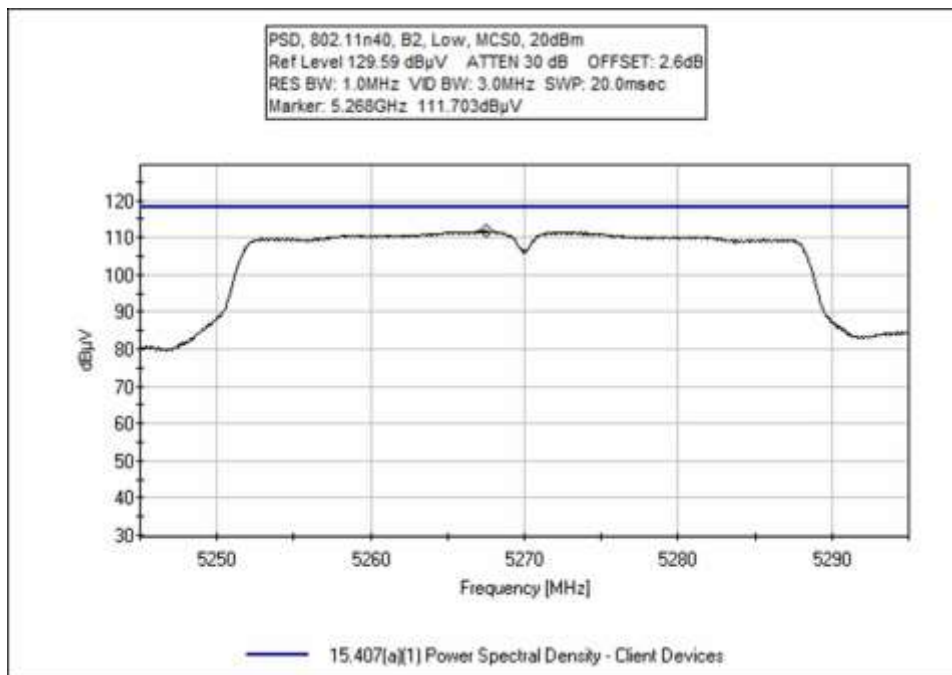

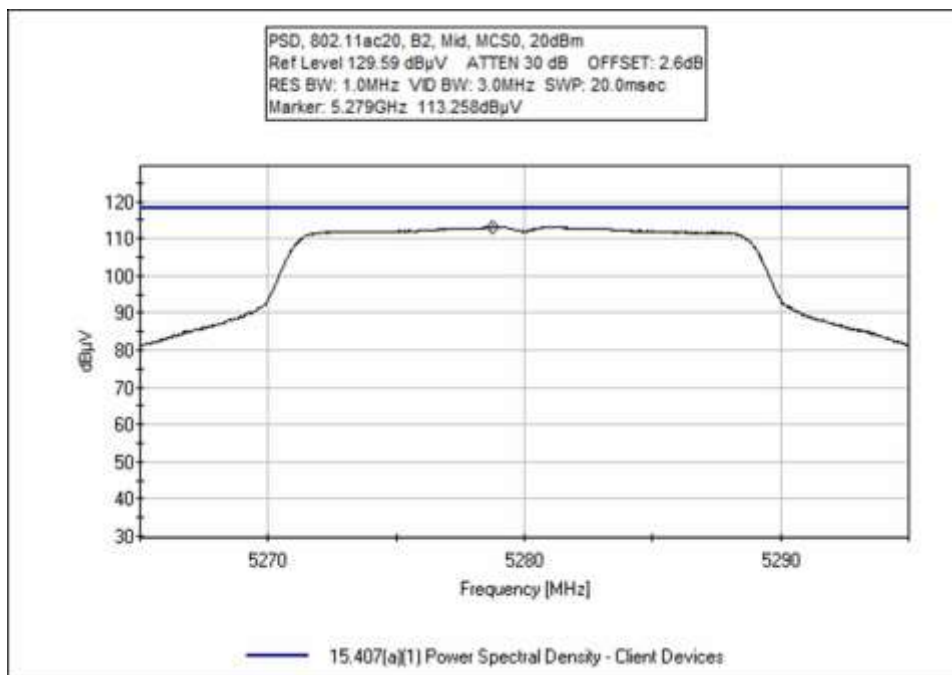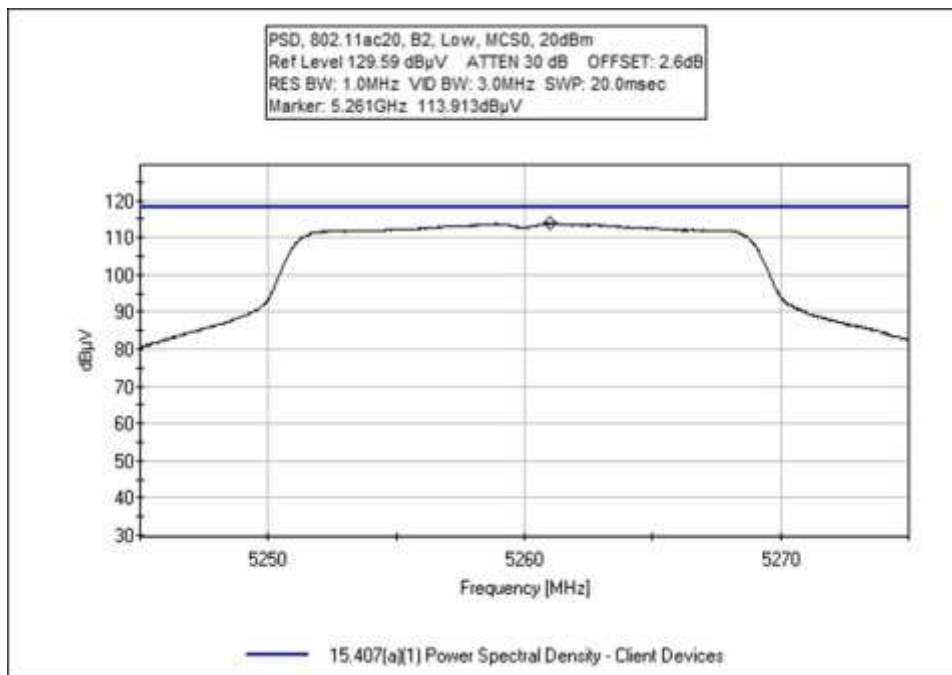

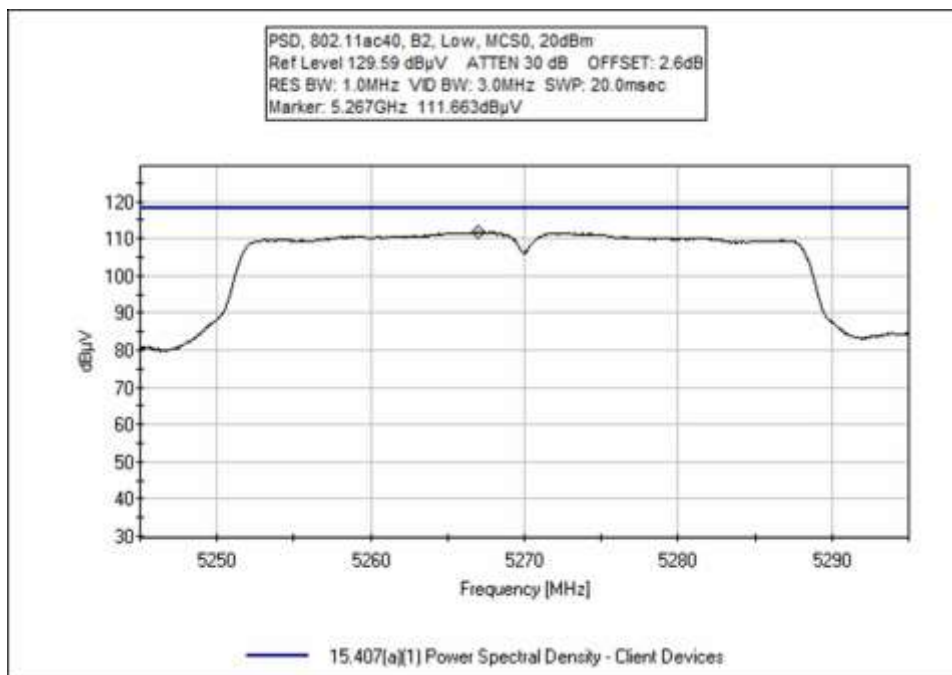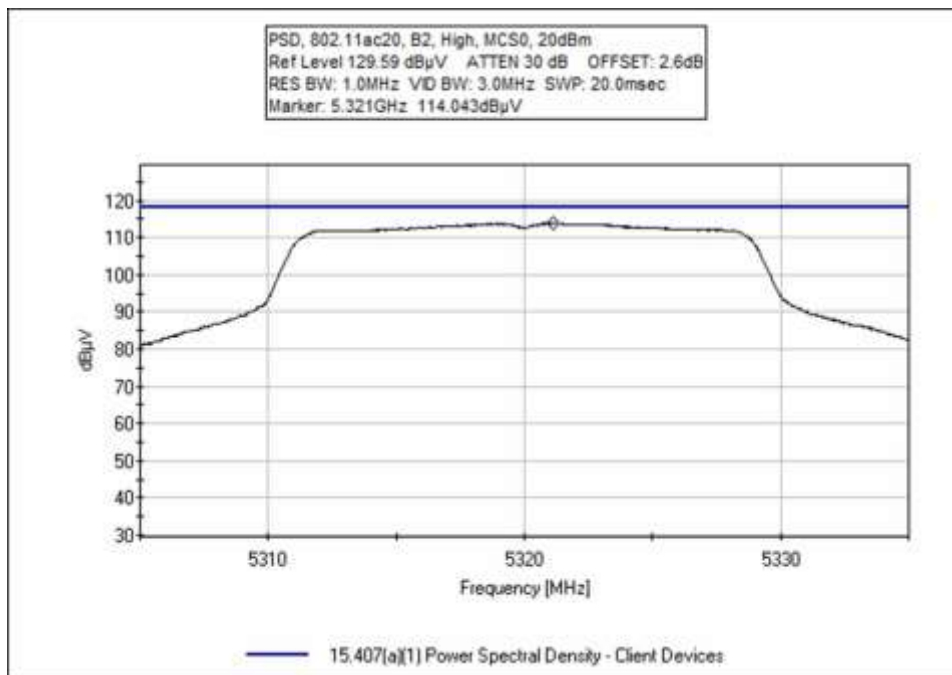

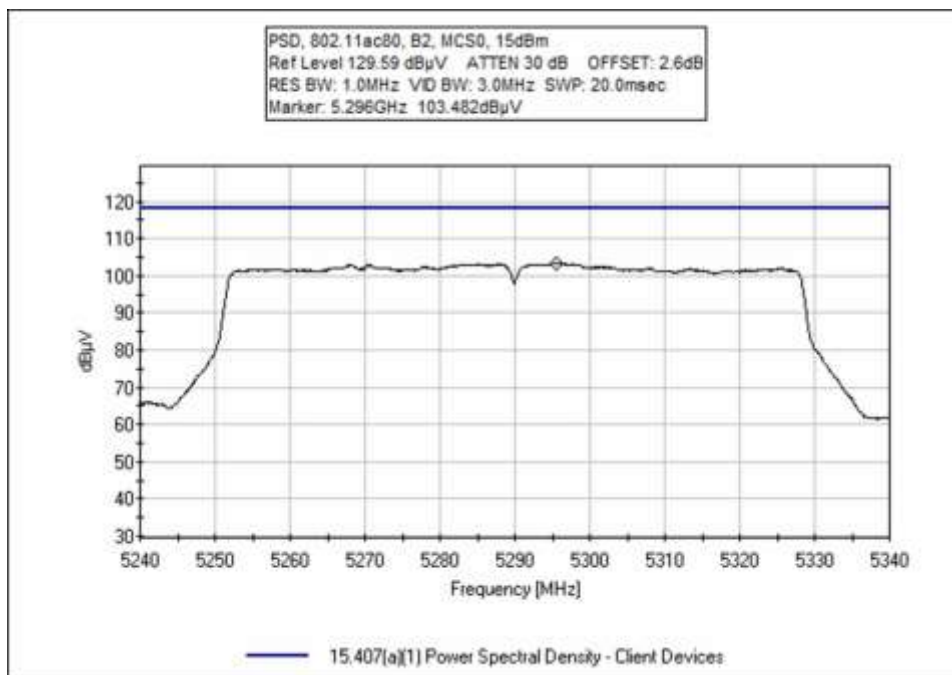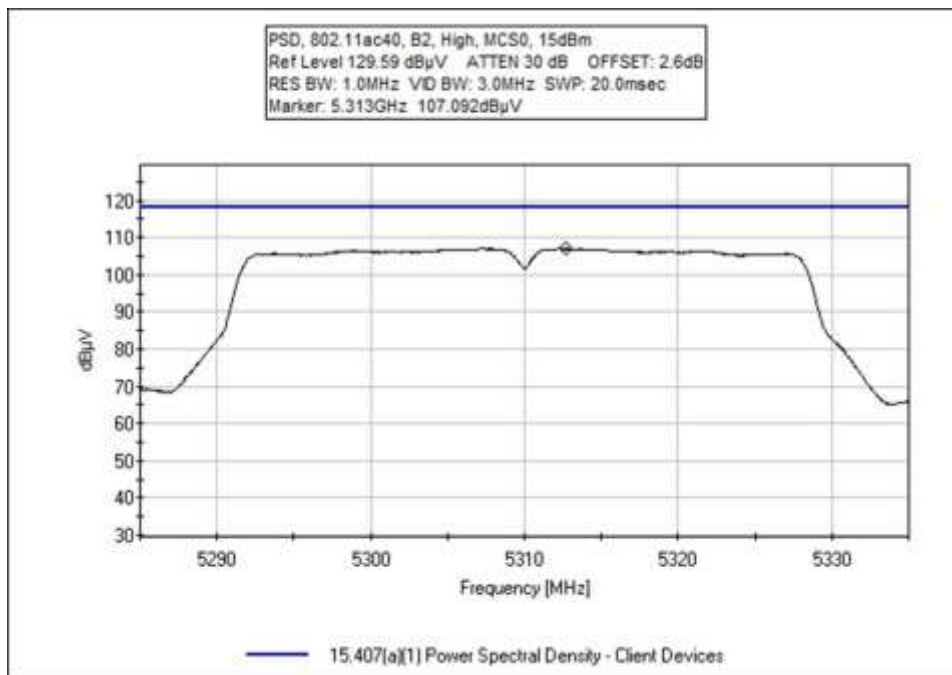

Test Data – RF Conducted Measurement

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(a)(1) Power Spectral Density - Client Devices**
 Work Order #: **106407** Date: 1/27/2022
 Test Type: **Conducted Emissions** Time: 11:36:35
 Tested By: M. Harrison Sequence#: 55
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5260-5320 MHz Setup: Antenna 0 Channels: 5260, 5280, 5320MHz 802.11a Rate: 6-54Mbps PWR Output: Low/Mid: 20 dBm, High: 19dBm 100% Duty Cycle Notes: PSD Measurements were performed with corresponding correction factors applied as an offset in the Spectrum Analyzer.

Nalloy, LLC WO#: 106121 Sequence#: 55 Date: 1/27/2022
15.407(a)(1) Power Spectral Density - Client Devices Test Lead: 120V 60Hz Antenna Port

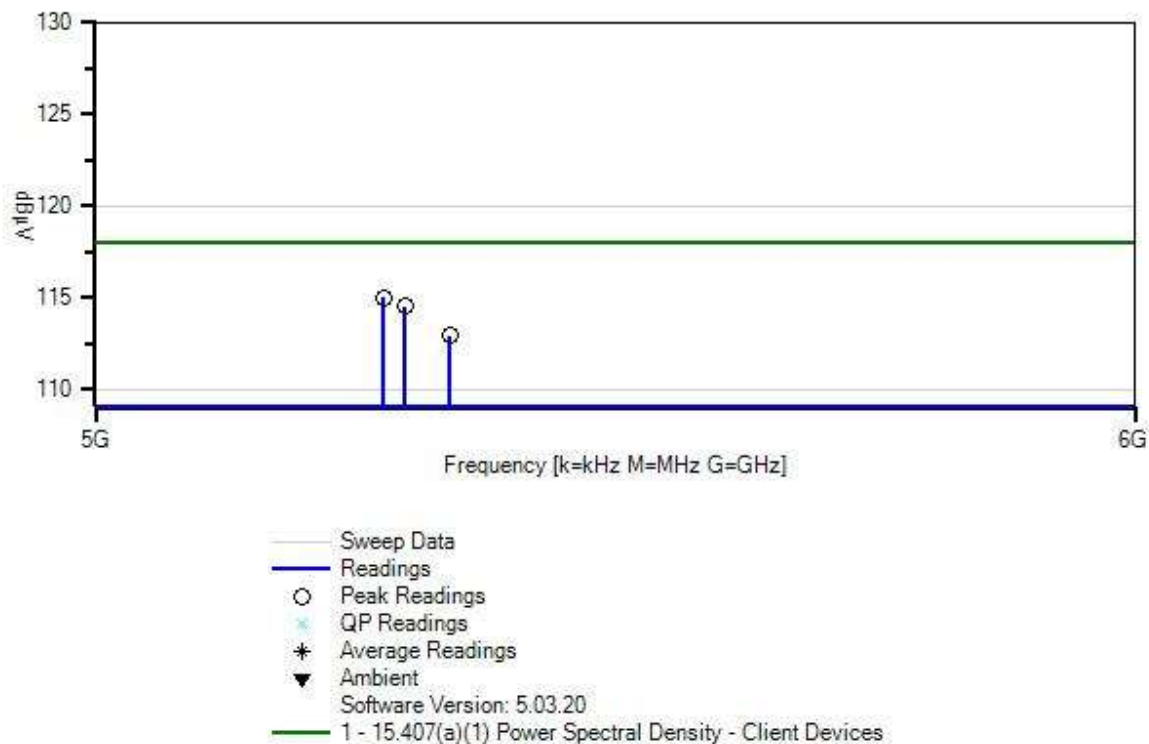

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	ANUFL Adapter	Test Data Adjustment		1/14/2022	1/14/2024
	ANP05961	Cable	Helix	6/9/2021	6/9/2023
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	5259.040M	115.0	+0.0				+0.0	115.0	118.0	-3.0	Anten
									6Mbps, 20dBm		
2	5279.070M	114.5	+0.0				+0.0	114.5	118.0	-3.5	Anten
									6Mbps, 20dBm		
3	5320.840M	112.9	+0.0				+0.0	112.9	118.0	-5.1	Anten
									6Mbps, 19dBm		



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(a)(1) Power Spectral Density - Client Devices**
 Work Order #: **106407** Date: 1/27/2022
 Test Type: **Conducted Emissions** Time: 11:23:08
 Tested By: M. Harrison Sequence#: 54
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5260-5320 MHz Setup: Antenna 0 Channels: 5260, 5280, 5320MHz 802.11n20 Rate: MCS0 PWR Output: 20 dBm 100% Duty Cycle Notes: PSD Measurements were performed with corresponding correction factors applied as an offset in the Spectrum Analyzer.

Nalloy, LLC WO#: 106121 Sequence#: 54 Date: 1/27/2022
15.407(a)(1) Power Spectral Density - Client Devices Test Lead: 120V 60Hz Antenna Port

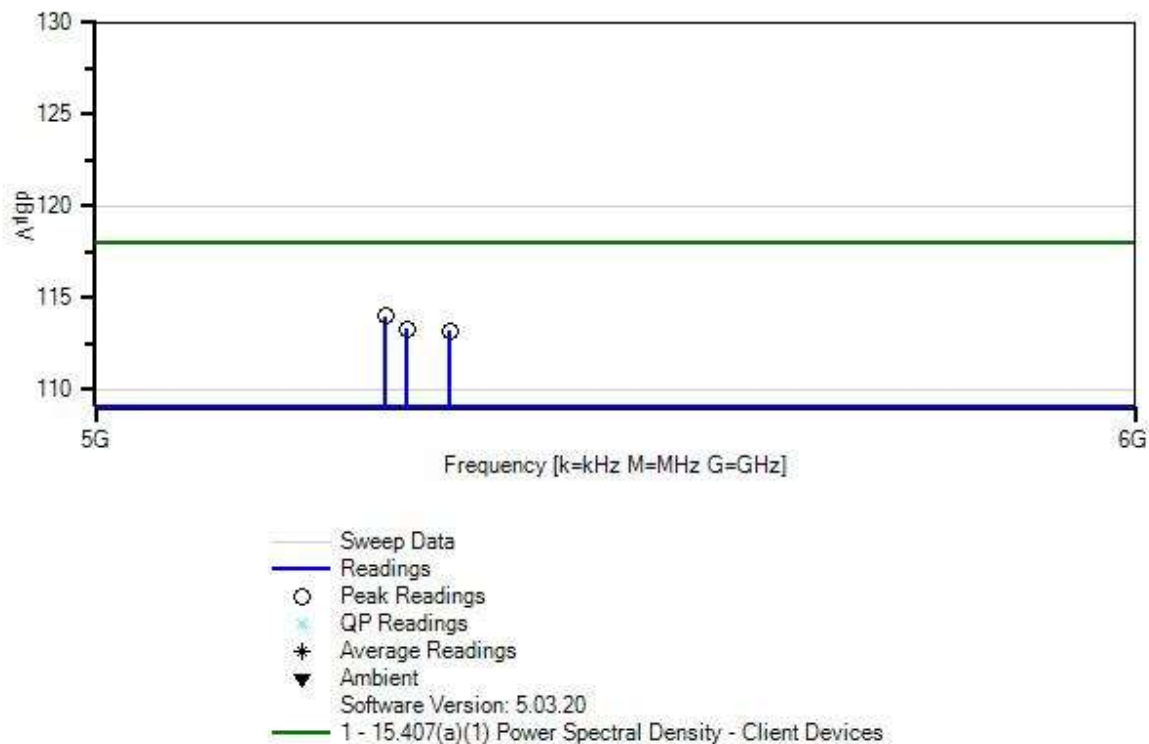

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	ANUFL Adapter	Test Data Adjustment		1/14/2022	1/14/2024
	ANP05961	Cable	Helix	6/9/2021	6/9/2023
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	5261.080M	114.0	+0.0				+0.0	114.0	118.0	-4.0	Anten
									MCS0, 20dBm		
2	5280.990M	113.3	+0.0				+0.0	113.3	118.0	-4.7	Anten
									MCS0, 20dBm		
3	5320.960M	113.2	+0.0				+0.0	113.2	118.0	-4.8	Anten
									MCS0, 20dBm		



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(a)(1) Power Spectral Density - Client Devices**
 Work Order #: **106407** Date: 1/27/2022
 Test Type: **Conducted Emissions** Time: 10:26:18
 Tested By: M. Harrison Sequence#: 54
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5270-5310 MHz Setup: Antenna 0 Channels: 5270, 5310MHz 802.11n40 Rate: MCS0-7 PWR Output: Low: 20 dBm; High: 17 dBm 100% Duty Cycle Notes: PSD Measurements were performed with corresponding correction factors applied as an offset in the Spectrum Analyzer.
--

Nalloy, LLC WO#: 106121 Sequence#: 54 Date: 1/27/2022
15.407(a)(1) Power Spectral Density - Client Devices Test Lead: 120V 60Hz Antenna Port

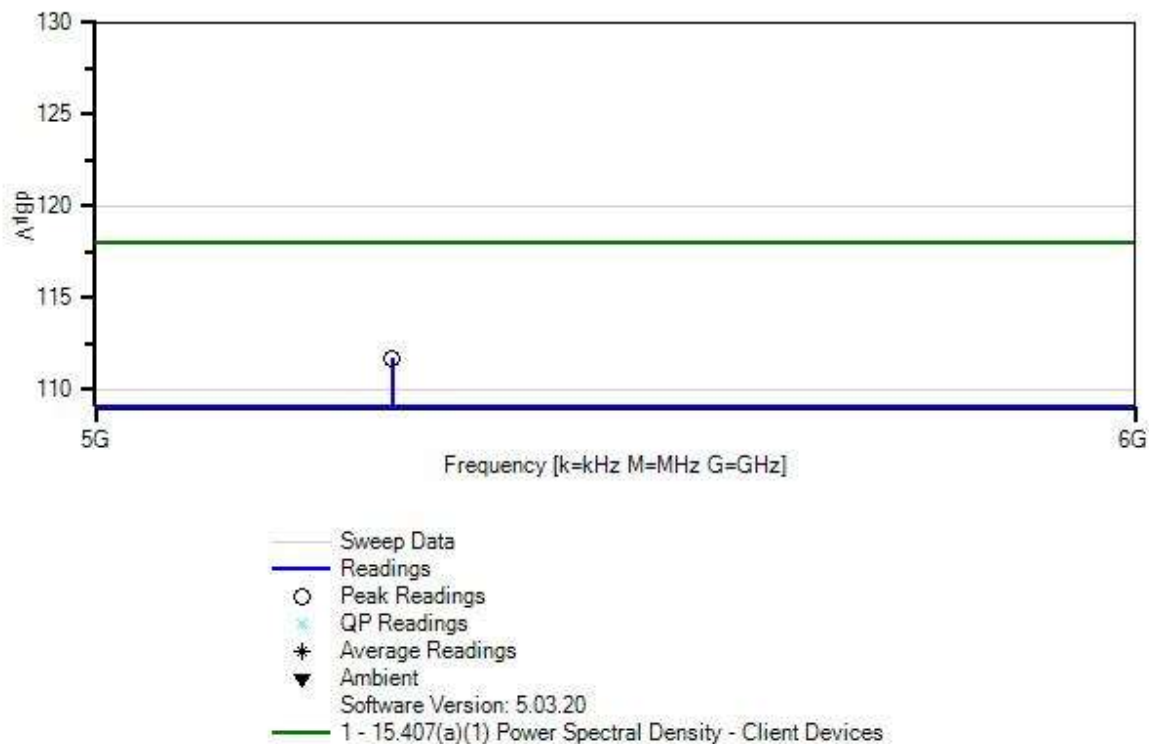

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	ANUFL Adapter	Test Data Adjustment		1/14/2022	1/14/2024
	ANP05961	Cable	Helix	6/9/2021	6/9/2023
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	5267.550M	111.7	+0.0				+0.0	111.7	118.0	-6.3	Anten
									MCS0, 20dBm		
2	5307.800M	108.2	+0.0				+0.0	108.2	118.0	-9.8	Anten
									MCS0, 17dBm		



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(a)(1) Power Spectral Density - Client Devices**
 Work Order #: **106407** Date: 1/27/2022
 Test Type: **Conducted Emissions** Time: 10:56:23
 Tested By: M. Harrison Sequence#: 53
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5260-5320 MHz Setup: Antenna 0 Channels: 5260, 5280, 5320MHz 802.11ac20 Rate: MCS0 PWR Output: 20 dBm 100% Duty Cycle Notes: PSD Measurements were performed with corresponding correction factors applied as an offset in the Spectrum Analyzer.
--

Nalloy, LLC WO#: 106121 Sequence#: 53 Date: 1/27/2022
15.407(a)(1) Power Spectral Density - Client Devices Test Lead: 120V 60Hz Antenna Port

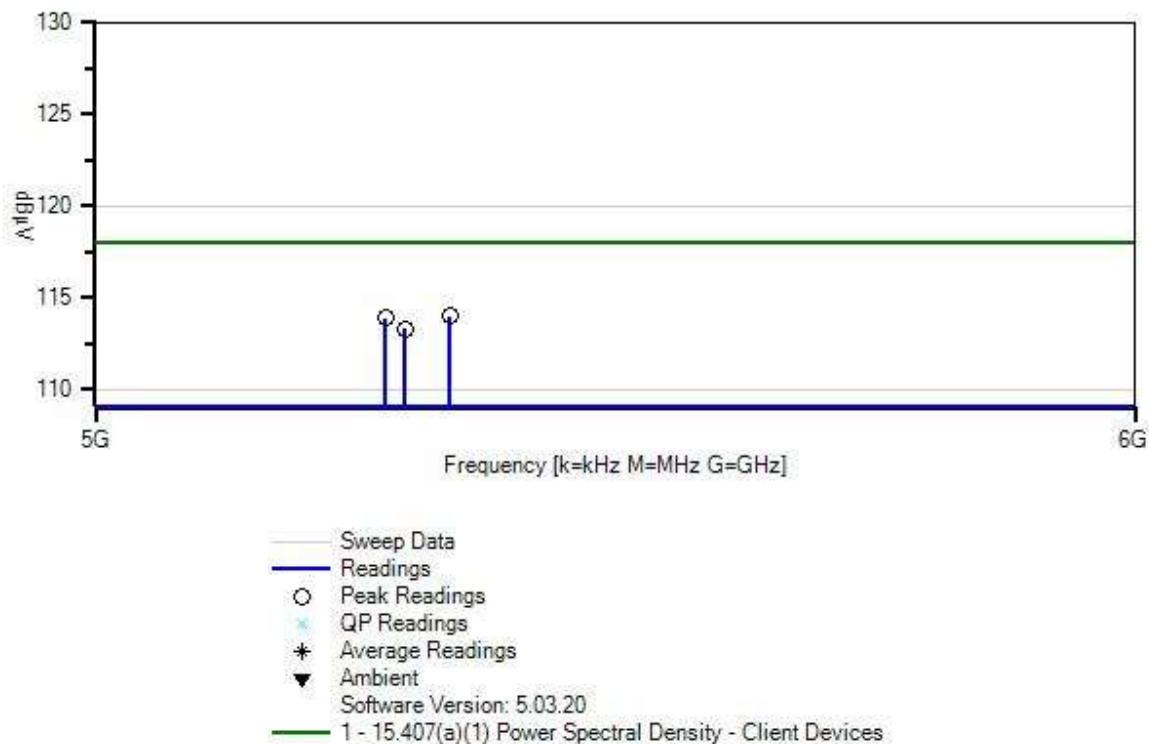

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	ANUFL Adapter	Test Data Adjustment		1/14/2022	1/14/2024
	ANP05961	Cable	Helix	6/9/2021	6/9/2023
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	5321.110M	114.0	+0.0				+0.0	114.0	118.0	-4.0	Anten
									MCS0, 20dBm		
2	5260.990M	113.9	+0.0				+0.0	113.9	118.0	-4.1	Anten
									MCS0, 20dBm		
3	5278.770M	113.3	+0.0				+0.0	113.3	118.0	-4.7	Anten
									MCS0, 20dBm		



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(a)(1) Power Spectral Density - Client Devices**
 Work Order #: **106407** Date: 1/27/2022
 Test Type: **Conducted Emissions** Time: 10:33:12
 Tested By: M. Harrison Sequence#: 53
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5270-5310 MHz Setup: Antenna 0 Channels: 5270, 5310MHz 802.11ac40 Rate: MCS0 PWR Output: Low: 20 dBm; High: 15 dBm 100% Duty Cycle Notes: PSD Measurements were performed with corresponding correction factors applied as an offset in the Spectrum Analyzer.
--

Nalloy, LLC WO#: 106121 Sequence#: 53 Date: 1/27/2022
15.407(a)(1) Power Spectral Density - Client Devices Test Lead: 120V 60Hz Antenna Port

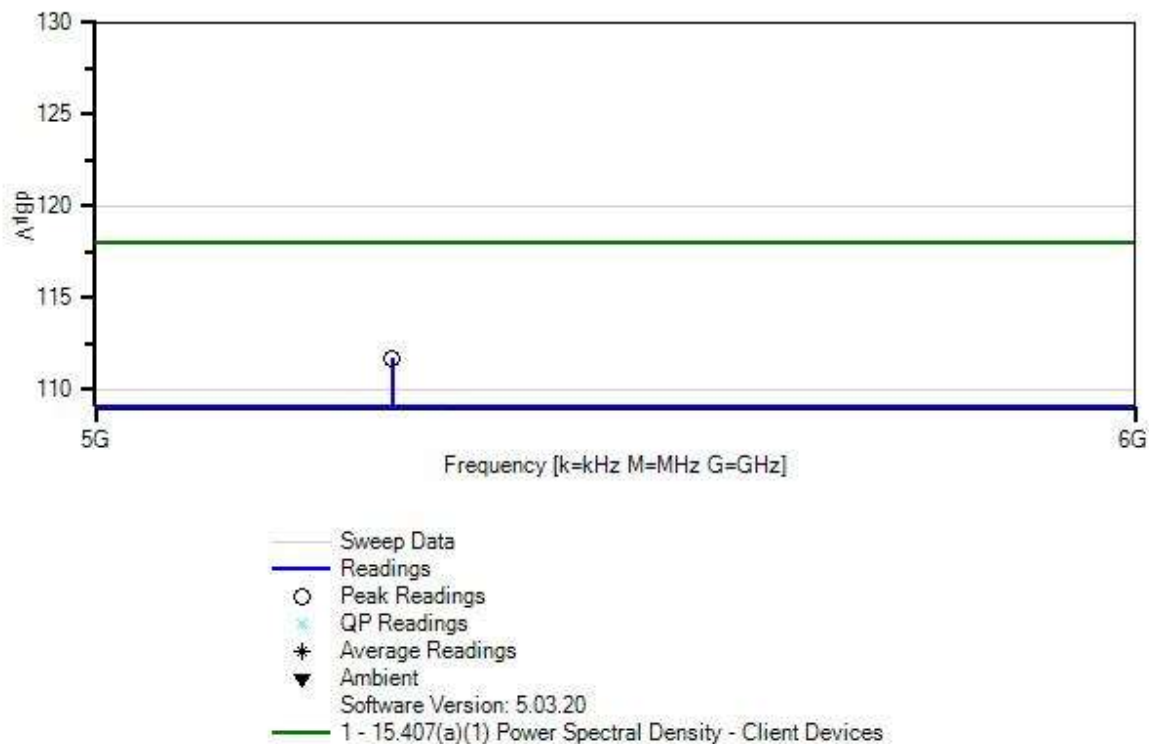

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	ANUFL Adapter	Test Data Adjustment		1/14/2022	1/14/2024
	ANP05961	Cable	Helix	6/9/2021	6/9/2023
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	5266.950M	111.7	+0.0				+0.0	111.7	118.0	-6.3	Anten
									MCS0, 20dBm		
2	5312.700M	107.1	+0.0				+0.0	107.1	118.0	-10.9	Anten
									MCS0, 15dBm		



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
Customer: **Nalloy, LLC**
Specification: **15.407(a)(1) Power Spectral Density - Client Devices**
Work Order #: **106407** Date: 1/27/2022
Test Type: **Conducted Emissions** Time: 10:35:11
Tested By: M. Harrison Sequence#: 52
Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5290 MHz Setup: Antenna 0 Channels: 5290 MHz 802.11ac80 Rate: MCS0-9 PWR Output: 15 dBm 100% Duty Cycle Notes: PSD Measurements were performed with corresponding correction factors applied as an offset in the Spectrum Analyzer.
--

Nalloy, LLC WO#: 106121 Sequence#: 52 Date: 1/27/2022
15.407(a)(1) Power Spectral Density - Client Devices Test Lead: 120V 60Hz Antenna Port

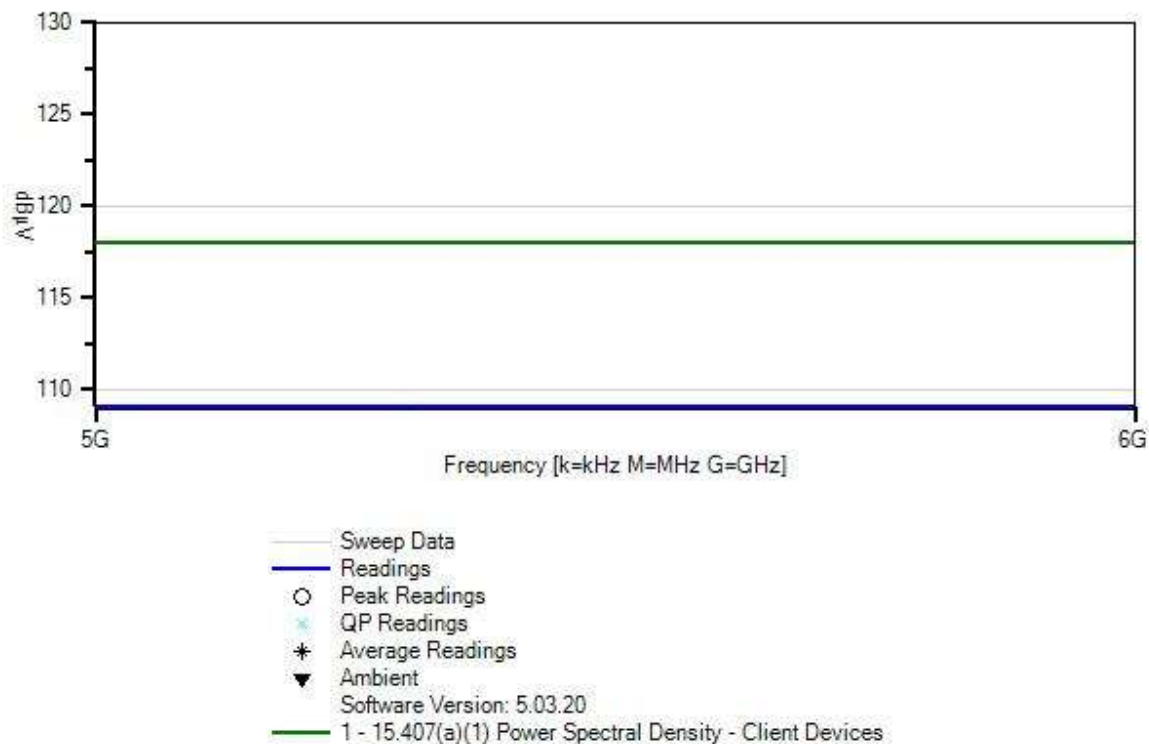

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	ANUFL Adapter	Test Data Adjustment		1/14/2022	1/14/2024
	ANP05961	Cable	Helix	6/9/2021	6/9/2023
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	5295.600M	103.5	+0.0				+0.0	103.5	118.0	-14.5	Anten
MCS0, 15dBm											

15.407(b) Radiated Emissions & Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/18/2022
 Test Type: **Maximized Emissions** Time: 09:21:55
 Tested By: M. Harrison Sequence#: 41
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 9k-40 GHz Setup: Antenna 0 Channels: 5260, 5280, 5320MHz 802.11a Rate: 54Mbps PWR Output: Low/Mid: 20 dBm; High: 19 dBm 100% Duty Cycle Notes: No EUT Emissions found within 20 dB of the limit above 18GHz
--

Nalloy, LLC WO#: 106121 Sequence#: 41 Date: 1/18/2022
 15.407(b) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Perp/Para

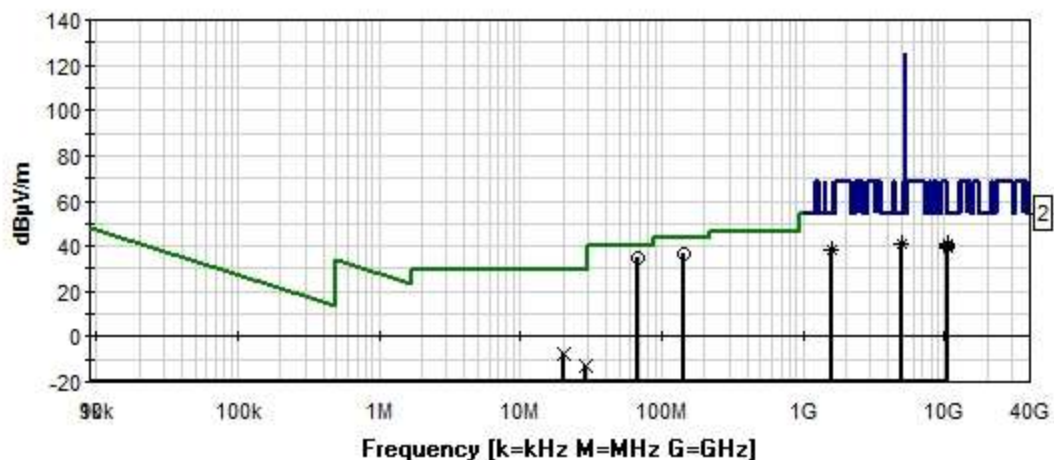

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
T1	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
T2	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T3	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T4	AN03540	Preamplifier	83017A	5/14/2021	5/14/2023
T5	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
T6	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T7	AN02741	Active Horn Antenna	AMFW-5F-12001800-20-10P	5/13/2021	5/13/2023
	AN02742	Active Horn Antenna	AMFW-5F-18002650-20-10P	11/11/2020	11/11/2022
	AN02743	Active Horn Antenna	AMFW-5F-260400-33-8P	5/11/2021	5/11/2023
	AN02763-69	Waveguide	Multiple	4/28/2020	4/28/2022
	AN02764-70	Waveguide	Multiple	4/28/2020	4/28/2022
	ANP06678	Cable	32026-29801-29801-144	2/20/2020	2/20/2022
	ANP07211	Cable	32026-29801-29801-18	6/16/2021	6/16/2023
	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T8	AN02307	Preamplifier	8447D	1/6/2022	1/6/2024
T9	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
T10	ANP05360	Cable	RG214	2/3/2020	2/3/2022
T11	AN00052	Loop Antenna	6502	5/4/2020	5/4/2022
T12	ANP06011	Cable	Heliac	8/7/2020	8/7/2022

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7 T11	T4 T8 T12	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	68.460M	48.4	+0.2 +0.0 +12.9	+0.4 +0.0 +0.5	+0.0 +0.0 +0.0	+0.0 -27.8 +0.0	+0.0	34.6	40.0	-5.4	Vert
^	68.460M	52.2	+0.2 +0.0 +12.9	+0.4 +0.0 +0.5	+0.0 +0.0 +0.0	+0.0 -27.8 +0.0	+0.0	38.4	40.0	-1.6	Vert
3	143.320M	49.1	+0.3 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.0	+0.0 -27.6 +0.0	+0.0	37.0	43.5	-6.5	Vert
^	143.320M	52.0	+0.3 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.0	+0.0 -27.6 +0.0	+0.0	39.9	43.5	-3.6	Vert
5	4982.122M	24.6	+1.7 +9.7 +0.0	+3.8 +0.5 +0.0	+33.8 +0.0 +0.0	-33.4 +0.0 +0.0	+0.0	40.7	54.0	-13.3	Vert
^	4982.122M	42.0	+1.7 +9.7 +0.0	+3.8 +0.5 +0.0	+33.8 +0.0 +0.0	-33.4 +0.0 +0.0	+0.0	58.1	54.0	+4.1	Vert
7	10641.500	43.7	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	39.7	54.0	-14.3	Vert
^	10641.500	59.3	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	55.3	54.0	+1.3	Vert
9	1573.020M	34.9	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.1 +0.0 +0.0	+0.0	38.3	54.0	-15.7	Vert
^	1573.020M	52.3	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.1 +0.0 +0.0	+0.0	55.7	54.0	+1.7	Vert
11	10558.700	44.8	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	40.7	68.2	-27.5	Vert
^	10558.700	58.8	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	54.7	68.2	-13.5	Vert

13	10522.900	43.1	+2.0	+6.2	+0.0	+0.0	+0.0	39.1	68.2	-29.1	Vert
	M		+0.0	+0.0	-12.2	+0.0					
	Ave		+0.0	+0.0	+0.0	+0.0					
^	10522.900	58.4	+2.0	+6.2	+0.0	+0.0	+0.0	54.4	68.2	-13.8	Vert
	M		+0.0	+0.0	-12.2	+0.0					
			+0.0	+0.0	+0.0	+0.0					
15	20.299M	24.6	+0.0	+0.2	+0.0	+0.0	-40.0	-8.0	29.5	-37.5	Perp/
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+7.2	+0.0					
16	28.687M	22.2	+0.0	+0.3	+0.0	+0.0	-40.0	-12.6	29.5	-42.1	Perp/
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+4.8	+0.1					



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/18/2022
 Test Type: **Maximized Emissions** Time: 09:33:09
 Tested By: M. Harrison Sequence#: 42
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 9k-40 GHz Setup: Antenna 0 Channels: 5260, 5280, 5320MHz 802.11n20 Rate: MCS0 PWR Output: Low/Mid: 20 dBm; High: 20 dBm 100% Duty Cycle Notes: No EUT Emissions found within 20 dB of the limit above 18GHz
--

Nalloy, LLC WO#: 106121 Sequence#: 42 Date: 1/18/2022
 15.407(b) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Perp/Para

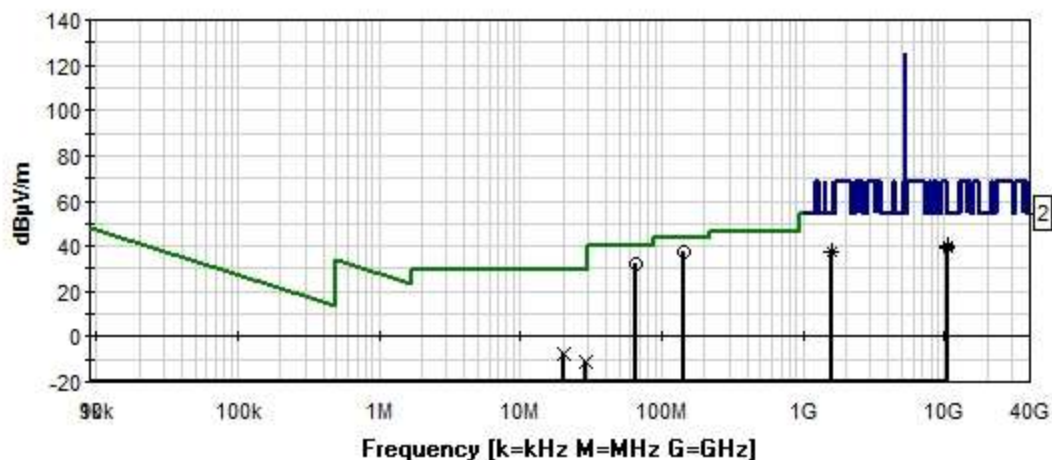

- Readings
 - 1 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
 - 2 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
 - × Peak Readings
 - QP Readings
 - * Average Readings
- Software Version: 5.03.20

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
T1	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
T2	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T3	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T4	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T5	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
T6	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T7	AN02741	Active Horn Antenna	AMFW-5F-12001800-20-10P	5/13/2021	5/13/2023
	AN02742	Active Horn Antenna	AMFW-5F-18002650-20-10P	11/11/2020	11/11/2022
	AN02743	Active Horn Antenna	AMFW-5F-260400-33-8P	5/11/2021	5/11/2023
	AN02763-69	Waveguide	Multiple	4/28/2020	4/28/2022
	AN02764-70	Waveguide	Multiple	4/28/2020	4/28/2022
	ANP06678	Cable	32026-29801-29801-144	2/20/2020	2/20/2022
	ANP07211	Cable	32026-29801-29801-18	6/16/2021	6/16/2023
	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T8	AN02307	Preamp	8447D	1/6/2022	1/6/2024
T9	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
T10	ANP05360	Cable	RG214	2/3/2020	2/3/2022
T11	AN00052	Loop Antenna	6502	5/4/2020	5/4/2022
T12	ANP06011	Cable	Heliac	8/7/2020	8/7/2022

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7 T11	T4 T8 T12	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	143.290M QP	49.4	+0.3 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.0	+0.0 -27.6 +0.0	+0.0	37.3	43.5	-6.2	Vert
^	143.290M	51.8	+0.3 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.0	+0.0 -27.6 +0.0	+0.0	39.7	43.5	-3.8	Vert
3	66.300M QP	46.1	+0.2 +0.0 +12.9	+0.4 +0.0 +0.5	+0.0 +0.0 +0.0	+0.0 -27.8 +0.0	+0.0	32.3	40.0	-7.7	Vert
^	66.300M	51.6	+0.2 +0.0 +12.9	+0.4 +0.0 +0.5	+0.0 +0.0 +0.0	+0.0 -27.8 +0.0	+0.0	37.8	40.0	-2.2	Vert
5	10638.100 M Ave	44.3	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	40.3	54.0	-13.7	Vert
^	10638.100 M	61.4	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	57.4	54.0	+3.4	Vert
7	1600.450M Ave	33.8	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.5 +0.0 +0.0	-35.0 +0.0 +0.0	+0.0	37.2	54.0	-16.8	Vert
^	1600.450M	49.5	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.5 +0.0 +0.0	-35.0 +0.0 +0.0	+0.0	52.9	54.0	-1.1	Vert
9	10558.150 M Ave	44.2	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	40.1	68.2	-28.1	Vert
^	10558.150 M	60.6	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	56.5	68.2	-11.7	Vert
11	10518.050 M Ave	42.9	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	38.9	68.2	-29.3	Vert
^	10518.050 M	59.4	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	55.4	68.2	-12.8	Vert
13	20.269M	25.3	+0.0 +0.0 +0.0	+0.2 +0.0 +0.0	+0.0 +0.0 +7.3	+0.0 +0.0 +0.0	-40.0	-7.2	29.5	-36.7	Perp/
14	28.687M	23.3	+0.0 +0.0 +0.0	+0.3 +0.0 +0.0	+0.0 +0.0 +4.8	+0.0 +0.0 +0.1	-40.0	-11.5	29.5	-41.0	Perp/



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/18/2022
 Test Type: **Maximized Emissions** Time: 09:38:10
 Tested By: M. Harrison Sequence#: 43
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 9k-40 GHz Setup: Antenna 0 Channels: 5270, 5310MHz 802.11n40 Rate: MCS0 PWR Output: Low/Mid: 20 dBm; High: 17 dBm 100% Duty Cycle Notes: No EUT Emissions found within 20 dB of the limit above 18GHz
--

Nalloy, LLC WO#: 106121 Sequence#: 43 Date: 1/18/2022
 15.407(b) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Perp/Para

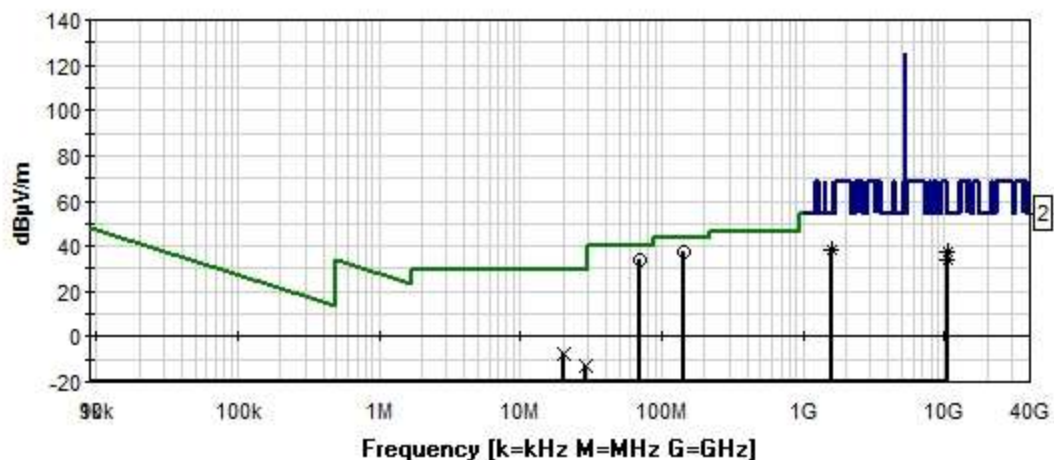

- Readings
 - 1 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
 - 2 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
 - × Peak Readings
 - QP Readings
 - * Average Readings
- Software Version: 5.03.20

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
T1	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
T2	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T3	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T4	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T5	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
T6	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T7	AN02741	Active Horn Antenna	AMFW-5F-12001800-20-10P	5/13/2021	5/13/2023
	AN02742	Active Horn Antenna	AMFW-5F-18002650-20-10P	11/11/2020	11/11/2022
	AN02743	Active Horn Antenna	AMFW-5F-260400-33-8P	5/11/2021	5/11/2023
	AN02763-69	Waveguide	Multiple	4/28/2020	4/28/2022
	AN02764-70	Waveguide	Multiple	4/28/2020	4/28/2022
	ANP06678	Cable	32026-29801-29801-144	2/20/2020	2/20/2022
	ANP07211	Cable	32026-29801-29801-18	6/16/2021	6/16/2023
	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T8	AN02307	Preamp	8447D	1/6/2022	1/6/2024
T9	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
T10	ANP05360	Cable	RG214	2/3/2020	2/3/2022
T11	AN00052	Loop Antenna	6502	5/4/2020	5/4/2022
T12	ANP06011	Cable	Heliac	8/7/2020	8/7/2022

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7 T11	T4 T8 T12	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	68.990M	48.1	+0.2 +0.0 +12.9	+0.4 +0.0 +0.5	+0.0 +0.0 +0.0	+0.0 -27.8 +0.0	+0.0	34.3	40.0	-5.7	Vert
^	68.990M	51.9	+0.2 +0.0 +12.9	+0.4 +0.0 +0.5	+0.0 +0.0 +0.0	+0.0 -27.8 +0.0	+0.0	38.1	40.0	-1.9	Vert
3	143.276M	49.2	+0.3 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.0	+0.0 -27.6 +0.0	+0.0	37.1	43.5	-6.4	Vert
^	143.276M	51.7	+0.3 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.0	+0.0 -27.6 +0.0	+0.0	39.6	43.5	-3.9	Vert
5	1577.200M	34.8	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.0 +0.0 +0.0	+0.0	38.3	54.0	-15.7	Vert
^	1577.200M	49.1	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.0 +0.0 +0.0	+0.0	52.6	54.0	-1.4	Vert
7	10634.560	37.8	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	33.8	54.0	-20.2	Vert
^	10634.560	53.6	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	49.6	54.0	-4.4	Vert
9	10530.000	41.2	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	37.2	68.2	-31.0	Vert
^	10530.000	57.0	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	53.0	68.2	-15.2	Vert
11	20.358M	25.4	+0.0 +0.0 +0.0	+0.2 +0.0 +0.0	+0.0 +0.0 +7.2	+0.0 +0.0 +0.0	-40.0	-7.2	29.5	-36.7	Perp/
12	28.687M	22.3	+0.0 +0.0 +0.0	+0.3 +0.0 +0.0	+0.0 +0.0 +4.8	+0.0 +0.0 +0.1	-40.0	-12.5	29.5	-42.0	Perp/



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/18/2022
 Test Type: **Maximized Emissions** Time: 09:42:36
 Tested By: M. Harrison Sequence#: 44
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 9k-40 GHz Setup: Antenna 0 Channels: 5260, 5280, 5320MHz 802.11ac20 Rate: MCS0 PWR Output: Low: 20 dBm; High: 20 dBm 100% Duty Cycle Notes: No EUT Emissions found within 20 dB of the limit above 18GHz

Nalloy, LLC WO#: 106121 Sequence#: 44 Date: 1/18/2022
15.407(b) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Perp/Para

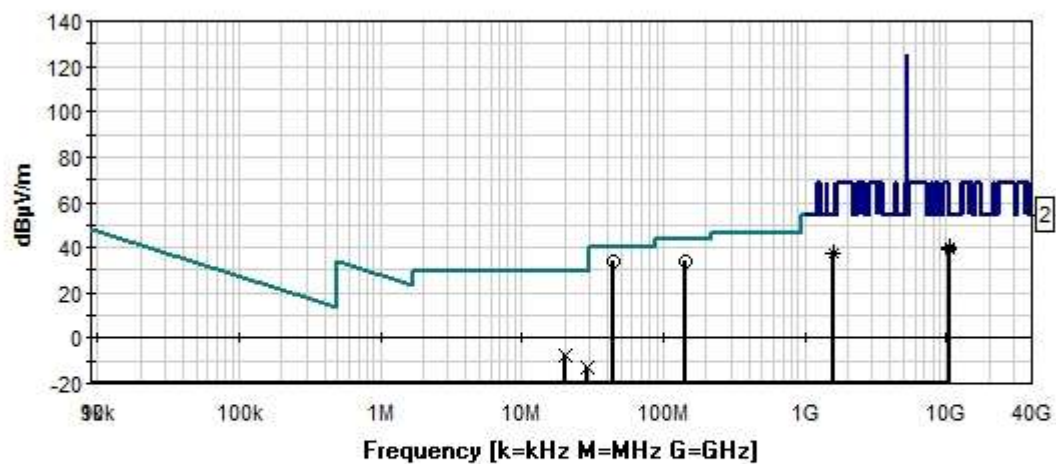

— Readings
— 1 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
— 2 - 15.407(b) / 15.209 Radiated Spurious Emissions
× Peak Readings
○ QP Readings
* Average Readings
Software Version: 5.03.20

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
T1	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
T2	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T3	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T4	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T5	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
T6	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T7	AN02741	Active Horn Antenna	AMFW-5F-12001800-20-10P	5/13/2021	5/13/2023
	AN02742	Active Horn Antenna	AMFW-5F-18002650-20-10P	11/11/2020	11/11/2022
	AN02743	Active Horn Antenna	AMFW-5F-260400-33-8P	5/11/2021	5/11/2023
	AN02763-69	Waveguide	Multiple	4/28/2020	4/28/2022
	AN02764-70	Waveguide	Multiple	4/28/2020	4/28/2022
	ANP06678	Cable	32026-29801-29801-144	2/20/2020	2/20/2022
	ANP07211	Cable	32026-29801-29801-18	6/16/2021	6/16/2023
	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T8	AN02307	Preamp	8447D	1/6/2022	1/6/2024
T9	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
T10	ANP05360	Cable	RG214	2/3/2020	2/3/2022
T11	ANP06011	Cable	Heliac	8/7/2020	8/7/2022
T12	AN00052	Loop Antenna	6502	5/4/2020	5/4/2022

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7 T11	T4 T8 T12	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	43.805M	46.3	+0.0 +0.0 +14.2	+0.3 +0.0 +0.4	+0.0 +0.0 +0.1	+0.0 -27.8 +0.0	+0.0	33.5	40.0	-6.5	Vert
^	43.805M	49.5	+0.0 +0.0 +14.2	+0.3 +0.0 +0.4	+0.0 +0.0 +0.1	+0.0 -27.8 +0.0	+0.0	36.7	40.0	-3.3	Vert
3	143.316M	46.6	+0.0 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.2	+0.0 -27.6 +0.0	+0.0	34.4	43.5	-9.1	Vert
^	143.316M	50.4	+0.0 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.2	+0.0 -27.6 +0.0	+0.0	38.2	43.5	-5.3	Vert
5	10637.880 M Ave	44.1	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	40.1	54.0	-13.9	Vert
^	10637.880 M	61.3	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	57.3	54.0	+3.3	Vert
7	1571.050M Ave	34.4	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.1 +0.0 +0.0	+0.0	37.8	54.0	-16.2	Vert
^	1571.050M	49.6	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.1 +0.0 +0.0	+0.0	53.0	54.0	-1.0	Vert
9	10518.150 M Ave	42.8	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	38.8	68.2	-29.4	Vert
^	10518.150 M	59.0	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	55.0	68.2	-13.2	Vert
11	20.388M	24.9	+0.0 +0.0 +0.0	+0.2 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +7.2	-40.0	-7.7	29.5	-37.2	Perp/
12	28.567M	21.5	+0.0 +0.0 +0.0	+0.3 +0.0 +0.0	+0.0 +0.0 +0.1	+0.0 +0.0 +4.8	-40.0	-13.3	29.5	-42.8	Perp/



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/18/2022
 Test Type: **Maximized Emissions** Time: 09:57:19
 Tested By: M. Harrison Sequence#: 45
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 9k-40 GHz Setup: Antenna 0 Channels: 5270, 5310MHz 802.11ac40 Rate: MCS0 PWR Output: Low/Mid: 20 dBm; High: 15 dBm 100% Duty Cycle Notes: No EUT Emissions found within 20 dB of the limit above 18GHz

Nalloy, LLC WO#: 106121 Sequence#: 45 Date: 1/18/2022
15.407(b) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Perp/Para

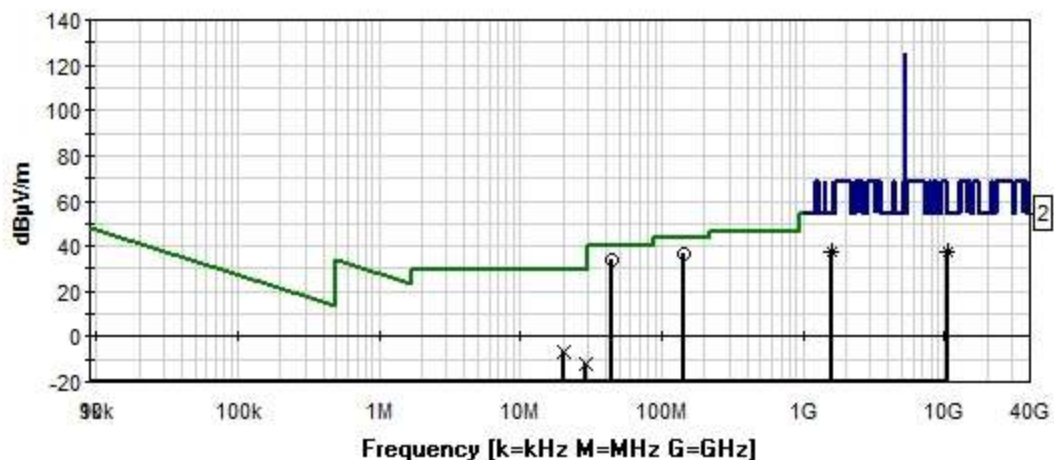

- Readings
 - 1 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
 - 2 - 15.407(b) / 15.209 Radiated Spurious Emissions
 - × Peak Readings
 - QP Readings
 - * Average Readings
- Software Version: 5.03.20

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
T1	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
T2	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T3	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T4	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T5	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
T6	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T7	AN02741	Active Horn Antenna	AMFW-5F-12001800-20-10P	5/13/2021	5/13/2023
	AN02742	Active Horn Antenna	AMFW-5F-18002650-20-10P	11/11/2020	11/11/2022
	AN02743	Active Horn Antenna	AMFW-5F-260400-33-8P	5/11/2021	5/11/2023
	AN02763-69	Waveguide	Multiple	4/28/2020	4/28/2022
	AN02764-70	Waveguide	Multiple	4/28/2020	4/28/2022
	ANP06678	Cable	32026-29801-29801-144	2/20/2020	2/20/2022
	ANP07211	Cable	32026-29801-29801-18	6/16/2021	6/16/2023
	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T8	AN02307	Preamp	8447D	1/6/2022	1/6/2024
T9	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
T10	ANP05360	Cable	RG214	2/3/2020	2/3/2022
T11	ANP06011	Cable	Heliac	8/7/2020	8/7/2022
T12	AN00052	Loop Antenna	6502	5/4/2020	5/4/2022

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7 T11	T4 T8 T12	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	43.800M	46.6	+0.0 +0.0 +14.2	+0.3 +0.0 +0.4	+0.0 +0.0 +0.1	+0.0 -27.8 +0.0	+0.0	33.8	40.0	-6.2	Vert
^	43.800M	49.9	+0.0 +0.0 +14.2	+0.3 +0.0 +0.4	+0.0 +0.0 +0.1	+0.0 -27.8 +0.0	+0.0	37.1	40.0	-2.9	Vert
3	141.202M	48.8	+0.0 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.2	+0.0 -27.6 +0.0	+0.0	36.6	43.5	-6.9	Vert
^	141.202M	51.5	+0.0 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.2	+0.0 -27.6 +0.0	+0.0	39.3	43.5	-4.2	Vert
5	10633.500 M Ave	41.8	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	37.8	54.0	-16.2	Vert
^	10633.500 M	57.0	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.3 +0.0	+0.0 +0.0 +0.0	+0.0	53.0	54.0	-1.0	Vert
7	1572.150M Ave	34.2	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.1 +0.0 +0.0	+0.0	37.6	54.0	-16.4	Vert
^	1572.150M	49.5	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.1 +0.0 +0.0	+0.0	52.9	54.0	-1.1	Vert
9	10532.250 M Ave	41.8	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	37.8	68.2	-30.4	Vert
^	10532.250 M	56.1	+2.0 +0.0 +0.0	+6.2 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	52.1	68.2	-16.1	Vert
11	20.269M	26.1	+0.0 +0.0 +0.0	+0.2 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +7.3	-40.0	-6.4	29.5	-35.9	Perp/
12	28.687M	22.9	+0.0 +0.0 +0.0	+0.3 +0.0 +0.0	+0.0 +0.0 +0.1	+0.0 +0.0 +4.8	-40.0	-11.9	29.5	-41.4	Perp/



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/18/2022
 Test Type: **Maximized Emissions** Time: 10:03:49
 Tested By: M. Harrison Sequence#: 46
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 9k-40 GHz Setup: Antenna 0 Channels: 5290 MHz 802.11ac80 Rate: MCS0-9 PWR Output: 16 dBm 100% Duty Cycle Notes: No EUT Emissions found within 20 dB of the limit above 18GHz

Nalloy, LLC WO#: 106121 Sequence#: 46 Date: 1/18/2022
 15.407(b) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Perp/Para

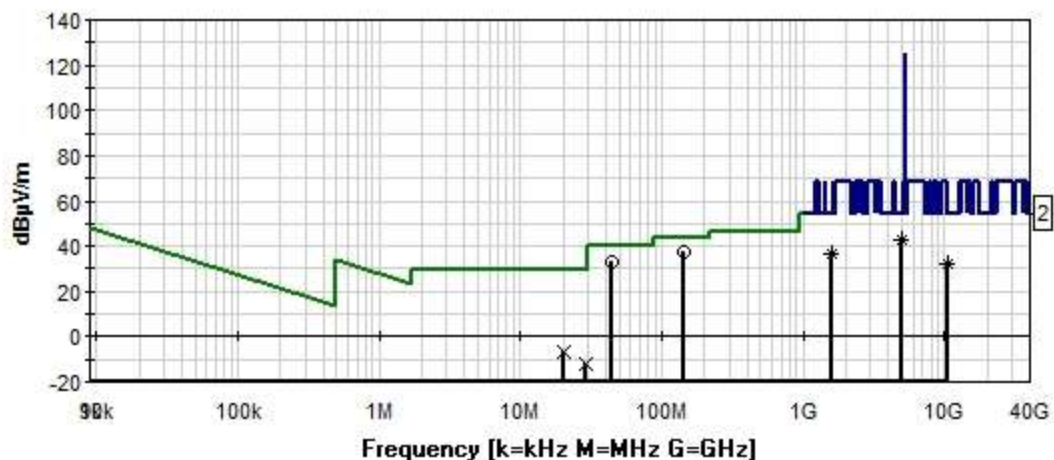

- Readings
 - 1 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
 - 2 - 15.407(b)(2) / 15.209 Radiated Spurious Emissions
 - × Peak Readings
 - QP Readings
 - * Average Readings
- Software Version: 5.03.20

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
T1	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
T2	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T3	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T4	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T5	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
T6	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T7	AN02741	Active Horn Antenna	AMFW-5F-12001800-20-10P	5/13/2021	5/13/2023
	AN02742	Active Horn Antenna	AMFW-5F-18002650-20-10P	11/11/2020	11/11/2022
	AN02743	Active Horn Antenna	AMFW-5F-260400-33-8P	5/11/2021	5/11/2023
	AN02763-69	Waveguide	Multiple	4/28/2020	4/28/2022
	AN02764-70	Waveguide	Multiple	4/28/2020	4/28/2022
	ANP06678	Cable	32026-29801-29801-144	2/20/2020	2/20/2022
	ANP07211	Cable	32026-29801-29801-18	6/16/2021	6/16/2023
	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T8	AN02307	Preamp	8447D	1/6/2022	1/6/2024
T9	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
T10	ANP05360	Cable	RG214	2/3/2020	2/3/2022
T11	ANP06011	Cable	Heliac	8/7/2020	8/7/2022
T12	AN00052	Loop Antenna	6502	5/4/2020	5/4/2022

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters



#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7 T11	T4 T8 T12	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	143.290M	49.9	+0.0 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.2	+0.0 -27.6 +0.0	+0.0	37.7	43.5	-5.8	Vert
^	143.290M	53.2	+0.0 +0.0 +13.9	+0.6 +0.0 +0.7	+0.0 +0.0 +0.2	+0.0 -27.6 +0.0	+0.0	41.0	43.5	-2.5	Vert
3	43.793M	45.4	+0.0 +0.0 +14.2	+0.3 +0.0 +0.4	+0.0 +0.0 +0.1	+0.0 -27.8 +0.0	+0.0	32.6	40.0	-7.4	Vert
^	43.793M	49.4	+0.0 +0.0 +14.2	+0.3 +0.0 +0.4	+0.0 +0.0 +0.1	+0.0 -27.8 +0.0	+0.0	36.6	40.0	-3.4	Vert
5	4982.690M	26.3	+1.7 +9.7 +0.0	+3.8 +0.5 +0.0	+33.8 +0.0 +0.0	-33.4 +0.0 +0.0	+0.0	42.4	54.0	-11.6	Vert
^	4982.690M	42.8	+1.7 +9.7 +0.0	+3.8 +0.5 +0.0	+33.8 +0.0 +0.0	-33.4 +0.0 +0.0	+0.0	58.9	54.0	+4.9	Vert
7	1579.050M	33.3	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.0 +0.0 +0.0	+0.0	36.8	54.0	-17.2	Vert
^	1579.050M	47.9	+0.8 +9.7 +0.0	+2.2 +0.2 +0.0	+25.6 +0.0 +0.0	-35.0 +0.0 +0.0	+0.0	51.4	54.0	-2.6	Vert
9	10580.000	36.4	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	32.5	68.2	-35.7	Vert
^	10580.000	50.8	+2.0 +0.0 +0.0	+6.3 +0.0 +0.0	+0.0 -12.2 +0.0	+0.0 +0.0 +0.0	+0.0	46.9	68.2	-21.3	Vert
11	20.269M	26.1	+0.0 +0.0 +0.0	+0.2 +0.0 +0.0	+0.0 +0.0 +0.0	+0.0 +0.0 +7.3	-40.0	-6.4	29.5	-35.9	Perp/
12	28.687M	22.9	+0.0 +0.0 +0.0	+0.3 +0.0 +0.0	+0.0 +0.0 +0.1	+0.0 +0.0 +4.8	-40.0	-11.9	29.5	-41.4	Perp/



Band Edge



Band Edge Summary					
Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
5250*	802.11a	Omnidirectional	40.1	< 54.0 Av	Pass
5250*	802.11a	Omnidirectional	52.6	< 74.0 Pk	Pass
5350*	802.11a	Omnidirectional	67.2	< 74.0 Pk	Pass
5350*	802.11a	Omnidirectional	44.9	< 54.0 Av	Pass
5250*	802.11n20	Omnidirectional	39.6	< 54.0 Av	Pass
5250*	802.11n20	Omnidirectional	50.2	< 74.0 Pk	Pass
5350*	802.11n20	Omnidirectional	65.1	< 74.0 Pk	Pass
5350*	802.11n20	Omnidirectional	47.5	< 54.0 Av	Pass
5250*	802.11n40	Omnidirectional	39.7	< 54.0 Av	Pass
5250*	802.11n40	Omnidirectional	51.6	< 74.0 Pk	Pass
5350*	802.11n40	Omnidirectional	68.8	< 74.0 Pk	Pass
5350*	802.11n40	Omnidirectional	50.4	< 54.0 Av	Pass
5250*	802.11ac20	Omnidirectional	40.5	< 54.0 Av	Pass
5250*	802.11ac20	Omnidirectional	53.2	< 74.0 Pk	Pass
5350*	802.11ac20	Omnidirectional	65.7	< 74.0 Pk	Pass
5350*	802.11ac20	Omnidirectional	45.4	< 54.0 Av	Pass
5250*	802.11ac40	Omnidirectional	40.0	< 54.0 Av	Pass
5250*	802.11ac40	Omnidirectional	53.3	< 74.0 Pk	Pass
5350*	802.11ac40	Omnidirectional	69.6	< 74.0 Pk	Pass
5350*	802.11ac40	Omnidirectional	51.2	< 54.0 Av	Pass
5250*	802.11ac80	Omnidirectional	39.7	< 54.0 Av	Pass
5250*	802.11ac80	Omnidirectional	53.0	< 74.0 Pk	Pass
5350*	802.11ac80	Omnidirectional	69.4	< 74.0 Pk	Pass
5350*	802.11ac80	Omnidirectional	49.4	< 54.0 Av	Pass



* restricted band



Band Edge Plots

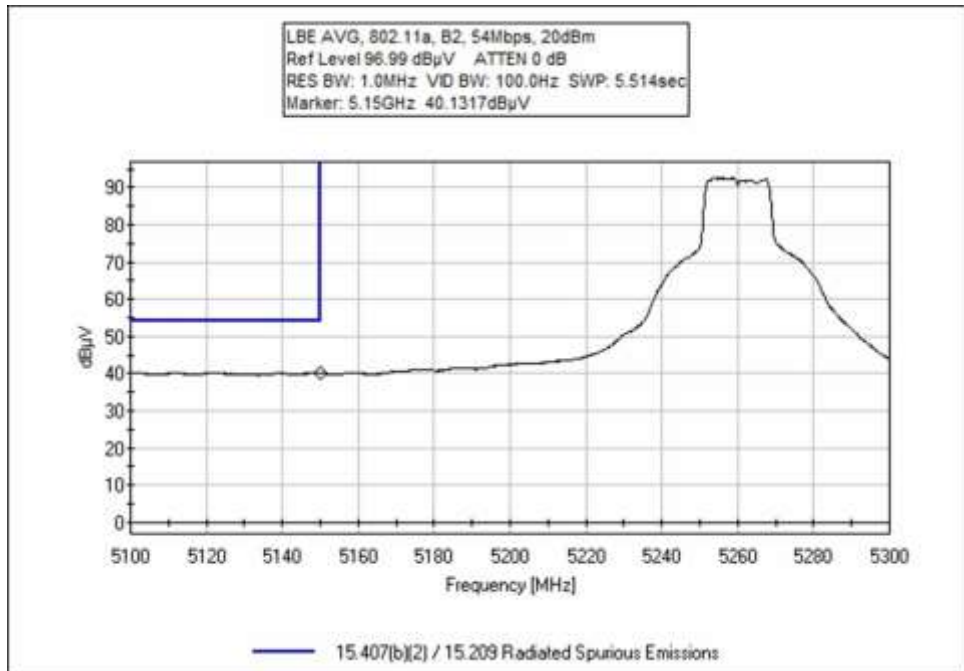
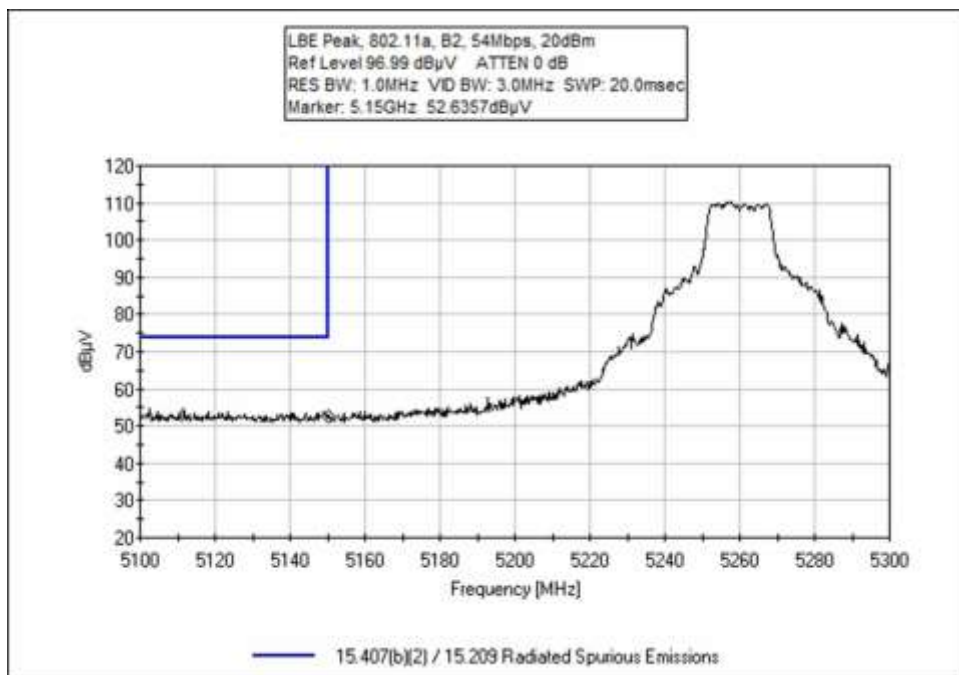


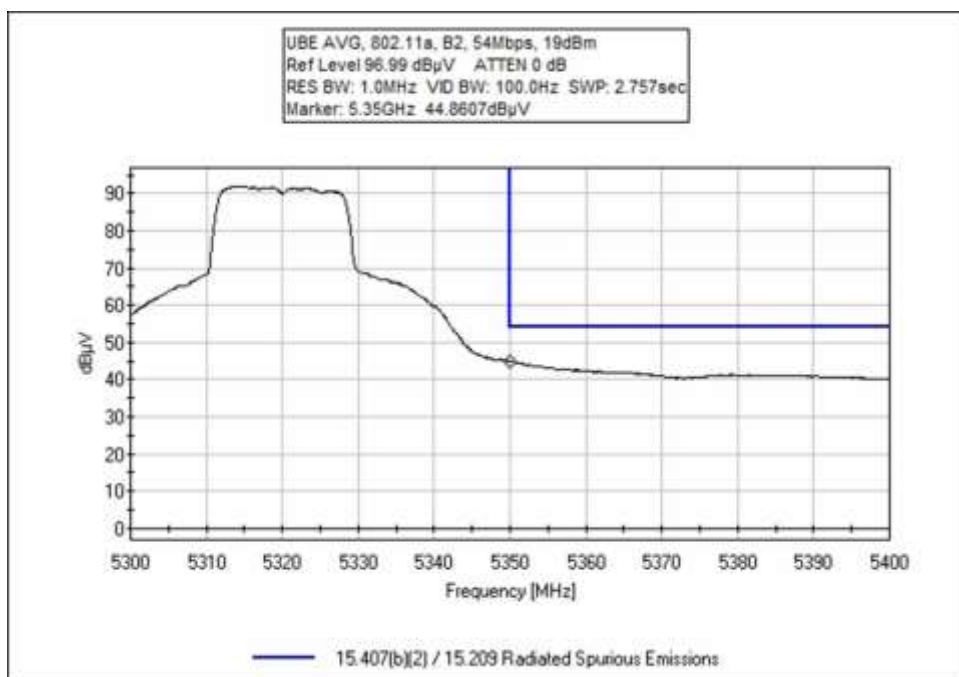
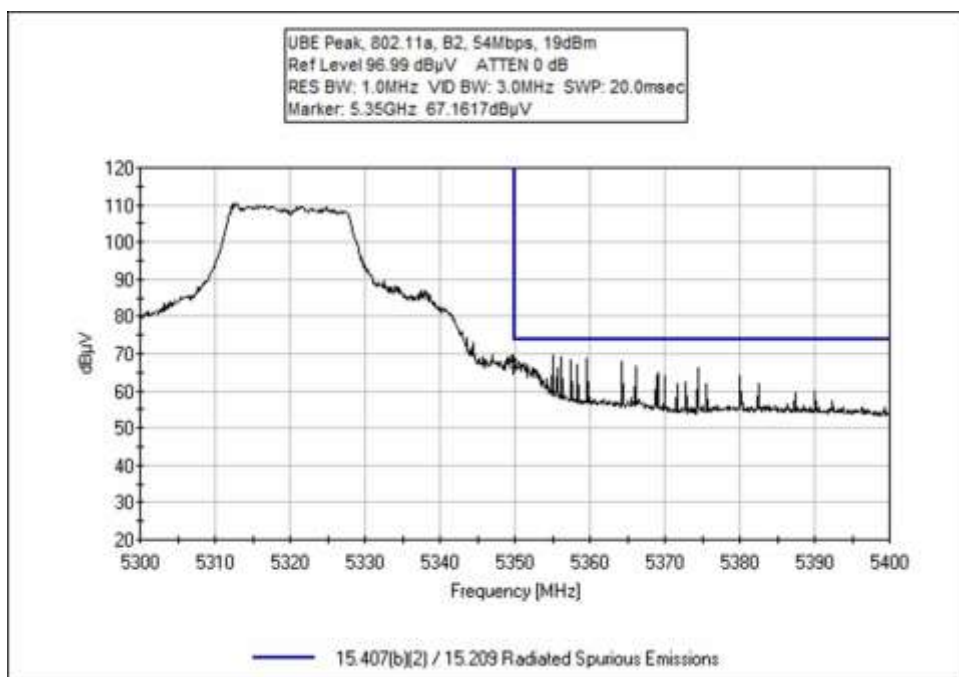


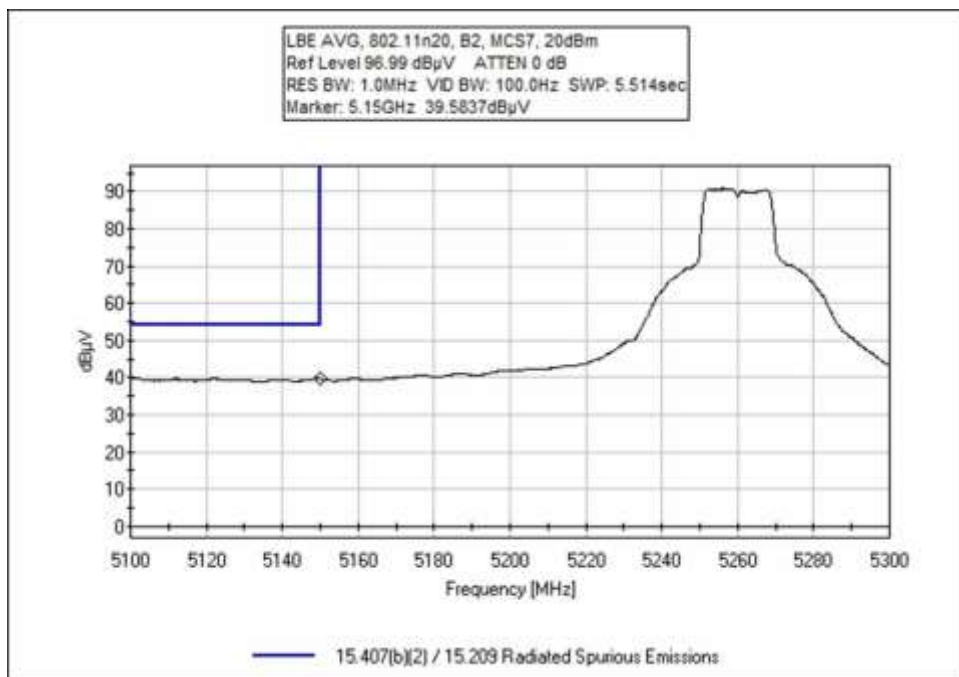
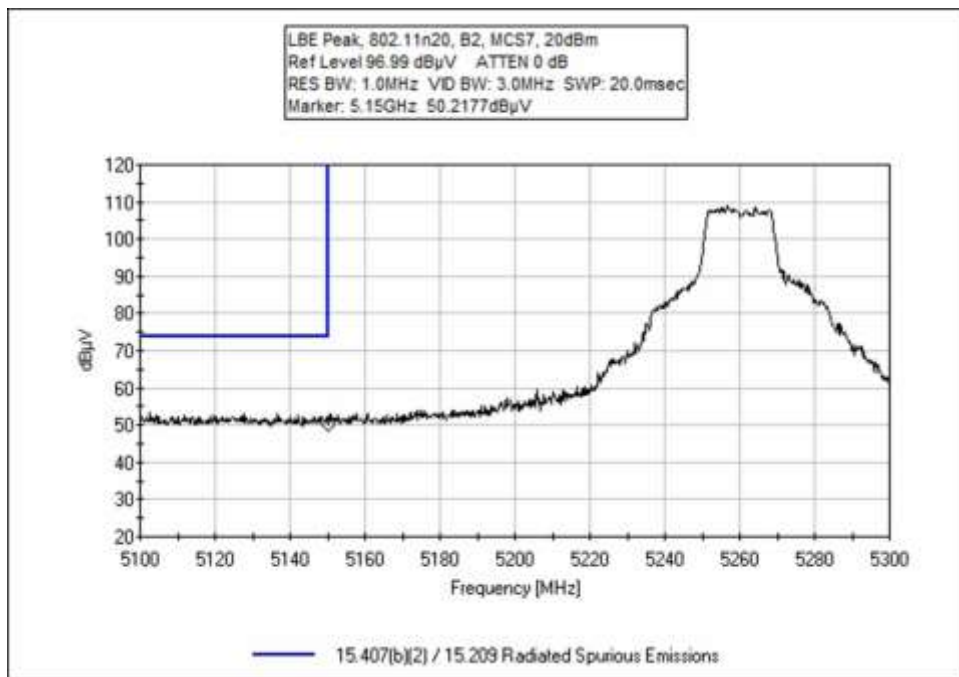


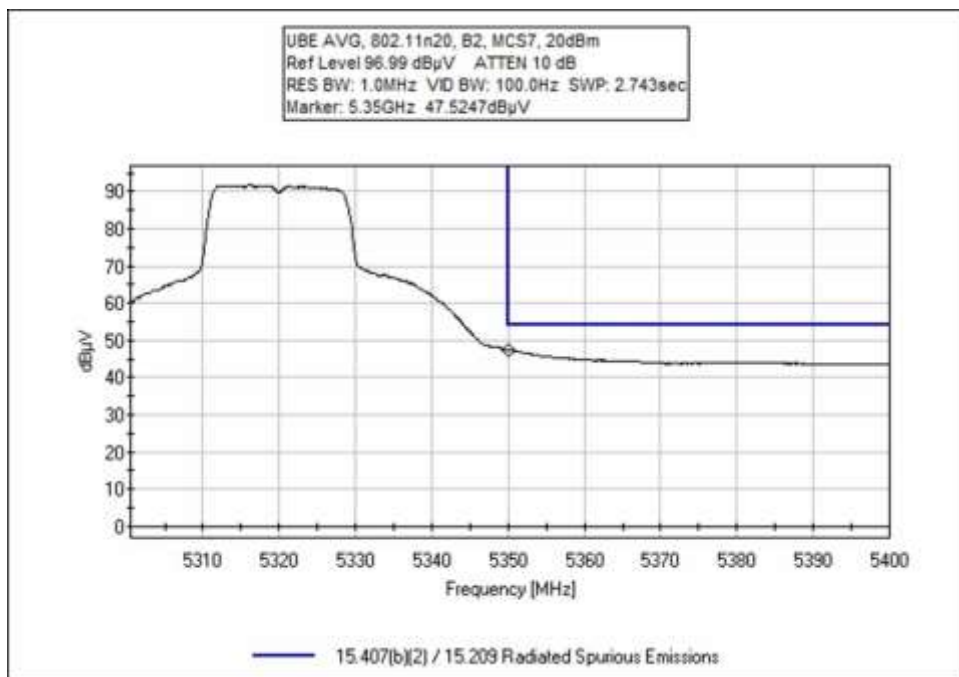
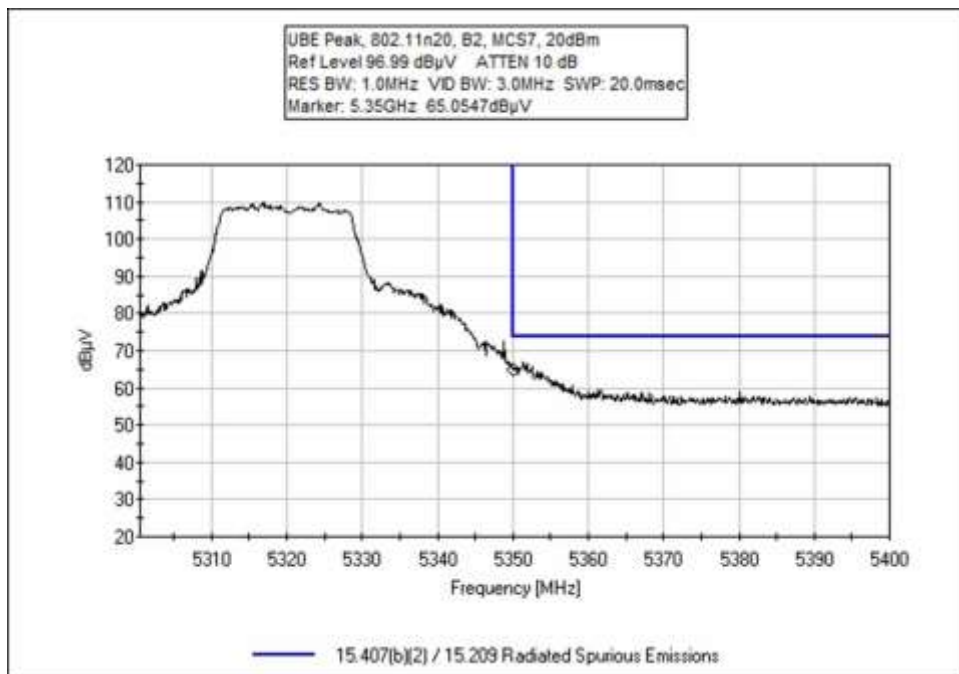


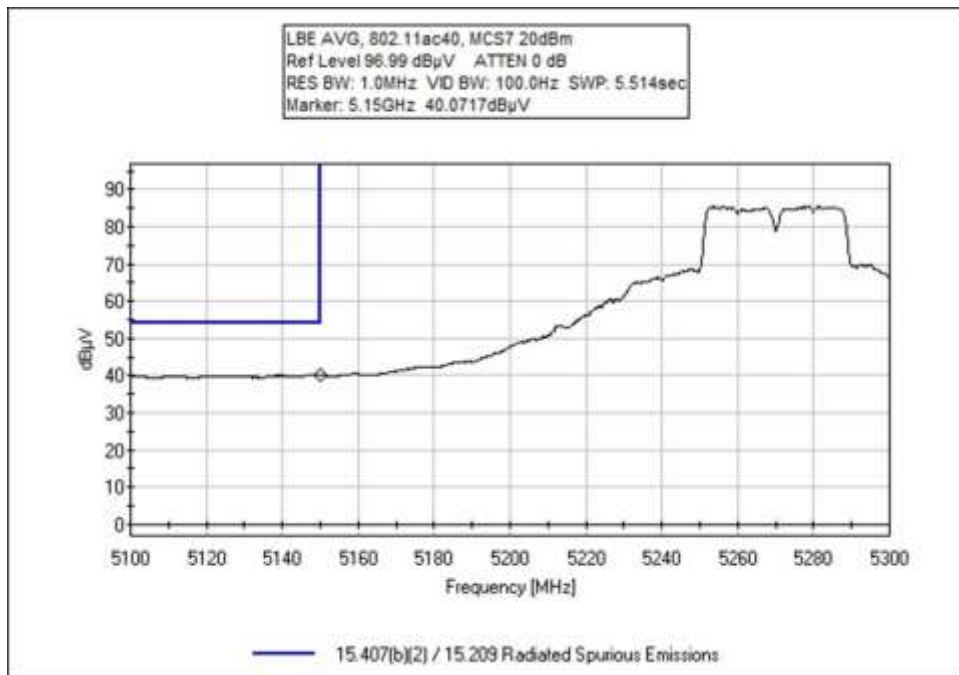
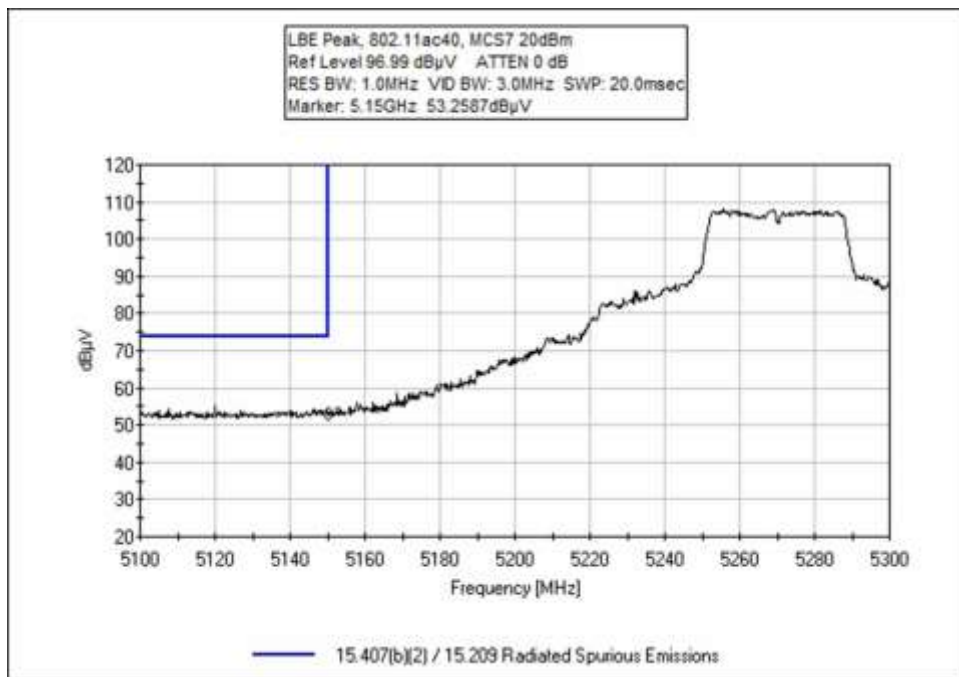


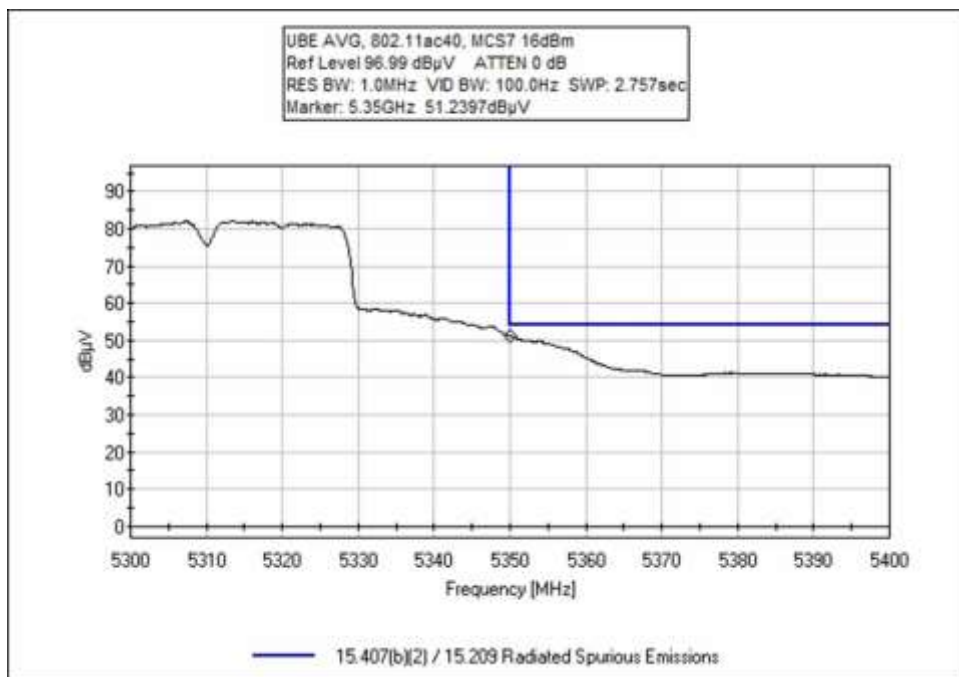
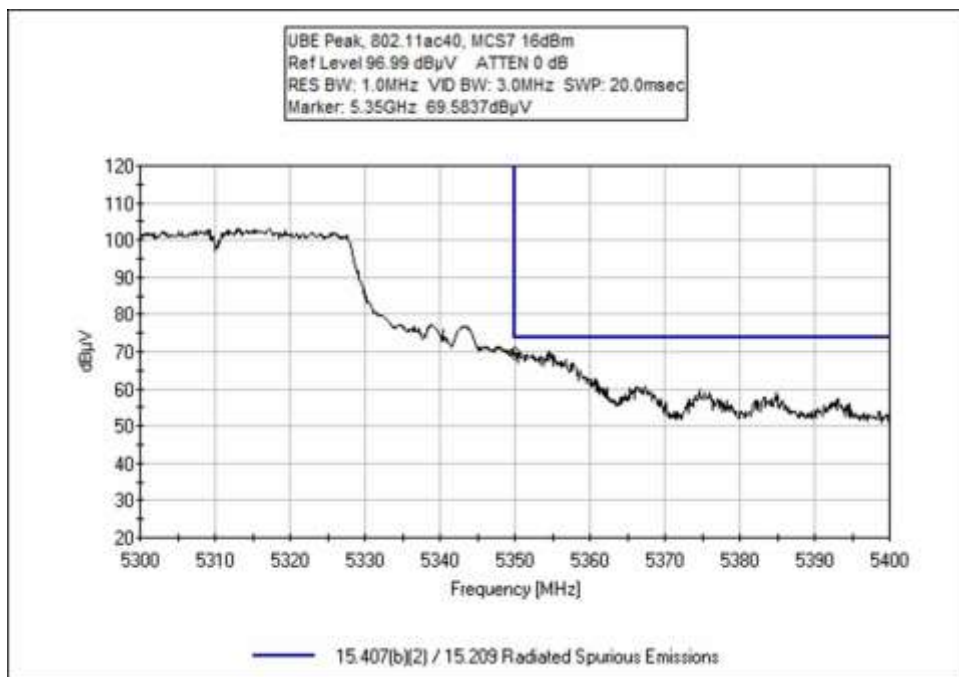


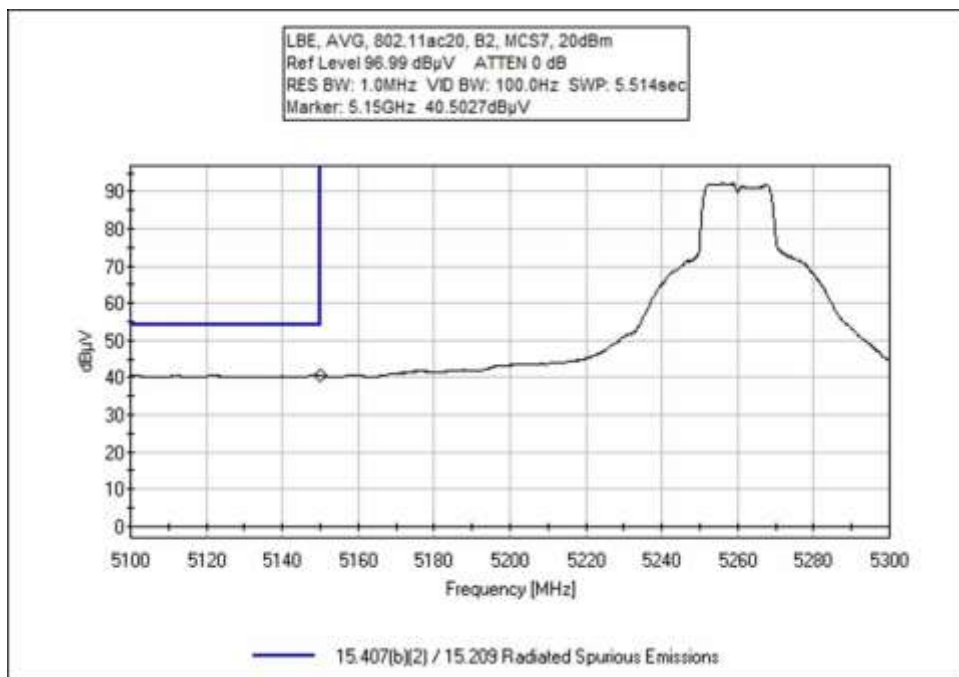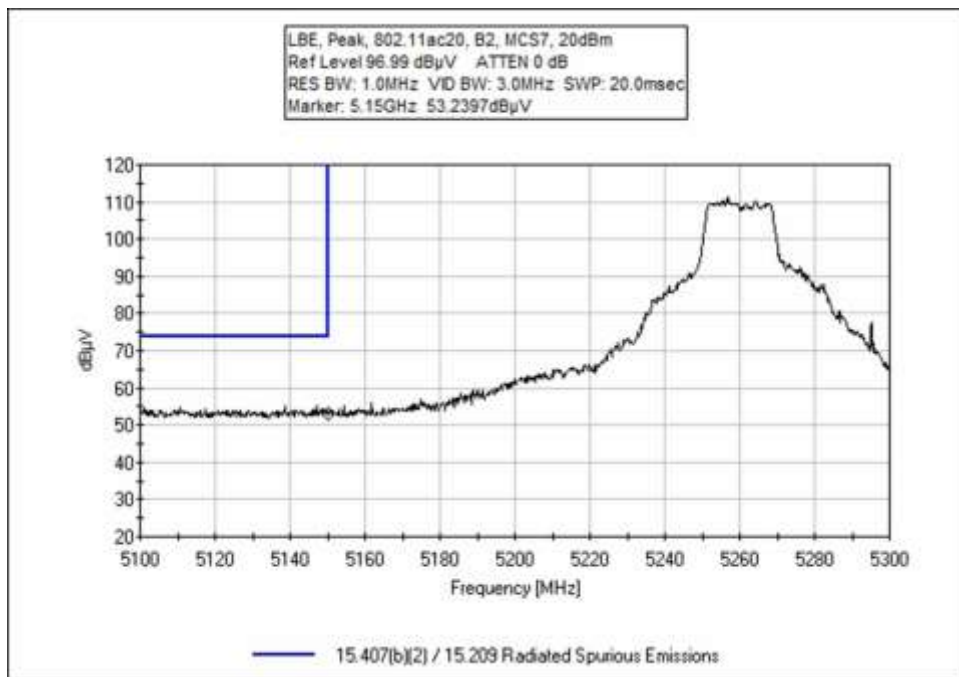

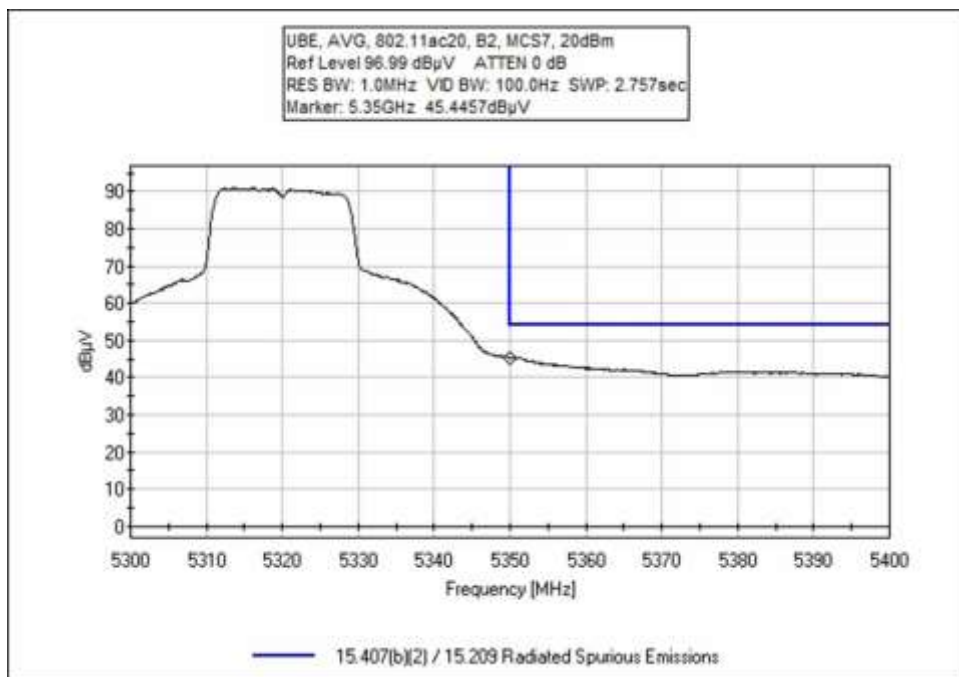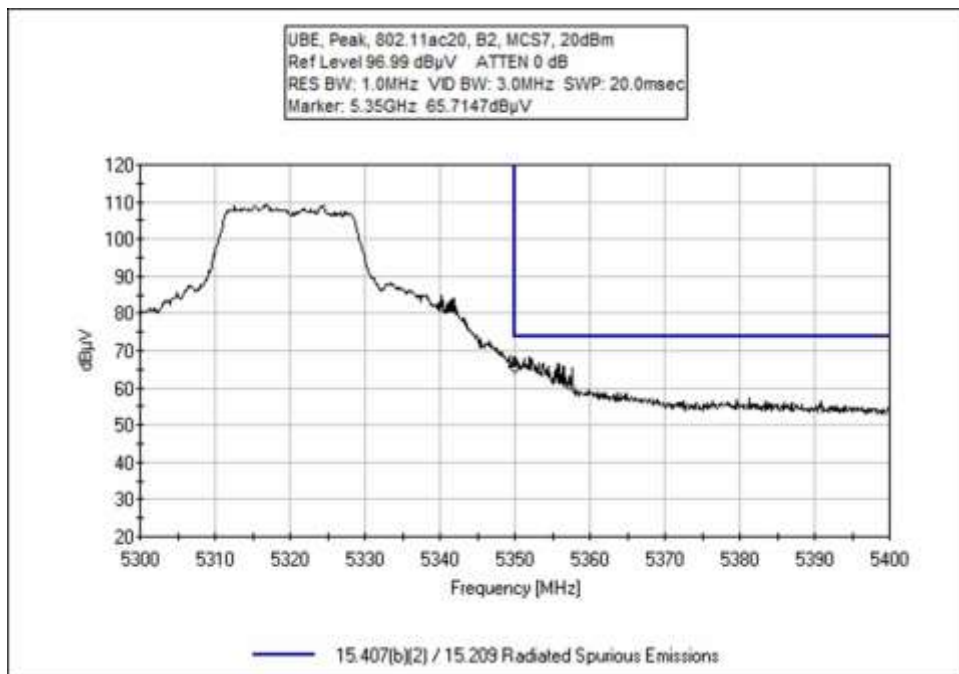

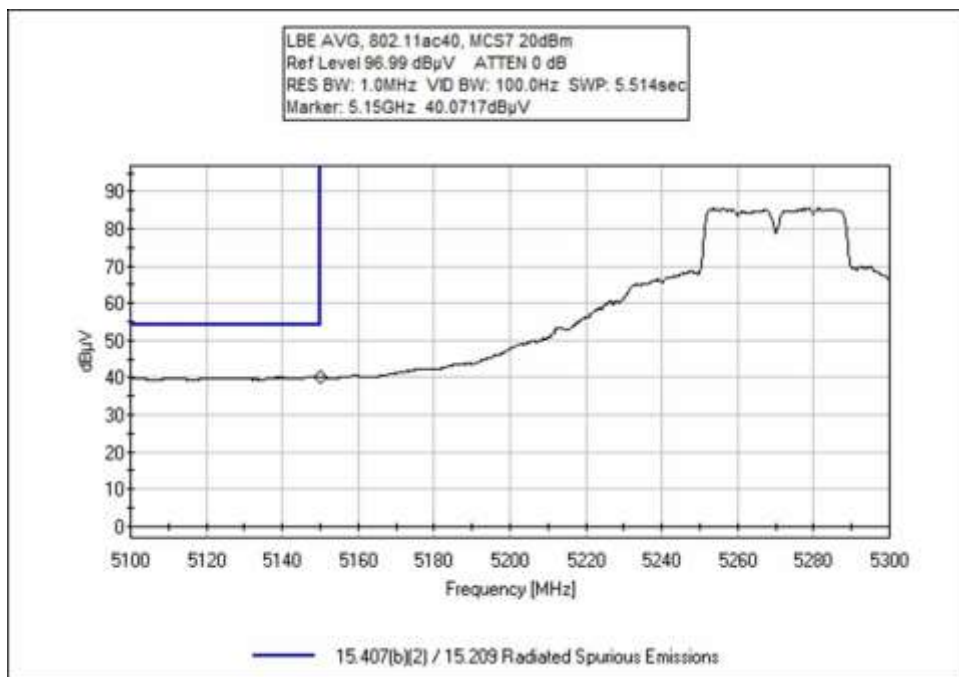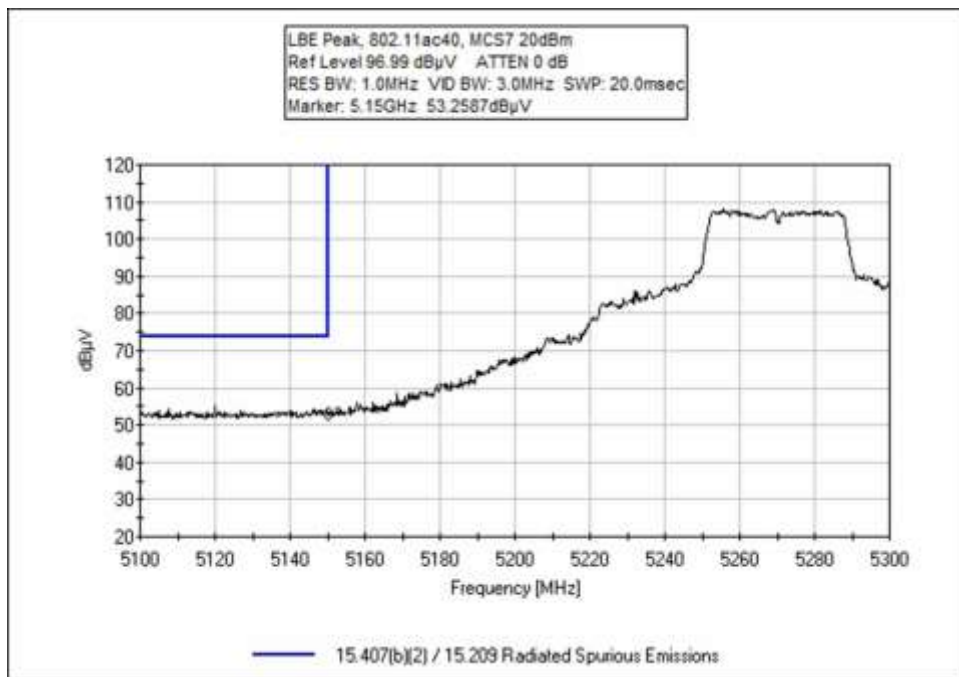

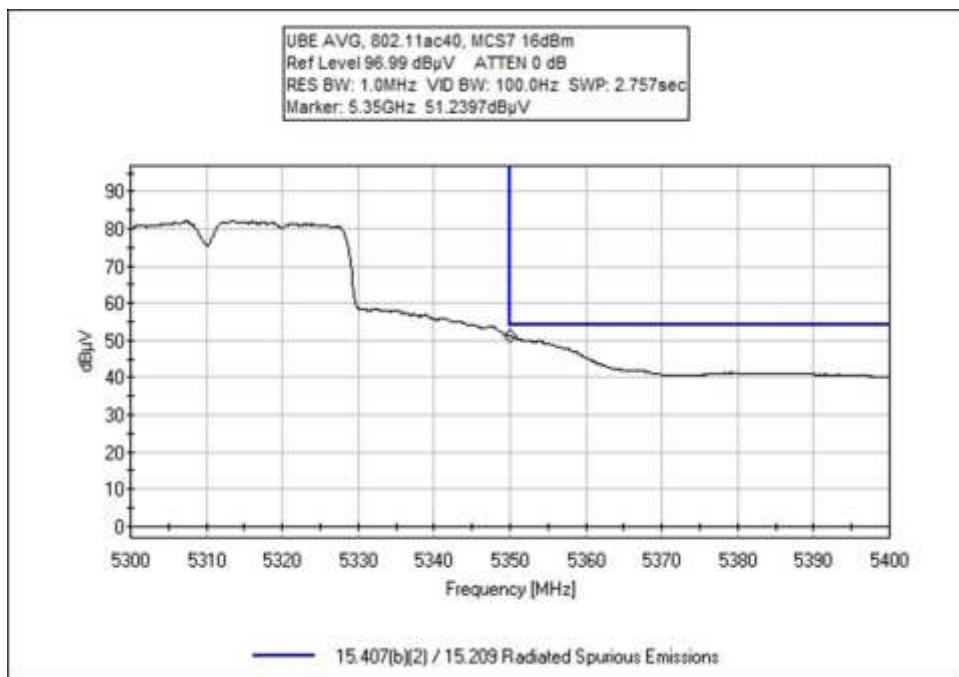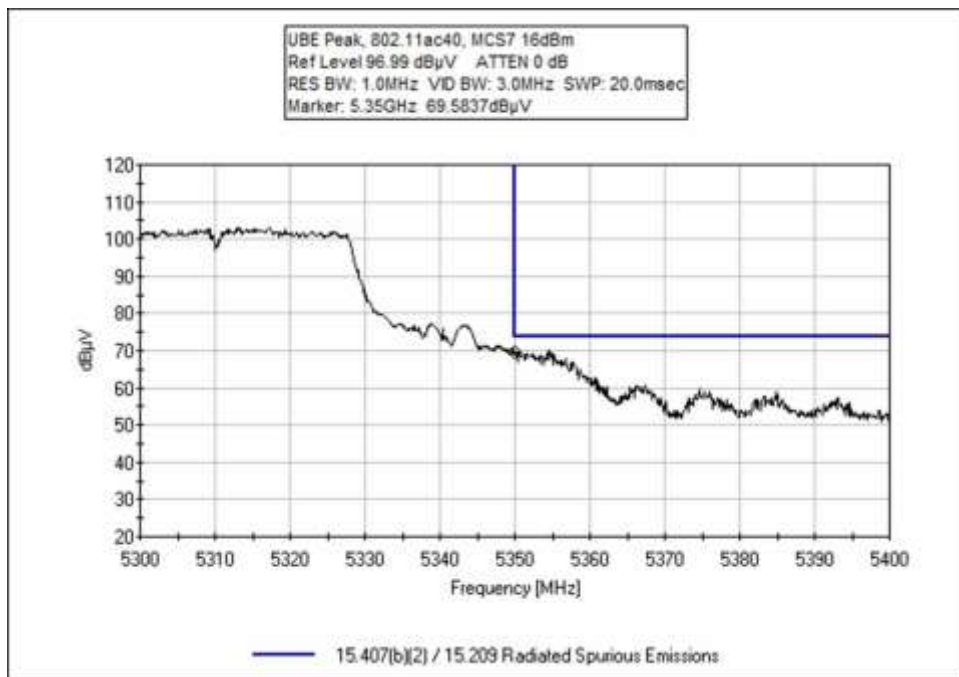

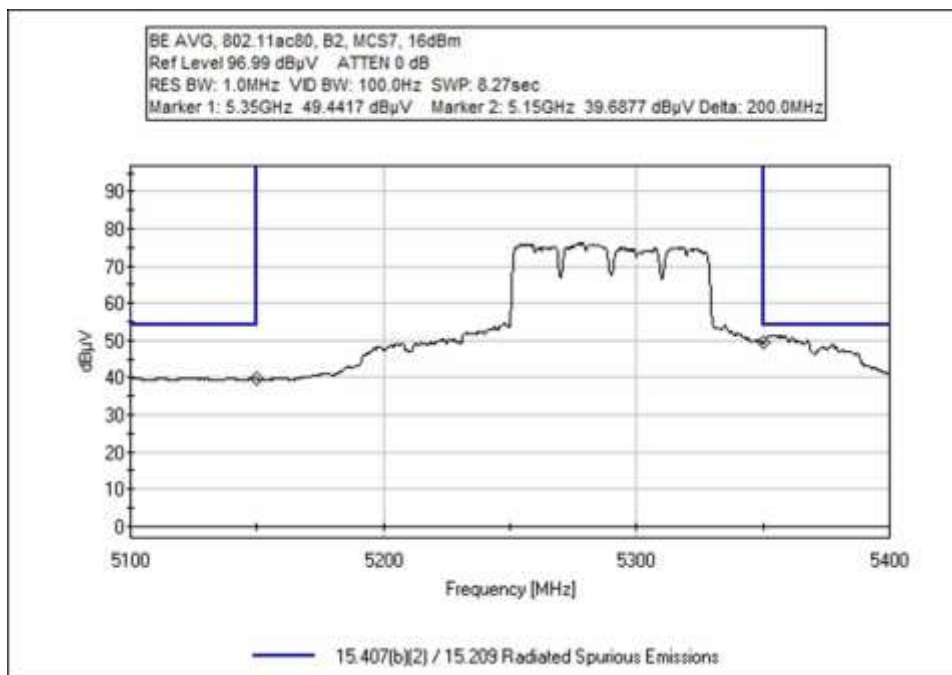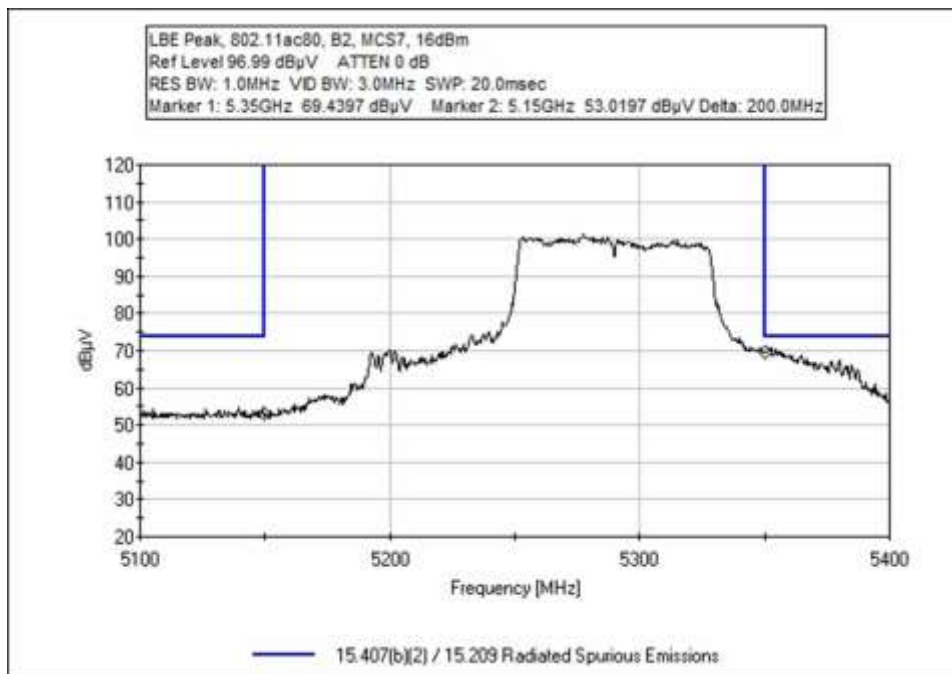

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 12/23/2021
 Test Type: **Maximized Emissions** Time: 09:19:40
 Tested By: M. Harrison Sequence#: 11
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5.15-5.35 GHz Setup: Antenna 0 Channels: 5260, 5320MHz 802.11a Rate: 54Mbps PWR Output: Low/Mid: 20 dBm; High: 19 dBm 100% Duty Cycle Notes: All data rates explored, worst case provided. Band Edge Measurements were performed with correct factors loaded into Spectrum Analyzer.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
	AN03540	Preamplifier	83017A	5/14/2021	5/14/2023
	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5350.000M Ave	44.9	+0.0				+0.0	44.9	54.0 5320, 54Mbps, 19dBm	-9.1	Horiz
^	5350.000M	67.2	+0.0				+0.0	67.2	74.0 5320, 54Mbps, 19dBm	-6.8	Horiz
3	5150.000M Ave	40.1	+0.0				+0.0	40.1	54.0 5260, 54Mbps, 20dBm	-13.9	Horiz
^	5150.000M	52.6	+0.0				+0.0	52.6	74.0 5260, 54Mbps, 20dBm	-21.4	Horiz



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 12/23/2021
 Test Type: **Maximized Emissions** Time: 09:55:21
 Tested By: M. Harrison Sequence#: 12
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5.15-5.35 GHz Setup: Antenna 0 Channels: 5260, 5320MHz 802.11n20 Rate: MCS0-7 PWR Output: Low/Mid: 20 dBm; High: 20 dBm 100% Duty Cycle Notes: All data rates explored, worst case provided. Band Edge Measurements were performed with correct factors loaded into Spectrum Analyzer.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
	AN03540	Preamplifier	83017A	5/14/2021	5/14/2023
	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5350.000M Ave	47.5	+0.0				+0.0	47.5	54.0 5320, MCS7, 20dBm	-6.5	Horiz
^	5350.000M	65.1	+0.0				+0.0	65.1	74.0 5320, MCS7, 20dBm	-8.9	Horiz
3	5150.000M Ave	39.6	+0.0				+0.0	39.6	54.0 5260, MCS7, 20dBm	-14.4	Horiz
^	5150.000M	50.2	+0.0				+0.0	50.2	74.0 5260, MCS7, 20dBm	-23.8	Horiz



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 12/23/2021
 Test Type: **Maximized Emissions** Time: 10:33:43
 Tested By: M. Harrison Sequence#: 13
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5.15-5.35 GHz Setup: Antenna 0 Channels: 5270, 5310MHz 802.11n40 Rate: MCS0-7 PWR Output: Low/Mid: 20 dBm; High: 17 dBm 100% Duty Cycle Notes: All data rates explored, worst case provided. Band Edge Measurements were performed with correct factors loaded into Spectrum Analyzer.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
	AN03540	Preamplifier	83017A	5/14/2021	5/14/2023
	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5350.000M Ave	50.4	+0.0				+0.0	50.4	54.0 5310, 17dBm, MCS7	-3.6	Horiz
^	5350.000M	68.8	+0.0				+0.0	68.8	74.0 5310, 17dBm, MCS7	-5.2	Horiz
3	5150.000M Ave	39.7	+0.0				+0.0	39.7	54.0 5270, 20dBm, MCS7	-14.3	Horiz
^	5150.000M	51.6	+0.0				+0.0	51.6	74.0 5270, 20dBm, MCS7	-22.4	Horiz



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/5/2022
 Test Type: **Maximized Emissions** Time: 08:30:05
 Tested By: M. Harrison Sequence#: 14
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5.15-5.35 GHz Setup: Antenna 0 Channels: 5260, 5320MHz 802.11ac0 Rate: MCS0-8 PWR Output: Low/Mid: 20 dBm; High: 20 dBm 100% Duty Cycle Notes: All data rates explored, worst case provided. Band Edge Measurements were performed with correct factors loaded into Spectrum Analyzer.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
	AN03540	Preamplifier	83017A	5/14/2021	5/14/2023
	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB				Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5350.000M Ave	45.4	+0.0				+0.0	45.4	54.0 5320, 20dBm, MCS7	-8.6	Horiz
^	5350.000M	65.7	+0.0				+0.0	65.7	74.0 5320, 20dBm, MCS7	-8.3	Horiz
3	5150.000M Ave	40.5	+0.0				+0.0	40.5	54.0 5260, 20dBm, MCS7	-13.5	Horiz
^	5150.000M	53.2	+0.0				+0.0	53.2	74.0 5260, 20dBm, MCS7	-20.8	Horiz



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
Customer: **Nalloy, LLC**
Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
Work Order #: **106407** Date: 1/5/2022
Test Type: **Maximized Emissions** Time: 09:35:50
Tested By: M. Harrison Sequence#: 15
Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5.15-5.35 GHz Setup: Antenna 0 Channels: 5270, 5310MHz 802.11ac40 Rate: MCS0-9 PWR Output: Low/Mid: 20 dBm; High: 16 dBm 100% Duty Cycle Notes: All data rates explored, worst case provided. Band Edge Measurements were performed with correct factors loaded into Spectrum Analyzer.
--

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
	AN03540	Preamplifier	83017A	5/14/2021	5/14/2023
	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5350.000M Ave	51.2	+0.0				+0.0	51.2	54.0 5310, 16dBm, MCS7	-2.8	Horiz
^	5350.000M	69.6	+0.0				+0.0	69.6	74.0 5310, 16dBm, MCS7	-4.4	Horiz
3	5150.000M Ave	40.0	+0.0				+0.0	40.0	54.0 5270, 20dBm, MCS7	-14.0	Horiz
^	5150.000M	53.3	+0.0				+0.0	53.3	74.0 5270, 20dBm, MCS7	-20.7	Horiz



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.407(b)(2) / 15.209 Radiated Spurious Emissions**
 Work Order #: **106407** Date: 1/5/2022
 Test Type: **Maximized Emissions** Time: 10:14:12
 Tested By: M. Harrison Sequence#: 16
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 5.15-5.35 GHz Setup: Antenna 0 Channels: 5290 MHz 802.11ac80 Rate: MCS0-9 PWR Output: 16 dBm 100% Duty Cycle Notes: All data rates explored, worst case provided. Band Edge Measurements were performed with correct factors loaded into Spectrum Analyzer.
--

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023
	ANP05961	Cable	Heliac	6/9/2021	6/9/2023
	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
	AN03540	Preamplifier	83017A	5/14/2021	5/14/2023
	ANP06242	Attenuator	54A-10	1/27/2020	1/27/2022
	ANP07505	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	dB	dB	dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	5353.600M Ave	51.4	+0.0				+0.0	51.4	54.0 5290, 16dBm, MCS7	-2.6	Horiz
2	5350.000M Ave	49.4	+0.0				+0.0	49.4	54.0 5290, 16dBm, MCS7	-4.6	Horiz
^	5350.000M	69.4	+0.0				+0.0	69.4	74.0 5290, 16dBm, MCS7	-4.6	Horiz
4	5150.000M Ave	39.7	+0.0				+0.0	39.7	54.0 5290, 16dBm, MCS7	-14.3	Horiz
^	5150.000M	53.0	+0.0				+0.0	53.0	74.0 5290, 16dBm, MCS7	-21.0	Horiz

15.207 AC Conducted Emissions

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **106407** Date: 1/19/2022
 Test Type: **Conducted Emissions** Time: 09:15:02
 Tested By: M. Harrison Sequence#: 60
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 150k-30 MHz Setup: Antenna 0 Channels: 5260, 5280, 5320 MHz 802.11a Band 2 Rate: 6-54Mbps PWR Output: Low/Mid: 20 dBm, High: 19dBm 100% Duty Cycle Notes:
--

Nalloy, LLC W/O#: 106121 Sequence#: 60 Date: 1/19/2022
15.207 AC Mains - Average Test Lead: 120V 60Hz Line

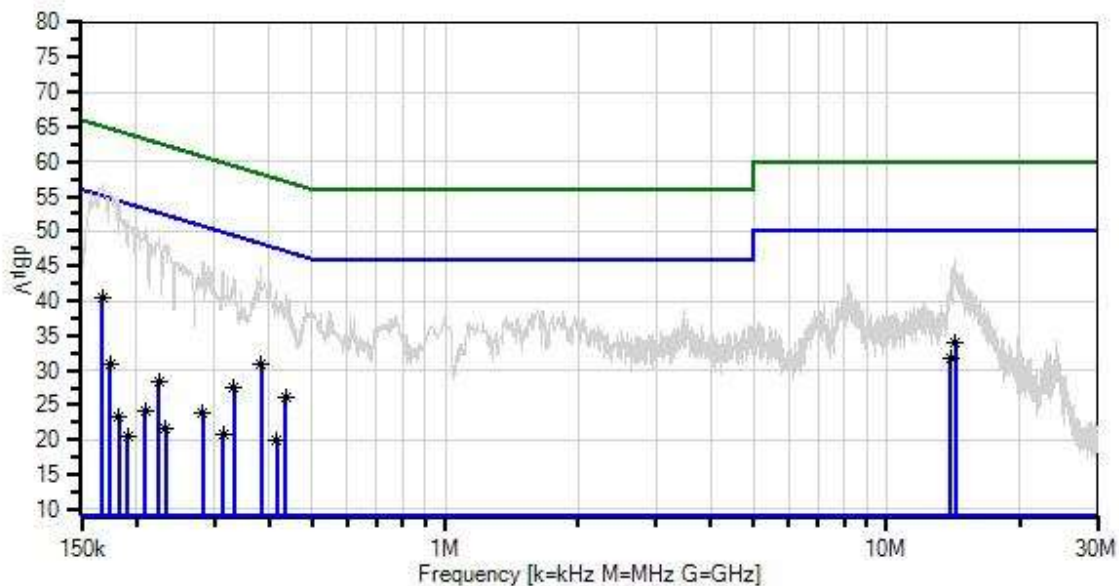

— Sweep Data
× QP Readings
Software Version: 5.03.20
— Readings
* Average Readings
— 1 - 15.207 AC Mains - Average
○ Peak Readings
▼ Ambient
— 2 - 15.207 AC Mains - Quasi-peak

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06219	Attenuator	768-10	4/7/2020	4/7/2022
T2	ANP06011	Cable	Heliac	8/7/2020	8/7/2022
T3	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T4	AN01311	50uH LISN-Line1 (L)	3816/2	2/24/2020	2/24/2022
	AN01311	50uH LISN-Line2 (N)	3816/2	2/24/2020	2/24/2022
T5	AN02611	High Pass Filter	HE9615-150K-50-720B	1/5/2022	1/5/2024
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023

Measurement Data:			Reading listed by margin.					Test Lead: Line			
#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV	dBμV	dB	Ant
1	167.452k	29.3	+9.1	+0.0	+0.0	+1.6	+0.0	40.3	55.1	-14.8	Line
	Ave		+0.3								
^	167.451k	45.7	+9.1	+0.0	+0.0	+1.6	+0.0	56.7	55.1	+1.6	Line
			+0.3								
3	14.337M	24.0	+9.1	+0.0	+0.2	+0.6	+0.0	33.9	50.0	-16.1	Line
	Ave		+0.0								
^	14.337M	36.2	+9.1	+0.0	+0.2	+0.6	+0.0	46.1	50.0	-3.9	Line
			+0.0								
5	382.705k	21.1	+9.1	+0.0	+0.0	+0.5	+0.0	30.8	48.2	-17.4	Line
	Ave		+0.1								
^	382.704k	35.3	+9.1	+0.0	+0.0	+0.5	+0.0	45.0	48.2	-3.2	Line
			+0.1								
7	13.968M	21.9	+9.1	+0.0	+0.2	+0.6	+0.0	31.8	50.0	-18.2	Line
	Ave		+0.0								
^	13.968M	34.6	+9.1	+0.0	+0.2	+0.6	+0.0	44.5	50.0	-5.5	Line
			+0.0								
9	435.791k	16.3	+9.1	+0.0	+0.0	+0.5	+0.0	26.0	47.1	-21.1	Line
	Ave		+0.1								
^	435.790k	31.3	+9.1	+0.0	+0.0	+0.5	+0.0	41.0	47.1	-6.1	Line
			+0.1								
11	333.255k	17.9	+9.1	+0.0	+0.0	+0.6	+0.0	27.6	49.4	-21.8	Line
	Ave		+0.0								
^	333.254k	33.7	+9.1	+0.0	+0.0	+0.6	+0.0	43.4	49.4	-6.0	Line
			+0.0								
13	173.997k	20.0	+9.1	+0.0	+0.0	+1.5	+0.0	30.9	54.8	-23.9	Line
	Ave		+0.3								
^	173.996k	44.7	+9.1	+0.0	+0.0	+1.5	+0.0	55.6	54.8	+0.8	Line
			+0.3								
15	224.901k	18.1	+9.1	+0.0	+0.0	+1.0	+0.0	28.3	52.6	-24.3	Line
	Ave		+0.1								
^	224.901k	38.9	+9.1	+0.0	+0.0	+1.0	+0.0	49.1	52.6	-3.5	Line
			+0.1								
17	283.078k	14.1	+9.1	+0.0	+0.0	+0.8	+0.0	24.0	50.7	-26.7	Line
	Ave		+0.0								
^	283.077k	36.0	+9.1	+0.0	+0.0	+0.8	+0.0	45.9	50.7	-4.8	Line
			+0.0								
19	415.429k	10.2	+9.1	+0.0	+0.0	+0.5	+0.0	19.9	47.5	-27.6	Line
	Ave		+0.1								
^	415.429k	31.9	+9.1	+0.0	+0.0	+0.5	+0.0	41.6	47.5	-5.9	Line
			+0.1								
21	313.620k	11.1	+9.1	+0.0	+0.0	+0.7	+0.0	20.9	49.9	-29.0	Line
	Ave		+0.0								
^	313.620k	34.4	+9.1	+0.0	+0.0	+0.7	+0.0	44.2	49.9	-5.7	Line
			+0.0								
23	209.630k	13.8	+9.1	+0.0	+0.0	+1.1	+0.0	24.1	53.2	-29.1	Line
	Ave		+0.1								

^	209.629k	40.2	+9.1 +0.1	+0.0	+0.0	+1.1	+0.0	50.5	53.2	-2.7	Line
25	232.900k Ave	11.5	+9.1 +0.1	+0.0	+0.0	+1.0	+0.0	21.7	52.3	-30.6	Line
^	232.900k	37.9	+9.1 +0.1	+0.0	+0.0	+1.0	+0.0	48.1	52.3	-4.2	Line
27	181.996k Ave	12.4	+9.1 +0.3	+0.0	+0.0	+1.4	+0.0	23.2	54.4	-31.2	Line
^	181.996k	43.8	+9.1 +0.3	+0.0	+0.0	+1.4	+0.0	54.6	54.4	+0.2	Line
29	191.450k Ave	10.1	+9.1 +0.1	+0.0	+0.0	+1.3	+0.0	20.6	54.0	-33.4	Line
^	191.449k	40.8	+9.1 +0.1	+0.0	+0.0	+1.3	+0.0	51.3	54.0	-2.7	Line



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA 98021 • 1-800-500-4EMC (4362)
 Customer: **Nalloy, LLC**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **106407** Date: 1/19/2022
 Test Type: **Conducted Emissions** Time: 09:03:25
 Tested By: M. Harrison Sequence#: 59
 Software: EMITest 5.03.20 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 45% Pressure: 101.2kPa Method: ANSI C63.10: 2013 Frequency range: 150k-30 MHz Setup: Antenna 0 Channels: 5260, 5280, 5320 MHz 802.11a Band 2 Rate: 6-54Mbps PWR Output: Low/Mid: 20 dBm, High: 19dBm 100% Duty Cycle Notes:
--

Nalloy, LLC WO#: 106121 Sequence#: 59 Date: 1/19/2022
15.207 AC Mains - Average Test Lead: 120V 60Hz Neutral

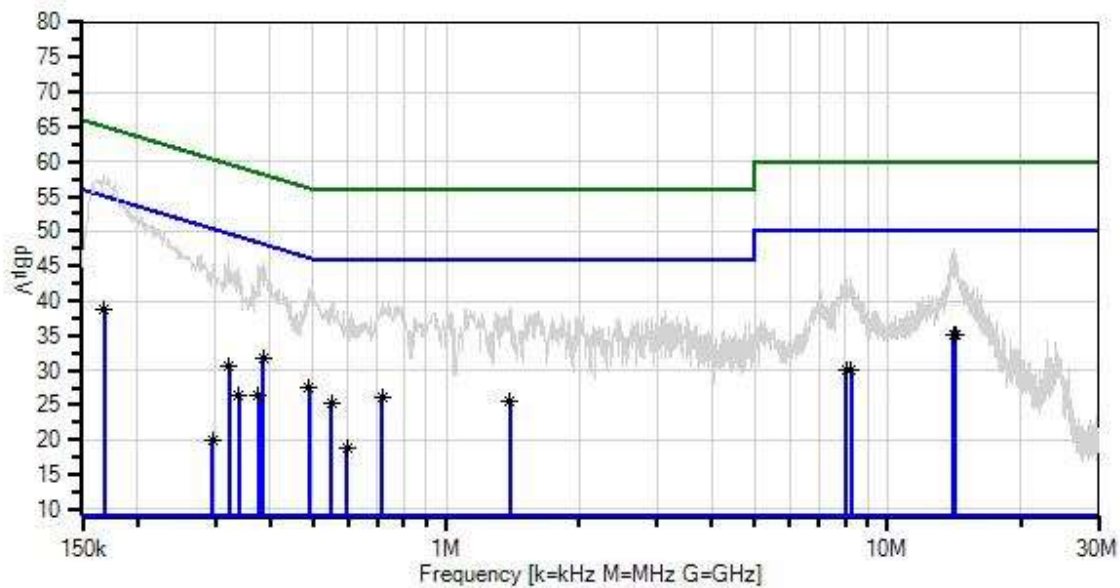

— Sweep Data
× QP Readings
Software Version: 5.03.20
— Readings
* Average Readings
— 1 - 15.207 AC Mains - Average
○ Peak Readings
▼ Ambient
— 2 - 15.207 AC Mains - Quasi-peak

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06219	Attenuator	768-10	4/7/2020	4/7/2022
T2	ANP06011	Cable	Heliac	8/7/2020	8/7/2022
T3	ANP06515	Cable	Heliac	7/1/2020	7/1/2022
T4	AN01311	50uH LISN-Line1 (L)	3816/2	2/24/2020	2/24/2022
	AN01311	50uH LISN-Line2 (N)	3816/2	2/24/2020	2/24/2022
T5	AN02611	High Pass Filter	HE9615-150K-50-720B	1/5/2022	1/5/2024
	AN02673	Spectrum Analyzer	E4446A	2/3/2021	2/3/2023

Measurement Data:

Reading listed by margin.

Test Lead: Neutral

#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	14.130M	25.3	+9.1 +0.0	+0.0	+0.2	+0.6	+0.0	35.2	50.0	-14.8	Neutr
^	14.130M	37.5	+9.1 +0.0	+0.0	+0.2	+0.6	+0.0	47.4	50.0	-2.6	Neutr
3	14.256M	25.3	+9.1 +0.0	+0.0	+0.2	+0.6	+0.0	35.2	50.0	-14.8	Neutr
^	14.256M	36.7	+9.1 +0.0	+0.0	+0.2	+0.6	+0.0	46.6	50.0	-3.4	Neutr
5	168.180k	27.8	+9.1 +0.3	+0.0	+0.0	+1.5	+0.0	38.7	55.0	-16.3	Neutr
^	168.180k	47.3	+9.1 +0.3	+0.0	+0.0	+1.5	+0.0	58.2	55.0	+3.2	Neutr
7	384.888k	21.9	+9.1 +0.1	+0.0	+0.0	+0.5	+0.0	31.6	48.2	-16.6	Neutr
^	384.887k	35.9	+9.1 +0.1	+0.0	+0.0	+0.5	+0.0	45.6	48.2	-2.6	Neutr
9	490.332k	18.0	+9.1 +0.1	+0.0	+0.0	+0.4	+0.0	27.6	46.2	-18.6	Neutr
^	490.332k	32.2	+9.1 +0.1	+0.0	+0.0	+0.4	+0.0	41.8	46.2	-4.4	Neutr
11	321.621k	21.0	+9.1 +0.0	+0.0	+0.0	+0.6	+0.0	30.7	49.7	-19.0	Neutr
^	321.620k	37.0	+9.1 +0.0	+0.0	+0.0	+0.6	+0.0	46.7	49.7	-3.0	Neutr
13	8.058M	20.5	+9.1 +0.0	+0.0	+0.1	+0.4	+0.0	30.1	50.0	-19.9	Neutr
^	8.058M	33.5	+9.1 +0.0	+0.0	+0.1	+0.4	+0.0	43.1	50.0	-6.9	Neutr
15	8.265M	20.3	+9.1 +0.0	+0.0	+0.1	+0.5	+0.0	30.0	50.0	-20.0	Neutr
^	8.265M	33.6	+9.1 +0.0	+0.0	+0.1	+0.5	+0.0	43.3	50.0	-6.7	Neutr
17	716.493k	16.4	+9.1 +0.2	+0.0	+0.0	+0.3	+0.0	26.0	46.0	-20.0	Neutr
^	716.493k	30.4	+9.1 +0.2	+0.0	+0.0	+0.3	+0.0	40.0	46.0	-6.0	Neutr
19	1.396M	15.9	+9.1 +0.1	+0.0	+0.0	+0.3	+0.0	25.4	46.0	-20.6	Neutr
^	1.396M	29.6	+9.1 +0.1	+0.0	+0.0	+0.3	+0.0	39.1	46.0	-6.9	Neutr
21	549.963k	15.6	+9.1 +0.1	+0.0	+0.0	+0.4	+0.0	25.2	46.0	-20.8	Neutr
^	549.963k	30.0	+9.1 +0.1	+0.0	+0.0	+0.4	+0.0	39.6	46.0	-6.4	Neutr
23	375.434k	16.6	+9.1 +0.1	+0.0	+0.0	+0.6	+0.0	26.4	48.4	-22.0	Neutr

^	375.433k	35.1	+9.1 +0.1	+0.0	+0.0	+0.6	+0.0	44.9	48.4	-3.5	Neutr
25	339.074k	16.6	+9.1 +0.0	+0.0	+0.0	+0.6	+0.0	26.3	49.2	-22.9	Neutr
Ave											
^	339.073k	34.9	+9.1 +0.0	+0.0	+0.0	+0.6	+0.0	44.6	49.2	-4.6	Neutr
27	595.777k	9.4	+9.1 +0.1	+0.0	+0.0	+0.4	+0.0	19.0	46.0	-27.0	Neutr
Ave											
^	595.777k	29.9	+9.1 +0.1	+0.0	+0.0	+0.4	+0.0	39.5	46.0	-6.5	Neutr
29	296.168k	10.2	+9.1 +0.0	+0.0	+0.0	+0.7	+0.0	20.0	50.3	-30.3	Neutr
Ave											
^	296.168k	35.4	+9.1 +0.0	+0.0	+0.0	+0.7	+0.0	45.2	50.3	-5.1	Neutr

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS		
	Meter reading	($\text{dB}\mu\text{V}$)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	($\text{dB}\mu\text{V}/\text{m}$)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point, the measuring device is set into the linear mode and the scan time is reduced.