



SAR EVALUATION REPORT

Applicant Name:

LG Electronics U.S.A., Inc.
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

09/24/18 - 10/10/18

Test Site/Location:

PCTEST Lab, Columbia, MD, USA

Document Serial No.:

1M1809240182-03-R1.ZNF

FCC ID:

ZNFX220PM

APPLICANT:

LG ELECTRONICS U.S.A., INC.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model:

LM-X220PM

Additional Model(s):


LMX220PM, X220PM

Equipment Class	Band & Mode	Tx Frequency	SAR		
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.83	0.77	0.77
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	0.31	0.41	0.41
PCE	UMTS 850	826.40 - 846.60 MHz	0.62	0.70	0.70
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.40	0.56	0.65
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.59	0.65	0.65
PCE	CDMA/EVDO BC10 (\$90S)	817.90 - 823.10 MHz	0.64	0.74	0.75
PCE	CDMA/EVDO BC0 (\$22H)	824.70 - 848.31 MHz	0.66	0.74	0.73
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.76	0.79	0.83
PCE	LTE Band 12	699.7 - 715.3 MHz	0.45	0.54	0.55
PCE	LTE Band 13	779.5 - 784.5 MHz	0.60	0.85	0.85
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.74	0.80	0.80
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A	N/A	N/A
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	0.43	0.69	0.75
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.80	0.88	0.89
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A
PCE	LTE Band 41	2498.5 - 2687.5 MHz	0.58	0.69	0.69
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.87	0.40	0.40
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.40	N/A	N/A
Simultaneous SAR per KDB 690783 D01v01r03:			1.53	1.28	1.28

Note: This revised Test Report (S/N: 1M1809240182-03-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.7 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.


Randy Ortanez
President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 1 of 84

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	10
3	INTRODUCTION	11
4	DOSIMETRIC ASSESSMENT	12
5	DEFINITION OF REFERENCE POINTS	13
6	TEST CONFIGURATION POSITIONS	14
7	RF EXPOSURE LIMITS	17
8	FCC MEASUREMENT PROCEDURES.....	18
9	RF CONDUCTED POWERS	25
10	SYSTEM VERIFICATION.....	49
11	SAR DATA SUMMARY	52
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	68
13	SAR MEASUREMENT VARIABILITY	76
14	ADDITIONAL TESTING PER FCC GUIDANCE	77
15	EQUIPMENT LIST	80
16	MEASUREMENT UNCERTAINTIES.....	81
17	CONCLUSION	82
18	REFERENCES	83

APPENDIX A: SAR TEST PLOTS

APPENDIX B: SAR DIPOLE VERIFICATION PLOTS

APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES



APPENDIX D: SAR TISSUE SPECIFICATIONS

APPENDIX E: SAR SYSTEM VALIDATION

APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS

APPENDIX G: POWER REDUCTION VERIFICATION

APPENDIX H: DOWNLINK LTE CA RF CONDUCTED POWERS

FCC ID: ZNFX220PM	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 2 of 84	

1 DEVICE UNDER TEST

1.1 Device Overview



Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
CDMA/EVDO BC10 (\$90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (\$22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
Bluetooth	Data	2402 - 2480 MHz

1.2 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

FCC ID: ZNFX220PM	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 3 of 84



1.3.1

Maximum Output Power

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slot	1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GSM/GPRS/EDGE 850	Maximum	32.7	32.7	31.7	27.7	26.7
	Nominal	32.2	32.2	31.2	27.2	26.2
GSM/GPRS/EDGE 1900	Maximum	29.7	29.7	28.7	26.7	25.7
	Nominal	29.2	29.2	28.2	26.2	25.2



Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	24.2	24.2	24.2
	Nominal	23.7	23.7	23.7
UMTS Band 4 (1750 MHz)	Maximum	23.2	23.2	23.2
	Nominal	22.7	22.7	22.7
UMTS Band 2 (1900 MHz)	Maximum	23.2	23.2	23.2
	Nominal	22.7	22.7	22.7

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	24.7
	Nominal	24.2
CDMA/EVDO BC0 (§22H)	Maximum	24.7
	Nominal	24.2
PCS CDMA/EVDO	Maximum	24.7
	Nominal	24.2

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 4 of 84

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	24.7
	Nominal	24.2
LTE Band 13	Maximum	24.7
	Nominal	24.2
LTE Band 26 (Cell)	Maximum	24.7
	Nominal	24.2
LTE Band 5 (Cell)	Maximum	24.7
	Nominal	24.2
LTE Band 4 (AWS)	Maximum	23.7
	Nominal	23.2
LTE Band 25 (PCS)	Maximum	24.5
	Nominal	24.0
LTE Band 2 (PCS)	Maximum	24.2
	Nominal	23.7
LTE Band 41 (PC3)	Maximum	24.7
	Nominal	24.2
LTE Band 41 (PC2)	Maximum	27.7
	Nominal	27.2

Mode / Band		Modulated Average - Single Tx Chain (dBm)			
Channel		1	2-3	4-10	11
IEEE 802.11b (2.4 GHz)	Maximum	16.5	16.5	17.0	17.0
	Nominal	15.5	15.5	16.0	16.0
IEEE 802.11g (2.4 GHz)	Maximum	13.5	15.5	16.5	13.0
	Nominal	12.5	14.5	15.5	12.0
IEEE 802.11n (2.4 GHz)	Maximum	13.5	15.5	16.0	13.0
	Nominal	12.5	14.5	15.0	12.0

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 5 of 84

Mode/Band		Modulated Average (dBm)
Bluetooth	Maximum	12.0
	Nominal	11.0
Bluetooth LE	Maximum	3.5
	Nominal	2.5

1.3.2 Reduced Output Power

Mode / Band		Modulated Average (dBm)			
Channel		1	2-3	4-10	11
IEEE 802.11b (2.4 GHz)	Maximum	13.5	14.0	14.5	13.5
	Nominal	12.5	13.0	13.5	12.5
IEEE 802.11g (2.4 GHz)	Maximum	13.5	14.0	14.5	13.0
	Nominal	12.5	13.0	13.5	12.0
IEEE 802.11n (2.4 GHz)	Maximum	13.5	14.0	14.5	13.0
	Nominal	12.5	13.0	13.5	12.0



1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. The overall diagonal dimension of the device is ≤160 mm and the diagonal display is ≤150 mm. A diagram showing the location of the device antennas can be found in Appendix F.

**Table 1-1
Device Edges/Sides for SAR Testing**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
EVDO BC10 (§90S)	Yes	Yes	No	Yes	Yes	Yes
EVDO BC0 (§22H)	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	No	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 41	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for wireless router SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III. The distances between the transmit antennas and the edges of the device are included in the filing.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 			Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 6 of 84

1.5 Simultaneous Transmission Capabilities



According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	
2	1x CDMA voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	^ Bluetooth Tethering is considered
3	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	
4	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	^ Bluetooth Tethering is considered
5	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
6	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
7	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
8	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^ Bluetooth Tethering is considered
9	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	* Pre-installed VOIP applications are considered
10	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes*^	Yes*	Yes^	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
11	GPRS/EDGE + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	* Pre-installed VOIP applications are considered
12	GPRS/EDGE + 2.4 GHz Bluetooth	Yes*^	Yes*	Yes^	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered

- 2.4 GHz WLAN, and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WIFI are included in the above table.
- This device supports VOLTE.
- This device supports VoWIFI.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 7 of 84

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body Bluetooth SAR was not required; $[(16/10) * \sqrt{2.480}] = 2.5 < 3.0$. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.



LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in Appendix H.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.1).



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 8 of 84

1.7 Guidance Applied



- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE Band 41 Power Class 2/3)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 9 of 84

LTE Information					
FCC ID	ZNFX220PM				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
Channel Bandwidths	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	6				
Modulations Supported in UL	QPSK, 16QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 11. It supports a maximum of 2 carriers in the downlink. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 10 of 84	

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 11 of 84

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.






Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 12 of 84

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view
of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

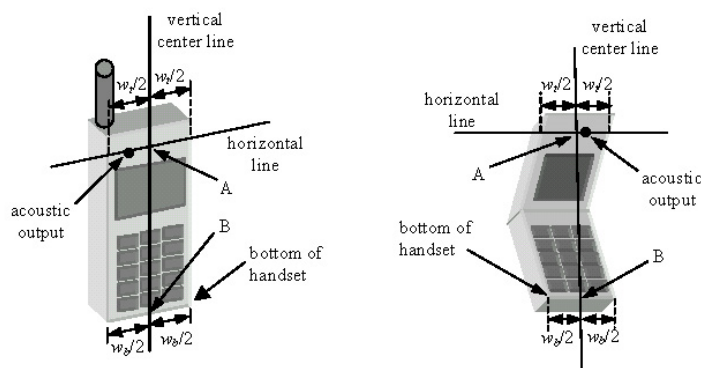




Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 13 of 84

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.





Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 14 of 84

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations



Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 16 of 84

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 17 of 84

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”



The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 18 of 84

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH₀ and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH₀ data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

Table 8-1
Parameters for Max. Power for RC1

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 8-2
Parameters for Max. Power for RC3

Parameter	Units	Value
I_{or}	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

8.4.3 Body-worn SAR Measurements



SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH_n), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH_n), with FCH at full rate and SCH₀ enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 19 of 84

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.



8.5 SAR Measurement Conditions for UMTS

8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 20 of 84

8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.6.1 Spectrum Plots for RB Configurations



A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 21 of 84

8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.6.5 TDD



LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 22 of 84

8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.7.2 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

8.7.3 2.4 GHz SAR Test Requirements



SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.7.4 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 23 of 84



8.7.5 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.4).

8.7.6 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 	Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset
		Page 24 of 84

9 RF CONDUCTED POWERS

9.1 CDMA Conducted Powers



Table 9-1
Maximum Conducted Power

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	24.25	24.67	24.66	24.03	24.68	24.56	24.61
Cellular	1013	22H	824.7	24.53	24.69	24.68	24.06	24.69	24.57	24.62
	384	22H	836.52	24.29	24.70	24.67	24.08	24.69	24.56	24.61
	777	22H	848.31	24.46	24.68	24.64	24.03	24.70	24.59	24.56
PCS	25	24E	1851.25	24.39	24.66	24.69	24.36	24.70	24.57	24.59
	600	24E	1880	24.38	24.68	24.70	24.32	24.69	24.56	24.54
	1175	24E	1908.75	24.37	24.44	24.48	24.21	24.64	24.40	24.51

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.



Figure 9-1
Power Measurement Setup

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 25 of 84



9.2 GSM Conducted Powers

Table 9-2
Maximum Conducted Power

Maximum Burst-Averaged Output Power						
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	32.43	32.43	31.69	27.47	25.89
	190	32.47	32.45	31.70	27.52	26.14
	251	32.25	32.25	31.57	27.52	26.18
GSM 1900	512	29.49	29.41	28.68	26.70	25.56
	661	29.47	29.50	28.70	26.69	25.66
	810	29.45	29.46	28.69	26.68	25.57

Calculated Maximum Frame-Averaged Output Power						
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	23.40	23.40	25.67	18.44	19.87
	190	23.44	23.42	25.68	18.49	20.12
	251	23.22	23.22	25.55	18.49	20.16
GSM 1900	512	20.46	20.38	22.66	17.67	19.54
	661	20.44	20.47	22.68	17.66	19.64
	810	20.42	20.43	22.67	17.65	19.55

GSM 850	Frame Avg. Targets:	23.17	23.17	25.18	18.17	20.18
GSM 1900		20.17	20.17	22.18	17.17	19.18

FCC ID: ZNFX220PM			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset			Page 26 of 84

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 10 (Max 2 Tx uplink slots)
EDGE Multislot class: 10 (Max 2 Tx uplink slots)
DTM Multislot Class: N/A






Figure 9-2
Power Measurement Setup

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 27 of 84

9.3 UMTS Conducted Powers

Table 9-3
Maximum Conducted Power

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.02	24.03	24.06	22.84	22.87	22.94	23.18	23.03	23.03	-
99		12.2 kbps AMR	24.01	24.03	24.07	22.84	22.88	22.94	23.18	23.03	23.02	-
6	HSDPA	Subtest 1	24.05	24.07	24.14	22.70	22.68	22.77	23.20	23.08	23.02	0
6		Subtest 2	24.04	24.04	24.15	22.70	22.69	22.73	23.20	23.07	23.02	0
6		Subtest 3	23.69	23.57	23.69	22.14	22.23	22.31	22.87	22.62	22.55	0.5
6		Subtest 4	23.57	23.60	23.63	22.13	22.18	22.27	22.77	22.64	22.60	0.5
6	HSUPA	Subtest 1	22.77	22.73	22.70	21.71	21.72	21.71	21.75	21.70	21.70	0
6		Subtest 2	22.57	22.56	22.48	21.61	21.58	21.65	21.70	21.68	21.65	2
6		Subtest 3	23.55	23.49	23.52	22.61	22.60	22.58	22.59	22.60	22.66	1
6		Subtest 4	22.04	22.00	22.09	21.11	21.14	21.15	21.09	21.12	21.11	2
6		Subtest 5	23.48	23.69	23.46	22.66	22.64	22.66	22.63	22.64	22.66	0

This device does not support DC-HSDPA.






Figure 9-3
Power Measurement Setup

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 28 of 84

9.4 LTE Conducted Powers

9.4.1

LTE Band 12

Table 9-4
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.62	0	0
	1	25	24.54		0
	1	49	24.57		0
	25	0	23.69	0-1	1
	25	12	23.60		1
	25	25	23.61		1
	50	0	23.55		1
16QAM	1	0	23.70	0-1	1
	1	25	23.70		1
	1	49	23.70		1
	25	0	22.64	0-2	2
	25	12	22.65		2
	25	25	22.64		2
	50	0	22.62		2

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-5
LTE Band 12 Conducted Powers - 5 MHz Bandwidth

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.65	24.41	24.63	0	0
	1	12	24.70	24.42	24.70		0
	1	24	24.65	24.36	24.65		0
	12	0	23.62	23.61	23.67	0-1	1
	12	6	23.61	23.55	23.66		1
	12	13	23.58	23.58	23.63		1
	25	0	23.58	23.58	23.59		1
16QAM	1	0	23.64	23.64	23.68	0-1	1
	1	12	23.67	23.64	23.60		1
	1	24	23.68	23.70	23.59		1
	12	0	22.63	22.60	22.61	0-2	2
	12	6	22.60	22.56	22.58		2
	12	13	22.56	22.58	22.57		2
	25	0	22.55	22.57	22.63		2





FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 			Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 29 of 84

Table 9-6
LTE Band 12 Conducted Powers - 3 MHz Bandwidth

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.58	24.49	24.62	0	0
	1	7	24.55	24.41	24.63		0
	1	14	24.53	24.45	24.64		0
	8	0	23.66	23.61	23.70	0-1	1
	8	4	23.69	23.61	23.69		1
	8	7	23.68	23.62	23.70		1
	15	0	23.64	23.59	23.69		1
16QAM	1	0	23.66	23.66	23.64	0-1	1
	1	7	23.63	23.57	23.64		1
	1	14	23.65	23.61	23.63		1
	8	0	22.52	22.61	22.53	0-2	2
	8	4	22.55	22.62	22.56		2
	8	7	22.60	22.64	22.58		2
	15	0	22.61	22.51	22.61		2

Table 9-7
LTE Band 12 Conducted Powers -1.4 MHz Bandwidth

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.47	24.41	24.66	0	0
	1	2	24.35	24.28	24.59		0
	1	5	24.50	24.46	24.64		0
	3	0	24.70	24.51	24.66		0
	3	2	24.68	24.55	24.69		0
	3	3	24.65	24.62	24.68		0
	6	0	23.63	23.48	23.61	0-1	1
16QAM	1	0	23.64	23.55	23.51	0-1	1
	1	2	23.52	23.35	23.34		1
	1	5	23.68	23.60	23.59		1
	3	0	23.66	23.65	23.62		1
	3	2	23.65	23.66	23.66		1
	3	3	23.63	23.66	23.67		1
	6	0	22.56	22.47	22.65	0-2	2

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 30 of 84

9.4.2

LTE Band 13

Table 9-8
LTE Band 13 Conducted Powers - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.70	0	0
	1	25	24.68		0
	1	49	24.61		0
	25	0	23.70	0-1	1
	25	12	23.68		1
	25	25	23.63		1
	50	0	23.68		1
16QAM	1	0	23.70	0-1	1
	1	25	23.69		1
	1	49	23.68		1
	25	0	22.67	0-2	2
	25	12	22.67		2
	25	25	22.67		2
	50	0	22.64		2





FCC ID: ZNFX220PM				Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 31 of 84

Table 9-9
LTE Band 13 Conducted Powers - 5 MHz Bandwidth

LTE Band 13 5 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.62	0	0
	1	12	24.67		0
	1	24	24.65		0
	12	0	23.70	0-1	1
	12	6	23.69		1
	12	13	23.67		1
	25	0	23.67		1
16QAM	1	0	23.70	0-1	1
	1	12	23.67		1
	1	24	23.65		1
	12	0	22.67	0-2	2
	12	6	22.65		2
	12	13	22.64		2
	25	0	22.64		2

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 32 of 84

9.4.3

LTE Band 26 (Cell)

Table 9-10
LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.70	0	0
	1	36	24.68		0
	1	74	24.65		0
	36	0	23.69	0-1	1
	36	18	23.64		1
	36	37	23.68		1
	75	0	23.65		1
16QAM	1	0	23.70	0-1	1
	1	36	23.69		1
	1	74	23.68		1
	36	0	22.61	0-2	2
	36	18	22.61		2
	36	37	22.62		2
	75	0	22.68		2

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-11
LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.61	24.57	24.49	0	0
	1	25	24.56	24.56	24.51		0
	1	49	24.57	24.50	24.50		0
	25	0	23.63	23.66	23.65	0-1	1
	25	12	23.65	23.65	23.60		1
	25	25	23.60	23.61	23.54		1
	50	0	23.63	23.65	23.62		1
16QAM	1	0	23.70	23.70	23.68	0-1	1
	1	25	23.68	23.69	23.64		1
	1	49	23.65	23.63	23.63		1
	25	0	22.66	22.69	22.64	0-2	2
	25	12	22.65	22.69	22.58		2
	25	25	22.63	22.65	22.52		2
	50	0	22.64	22.69	22.63		2



FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 33 of 84

Table 9-12
LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.39	24.39	24.51	0	0
	1	12	24.49	24.49	24.52		0
	1	24	24.41	24.42	24.59		0
	12	0	23.63	23.63	23.63	0-1	1
	12	6	23.66	23.67	23.51		1
	12	13	23.64	23.64	23.49		1
	25	0	23.63	23.64	23.46		1
16QAM	1	0	23.67	23.70	23.66	0-1	1
	1	12	23.70	23.68	23.68		1
	1	24	23.68	23.67	23.66		1
	12	0	22.65	22.67	22.52	0-2	2
	12	6	22.69	22.70	22.52		2
	12	13	22.67	22.68	22.47		2
	25	0	22.64	22.65	22.56		2

Table 9-13
LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.53	24.55	24.46	0	0
	1	7	24.54	24.55	24.47		0
	1	14	24.56	24.52	24.54		0
	8	0	23.68	23.67	23.61	0-1	1
	8	4	23.70	23.70	23.67		1
	8	7	23.67	23.69	23.69		1
	15	0	23.70	23.69	23.63		1
16QAM	1	0	23.69	23.68	23.70	0-1	1
	1	7	23.68	23.70	23.66		1
	1	14	23.66	23.63	23.68		1
	8	0	22.53	22.56	22.52	0-2	2
	8	4	22.61	22.59	22.55		2
	8	7	22.60	22.56	22.57		2
	15	0	22.68	22.66	22.64		2





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 34 of 84

Table 9-14
LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.52	24.51	24.46	0	0
	1	2	24.54	24.55	24.49		0
	1	5	24.53	24.52	24.54		0
	3	0	24.68	24.67	24.61		0
	3	2	24.67	24.70	24.63		0
	3	3	24.66	24.65	24.69		0
	6	0	23.69	23.67	23.63	0-1	1
16QAM	1	0	23.69	23.66	23.70	0-1	1
	1	2	23.68	23.50	23.66		1
	1	5	23.66	23.70	23.68		1
	3	0	23.53	23.70	23.52		1
	3	2	23.59	23.69	23.55		1
	3	3	23.49	23.64	23.57	1	
	6	0	22.68	22.66	22.64	0-2	2

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 35 of 84

9.4.4

LTE Band 4 (AWS)

Table 9-15
LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth

LTE Band 4 (AWS) 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20175 (1732.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.65	0	0
	1	50	23.52		0
	1	99	23.68		0
	50	0	22.70	0-1	1
	50	25	22.62		1
	50	50	22.55		1
	100	0	22.49		1
16QAM	1	0	22.70	0-1	1
	1	50	22.70		1
	1	99	22.70		1
	50	0	21.51	0-2	2
	50	25	21.52		2
	50	50	21.51		2
	100	0	21.46		2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Table 9-16
LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth

LTE Band 4 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20025 (1717.5 MHz)	20175 (1732.5 MHz)	20325 (1747.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.68	23.70	23.69	0	0
	1	36	23.48	23.58	23.70		0
	1	74	23.61	23.64	23.68		0
	36	0	22.61	22.70	22.63	0-1	1
	36	18	22.62	22.64	22.68		1
	36	37	22.63	22.56	22.69		1
	75	0	22.65	22.67	22.70		1
16QAM	1	0	22.70	22.70	22.69	0-1	1
	1	36	22.59	22.70	22.65		1
	1	74	22.62	22.70	22.70		1
	36	0	21.58	21.68	21.65	0-2	2
	36	18	21.55	21.61	21.67		2
	36	37	21.63	21.55	21.63		2
	75	0	21.62	21.63	21.61		2



FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 36 of 84

Table 9-17
LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth

LTE Band 4 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20000 (1715.0 MHz)	20175 (1732.5 MHz)	20350 (1750.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.58	23.63	23.62	0	0
	1	25	23.49	23.55	23.65		0
	1	49	23.52	23.56	23.68		0
	25	0	22.47	22.57	22.55	0-1	1
	25	12	22.49	22.51	22.54		1
	25	25	22.51	22.45	22.46		1
	50	0	22.48	22.52	22.52		1
16QAM	1	0	22.70	22.69	22.70	0-1	1
	1	25	22.68	22.65	22.69		1
	1	49	22.66	22.69	22.64		1
	25	0	21.49	21.55	21.54	0-2	2
	25	12	21.52	21.52	21.59		2
	25	25	21.52	21.48	21.46		2
	50	0	21.52	21.51	21.53		2

Table 9-18
LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth

LTE Band 4 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19975 (1712.5 MHz)	20175 (1732.5 MHz)	20375 (1752.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.54	23.51	23.53	0	0
	1	12	23.61	23.55	23.62		0
	1	24	23.52	23.51	23.53		0
	12	0	22.51	22.55	22.67	0-1	1
	12	6	22.54	22.52	22.62		1
	12	13	22.58	22.51	22.51		1
	25	0	22.53	22.51	22.60		1
16QAM	1	0	22.63	22.70	22.64	0-1	1
	1	12	22.70	22.69	22.70		1
	1	24	22.63	22.67	22.66		1
	12	0	21.46	21.50	21.58	0-2	2
	12	6	21.50	21.46	21.55		2
	12	13	21.52	21.46	21.47		2
	25	0	21.53	21.45	21.54		2





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 37 of 84

Table 9-19
LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth

LTE Band 4 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19965 (1711.5 MHz)	20175 (1732.5 MHz)	20385 (1753.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.47	23.50	23.70	0	0
	1	7	23.45	23.46	23.67		0
	1	14	23.50	23.49	23.64		0
	8	0	22.60	22.58	22.70	0-1	1
	8	4	22.64	22.59	22.69		1
	8	7	22.65	22.61	22.70		1
	15	0	22.57	22.54	22.70		1
16QAM	1	0	22.69	22.56	22.60	0-1	1
	1	7	22.66	22.56	22.58		1
	1	14	22.68	22.57	22.68		1
	8	0	21.56	21.48	21.70	0-2	2
	8	4	21.60	21.50	21.70		2
	8	7	21.62	21.53	21.69		2
	15	0	21.55	21.52	21.68		2

Table 9-20
LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 4 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			19957 (1710.7 MHz)	20175 (1732.5 MHz)	20393 (1754.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.42	23.58	23.52	0	0
	1	2	23.30	23.53	23.41		0
	1	5	23.51	23.61	23.51		0
	3	0	23.54	23.54	23.70		0
	3	2	23.58	23.56	23.68		0
	3	3	23.64	23.61	23.63		0
	6	0	22.51	22.43	22.65	0-1	1
16QAM	1	0	22.55	22.43	22.70	0-1	1
	1	2	22.43	22.27	22.58		1
	1	5	22.62	22.50	22.70		1
	3	0	22.58	22.61	22.54		1
	3	2	22.59	22.63	22.55		1
	3	3	22.60	22.66	22.53	1	
	6	0	21.57	21.56	21.63	0-2	2

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 38 of 84

9.4.5

LTE Band 25 (PCS)

Table 9-21
LTE Band 25 (PCS) Conducted Powers - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.19	24.07	24.17	0	0
	1	50	24.01	23.93	24.04		0
	1	99	24.20	24.08	24.05		0
	50	0	22.95	22.98	23.18	0-1	1
	50	25	22.95	22.97	23.04		1
	50	50	22.94	22.97	23.13		1
	100	0	22.98	22.93	23.04		1
16QAM	1	0	23.15	23.20	23.19	0-1	1
	1	50	23.15	23.19	23.19		1
	1	99	23.15	23.18	23.19		1
	50	0	22.00	22.01	22.14	0-2	2
	50	25	22.00	22.00	22.14		2
	50	50	22.00	22.01	22.13		2
	100	0	21.98	21.95	22.10		2

Table 9-22
LTE Band 25 (PCS) Conducted Powers - 15 MHz Bandwidth

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.30	23.99	24.00	0	0
	1	36	24.13	23.82	23.92		0
	1	74	24.15	23.87	23.98		0
	36	0	23.25	22.92	22.86	0-1	1
	36	18	23.19	22.86	22.83		1
	36	37	23.17	22.85	22.85		1
	75	0	23.23	22.92	22.89		1
16QAM	1	0	23.44	23.50	23.34	0-1	1
	1	36	23.26	23.47	23.30		1
	1	74	23.30	23.49	23.25		1
	36	0	22.20	21.98	21.91	0-2	2
	36	18	22.17	21.92	21.88		2
	36	37	22.15	21.90	21.86		2
	75	0	22.25	21.95	21.87		2



FCC ID: ZNFX220PM			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset			Page 39 of 84

Table 9-23
LTE Band 25 (PCS) Conducted Powers - 10 MHz Bandwidth

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.24	23.92	23.81	0	0
	1	25	24.12	23.86	23.80		0
	1	49	24.07	23.82	23.81		0
	25	0	23.17	22.92	22.86	0-1	1
	25	12	23.17	22.90	22.88		1
	25	25	23.17	22.89	22.74		1
	50	0	23.19	22.93	22.84		1
16QAM	1	0	23.45	23.11	23.49	0-1	1
	1	25	23.37	23.06	23.43		1
	1	49	23.36	23.05	23.36		1
	25	0	22.24	21.99	21.94	0-2	2
	25	12	22.26	21.97	21.93		2
	25	25	22.24	21.97	21.82		2
	50	0	22.22	21.98	21.93		2

Table 9-24
LTE Band 25 (PCS) Conducted Powers - 5 MHz Bandwidth

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.20	23.83	23.68	0	0
	1	12	24.20	23.86	23.76		0
	1	24	24.11	23.81	23.68		0
	12	0	23.16	22.89	22.88	0-1	1
	12	6	23.18	22.86	22.84		1
	12	13	23.18	22.87	22.76		1
	25	0	23.18	22.88	22.83		1
16QAM	1	0	23.31	23.18	22.94	0-1	1
	1	12	23.36	23.22	22.95		1
	1	24	23.27	23.12	22.88		1
	12	0	22.16	21.90	21.90	0-2	2
	12	6	22.16	21.87	21.87		2
	12	13	22.16	21.88	21.79		2
	25	0	22.20	21.88	21.86		2





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 40 of 84

Table 9-25
LTE Band 25 (PCS) Conducted Powers - 3 MHz Bandwidth

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.20	23.82	23.76	0	0
	1	7	24.17	23.78	23.73		0
	1	14	24.14	23.78	23.73		0
	8	0	23.25	22.91	22.87	0-1	1
	8	4	23.26	22.92	22.89		1
	8	7	23.30	22.94	22.89		1
	15	0	23.25	22.90	22.88		1
16QAM	1	0	23.28	23.38	23.07	0-1	1
	1	7	23.28	23.39	23.00		1
	1	14	23.23	23.37	23.01		1
	8	0	22.18	21.99	21.88	0-2	2
	8	4	22.21	22.03	21.91		2
	8	7	22.24	22.06	21.91		2
	15	0	22.26	21.99	21.89		2

Table 9-26
LTE Band 25 (PCS) Conducted Powers -1.4 MHz Bandwidth

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.10	23.85	23.68	0	0
	1	2	23.99	23.74	23.57		0
	1	5	24.15	23.85	23.67		0
	3	0	24.20	23.95	24.03		0
	3	2	24.24	23.96	23.92		0
	3	3	24.31	24.01	23.88		0
	6	0	23.15	22.75	22.74	0-1	1
16QAM	1	0	23.27	22.83	23.06	0-1	1
	1	2	23.13	22.68	22.86		1
	1	5	23.33	22.86	23.07		1
	3	0	23.30	23.08	22.90		1
	3	2	23.29	23.10	22.86		1
	3	3	23.31	23.13	22.85		1
	6	0	22.25	21.95	21.84	0-2	2

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 41 of 84

9.4.6

LTE Band 41

Table 9-27
LTE Band 41 PC3 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.69	24.70	24.56	24.65	24.69	0	0
	1	50	24.62	24.64	24.39	24.64	24.65		0
	1	99	24.64	24.61	24.50	24.60	24.67		0
	50	0	23.65	23.57	23.42	23.58	23.49	0-1	1
	50	25	23.60	23.70	23.41	23.56	23.48		1
	50	50	23.64	23.58	23.41	23.57	23.50		1
	100	0	23.68	23.50	23.37	23.52	23.41		1
16QAM	1	0	23.67	23.69	23.55	23.62	23.69	0-1	1
	1	50	23.68	23.68	23.54	23.64	23.68		1
	1	99	23.68	23.68	23.54	23.64	23.67		1
	50	0	22.69	22.50	22.60	22.54	22.48	0-2	2
	50	25	22.68	22.49	22.58	22.55	22.47		2
	50	50	22.70	22.50	22.59	22.54	22.47		2
	100	0	22.63	22.45	22.55	22.54	22.42		2

Table 9-28
LTE Band 41 PC3 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.64	24.70	24.47	24.46	24.51	0	0
	1	36	24.48	24.59	24.45	24.37	24.39		0
	1	74	24.56	24.55	24.56	24.49	24.43		0
	36	0	23.53	23.70	23.44	23.38	23.41	0-1	1
	36	18	23.58	23.66	23.42	23.36	23.37		1
	36	37	23.64	23.63	23.40	23.36	23.36		1
	75	0	23.59	23.65	23.44	23.38	23.41		1
16QAM	1	0	23.70	23.70	23.54	23.61	23.56	0-1	1
	1	36	23.63	23.65	23.51	23.49	23.45		1
	1	74	23.70	23.60	23.61	23.60	23.53		1
	36	0	22.55	22.65	22.38	22.40	22.42	0-2	2
	36	18	22.58	22.62	22.39	22.42	22.42		2
	36	37	22.66	22.55	22.41	22.40	22.39		2
	75	0	22.62	22.60	22.37	22.43	22.42		2



FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 42 of 84

Table 9-29
LTE Band 41 PC3 Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.56	24.46	24.38	24.38	24.43	0	0
	1	25	24.45	24.30	24.38	24.35	24.37		0
	1	49	24.49	24.27	24.42	24.39	24.38		0
	25	0	23.46	23.34	23.34	23.31	23.33	0-1	1
	25	12	23.54	23.33	23.36	23.30	23.33		1
	25	25	23.61	23.29	23.38	23.29	23.33		1
	50	0	23.51	23.33	23.36	23.31	23.37		1
16QAM	1	0	23.70	23.52	23.44	23.53	23.44	0-1	1
	1	25	23.59	23.38	23.43	23.47	23.45		1
	1	49	23.60	23.33	23.48	23.51	23.46		1
	25	0	22.43	22.22	22.22	22.32	22.29	0-2	2
	25	12	22.48	22.21	22.25	22.31	22.29		2
	25	25	22.57	22.20	22.28	22.29	22.30		2
	50	0	22.58	22.29	22.31	22.45	22.39		2

Table 9-30
LTE Band 41 PC3 Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.45	24.34	24.34	24.32	24.37	0	0
	1	12	24.50	24.38	24.43	24.42	24.45		0
	1	24	24.45	24.26	24.37	24.38	24.38		0
	12	0	23.49	23.31	23.34	23.30	23.32	0-1	1
	12	6	23.53	23.34	23.36	23.34	23.38		1
	12	13	23.59	23.33	23.37	23.34	23.37		1
16QAM	25	0	23.50	23.33	23.38	23.33	23.38	0-1	1
	1	0	23.66	23.44	23.41	23.50	23.43		1
	1	12	23.68	23.44	23.49	23.54	23.50		1
	1	24	23.61	23.32	23.44	23.48	23.49	0-2	1
	12	0	22.52	22.28	22.29	22.39	22.36		2
	12	6	22.58	22.29	22.33	22.40	22.41		2
	12	13	22.62	22.30	22.35	22.40	22.42		2
	25	0	22.48	22.22	22.24	22.37	22.29		2



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 43 of 84

Table 9-31
LTE Band 41 PC2 Conducted Powers - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.62	27.70	27.58	27.62	27.67	0	0
	1	50	27.63	27.60	27.38	27.55	27.58		0
	1	99	27.61	27.61	27.52	27.51	27.63		0
	50	0	26.62	26.63	26.66	26.66	26.56	0-1	1
	50	25	26.69	26.63	26.65	26.66	26.57		1
	50	50	26.70	26.63	26.67	26.67	26.57		1
	100	0	26.65	26.64	26.68	26.69	26.56		1
16QAM	1	0	26.66	26.67	26.65	26.68	26.68	0-1	1
	1	50	26.65	26.61	26.51	26.69	26.67		1
	1	99	26.65	26.62	26.50	26.68	26.66		1
	50	0	25.62	25.58	25.53	25.53	25.59	0-2	2
	50	25	25.63	25.57	25.54	25.52	25.58		2
	50	50	25.62	25.57	25.53	25.53	25.58		2
	100	0	25.67	25.57	25.54	25.70	25.55		2

Table 9-32
LTE Band 41 PC2 Conducted Powers - 15 MHz Bandwidth

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.61	27.70	27.59	27.65	27.55	0	0
	1	36	27.50	27.51	27.56	27.52	27.40		0
	1	74	27.60	27.46	27.67	27.65	27.46		0
	36	0	26.50	26.58	26.55	26.55	26.46	0-1	1
	36	18	26.52	26.53	26.52	26.53	26.41		1
	36	37	26.61	26.49	26.58	26.52	26.46		1
	75	0	26.54	26.52	26.56	26.54	26.46		1
16QAM	1	0	26.69	26.69	26.70	26.63	26.70	0-1	1
	1	36	26.68	26.70	26.70	26.66	26.67		1
	1	74	26.70	26.70	26.70	26.70	26.64		1
	36	0	25.59	25.60	25.58	25.60	25.52	0-2	2
	36	18	25.60	25.53	25.57	25.60	25.49		2
	36	37	25.67	25.50	25.63	25.62	25.53		2
	75	0	25.62	25.55	25.59	25.65	25.54		2





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 44 of 84

Table 9-33
LTE Band 41 PC2 Conducted Powers - 10 MHz Bandwidth

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.59	27.65	27.48	27.61	27.46	0	0
	1	25	27.47	27.52	27.45	27.54	27.41		0
	1	49	27.53	27.46	27.50	27.58	27.41		0
	25	0	26.45	26.54	26.42	26.53	26.39	0-1	1
	25	12	26.54	26.54	26.44	26.54	26.39		1
	25	25	26.62	26.51	26.45	26.51	26.42		1
	50	0	26.53	26.54	26.43	26.54	26.40		1
16QAM	1	0	26.68	26.70	26.62	26.70	26.63	0-1	1
	1	25	26.69	26.65	26.61	26.70	26.68		1
	1	49	26.70	26.61	26.70	26.65	26.61		1
	25	0	25.45	25.45	25.39	25.54	25.39	0-2	2
	25	12	25.51	25.47	25.38	25.53	25.39		2
	25	25	25.62	25.44	25.42	25.55	25.41		2
	50	0	25.62	25.53	25.47	25.62	25.51		2

Table 9-34
LTE Band 41 PC2 Conducted Powers - 5 MHz Bandwidth

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.52	27.55	27.55	27.53	27.40	0	0
	1	12	27.51	27.54	27.58	27.57	27.45		0
	1	24	27.47	27.47	27.56	27.53	27.42		0
	12	0	26.45	26.51	26.51	26.47	26.35	0-1	1
	12	6	26.54	26.52	26.54	26.49	26.42		1
	12	13	26.57	26.52	26.54	26.49	26.40		1
	25	0	26.52	26.51	26.53	26.51	26.39		1
16QAM	1	0	26.70	26.60	26.60	26.60	26.67	0-1	1
	1	12	26.70	26.70	26.65	26.63	26.70		1
	1	24	26.67	26.62	26.62	26.60	26.67		1
	12	0	25.55	25.53	25.58	25.58	25.48	0-2	2
	12	6	25.63	25.57	25.62	25.63	25.52		2
	12	13	25.67	25.56	25.61	25.60	25.52		2
	25	0	25.48	25.44	25.50	25.51	25.39		2

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 45 of 84

9.5 WLAN Conducted Powers

Table 9-35
2.4 GHz WLAN Maximum Average RF Power



2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1		12.69	12.96
2417	2		15.03	15.02
2422	3		15.18	15.16
2427	4	16.52	15.30	15.30
2437	6	16.52	15.82	15.48
2452	9		15.51	15.69
2457	10		15.61	15.29
2462	11	16.28	12.35	12.43

Table 9-36
2.4 GHz WLAN Reduced Average RF Power

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1		12.78	12.93
2417	2		13.28	13.39
2422	3		13.17	13.35
2427	4	13.26	13.01	13.56
2437	6	13.53	13.54	13.86
2452	9		13.94	13.65
2457	10	13.81	13.51	13.81
2462	11		12.74	12.41

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 46 of 84

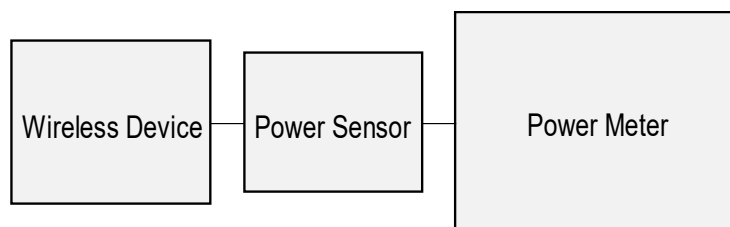





Figure 9-4
Power Measurement Setup

9.6 Bluetooth Conducted Powers

Table 9-37
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	10.47	11.138
2441	1.0	39	11.42	13.859
2480	1.0	78	9.68	9.297
2402	2.0	0	8.23	6.656
2441	2.0	39	9.22	8.364
2480	2.0	78	7.10	5.128
2402	3.0	0	8.35	6.841
2441	3.0	39	9.31	8.528
2480	3.0	78	7.18	5.223

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 47 of 84

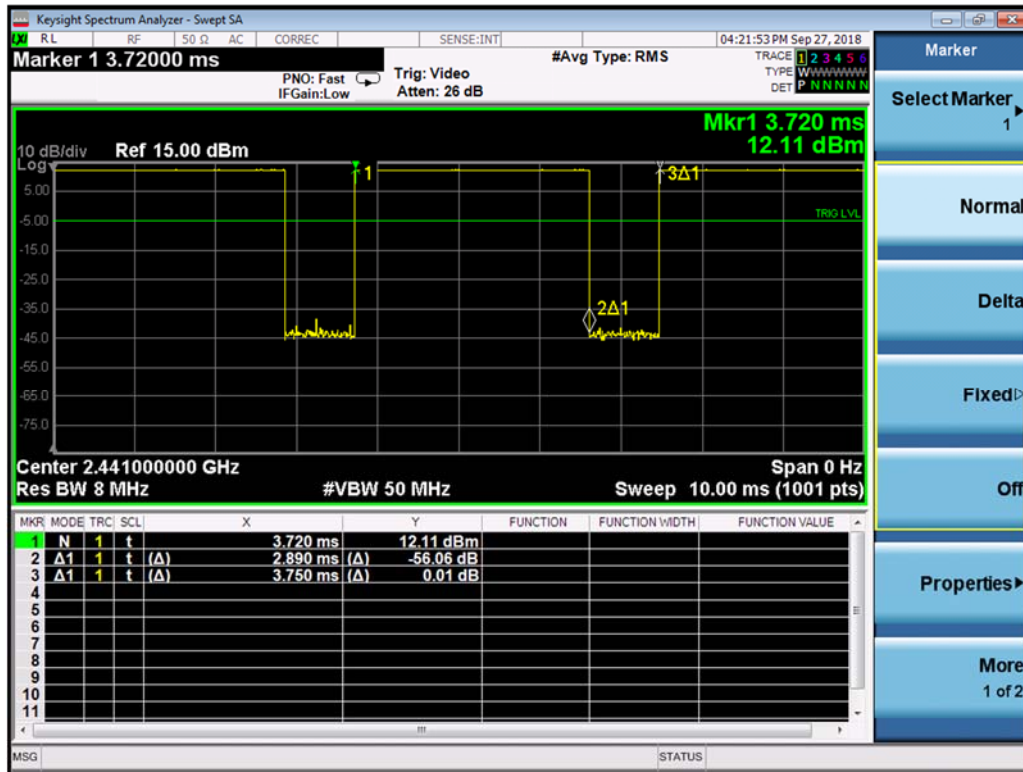

Note: The bolded data rates and channel above were tested for SAR.

Figure 9-5
Bluetooth Transmission Plot

Equation 9-1
Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.89\text{ms}}{3.75\text{ms}} * 100\% = 77.1\%$$

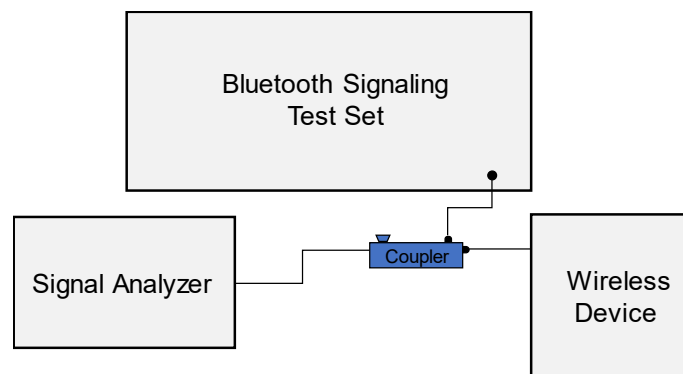


Figure 9-6
Power Measurement Setup

FCC ID: ZNFX220PM				Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 48 of 84

10 SYSTEM VERIFICATION

10.1 Tissue Verification

Table 10-1
Measured Tissue Properties - Head

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
10/1/2018	750H	21.5	700	0.879	42.070	0.889	42.201	-1.12%	-0.31%
			710	0.886	42.108	0.890	42.149	-0.45%	-0.10%
			740	0.902	41.960	0.893	41.994	1.01%	-0.08%
			755	0.905	41.937	0.894	41.916	1.23%	0.05%
			770	0.909	41.847	0.895	41.838	1.56%	0.02%
			785	0.910	41.748	0.896	41.760	1.56%	-0.03%
9/26/2018	835H	22.7	820	0.936	40.716	0.899	41.578	4.12%	-2.07%
			835	0.942	40.706	0.900	41.500	4.67%	-1.91%
			850	0.947	40.596	0.916	41.500	3.38%	-2.18%
9/29/2018	835H	22.3	820	0.912	40.170	0.899	41.578	1.45%	-3.39%
			835	0.920	40.095	0.900	41.500	2.22%	-3.39%
			850	0.928	40.097	0.916	41.500	1.31%	-3.38%
10/8/2018	835H	21.6	820	0.916	42.430	0.899	41.578	1.89%	2.05%
			835	0.925	42.398	0.900	41.500	2.78%	2.16%
			850	0.927	42.372	0.916	41.500	1.20%	2.10%
10/1/2018	1750H	21.5	1710	1.341	39.968	1.348	40.142	-0.52%	-0.43%
			1750	1.365	39.885	1.371	40.079	-0.44%	-0.48%
			1790	1.389	39.871	1.394	40.016	-0.36%	-0.36%
9/26/2018	1900H	21.2	1850	1.418	38.731	1.400	40.000	1.29%	-3.17%
			1880	1.436	38.643	1.400	40.000	2.57%	-3.39%
			1910	1.452	38.631	1.400	40.000	3.71%	-3.42%
10/8/2018	1900H	21.4	1850	1.425	39.148	1.400	40.000	1.79%	-2.13%
			1880	1.441	39.109	1.400	40.000	2.93%	-2.23%
			1910	1.461	39.066	1.400	40.000	4.36%	-2.33%
9/24/2018	2450H	20.4	2400	1.781	38.983	1.756	39.289	1.42%	-0.78%
			2450	1.822	38.889	1.800	39.200	1.22%	-0.79%
			2500	1.862	38.792	1.855	39.136	0.38%	-0.88%
			2500	1.862	38.792	1.855	39.136	0.38%	-0.88%
			2550	1.903	38.688	1.909	39.073	-0.31%	-0.99%
			2600	1.944	38.585	1.964	39.009	-1.02%	-1.09%
9/26/2018	2450H	22.7	2400	1.775	37.953	1.756	39.289	1.08%	-3.40%
			2450	1.819	37.863	1.800	39.200	1.06%	-3.41%
			2500	1.851	37.746	1.855	39.136	-0.22%	-3.55%
			2500	1.851	37.746	1.855	39.136	-0.22%	-3.55%
			2550	1.884	37.732	1.909	39.073	-1.31%	-3.43%
			2600	1.928	37.596	1.964	39.009	-1.83%	-3.62%
			2600	1.928	37.596	1.964	39.009	-1.83%	-3.62%
			2650	1.968	37.543	2.018	38.945	-2.48%	-3.60%
10/1/2018	2450H	21.2	2700	2.002	37.455	2.073	38.882	-3.42%	-3.67%
			2400	1.768	37.815	1.756	39.289	0.68%	-3.75%
			2450	1.807	37.708	1.800	39.200	0.39%	-3.81%
			2500	1.843	37.602	1.855	39.136	-0.65%	-3.92%





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 49 of 84

Table 10-2
Measured Tissue Properties - Body

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
10/2/2018	750B	22.9	700	0.940	55.622	0.959	55.726	-1.98%	-0.19%
			710	0.945	55.571	0.960	55.687	-1.56%	-0.21%
			720	0.952	55.578	0.961	55.648	-0.94%	-0.13%
			725	0.953	55.548	0.961	55.629	-0.83%	-0.15%
			740	0.959	55.544	0.963	55.570	-0.42%	-0.05%
			755	0.960	55.525	0.964	55.512	-0.41%	0.02%
			770	0.968	55.424	0.965	55.453	0.31%	-0.05%
			785	0.974	55.392	0.966	55.395	0.83%	-0.01%
9/26/2018	835B	22.1	800	0.979	55.309	0.967	55.336	1.24%	-0.05%
			820	0.963	53.285	0.969	55.258	-0.62%	-3.57%
			835	0.978	53.062	0.970	55.200	0.82%	-3.87%
10/1/2018	835B	20.0	850	0.993	52.921	0.988	55.154	0.51%	-4.05%
			820	0.968	53.669	0.969	55.258	-0.10%	-2.88%
			835	0.984	53.553	0.970	55.200	1.44%	-2.98%
10/1/2018	1750B	20.4	850	0.996	53.483	0.988	55.154	0.81%	-3.03%
			1710	1.483	51.971	1.463	53.537	1.37%	-2.93%
			1750	1.527	51.819	1.488	53.432	2.62%	-3.02%
9/27/2018	1900B	20.9	1790	1.572	51.673	1.514	53.326	3.83%	-3.10%
			1850	1.514	53.542	1.520	53.300	-0.39%	0.45%
			1880	1.545	53.421	1.520	53.300	1.64%	0.23%
10/10/2018	1900B	22.9	1910	1.581	53.352	1.520	53.300	4.01%	0.10%
			1850	1.509	52.226	1.520	53.300	-0.72%	-2.02%
			1880	1.545	52.096	1.520	53.300	1.64%	-2.26%
10/2/2018	2450B	22.9	1910	1.578	52.035	1.520	53.300	3.82%	-2.37%
			2400	1.910	50.779	1.902	52.767	0.42%	-3.77%
			2450	1.976	50.638	1.950	52.700	1.33%	-3.91%
			2500	2.020	50.522	2.021	52.636	-0.05%	-4.02%
			2500	2.020	50.522	2.021	52.636	-0.05%	-4.02%
			2550	2.091	50.345	2.092	52.573	-0.05%	-4.24%
			2600	2.134	50.295	2.163	52.509	-1.34%	-4.22%
			2600	2.134	50.295	2.163	52.509	-1.34%	-4.22%
10/10/2018	2450B	23.2	2650	2.215	50.014	2.234	52.445	-0.85%	-4.64%
			2700	2.271	49.940	2.305	52.382	-1.48%	-4.66%
			2400	1.966	52.872	1.902	52.767	3.36%	0.20%
			2450	2.021	52.653	1.950	52.700	3.64%	-0.09%
			2500	2.092	52.544	2.021	52.636	3.51%	-0.17%
			2500	2.092	52.544	2.021	52.636	3.51%	-0.17%
			2550	2.150	52.390	2.092	52.573	2.77%	-0.35%
			2600	2.192	52.189	2.163	52.509	1.34%	-0.61%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 50 of 84

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-3
System Verification Results

SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
G	750	HEAD	10/01/2018	21.9	21.5	0.200	1161	7410	1.640	8.170	8.200	0.37%
E	835	HEAD	09/26/2018	24.9	22.5	0.200	4d133	3213	1.970	9.520	9.850	3.47%
E	835	HEAD	09/29/2018	24.1	22.1	0.200	4d133	3213	1.940	9.520	9.700	1.89%
E	835	HEAD	10/08/2018	22.1	21.6	0.200	4d132	3213	1.960	9.360	9.800	4.70%
G	1750	HEAD	10/01/2018	23.5	21.5	0.100	1008	7410	3.700	36.200	37.000	2.21%
G	1900	HEAD	09/26/2018	23.9	22.1	0.100	5d148	7410	4.030	40.100	40.300	0.50%
H	1900	HEAD	10/08/2018	20.5	21.4	0.100	5d148	7409	4.250	40.100	42.500	5.99%
E	2450	HEAD	09/24/2018	20.9	20.4	0.100	797	3213	5.360	52.700	53.600	1.71%
E	2450	HEAD	09/26/2018	24.9	22.5	0.100	797	3213	5.090	52.700	50.900	-3.42%
E	2450	HEAD	10/01/2018	20.1	19.7	0.100	797	3213	5.310	52.700	53.100	0.76%
E	2600	HEAD	09/24/2018	20.9	20.4	0.100	1004	3213	5.930	55.900	59.300	6.08%
H	750	BODY	10/02/2018	21.3	22.9	0.200	1003	7409	1.720	8.580	8.600	0.23%
J	835	BODY	09/26/2018	21.5	22.1	0.200	4d132	3347	2.000	9.710	10.000	2.99%
J	835	BODY	10/01/2018	20.0	20.0	0.200	4d047	3347	1.910	9.570	9.550	-0.21%
H	1750	BODY	10/01/2018	20.7	20.4	0.100	1148	7409	3.930	37.000	39.300	6.22%
H	1900	BODY	09/27/2018	21.1	20.9	0.100	5d149	7409	4.250	40.100	42.500	5.99%
G	1900	BODY	10/10/2018	22.7	21.5	0.100	5d149	7410	4.180	40.100	41.800	4.24%
K	2450	BODY	10/02/2018	22.8	21.6	0.100	719	3319	4.870	50.100	48.700	-2.79%
K	2600	BODY	10/02/2018	22.8	21.6	0.100	1064	3319	5.390	54.700	53.900	-1.46%
K	2600	BODY	10/10/2018	22.8	22.2	0.100	1064	3319	5.590	54.700	55.900	2.19%

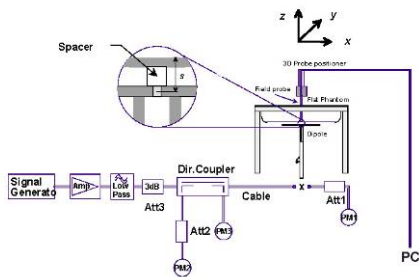




Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 51 of 84

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

Table 11-1
GSM 850 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	32.7	32.47	0.00	Right	Cheek	03153	1	1:8.3	0.487	1.054	0.513	
836.60	190	GSM 850	GSM	32.7	32.47	0.11	Right	Tilt	03153	1	1:8.3	0.272	1.054	0.287	
836.60	190	GSM 850	GSM	32.7	32.47	-0.01	Left	Cheek	03153	1	1:8.3	0.426	1.054	0.449	
836.60	190	GSM 850	GSM	32.7	32.47	-0.02	Left	Tilt	03153	1	1:8.3	0.259	1.054	0.273	
824.20	128	GSM 850	GPRS	31.7	31.69	-0.02	Right	Cheek	03153	2	1:4.15	0.823	1.002	0.825	A1
836.60	190	GSM 850	GPRS	31.7	31.70	-0.07	Right	Cheek	03153	2	1:4.15	0.706	1.000	0.706	
848.80	251	GSM 850	GPRS	31.7	31.57	0.00	Right	Cheek	03153	2	1:4.15	0.617	1.030	0.636	
836.60	190	GSM 850	GPRS	31.7	31.70	0.01	Right	Tilt	03153	2	1:4.15	0.425	1.000	0.425	
836.60	190	GSM 850	GPRS	31.7	31.70	-0.03	Left	Cheek	03153	2	1:4.15	0.616	1.000	0.616	
836.60	190	GSM 850	GPRS	31.7	31.70	0.02	Left	Tilt	03153	2	1:4.15	0.404	1.000	0.404	
824.20	128	GSM 850	GPRS	31.7	31.69	0.00	Right	Cheek	03153	2	1:4.15	0.769	1.002	0.771	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability data

Table 11-2
GSM 1900 Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	29.7	29.47	0.20	Right	Cheek	03153	1	1:8.3	0.111	1.054	0.117	
1880.00	661	GSM 1900	GSM	29.7	29.47	0.02	Right	Tilt	03153	1	1:8.3	0.072	1.054	0.076	
1880.00	661	GSM 1900	GSM	29.7	29.47	0.05	Left	Cheek	03153	1	1:8.3	0.205	1.054	0.216	
1880.00	661	GSM 1900	GSM	29.7	29.47	0.00	Left	Tilt	03153	1	1:8.3	0.078	1.054	0.082	
1880.00	661	GSM 1900	GPRS	28.7	28.70	0.06	Right	Cheek	03153	2	1:4.15	0.166	1.000	0.166	
1880.00	661	GSM 1900	GPRS	28.7	28.70	0.05	Right	Tilt	03153	2	1:4.15	0.115	1.000	0.115	
1880.00	661	GSM 1900	GPRS	28.7	28.70	0.03	Left	Cheek	03153	2	1:4.15	0.311	1.000	0.311	A2
1880.00	661	GSM 1900	GPRS	28.7	28.70	0.15	Left	Tilt	03153	2	1:4.15	0.106	1.000	0.106	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								



FCC ID: ZNFX220PM			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 52 of 84	

Table 11-3
UMTS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
826.40	4132	UMTS 850	RMC	24.2	24.02	-0.07	Right	Cheek	03153	1:1	0.599	1.042	0.624	A3
836.60	4183	UMTS 850	RMC	24.2	24.03	-0.13	Right	Cheek	03153	1:1	0.589	1.040	0.613	
846.60	4233	UMTS 850	RMC	24.2	24.06	-0.03	Right	Cheek	03153	1:1	0.580	1.033	0.599	
836.60	4183	UMTS 850	RMC	24.2	24.03	-0.05	Right	Tilt	03153	1:1	0.343	1.040	0.357	
836.60	4183	UMTS 850	RMC	24.2	24.03	0.01	Left	Cheek	03153	1:1	0.493	1.040	0.513	
836.60	4183	UMTS 850	RMC	24.2	24.03	0.06	Left	Tilt	03153	1:1	0.304	1.040	0.316	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-4
UMTS 1750 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	-0.04	Right	Cheek	03153	1:1	0.293	1.079	0.316	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	0.12	Right	Tilt	03153	1:1	0.086	1.079	0.093	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	-0.13	Left	Cheek	03153	1:1	0.374	1.079	0.404	A4
1732.40	1412	UMTS 1750	RMC	23.2	22.87	0.03	Left	Tilt	03153	1:1	0.137	1.079	0.148	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-5
UMTS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	-0.01	Right	Cheek	03153	1:1	0.295	1.040	0.307	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	0.14	Right	Tilt	03153	1:1	0.211	1.040	0.219	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	0.08	Left	Cheek	03153	1:1	0.571	1.040	0.594	A5
1880.00	9400	UMTS 1900	RMC	23.2	23.03	-0.01	Left	Tilt	03153	1:1	0.203	1.040	0.211	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 53 of 84

Table 11-6
CDMA BC10 (§90S) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	24.7	24.67	-0.02	Right	Cheek	03153	1:1	0.625	1.007	0.629	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	24.7	24.67	0.00	Right	Tilt	03153	1:1	0.362	1.007	0.365	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	24.7	24.67	-0.02	Left	Cheek	03153	1:1	0.505	1.007	0.509	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	24.7	24.67	0.01	Left	Tilt	03153	1:1	0.320	1.007	0.322	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	24.7	24.61	0.01	Right	Cheek	03153	1:1	0.625	1.021	0.638	A6
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	24.7	24.61	0.01	Right	Tilt	03153	1:1	0.366	1.021	0.374	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	24.7	24.61	-0.03	Left	Cheek	03153	1:1	0.470	1.021	0.480	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	24.7	24.61	0.02	Left	Tilt	03153	1:1	0.275	1.021	0.281	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-7
CDMA BC0 (§22H) Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	24.7	24.70	0.00	Right	Cheek	03153	1:1	0.583	1.000	0.583	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	24.7	24.70	0.00	Right	Tilt	03153	1:1	0.327	1.000	0.327	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	24.7	24.70	-0.01	Left	Cheek	03153	1:1	0.530	1.000	0.530	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	24.7	24.70	0.02	Left	Tilt	03153	1:1	0.330	1.000	0.330	
824.70	1013	CDMA BC0 (\$22H)	EVDO Rev. A	24.7	24.62	-0.04	Right	Cheek	03153	1:1	0.649	1.019	0.661	A7
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	24.7	24.61	-0.01	Right	Cheek	03153	1:1	0.607	1.021	0.620	
848.31	777	CDMA BC0 (\$22H)	EVDO Rev. A	24.7	24.56	0.02	Right	Cheek	03153	1:1	0.623	1.033	0.644	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	24.7	24.61	0.00	Right	Tilt	03153	1:1	0.339	1.021	0.346	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	24.7	24.61	0.02	Left	Cheek	03153	1:1	0.515	1.021	0.526	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	24.7	24.61	0.03	Left	Tilt	03153	1:1	0.311	1.021	0.318	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 54 of 84

**Table 11-8
PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.68	-0.04	Right	Cheek	03153	1:1	0.368	1.005	0.370	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.68	0.16	Right	Tilt	03153	1:1	0.209	1.005	0.210	
1851.25	25	PCS CDMA	RC3 / SO55	24.7	24.66	-0.03	Left	Cheek	03153	1:1	0.640	1.009	0.646	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.68	-0.06	Left	Cheek	03153	1:1	0.705	1.005	0.709	
1908.75	1175	PCS CDMA	RC3 / SO55	24.7	24.44	-0.05	Left	Cheek	03153	1:1	0.715	1.062	0.759	A8
1880.00	600	PCS CDMA	RC3 / SO55	24.7	24.68	-0.05	Left	Tilt	03153	1:1	0.260	1.005	0.261	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.54	-0.07	Right	Cheek	03153	1:1	0.339	1.038	0.352	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.54	-0.01	Right	Tilt	03153	1:1	0.274	1.038	0.284	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.54	-0.04	Left	Cheek	03153	1:1	0.630	1.038	0.654	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	24.54	0.05	Left	Tilt	03153	1:1	0.228	1.038	0.237	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-9
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	-0.02	0	Right	Cheek	QPSK	1	0	03179	1:1	0.440	1.019	0.448	A9
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	-0.04	1	Right	Cheek	QPSK	25	0	03179	1:1	0.342	1.002	0.343	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	-0.03	0	Right	Tilt	QPSK	1	0	03179	1:1	0.220	1.019	0.224	
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	-0.05	1	Right	Tilt	QPSK	25	0	03179	1:1	0.171	1.002	0.171	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	-0.04	0	Left	Cheek	QPSK	1	0	03179	1:1	0.360	1.019	0.367	
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	0.02	1	Left	Cheek	QPSK	25	0	03179	1:1	0.281	1.002	0.282	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	0.04	0	Left	Tilt	QPSK	1	0	03179	1:1	0.190	1.019	0.194	
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	-0.01	1	Left	Tilt	QPSK	25	0	03179	1:1	0.156	1.002	0.156	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 55 of 84

Table 11-10
LTE Band 13 Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	-0.03	0	Right	Cheek	QPSK	1	0	03179	1:1	0.599	1.000	0.599	A10
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.01	1	Right	Cheek	QPSK	25	0	03179	1:1	0.484	1.000	0.484	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	0.08	0	Right	Tilt	QPSK	1	0	03179	1:1	0.347	1.000	0.347	
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.01	1	Right	Tilt	QPSK	25	0	03179	1:1	0.268	1.000	0.268	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	-0.01	0	Left	Cheek	QPSK	1	0	03179	1:1	0.435	1.000	0.435	
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.01	1	Left	Cheek	QPSK	25	0	03179	1:1	0.349	1.000	0.349	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	0.06	0	Left	Tilt	QPSK	1	0	03179	1:1	0.285	1.000	0.285	
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.05	1	Left	Tilt	QPSK	25	0	03179	1:1	0.231	1.000	0.231	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-11
LTE Band 26 (Cell) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	0.01	0	Right	Cheek	QPSK	1	0	03179	1:1	0.739	1.000	0.739	A11
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	-0.01	1	Right	Cheek	QPSK	36	0	03179	1:1	0.571	1.002	0.572	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	-0.01	0	Right	Tilt	QPSK	1	0	03179	1:1	0.425	1.000	0.425	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	0.00	1	Right	Tilt	QPSK	36	0	03179	1:1	0.330	1.002	0.331	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	-0.03	0	Left	Cheek	QPSK	1	0	03179	1:1	0.586	1.000	0.586	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	0.00	1	Left	Cheek	QPSK	36	0	03179	1:1	0.499	1.002	0.500	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	0.01	0	Left	Tilt	QPSK	1	0	03179	1:1	0.399	1.000	0.399	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	0.01	1	Left	Tilt	QPSK	36	0	03179	1:1	0.347	1.002	0.348	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-12
LTE Band 4 (AWS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	0.01	0	Right	Cheek	QPSK	1	99	03179	1:1	0.340	1.005	0.342	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.08	1	Right	Cheek	QPSK	50	0	03179	1:1	0.278	1.000	0.278	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	0.03	0	Right	Tilt	QPSK	1	99	03179	1:1	0.189	1.005	0.190	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.11	1	Right	Tilt	QPSK	50	0	03179	1:1	0.178	1.000	0.178	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	0.09	0	Left	Cheek	QPSK	1	99	03179	1:1	0.427	1.005	0.429	A12
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.04	1	Left	Cheek	QPSK	50	0	03179	1:1	0.369	1.000	0.369	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	0.21	0	Left	Tilt	QPSK	1	99	03179	1:1	0.239	1.005	0.240	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.05	1	Left	Tilt	QPSK	50	0	03179	1:1	0.202	1.000	0.202	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 56 of 84

Table 11-13
LTE Band 25 (PCS) Head SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.13	0	Right	Cheek	QPSK	1	99	03179	1:1	0.342	1.072	0.367	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	-0.01	1	Right	Cheek	QPSK	50	0	03179	1:1	0.326	1.076	0.351	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.00	0	Right	Tilt	QPSK	1	99	03179	1:1	0.216	1.072	0.232	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	0.02	1	Right	Tilt	QPSK	50	0	03179	1:1	0.197	1.076	0.212	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.08	0	Left	Cheek	QPSK	1	99	03179	1:1	0.667	1.072	0.715	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.08	0.07	0	Left	Cheek	QPSK	1	99	03179	1:1	0.728	1.102	0.802	A13
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.17	0.13	0	Left	Cheek	QPSK	1	0	03179	1:1	0.720	1.079	0.777	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	0.01	1	Left	Cheek	QPSK	50	0	03179	1:1	0.593	1.076	0.638	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.04	0.03	1	Left	Cheek	QPSK	100	0	03179	1:1	0.551	1.112	0.613	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.03	0	Left	Tilt	QPSK	1	99	03179	1:1	0.294	1.072	0.315	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	0.04	1	Left	Tilt	QPSK	50	0	03179	1:1	0.263	1.076	0.283	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak									Head										
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-14
LTE Band 41 Head SAR

MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	-0.05	0	Right	Cheek	QPSK	1	0	03187	1:1.58	0.320	1.000	0.320	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	0.12	1	Right	Cheek	QPSK	50	25	03187	1:1.58	0.234	1.000	0.234	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	0.05	0	Right	Tilt	QPSK	1	0	03187	1:1.58	0.196	1.000	0.196	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	0.04	1	Right	Tilt	QPSK	50	25	03187	1:1.58	0.146	1.000	0.146	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	0.09	0	Left	Cheek	QPSK	1	0	03187	1:1.58	0.462	1.000	0.462	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	0.18	1	Left	Cheek	QPSK	50	25	03187	1:1.58	0.359	1.000	0.359	
Power Class 2	2549.50	40185	Low-Mid	LTE Band 41	20	27.7	27.70	0.02	0	Left	Cheek	QPSK	1	0	03187	1:2.31	0.577	1.000	0.577	A14
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	0.07	0	Left	Tilt	QPSK	1	0	03187	1:1.58	0.115	1.000	0.115	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	0.04	1	Left	Tilt	QPSK	50	25	03187	1:1.58	0.091	1.000	0.091	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 57 of 84

**Table 11-15
DTS Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2457	10	802.11b	DSSS	22	14.5	13.81	0.13	Right	Cheek	03278	1	99.8	0.389	0.325	1.172	1.002	0.382	
2457	10	802.11b	DSSS	22	14.5	13.81	0.02	Right	Tilt	03278	1	99.8	0.381	-	1.172	1.002	-	
2427	4	802.11b	DSSS	22	14.5	13.26	0.15	Left	Cheek	03278	1	99.8	0.734	0.643	1.330	1.002	0.857	
2437	6	802.11b	DSSS	22	14.5	13.53	0.03	Left	Cheek	03278	1	99.8	0.788	0.697	1.250	1.002	0.873	
2457	10	802.11b	DSSS	22	14.5	13.81	0.14	Left	Cheek	03278	1	99.8	0.872	0.739	1.172	1.002	0.868	A15
2457	10	802.11b	DSSS	22	14.5	13.81	-0.02	Left	Tilt	03278	1	99.8	0.551	0.414	1.172	1.002	0.486	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-16
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2441.00	39	Bluetooth	FHSS	12.0	11.42	0.05	Right	Cheek	03260	1	77.1	0.119	1.143	1.297	0.176	
2441.00	39	Bluetooth	FHSS	12.0	11.42	0.09	Right	Tilt	03260	1	77.1	0.108	1.143	1.297	0.160	
2441.00	39	Bluetooth	FHSS	12.0	11.42	0.03	Left	Cheek	03260	1	77.1	0.272	1.143	1.297	0.403	A16
2441.00	39	Bluetooth	FHSS	12.0	11.42	0.03	Left	Tilt	03260	1	77.1	0.160	1.143	1.297	0.237	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 58 of 84

11.2 Standalone Body-Worn SAR Data

Table 11-17
GSM/UMTS/CDMA Body-Worn SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	32.7	32.47	-0.15	10 mm	03161	1	1:8.3	back	0.494	1.054	0.521	
824.20	128	GSM 850	GPRS	31.7	31.69	-0.14	10 mm	03161	2	1:4.15	back	0.767	1.002	0.769	
836.60	190	GSM 850	GPRS	31.7	31.70	-0.11	10 mm	03161	2	1:4.15	back	0.768	1.000	0.768	A17
848.80	251	GSM 850	GPRS	31.7	31.57	-0.12	10 mm	03161	2	1:4.15	back	0.673	1.030	0.693	
1880.00	661	GSM 1900	GSM	29.7	29.47	-0.01	10 mm	03161	1	1:8.3	back	0.229	1.054	0.241	
1880.00	661	GSM 1900	GPRS	28.7	28.70	0.03	10 mm	03161	2	1:4.15	back	0.406	1.000	0.406	A18
826.40	4132	UMTS 850	RMC	24.2	24.02	0.05	10 mm	03161	N/A	1:1	back	0.667	1.042	0.695	A19
836.60	4183	UMTS 850	RMC	24.2	24.03	-0.06	10 mm	03161	N/A	1:1	back	0.631	1.040	0.656	
846.60	4233	UMTS 850	RMC	24.2	24.06	-0.04	10 mm	03161	N/A	1:1	back	0.613	1.033	0.633	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	0.11	10 mm	03187	N/A	1:1	back	0.518	1.079	0.559	A20
1852.40	9262	UMTS 1900	RMC	23.2	23.18	-0.05	10 mm	03153	N/A	1:1	back	0.577	1.005	0.580	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	-0.14	10 mm	03153	N/A	1:1	back	0.623	1.040	0.648	A22
1907.60	9538	UMTS 1900	RMC	23.2	23.03	-0.16	10 mm	03153	N/A	1:1	back	0.619	1.040	0.644	
820.10	564	CDMA BC10 (\$90S)	TDSO / SO32	24.7	24.68	0.02	10 mm	03161	N/A	1:1	back	0.738	1.005	0.742	A23
824.70	1013	CDMA BC0 (\$22H)	TDSO / SO32	24.7	24.69	-0.01	10 mm	03161	N/A	1:1	back	0.736	1.002	0.737	A25
836.52	384	CDMA BC0 (\$22H)	TDSO / SO32	24.7	24.69	-0.02	10 mm	03161	N/A	1:1	back	0.685	1.002	0.686	
848.31	777	CDMA BC0 (\$22H)	TDSO / SO32	24.7	24.70	-0.02	10 mm	03161	N/A	1:1	back	0.669	1.000	0.669	
1851.25	25	PCS CDMA	TDSO / SO32	24.7	24.70	0.00	10 mm	03161	N/A	1:1	back	0.743	1.000	0.743	
1880.00	600	PCS CDMA	TDSO / SO32	24.7	24.69	-0.06	10 mm	03161	N/A	1:1	back	0.784	1.002	0.786	A27
1908.75	1175	PCS CDMA	TDSO / SO32	24.7	24.64	-0.04	10 mm	03161	N/A	1:1	back	0.766	1.014	0.777	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								



FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 59 of 84

Table 11-18
LTE Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)		(W/kg)	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	-0.06	0	03187	QPSK	1	0	10 mm	back	1:1	1.019	0.537	A29
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	-0.05	1	03187	QPSK	25	0	10 mm	back	1:1	1.002	0.408	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	-0.01	0	03187	QPSK	1	0	10 mm	back	1:1	1.000	0.846	A31
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.01	1	03187	QPSK	25	0	10 mm	back	1:1	1.000	0.671	
782.00	23230	Mid	LTE Band 13	10	23.7	23.68	0.02	1	03187	QPSK	50	0	10 mm	back	1:1	1.005	0.669	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	0.00	0	03187	QPSK	1	0	10 mm	back	1:1	1.000	0.837	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	0.00	0	03187	QPSK	1	0	10 mm	back	1:1	1.000	0.795	A32
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	-0.02	1	03187	QPSK	36	0	10 mm	back	1:1	1.002	0.642	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	0.09	0	03187	QPSK	1	99	10 mm	back	1:1	1.005	0.691	A33
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.03	1	03187	QPSK	50	0	10 mm	back	1:1	1.000	0.529	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.00	0	03179	QPSK	1	99	10 mm	back	1:1	1.072	0.843	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.08	0.01	0	03179	QPSK	1	99	10 mm	back	1:1	1.102	0.882	A35
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.17	0.02	0	03179	QPSK	1	0	10 mm	back	1:1	1.079	0.857	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	0.01	1	03179	QPSK	50	0	10 mm	back	1:1	1.076	0.708	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.04	0.02	1	03179	QPSK	100	0	10 mm	back	1:1	1.112	0.698	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									



Note: Blue entry represents variability data

Table 11-19
LTE B41 body-Worn SAR

MEASUREMENT RESULTS																				
Power Class	FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
	MHz	Ch.															(W/kg)		(W/kg)	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	-0.01	0	03179	QPSK	1	0	10 mm	back	1:1.58	0.511	1.000	0.511	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	-0.01	1	03179	QPSK	50	25	10 mm	back	1:1.58	0.386	1.000	0.386	
Power Class 2	2549.50	40185	Low-Mid	LTE Band 41	20	27.7	27.70	-0.06	0	03179	QPSK	1	0	10 mm	back	1:2.31	0.688	1.000	0.688	A37
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram										

Table 11-20
DTS Body-Worn SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	17.0	16.52	-0.09	10 mm	03260	1	back	99.8	0.400	0.356	1.117	1.002	0.398	A39
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 60 of 84

11.3 Standalone Hotspot SAR Data

Table 11-21
GPRS/UMTS/CDMA Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot
MHz	Ch.														
824.20	128	GSM 850	GPRS	31.7	31.69	-0.14	10 mm	03161	2	1:4.15	back	0.767	1.002	0.769	A17
836.60	190	GSM 850	GPRS	31.7	31.70	-0.11	10 mm	03161	2	1:4.15	back	0.768	1.000	0.768	
848.80	251	GSM 850	GPRS	31.7	31.57	-0.12	10 mm	03161	2	1:4.15	back	0.673	1.030	0.693	
836.60	190	GSM 850	GPRS	31.7	31.70	-0.04	10 mm	03161	2	1:4.15	front	0.543	1.000	0.543	
836.60	190	GSM 850	GPRS	31.7	31.70	-0.01	10 mm	03161	2	1:4.15	bottom	0.327	1.000	0.327	
836.60	190	GSM 850	GPRS	31.7	31.70	-0.01	10 mm	03161	2	1:4.15	right	0.642	1.000	0.642	
836.60	190	GSM 850	GPRS	31.7	31.70	0.03	10 mm	03161	2	1:4.15	left	0.316	1.000	0.316	
1880.00	661	GSM 1900	GPRS	28.7	28.70	0.03	10 mm	03161	2	1:4.15	back	0.406	1.000	0.406	A18
1880.00	661	GSM 1900	GPRS	28.7	28.70	0.05	10 mm	03161	2	1:4.15	front	0.382	1.000	0.382	
1880.00	661	GSM 1900	GPRS	28.7	28.70	-0.04	10 mm	03161	2	1:4.15	bottom	0.169	1.000	0.169	
1880.00	661	GSM 1900	GPRS	28.7	28.70	-0.07	10 mm	03161	2	1:4.15	left	0.258	1.000	0.258	
826.40	4132	UMTS 850	RMC	24.2	24.02	0.05	10 mm	03161	N/A	1:1	back	0.667	1.042	0.695	A19
836.60	4183	UMTS 850	RMC	24.2	24.03	-0.06	10 mm	03161	N/A	1:1	back	0.631	1.040	0.656	
846.60	4233	UMTS 850	RMC	24.2	24.06	-0.04	10 mm	03161	N/A	1:1	back	0.613	1.033	0.633	
836.60	4183	UMTS 850	RMC	24.2	24.03	0.02	10 mm	03161	N/A	1:1	front	0.548	1.040	0.570	
836.60	4183	UMTS 850	RMC	24.2	24.03	0.08	10 mm	03161	N/A	1:1	bottom	0.263	1.040	0.274	
836.60	4183	UMTS 850	RMC	24.2	24.03	-0.03	10 mm	03161	N/A	1:1	right	0.528	1.040	0.549	
836.60	4183	UMTS 850	RMC	24.2	24.03	0.02	10 mm	03161	N/A	1:1	left	0.307	1.040	0.319	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	0.11	10 mm	03187	N/A	1:1	back	0.518	1.079	0.559	A21
1712.40	1312	UMTS 1750	RMC	23.2	22.84	0.03	10 mm	03187	N/A	1:1	front	0.594	1.086	0.645	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	0.07	10 mm	03187	N/A	1:1	front	0.571	1.079	0.616	
1752.60	1513	UMTS 1750	RMC	23.2	22.94	-0.06	10 mm	03187	N/A	1:1	front	0.557	1.062	0.592	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	0.00	10 mm	03187	N/A	1:1	bottom	0.409	1.079	0.441	
1732.40	1412	UMTS 1750	RMC	23.2	22.87	0.05	10 mm	03187	N/A	1:1	left	0.380	1.079	0.410	
1852.40	9262	UMTS 1900	RMC	23.2	23.18	-0.05	10 mm	03153	N/A	1:1	back	0.577	1.005	0.580	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	-0.14	10 mm	03153	N/A	1:1	back	0.623	1.040	0.648	A22
1907.60	9538	UMTS 1900	RMC	23.2	23.03	-0.16	10 mm	03153	N/A	1:1	back	0.619	1.040	0.644	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	0.02	10 mm	03153	N/A	1:1	front	0.609	1.040	0.633	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	0.01	10 mm	03153	N/A	1:1	bottom	0.304	1.040	0.316	
1880.00	9400	UMTS 1900	RMC	23.2	23.03	-0.02	10 mm	03153	N/A	1:1	left	0.417	1.040	0.434	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.7	24.56	0.02	10 mm	03161	N/A	1:1	back	0.721	1.033	0.745	A24
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.7	24.56	-0.01	10 mm	03161	N/A	1:1	front	0.615	1.033	0.635	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.7	24.56	-0.03	10 mm	03161	N/A	1:1	bottom	0.216	1.033	0.223	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.7	24.56	-0.02	10 mm	03161	N/A	1:1	right	0.614	1.033	0.634	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	24.7	24.56	-0.05	10 mm	03161	N/A	1:1	left	0.406	1.033	0.419	
824.70	1013	CDMA BC0 (\$22H)	EVDO Rev. 0	24.7	24.57	-0.02	10 mm	03161	N/A	1:1	back	0.708	1.030	0.729	A26
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.7	24.56	-0.01	10 mm	03161	N/A	1:1	back	0.655	1.033	0.677	
848.31	777	CDMA BC0 (\$22H)	EVDO Rev. 0	24.7	24.59	0.00	10 mm	03161	N/A	1:1	back	0.630	1.026	0.646	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.7	24.56	0.03	10 mm	03161	N/A	1:1	front	0.571	1.033	0.590	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.7	24.56	-0.03	10 mm	03161	N/A	1:1	bottom	0.268	1.033	0.277	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.7	24.56	-0.06	10 mm	03161	N/A	1:1	right	0.578	1.033	0.597	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	24.7	24.56	0.00	10 mm	03161	N/A	1:1	left	0.331	1.033	0.342	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.56	-0.14	10 mm	03161	N/A	1:1	back	0.726	1.033	0.750	A28
1851.25	25	PCS CDMA	EVDO Rev. 0	24.7	24.57	-0.01	10 mm	03161	N/A	1:1	front	0.695	1.030	0.716	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.56	-0.11	10 mm	03161	N/A	1:1	front	0.753	1.033	0.778	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.7	24.40	-0.20	10 mm	03161	N/A	1:1	front	0.778	1.072	0.834	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.56	0.04	10 mm	03161	N/A	1:1	bottom	0.373	1.033	0.385	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.7	24.56	0.01	10 mm	03161	N/A	1:1	left	0.556	1.033	0.574	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID: ZNFX220PM			SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset				Page 61 of 84

Table 11-22
LTE Band 12 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	-0.06	0	03187	QPSK	1	0	10 mm	back	1:1	0.527	1.019	0.537	
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	-0.05	1	03187	QPSK	25	0	10 mm	back	1:1	0.407	1.002	0.408	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	-0.01	0	03187	QPSK	1	0	10 mm	front	1:1	0.433	1.019	0.441	
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	0.02	1	03187	QPSK	25	0	10 mm	front	1:1	0.341	1.002	0.342	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	0.01	0	03187	QPSK	1	0	10 mm	bottom	1:1	0.136	1.019	0.139	
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	0.03	1	03187	QPSK	25	0	10 mm	bottom	1:1	0.106	1.002	0.106	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	0.02	0	03187	QPSK	1	0	10 mm	right	1:1	0.542	1.019	0.552	A30
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	-0.04	1	03187	QPSK	25	0	10 mm	right	1:1	0.403	1.002	0.404	
707.50	23095	Mid	LTE Band 12	10	24.7	24.62	0.01	0	03187	QPSK	1	0	10 mm	left	1:1	0.303	1.019	0.309	
707.50	23095	Mid	LTE Band 12	10	23.7	23.69	0.01	1	03187	QPSK	25	0	10 mm	left	1:1	0.226	1.002	0.226	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-23
LTE Band 13 Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	-0.01	0	03187	QPSK	1	0	10 mm	back	1:1	0.846	1.000	0.846	A31
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.01	1	03187	QPSK	25	0	10 mm	back	1:1	0.671	1.000	0.671	
782.00	23230	Mid	LTE Band 13	10	23.7	23.68	0.02	1	03187	QPSK	50	0	10 mm	back	1:1	0.666	1.005	0.669	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	0.02	0	03187	QPSK	1	0	10 mm	front	1:1	0.636	1.000	0.636	
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	-0.01	1	03187	QPSK	25	0	10 mm	front	1:1	0.507	1.000	0.507	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	0.01	0	03187	QPSK	1	0	10 mm	bottom	1:1	0.216	1.000	0.216	
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.02	1	03187	QPSK	25	0	10 mm	bottom	1:1	0.177	1.000	0.177	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	0.00	0	03187	QPSK	1	0	10 mm	right	1:1	0.648	1.000	0.648	
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	0.00	1	03187	QPSK	25	0	10 mm	right	1:1	0.517	1.000	0.517	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	-0.01	0	03187	QPSK	1	0	10 mm	left	1:1	0.473	1.000	0.473	
782.00	23230	Mid	LTE Band 13	10	23.7	23.70	-0.01	1	03187	QPSK	25	0	10 mm	left	1:1	0.377	1.000	0.377	
782.00	23230	Mid	LTE Band 13	10	24.7	24.70	0.00	0	03187	QPSK	1	0	10 mm	back	1:1	0.837	1.000	0.837	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

Note: Blue entry represents variability data



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 62 of 84

Table 11-24
LTE Band 26 (Cell) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	0.00	0	03187	QPSK	1	0	10 mm	back	1:1	0.795	1.000	0.795	A32
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	-0.02	1	03187	QPSK	36	0	10 mm	back	1:1	0.641	1.002	0.642	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	0.00	0	03187	QPSK	1	0	10 mm	front	1:1	0.671	1.000	0.671	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	0.01	1	03187	QPSK	36	0	10 mm	front	1:1	0.542	1.002	0.543	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	-0.07	0	03187	QPSK	1	0	10 mm	bottom	1:1	0.270	1.000	0.270	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	-0.04	1	03187	QPSK	36	0	10 mm	bottom	1:1	0.223	1.002	0.223	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	-0.01	0	03187	QPSK	1	0	10 mm	right	1:1	0.662	1.000	0.662	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	-0.01	1	03187	QPSK	36	0	10 mm	right	1:1	0.536	1.002	0.537	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.7	24.70	-0.01	0	03187	QPSK	1	0	10 mm	left	1:1	0.404	1.000	0.404	
831.50	26865	Mid	LTE Band 26 (Cell)	15	23.7	23.69	-0.02	1	03187	QPSK	36	0	10 mm	left	1:1	0.318	1.002	0.319	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Table 11-25
LTE Band 4 (AWS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	0.09	0	03187	QPSK	1	99	10 mm	back	1:1	0.688	1.005	0.691	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.03	1	03187	QPSK	50	0	10 mm	back	1:1	0.529	1.000	0.529	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	0.00	0	03187	QPSK	1	99	10 mm	front	1:1	0.742	1.005	0.746	A34
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.00	1	03187	QPSK	50	0	10 mm	front	1:1	0.592	1.000	0.592	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	-0.01	0	03187	QPSK	1	99	10 mm	bottom	1:1	0.460	1.005	0.462	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	0.18	1	03187	QPSK	50	0	10 mm	bottom	1:1	0.402	1.000	0.402	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.7	23.68	-0.02	0	03187	QPSK	1	99	10 mm	left	1:1	0.325	1.005	0.327	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.7	22.70	-0.03	1	03187	QPSK	50	0	10 mm	left	1:1	0.263	1.000	0.263	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 63 of 84

Table 11-26
LTE Band 25 (PCS) Hotspot SAR

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.00	0	03179	QPSK	1	99	10 mm	back	1:1	0.786	1.072	0.843	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.08	0.01	0	03179	QPSK	1	99	10 mm	back	1:1	0.800	1.102	0.882	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.17	0.02	0	03179	QPSK	1	0	10 mm	back	1:1	0.794	1.079	0.857	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	0.01	1	03179	QPSK	50	0	10 mm	back	1:1	0.658	1.076	0.708	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.04	0.02	1	03179	QPSK	100	0	10 mm	back	1:1	0.628	1.112	0.698	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.11	0	03179	QPSK	1	99	10 mm	front	1:1	0.826	1.072	0.885	A36
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.08	0.13	0	03179	QPSK	1	99	10 mm	front	1:1	0.763	1.102	0.841	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.17	0.12	0	03179	QPSK	1	0	10 mm	front	1:1	0.773	1.079	0.834	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	0.08	1	03179	QPSK	50	0	10 mm	front	1:1	0.638	1.076	0.686	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.04	0.01	1	03179	QPSK	100	0	10 mm	front	1:1	0.616	1.112	0.685	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.02	0	03179	QPSK	1	99	10 mm	bottom	1:1	0.364	1.072	0.390	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	-0.04	1	03179	QPSK	50	0	10 mm	bottom	1:1	0.319	1.076	0.343	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	-0.01	0	03179	QPSK	1	99	10 mm	left	1:1	0.602	1.072	0.645	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.5	23.18	-0.02	1	03179	QPSK	50	0	10 mm	left	1:1	0.492	1.076	0.529	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.20	0.09	0	03179	QPSK	1	99	10 mm	front	1:1	0.776	1.072	0.832	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represents variability data

Table 11-27
LTE Band 41 Hotspot SAR

MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	-0.01	0	03179	QPSK	1	0	10 mm	back	1:1.58	0.511	1.000	0.511	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	-0.01	1	03179	QPSK	50	25	10 mm	back	1:1.58	0.386	1.000	0.386	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	-0.04	0	03179	QPSK	1	0	10 mm	front	1:1.58	0.551	1.000	0.551	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	-0.16	1	03179	QPSK	50	25	10 mm	front	1:1.58	0.398	1.000	0.398	
Power Class 2	2549.50	40185	Low-Mid	LTE Band 41	20	27.7	27.70	-0.09	0	03179	QPSK	1	0	10 mm	front	1:2.31	0.693	1.000	0.693	A38
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	-0.08	0	03179	QPSK	1	0	10 mm	bottom	1:1.58	0.387	1.000	0.387	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	0.00	1	03179	QPSK	50	25	10 mm	bottom	1:1.58	0.258	1.000	0.258	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.7	24.70	0.03	0	03179	QPSK	1	0	10 mm	left	1:1.58	0.446	1.000	0.446	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.70	-0.13	1	03179	QPSK	50	25	10 mm	left	1:1.58	0.291	1.000	0.291	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 64 of 84

Table 11-28
WLAN Hotspot SAR

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	17.0	16.52	-0.09	10 mm	03260	1	back	99.8	0.400	0.356	1.117	1.002	0.398	A39
2437	6	802.11b	DSSS	22	17.0	16.52	0.02	10 mm	03260	1	front	99.8	0.331	0.256	1.117	1.002	0.287	
2437	6	802.11b	DSSS	22	17.0	16.52	0.11	10 mm	03260	1	top	99.8	0.165	-	1.117	1.002	-	
2437	6	802.11b	DSSS	22	17.0	16.52	-0.05	10 mm	03260	1	right	99.8	0.229	-	1.117	1.002	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										



11.4 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).

GSM Test Notes:

- Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
- Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
- GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 65 of 84

CDMA Notes:



1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.
6. CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.

UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 66 of 84



6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 14 for linearity results.

WLAN Notes:

1. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.3 for more information.
3. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time domain plot and calculation for the duty factor of the device.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 67 of 84

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 12-1
Estimated SAR

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2480	12.00	10	0.336

Note: Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

12.3 Head SAR Simultaneous Transmission Analysis

(*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.





FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 68 of 84

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.825	0.873	See Table Below
	GSM/GPRS 1900	0.311	0.873	1.184
	UMTS 850	0.624	0.873	1.497
	UMTS 1750	0.404	0.873	1.277
	UMTS 1900	0.594	0.873	1.467
	CDMA/EVDO BC10 (\$90S)	0.638	0.873	1.511
	CDMA/EVDO BC0 (\$22H)	0.661	0.873	1.534
	PCS CDMA/EVDO	0.759	0.873	See Table Below
	LTE Band 12	0.448	0.873	1.321
	LTE Band 13	0.599	0.873	1.472
	LTE Band 26 (Cell)	0.739	0.873	See Table Below
	LTE Band 4 (AWS)	0.429	0.873	1.302
	LTE Band 25 (PCS)	0.802	0.873	See Table Below
	LTE Band 41	0.577	0.873	1.450

Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Right Cheek	0.513	0.382	0.895
	Right Tilt	0.287	0.873*	1.160
	Left Cheek	0.449	0.873	1.322
	Left Tilt	0.273	0.486	0.759

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	Right Cheek	0.825	0.382	1.207
	Right Tilt	0.425	0.873*	1.298
	Left Cheek	0.616	0.873	1.489
	Left Tilt	0.404	0.486	0.890

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 69 of 84	

Simult Tx	Configuration	LTE Band 26 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Head SAR	Right Cheek	0.739	0.382	1.121	
	Right Tilt	0.425	0.873*	1.298	
	Left Cheek	0.586	0.873	1.459	
	Left Tilt	0.399	0.486	0.885	
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Head SAR	Right Cheek	0.367	0.382	0.749	N/A
	Right Tilt	0.232	0.873*	1.105	N/A
	Left Cheek	0.802	0.873	See Note 1	0.03
	Left Tilt	0.315	0.486	0.801	N/A
Simult Tx	Configuration	PCS EVDO SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Head SAR	Right Cheek	0.352	0.382	0.734	
	Right Tilt	0.284	0.873*	1.157	
	Left Cheek	0.654	0.873	1.527	
	Left Tilt	0.237	0.486	0.723	
Simult Tx	Configuration	PCS CDMA SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Head SAR	Right Cheek	0.370	0.382	0.752	N/A
	Right Tilt	0.210	0.873*	1.083	N/A
	Left Cheek	0.759	0.873	See Note 1	0.03
	Left Tilt	0.261	0.486	0.747	N/A





FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 70 of 84

Table 12-3
Simultaneous Transmission Scenario with Bluetooth (Held to Ear)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.825	0.403	1.228
	GSM/GPRS 1900	0.311	0.403	0.714
	UMTS 850	0.624	0.403	1.027
	UMTS 1750	0.404	0.403	0.807
	UMTS 1900	0.594	0.403	0.997
	CDMA/EVDO BC10 (§90S)	0.638	0.403	1.041
	CDMA/EVDO BC0 (§22H)	0.661	0.403	1.064
	PCS CDMA/EVDO	0.759	0.403	1.162
	LTE Band 12	0.448	0.403	0.851
	LTE Band 13	0.599	0.403	1.002
	LTE Band 26 (Cell)	0.739	0.403	1.142
	LTE Band 4 (AWS)	0.429	0.403	0.832
	LTE Band 25 (PCS)	0.802	0.403	1.205
	LTE Band 41	0.577	0.403	0.980

Notes:

No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 71 of 84

12.4 Body-Worn Simultaneous Transmission Analysis



Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.769	0.398	1.167
	GSM/GPRS 1900	0.406	0.398	0.804
	UMTS 850	0.695	0.398	1.093
	UMTS 1750	0.559	0.398	0.957
	UMTS 1900	0.648	0.398	1.046
	CDMA BC10 (§90S)	0.742	0.398	1.140
	CDMA BC0 (§22H)	0.737	0.398	1.135
	PCS CDMA	0.786	0.398	1.184
	LTE Band 12	0.537	0.398	0.935
	LTE Band 13	0.846	0.398	1.244
	LTE Band 26 (Cell)	0.795	0.398	1.193
	LTE Band 4 (AWS)	0.691	0.398	1.089
	LTE Band 25 (PCS)	0.882	0.398	1.280
	LTE Band 41	0.688	0.398	1.086

Table 12-5
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.769	0.336	1.105
	GSM/GPRS 1900	0.406	0.336	0.742
	UMTS 850	0.695	0.336	1.031
	UMTS 1750	0.559	0.336	0.895
	UMTS 1900	0.648	0.336	0.984
	CDMA BC10 (§90S)	0.742	0.336	1.078
	CDMA BC0 (§22H)	0.737	0.336	1.073
	PCS CDMA	0.786	0.336	1.122
	LTE Band 12	0.537	0.336	0.873
	LTE Band 13	0.846	0.336	1.182
	LTE Band 26 (Cell)	0.795	0.336	1.131
	LTE Band 4 (AWS)	0.691	0.336	1.027
	LTE Band 25 (PCS)	0.882	0.336	1.218
	LTE Band 41	0.688	0.336	1.024

Note: Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 72 of 84

12.5 Hotspot SAR Simultaneous Transmission Analysis

Table 12-6
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.769	0.398	1.167
	GPRS 1900	0.406	0.398	0.804
	UMTS 850	0.695	0.398	1.093
	UMTS 1750	0.645	0.398	1.043
	UMTS 1900	0.648	0.398	1.046
	EVDO BC10 (§90S)	0.745	0.398	1.143
	EVDO BC0 (§22H)	0.729	0.398	1.127
	PCS EVDO	0.834	0.398	1.232
	LTE Band 12	0.552	0.398	0.950
	LTE Band 13	0.846	0.398	1.244
	LTE Band 26 (Cell)	0.795	0.398	1.193
	LTE Band 4 (AWS)	0.746	0.398	1.144
	LTE Band 25 (PCS)	0.885	0.398	1.283
	LTE Band 41	0.693	0.398	1.091

Table 12-7
Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.769	0.336	1.105
	GPRS 1900	0.406	0.336	0.742
	UMTS 850	0.695	0.336	1.031
	UMTS 1750	0.645	0.336	0.981
	UMTS 1900	0.648	0.336	0.984
	EVDO BC10 (§90S)	0.745	0.336	1.081
	EVDO BC0 (§22H)	0.729	0.336	1.065
	PCS EVDO	0.834	0.336	1.170
	LTE Band 12	0.552	0.336	0.888
	LTE Band 13	0.846	0.336	1.182
	LTE Band 26 (Cell)	0.795	0.336	1.131
	LTE Band 4 (AWS)	0.746	0.336	1.082
	LTE Band 25 (PCS)	0.885	0.336	1.221
	LTE Band 41	0.693	0.336	1.029

Notes:

- No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.6 for detailed SPLS ratio analysis.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 73 of 84

12.6 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is

≤ 0.04 for 1g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2} \text{ (Head)}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

12.6.1 Head Left Cheek SPLSR Evaluation and Analysis

Table 12-8
Peak SAR Locations for Head Left Cheek

Mode/Band	x (mm)	y (mm)	z (mm)
2.4 GHz WLAN	13.89	327.40	-172.37
LTE Band 25 (PCS)	47.63	248.16	-172.09
PCS CDMA	47.76	252.14	-174.12

Table 12-9
Head Left Cheek SAR to Peak Location Separation Ratio Calculations

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D _{a-b}	(a+b) ^{1.5} /D _{a-b}	
LTE Band 25 (PCS)	2.4 GHz WLAN	0.802	0.873	1.675	86.12	0.03	1
PCS CDMA	2.4 GHz WLAN	0.759	0.873	1.632	82.55	0.03	2






FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 74 of 84

Table 12-10
Head Left Cheek SAR to Peak Location Separation Ratio Plots



12.7 Simultaneous Transmission Conclusion

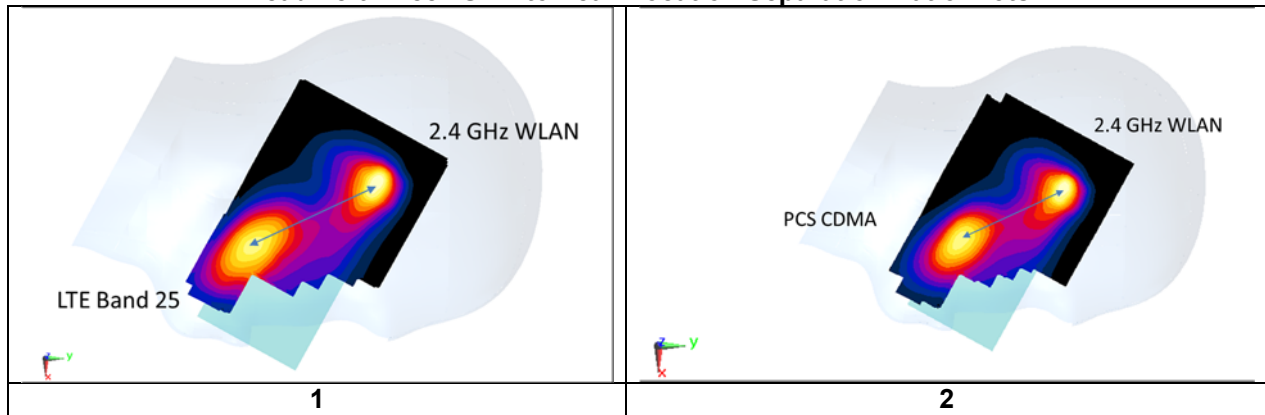The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 75 of 84

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 13-1
Head SAR Measurement Variability Results



HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)			
835	824.20	128	GSM 850	GPRS	Right	Cheek	N/A	0.823	0.769	1.07	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 13-2
Body SAR Measurement Variability Results

BODY VARIABILITY RESULTS															
Band	FREQUENCY		Mode	Service	# of Time Slots	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.							(W/kg)	(W/kg)		(W/kg)		(W/kg)	
750	782.00	23230	LTE Band 13, 10 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	N/A	N/A	back	10 mm	0.846	0.837	1.01	N/A	N/A	N/A	N/A
1900	1860.00	26140	LTE Band 25 (PCS), 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	N/A	N/A	front	10 mm	0.826	0.776	1.06	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram							

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 76 of 84

14 ADDITIONAL TESTING PER FCC GUIDANCE


14.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes was < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

Table 14-1
LTE Band 41 Head Linearity Data

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	24.7	27.7
Measured Output Power (dBm)	24.7	27.7
Measured SAR (W/kg)	0.462	0.577
Measured Power (mW)	295.12	588.84
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	186.81	254.97
% deviation from expected linearity		-8.49%

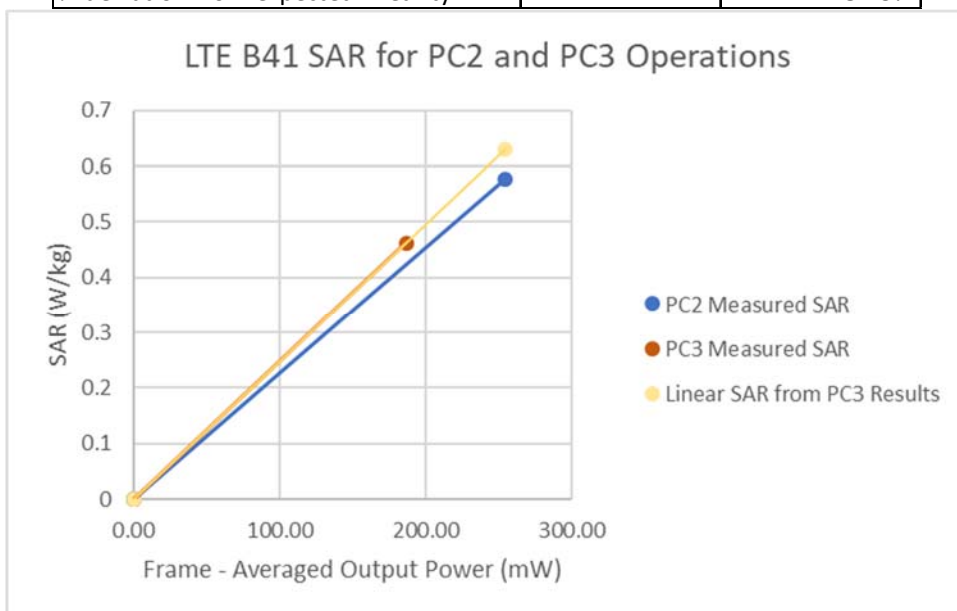



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 77 of 84

Table 14-2
LTE Band 41 Body-Worn Linearity Data

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	24.7	27.7
Measured Output Power (dBm)	24.7	27.7
Measured SAR (W/kg)	0.511	0.688
Measured Power (mW)	295.12	588.84
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	186.81	254.97
% deviation from expected linearity		-1.35%

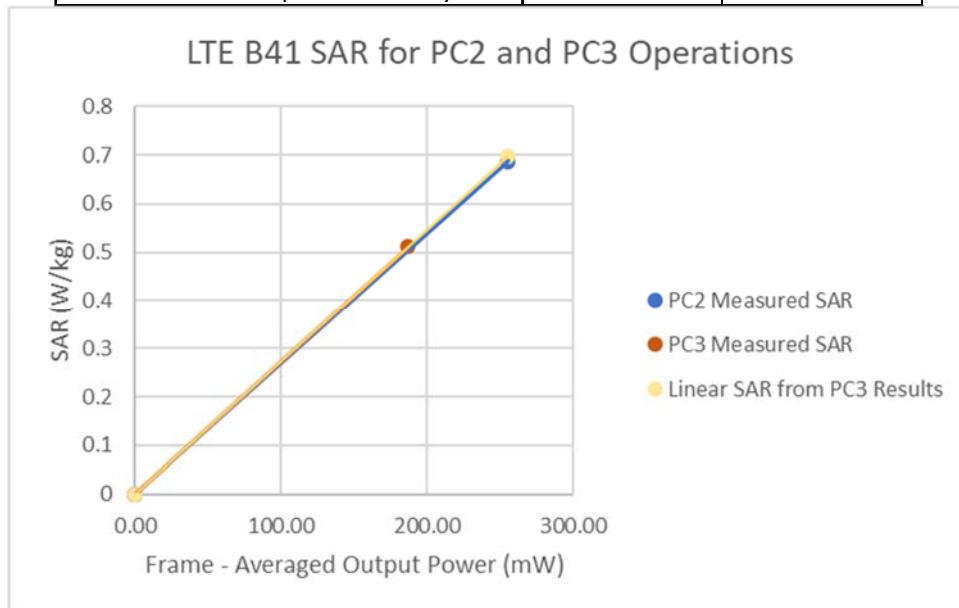


Figure 14-2
LTE Band 41 Body-Worn Linearity



FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 78 of 84

Table 14-3
LTE Band 41 Hotspot Linearity Data

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	24.7	27.7
Measured Output Power (dBm)	24.7	27.7
Measured SAR (W/kg)	0.551	0.693
Measured Power (mW)	295.12	588.84
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	186.81	254.97
% deviation from expected linearity		-7.85%

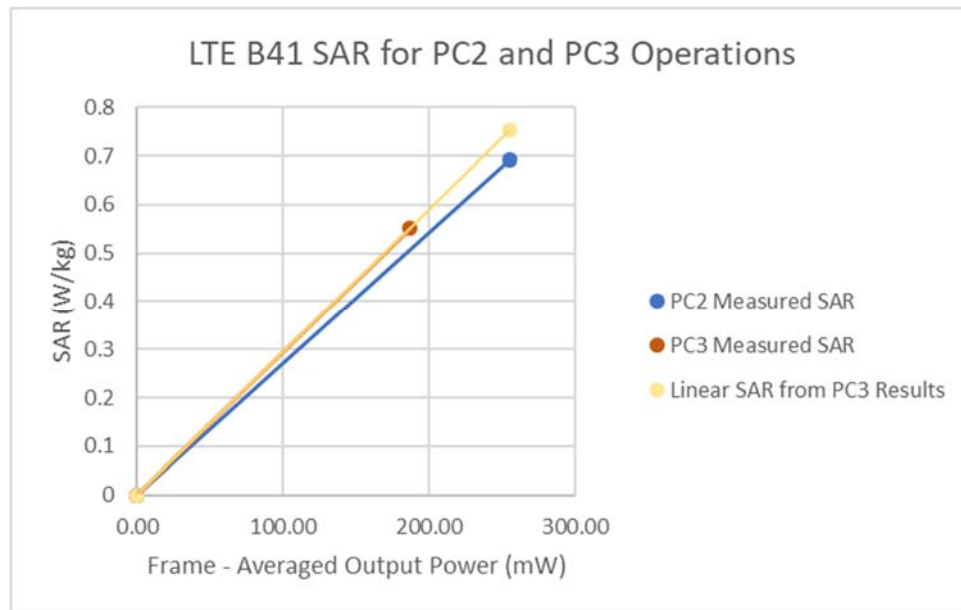






Figure 14-3
LTE Band 41 Hotspot Linearity

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 79 of 84

15 EQUIPMENT LIST



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753ES	S-Parameter Network Analyzer	7/30/2018	Annual	7/30/2019	MY40000670
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/30/2018	Annual	8/30/2019	MY40003841
Agilent	E4432B	ESG-D Series Signal Generator	4/19/2018	Annual	4/19/2019	US40053896
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	E5515C	8960 Series 10 Wireless Communications Test Set	11/15/2017	Annual	11/15/2018	GB42230325
Agilent	E5515C	Wireless Communications Test Set	1/29/2016	Triennial	1/29/2019	GB46310798
Agilent	E5515C	Wireless Communications Test Set	2/7/2018	Triennial	2/7/2021	GB43304447
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB44450273
Agilent	N5182A	MXG Vector Signal Generator	11/1/2017	Annual	11/1/2018	MY47420603
Agilent	N5182A-506	MXG Vector Signal Generator	6/19/2018	Annual	6/19/2019	MY48180366
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N9030A	PKA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Amplifier Research	150A100C	DC Amplifier	CBT	N/A	CBT	348812
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433976
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433978
Anritsu	MA24106A	USB Power Sensor	4/18/2018	Annual	4/18/2019	1349514
Anritsu	MA24106A	USB Power Sensor	1/19/2018	Annual	1/19/2019	1344554
Anritsu	MA24106A	USB Power Sensor	7/16/2018	Annual	7/16/2019	1520505
Anritsu	MA24106A	USB Power Sensor	8/20/2018	Annual	8/20/2019	1520504
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1339018
Anritsu	ML2495A	Power Meter	10/22/2017	Annual	10/22/2018	941001
Anritsu	MT8821C	Radio Communication Analyzer	7/26/2018	Annual	7/26/2019	6201144418
Anritsu	MT8821C	Radio Communication Analyzer	7/24/2018	Annual	7/24/2019	6201664756
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M155A00-009
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	3/3/2017	Biennial	3/3/2019	170155534
Keysight	772D	Dual Directional Coupler	CBT	CBT	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5W)	6/4/2018	Annual	6/4/2019	MY53401181
MCL	BW-N6W5+	6dB Attenuator	CBT	CBT	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	CBT	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	CBT	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	CBT	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	CBT	CBT	1226
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	CBT	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	CBT	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	CBT	CBT	N/A
Mitutoyo	CD-6"CSX	Digital Caliper	4/18/2018	Biennial	4/18/2020	13264165
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	CBT	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	CBT	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	CBT	CBT	120
NI	4474	Data Acquisition Card	N/A	CBT	N/A	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	CBT	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	6/8/2018	Annual	6/8/2019	112347
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	5/29/2018	Annual	5/29/2019	161662
SPEAG	DAK-12	Dielectric Assessment Kit (10MHz - 3GHz)	3/13/2018	Annual	3/13/2019	1102
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Triennial	7/13/2019	1161
SPEAG	D835V2	835 MHz SAR Dipole	7/11/2017	Biennial	7/11/2019	4d133
SPEAG	D1765V2	1765 MHz SAR Dipole	5/23/2018	Annual	5/23/2019	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	2/7/2018	Annual	2/7/2019	5d148
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Biennial	9/11/2019	797
SPEAG	D2600V2	2600 MHz SAR Dipole	4/11/2018	Annual	4/11/2019	1004
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	1003
SPEAG	D835V2	835 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	4d132
SPEAG	D835V2	835 MHz SAR Dipole	7/13/2016	Triennial	7/13/2019	4d047
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2017	Biennial	5/9/2019	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	7/11/2017	Biennial	7/11/2019	5d149
SPEAG	D2450V2	2450 MHz SAR Dipole	8/17/2017	Biennial	8/17/2019	719
SPEAG	D2600V2	2600 MHz SAR Dipole	6/7/2017	Biennial	6/7/2019	1064
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7410
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3213
SPEAG	EX3DV4	SAR Probe	6/25/2018	Annual	6/25/2019	7409
SPEAG	ES3DV3	SAR Probe	3/27/2018	Annual	3/27/2019	3347
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3319
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2018	Annual	7/11/2019	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2018	Annual	2/9/2019	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/15/2018	Annual	2/15/2019	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	1368

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: ZNFX220PM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset		Page 80 of 84

16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
Phantom & Tissue Parameters								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)						RSS	11.5	11.3
Expanded Uncertainty (95% CONFIDENCE LEVEL)						k=2	23.0	22.6



FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 81 of 84

17 CONCLUSION

17.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID: ZNFX220PM	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 82 of 84	

18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 83 of 84

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: ZNFX220PM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1809240182-03-R1.ZNF	Test Dates: 09/24/18 - 10/10/18	DUT Type: Portable Handset	Page 84 of 84

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: 835 Head Medium parameters used (interpolated):

$f = 824.2$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 40.713$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2018; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42) @ 824.2 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: GPRS 850, Right Head, Cheek, Low.ch, 2 Tx slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.94 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.823 W/kg

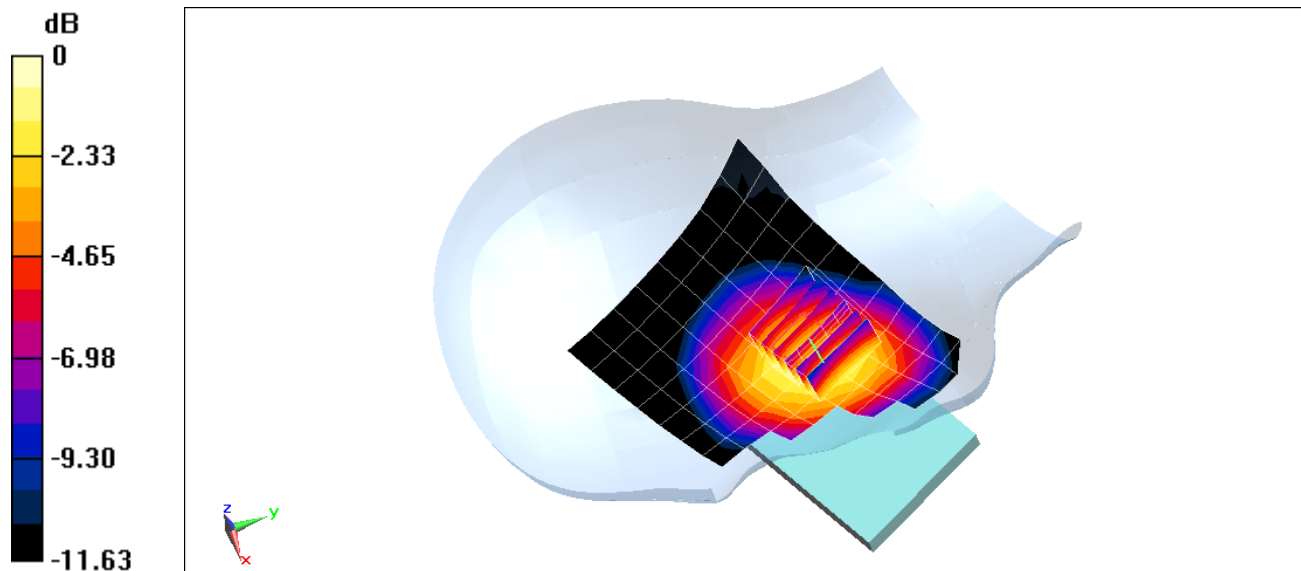

0 dB = 0.910 W/kg = -0.41 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 38.643$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 09-26-2018; Ambient Temp: 23.9°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: GPRS 1900, Left Head, Cheek, Mid.ch, 2 Tx slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.59 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.311 W/kg

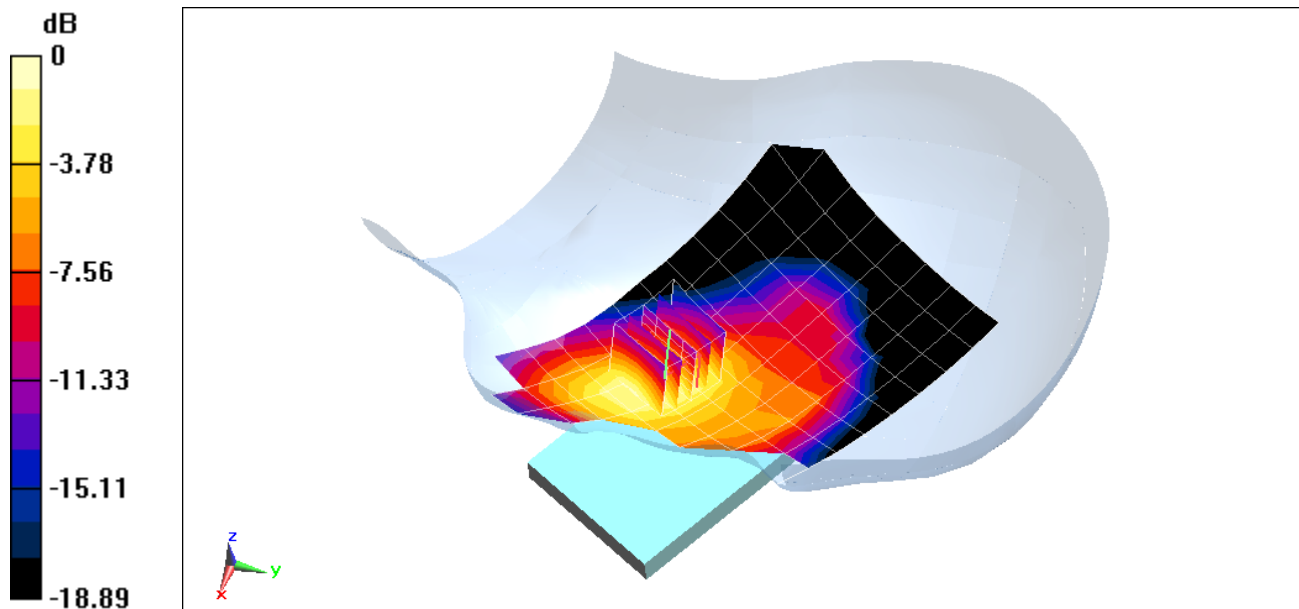

0 dB = 0.416 W/kg = -3.81 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, UMTS; Frequency: 836.6 MHz, Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 826.4 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 40.712$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 09-26-2018; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42) @ 826.4 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: UMTS 850, Right Head, Cheek, Low.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.63 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.599 W/kg

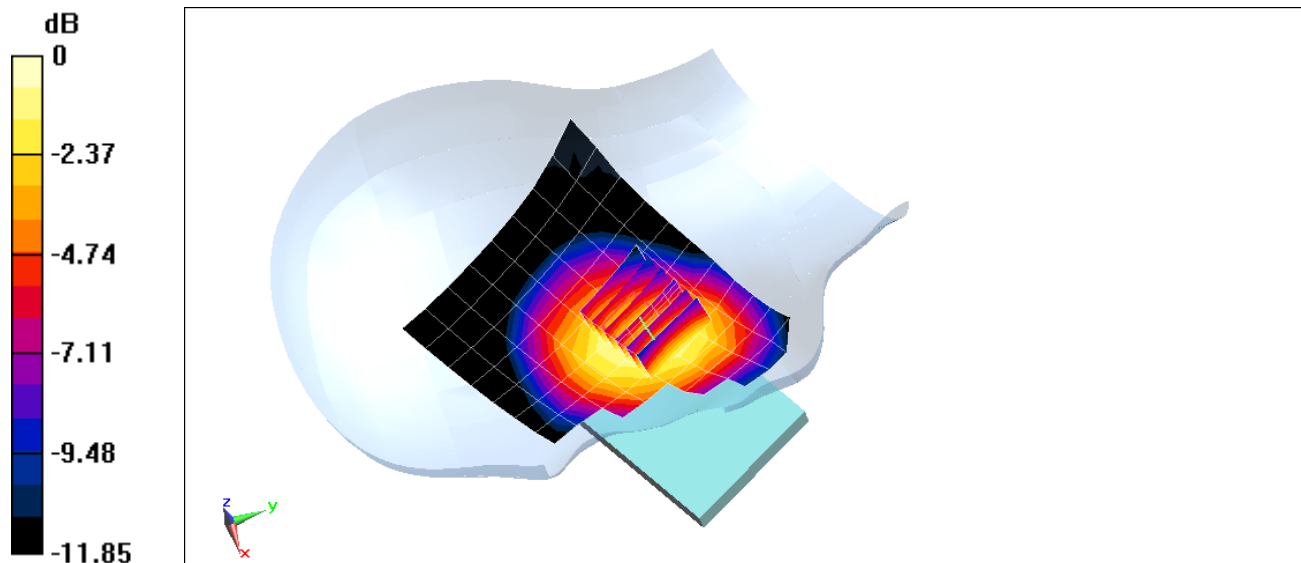

0 dB = 0.667 W/kg = -1.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.354 \text{ S/m}$; $\epsilon_r = 39.922$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 10-01-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(8.4, 8.4, 8.4) @ 1732.4 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.54 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.374 W/kg

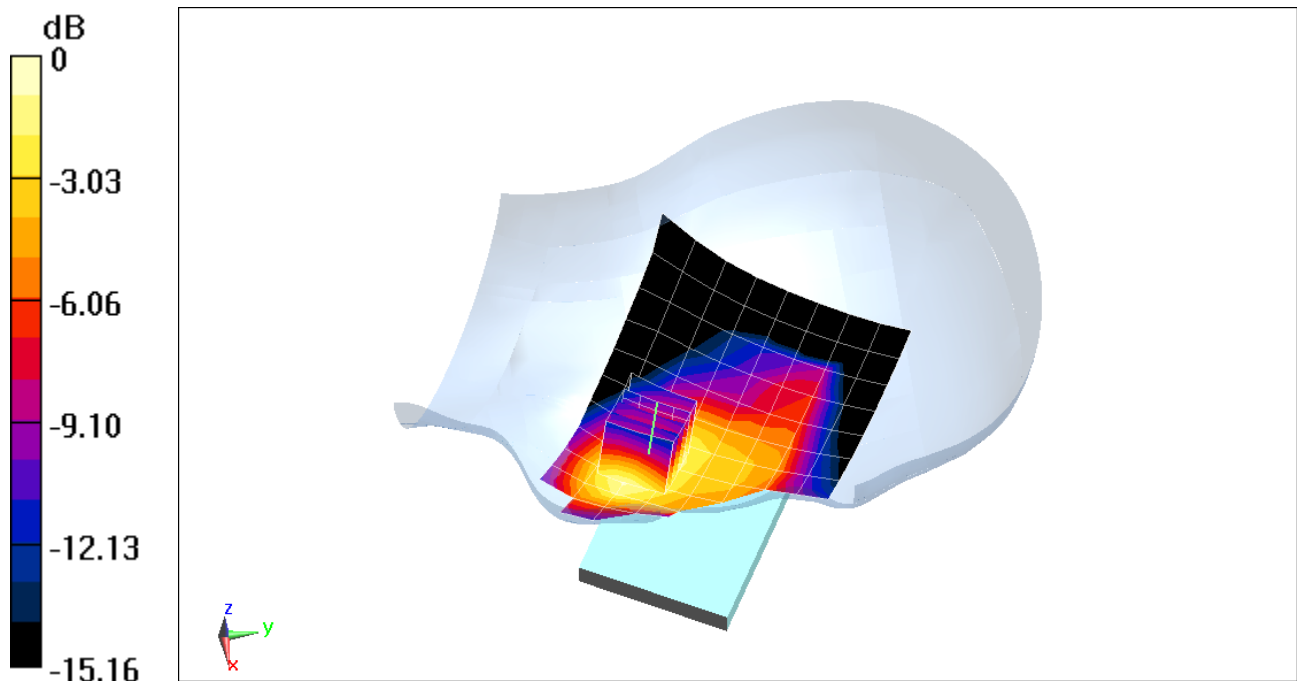

0 dB = 0.492 W/kg = -3.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 38.643$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 09-26-2018; Ambient Temp: 23.9°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1880 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.93 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.571 W/kg

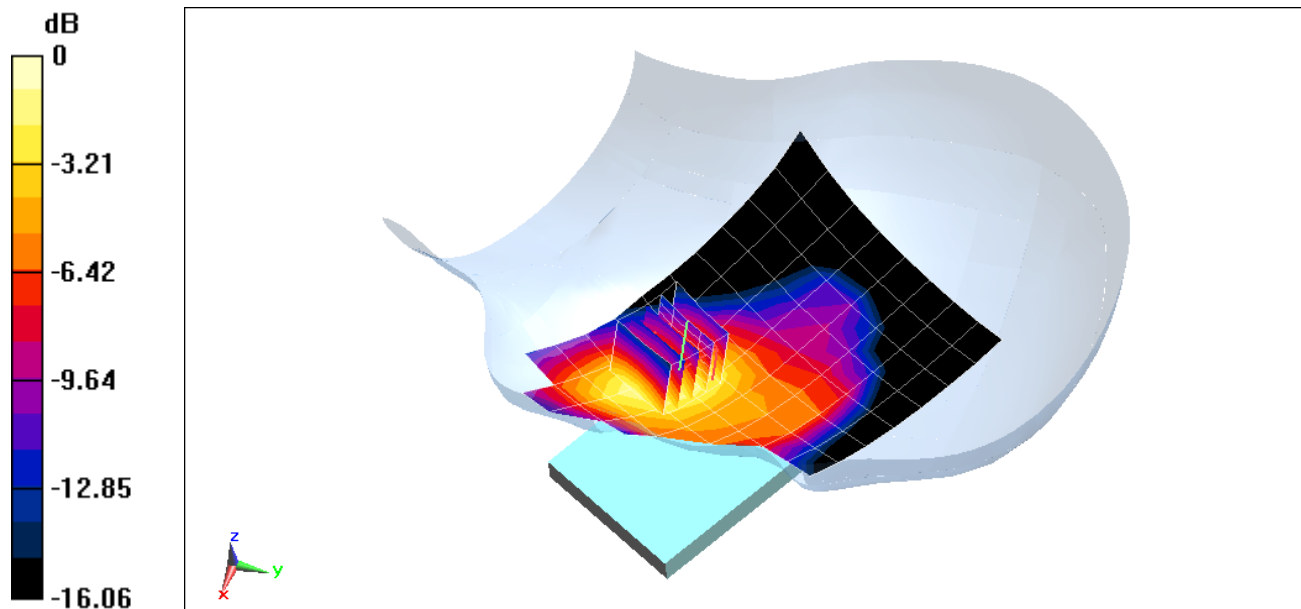

0 dB = 0.770 W/kg = -1.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 40.169$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 09-29-2018; Ambient Temp: 24.1°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42) @ 820.1 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: Cell. EVDO Rev. A, Rule Part 90S, Right Head, Cheek, Mid.ch


Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.15 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.625 W/kg

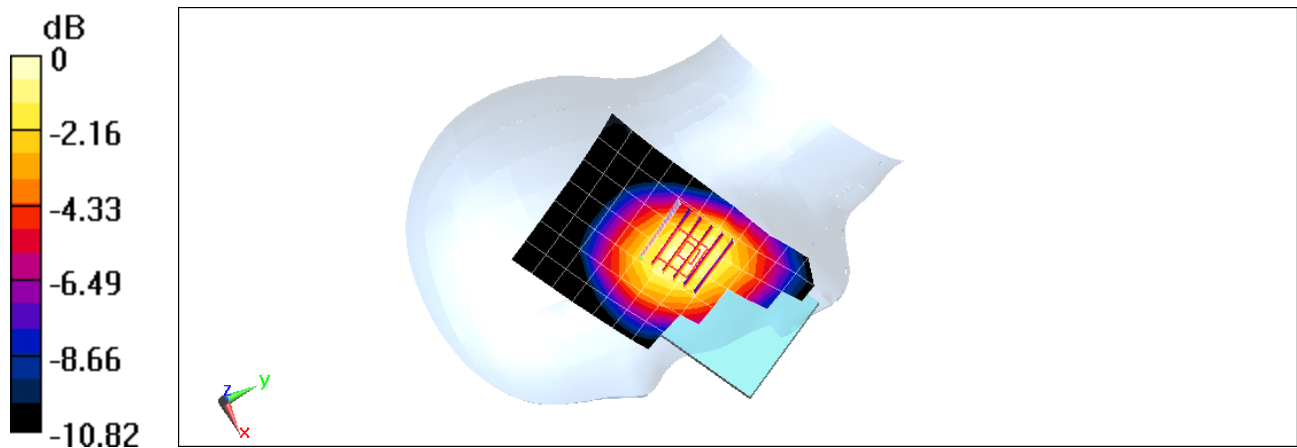

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 824.7 \text{ MHz}$; $\sigma = 0.919 \text{ S/m}$; $\epsilon_r = 42.42$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 10-08-2018; Ambient Temp: 22.1°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42) @ 824.7 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: Cell. EVDO Rev. A, Rule Part 22H, Right Head, Cheek, Low.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.82 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.649 W/kg

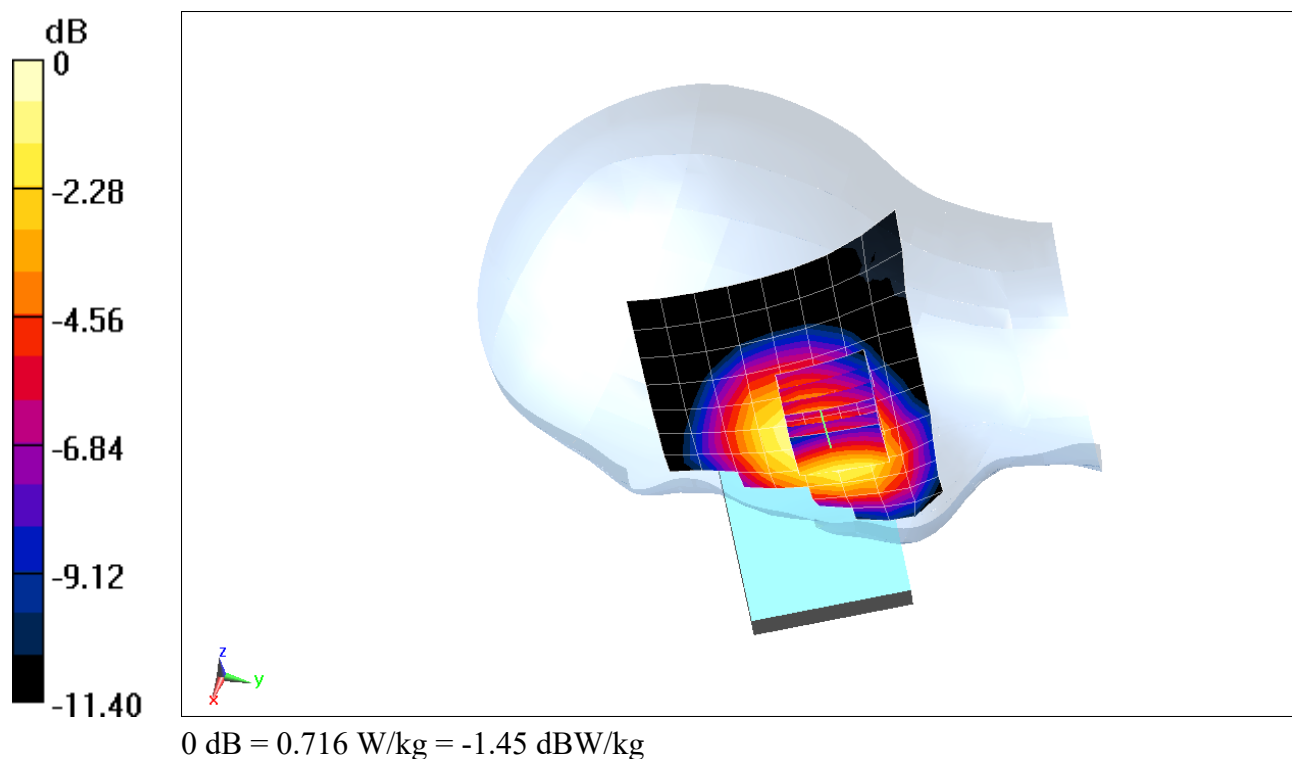

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, PCS CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1908.75$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.068$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 10-08-2018; Ambient Temp: 20.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7409, ConvF(8.05, 8.05, 8.05) @ 1908.75 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: PCS CDMA, Left Head, Cheek, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.14 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.715 W/kg

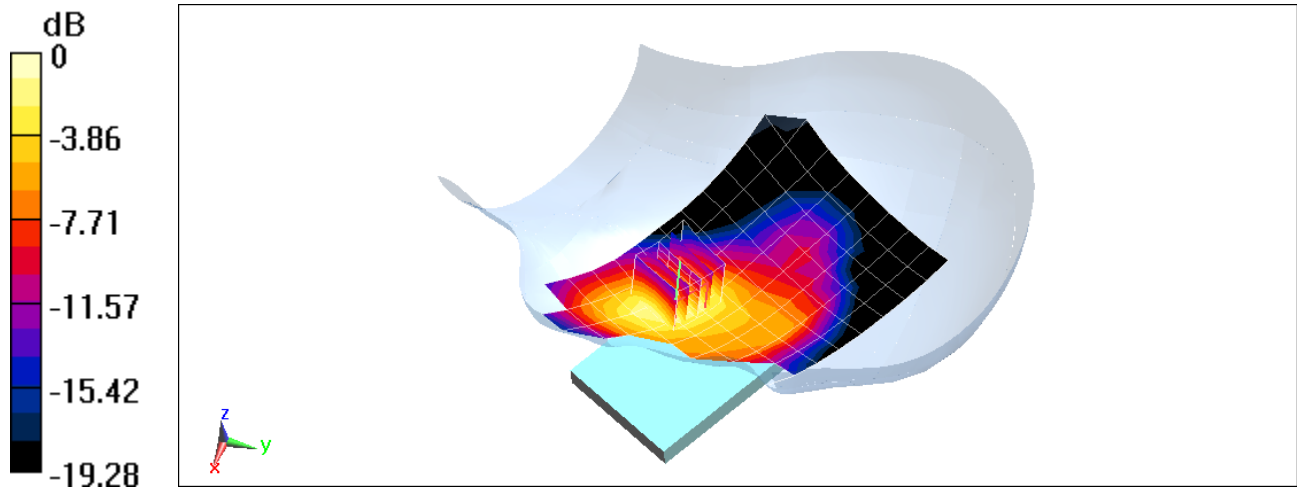

0 dB = 1.01 W/kg = 0.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.884 \text{ S/m}$; $\epsilon_r = 42.099$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 10-1-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(10.13, 10.13, 10.13) @ 707.5 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.96 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.440 W/kg

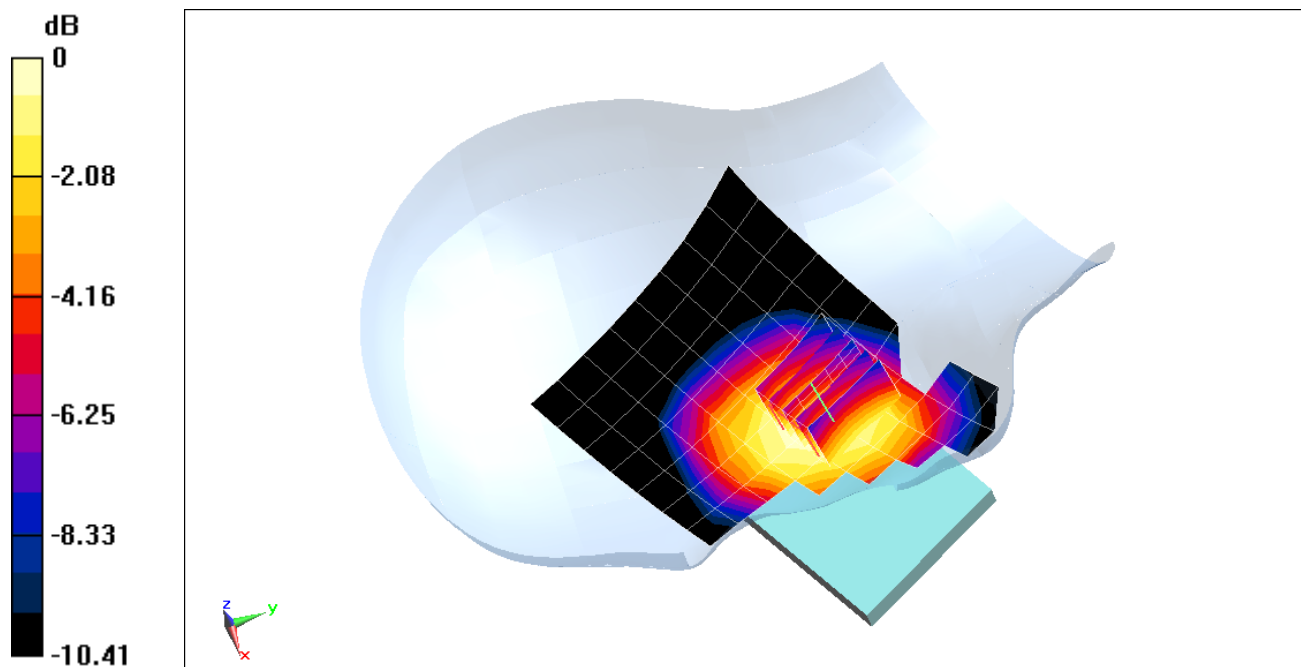

0 dB = 0.512 W/kg = -2.91 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.768$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 10-1-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(10.13, 10.13, 10.13) @ 782 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.25 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.599 W/kg

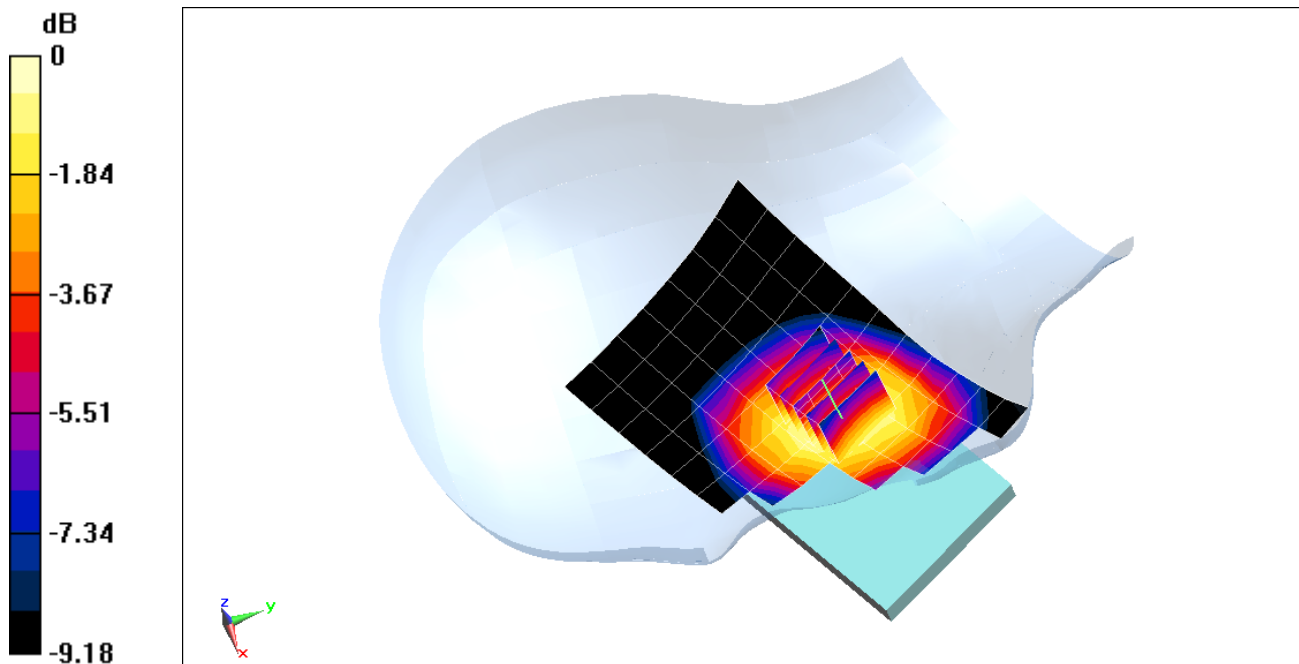

0 dB = 0.706 W/kg = -1.51 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 831.5$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 40.708$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 09-26-2018; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42) @ 831.5 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.50 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.956 W/kg

SAR(1 g) = 0.739 W/kg

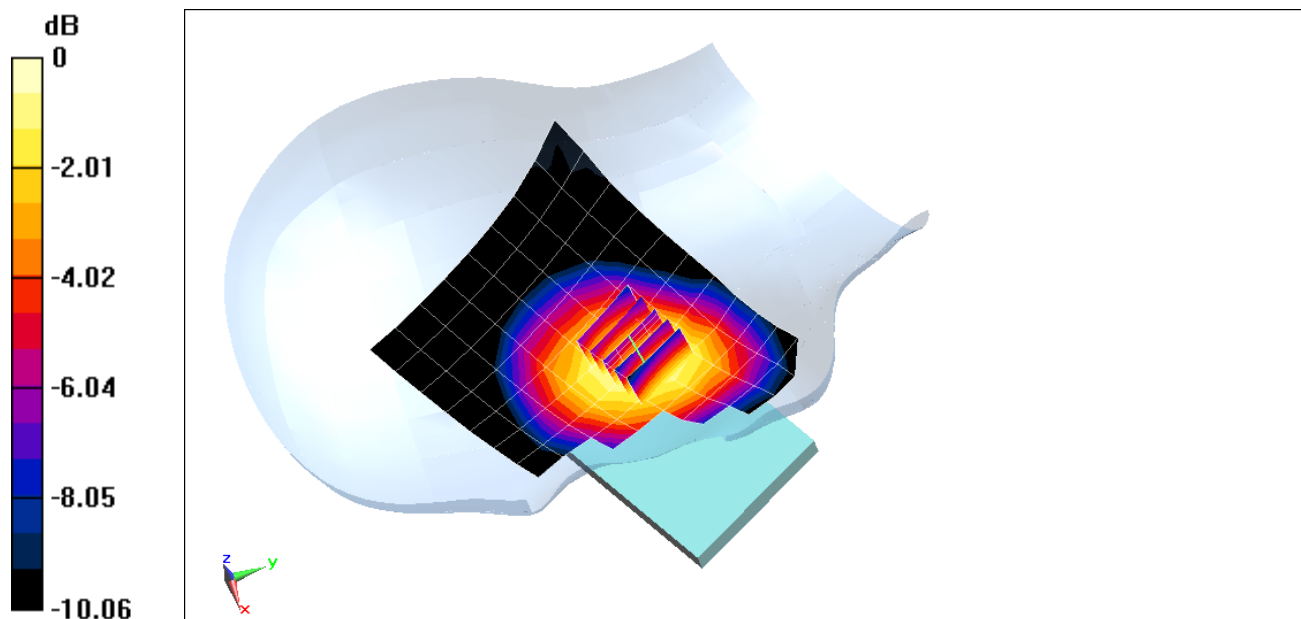

0 dB = 0.821 W/kg = -0.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Head; Medium parameters used (interpolated):
 $f = 1732.5 \text{ MHz}$; $\sigma = 1.355 \text{ S/m}$; $\epsilon_r = 39.921$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 10-01-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(8.4, 8.4, 8.4) @ 1732.5 MHz; Calibrated: 7/20/2018
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/11/2018
Phantom: SAM Front; Type: SAM; Serial: 1686
Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 4 (AWS), Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.32 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.427 W/kg

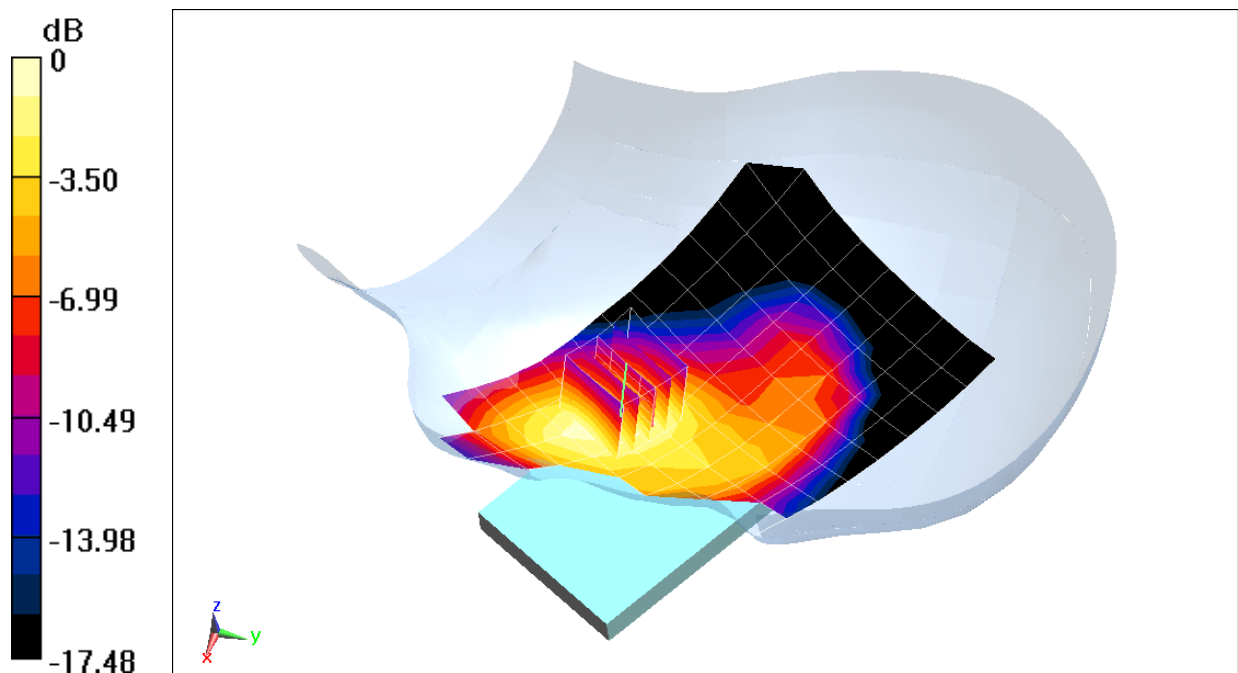

0 dB = 0.553 W/kg = -2.57 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.642$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 09-26-2018; Ambient Temp: 23.9°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1882.5 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.11 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.728 W/kg

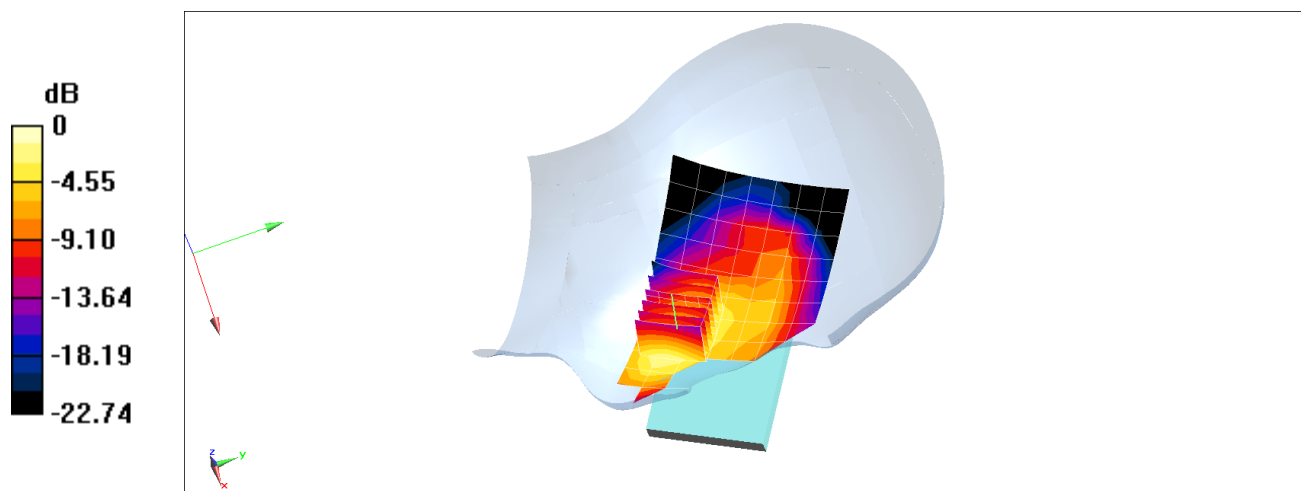

0 dB = 0.972 W/kg = -0.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, _LTE Band 41 (Class 2); Frequency: 2549.5 MHz; Duty Cycle: 1:2.31

Medium: 2450 Head; Medium parameters used:

$f = 2550$ MHz; $\sigma = 1.903$ S/m; $\epsilon_r = 38.688$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09-24-2018; Ambient Temp: 20.9°C; Tissue Temp: 20.4°C

Probe: ES3DV3 - SN3213; ConvF(4.53, 4.53, 4.53) @ 2549.5 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 41 PC2, Left Head, Cheek, Low-Mid.ch,
QPSK, 20 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.577 W/kg

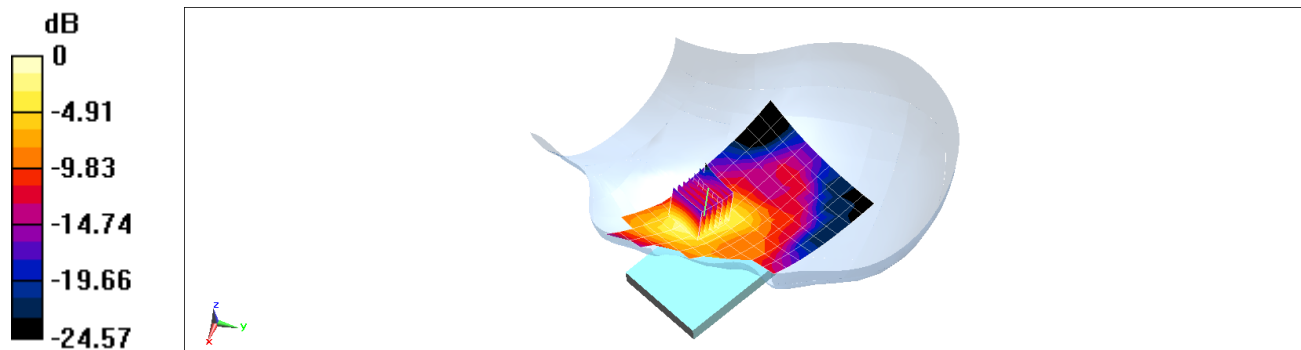

0 dB = 0.707 W/kg = -1.51 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03278

Communication System: UID 0, _IEEE 802.11b; Frequency: 2457 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2457 \text{ MHz}$; $\sigma = 1.823 \text{ S/m}$; $\epsilon_r = 37.847$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 09-26-2018; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72) @ 2457 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Left Head, Cheek, Ch 10, 1 Mbps


Area Scan (11x18x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.54 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.739 W/kg

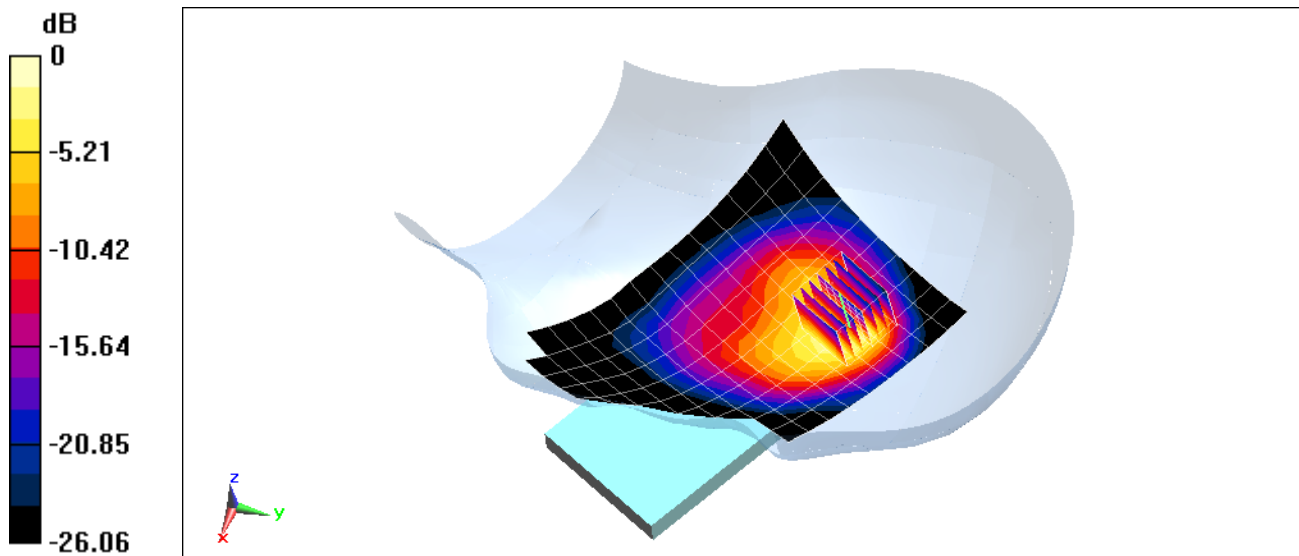

0 dB = 0.963 W/kg = -0.16 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03260

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.297

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2441 \text{ MHz}$; $\sigma = 1.8 \text{ S/m}$; $\epsilon_r = 37.727$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 10-01-2018; Ambient Temp: 20.1°C; Tissue Temp: 19.7°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72) @ 2441 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: Bluetooth, Left Head, Cheek, Ch 39, 1 Mbps


Area Scan (11x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.31 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.605 W/kg

SAR(1 g) = 0.272 W/kg

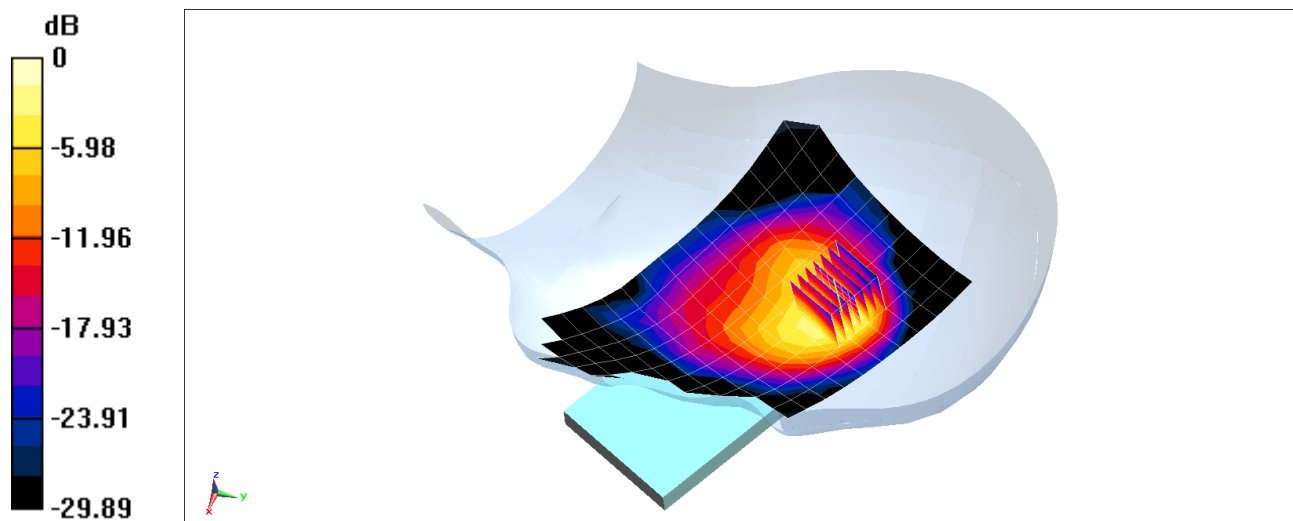

0 dB = 0.358 W/kg = -4.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 53.047$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 836.6 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 2 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.55 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.972 W/kg

SAR(1 g) = 0.768 W/kg

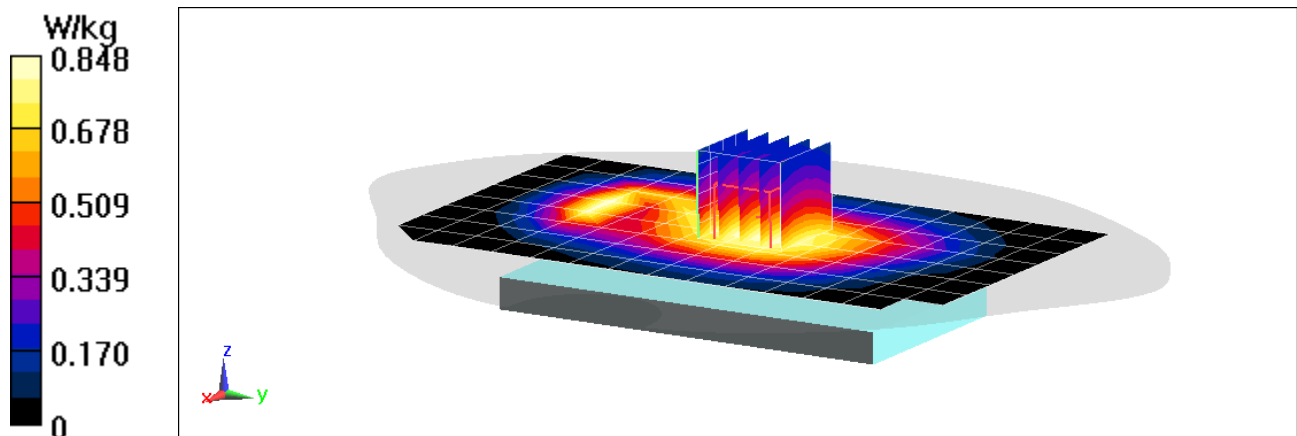

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.545 \text{ S/m}$; $\epsilon_r = 53.421$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.6, 7.6, 7.6) @ 1880 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 2 Tx Slots


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.45 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.406 W/kg

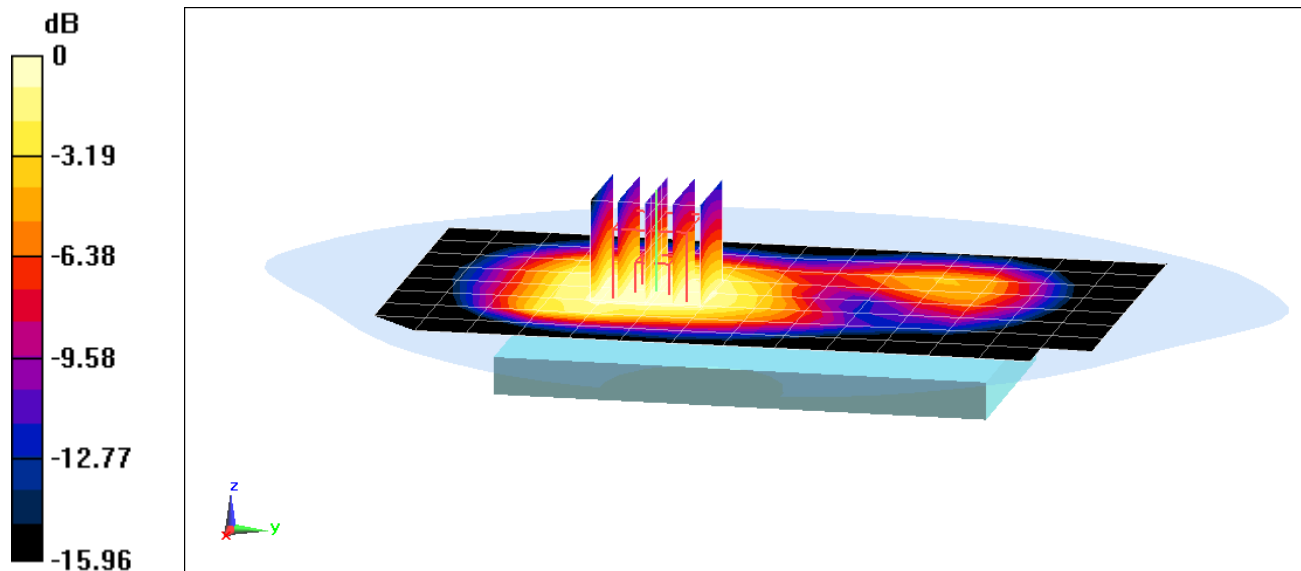

0 dB = 0.550 W/kg = -2.60 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 826.4 \text{ MHz}$; $\sigma = 0.969 \text{ S/m}$; $\epsilon_r = 53.19$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 826.4 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: UMTS 850, Body SAR, Back side, Low.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.92 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.846 W/kg

SAR(1 g) = 0.667 W/kg

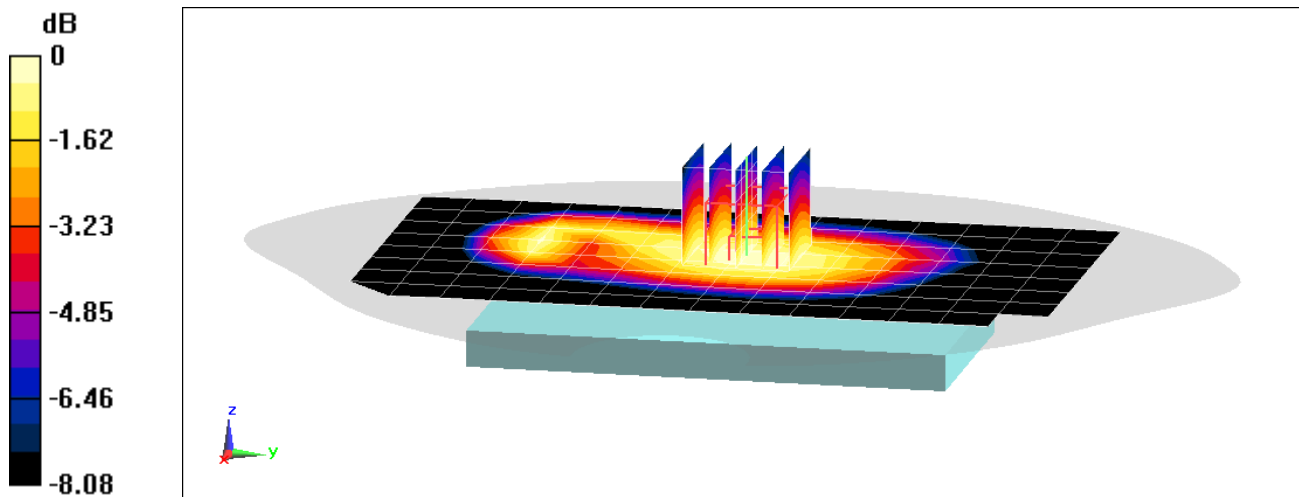

0 dB = 0.732 W/kg = -1.35 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$; $\sigma = 1.508 \text{ S/m}$; $\epsilon_r = 51.886$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7409; ConvF(7.91, 7.91, 7.91) @ 1732.4 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.09 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.518 W/kg

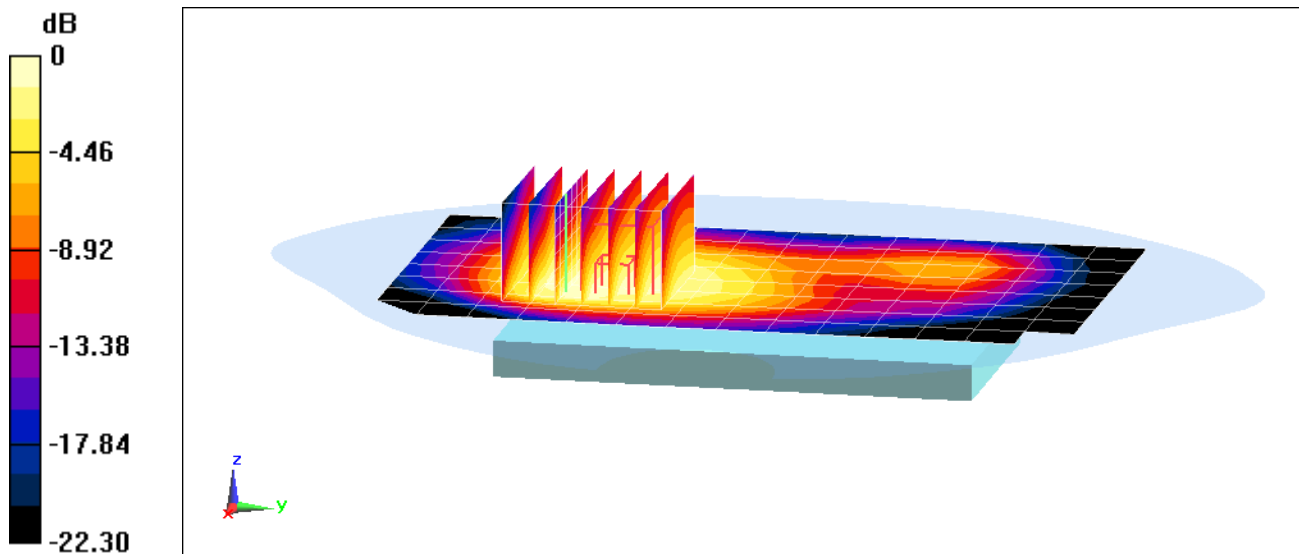

0 dB = 0.749 W/kg = -1.26 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1712.4 \text{ MHz}$; $\sigma = 1.486 \text{ S/m}$; $\epsilon_r = 51.962$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7409; ConvF(7.91, 7.91, 7.91) @ 1712.4 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: UMTS 1750, Body SAR, Front side, Low.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.57 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.943 W/kg

SAR(1 g) = 0.594 W/kg

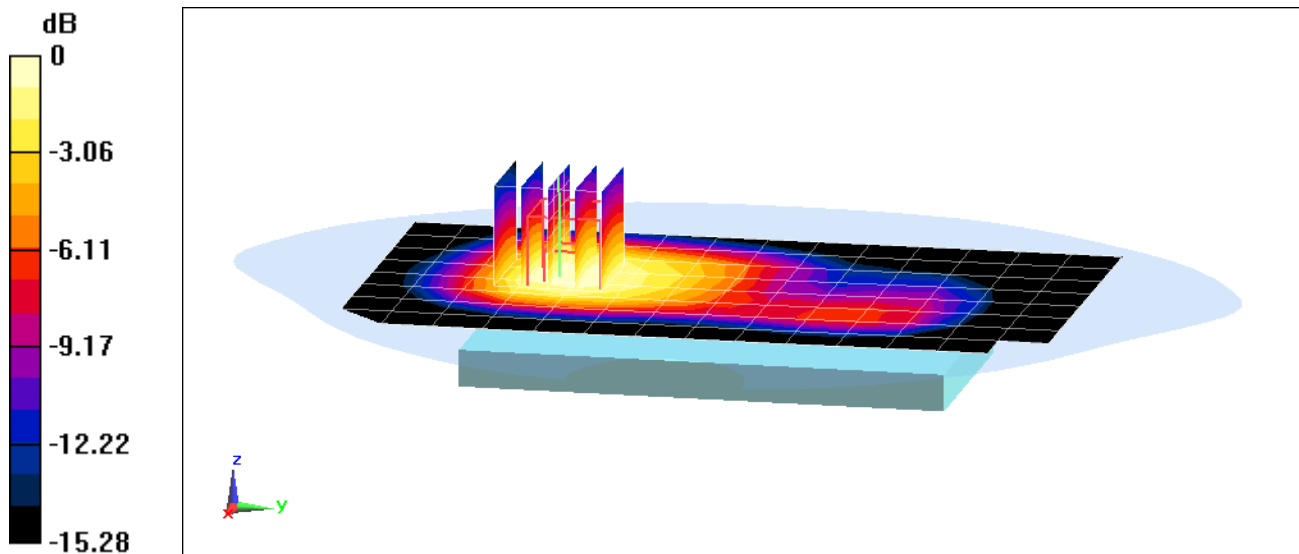

0 dB = 0.813 W/kg = -0.90 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03153

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.545 \text{ S/m}$; $\epsilon_r = 53.421$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.6, 7.6, 7.6) @ 1880 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.19 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.623 W/kg

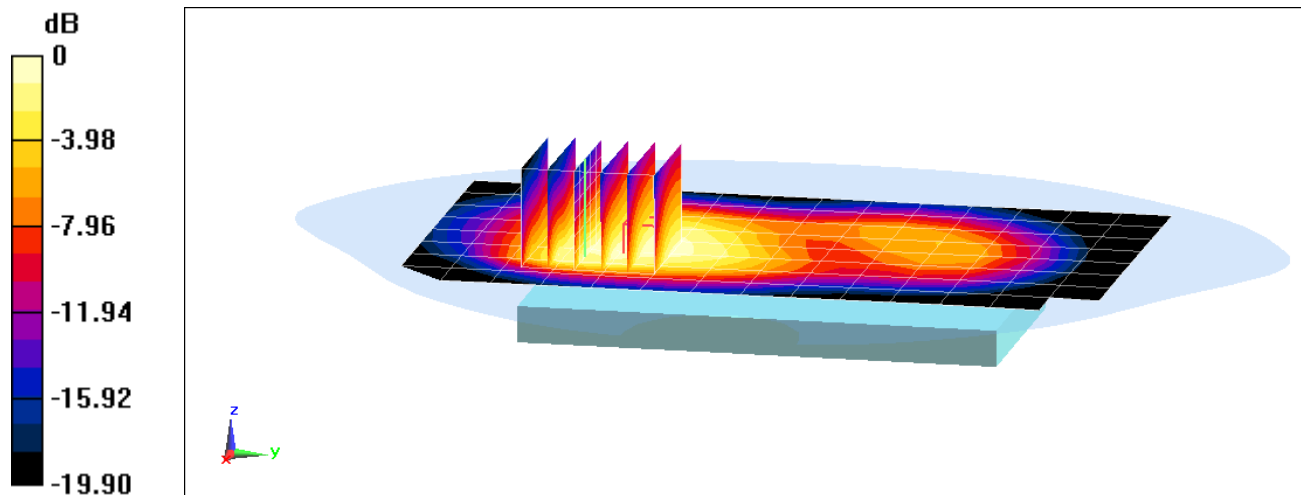

0 dB = 0.904 W/kg = -0.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.968 \text{ S/m}$; $\epsilon_r = 53.668$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 820.1 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: Cell. CDMA BC10, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.13 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.738 W/kg;

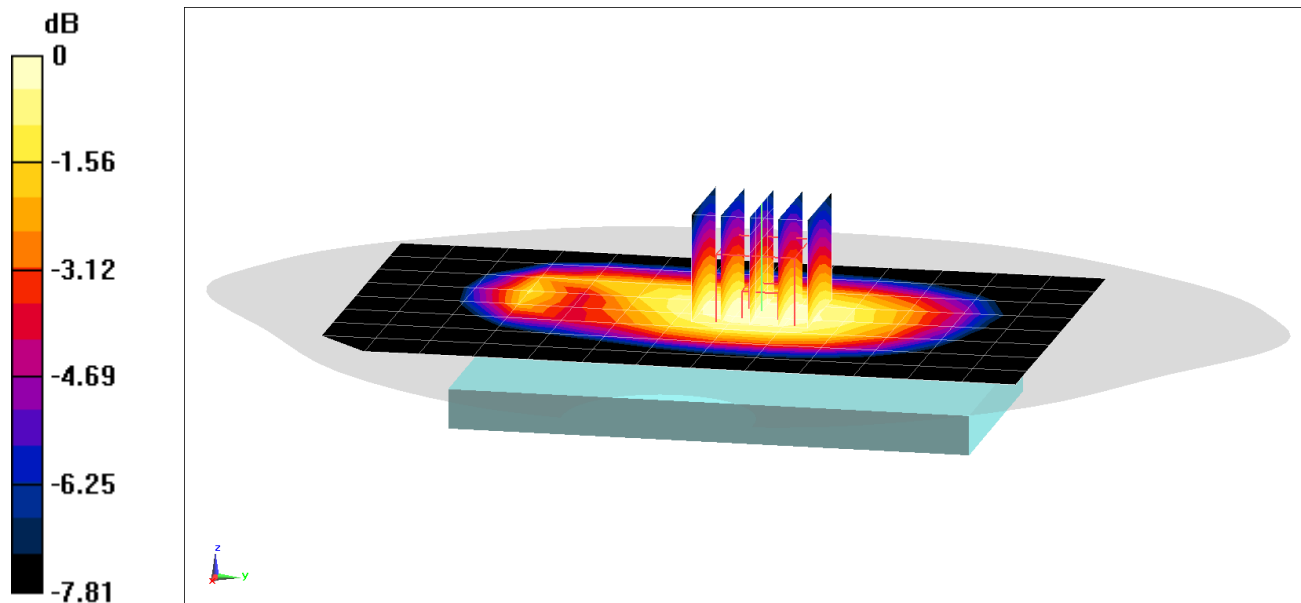

0 dB = 0.808 W/kg = -0.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$; $\sigma = 0.968 \text{ S/m}$; $\epsilon_r = 53.668$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 820.1 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: Cell. EVDO Rev.0 BC10, Body SAR, Back side, Mid.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.89 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.902 W/kg

SAR(1 g) = 0.721 W/kg

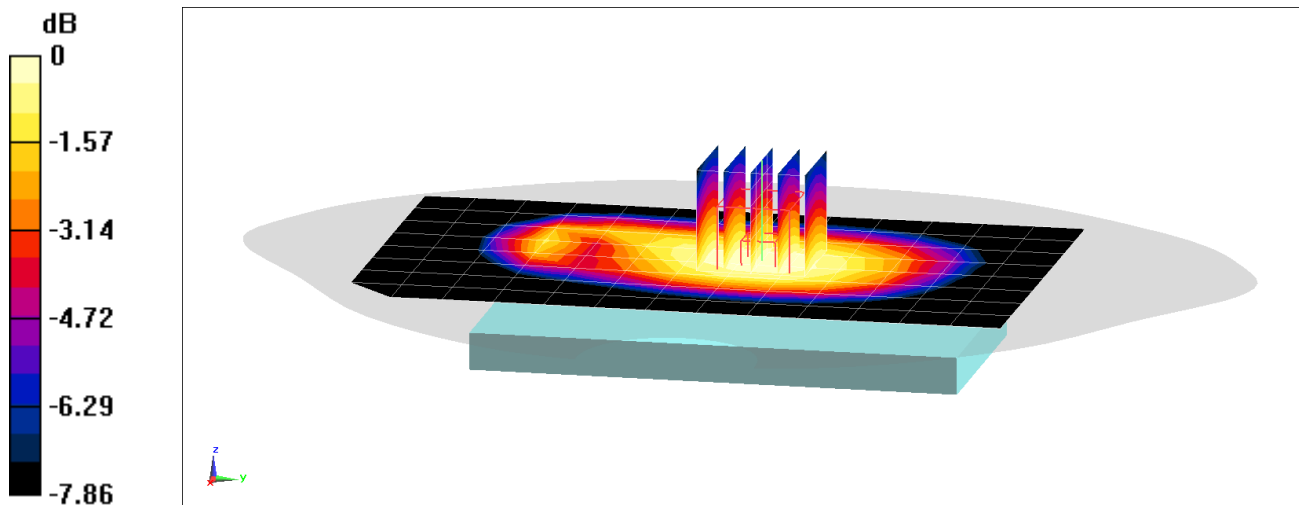

0 dB = 0.789 W/kg = -1.03 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 824.7 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 53.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 824.7 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: Cell. CDMA, Body SAR, Back side, Low.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.41 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.736 W/kg

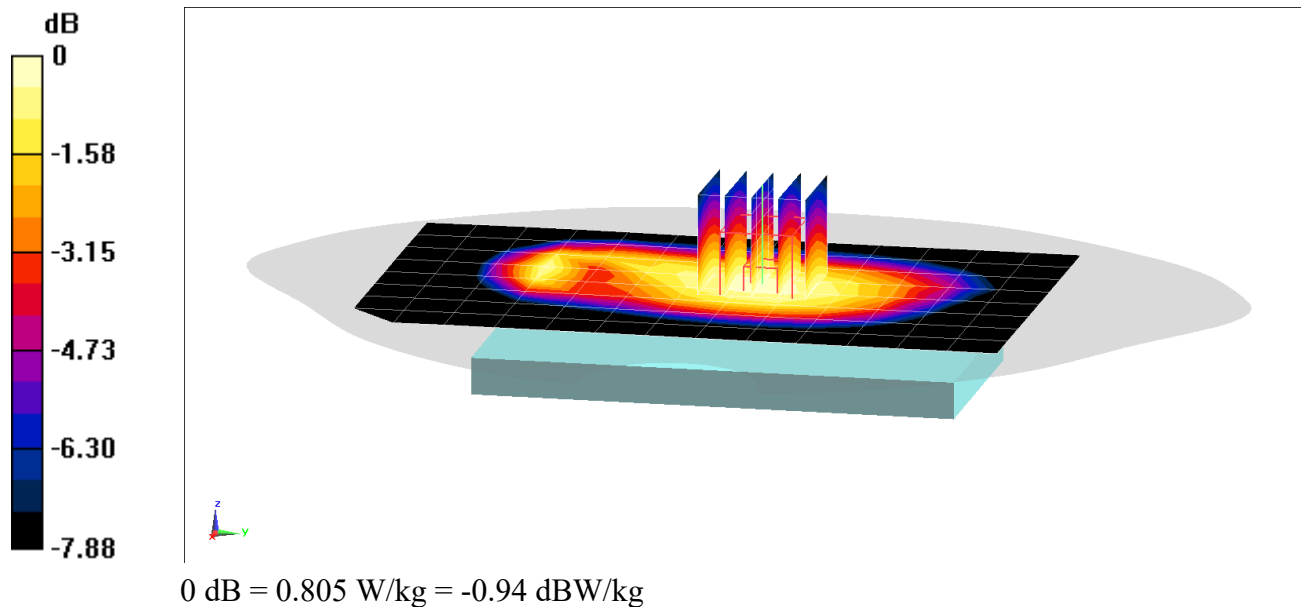

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, CDMA; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 824.7 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 53.633$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 824.7 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: Cell. EVDO Rev.0, Body SAR, Back side, Low.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.88 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.708 W/kg

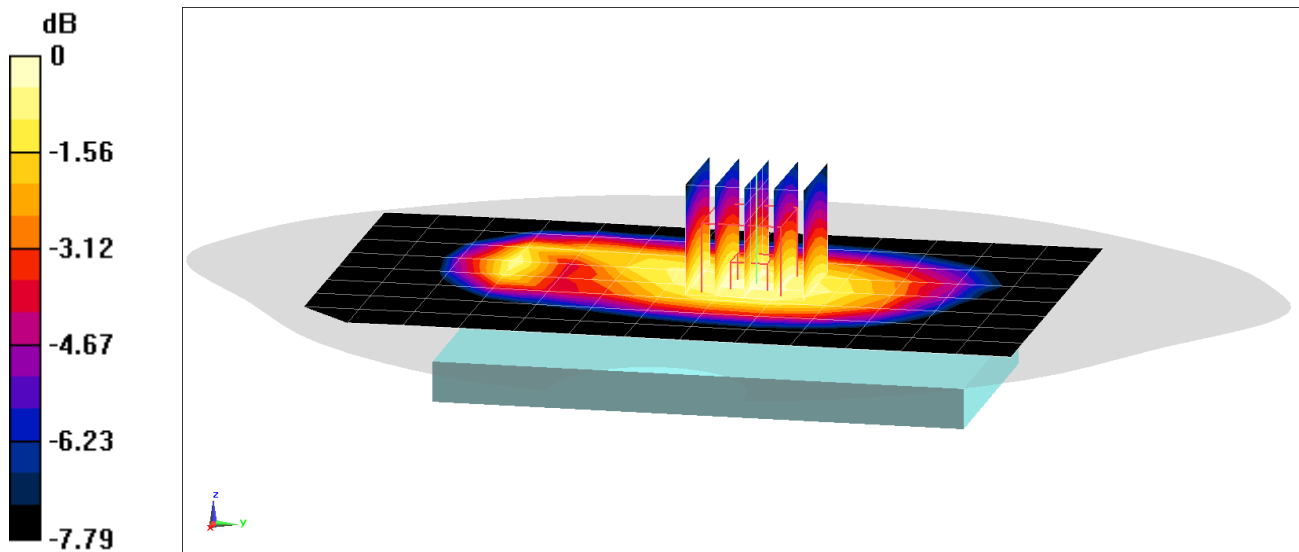

0 dB = 0.775 W/kg = -1.11 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.545 \text{ S/m}$; $\epsilon_r = 53.421$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.6, 7.6, 7.6) @ 1880 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Mode: PCS CDMA, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (8x8x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.50 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.784 W/kg

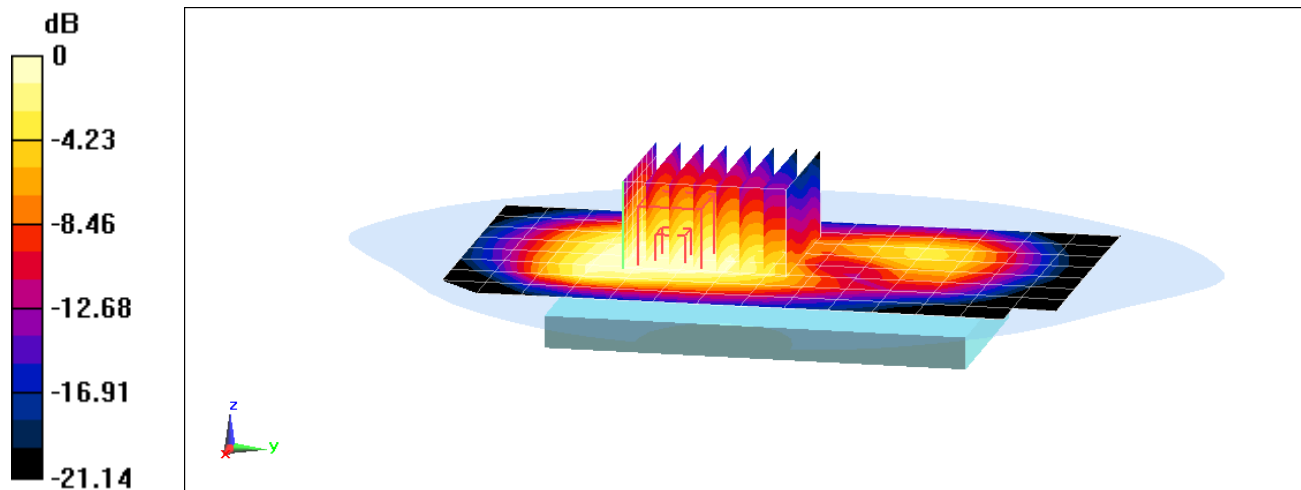

0 dB = 1.06 W/kg = 0.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03161

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1908.75$ MHz; $\sigma = 1.579$ S/m; $\epsilon_r = 53.355$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.6, 7.6, 7.6) @ 1908.75 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: PCS EVDO Rev.0, Body SAR, Front side, High ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.88 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.778 W/kg

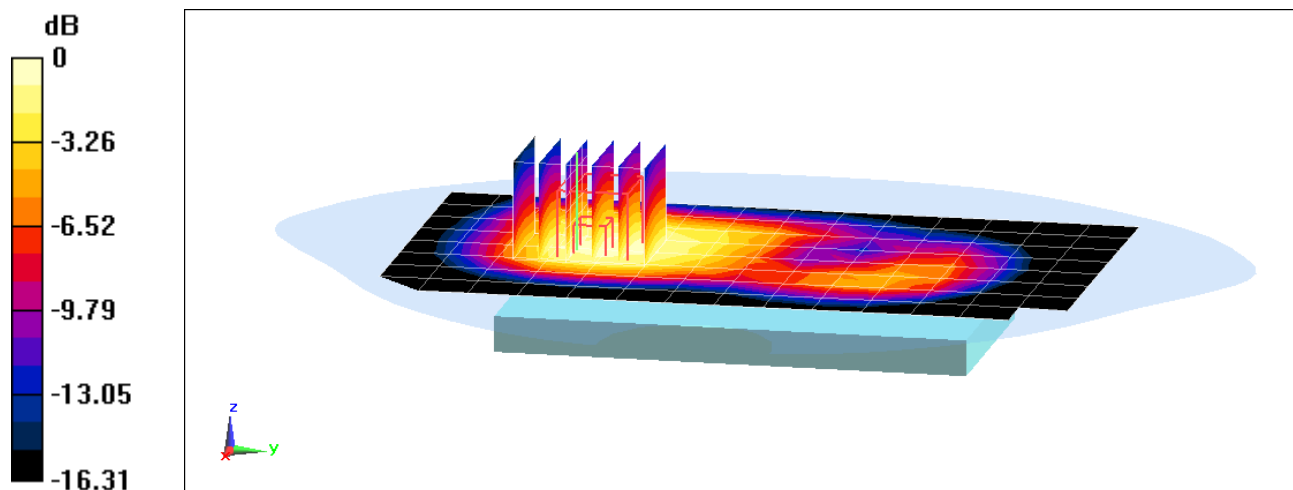

0 dB = 1.06 W/kg = 0.25 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.944 \text{ S/m}$; $\epsilon_r = 55.584$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-02-2018; Ambient Temp: 21.3°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7409; ConvF(9.82, 9.82, 9.82) @ 707.5 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.42 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.527 W/kg

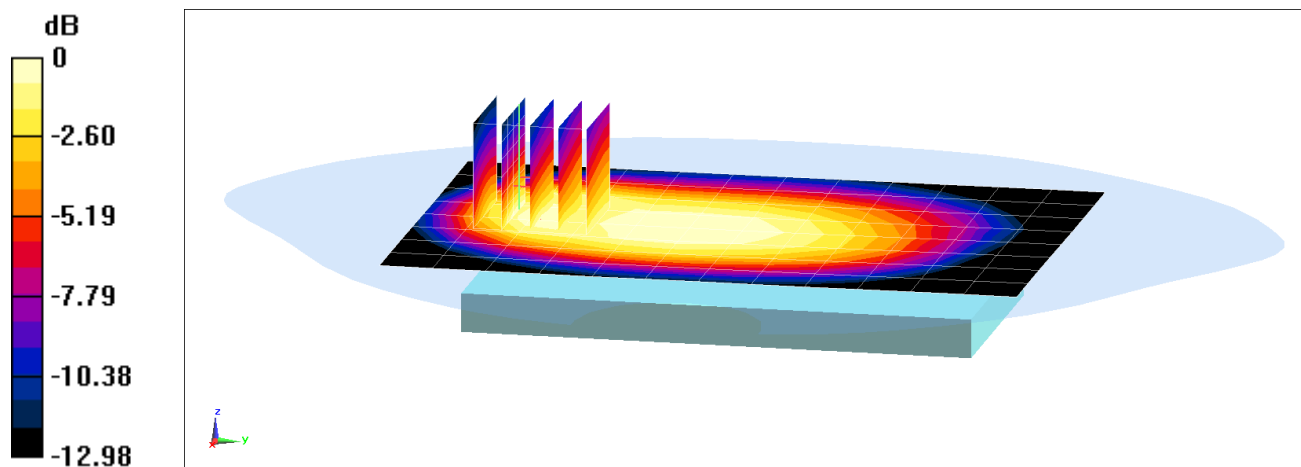

0 dB = 0.780 W/kg = -1.08 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$; $\sigma = 0.944 \text{ S/m}$; $\epsilon_r = 55.584$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-02-2018; Ambient Temp: 21.3°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7409; ConvF(9.82, 9.82, 9.82) @ 707.5 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 12, Body SAR, Right Edge, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (13x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.42 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.542 W/kg

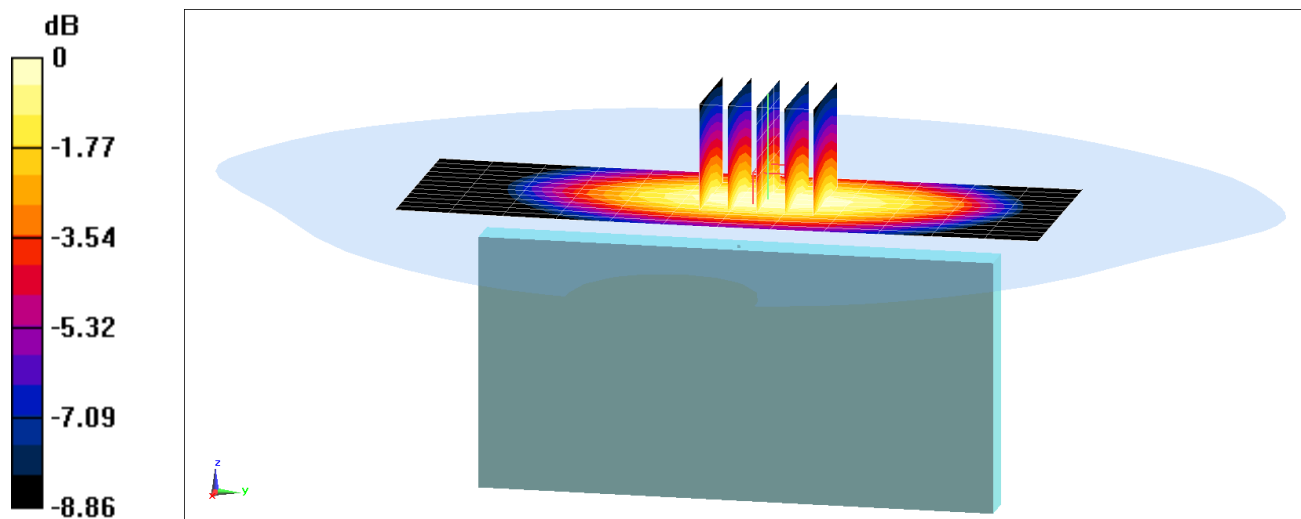

0 dB = 0.700 W/kg = -1.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.973 \text{ S/m}$; $\epsilon_r = 55.398$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-02-2018; Ambient Temp: 21.3°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7409; ConvF(9.82, 9.82, 9.82) @ 782 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.83 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.846 W/kg

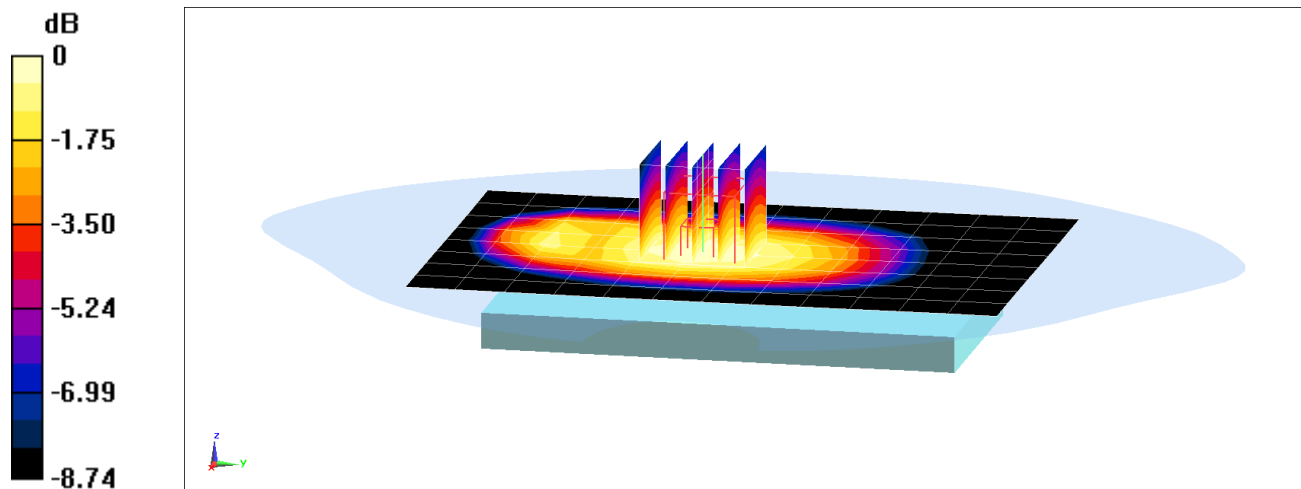

0 dB = 1.03 W/kg = 0.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 53.58$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 831.5 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.41 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.795 W/kg

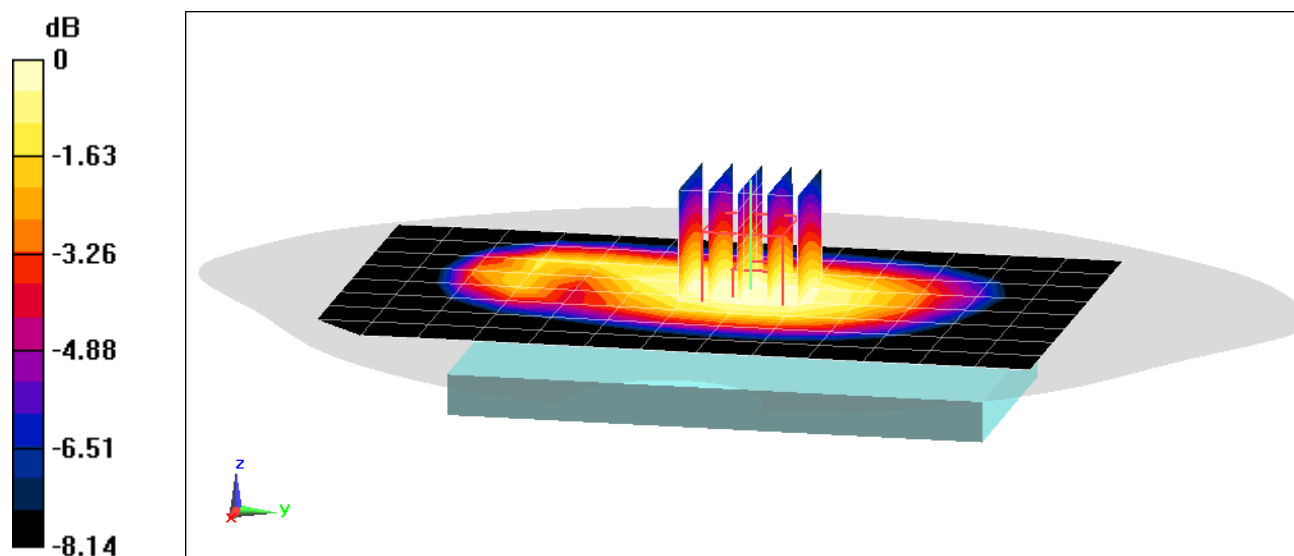

0 dB = 0.872 W/kg = -0.59 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.508$ S/m; $\epsilon_r = 51.886$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7409; ConvF(7.91, 7.91, 7.91) @ 1732.5 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.86 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.688 W/kg

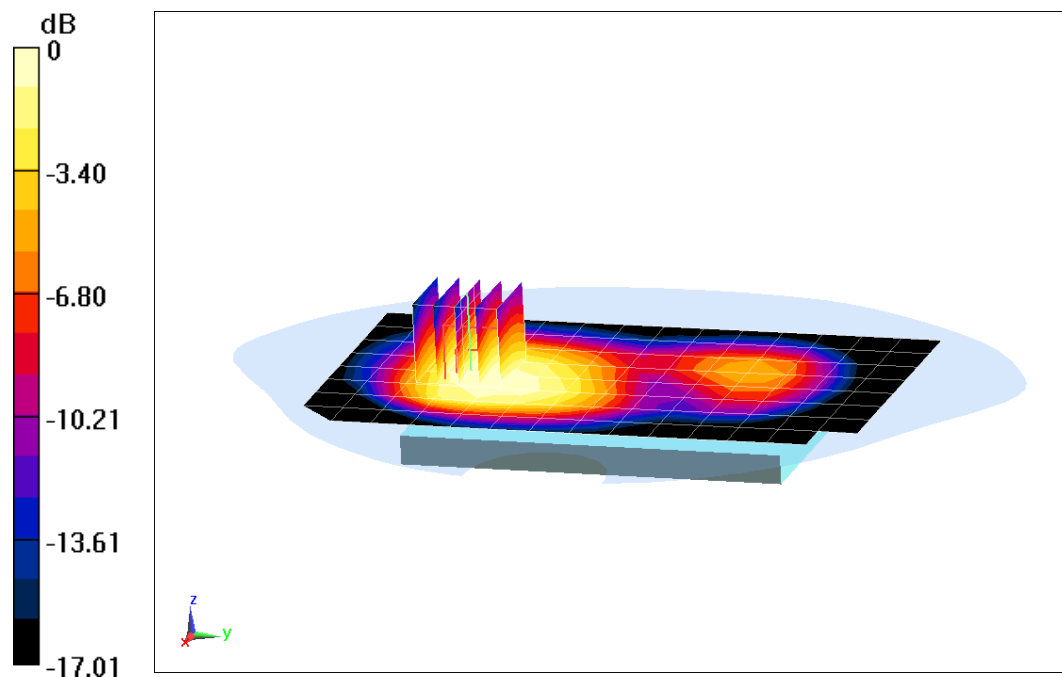

0 dB = 0.933 W/kg = -0.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03187

Communication System: UID 0, LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Body; Medium parameters used (interpolated):
 $f = 1732.5 \text{ MHz}$; $\sigma = 1.508 \text{ S/m}$; $\epsilon_r = 51.886$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7409; ConvF(7.91, 7.91, 7.91) @ 1732.5 MHz; Calibrated: 6/25/2018
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1334; Calibrated: 6/18/2018
Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759
Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 4 (AWS), Body SAR, Front side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.83 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.742 W/kg

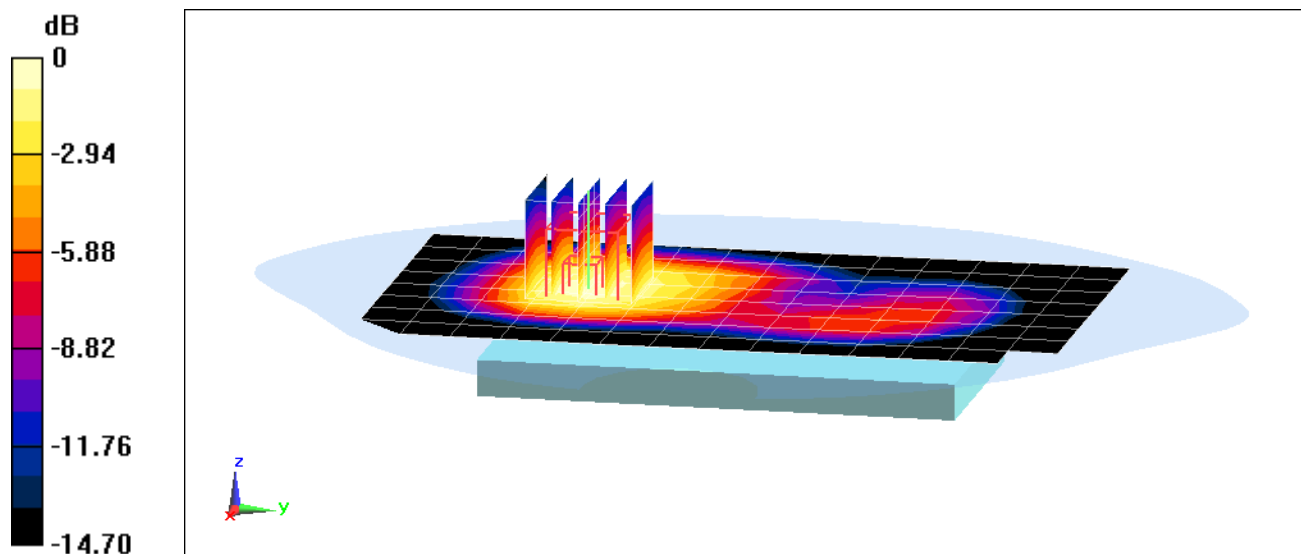

0 dB = 1.01 W/kg = 0.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$; $\sigma = 1.548 \text{ S/m}$; $\epsilon_r = 52.091$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-10-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1882.5 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.48 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.800 W/kg

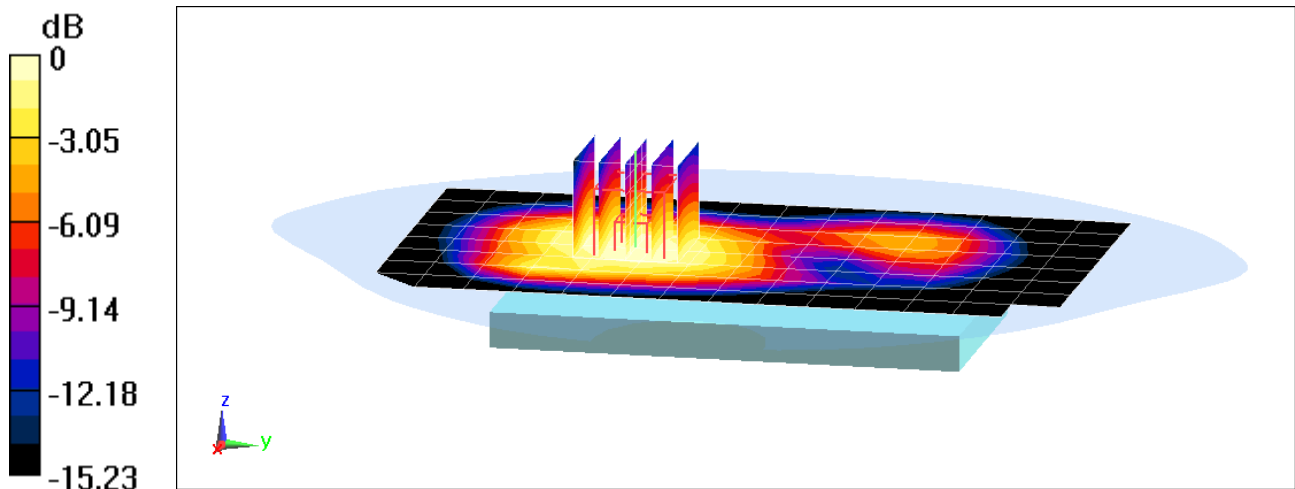

0 dB = 1.07 W/kg = 0.29 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, _LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$; $\sigma = 1.524 \text{ S/m}$; $\epsilon_r = 53.502$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.6, 7.6, 7.6) @ 1860 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 25 (PCS), Body SAR, Front side, Low.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.58 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.826 W/kg

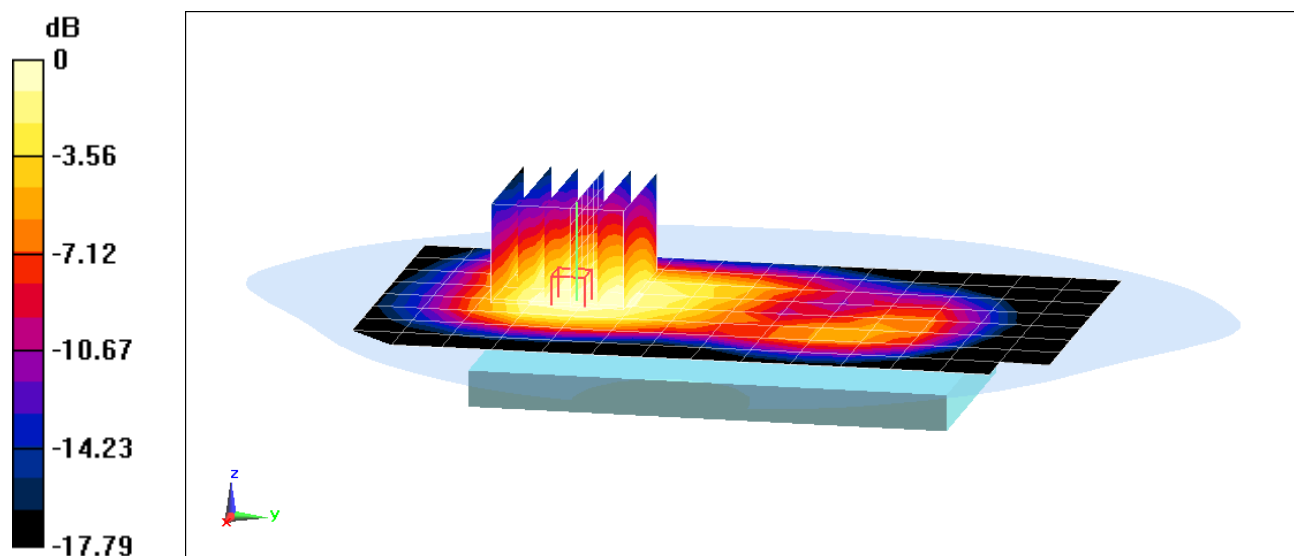

0 dB = 1.13 W/kg = 0.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, _LTE Band 41 (Class 2); Frequency: 2549.5 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used:

$f = 2550 \text{ MHz}$; $\sigma = 2.15 \text{ S/m}$; $\epsilon_r = 52.39$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-10-2018; Ambient Temp: 22.8°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2549.5 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 41 PC2, Body SAR, Back side, Low-Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x8x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.39 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.688 W/kg

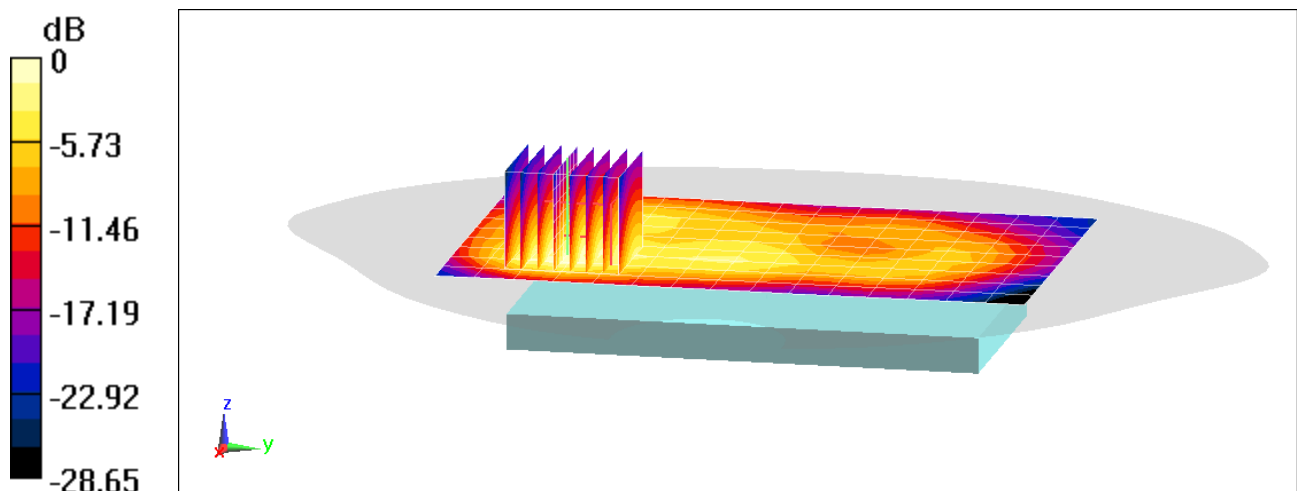

0 dB = 0.996 W/kg = -0.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03179

Communication System: UID 0, _LTE Band 41 (Class 2); Frequency: 2549.5 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used:

$f = 2550$ MHz; $\sigma = 2.091$ S/m; $\epsilon_r = 50.345$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-02-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2549.5 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Mode: LTE Band 41 PC2, Body SAR, Front side, Low-Mid.ch,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (9x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.86 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.693 W/kg

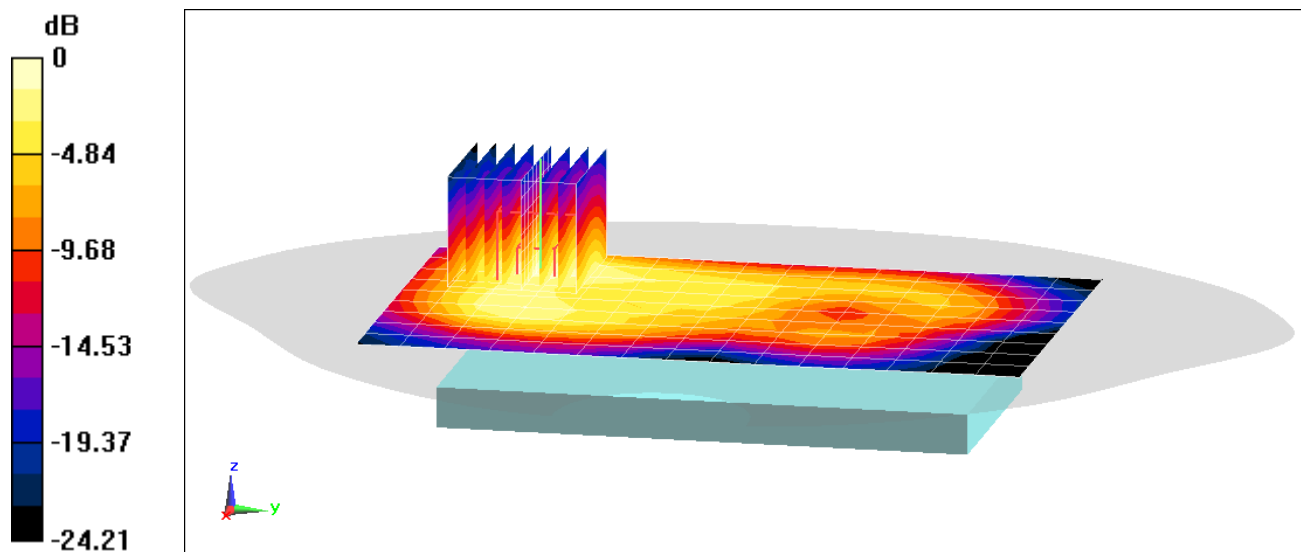

0 dB = 0.888 W/kg = -0.52 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: ZNFX220PM; Type: Portable Handset; Serial: 03260

Communication System: UID 0, _IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.959 \text{ S/m}$; $\epsilon_r = 50.675$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-02-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2437 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 6, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.57 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.356 W/kg

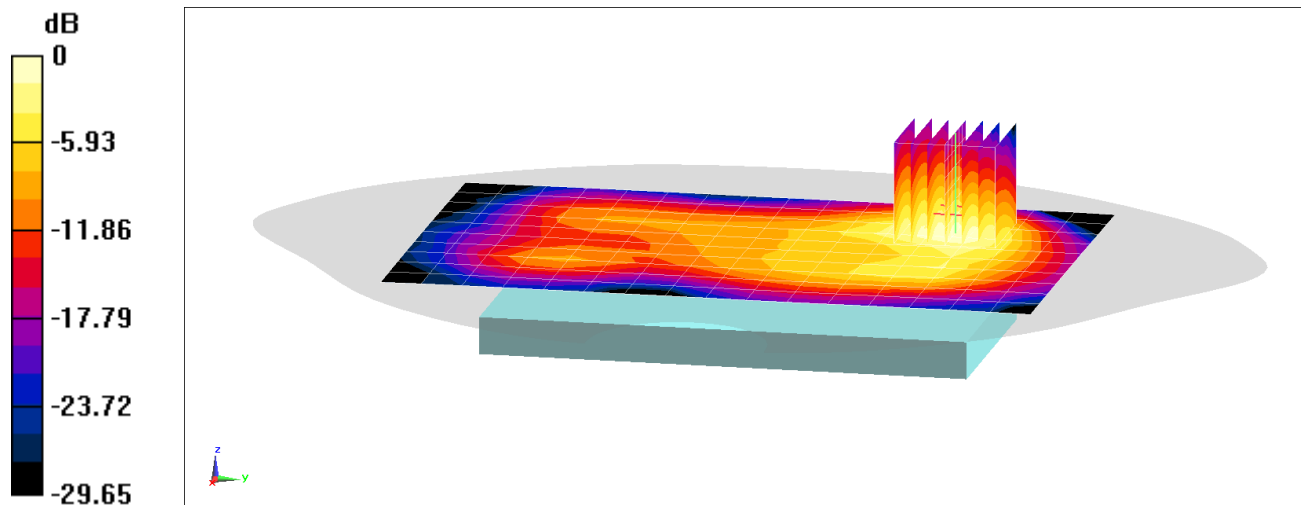

0 dB = 0.460 W/kg = -3.37 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.945$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-1-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(10.13, 10.13, 10.13) @ 750 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.45 W/kg

SAR(1 g) = 1.64 W/kg

Deviation(1 g) = 0.37%

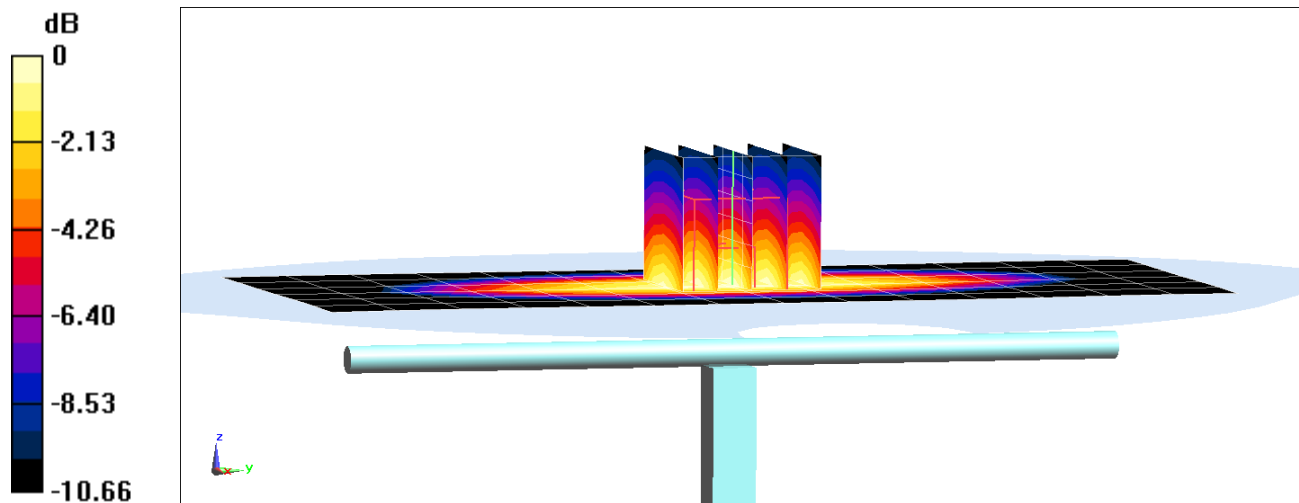

0 dB = 2.18 W/kg = 3.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.942 \text{ S/m}$; $\epsilon_r = 40.706$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2018; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42) @ 835 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 1.97 W/kg

Deviation(1 g) = 3.47%

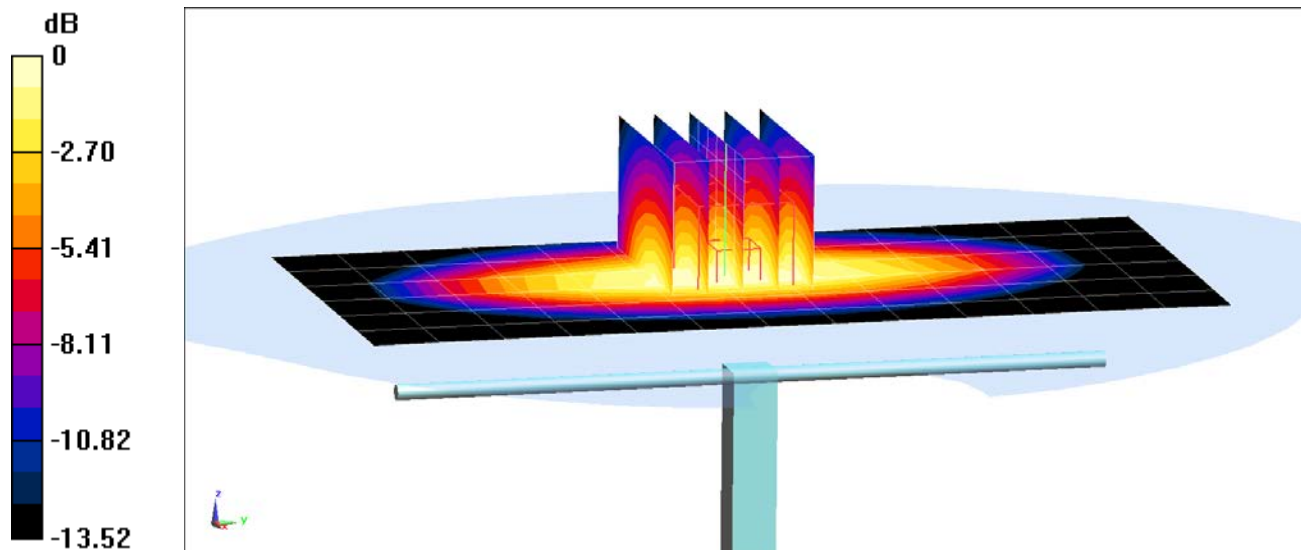

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 42.398$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-08-2018; Ambient Temp: 22.1°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42) @ 835 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 1.96 W/kg

Deviation(1 g) = 4.70%

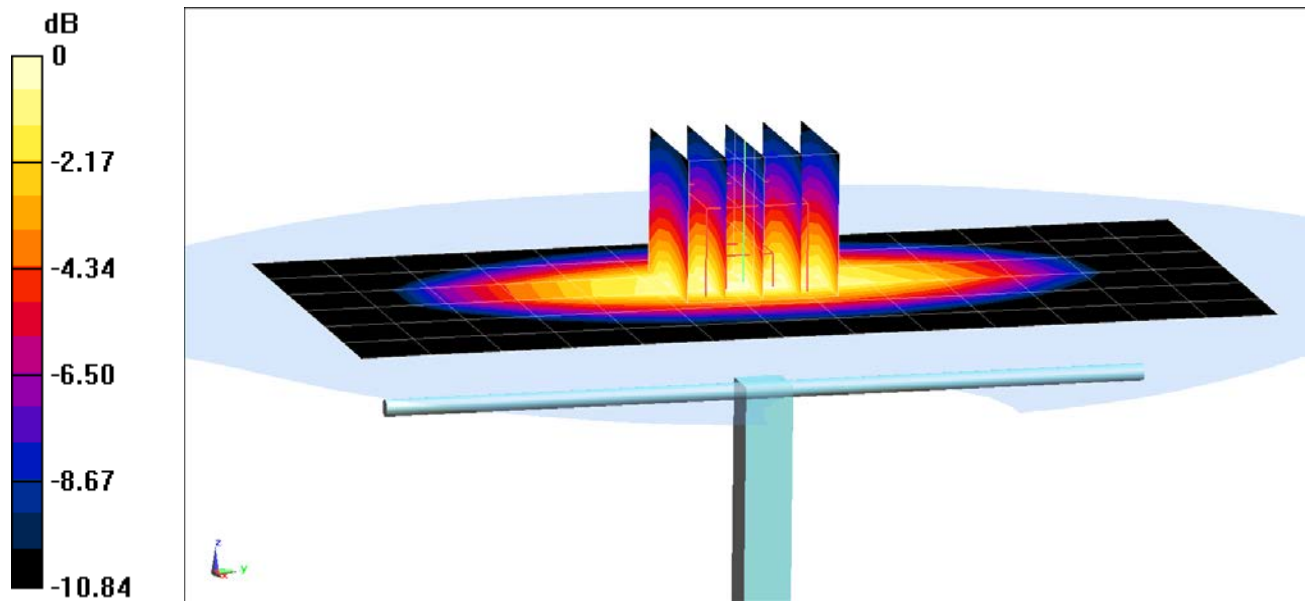

0 dB = 2.30 W/kg = 3.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.365 \text{ S/m}$; $\epsilon_r = 39.885$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 23.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(8.4, 8.4, 8.4) @ 1750 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.49 W/kg

SAR(1 g) = 3.7 W/kg

Deviation(1 g) = 2.21%

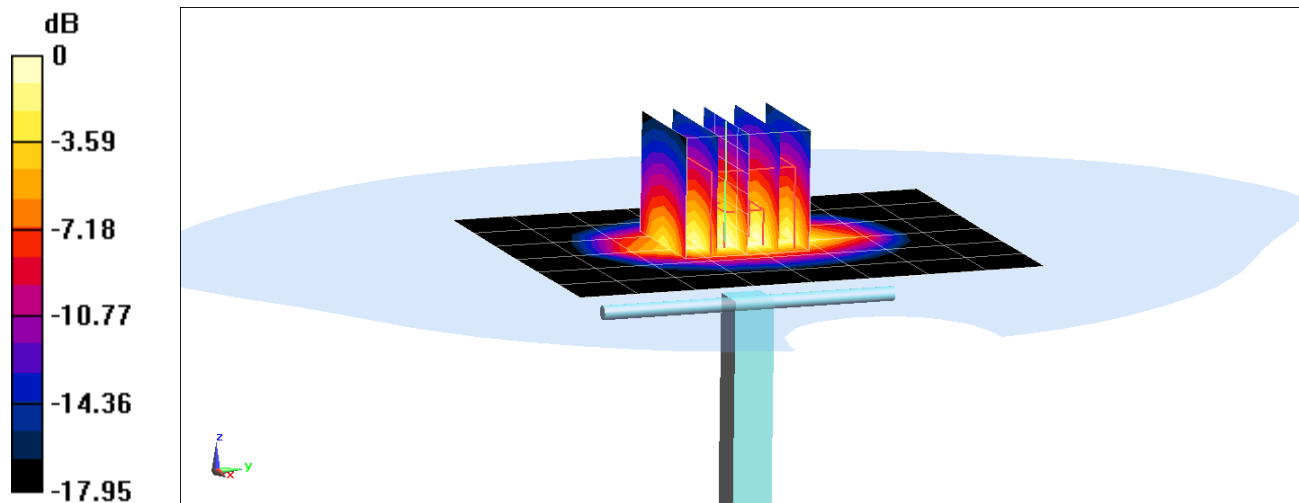

0 dB = 5.54 W/kg = 7.44 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.447 \text{ S/m}$; $\epsilon_r = 38.635$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2018; Ambient Temp: 23.9°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7410; ConvF(8.16, 8.16, 8.16) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.23 W/kg

SAR(1 g) = 4.03 W/kg

Deviation(1 g) = 0.50%

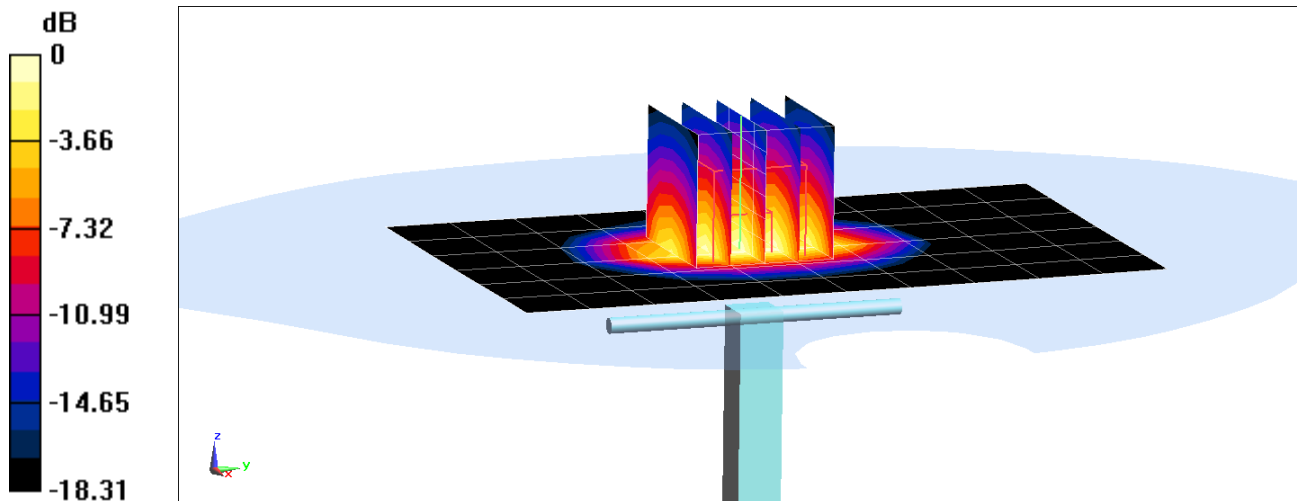

0 dB = 6.21 W/kg = 7.93 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.454 \text{ S/m}$; $\epsilon_r = 39.08$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-08-2018; Ambient Temp: 20.5°C; Tissue Temp: 21.40°C

Probe: EX3DV4 - SN7409; ConvF(8.05, 8.05, 8.05) @ 1900 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 8.20 W/kg

SAR(1 g) = 4.25 W/kg

Deviation(1 g) = 5.99%

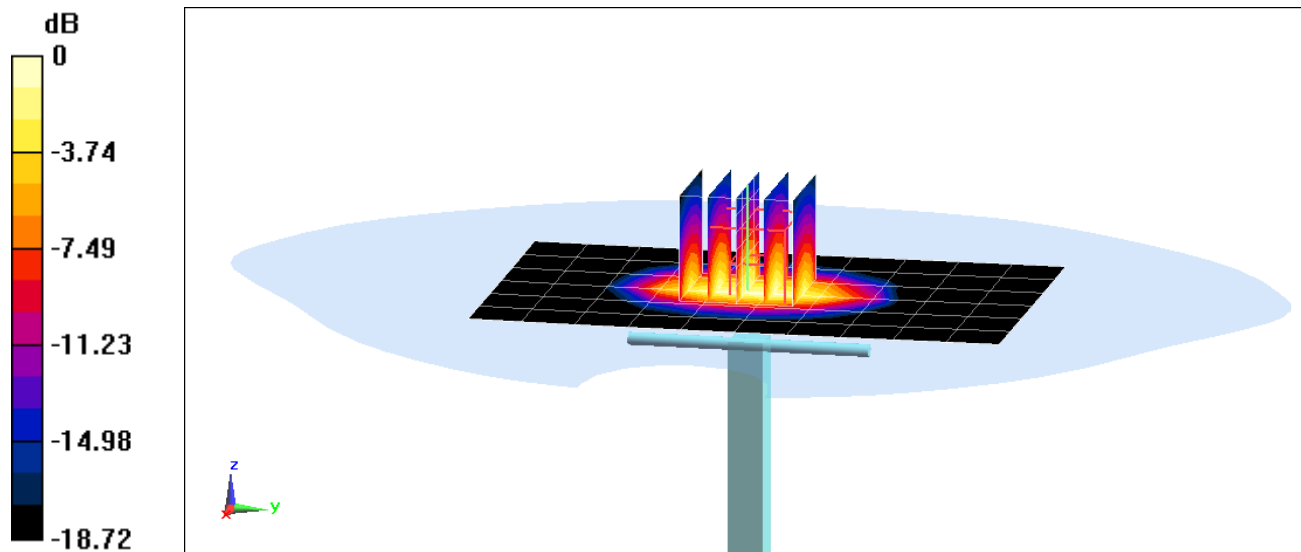

0 dB = 6.78 W/kg = 8.31 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.819 \text{ S/m}$; $\epsilon_r = 37.863$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-26-2018; Ambient Temp: 24.9°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(4.72, 4.72, 4.72) @ 2450 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.09 W/kg;

Deviation(1 g) = -3.42%

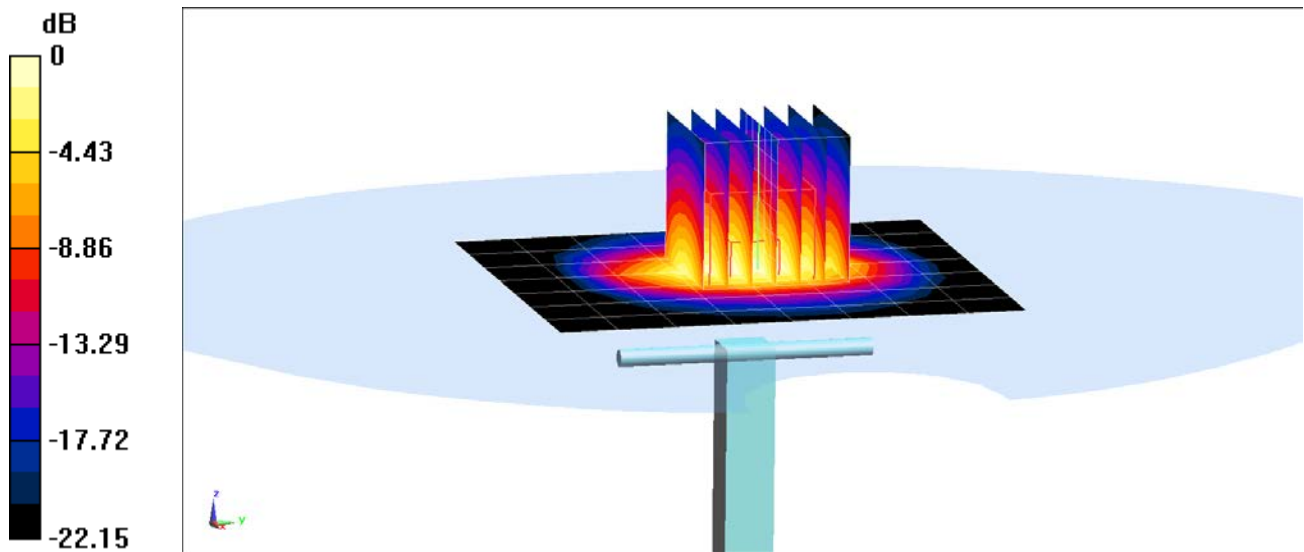

0 dB = 6.63 W/kg = 8.22 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.585$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-24-2018; Ambient Temp: 20.9°C; Tissue Temp: 20.4°C

Probe: ES3DV3 - SN3213; ConvF(4.53, 4.53, 4.53) @ 2600 MHz; Calibrated: 2/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.93 W/kg

Deviation(1 g) = 6.08%

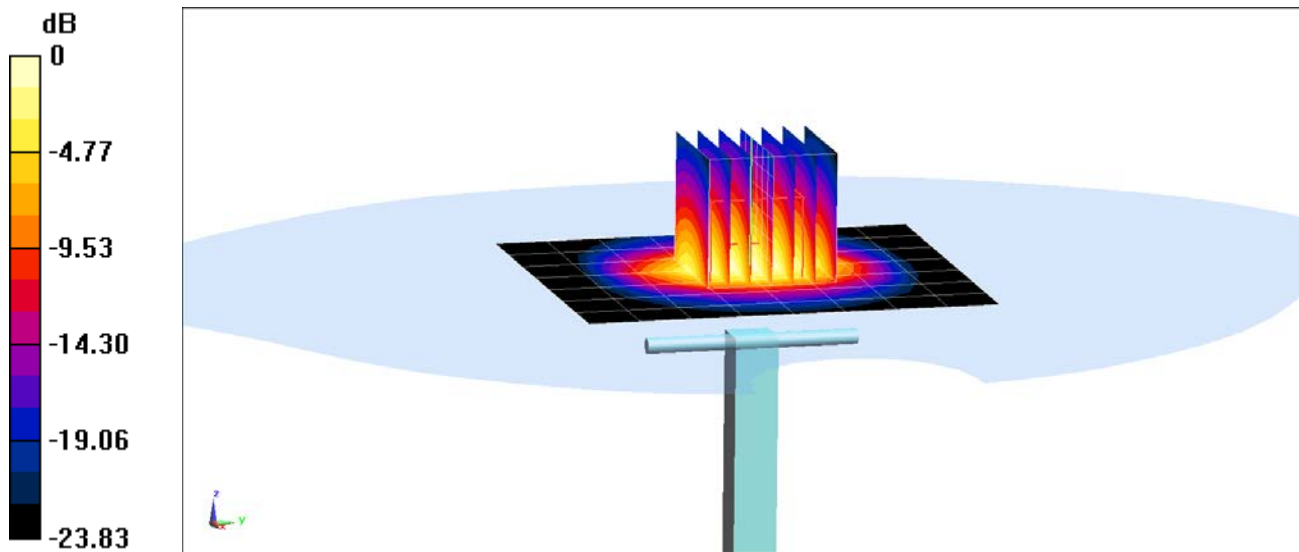

0 dB = 7.49 W/kg = 8.74 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55.531$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-02-2018; Ambient Temp: 21.3°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7409; ConvF(9.82, 9.82, 9.82) @ 750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

750 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 1.72 W/kg

Deviation(1 g) = 0.23%

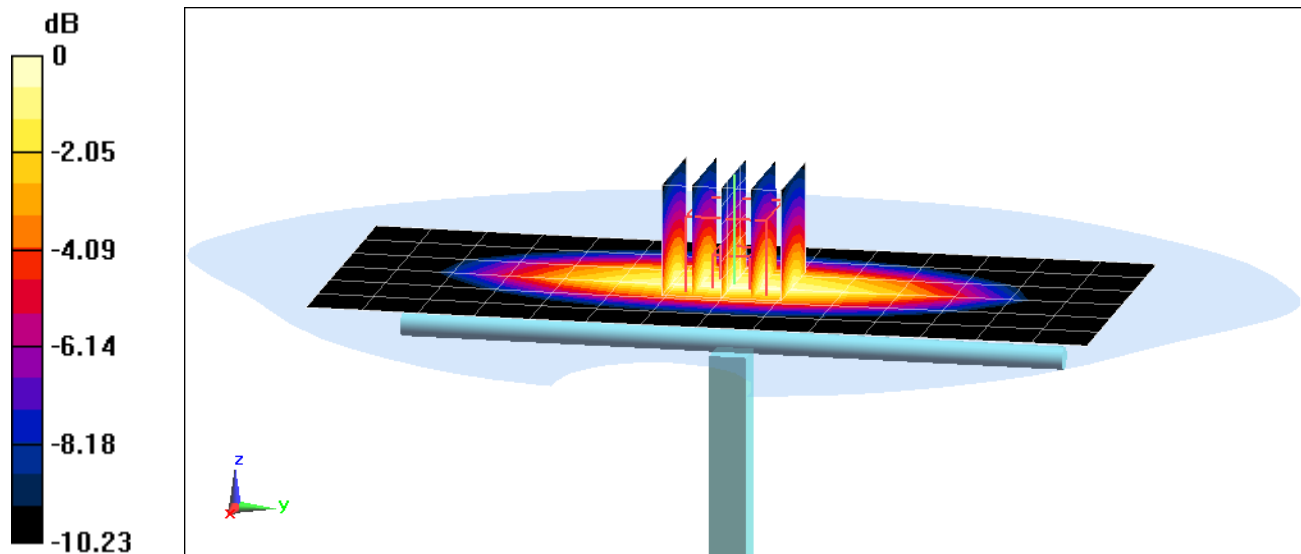

0 dB = 2.30 W/kg = 3.62 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.978 \text{ S/m}$; $\epsilon_r = 53.062$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 09-26-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 835 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 2 W/kg

Deviation(1 g) = 2.99%

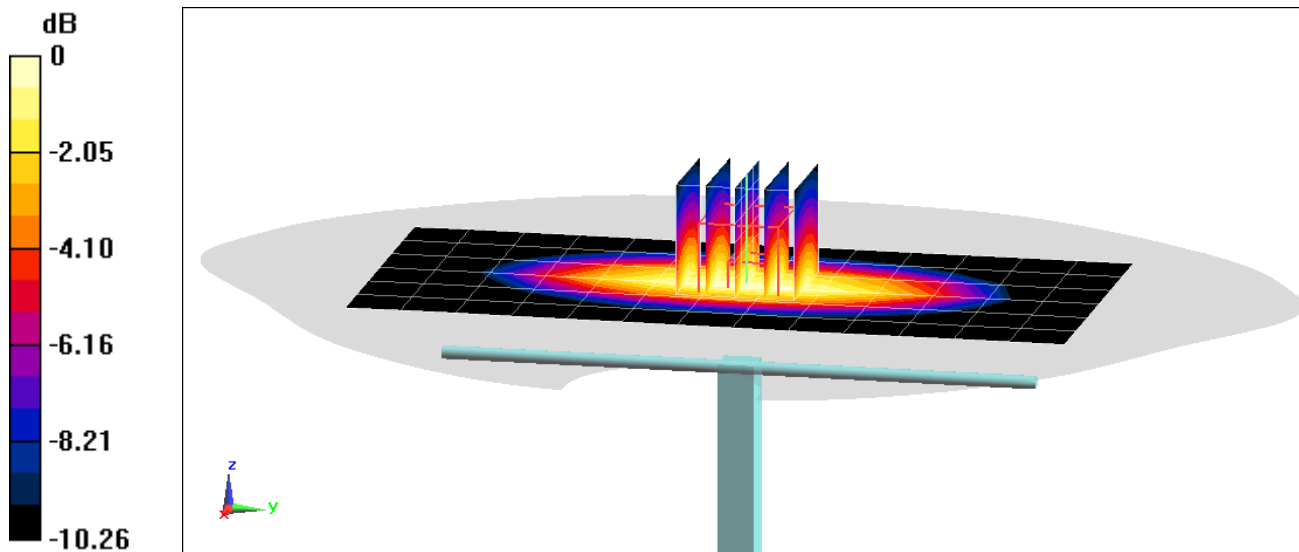

0 dB = 2.33 W/kg = 3.67 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d047

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.984 \text{ S/m}$; $\epsilon_r = 53.553$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 10-01-2018; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: ES3DV3 - SN3347; ConvF(6.37, 6.37, 6.37) @ 835 MHz; Calibrated: 3/27/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.91 W/kg

Deviation(1 g) = -0.21%

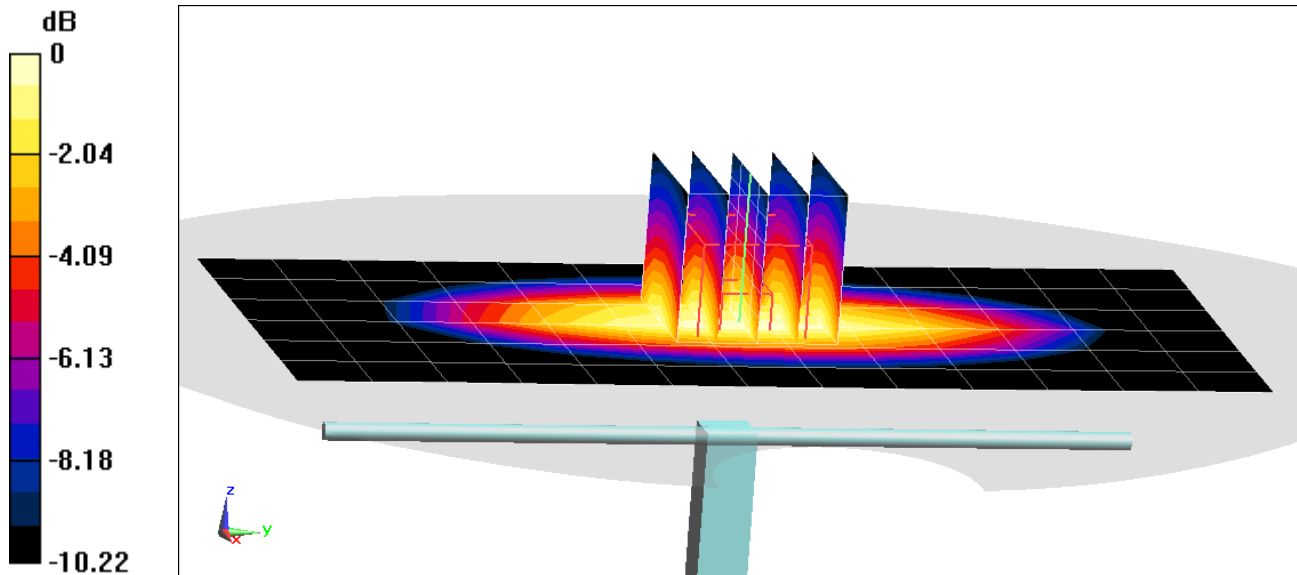

0 dB = 2.22 W/kg = 3.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.527 \text{ S/m}$; $\epsilon_r = 51.819$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-01-2018; Ambient Temp: 20.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7409; ConvF(7.91, 7.91, 7.91) @ 1750 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

1750 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.31 W/kg

SAR(1 g) = 3.93 W/kg

Deviation(1 g) = 6.22%

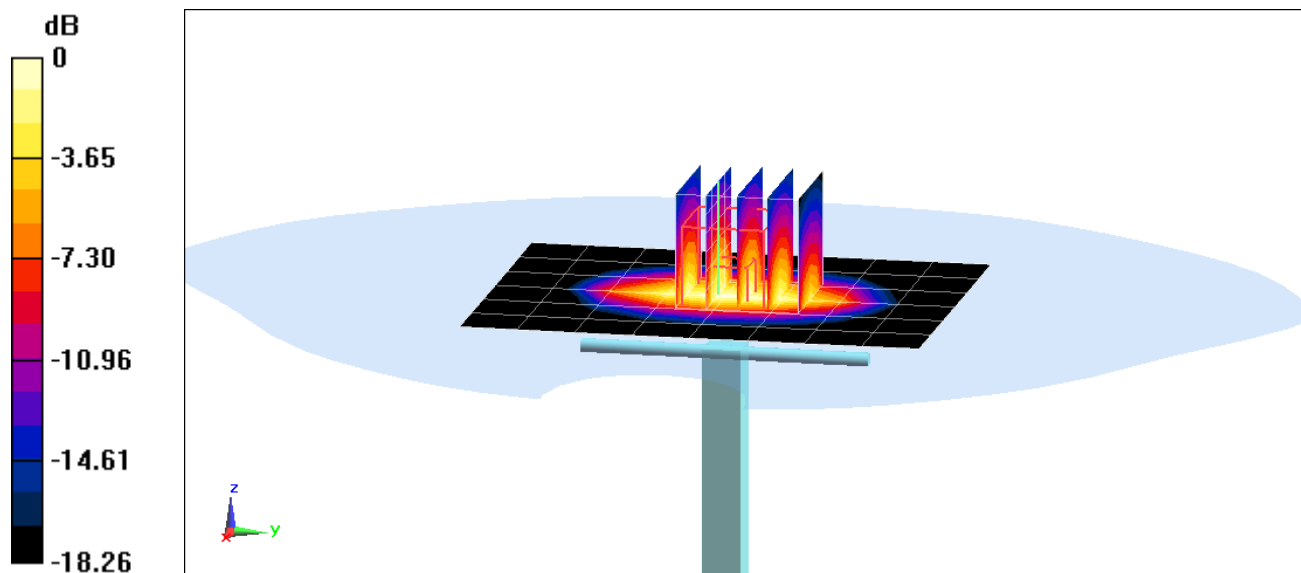

0 dB = 6.06 W/kg = 7.82 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.569 \text{ S/m}$; $\epsilon_r = 53.375$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09-27-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7409; ConvF(7.6, 7.6, 7.6) @ 1900 MHz; Calibrated: 6/25/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2018

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.90 W/kg

SAR(1 g) = 4.25 W/kg

Deviation(1 g) = 5.99%

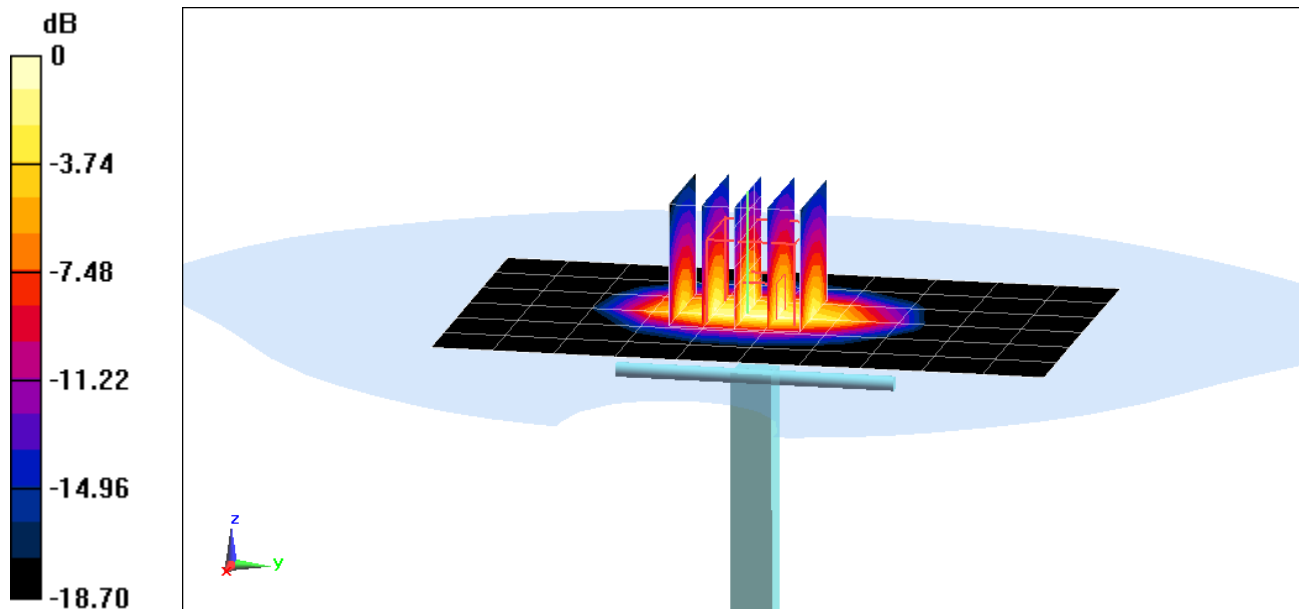

0 dB = 6.60 W/kg = 8.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.567 \text{ S/m}$; $\epsilon_r = 52.055$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-10-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(7.78, 7.78, 7.78) @ 1900 MHz; Calibrated: 7/20/2018

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2018

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

1900 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.63 W/kg

SAR(1 g) = 4.18 W/kg

Deviation(1 g) = 4.24%

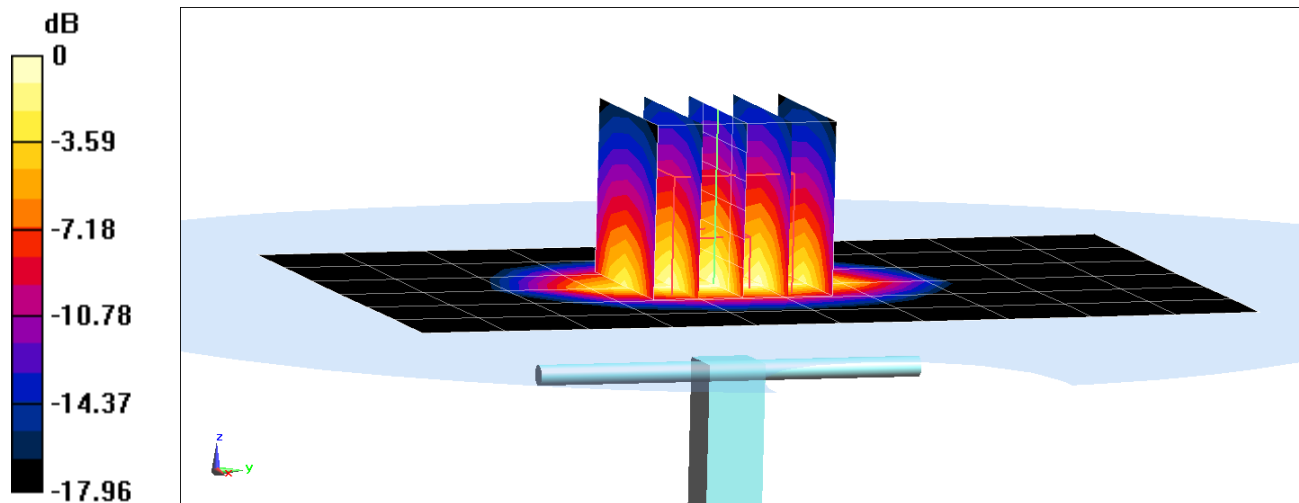

0 dB = 6.49 W/kg = 8.12 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.976 \text{ S/m}$; $\epsilon_r = 50.638$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-02-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3319; ConvF(4.51, 4.51, 4.51) @ 2450 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

2450 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 4.87 W/kg

Deviation(1 g) = -2.79%

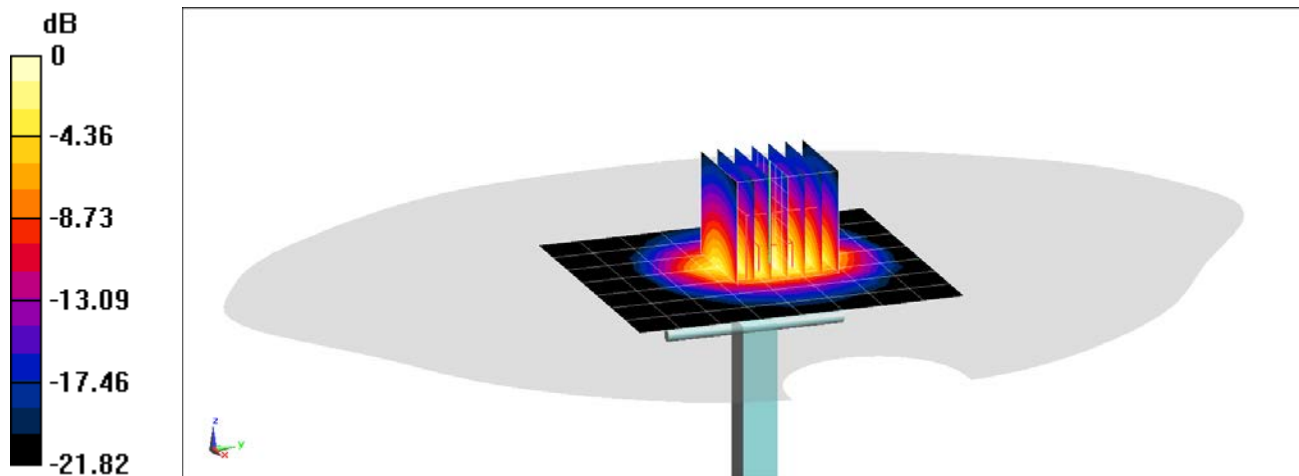

0 dB = 6.45 W/kg = 8.10 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.134 \text{ S/m}$; $\epsilon_r = 50.295$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-02-2018; Ambient Temp: 22.8°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2600 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.39 W/kg

Deviation(1 g) = -1.46%

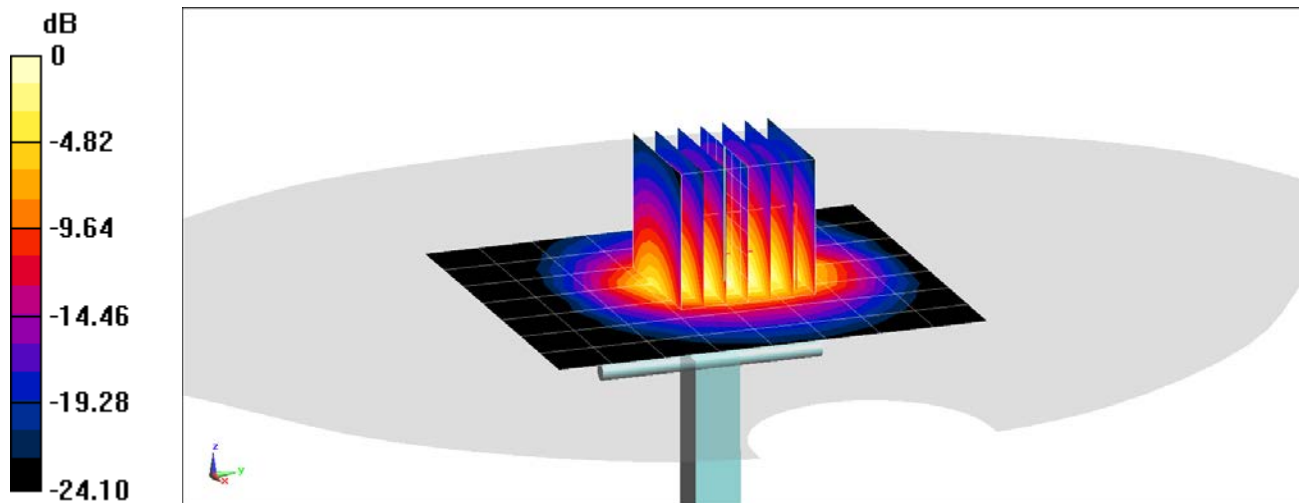

0 dB = 7.02 W/kg = 8.46 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.192$ S/m; $\epsilon_r = 52.189$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 10-10-2018; Ambient Temp: 22.8°C; Tissue Temp: 22.2°C

Probe: ES3DV3 - SN3319; ConvF(4.33, 4.33, 4.33) @ 2600 MHz; Calibrated: 3/13/2018

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/7/2018

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

2600 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 5.59 W/kg

Deviation(1 g) = 2.19%

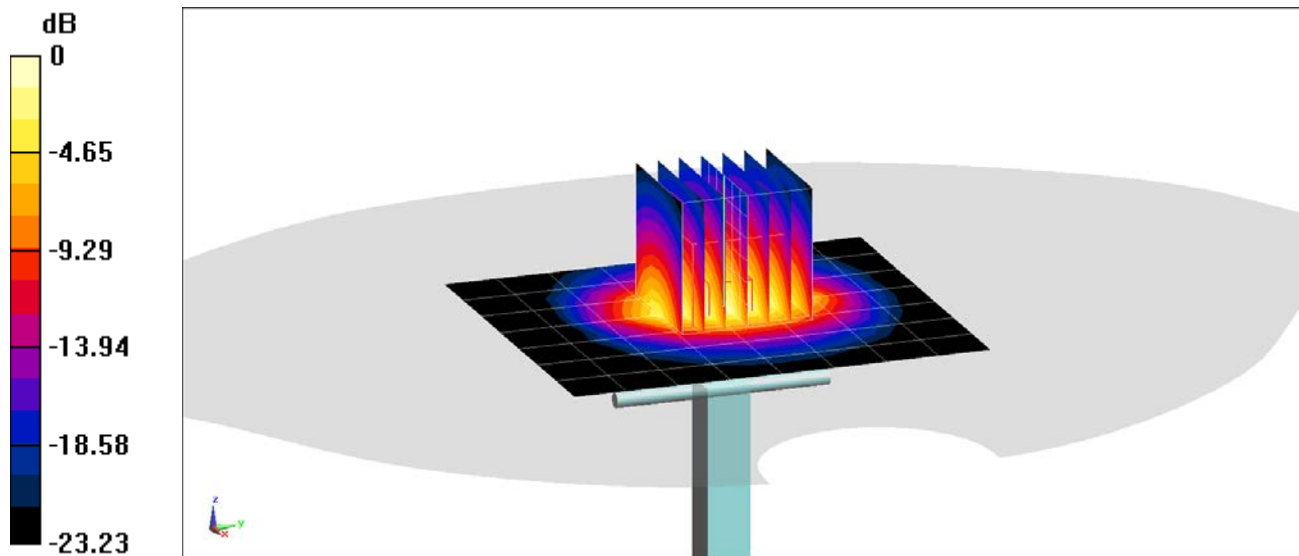

APPENDIX C: PROBE CALIBRATION



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1161_Jul16**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1161**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 13, 2016**

✓PN
 8/9/16

Extended
 BN
 7/18/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Claudio Leubler** Name: **Claudio Leubler** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.9 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.17 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.1 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.16 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.43 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.53 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	55.6 Ω - 0.9 j Ω
Return Loss	- 25.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	50.2 Ω - 4.0 j Ω
Return Loss	- 28.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.033 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 19, 2015

DASY5 Validation Report for Head TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 40.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 58.07 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

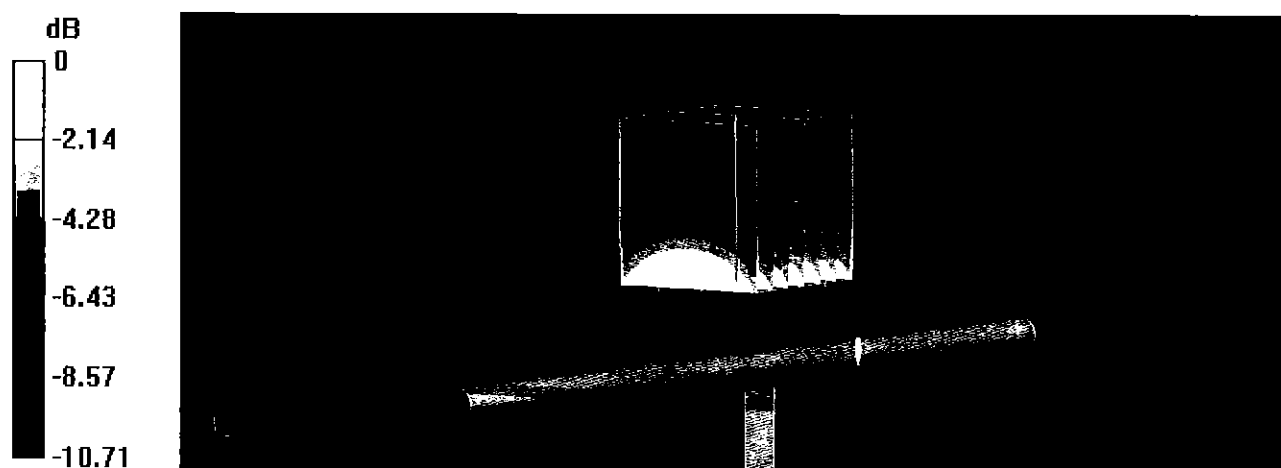


0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Head TSL

13 Jul 2016 09:55:53
 [CH1] S11 1 U FS 1: 55.615 Ω -949.22 m Ω 223.56 pF 750.000 000 MHz

*
 Del
 CA

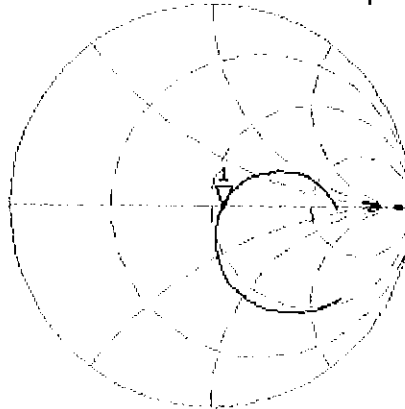

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.361 dB 750.000 000 MHz

CA

Avg
 16

H1d

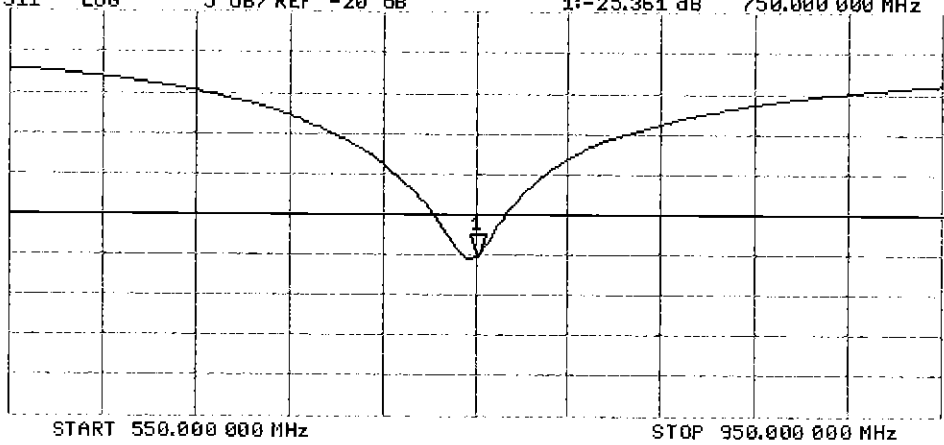

DASY5 Validation Report for Body TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1161

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 55.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.99, 9.99, 9.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.33 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.22 W/kg

SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.87 W/kg




0 dB = 2.87 W/kg = 4.58 dBW/kg

Impedance Measurement Plot for Body TSL

13 Jul 2016 13:16:34
 [CH1] S11 1 U FS 1: 50.244 Ω -3.9707 Ω 53.443 pF 750.000 000 MHz

*
 Del
 CA

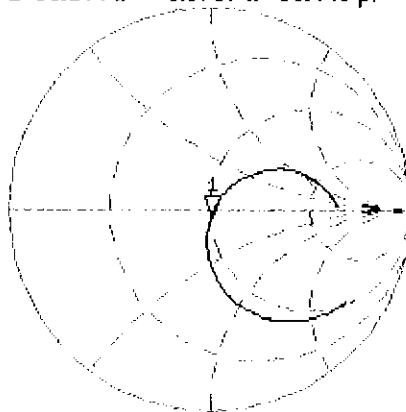


Avg
 16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.995 dB 750.000 000 MHz

CA

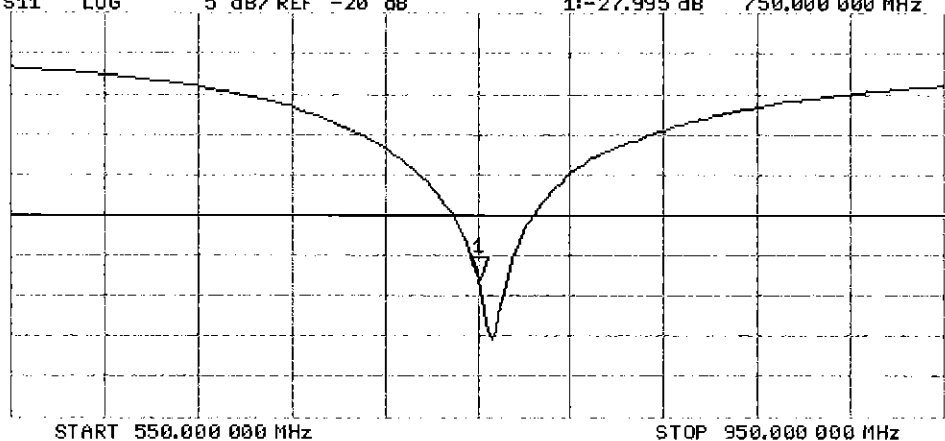

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

Certification of Calibration

Object D750V3 – SN: 1161

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 12, 2017

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/1/2017	Annual	6/1/2018	MY53401181
Agilent	8753ES	S-Parameter Network Analyzer	10/26/2016	Annual	10/26/2017	US39170118
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2017	Annual	3/8/2018	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/10/2017	Annual	5/10/2018	1070
SPEAG	ES3DV3	SAR Probe	11/15/2016	Annual	11/15/2017	3334
SPEAG	ES3DV3	SAR Probe	3/14/2017	Annual	3/14/2018	3319
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1207364
Anritsu	MA2411B	Pulse Power Sensor	2/10/2017	Annual	2/10/2018	1339018
Anritsu	ML2495A	Power Meter	10/16/2015	Biennial	10/16/2017	941001
Agilent	N5182A	MXG Vector Signal Generator	2/28/2017	Annual	2/28/2018	MY47420800
Seekonk	NC-100	Torque Wrench	11/6/2015	Biennial	11/6/2017	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Head (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.63	1.65	0.98%	1.08	1.09	1.11%	55.6	54.5	1.1	-0.9	-4.0	3.1	-25.4	-24.8	2.40%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2017	1.033	1.69	1.75	3.60%	1.11	1.17	5.79%	50.2	48.0	2.2	-4.0	-6.9	2.9	-28.0	-23.9	14.60%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

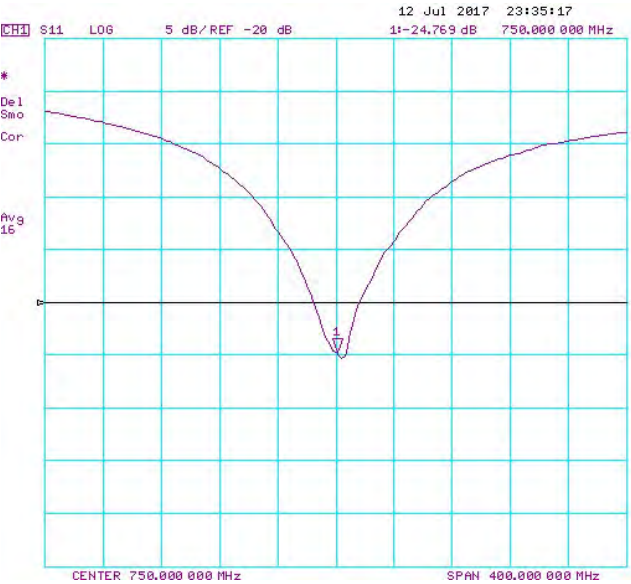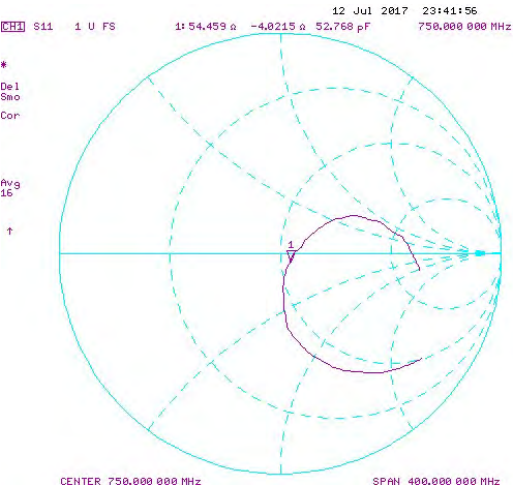

Impedance & Return-Loss Measurement Plot for Body TSL

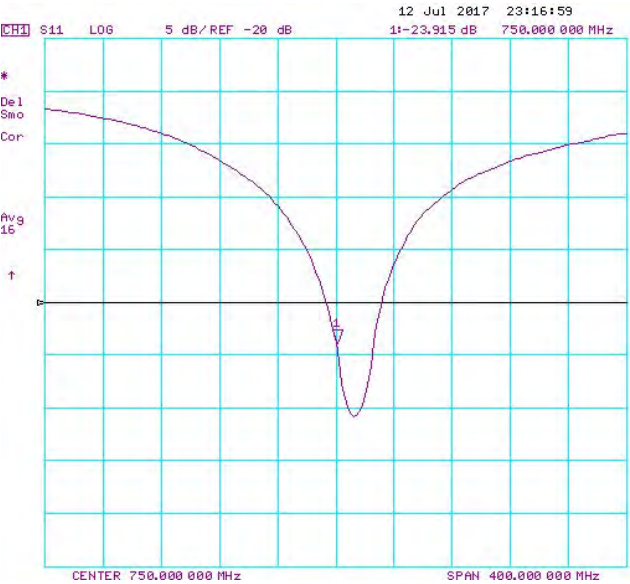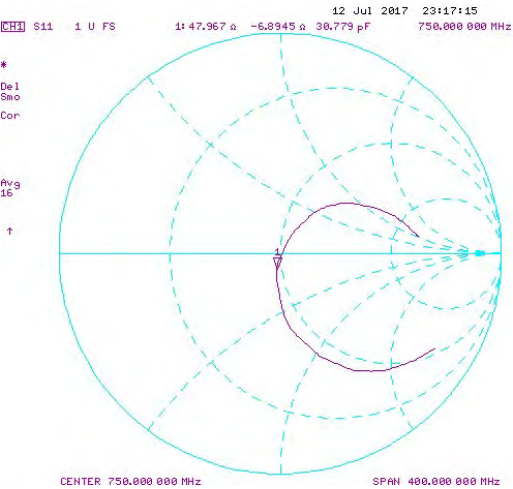

Certification of Calibration

Object D750V3 – SN: 1161

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: 07/12/2018

Description: SAR Validation Dipole at 750 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	ML2495A	Power Meter	11/28/2017	Annual	11/28/2018	1039008
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1207364
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2018	Annual	2/9/2019	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/12/2017	Annual	9/12/2018	1091
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3213
SPEAG	ES3DV3	SAR Probe	6/25/2018	Annual	6/25/2019	7409

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 3-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2018	1.033	1.63	1.58	-3.30%	1.08	1.03	-4.45%	55.6	53.2	-2.4	-0.9	-4.3	-3.4	-25.4	-25.9	-2.00%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/13/2016	7/12/2018	1.033	1.69	1.74	3.20%	1.11	1.15	3.98%	50.2	49.0	-1.2	-4.0	-5.9	-1.9	-28.0	-24.4	12.90%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

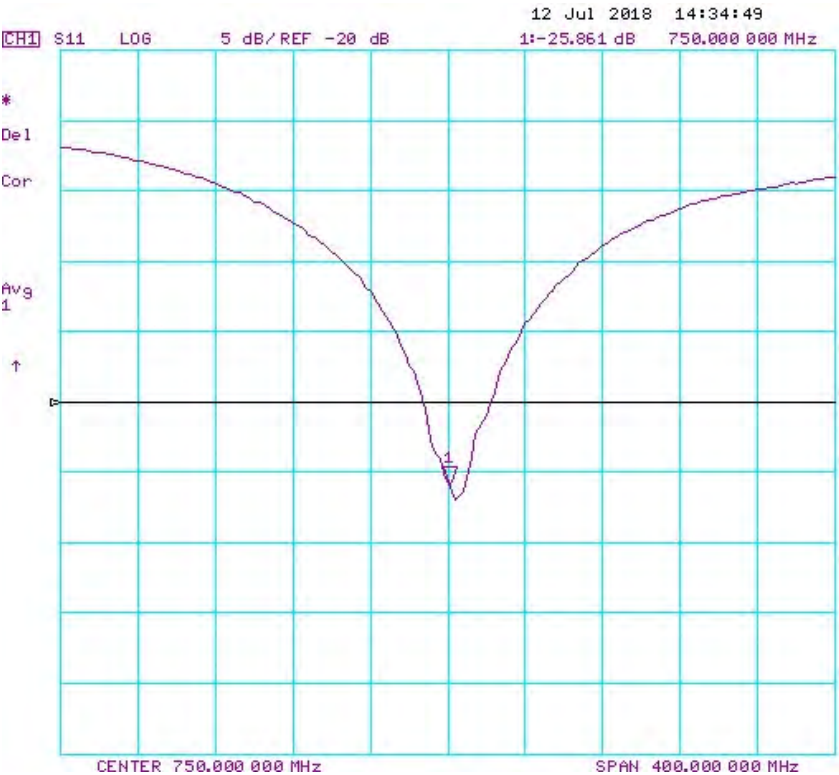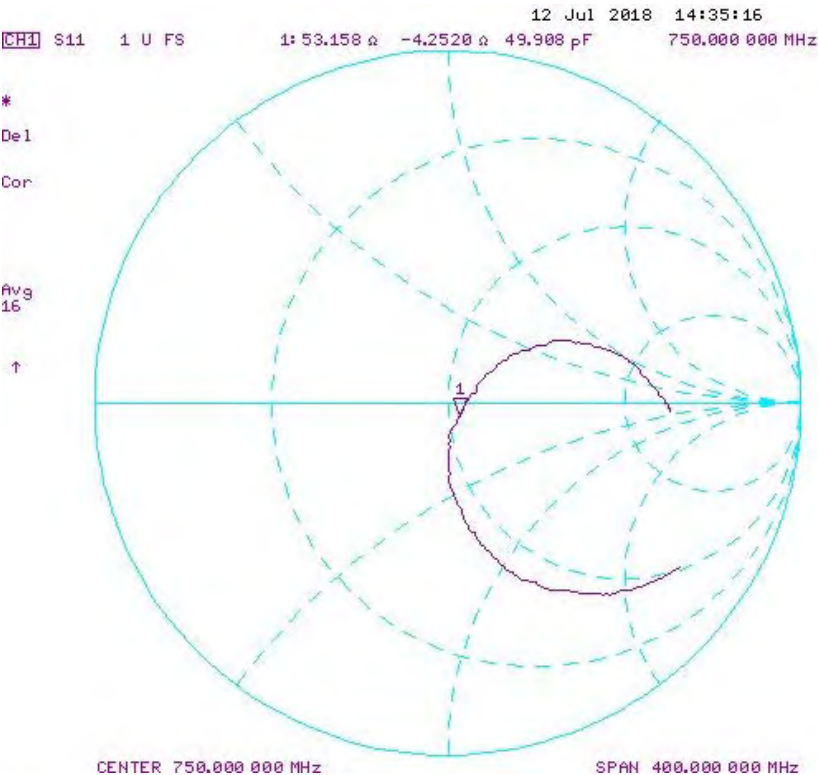

Impedance & Return-Loss Measurement Plot for Body TSL

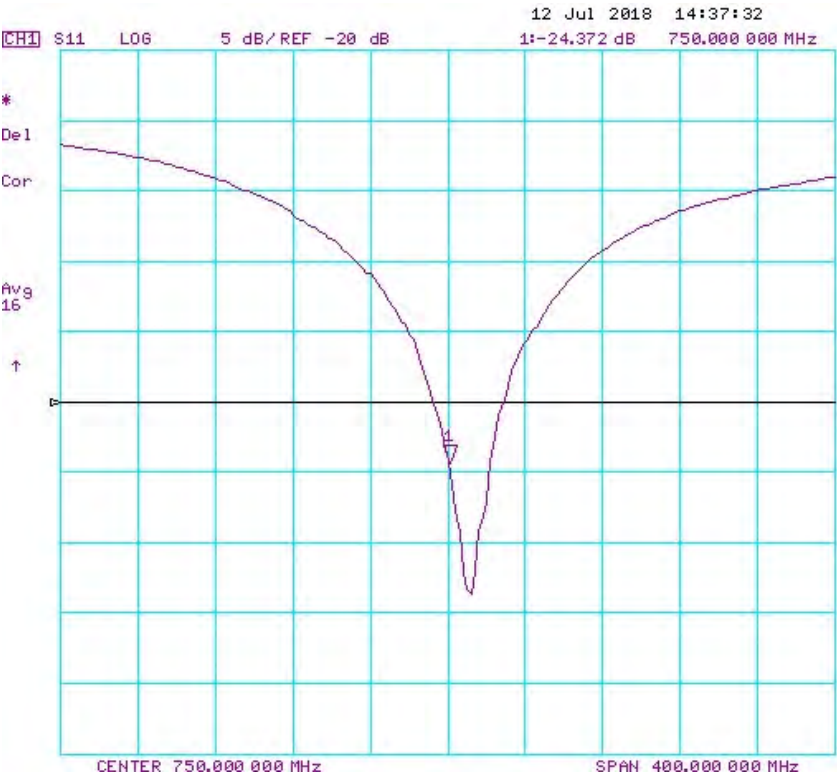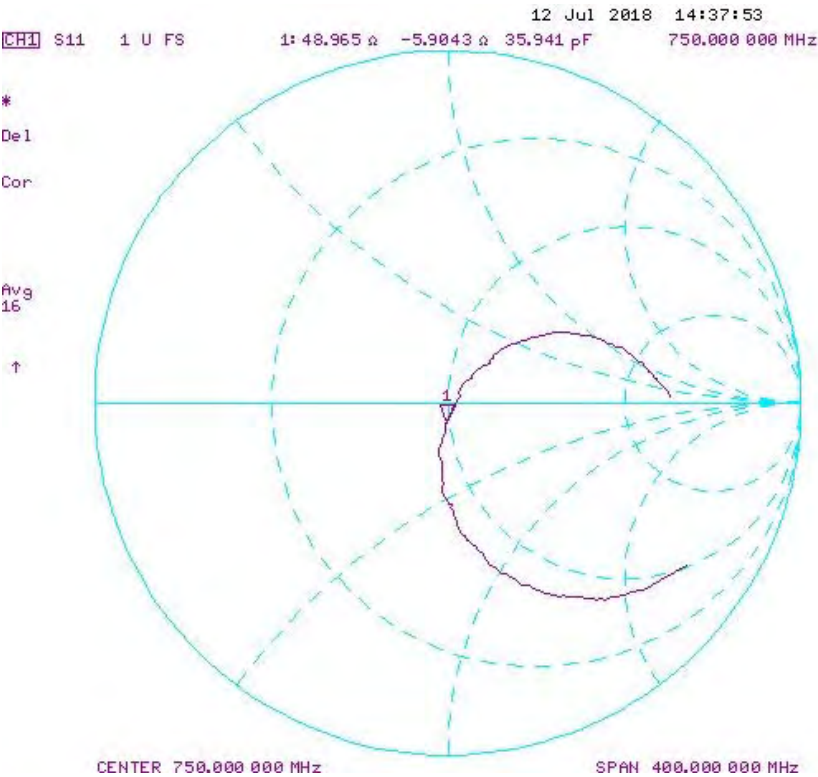



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d133_Jul17**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d133**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 11, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Johannes Kurikka** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

[Signature]

[Signature]

Issued: July 12, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.8 \pm 6 %	0.91 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.52 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.54 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.8 \pm 6 %	1.01 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.41 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.16 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 Ω - 2.9 j Ω
Return Loss	- 30.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.7 Ω - 6.8 j Ω
Return Loss	- 22.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.196 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

DASY5 Validation Report for Head TSL

Date: 11.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d133

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.07, 10.07, 10.07); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 62.84 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.74 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 3.28 W/kg

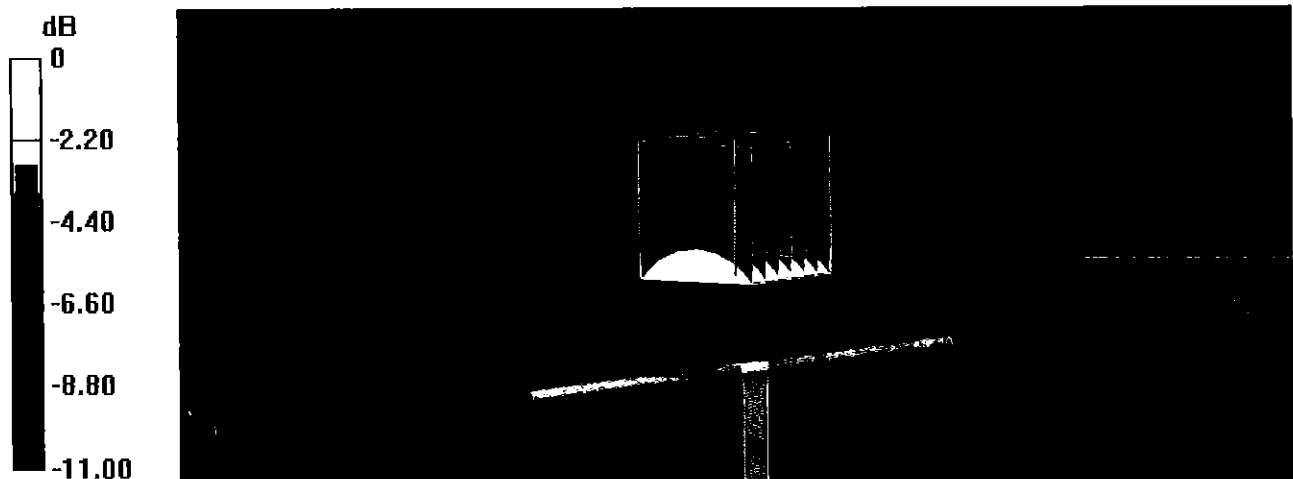

0 dB = 3.28 W/kg = 5.16 dBW/kg

Impedance Measurement Plot for Head TSL

11 Jul 2017 13:58:45
 [CH1] S11 1 U FS 1: 50.998 Ω -2.8750 Ω 66.297 pF 835.000 000 MHz


*

De1

CA

Avg
16

H1d

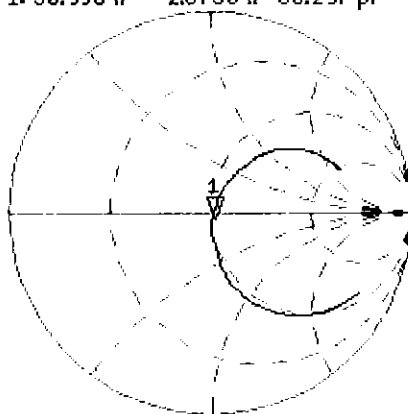


CH2 S11 LOG 5 dB/REF -20 dB 1:-30.411 dB 835.000 000 MHz

CA

Avg
16

H1d

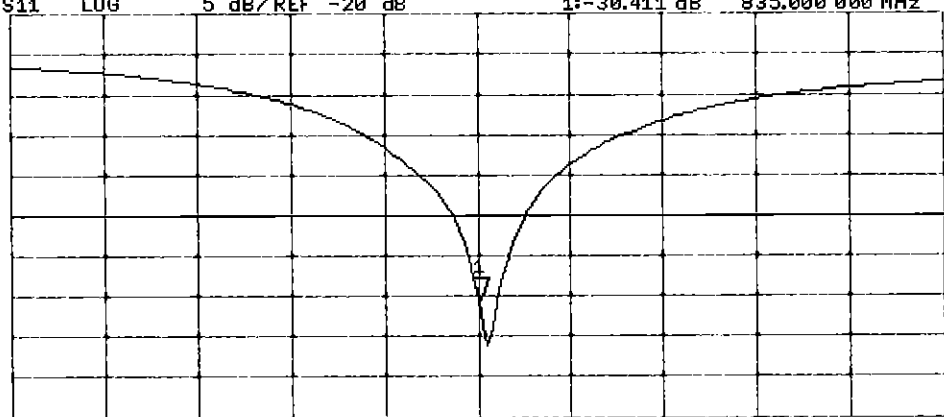

START 635.000 000 MHz

STOP 1 835.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 11.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d133

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.2, 10.2, 10.2); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.25 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

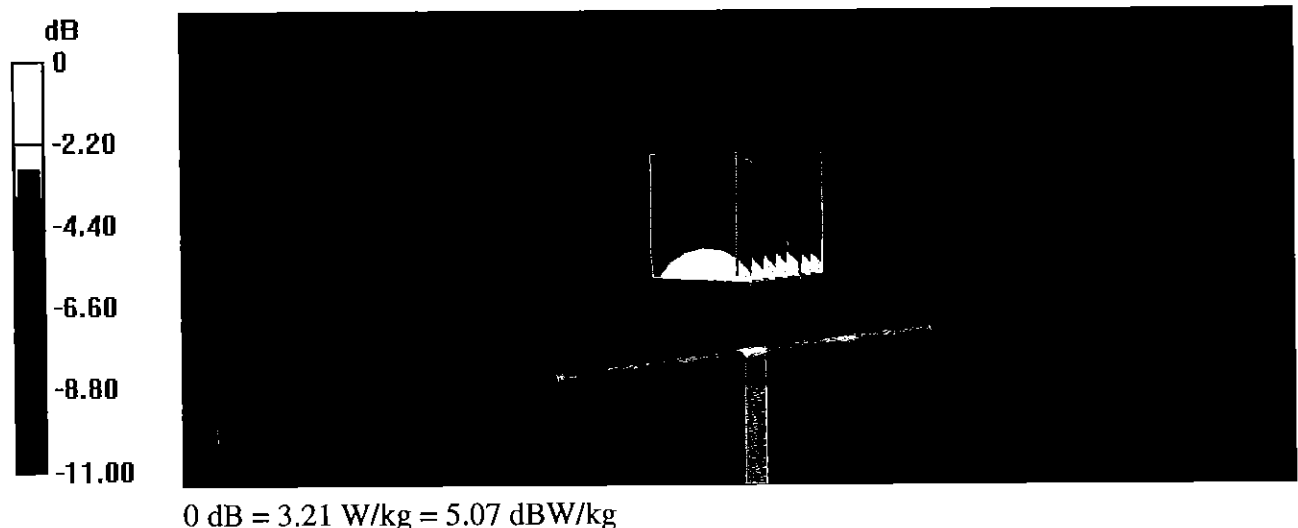

Impedance Measurement Plot for Body TSL

11 Jul 2017 13:57:15
 [CH1] S11 1 U FS 1: 46.736 Ω -6.7871 Ω 28.083 pF 835.000 000 MHz


*

De1

CA

Avg
16

H1d

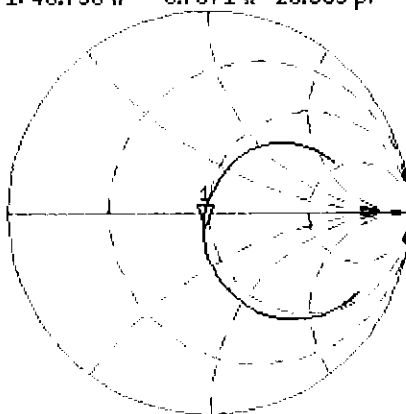


CH2 S11 LOG 5 dB/REF -20 dB 1:-22.199 dB 835.000 000 MHz

CA

Avg
16

H1d

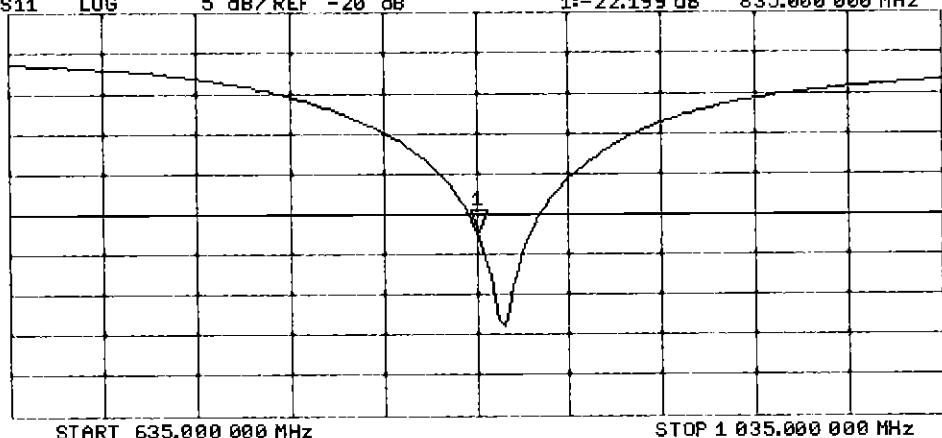

Certification of Calibration

Object D835V2 – SN: 4d133

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: 07/11/2018

Description: SAR Validation Dipole at 835 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	8753ES	S-Parameter Network Analyzer	9/14/2017	Annual	9/14/2018	US39170118
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	ML2495A	Power Meter	11/28/2017	Annual	11/28/2018	1039008
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1207364
Anritsu	MA2411B	Pulse Power Sensor	11/15/2017	Annual	11/15/2018	1339007
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/18/2018	Annual	6/18/2019	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/9/2017	Annual	11/9/2018	1450
SPEAG	DAK-3.5	Dielectric Assessment Kit	9/12/2017	Annual	9/12/2018	1091
SPEAG	EX3DV4	SAR Probe	6/25/2018	Annual	6/25/2019	7409
SPEAG	ES3DV3	SAR Probe	3/27/2018	Annual	3/27/2019	3347

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Test Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Head (1g) W/kg @ 23.0 dBm	Measured Head SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Head SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Head (Ohm) Real	Measured Impedance Head (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Head (Ohm) Imaginary	Measured Impedance Head (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Head (dB)	Measured Return Loss Head (dB)	Deviation (%)	PASS/FAIL
7/11/2017	7/11/2018	1.196	1.904	2.020	6.09%	1.220	1.310	7.38%	51.0	48.4	2.6	-2.9	-3.1	0.2	-30.4	-29.1	4.30%	PASS
Calibration Date	Extension Date	Certificate Electrical Delay (ns)	Certificate SAR Target Body (1g) W/kg @ 23.0 dBm	Measured Body SAR (1g) W/kg @ 23.0 dBm	Deviation 1g (%)	Certificate SAR Target Body (10g) W/kg @ 23.0 dBm	Measured Body SAR (10g) W/kg @ 23.0 dBm	Deviation 10g (%)	Certificate Impedance Body (Ohm) Real	Measured Impedance Body (Ohm) Real	Difference (Ohm) Real	Certificate Impedance Body (Ohm) Imaginary	Measured Impedance Body (Ohm) Imaginary	Difference (Ohm) Imaginary	Certificate Return Loss Body (dB)	Measured Return Loss Body (dB)	Deviation (%)	PASS/FAIL
7/11/2017	7/11/2018	1.196	1.882	2.030	7.86%	1.232	1.340	8.77%	46.7	46.3	0.4	-6.8	-5.2	1.6	-22.2	-23.6	-6.30%	PASS

Impedance & Return-Loss Measurement Plot for Head TSL

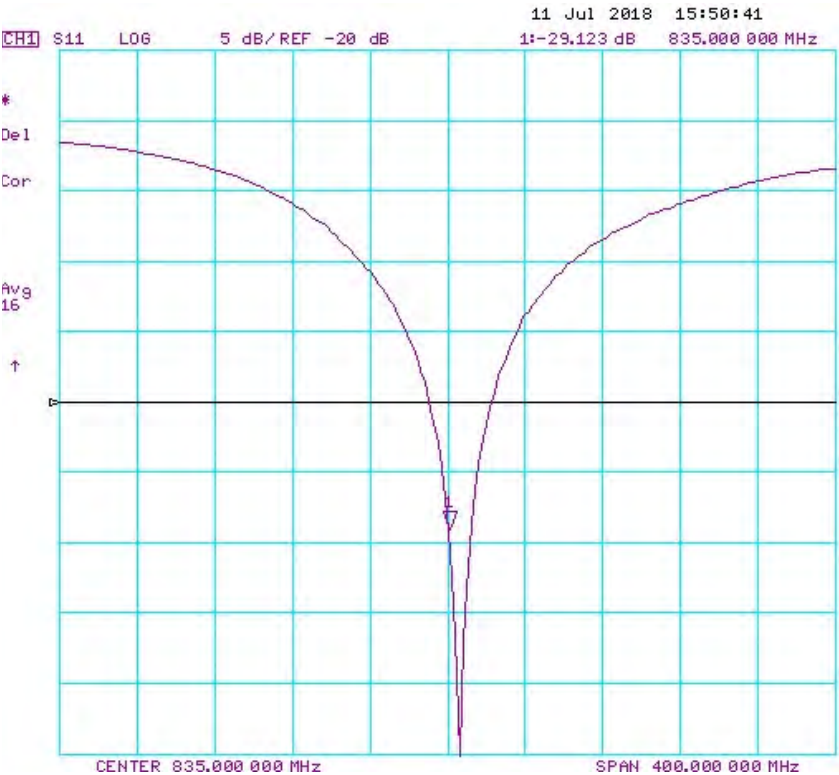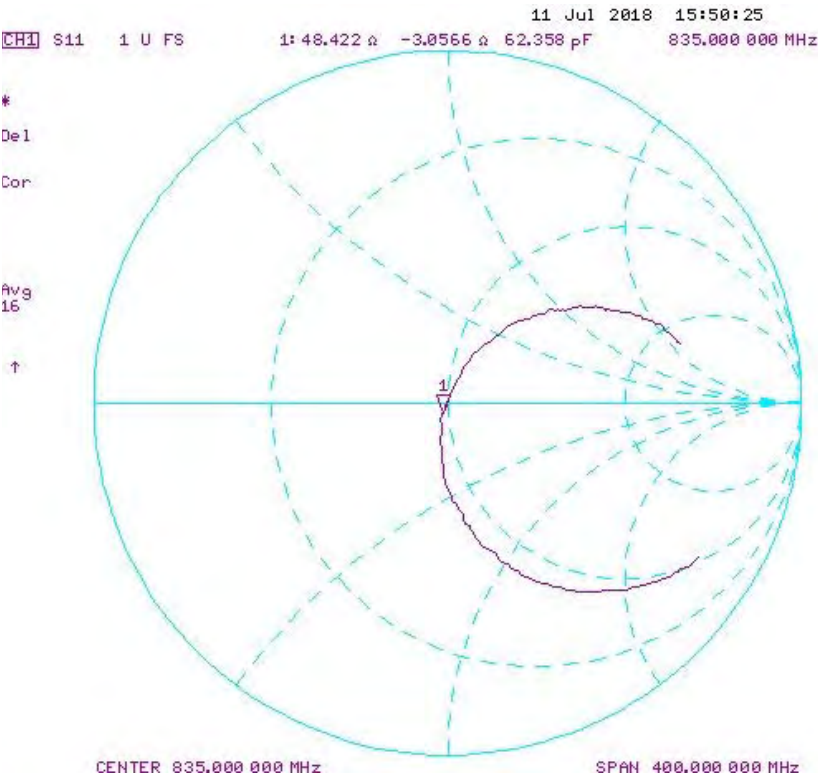

Impedance & Return-Loss Measurement Plot for Body TSL

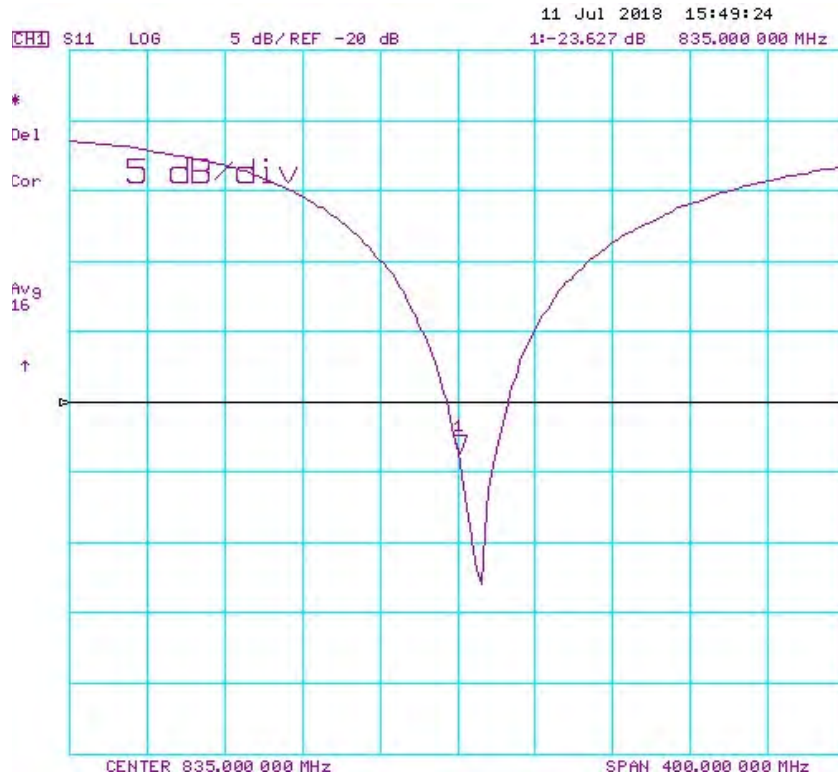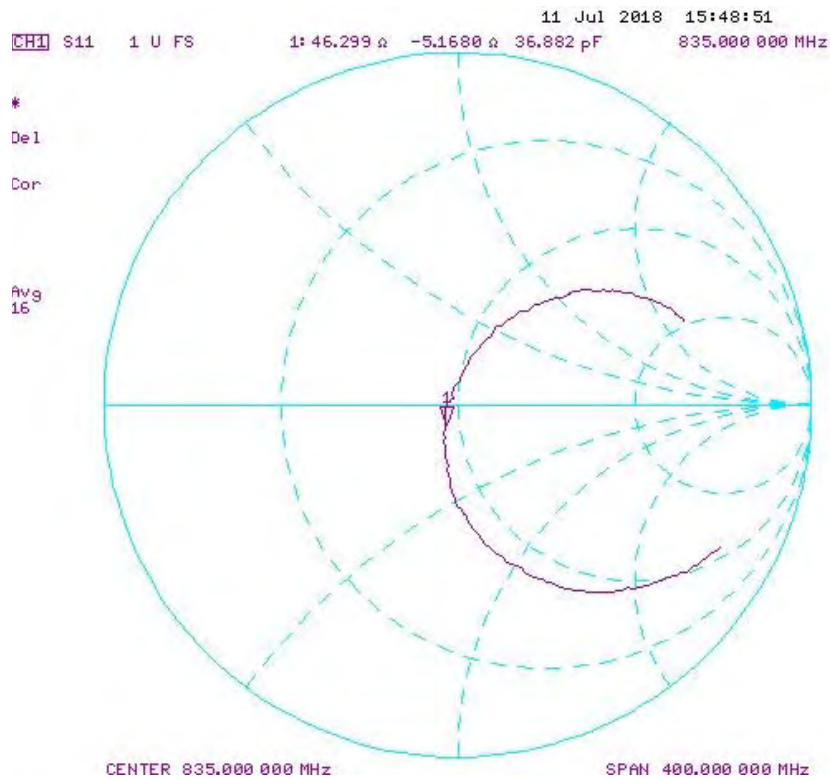



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1765V2-1008_May18**

CALIBRATION CERTIFICATE

Object **D1765V2 - SN:1008**

Calibration procedure(s) **QA CAL-05.v10**
Calibration procedure for dipole validation kits above 700 MHz

BN
7/16/2018

Calibration date: **May 23, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Manu Seltz** **Manu Seltz** **Laboratory Technician**

Approved by: **Katja Pokovic** **Katja Pokovic** **Technical Manager**

Issued: May 23, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.1
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	1750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	39.0 \pm 6 %	1.34 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	8.94 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.2 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.71 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.0 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	53.2 \pm 6 %	1.46 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.21 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.4 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	4.92 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	19.9 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	47.7 Ω - 6.5 j Ω
Return Loss	- 23.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	43.3 Ω - 6.0 j Ω
Return Loss	- 20.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.210 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 06, 2005

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	37.4 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.9 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	38.2 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.06 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.4 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.26 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	37.4 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.02 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.2 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	7.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	28.7 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	16.1 W/kg ± 16.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 15.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.5, 8.5, 8.5) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.6 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 16.4 W/kg


SAR(1 g) = 8.94 W/kg; SAR(10 g) = 4.71 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

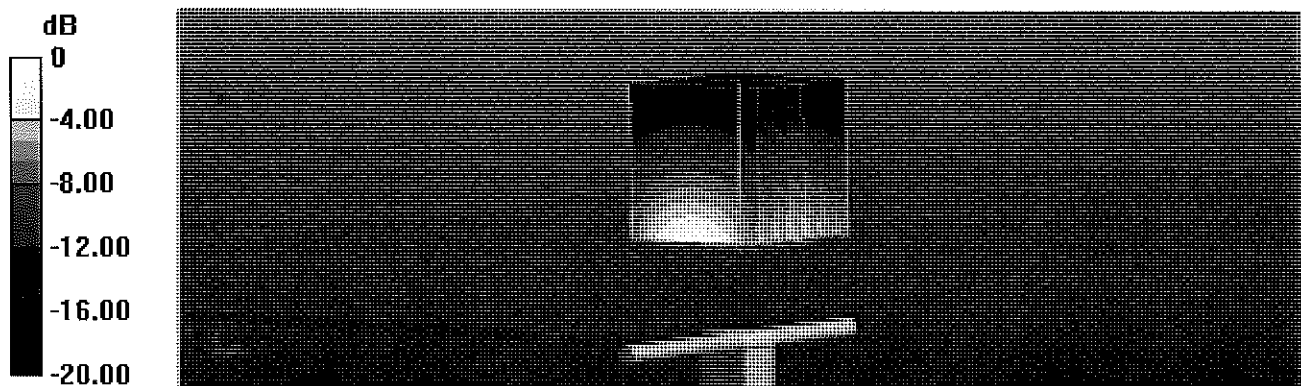

0 dB = 13.8 W/kg = 11.40 dBW/kg

Impedance Measurement Plot for Head TSL

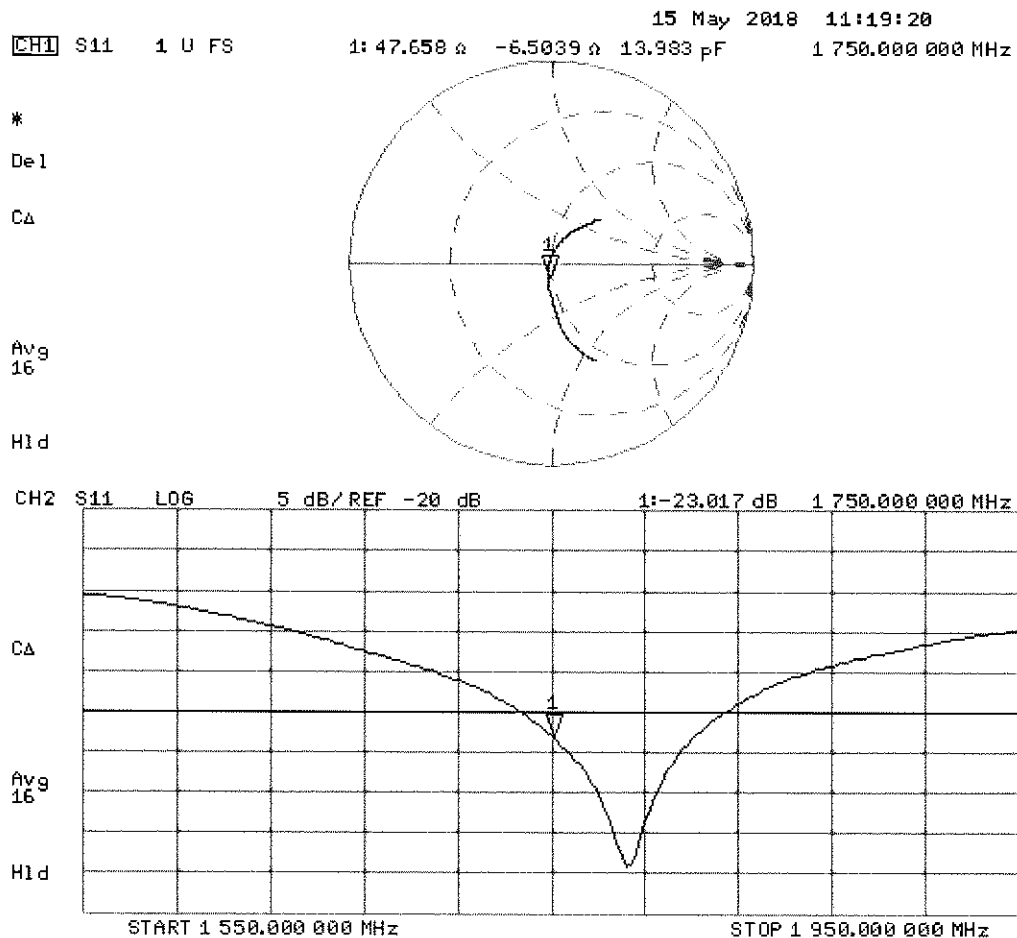

DASY5 Validation Report for Body TSL

Date: 15.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.35, 8.35, 8.35) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.4 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.1 W/kg


SAR(1 g) = 9.21 W/kg; SAR(10 g) = 4.92 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

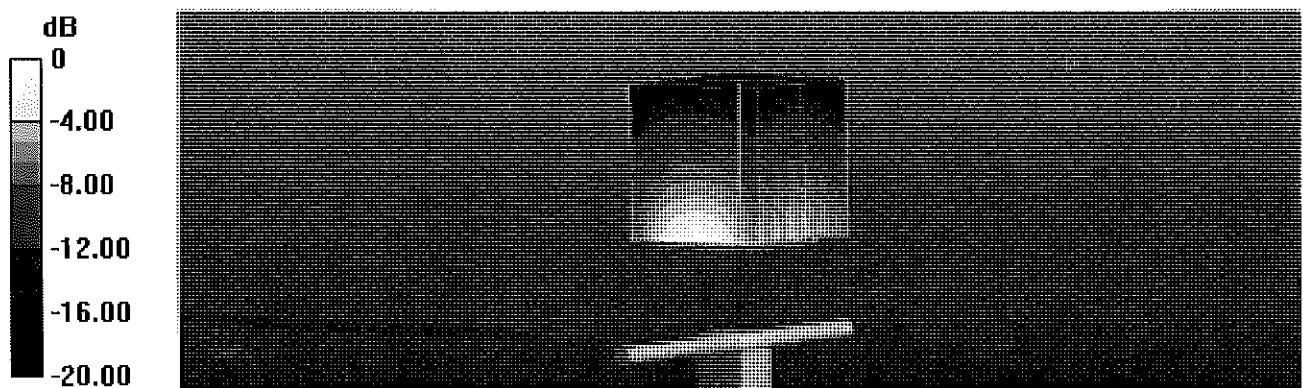

0 dB = 13.7 W/kg = 11.37 dBW/kg

Impedance Measurement Plot for Body TSL

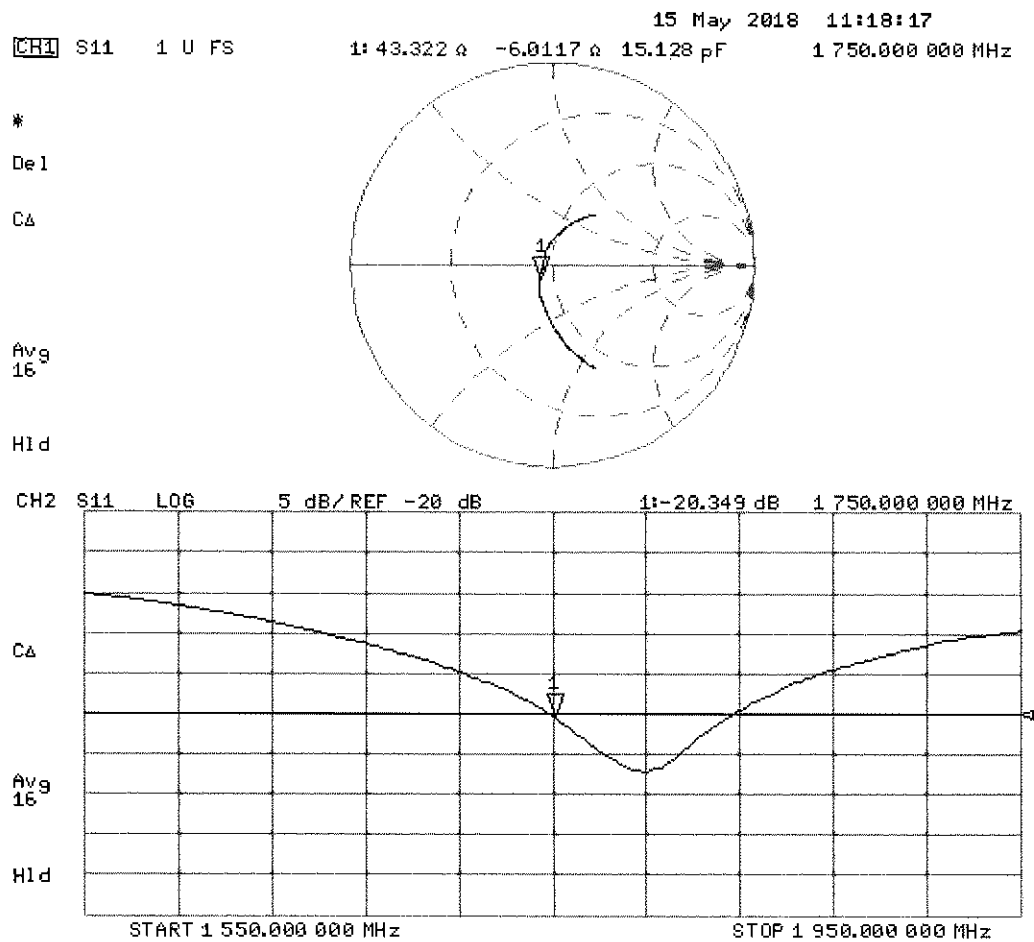

DASY5 Validation Report for SAM Head

Date: 23.05.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1765 MHz; Type: D1765V2; Serial: D1765V2 - SN:1008

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.5, 8.5, 8.5) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.1(1476); SEMCAD X 14.6.11(7439)

SAM/Head/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.8 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.26 W/kg; SAR(10 g) = 4.95 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

SAM/Head/Mouth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.2 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 9.47 W/kg; SAR(10 g) = 5.06 W/kg

Maximum value of SAR (measured) = 13.7 W/kg

SAM/Head/Neck/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.7 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 15.8 W/kg

SAR(1 g) = 9.26 W/kg; SAR(10 g) = 5.02 W/kg

Maximum value of SAR (measured) = 13.8 W/kg



SAM/Head/Ear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.46 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 7.12 W/kg; SAR(10 g) = 4.01 W/kg

Maximum value of SAR (measured) = 10.3 W/kg

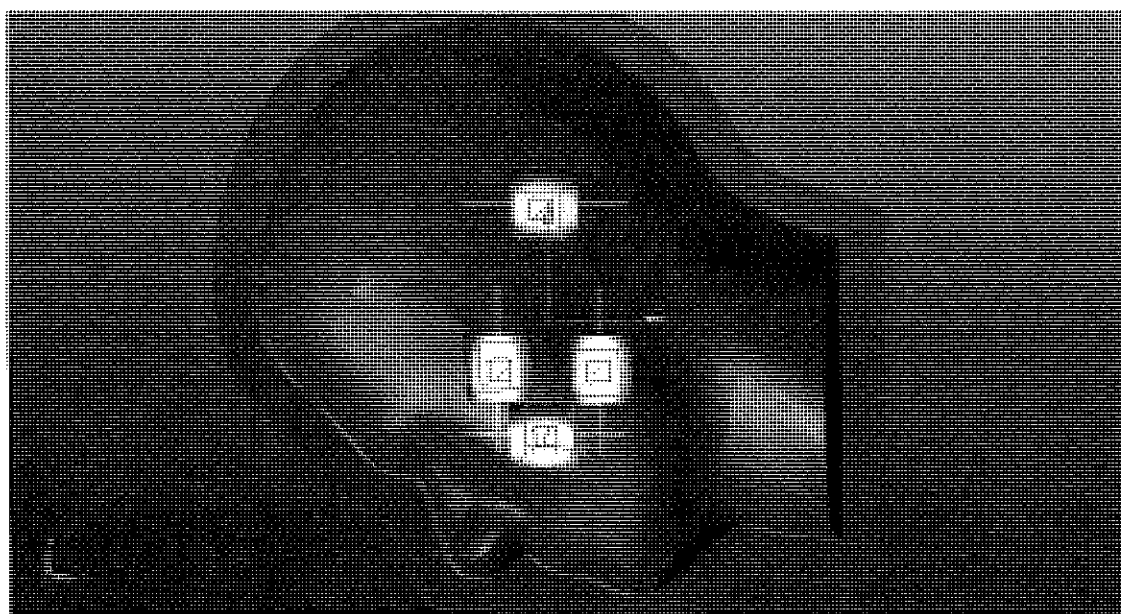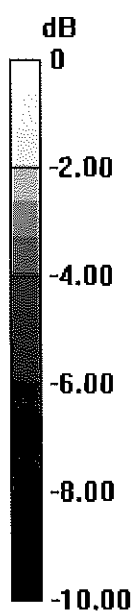

0 dB = 10.3 W/kg = 10.13 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **PC Test**

Certificate No: **D1900V2-5d148_Feb18**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d148**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

BN ✓
03-02-2018

Calibration date: **February 07, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: February 7, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.7 \pm 6 %	1.39 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.95 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.1 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.0 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.2 \pm 6 %	1.48 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.68 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	39.6 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.9 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$52.1 \Omega + 5.8 j\Omega$
Return Loss	- 24.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$47.8 \Omega + 6.5 j\Omega$
Return Loss	- 23.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.199 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

DASY5 Validation Report for Head TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.18, 8.18, 8.18); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.6 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 9.95 W/kg; SAR(10 g) = 5.22 W/kg


Maximum value of SAR (measured) = 15.3 W/kg

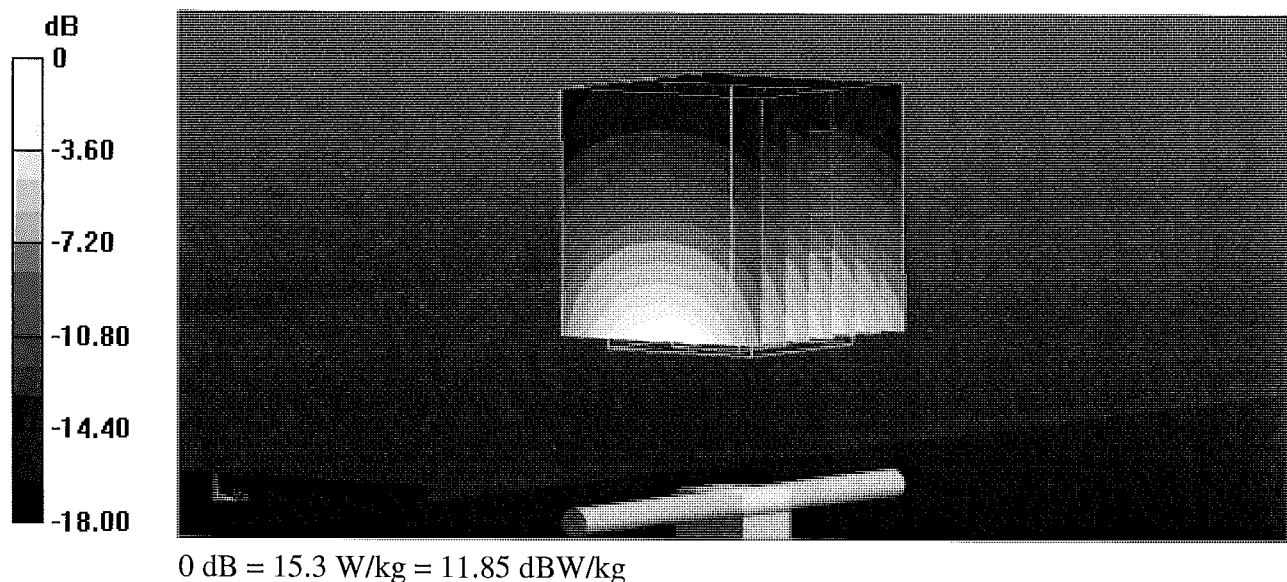

Impedance Measurement Plot for Head TSL

7 Feb 2018 15:15:06
CH1 S11 1 U FS 1: 52.148 Ω 5.8281 Ω 488.20 μ H 1 900.000 000 MHz

*
Del
CA

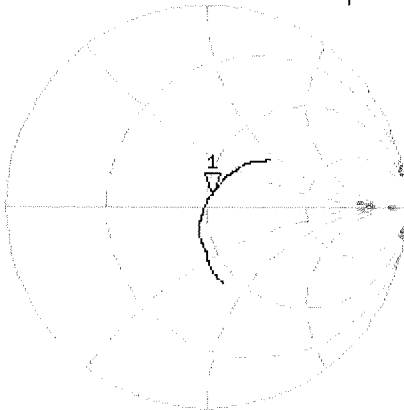


Avg
16
H1d

CH2 S11 LOG 5 dB/ REF -20 dB 1:-24.331 dB 1 900.000 000 MHz

CA

Avg
16
H1d

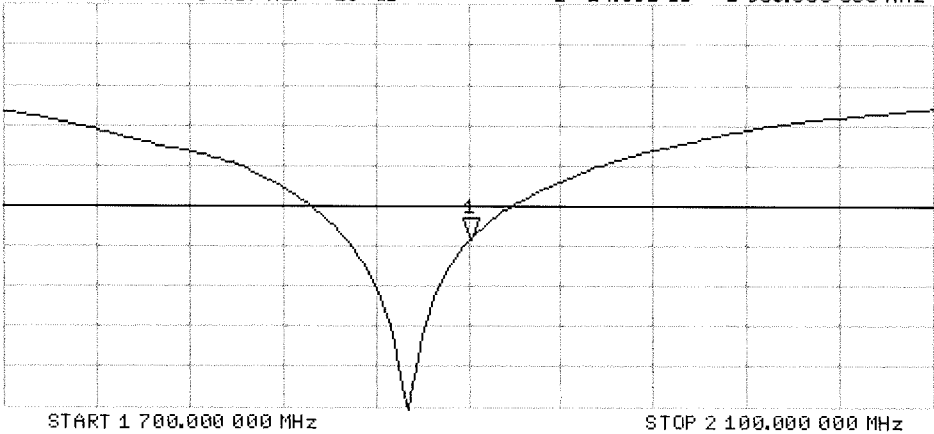

DASY5 Validation Report for Body TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.15, 8.15, 8.15); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.0 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.68 W/kg; SAR(10 g) = 5.14 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

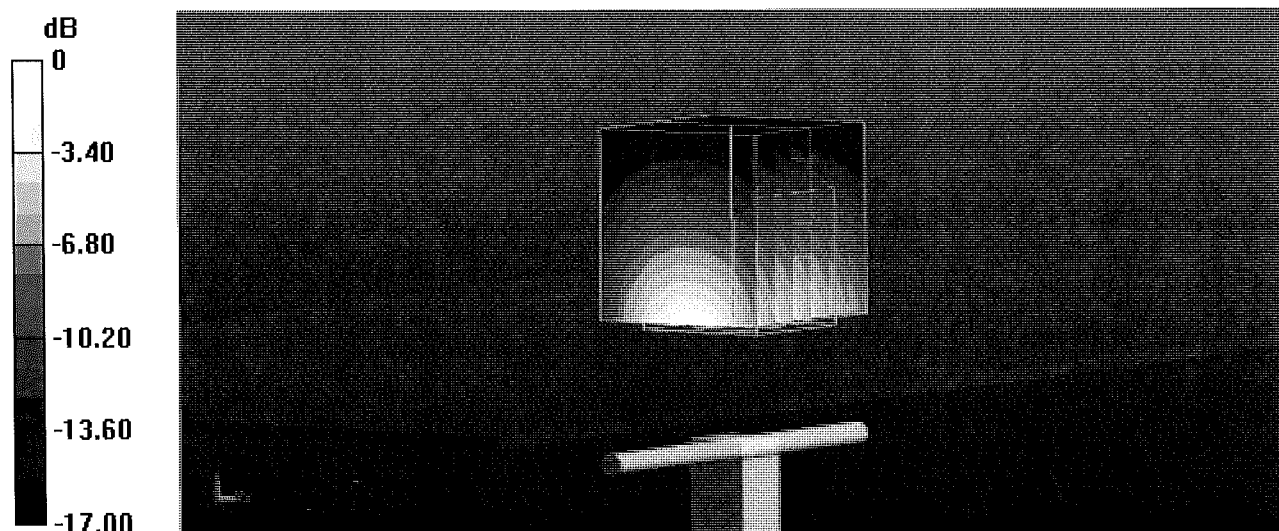


0 dB = 14.4 W/kg = 11.58 dBW/kg

Impedance Measurement Plot for Body TSL


7 Feb 2018 15:14:31
[CH1] S11 1 U FS 1: 47.787 Ω 6.4551 Ω 540.71 μ H 1 900.000 000 MHz

*
Del
CA
Avg
16
H1d

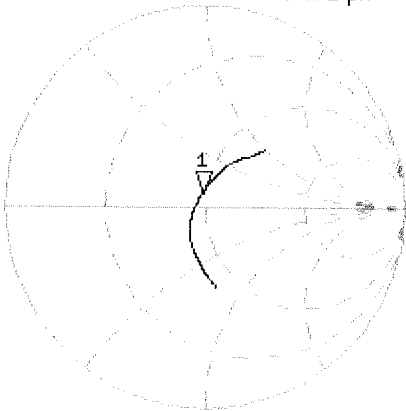

CH2 S11 LOG 5 dB/ REF -20 dB 1:-23.146 dB 1 900.000 000 MHz

CA
Avg
16
H1d

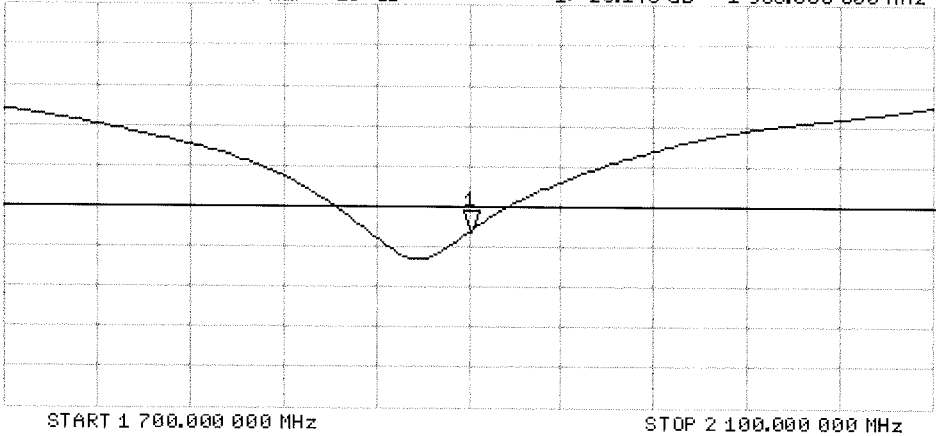



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-797_Sep17**

CALIBRATION CERTIFICATE

Object **D2450V2 - SN:797**

Calibration procedure(s) **QA CAL-05.v9**
 Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **September 11, 2017**

SCS
10/03/2017
Extended PMV
9/20/2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	31-May-17 (No. EX3-7349_May17)	May-18
DAE4	SN: 601	28-Mar-17 (No. DAE4-601_Mar17)	Mar-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by: **Michael Weber** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Issued: September 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	37.8 \pm 6 %	1.86 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.5 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.7 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	51.9 \pm 6 %	2.04 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.1 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.14 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.2 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	$53.8 \Omega + 7.4 j\Omega$
Return Loss	- 21.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$49.7 \Omega + 9.1 j\Omega$
Return Loss	- 20.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.152 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 24, 2006

DASY5 Validation Report for Head TSL

Date: 11.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.12, 8.12, 8.12); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/ $P_{in}=250$ mW, $d=10$ mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 113.5 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.28 W/kg

Maximum value of SAR (measured) = 21.6 W/kg

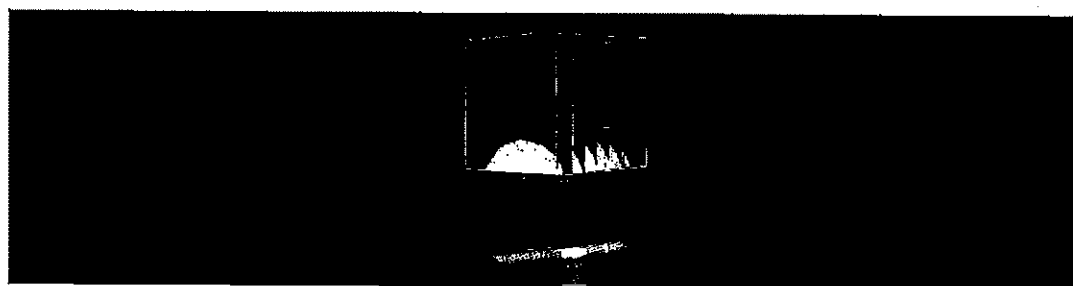


0 dB = 21.6 W/kg = 13.34 dBW/kg

Impedance Measurement Plot for Head TSL

11 Sep 2017 11:52:57
 CH1 S11 1 U FS 1: 53.777 Ω 7.4395 Ω 493.28 pF 2 450.000 000 MHz

*
 Del
 CA

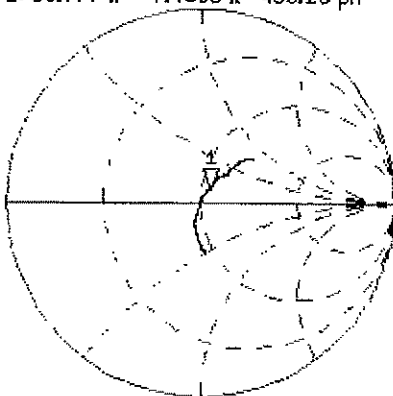

AVG
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -21.911 dB 2 450.000 000 MHz

CA

AVG
 16

H1d

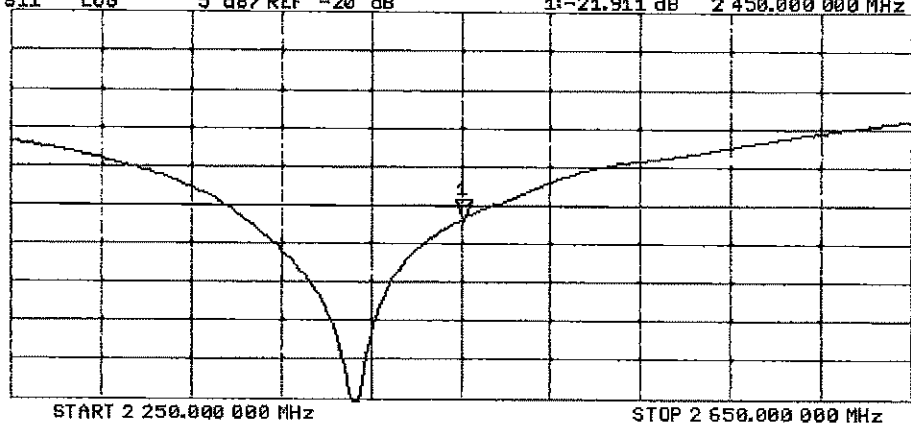

START 2 250.000 000 MHz

STOP 2 650.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 11.09.2017

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 797

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.1, 8.1, 8.1); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 25.6 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.14 W/kg


Maximum value of SAR (measured) = 20.3 W/kg

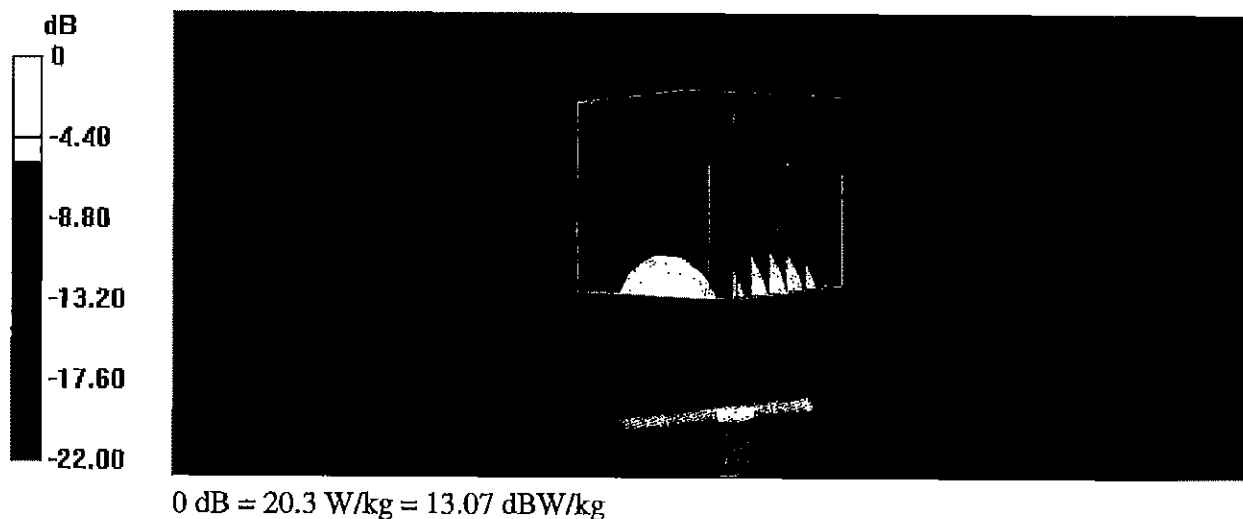

Impedance Measurement Plot for Body TSL


11 Sep 2017 11:52:10
[CH1] S11 1 U FS 1: 49.725 Ω 9.0703 Ω 589.22 pH 2 450.000 000 MHz

De1
CA
Avg
16
H1d

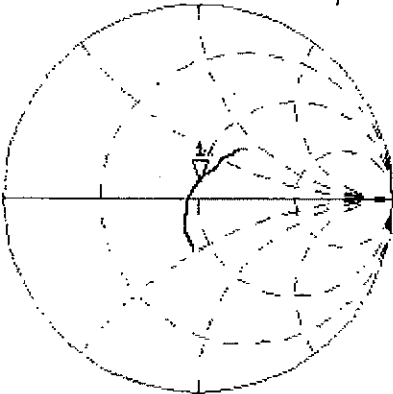

CH2 S11 LOG 5 dB/REF -20 dB 1: -20.854 dB 2 450.000 000 MHz

CA
Avg
16
H1d

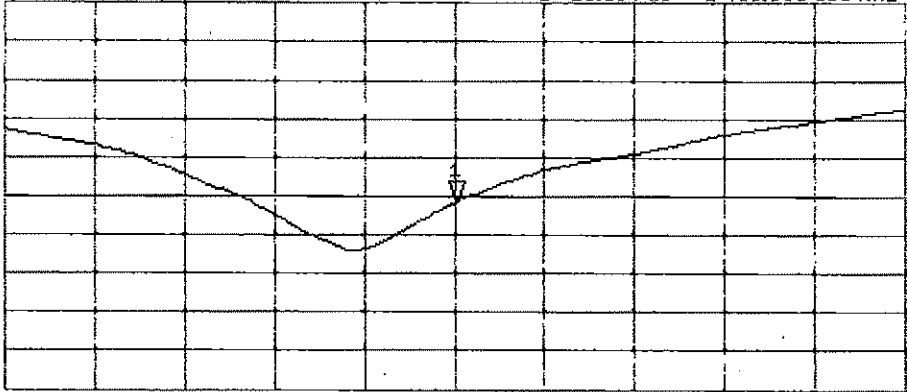

START 2 250.000 000 MHz STOP 2 650.000 000 MHz

Certification of Calibration

Object: D2450V2 – SN: 797

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: September 11, 2018

Description: SAR Validation Dipole at 2450 MHz.

Calibration Equipment used:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Therm./Clock/Humidity Monitor	3/31/2017	Biennial	3/31/2019	170232394
Control Company	4352	Ultra Long Stem Thermometer	5/2/2017	Biennial	5/2/2019	170330156
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	6/4/2018	Annual	6/4/2019	MY53401181
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/30/2018	Annual	8/30/2019	MY40003841
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	5/15/2018	Annual	5/15/2019	1070
SPEAG	EX3DV4	SAR Probe	7/20/2018	Annual	7/20/2019	7410
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2018	Annual	7/11/2019	1322
SPEAG	ES3DV3	SAR Probe	3/13/2018	Annual	3/13/2019	3319
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/7/2018	Annual	3/7/2019	1368
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	7/20/2019	1207364
Anritsu	MA2411B	Pulse Power Sensor	3/2/2018	Annual	3/2/2019	1339018
Anritsu	ML2495A	Power Meter	10/22/2017	Annual	10/22/2018	1328004
Agilent	N5182A	MXG Vector Signal Generator	4/18/2018	Annual	4/18/2019	MY47420800
Seekonk	NC-100	Torque Wrench	7/11/2018	Annual	7/11/2019	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path.

Measurement Uncertainty = $\pm 23\%$ (k=2)

	Name	Function	Signature
Calibrated By:	Brodie Halfoster	Team Lead Engineer	<i>BRODIE HALFOSTER</i>
Approved By:	Kaitlin O'Keefe	Senior Technical Manager	<i>KOK</i>

DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

Object:



D2450V2 – SN: 797

Date Issued:



09/11/2018

Page 2 of 4

Impedance & Return-Loss Measurement Plot for Head TSL

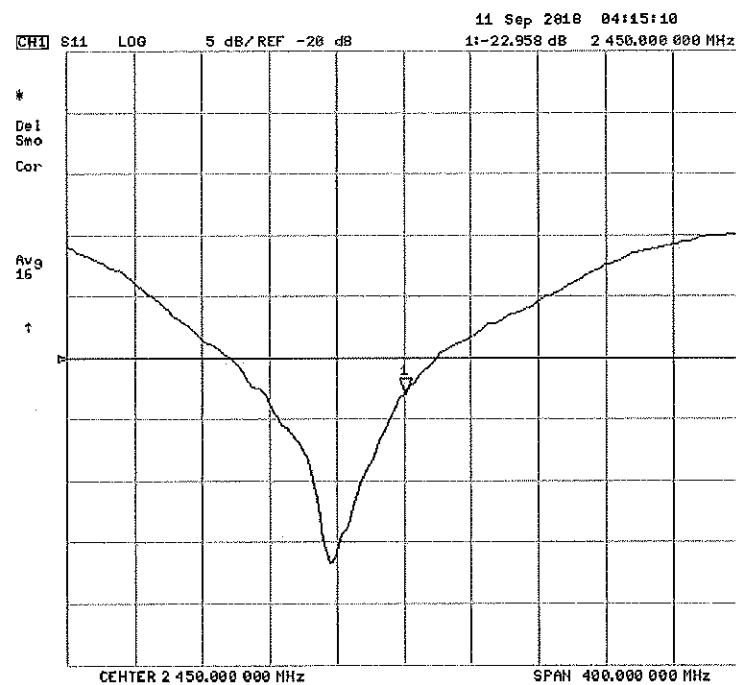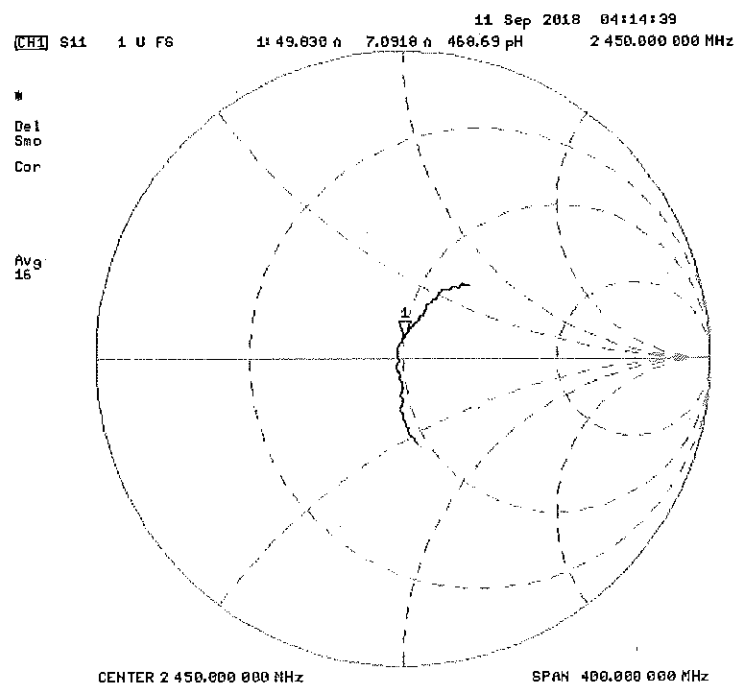

Impedance & Return-Loss Measurement Plot for Body TSL

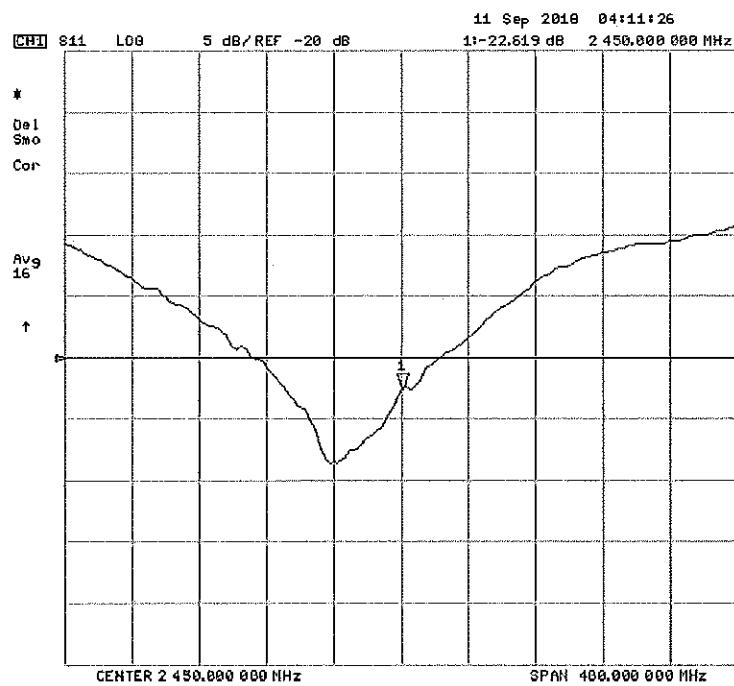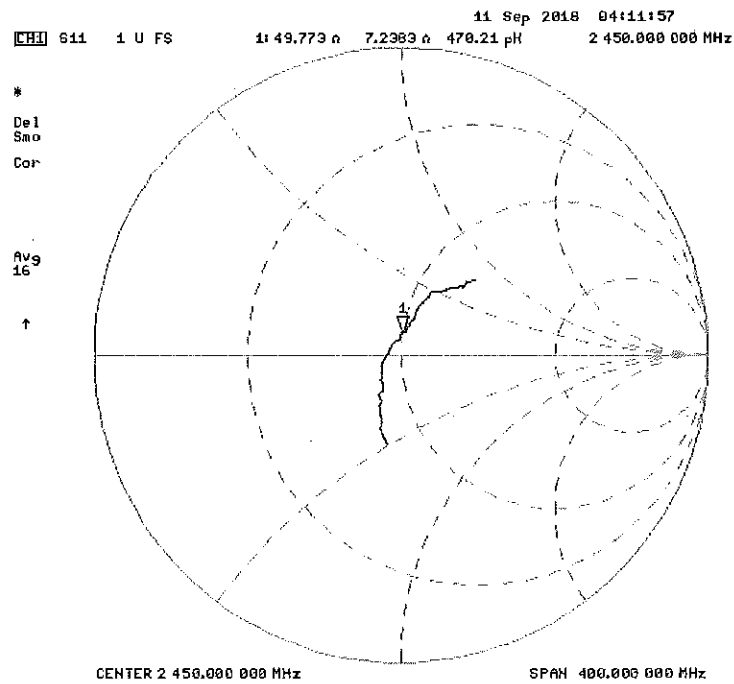



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2600V2-1004_Apr18**

CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1004**

Calibration procedure(s) **QA CAL-05.v10**
Calibration procedure for dipole validation kits above 700 MHz

BN ✓
 05-01-2018

Calibration date: **April 11, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Michael Weber** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: April 12, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	37.8 \pm 6 %	2.03 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.3 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.9 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.1 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.5	2.16 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	52.1 \pm 6 %	2.19 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.8 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	54.8 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.20 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.7 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	47.7 Ω - 5.7 j Ω
Return Loss	- 24.1 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.0 Ω - 3.8 j Ω
Return Loss	- 24.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 23, 2006

DASY5 Validation Report for Head TSL

Date: 11.04.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1004

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.7, 7.7, 7.7); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 118.5 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.35 W/kg

Maximum value of SAR (measured) = 23.9 W/kg

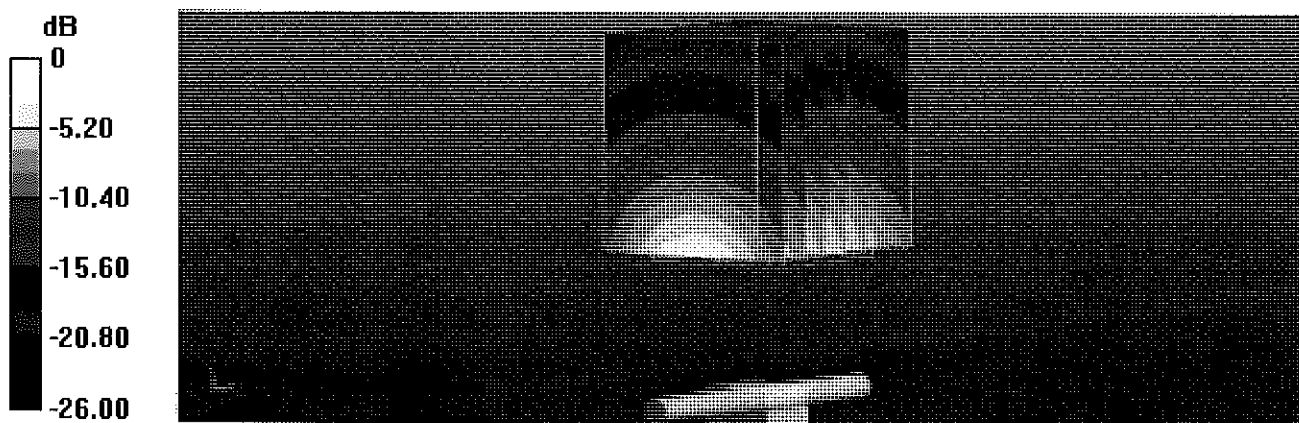

0 dB = 23.9 W/kg = 13.78 dBW/kg

Impedance Measurement Plot for Head TSL

11 Apr 2018 11:25:16
 [CH1] S11 1 U FS 1: 47.721 Ω -5.6836 Ω 10.770 pF 2 500.000 000 MHz


*

De1

CA

Avg
16

H1d

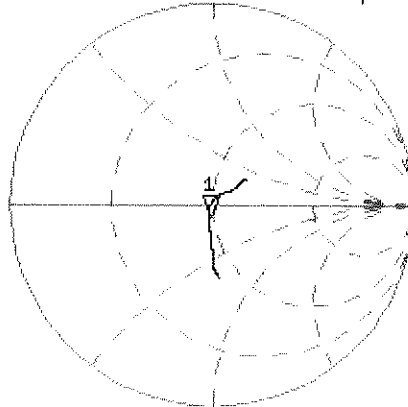


CH2 S11 LOG 5 dB/REF -20 dB 1: -24.073 dB 2 500.000 000 MHz

CA

Avg
16

H1d

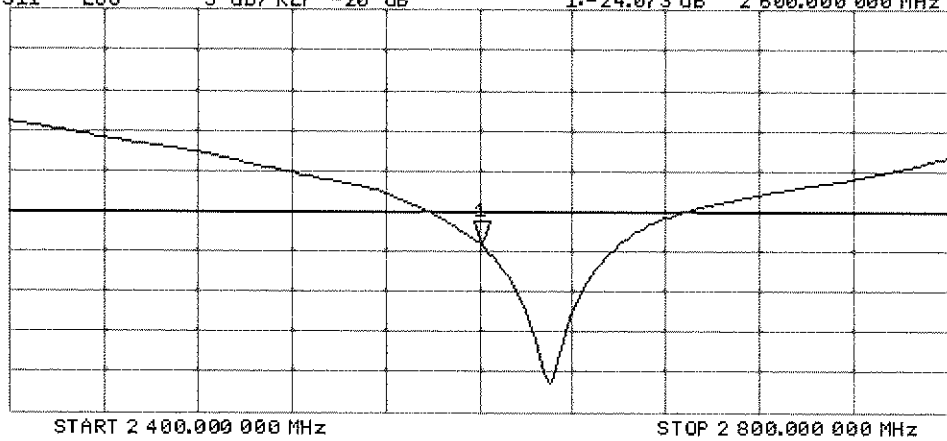

DASY5 Validation Report for Body TSL

Date: 11.04.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1004

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.19$ S/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.81, 7.81, 7.81); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.5 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 28.3 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.2 W/kg

Maximum value of SAR (measured) = 22.9 W/kg

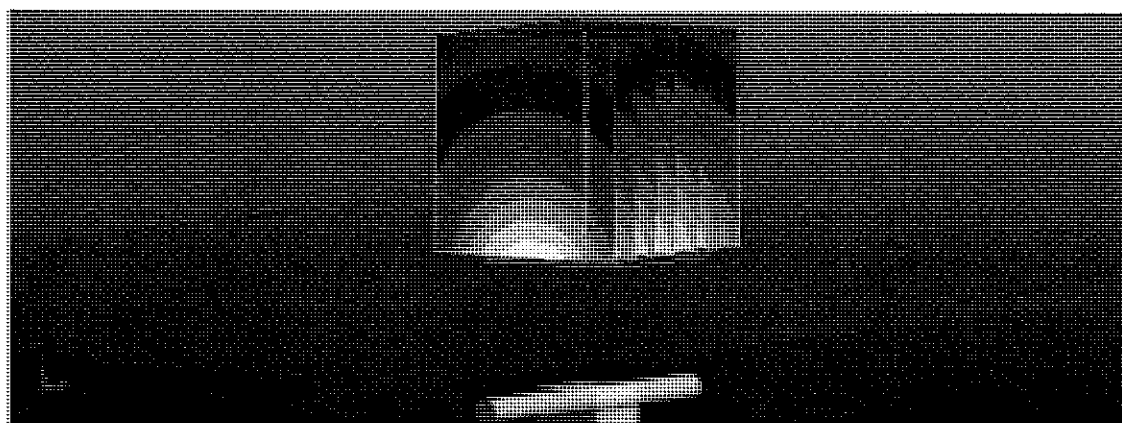


0 dB = 22.9 W/kg = 13.60 dBW/kg

Impedance Measurement Plot for Body TSL

CH1 S11 1 U FS 11 Apr 2018 11:24:36
 1: 46.039 Ω -3.7520 Ω 16.315 pF 2 600.000 000 MHz

*
 Del
 CA

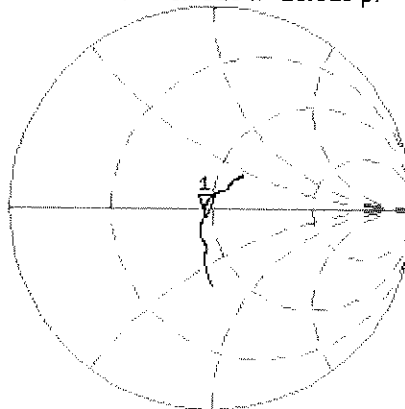

Avg
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1: -24.921 dB 2 600.000 000 MHz

CA

Avg
 16

H1d

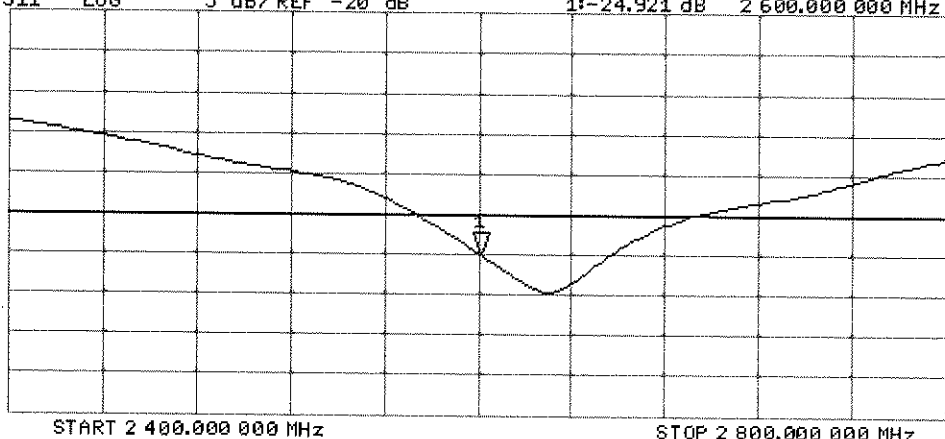



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1003_Jan18**

CALIBRATION CERTIFICATE

Object **D750V3 - SN:1003**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 15, 2018**

BN
01-25-2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Leif Klysner

Katja Pokovic

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	750 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.9 \pm 6 %	0.90 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.28 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.42 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	55.0 \pm 6 %	0.96 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.58 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.71 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.8 Ω - 2.1 j Ω
Return Loss	- 27.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.2 Ω - 6.2 j Ω
Return Loss	- 24.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.043 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 21, 2009

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.98 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.94 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.32 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.06 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.70 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.60 W/kg ± 16.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg


Maximum value of SAR (measured) = 2.80 W/kg

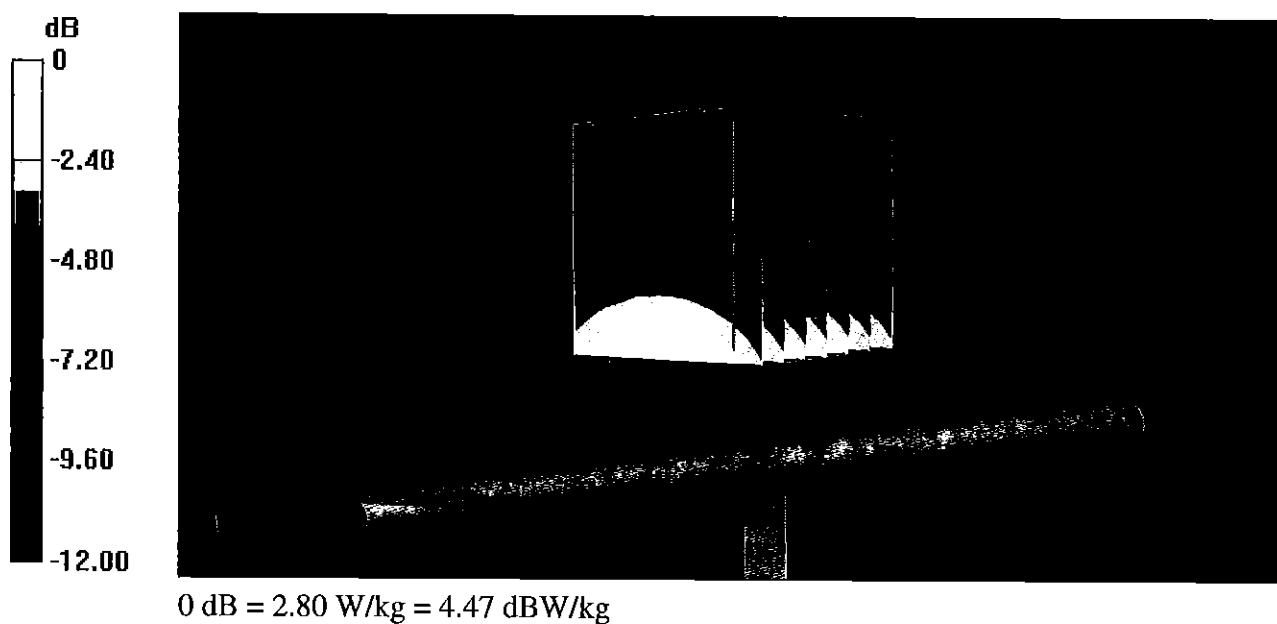

Impedance Measurement Plot for Head TSL

12 Jan 2018 13:14:07
CH1 S11 1 U FS 1: 53.754 Ω -2.0996 Ω 101.07 pF 750.000 000 MHz

*
De1
CA

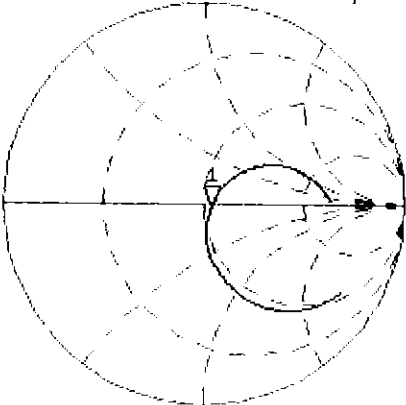


Avg
16
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.643 dB 750.000 000 MHz

CA

Avg
16
H1d

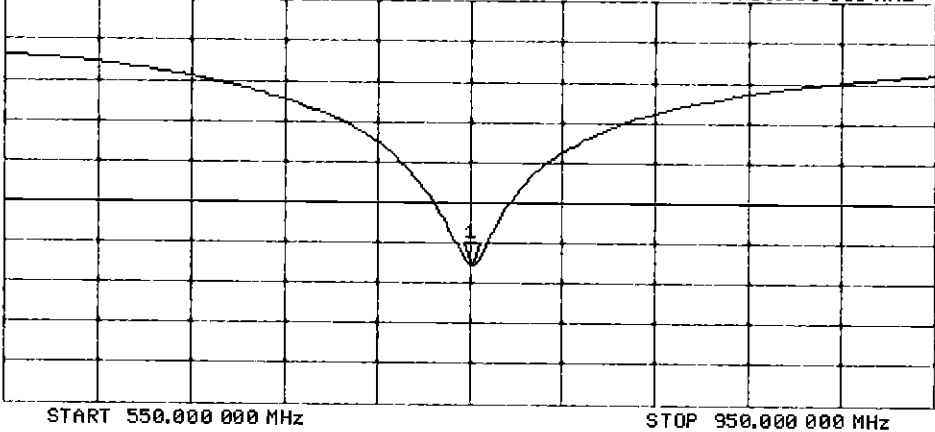

DASY5 Validation Report for Body TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, $d=15\text{mm}$ /Zoom Scan (7x8x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.31 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

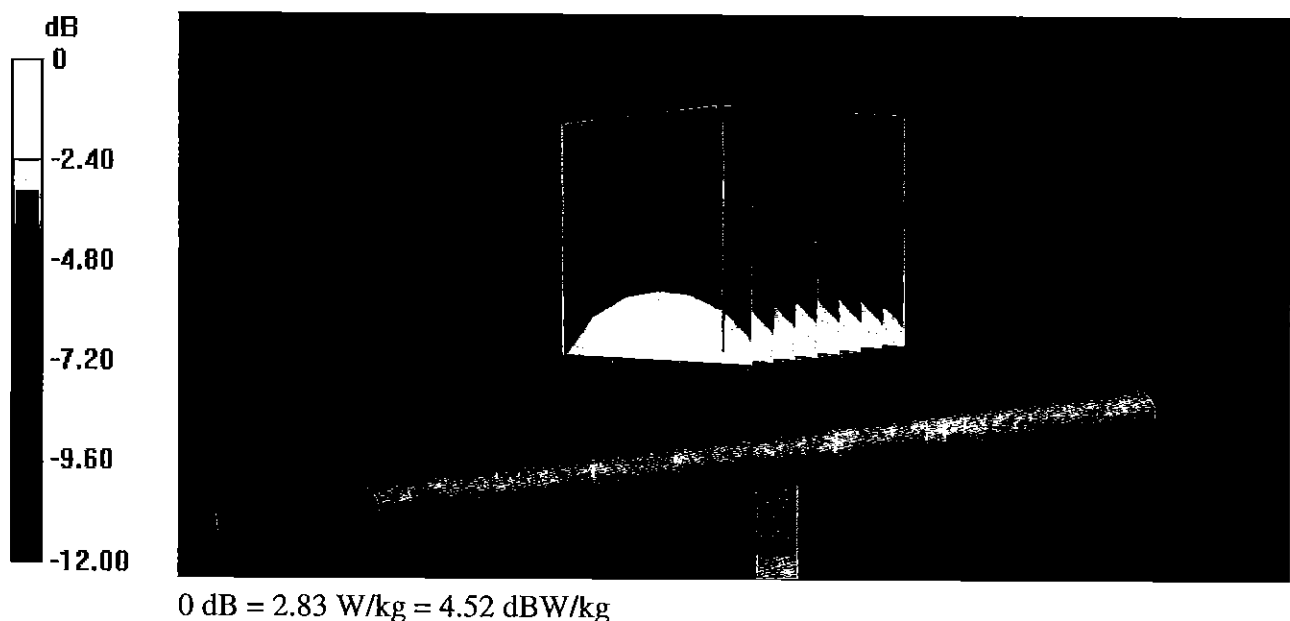

Impedance Measurement Plot for Body TSL

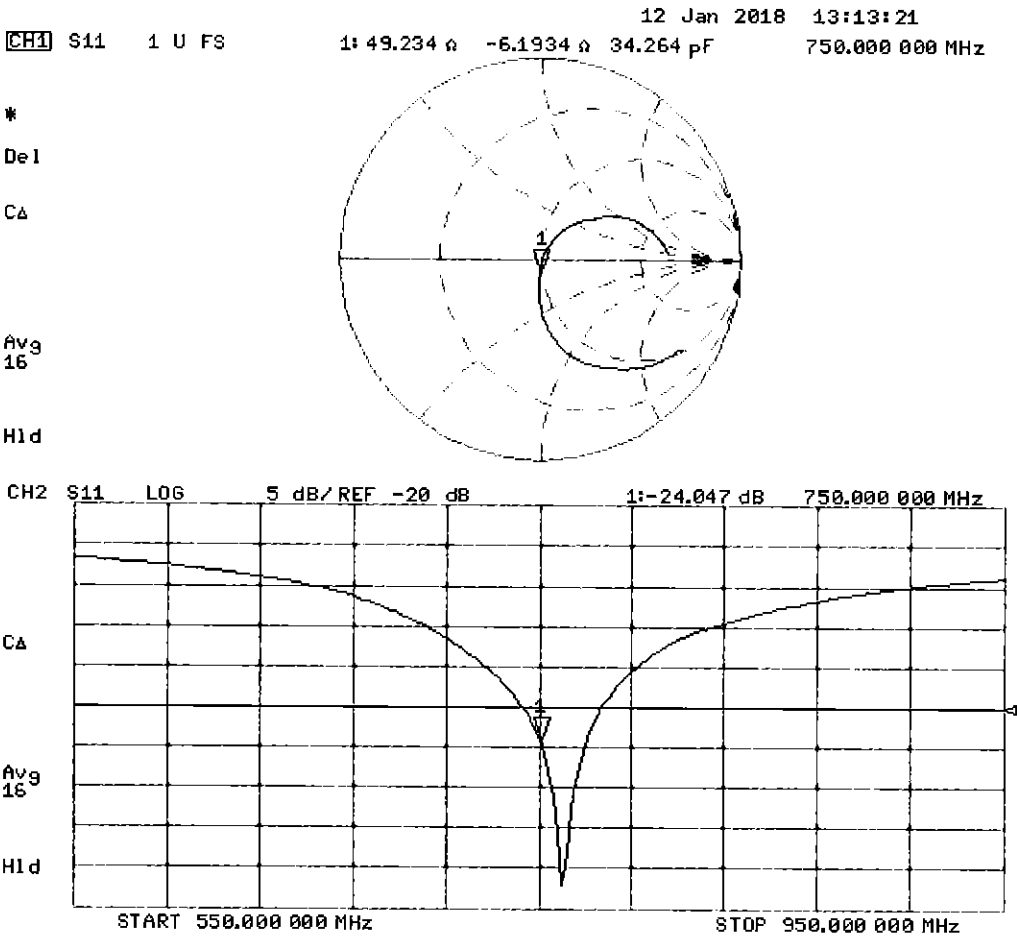

DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.58 W/kg

SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.56 W/kg



SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.67 W/kg; SAR(10 g) = 1.15 W/kg

Maximum value of SAR (measured) = 2.11 W/kg

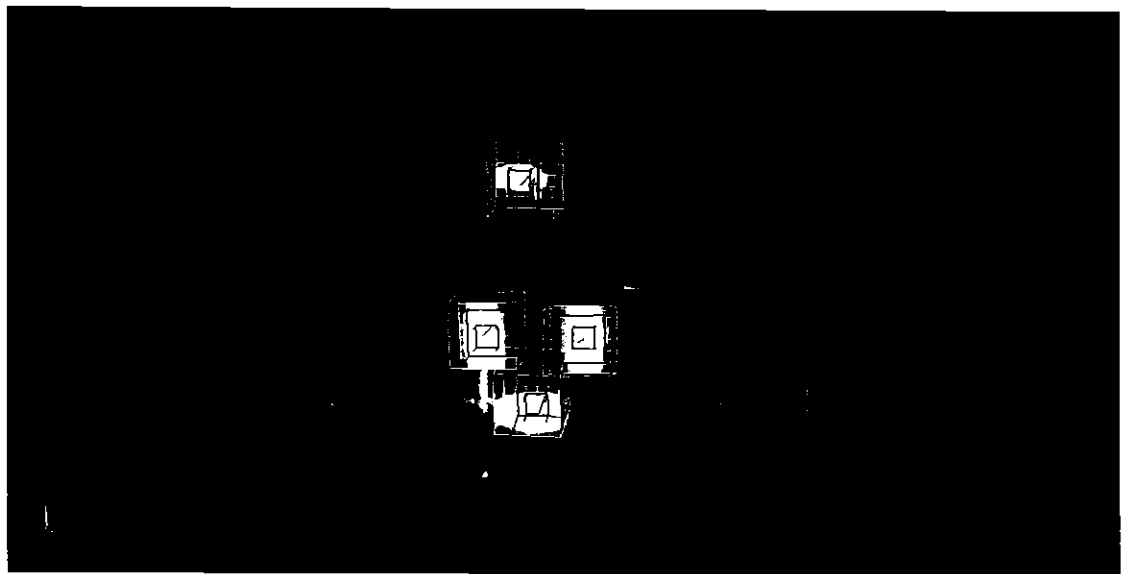

0 dB = 2.58 W/kg = 4.12 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132_Jan18**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **January 15, 2018**

BNV
01-25-2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** Name: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager**

Signature
Leif Klysner
Katja Pokovic

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.7 \pm 6 %	0.92 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.36 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.8 \pm 6 %	0.99 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.71 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.39 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω - 2.9 j Ω
Return Loss	- 29.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 Ω - 5.7 j Ω
Return Loss	- 23.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

Appendix (Additional assessments outside the scope of SCS 0108)

Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

SAR result with SAM Head (Top)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.41 W/kg \pm 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.21 W/kg \pm 16.9 % (k=2)

SAR result with SAM Head (Mouth)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.69 W/kg \pm 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.45 W/kg \pm 16.9 % (k=2)

SAR result with SAM Head (Neck)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.22 W/kg \pm 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.25 W/kg \pm 16.9 % (k=2)

SAR result with SAM Head (Ear)

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.96 W/kg \pm 17.5 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg \pm 16.9 % (k=2)

DASY5 Validation Report for Head TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.23 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.64 W/kg


SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 3.22 W/kg



0 dB = 3.22 W/kg = 5.08 dBW/kg

Impedance Measurement Plot for Head TSL

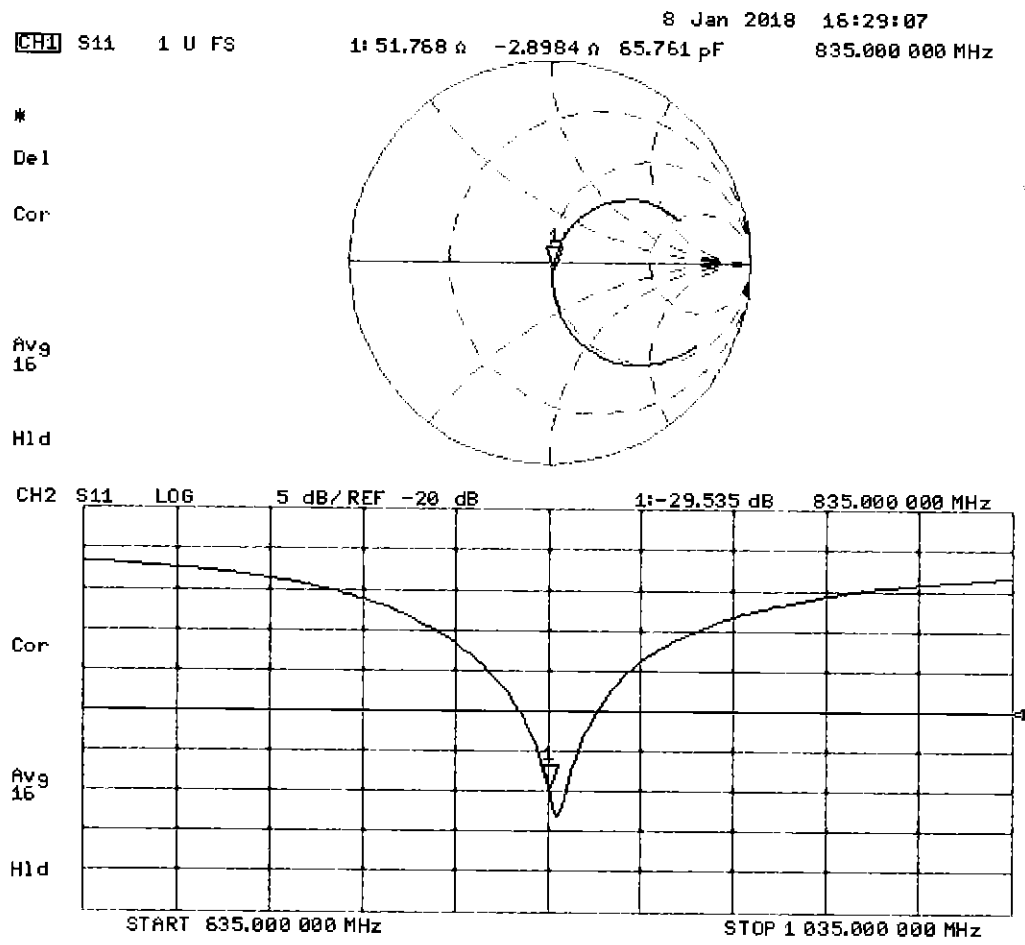

DASY5 Validation Report for Body TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.05, 10.05, 10.05); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.55 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 3.24 W/kg

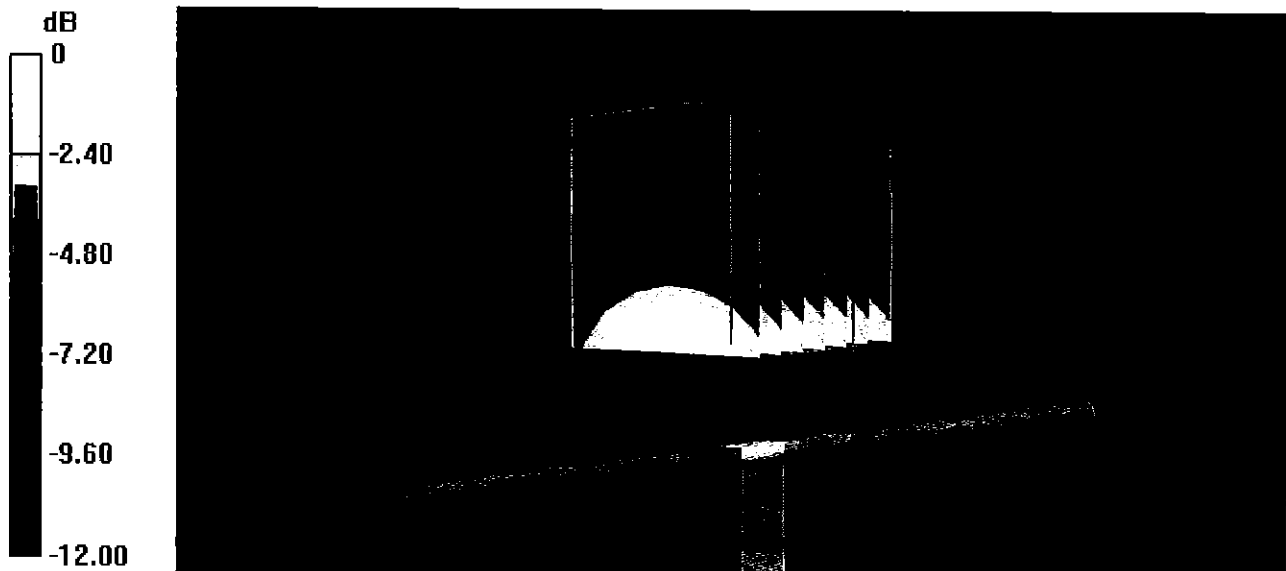


0 dB = 3.24 W/kg = 5.11 dBW/kg


Impedance Measurement Plot for Body TSL

8 Jan 2018 16:27:09
[CH1] S11 1 U FS 1: 47.447 Ω -5.6680 Ω 33.628 pF 835.000 000 MHz

*
De1
Cor

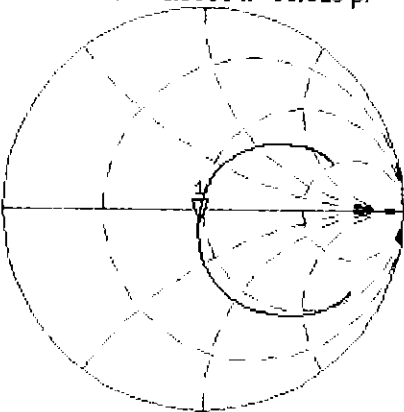

Avg
16
H1d

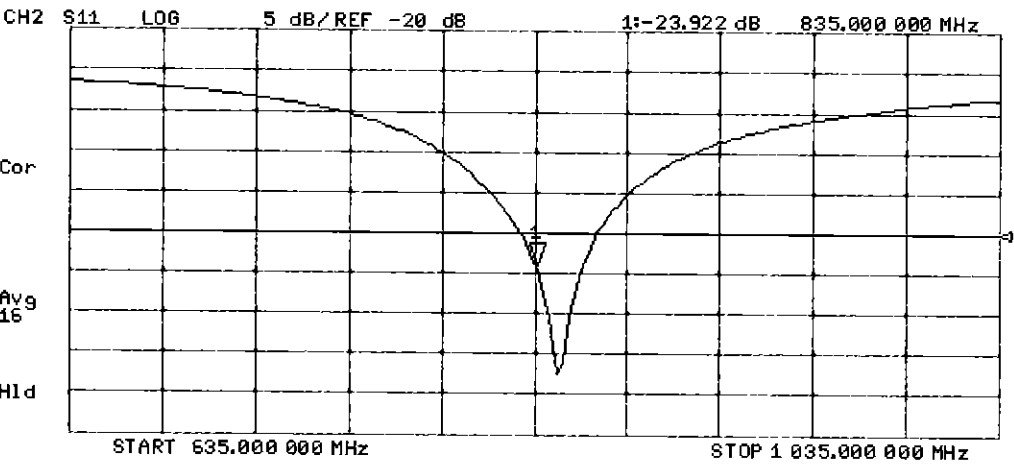

DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.94 \text{ S/m}$; $\epsilon_r = 44.1$; $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

SAM Head/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 61.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.58 W/kg

Maximum value of SAR (measured) = 3.16 W/kg

SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.99 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.64 W/kg

Maximum value of SAR (measured) = 3.19 W/kg

SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.20 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.04 W/kg


SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.03 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.37 W/kg

Maximum value of SAR (measured) = 2.61 W/kg

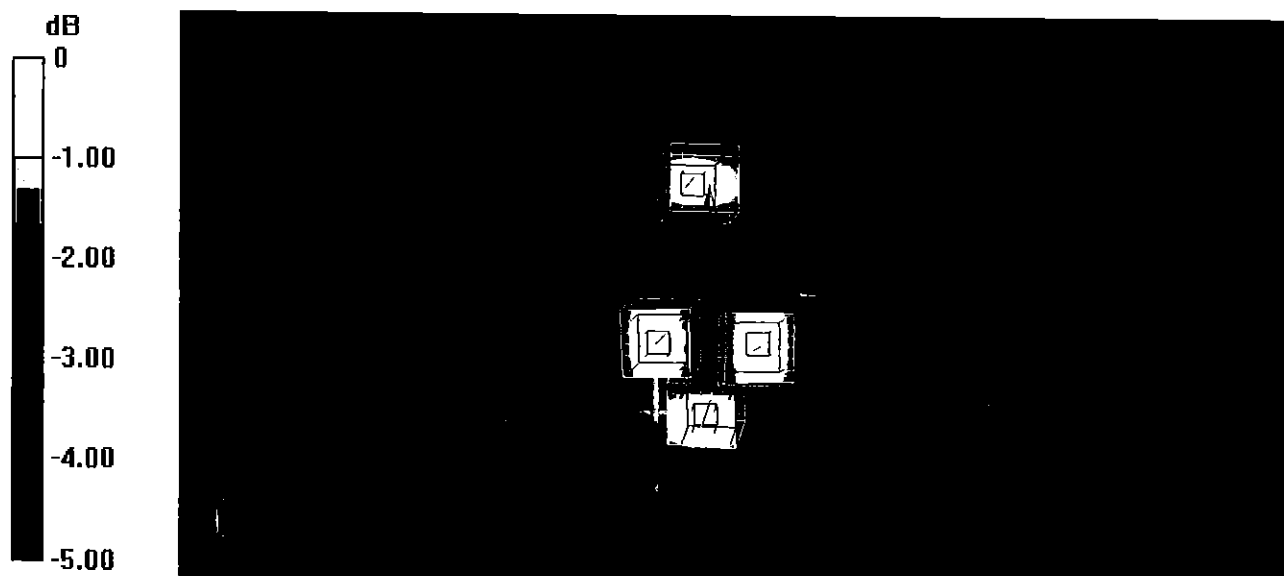

0 dB = 2.61 W/kg = 4.17 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d047_Jul16**

CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d047**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **July 13, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: 5058 (20k)	05-Apr-16 (No. 217-02292)	Apr-17
Type-N mismatch combination	SN: 5047.2 / 06327	05-Apr-16 (No. 217-02295)	Apr-17
Reference Probe EX3DV4	SN: 7349	15-Jun-16 (No. EX3-7349_Jun16)	Jun-17
DAE4	SN: 601	30-Dec-15 (No. DAE4-601_Dec15)	Dec-16
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (No. 217-02222)	In house check: Oct-16
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (No. 217-02223)	In house check: Oct-16
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Jun-15)	In house check: Oct-16
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by: **Jeton Kastrali** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	40.6 \pm 6 %	0.94 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.13 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.95 W/kg \pm 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 \pm 0.2) °C	54.9 \pm 6 %	1.01 mho/m \pm 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.57 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.60 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.24 W/kg \pm 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.8 Ω - 5.9 j Ω
Return Loss	- 24.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.8 Ω - 8.2 j Ω
Return Loss	- 20.3 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	None ns
----------------------------------	---------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 16, 2006