

# FCC Radio Test Report

**FCC ID: 2A5CV-RH-008****The report concerns: Original Grant**

Report Reference No.....: 24EFSS11090 05321  
Date Sample(s) Received.....: 2025-02-17  
Date of Tested.....: From 2025-02-17 to 2025-03-22  
Date of issue.....: 2025-04-02

Testing Laboratory .....: DongGuanShuoXin Electronic Technology Co., Ltd.  
Address .....: Zone A, 1F, No. 6, XinGang Road YuanGang Street,  
XinAn District, ChangAn Town, DongGuan City,  
GuangDong, China

Applicant's name .....: Huizhou Ronghui Technology Co., Ltd  
Address .....: Liboshui No.1 Industrial Zone, Shiwan Town, Boluo  
County, Huizhou City, Guangdong Province, China  
Manufacturer.....: Huizhou Ronghui Technology Co., Ltd

Equipment.....: Wireless Controller for RH-008  
Trade Mark .....: /  
Model .....: RH-008  
Ratings .....: I/P: 5Vdc, 500mA

**Test Engineer:**

Jelena OuYang

**Responsible Engineer :**

Leo Chen

**Authorized Signatory:**

Smile Wang

Table of Contents	Page
<b>1 . TEST REPORT DECLARE</b>	<b>4</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
2.1 MEASUREMENT UNCERTAINTY	6
<b>3 . GENERAL INFORMATION</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 PARAMETERS OF TEST SOFTWARE	9
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 SUPPORT UNITS	10
3.6 TEST ENVIRONMENT CONDITIONS	10
3.7 DUTY CYCLE	11
<b>4 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>	<b>12</b>
4.1 LIMIT	12
4.2 TEST PROCEDURE	12
4.3 MEASUREMENT INSTRUMENTS LIST	12
4.4 TESTSETUP	13
4.5 EUT OPERATION CONDITIONS	13
4.6 TEST RESULTS	14
<b>5 . RADIATED EMISSIONSTEST</b>	<b>16</b>
5.1 LIMIT	16
5.2 TEST PROCEDURE	17
5.3 MEASUREMENT INSTRUMENTS LIST	18
5.4 TESTSETUP	18
5.5 EUT OPERATIONCONDITIONS	19
5.6 TEST RESULTS - 9KHZ TO 30MHZ	20
5.7 TEST RESULTS - 30MHZTO 1000MHZ	21
5.8 TEST RESULTS- ABOVE 1000MHZ (BAND EDGE)	23
5.9 TEST RESULTS- ABOVE 1000MHZ (HARMONIC)	35
<b>6 . BANDWIDTH TEST</b>	<b>53</b>
6.1 LIMIT	53
6.2 TEST PROCEDURE AND SETTING	53
6.3 MEASUREMENT INSTRUMENTS LIST	53
6.4 TEST SETUP	53

Table of Contents	Page
6.5 EUT OPERATION CONDITIONS	53
6.6 TESTRESULTS	54
7 . MAXIMUM OUTPUT POWER TEST	57
7.1 LIMIT	57
7.2 TEST PROCEDURE AND SETTING	57
7.3 MEASUREMENT INSTRUMENTS LIST	57
7.4 TEST SETUP	57
7.5 EUT OPERATION CONDITIONS	57
7.6 TESTRESULTS	58
8 . CONDUCTED SPURIOUS EMISSIONS	59
8.1 LIMIT	59
8.2 TEST PROCEDURE AND SETTING	59
8.3 MEASUREMENT INSTRUMENTS LIST	59
8.4 TEST SETUP	59
8.5 EUT OPERATION CONDITIONS	59
8.6 TESTRESULTS	60
9 . POWER SPECTRAL DENSITY TEST	63
9.1 LIMIT	63
9.2 TEST PROCEDURE AND SETTING	63
9.3 MEASUREMENT INSTRUMENTS LIST	63
9.4 TEST SETUP	63
9.5 EUT OPERATION CONDITIONS	63
9.6 TESTRESULTS	64

**1. TEST REPORT DECLARE**

Applicant	Huizhou Ronghui Technology Co., Ltd
Address	Liboshui No.1 Industrial Zone, Shiwan Town, Boluo County, Huizhou City, Guangdong Province, China
Manufacturer	Huizhou Ronghui Technology Co., Ltd
Address	Liboshui No.1 Industrial Zone, Shiwan Town, Boluo County, Huizhou City, Guangdong Province, China
Factory	Huizhou Ronghui Technology Co., Ltd
Address	Liboshui No.1 Industrial Zone, Shiwan Town, Boluo County, Huizhou City, Guangdong Province, China
Equipment	Wireless Controller for RH-008
Model No.	RH-008
Trade Mark	/
Standard	FCC Part15, Subpart C (15.247) ANSI C63.10-2013

**We Declare:**

The equipment described above is tested by DongGuanShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuanShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

## 2. SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	PASS	-----
15.247(a)(2)	Bandwidth	PASS	-----
15.247(b)(3)	Maximum Output Power	PASS	-----
15.247(d)	Conducted Spurious Emission	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.203	Antenna Requirement	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

**2.1 MEASUREMENT UNCERTAINTY**

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	$\pm 0.048\text{kHz}$
Uncertainty for conducted RF Power	$\pm 0.32\text{dB}$

**Note:**

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

**Test Facility:**

The Test site used by DongGuanShuoXin Electronic Technology Co., Ltd. to collect test data is located on the Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

The test facility is recognized, certified, or accredited by the following organizations:

Item	Registration No.	Expiration Date
CNAS	L3098	2030-08-27
A2LA	4893.01	2026-06-30
Innovation, Science and Economic Development Canada (ISED)	11033A	2026-06-30
Federal Communications Commission (FCC)	171688 Designation No.: CN1235	2026-06-30

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Controller for RH-008	
Brand Name	/	
Test Model	RH-008	
Series Model	N/A	
Model Difference(s)	N/A	
Hardware Version	1.0	
Software Version	1.0	
Power Source	USB	
Power Rating	I/P: 5Vdc, 500mA	
Operation Frequency	2412 MHz~ 2462 MHz	
Modulation Technology	IEEE 802.11b:DSSS IEEE 802.11g:OFDM IEEE 802.11n:OFDM	
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps	
Operating Mode	IEEE 802.11b: TX IEEE 802.11g: TX IEEE 802.11n (HT20): TX	
Antenna Information	Antenna Type: PIFA	Maximum Peak Gain:1.14dBi (Provide by manufacturer)
Max. Output Power	IEEE 802.11b: 7.33dBm(0.005408W) IEEE 802.11g: 7.74dBm(0.005943W) IEEE 802.11n (HT20): 7.76dBm(0.005970W)	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-20 MHz Mode Channel 06

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 4	TX N-20 MHz Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 4	TX N-20 MHz Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11



**NOTE:**

(1) The measurements are performed at the high, middle, low available channels.

(2) 802.11b mode: DBPSK (1Mbps)

802.11g mode: OFDM (6Mbps)

802.11n HT20 mode: BPSK (13Mbps)


For radiated emission tests, the highest output powers were set for final test.

(3) For radiated emission below 1GHz and AC power line conducted emissions test, the IEEE 802.11n20 channel 06 is found to be the worst case and recorded.

**3.3 PARAMETERS OF TEST SOFTWARE**

Test Software	iComm_HW_Tool_1.3.5		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	Default	Default	Default
IEEE 802.11g	Default	Default	Default
IEEE 802.11n (HT20)	Default	Default	Default

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

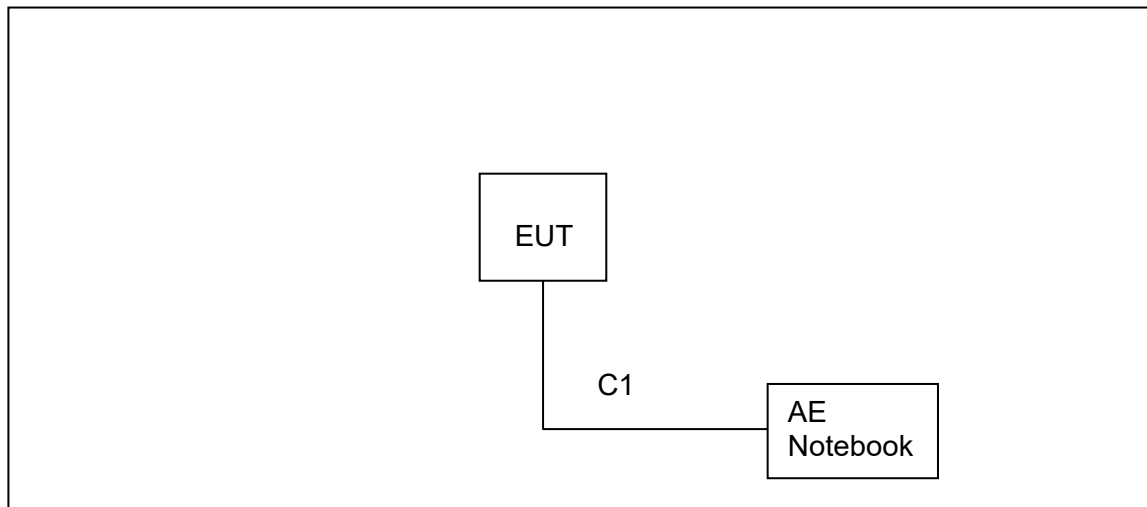

### 3.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE	Notebook	Lenovo	/	/

Item	Cable Type	Shielded Type	Ferrite Core	Length
C1	DC Cable	NO	NO	0.8m

### 3.6 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	DC 5V (AC 120V/60Hz)
Radiated Emissions-9K-30MHz	25°C	60%	DC 5V
Radiated Emissions-30 MHz to 1GHz	24.6°C	53%	DC 5V
Radiated Emissions-Above 1000 MHz	24.1°C	42%	DC 5V
Bandwidth	24.8°C	40.9%	DC 5V
Maximum Output Power	24.8°C	40.9%	DC 5V
Conducted Spurious Emission	24.8°C	40.9%	DC 5V
Power Spectral Density	24.8°C	40.9%	DC 5V

### 3.7 DUTY CYCLE

All tests were performed under the condition of 100% Duty Cycle

NOTE:

For IEEE 802.11b, IEEE 802.11g IEEE 802.11n (HT20)

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

## 4. AC POWER LINE CONDUCTED EMISSIONS TEST

### 4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.50	66to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


### 4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

### 4.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	11/17/2025
2	EMI Test Receiver	R&S	ESCI	101308	06/05/2025
3	LISN	AFJ	LS16	16011103219	06/05/2025
4	LISN	Schwarzbeck	NSLK 8127	8127-432	06/05/2025
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

#### 4.4 TESTSETUP

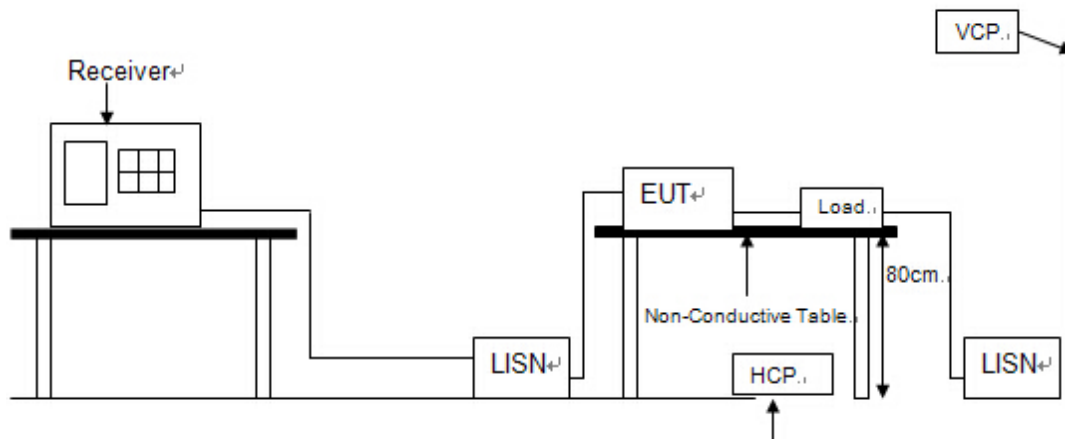


#### 4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 4.6 TEST RESULTS

Test Mode: TX N-20 MHz Mode Channel 06

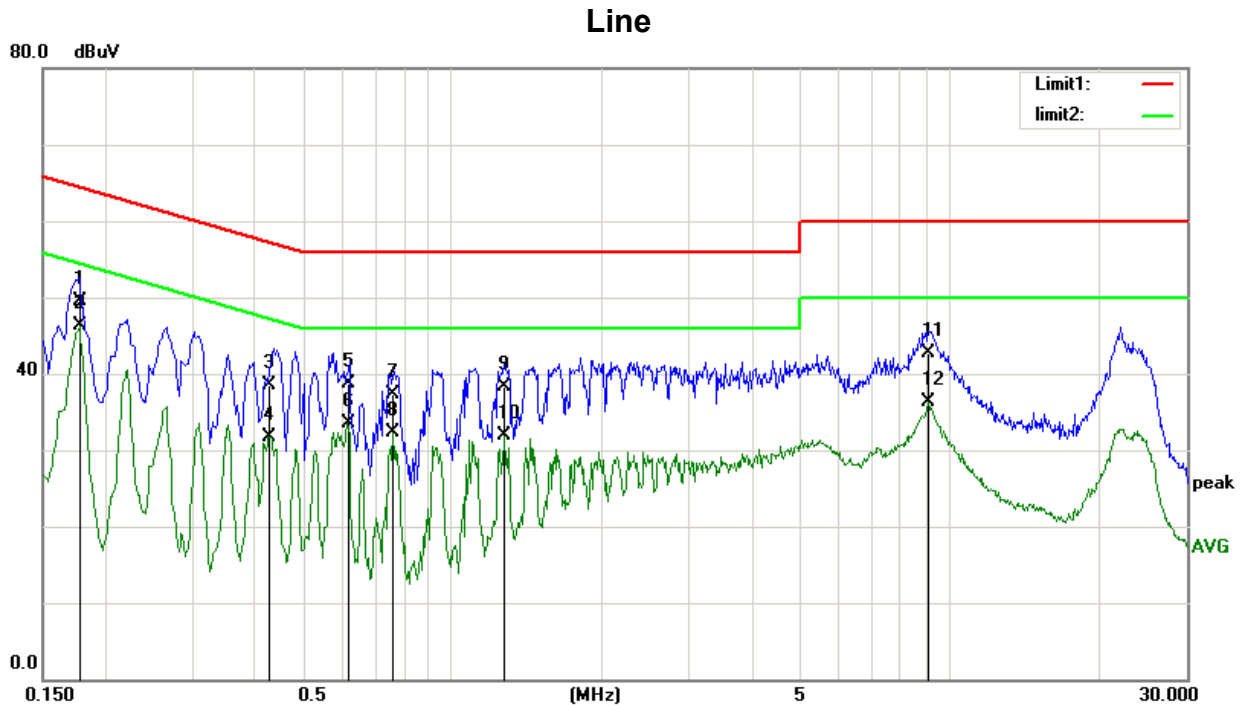

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1780	38.83	10.72	49.55	64.57	-15.02	QP
2	0.1780	35.50	10.72	46.22	54.57	-8.35	AVG
3	0.4260	27.79	10.81	38.60	57.33	-18.73	QP
4	0.4260	20.96	10.81	31.77	47.33	-15.56	AVG
5	0.6140	28.11	10.66	38.77	56.00	-17.23	QP
6	0.6140	22.92	10.66	33.58	46.00	-12.42	AVG
7	0.7620	26.58	10.73	37.31	56.00	-18.69	QP
8	0.7620	21.65	10.73	32.38	46.00	-13.62	AVG
9	1.2700	27.56	10.66	38.22	56.00	-17.78	QP
10	1.2700	21.29	10.66	31.95	46.00	-14.05	AVG
11	9.0860	31.81	10.87	42.68	60.00	-17.32	QP
12	9.0860	25.47	10.87	36.34	50.00	-13.66	AVG


Remarks:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20 MHz Mode Channel 06

## Neutral

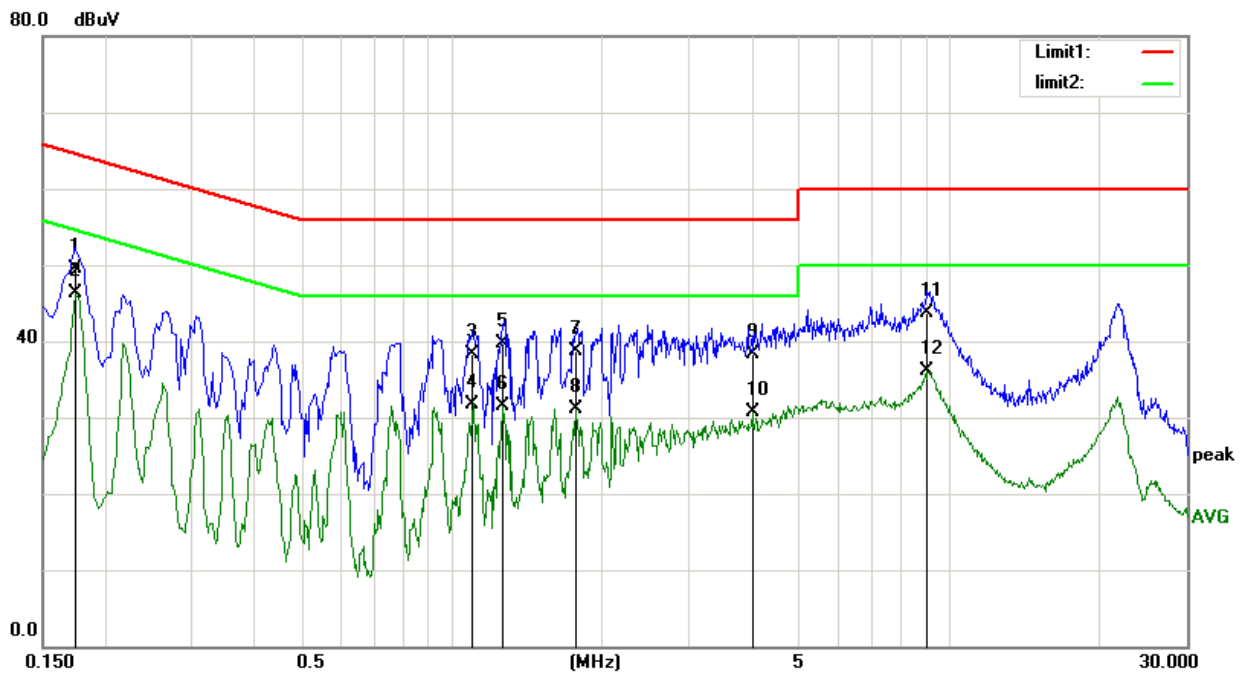

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1740	38.80	10.68	49.48	64.76	-15.28	QP
2	0.1740	35.72	10.68	46.40	54.76	-8.36	AVG
3	1.1019	27.63	10.61	38.24	56.00	-17.76	QP
4	1.1019	21.19	10.61	31.80	46.00	-14.20	AVG
5	1.2660	28.99	10.66	39.65	56.00	-16.35	QP
6	1.2660	20.86	10.66	31.52	46.00	-14.48	AVG
7	1.7740	27.97	10.75	38.72	56.00	-17.28	QP
8	1.7740	20.41	10.75	31.16	46.00	-14.84	AVG
9	4.0100	27.50	10.76	38.26	56.00	-17.74	QP
10	4.0100	20.03	10.76	30.79	46.00	-15.21	AVG
11	9.0380	32.91	10.87	43.78	60.00	-16.22	QP
12	9.0380	25.23	10.87	36.10	50.00	-13.90	AVG

### Remarks:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## 5. RADIATED EMISSION TEST

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) and RSS-Gen 8.10, then the 15.209(a) and RSS-Gen 8.9 limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-30 MHz)

Frequency (MHz)	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement Distance (meters)
0.009-0.490	6.37/F(kHz)	300
0.490-1.705	6.37/F(kHz)	30
1.705-30.0	0.08	30

#### LIMITS OF RADIATED EMISSION MEASUREMENT (30 MHz-1000MHz)

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

#### NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C and RSS-247.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level ( $\mu$ V/m).



## 5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. The test result is calculated as the following:
  - (1) Result = Reading + Correct Factor
  - (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
  - (3) Margin = Result - Limit

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

## 5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	06/05/2025
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/17/2025
3	Loop antenna	SCHWARZBECK K	FMZB1519	1519-062	03/30/2025
4	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	03/29/2025
5	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	03/29/2025
6	Preamplifier Amplifier	HP	8447F	3113A05680	11/17/2025
7	PRE-AMPLIFIER	EMEC	EM01G26G	980136	03/29/2025
8	RF Cable	R&S	Test Cable 4	4	11/17/2025
9	RF Cable	R&S	Test Cable 5	5	11/17/2025
10	RF Cable	R&S	Test Cable 9	9	04/17/2025
11	RF Cable	R&S	Test Cable 10	10	04/17/2025
12	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

## 5.4 TESTSETUP


### 9 kHz-30 MHz

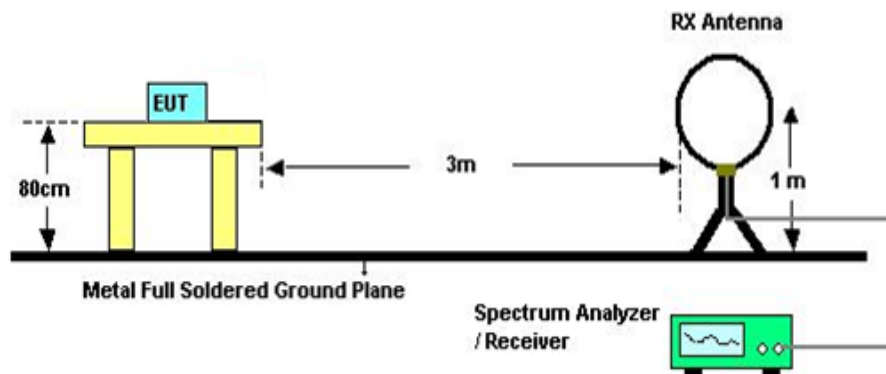

### 30 MHz to 1 GHz

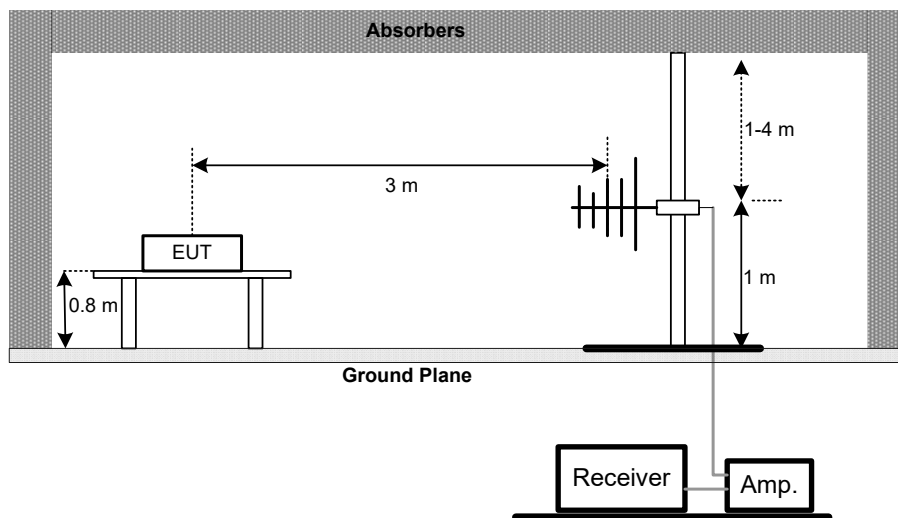

## Above 1 GHz

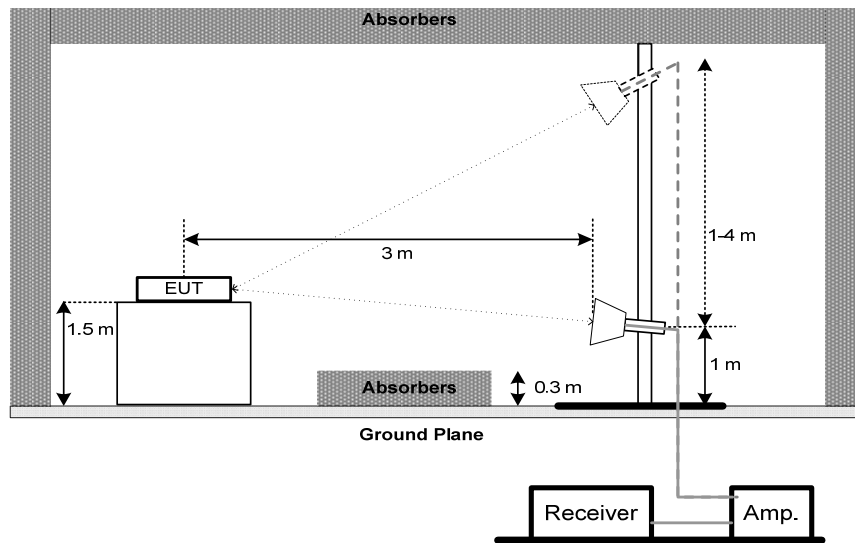

### 5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULTS - 9kHz TO 30MHz**

Test Mode:	TX N-20 MHz Mode Channel 06
------------	-----------------------------

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $20 \log (\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor

## 5.7 TEST RESULTS - 30MHz TO 1000MHz

Test Mode : TX N-20 MHz Mode Channel 06


### Vertical

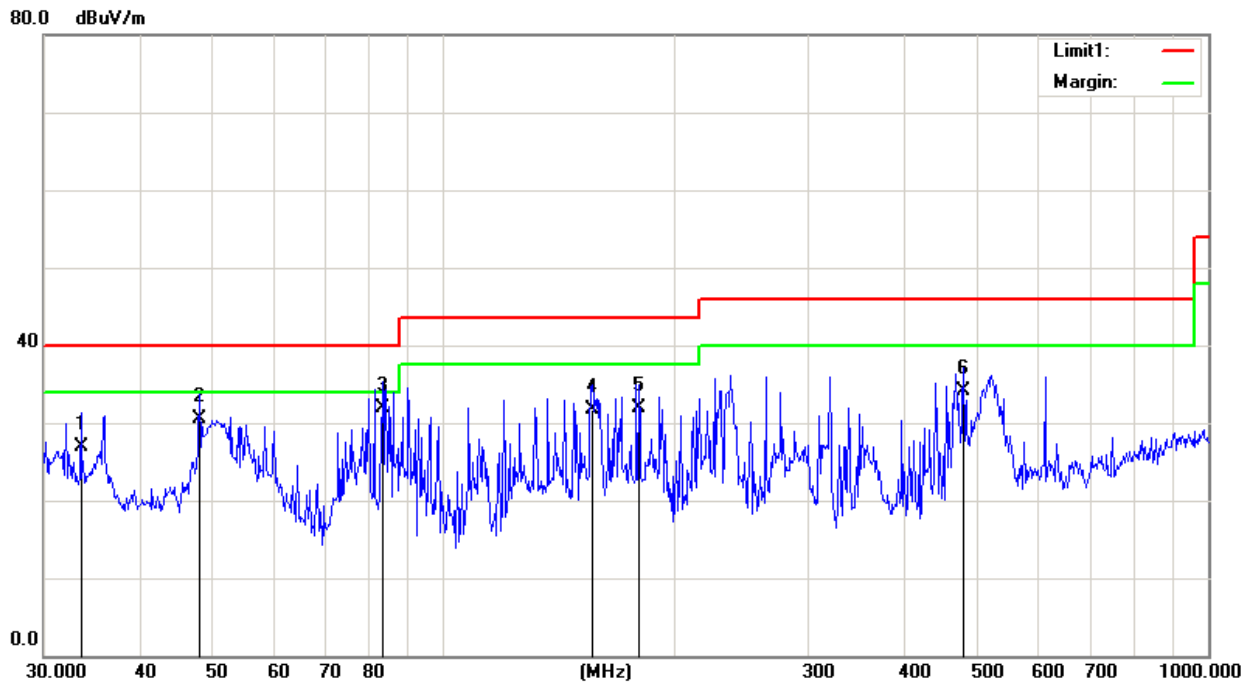

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1		33.5623	41.79	-14.79	27.00	40.00	-13.00	QP	100	37
2		47.9938	44.80	-14.24	30.56	40.00	-9.44	QP	300	224
3	*	83.2296	49.78	-17.78	32.00	40.00	-8.00	QP	200	87
4		156.4576	43.06	-11.26	31.80	43.50	-11.70	QP	100	330
5		180.0165	44.61	-12.71	31.90	43.50	-11.60	QP	200	207
6		478.8455	41.18	-7.16	34.02	46.00	-11.98	QP	100	118

Test Mode : TX N-20 MHz Mode Channel 06


## Horizontal

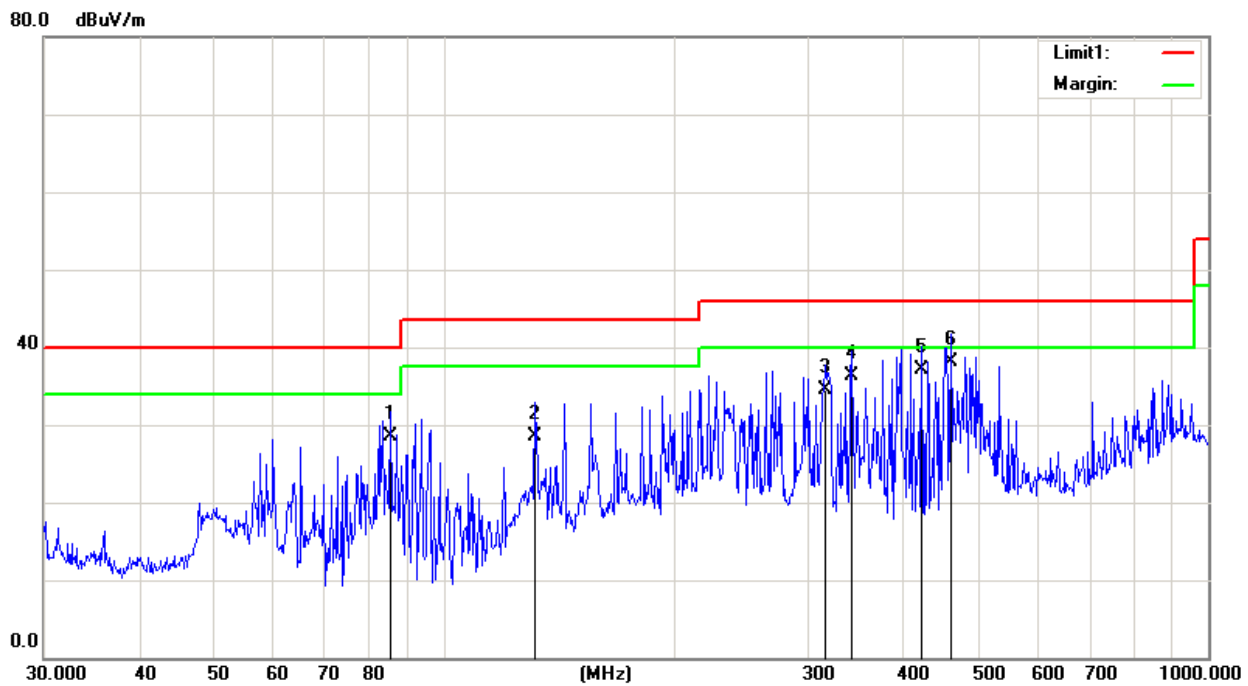

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		85.2980	46.01	-17.41	28.60	40.00	-11.40	QP	100	246
2		131.7572	41.44	-12.98	28.46	43.50	-15.04	QP	200	79
3		315.4806	43.69	-9.23	34.46	46.00	-11.54	QP	100	35
4		341.9786	45.35	-8.95	36.40	46.00	-9.60	QP	100	9
5		422.0577	45.08	-7.93	37.15	46.00	-8.85	QP	100	201
6	*	460.7271	45.03	-7.01	38.02	46.00	-7.98	QP	100	163

## 5.8 TEST RESULTS- ABOVE 1000MHz (BAND EDGE)


Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

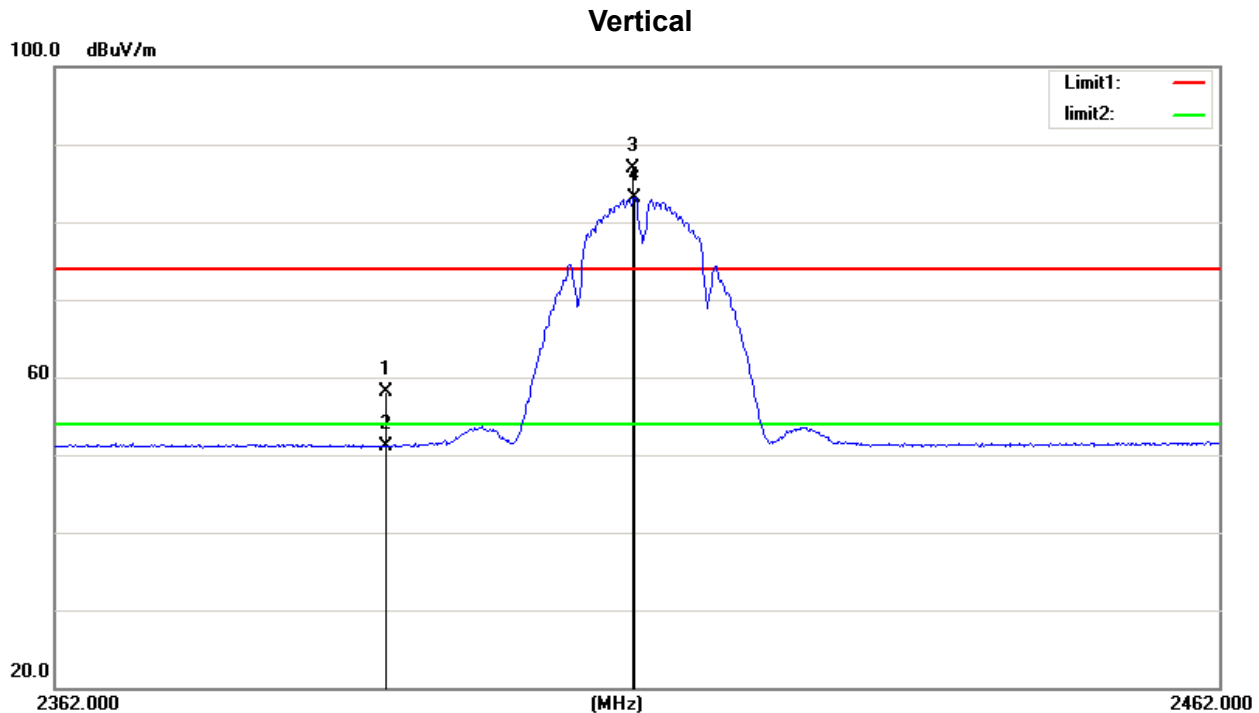

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2390.000	27.94	30.14	58.08	74.00	-15.92	peak	150	158
2		2390.000	20.96	30.14	51.10	54.00	-2.90	AVG	150	158
3	X	2411.100	56.82	30.17	86.99	74.00	12.99	peak	150	158 No Limit
4	*	2411.300	53.01	30.17	83.18	54.00	29.18	AVG	150	158 No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz


## Horizontal

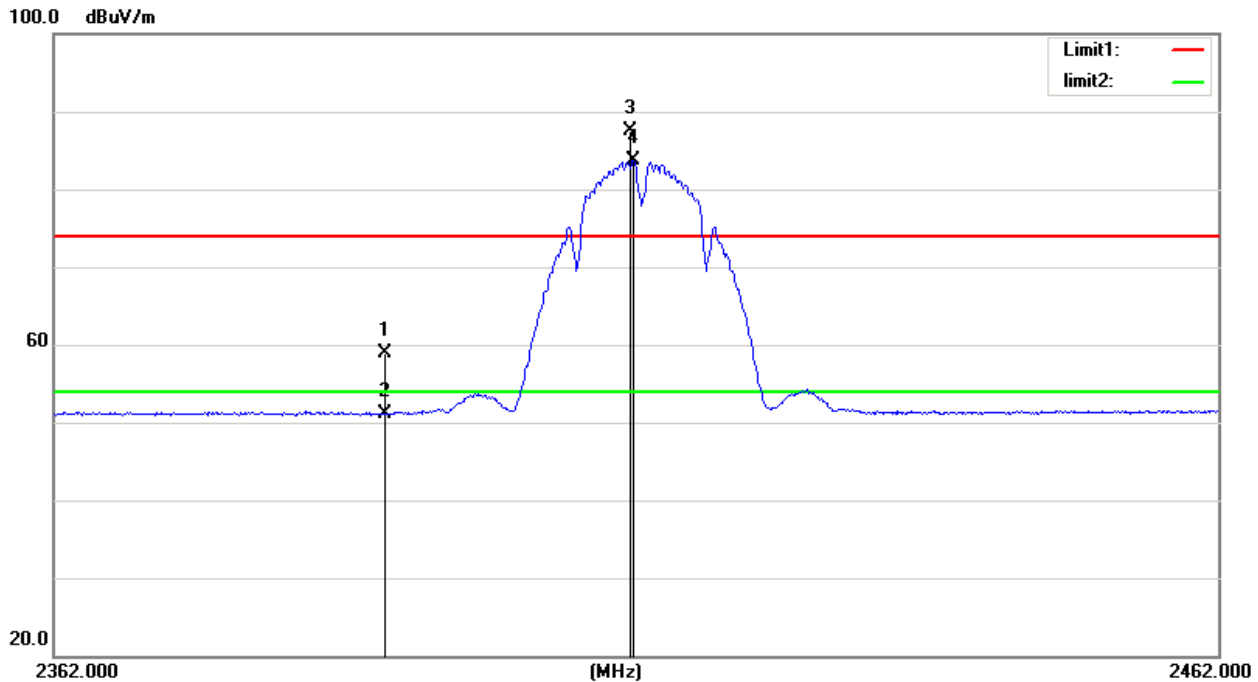

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2390.000	28.68	30.14	58.82	74.00	-15.18	peak	150	250
2		2390.000	20.94	30.14	51.08	54.00	-2.92	AVG	150	250
3	X	2411.000	57.40	30.17	87.57	74.00	13.57	peak	150	250 No Limit
4	*	2411.300	53.56	30.17	83.73	54.00	29.73	AVG	150	250 No Limit




Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

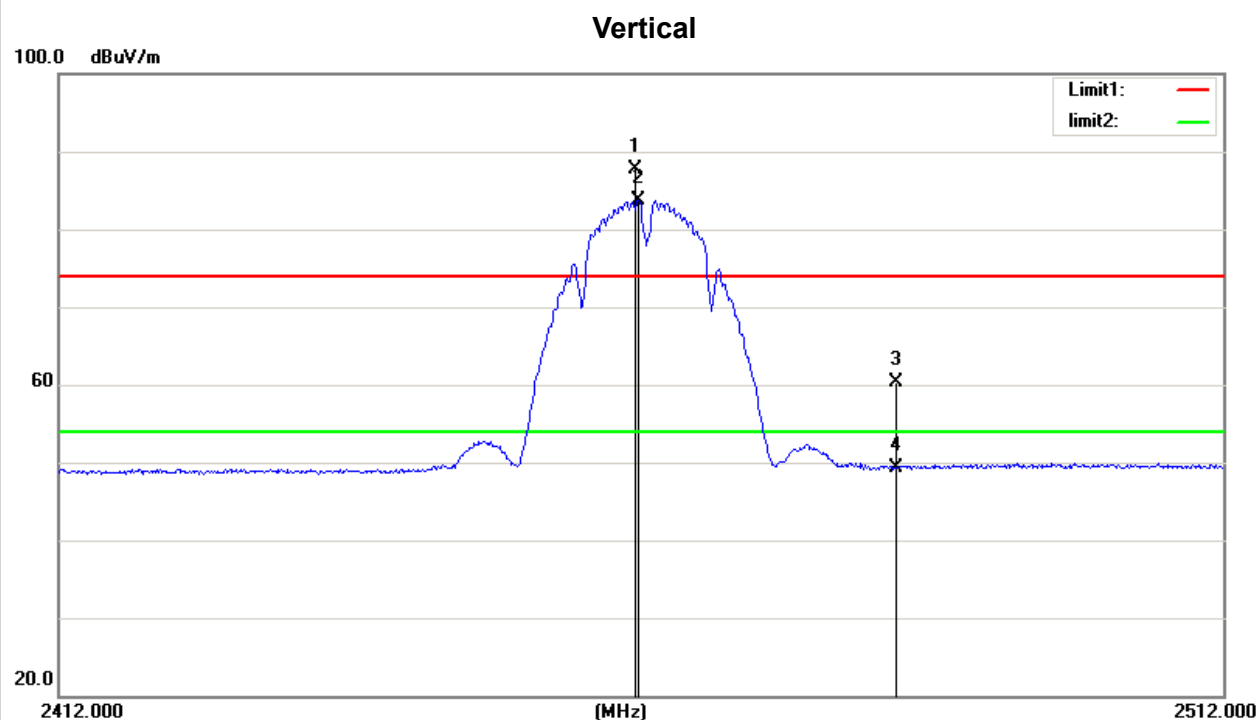


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1	X	2461.000	57.30	30.42	87.72	74.00	13.72	peak	150	152	No Limit
2	*	2461.300	53.31	30.43	83.74	54.00	29.74	AVG	150	152	No Limit
3		2483.500	29.58	30.71	60.29	74.00	-13.71	peak	150	152	
4		2483.500	18.58	30.71	49.29	54.00	-4.71	AVG	150	152	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

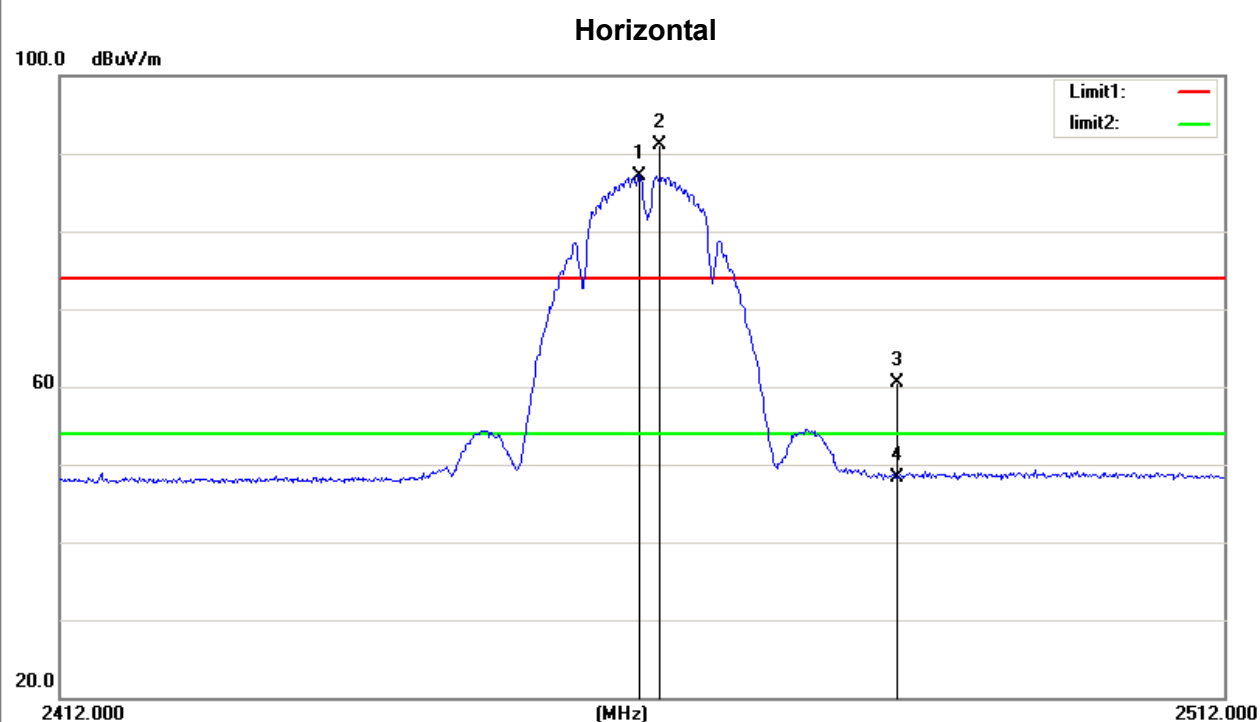

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1	*	2461.300	56.77	30.43	87.20	54.00	33.20	AVG	150	237	No Limit
2	X	2463.000	60.66	30.46	91.12	74.00	17.12	peak	150	237	No Limit
3		2483.500	29.77	30.71	60.48	74.00	-13.52	peak	150	237	
4		2483.500	17.62	30.71	48.33	54.00	-5.67	AVG	150	237	


Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

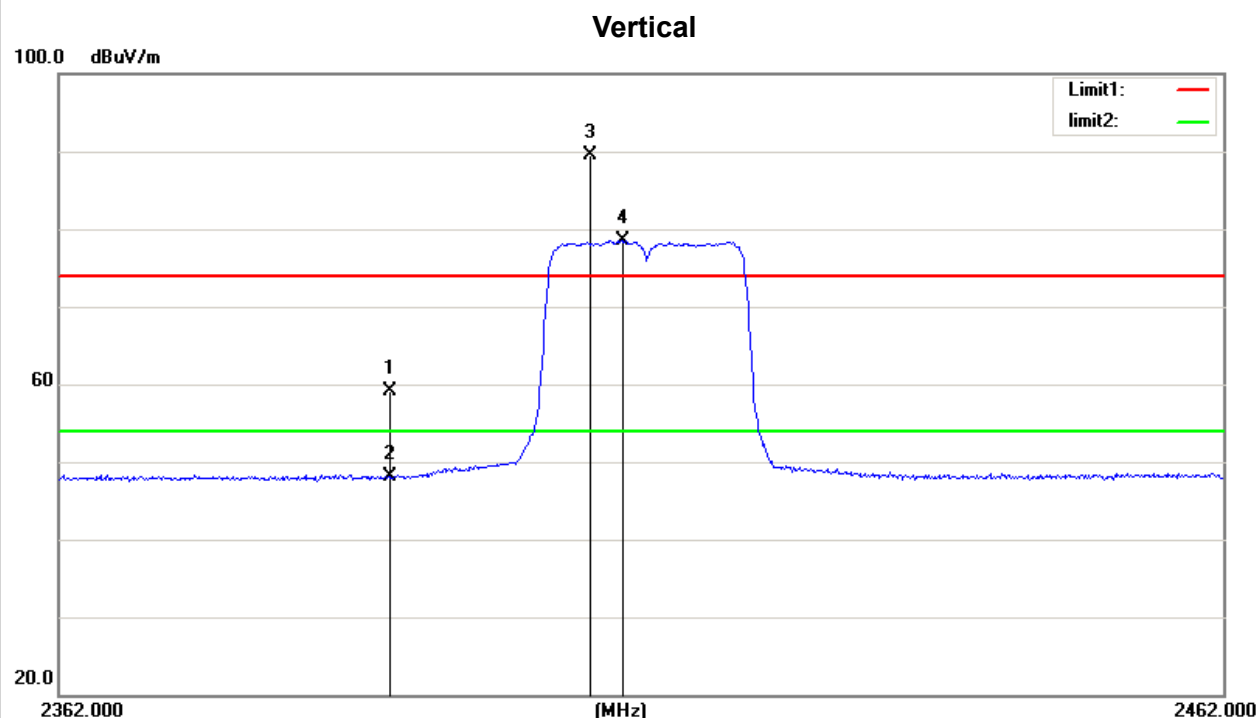

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2390.000	28.93	30.14	59.07	74.00	-14.93	peak	150	155
2		2390.000	17.96	30.14	48.10	54.00	-5.90	AVG	150	155
3	X	2407.100	59.41	30.16	89.57	74.00	15.57	peak	150	155 No Limit
4	*	2410.000	48.32	30.17	78.49	54.00	24.49	AVG	150	155 No Limit


Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

## Horizontal

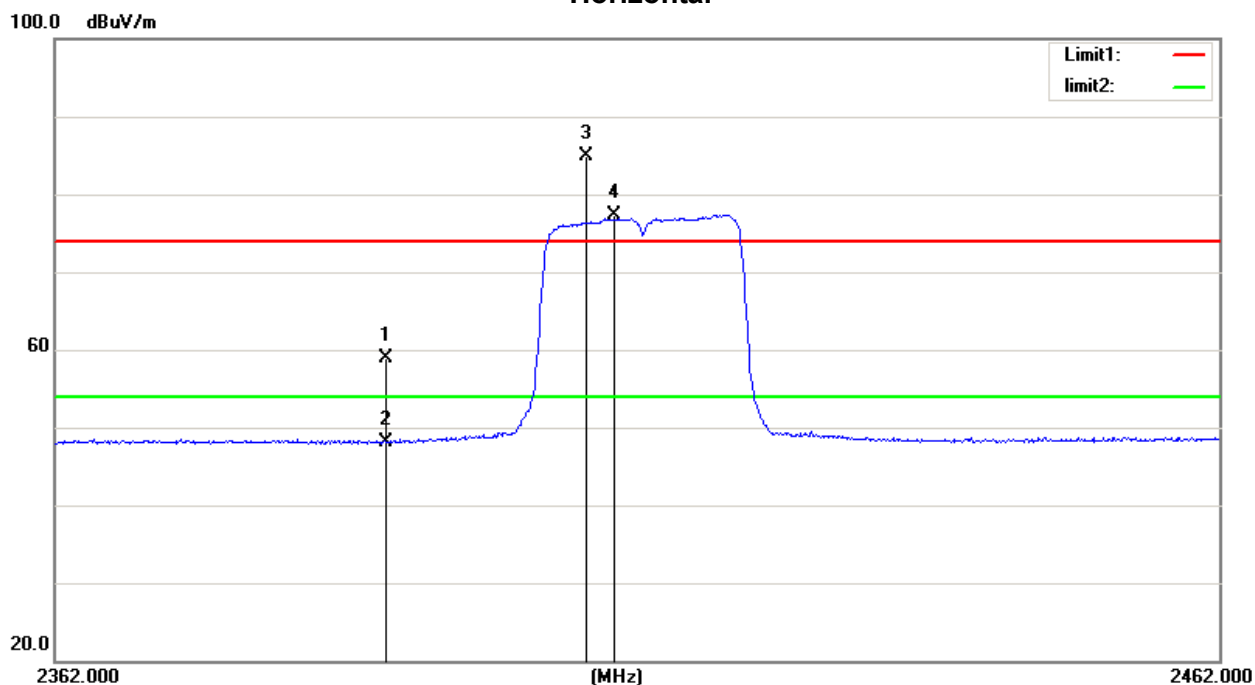

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2390.000	28.79	30.14	58.93	74.00	-15.07	peak	150	178	
2		2390.000	18.02	30.14	48.16	54.00	-5.84	AVG	150	178	
3	X	2407.100	54.72	30.16	84.88	74.00	10.88	peak	150	178	No Limit
4	*	2409.500	47.12	30.17	77.29	54.00	23.29	AVG	150	178	No Limit


Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

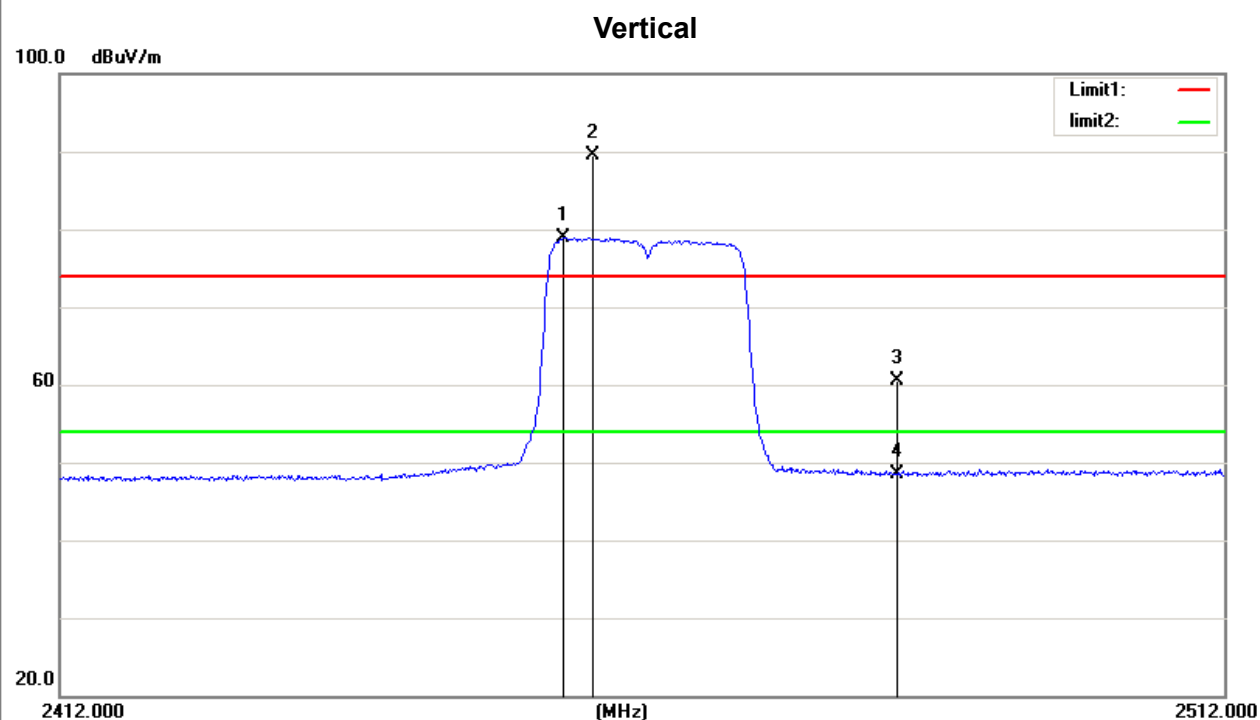

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1	*	2454.900	48.60	30.35	78.95	54.00	24.95	AVG	150	145	No Limit
2	X	2457.200	59.15	30.38	89.53	74.00	15.53	peak	150	145	No Limit
3		2483.500	29.86	30.71	60.57	74.00	-13.43	peak	150	145	
4		2483.500	17.87	30.71	48.58	54.00	-5.42	AVG	150	145	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz


## Horizontal

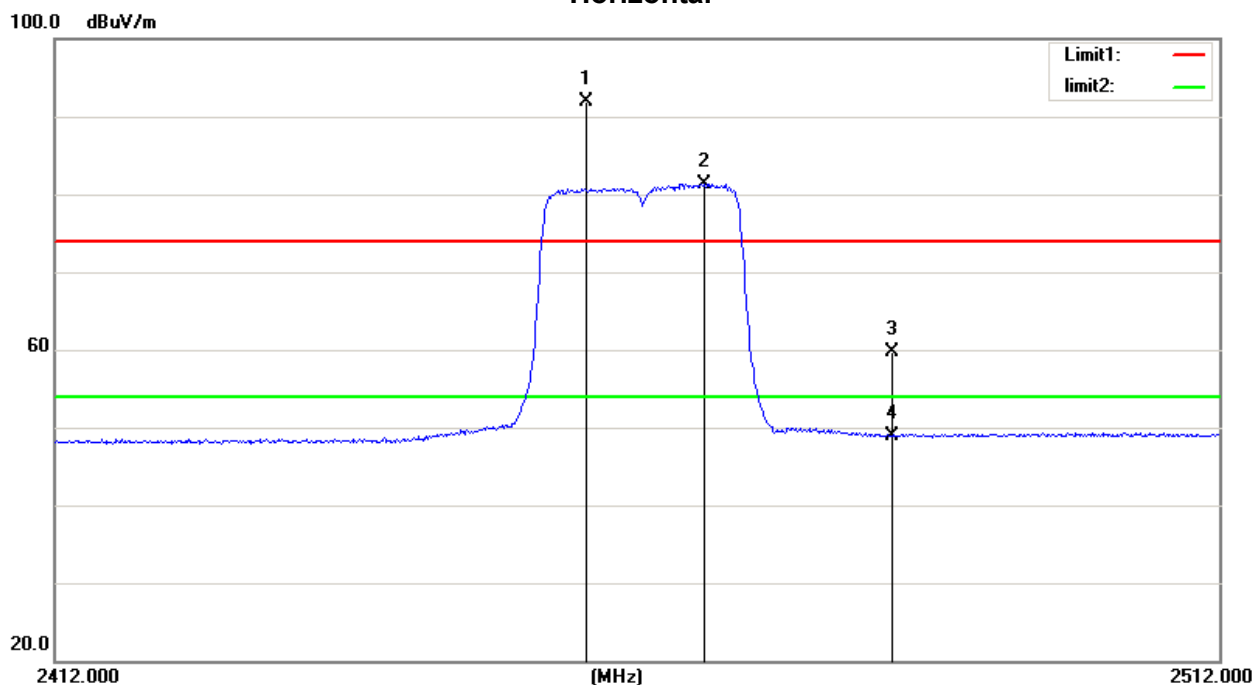

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1	X	2457.200	61.60	30.38	91.98	74.00	17.98	peak	150	173	No Limit
2	*	2467.300	50.86	30.51	81.37	54.00	27.37	AVG	150	173	No Limit
3		2483.500	29.05	30.71	59.76	74.00	-14.24	peak	150	173	
4		2483.500	18.24	30.71	48.95	54.00	-5.05	AVG	150	173	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz


## Vertical

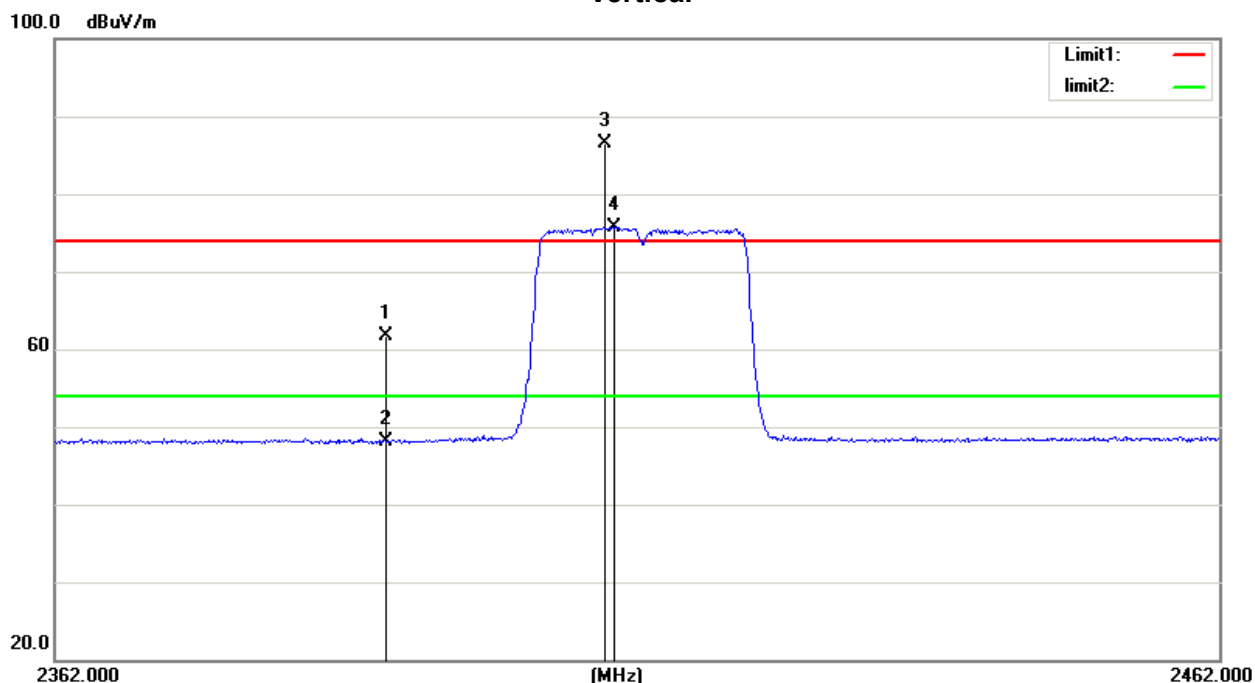

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		2390.000	31.48	30.14	61.62	74.00	-12.38	peak	150	154
2		2390.000	17.93	30.14	48.07	54.00	-5.93	AVG	150	154
3	X	2408.800	56.33	30.17	86.50	74.00	12.50	peak	150	154
4	*	2409.500	45.60	30.17	75.77	54.00	21.77	AVG	150	154

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz


## Horizontal

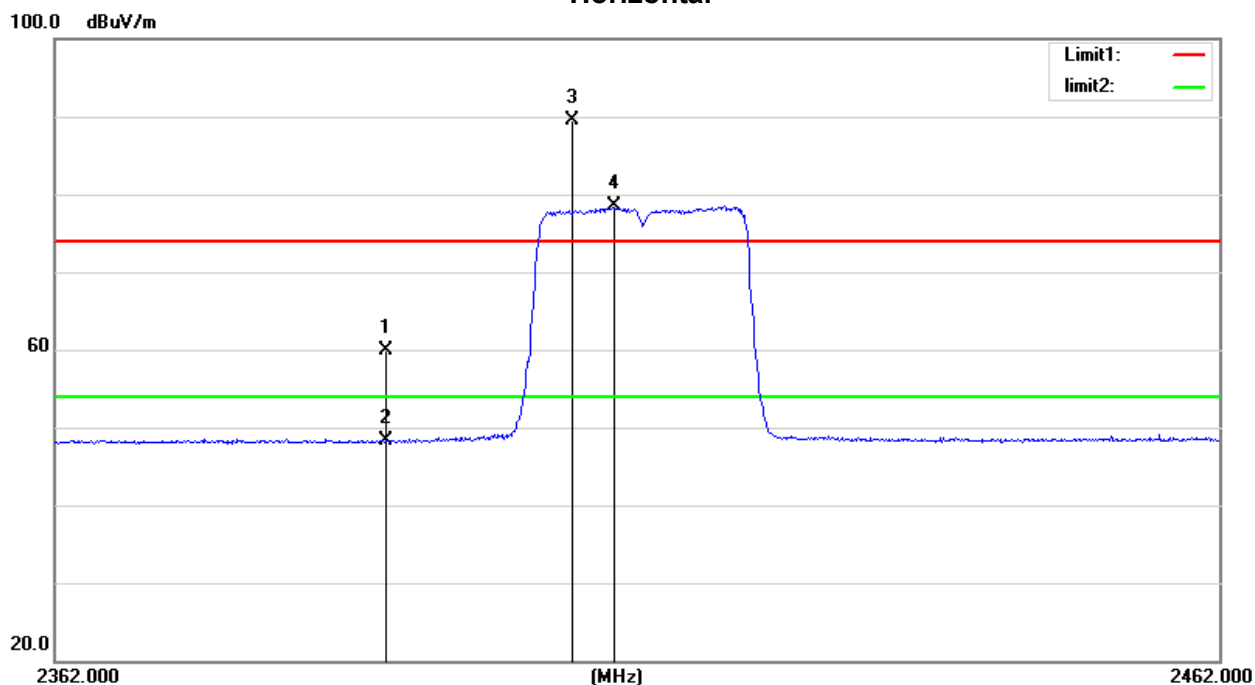

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2390.000	29.67	30.14	59.81	74.00	-14.19	peak	150	230
2		2390.000	18.22	30.14	48.36	54.00	-5.64	AVG	150	230
3	X	2405.900	59.35	30.16	89.51	74.00	15.51	peak	150	230
4	*	2409.500	48.30	30.17	78.47	54.00	24.47	AVG	150	230




Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

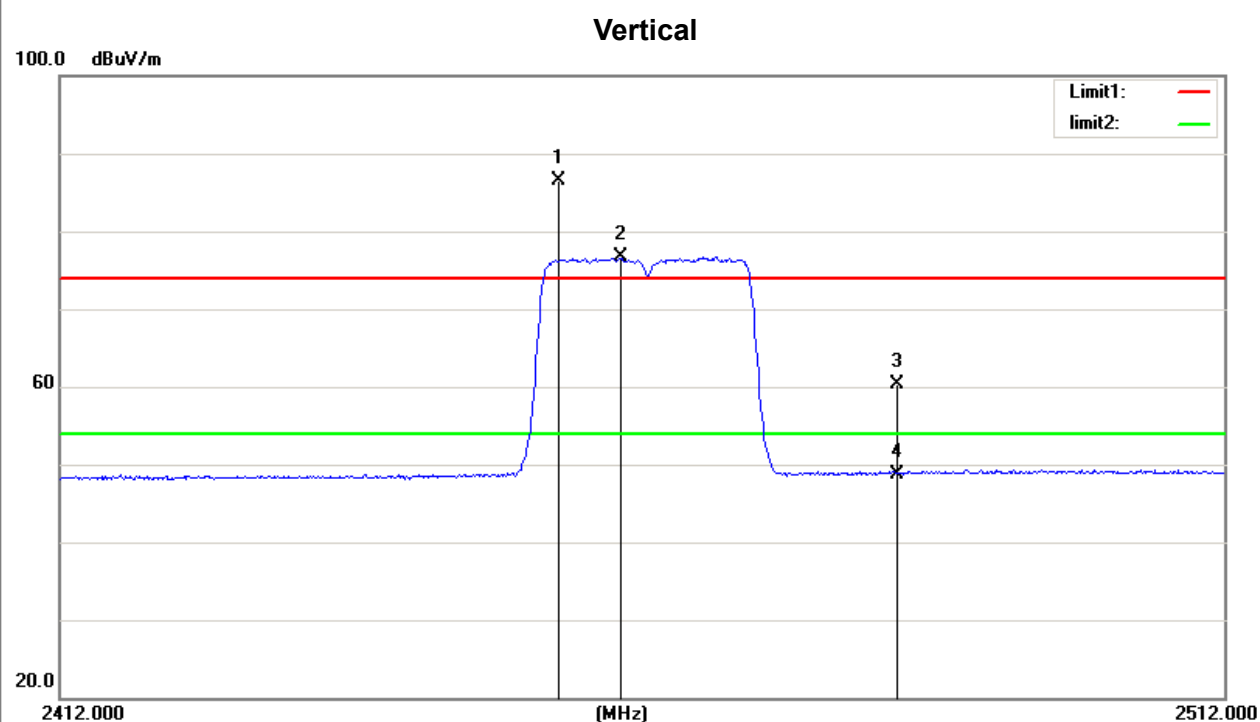

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1	X	2454.400	56.20	30.34	86.54	74.00	12.54	peak	150	328	No Limit
2	*	2459.700	46.33	30.41	76.74	54.00	22.74	AVG	150	328	No Limit
3		2483.500	29.52	30.71	60.23	74.00	-13.77	peak	150	328	
4		2483.500	18.09	30.71	48.80	54.00	-5.20	AVG	150	328	


Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

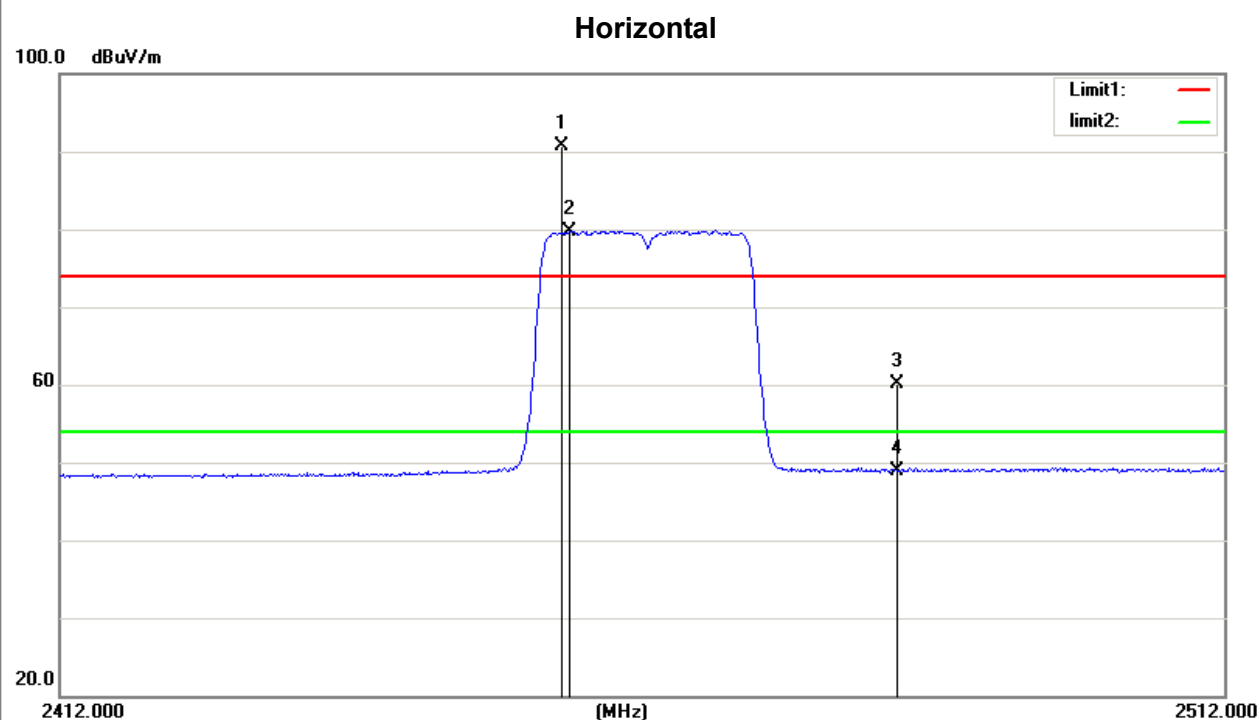

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1	X	2454.600	60.40	30.35	90.75	74.00	16.75	peak	150	231 No Limit
2	*	2455.400	49.34	30.35	79.69	54.00	25.69	AVG	150	231 No Limit
3		2483.500	29.45	30.71	60.16	74.00	-13.84	peak	150	231
4		2483.500	18.23	30.71	48.94	54.00	-5.06	AVG	150	231

## 5.9 TEST RESULTS- ABOVE 1000MHz (HARMONIC)


Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

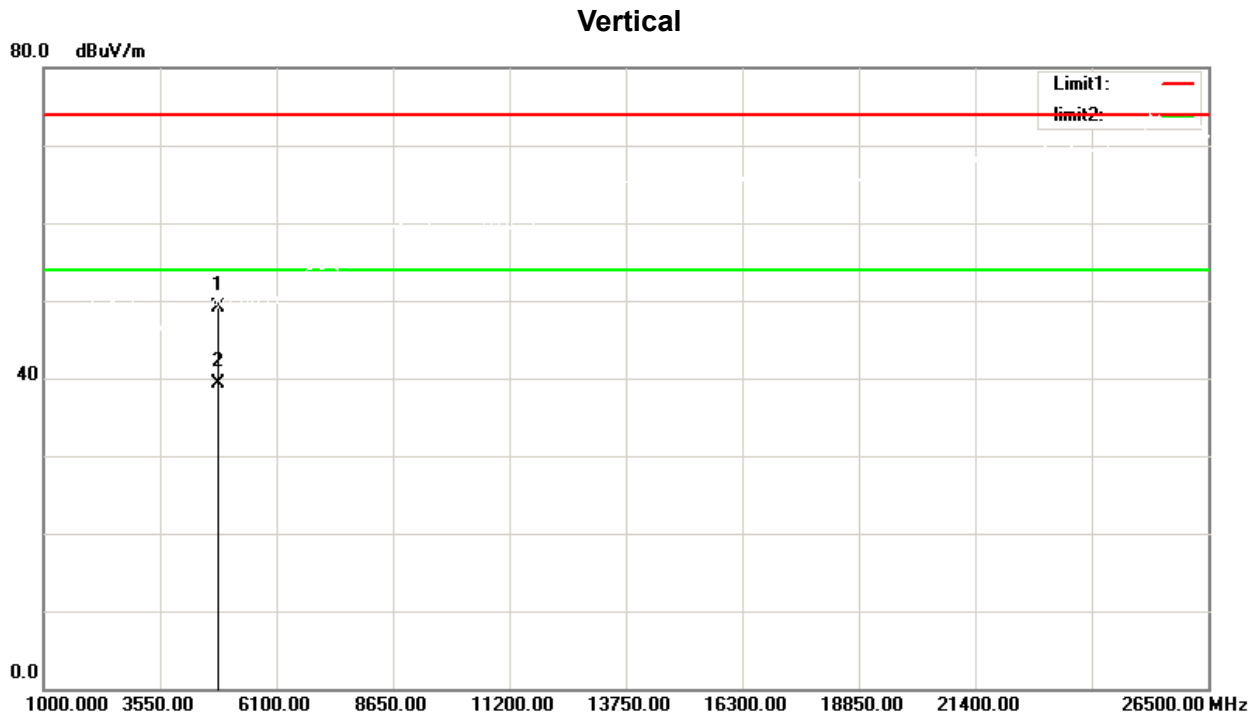

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4824.000	51.25	-2.11	49.14	74.00	-24.86	peak	150	77
2	*	4824.000	41.44	-2.11	39.33	54.00	-14.67	AVG	150	77

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz


## Horizontal

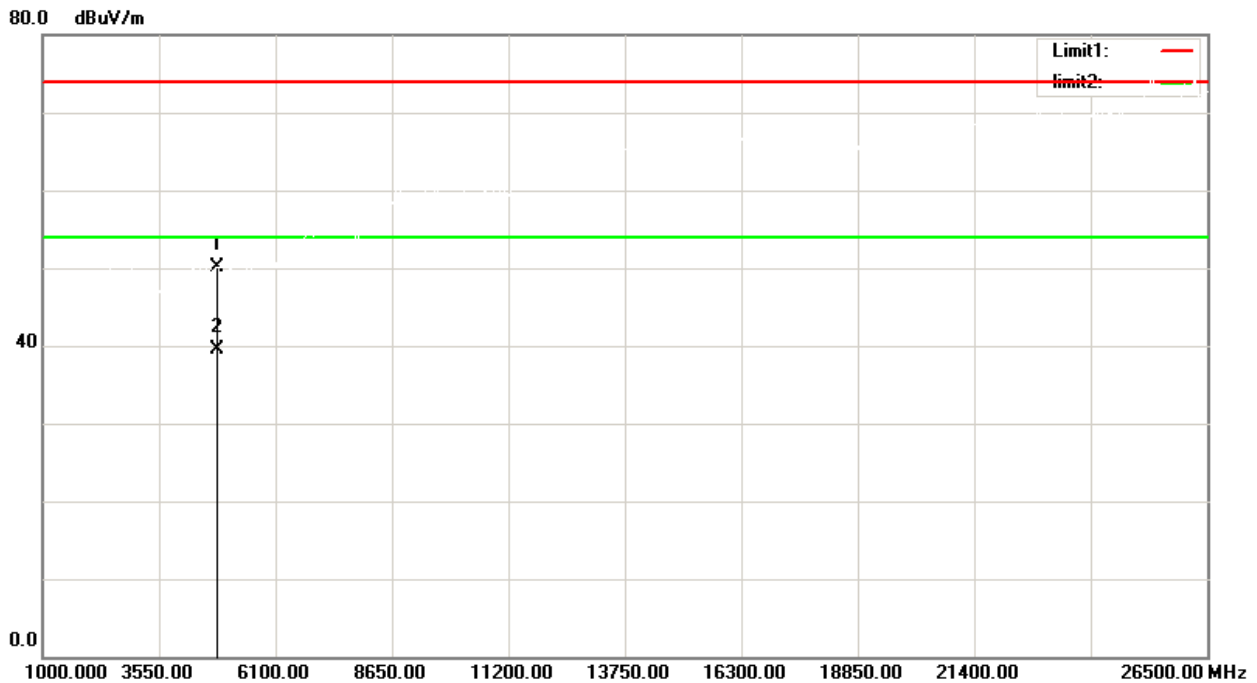

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		4824.000	52.15	-2.11	50.04	74.00	-23.96	peak	150	76
2	*	4824.000	41.66	-2.11	39.55	54.00	-14.45	AVG	150	76

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz


## Vertical

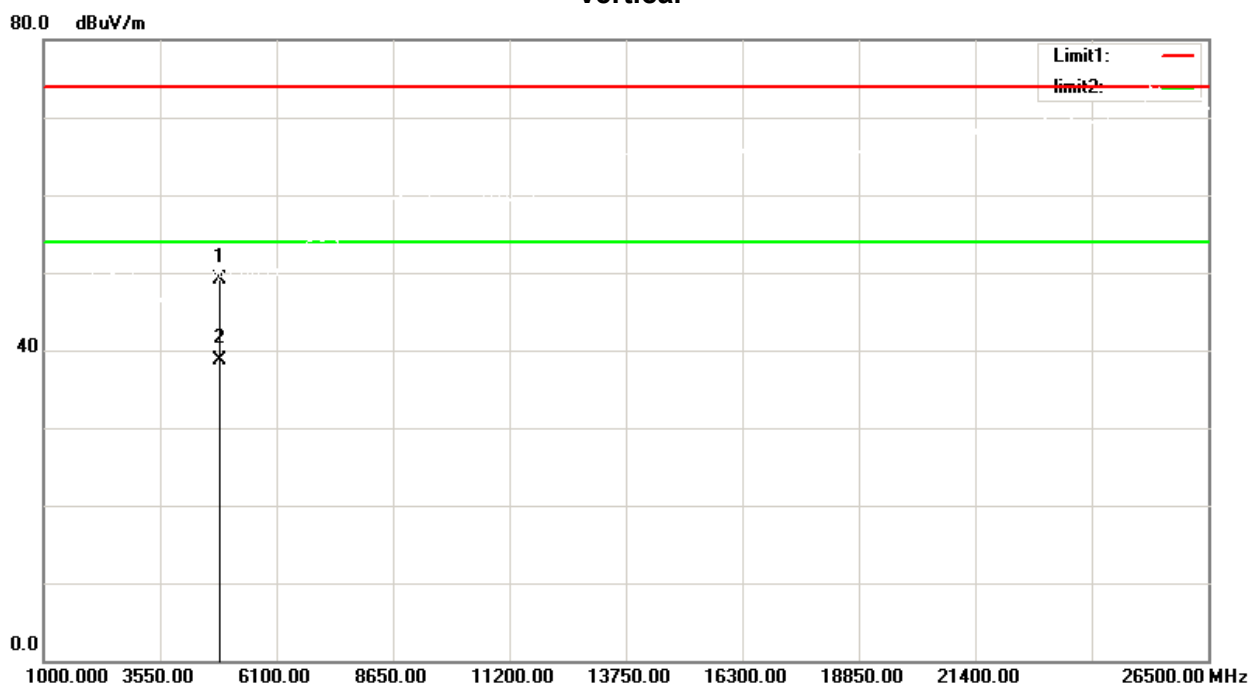

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4874.000	51.36	-2.22	49.14	74.00	-24.86	peak	150	85
2	*	4874.000	40.88	-2.22	38.66	54.00	-15.34	AVG	150	85

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz


## Horizontal

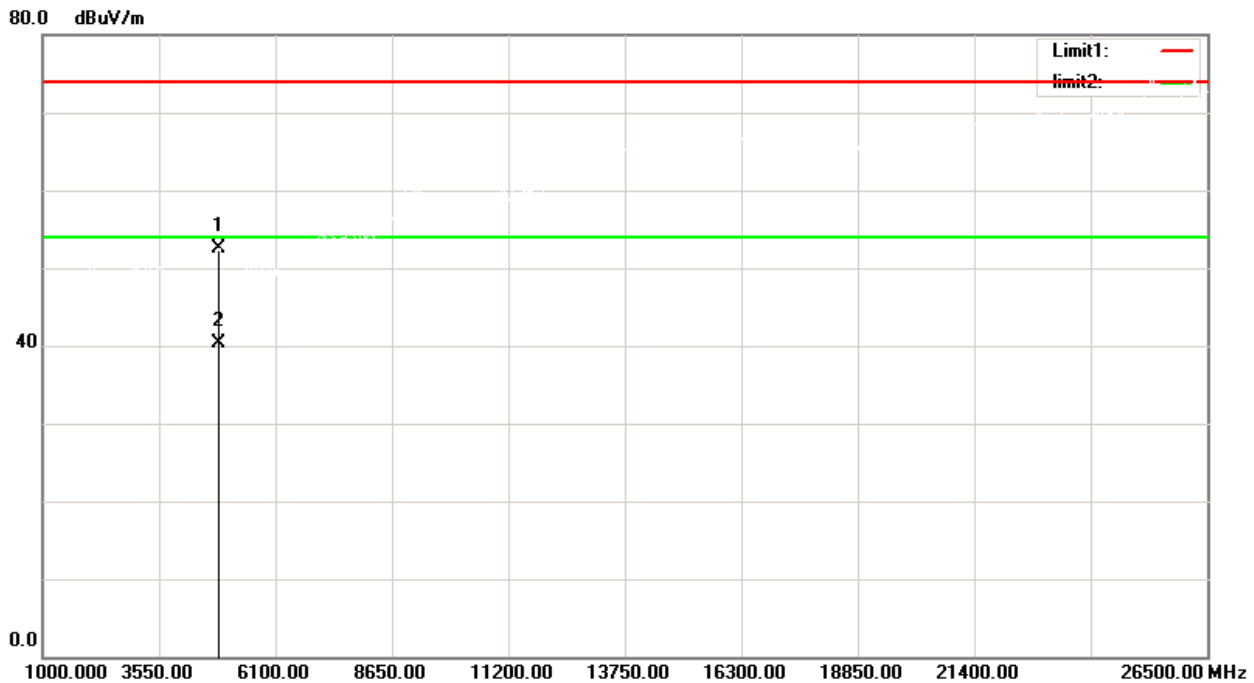

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4874.000	54.78	-2.22	52.56	74.00	-21.44	peak	150	88
2	*	4874.000	42.48	-2.22	40.26	54.00	-13.74	AVG	150	88

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz


## Vertical

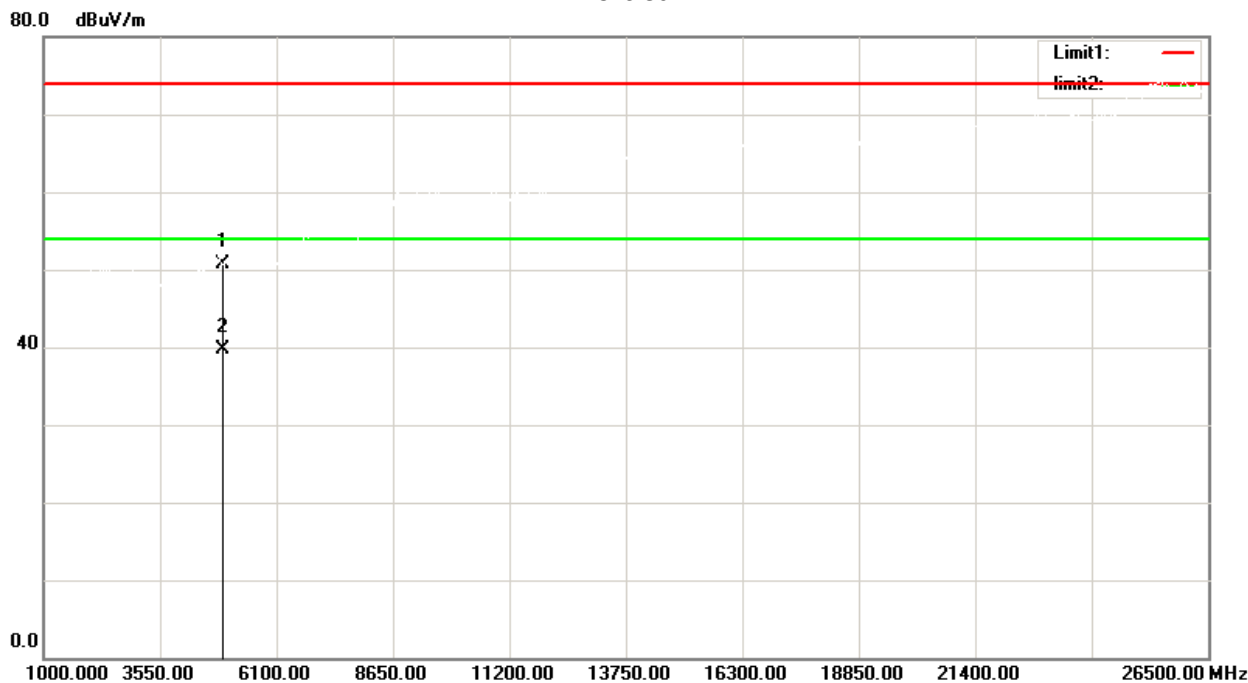

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		4924.000	52.66	-1.90	50.76	74.00	-23.24	peak	150	321
2	*	4924.000	41.58	-1.90	39.68	54.00	-14.32	AVG	150	321

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

## Horizontal

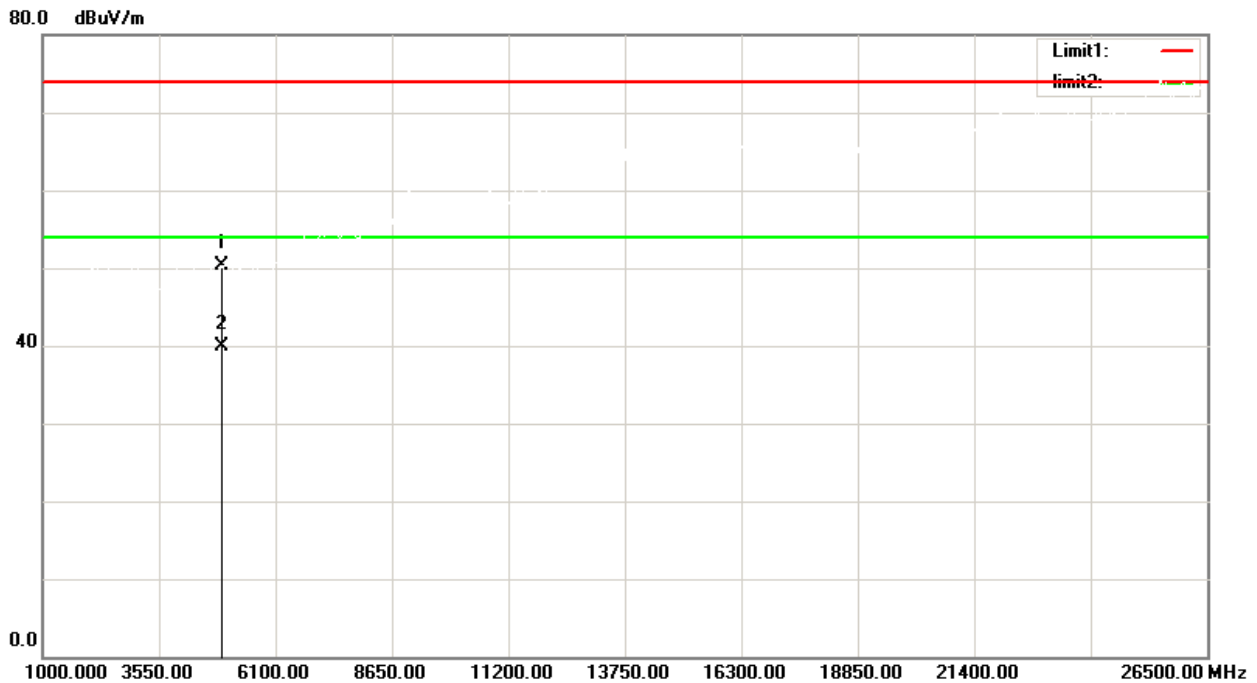


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		4924.000	52.11	-1.90	50.21	74.00	-23.79	peak	150	146
2	*	4924.000	41.77	-1.90	39.87	54.00	-14.13	AVG	150	146



Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz


## Vertical

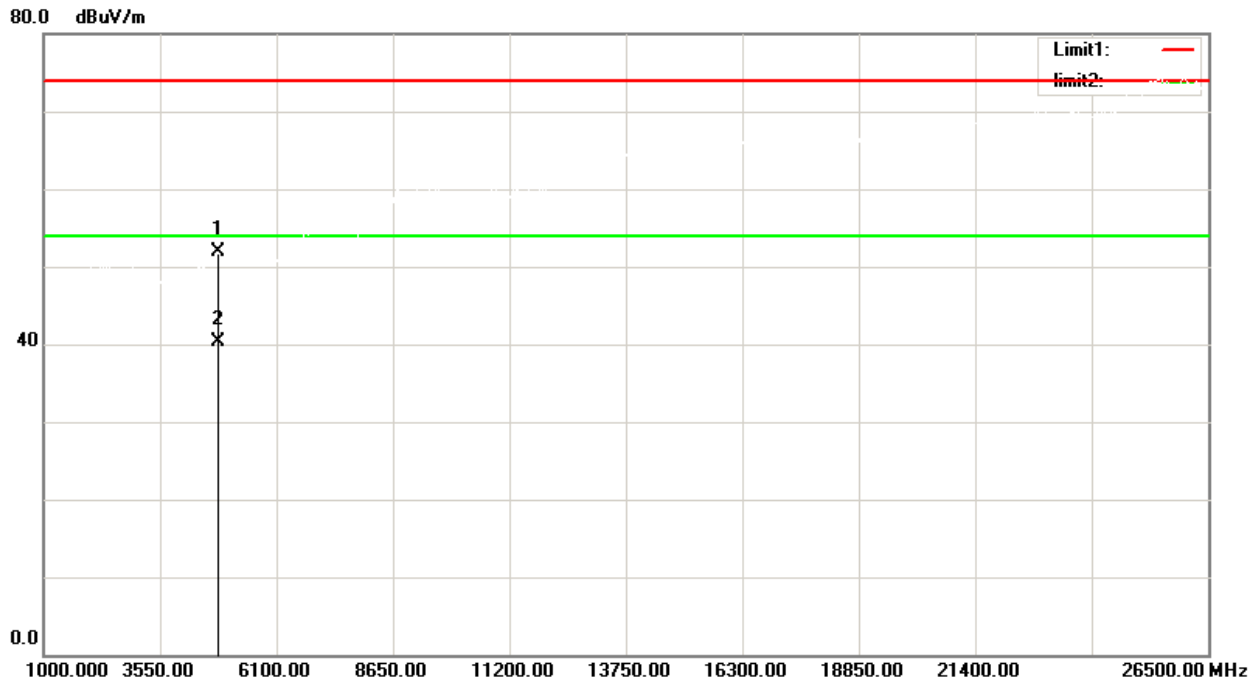

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4824.000	54.07	-2.11	51.96	74.00	-22.04	peak	150	112
2	*	4824.000	42.47	-2.11	40.36	54.00	-13.64	AVG	150	112

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz


## Horizontal

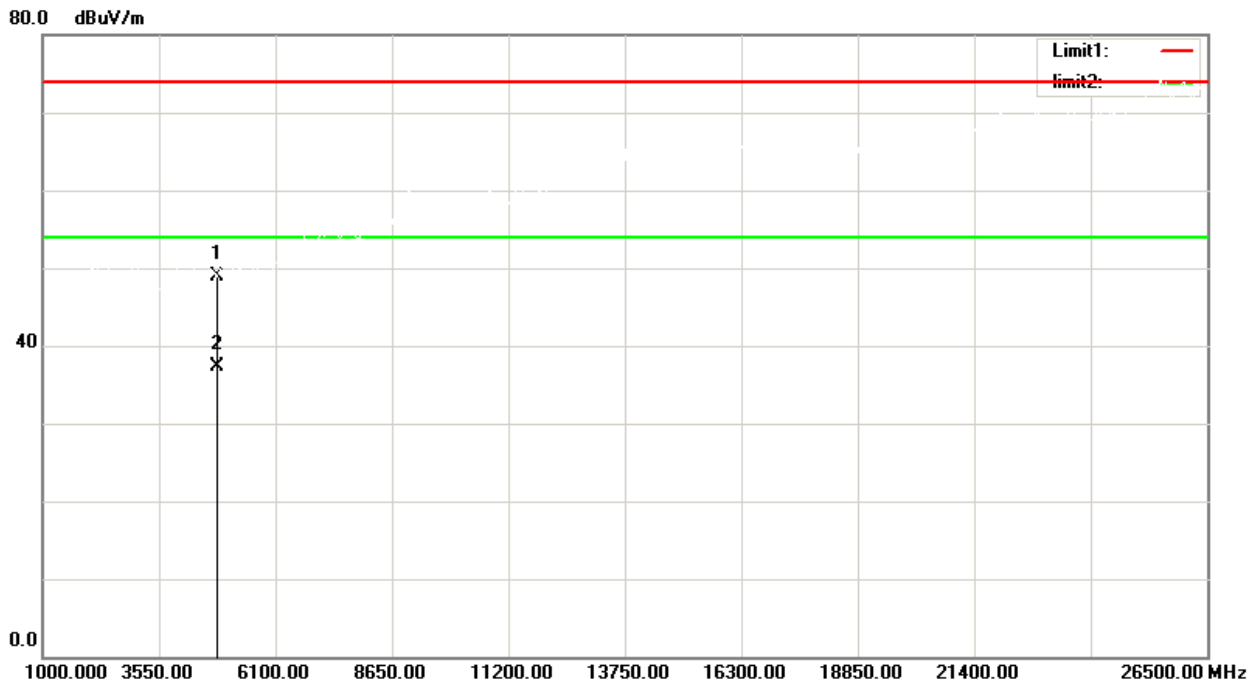

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4824.000	51.07	-2.11	48.96	74.00	-25.04	peak	150	74
2	*	4824.000	39.36	-2.11	37.25	54.00	-16.75	AVG	150	74

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz


## Vertical

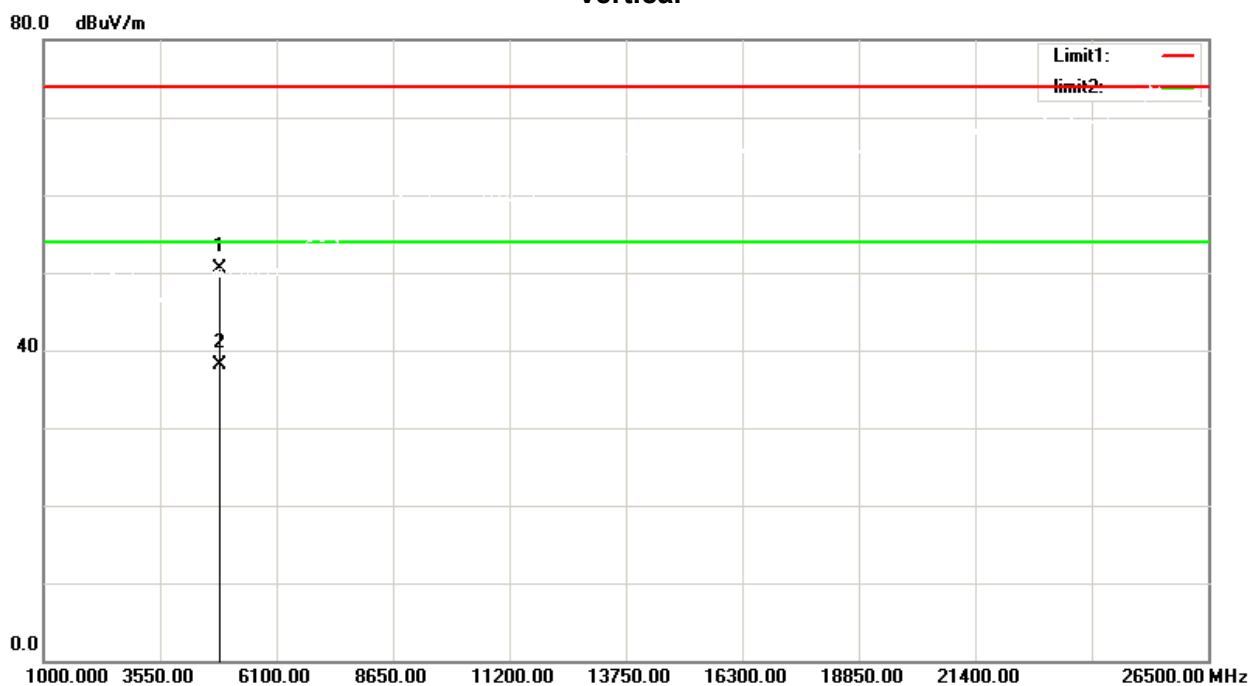

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4874.000	52.70	-2.22	50.48	74.00	-23.52	peak	150	44
2	*	4874.000	40.34	-2.22	38.12	54.00	-15.88	AVG	150	44

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz


## Horizontal

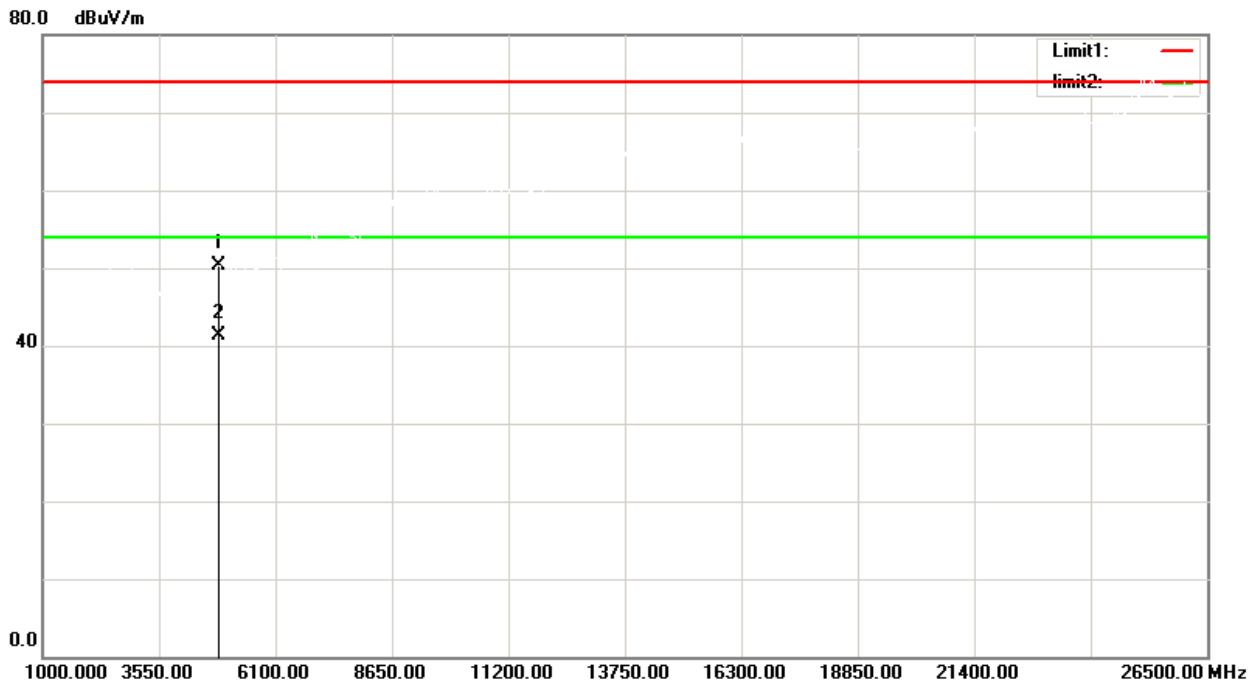

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		4874.000	52.45	-2.22	50.23	74.00	-23.77	peak	150	259
2	*	4874.000	43.58	-2.22	41.36	54.00	-12.64	AVG	150	259

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz


## Vertical

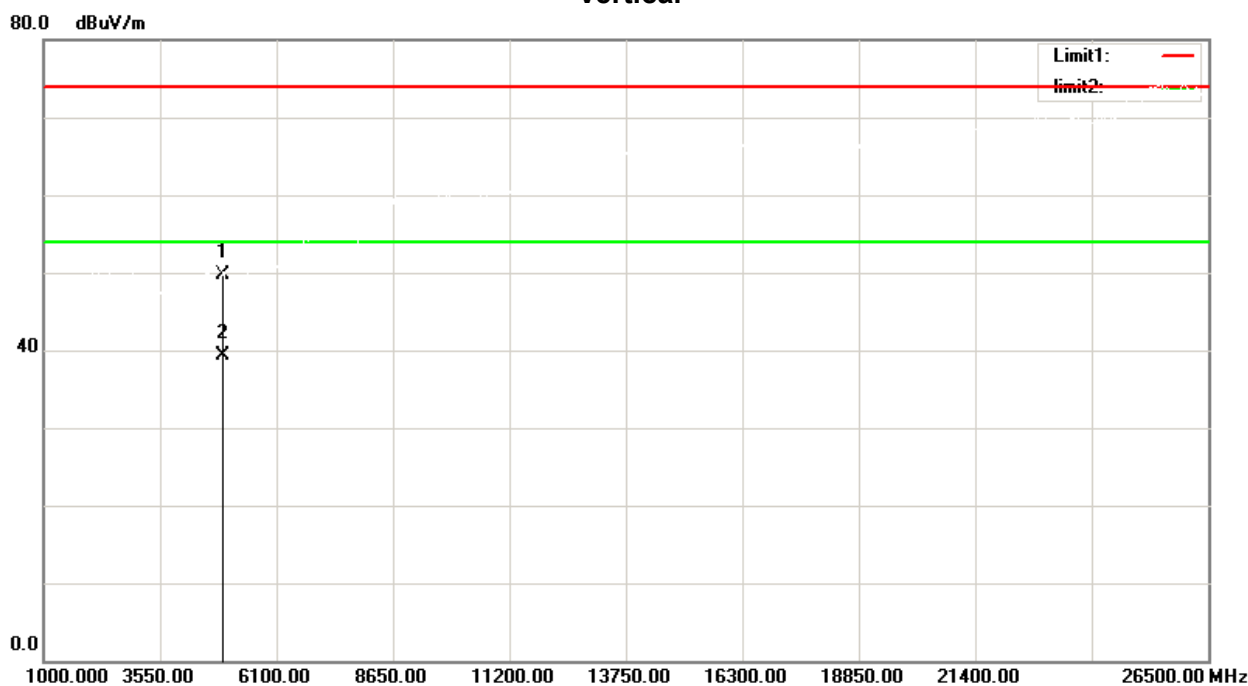

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4924.000	51.66	-1.90	49.76	74.00	-24.24	peak	150	87
2	*	4924.000	41.11	-1.90	39.21	54.00	-14.79	AVG	150	87

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz


## Horizontal

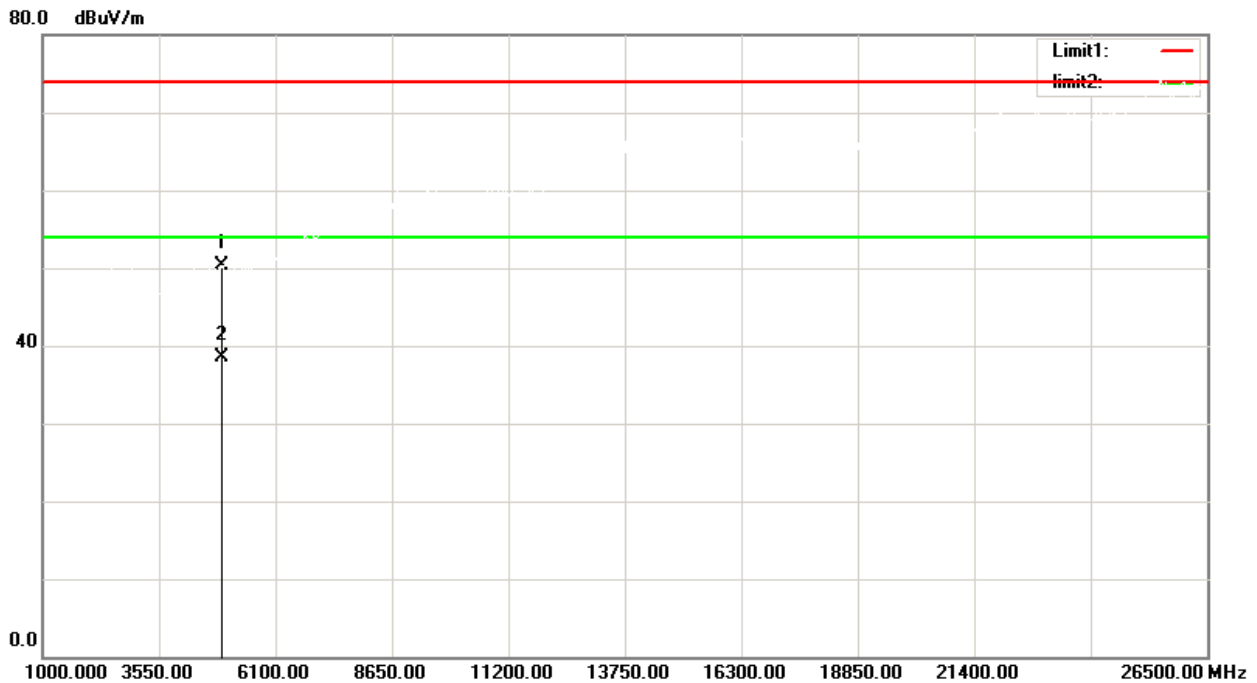

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		4924.000	52.11	-1.90	50.21	74.00	-23.79	peak	150	103
2	*	4924.000	40.34	-1.90	38.44	54.00	-15.56	AVG	150	103

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz


## Vertical

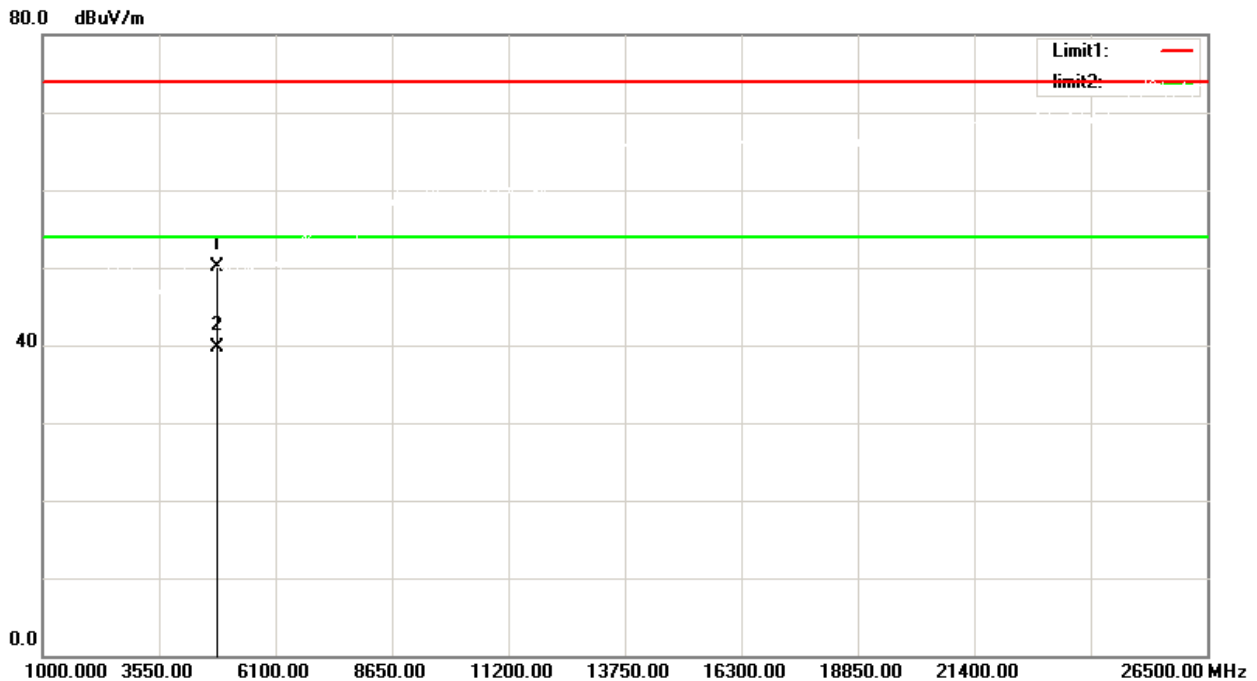

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1		4824.000	52.23	-2.11	50.12	74.00	-23.88	peak	150	66
2	*	4824.000	41.79	-2.11	39.68	54.00	-14.32	AVG	150	66

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

## Horizontal

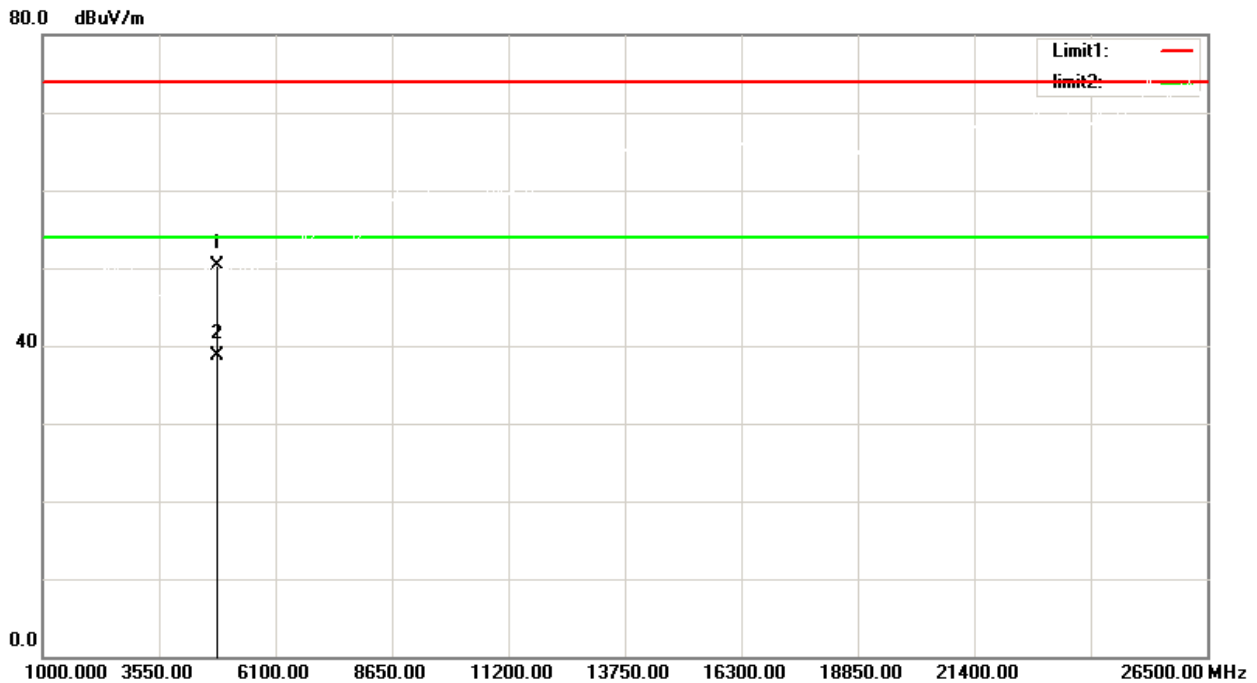


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4824.000	52.50	-2.11	50.39	74.00	-23.61	peak	150	10
2	*	4824.000	40.76	-2.11	38.65	54.00	-15.35	AVG	150	10



Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz


## Vertical

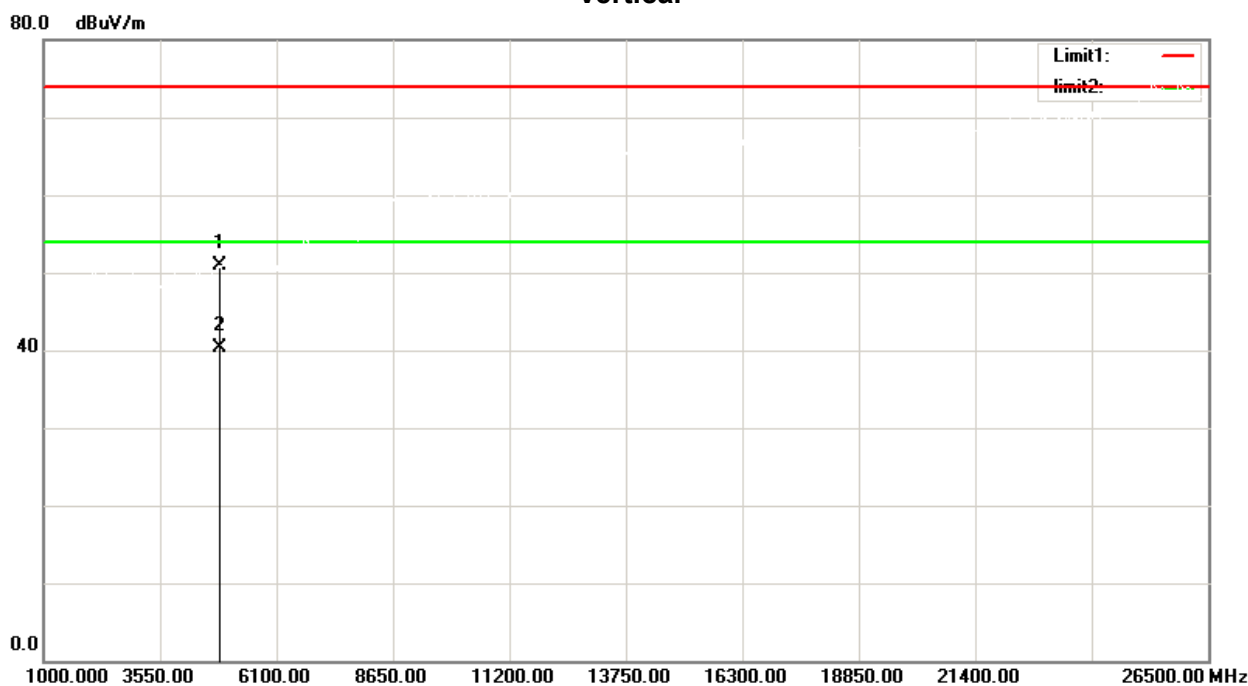

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4874.000	53.18	-2.22	50.96	74.00	-23.04	peak	150	89
2	*	4874.000	42.44	-2.22	40.22	54.00	-13.78	AVG	150	89

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz


## Horizontal

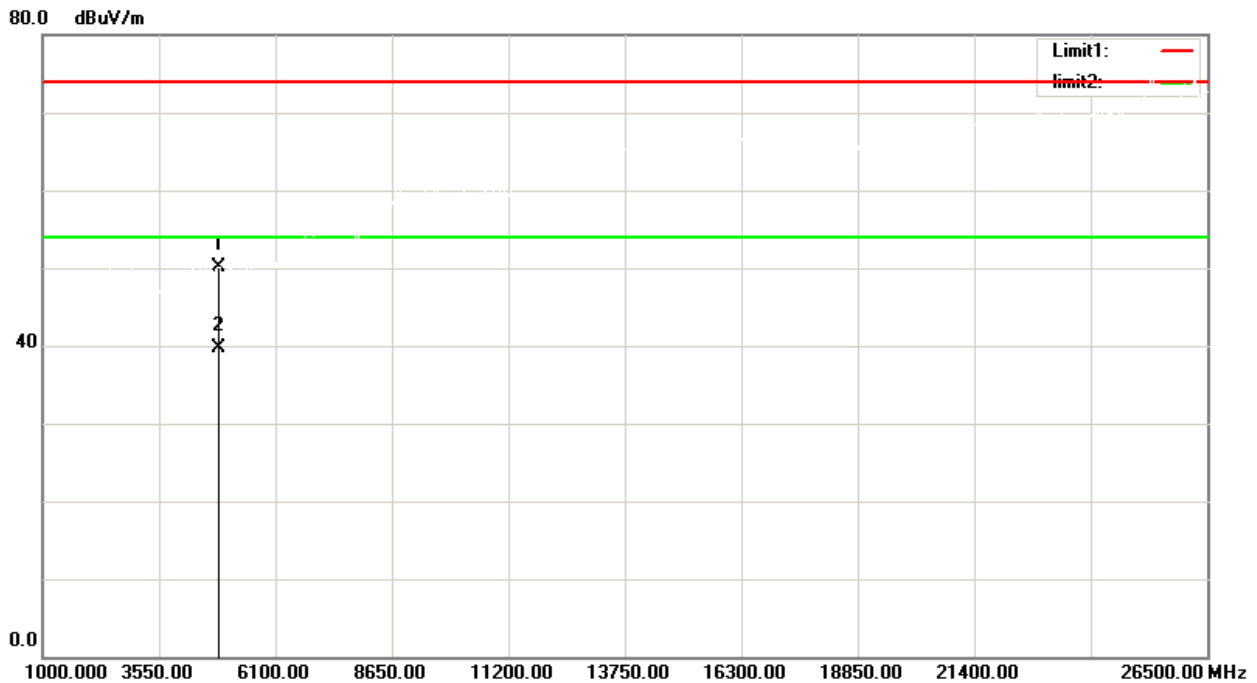

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4874.000	52.28	-2.22	50.06	74.00	-23.94	peak	150	95
2	*	4874.000	41.90	-2.22	39.68	54.00	-14.32	AVG	150	95

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz


## Vertical

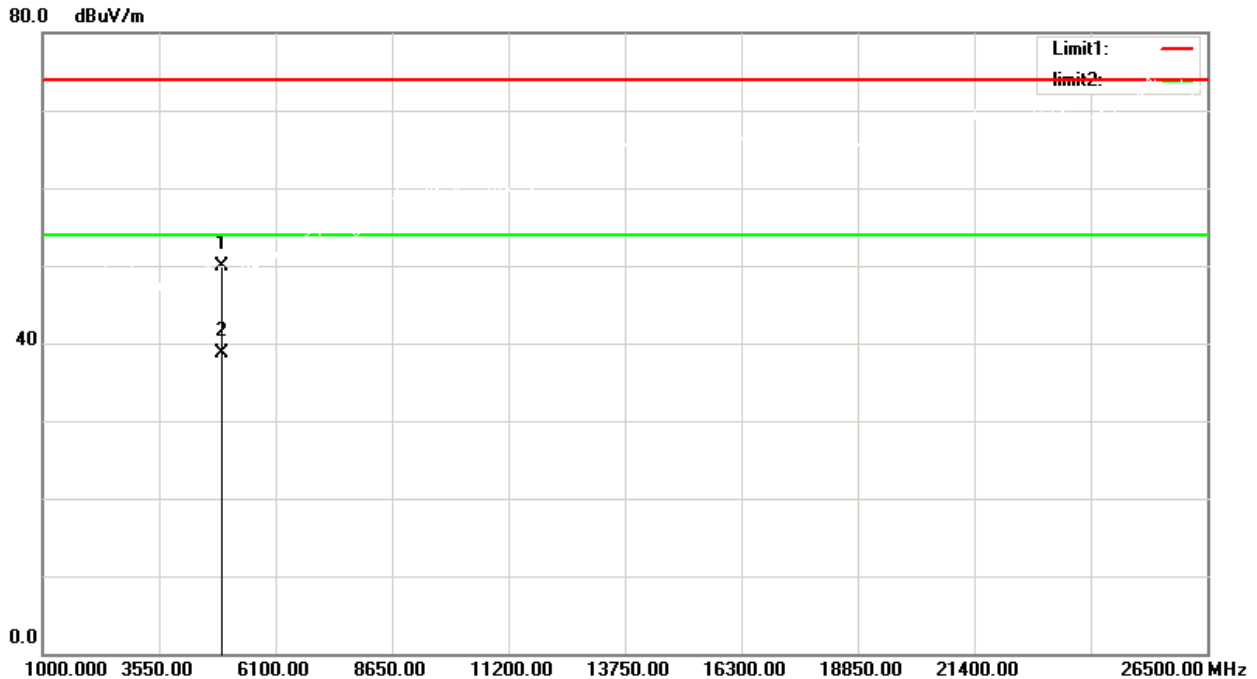

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		4924.000	51.83	-1.90	49.93	74.00	-24.07	peak	150	104
2	*	4924.000	40.55	-1.90	38.65	54.00	-15.35	AVG	150	104

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

## Horizontal

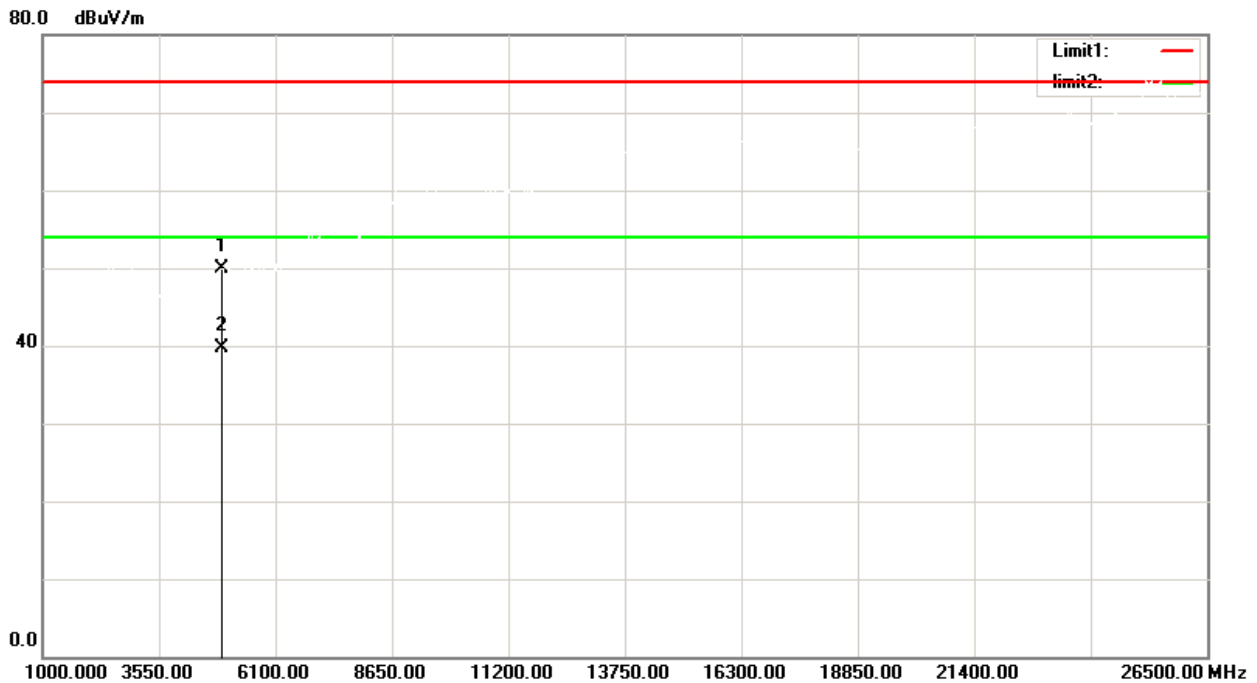

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4924.000	51.85	-1.90	49.95	74.00	-24.05	peak	150	55
2	*	4924.000	41.58	-1.90	39.68	54.00	-14.32	AVG	150	55

## 6. BANDWIDTH TEST

### 6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

### 6.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- For 6dB Bandwidth Spectrum setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5ms.  
For 99% OBW Spectrum Setting: RBW= 300KHz, VBW=1MHz, Sweep time = 2.5ms.
- The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

### 6.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2025/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

## 6.6 TESTRESULTS


TX B Mode					
Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	10.080	15.141	500	PASS
06	2437	10.090	15.121	500	PASS
11	2462	10.090	15.105	500	PASS

### 6dB


CH01

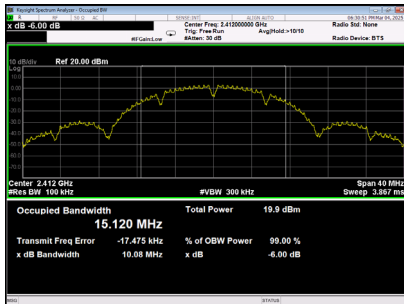

CH06

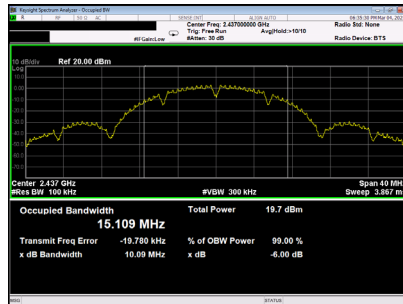


CH11

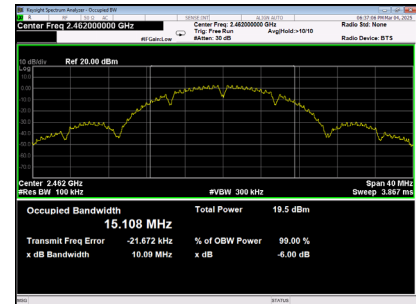


### 99%


CH01

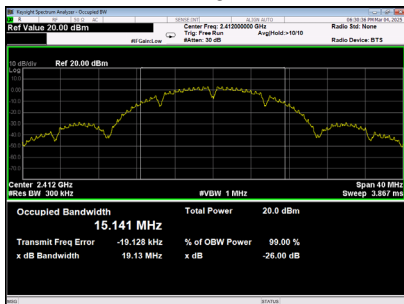

CH06

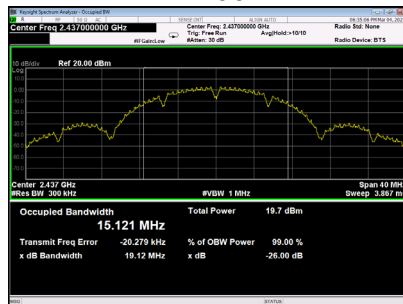

CH11

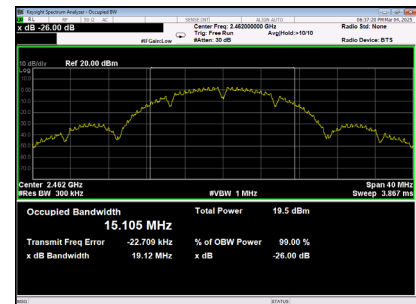


## TX G Mode


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	16.390	16.531	500	PASS
06	2437	16.400	16.537	500	PASS
11	2462	16.410	16.532	500	PASS

## 6dB


CH01

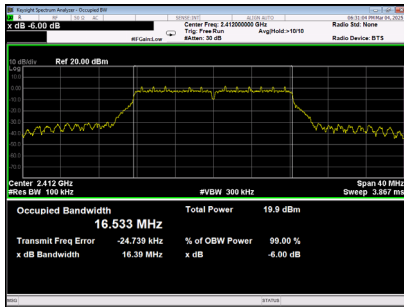

CH06

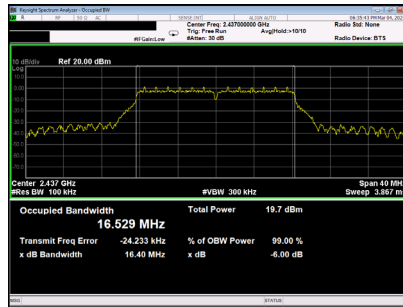


CH11

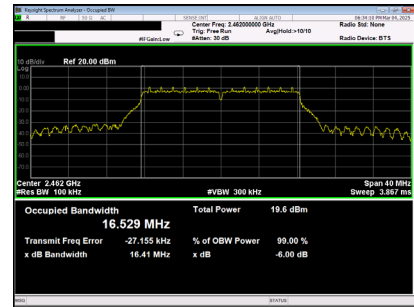


## 99%


CH01

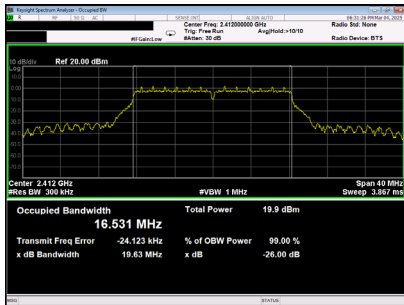

CH06

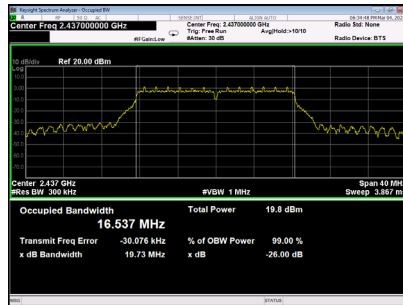

CH11

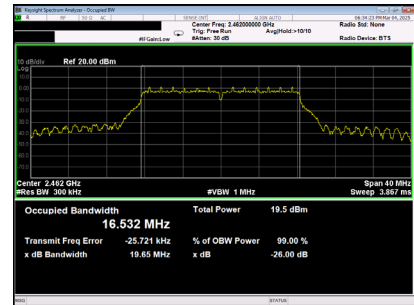


## TX N (HT20) Mode


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Emission Bandwidth(MHz)	6dB Bandwidth Min. Limit(kHz)	Result
01	2412	17.630	17.707	500	PASS
06	2437	17.660	17.691	500	PASS
11	2462	17.660	17.691	500	PASS

## 6dB


CH01

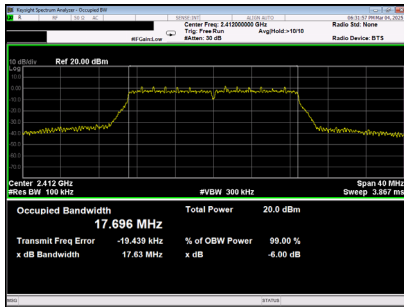

CH06

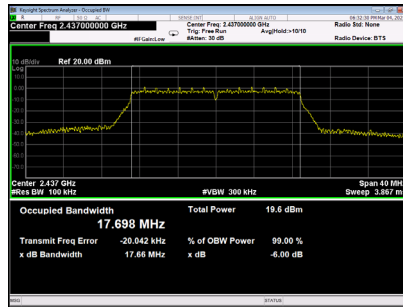


CH11

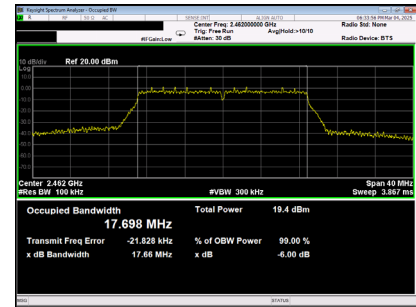


## 99%


CH01

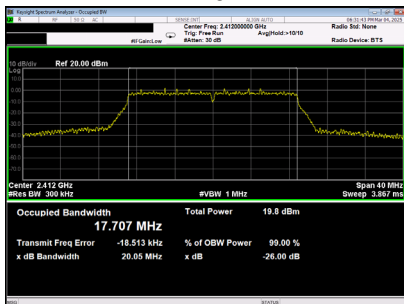

CH06

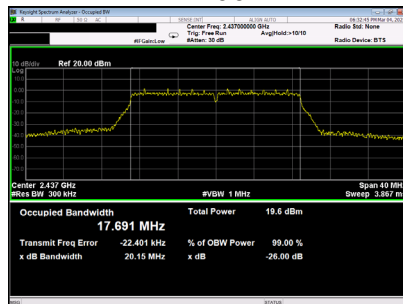

CH11

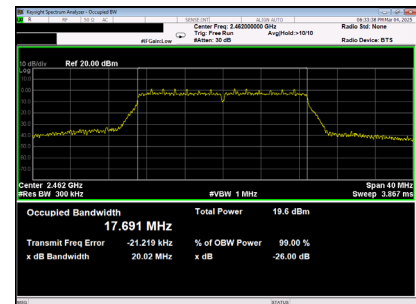



## 7. MAXIMUM OUTPUT POWER TEST

### 7.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm


### 7.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.1.3 of ANSI C63.10-2013.and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

### 7.3 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Power Sensor	KEYSIGHT	U2021XA	MY55240009	05/22/2025
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Micable	C10-01-01-1	100309	N/A
4	Test Software	KEYSIGHT	Power Panel	V3.11	N/A

### 7.4 TEST SETUP

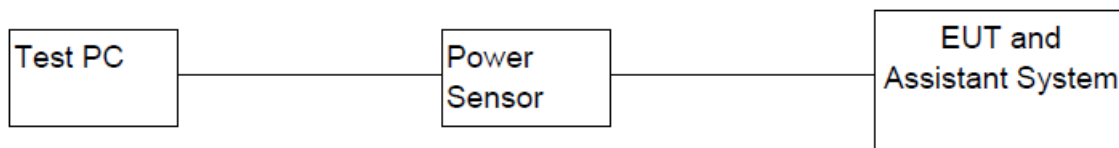

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

## 7.6 TESTRESULTS

TX B Mode				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	7.230	0.005284	PASS
06	2437	7.330	0.005408	PASS
11	2462	7.070	0.005093	PASS
Limit	30dBm / 1W			

TX G Mode				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	7.680	0.005861	PASS
06	2437	7.740	0.005943	PASS
11	2462	7.540	0.005675	PASS
Limit	30dBm / 1W			

TX N (HT20)				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
01	2412	7.750	0.005957	PASS
06	2437	7.720	0.005916	PASS
11	2462	7.760	0.005970	PASS
Limit	30dBm / 1W			

## 8. CONDUCTED SPURIOUS EMISSIONS

### 8.1 LIMIT

For FCC

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

For ISSED

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 8.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

### 8.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2025/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 8.4 TEST SETUP




### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


## 8.6 TESTRESULTS

### TX B Mode

#### Bandedge-CH01

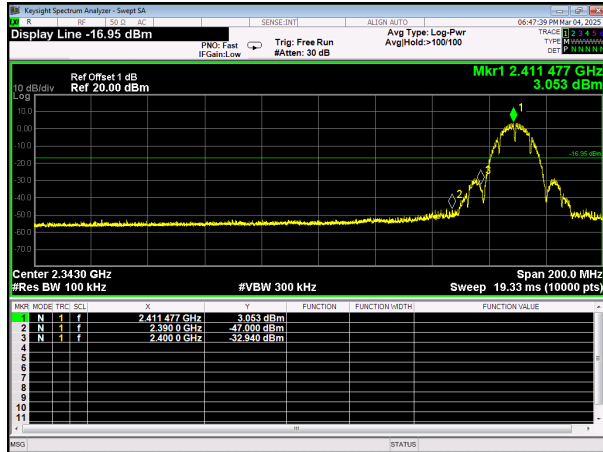


#### Bandedge-CH11

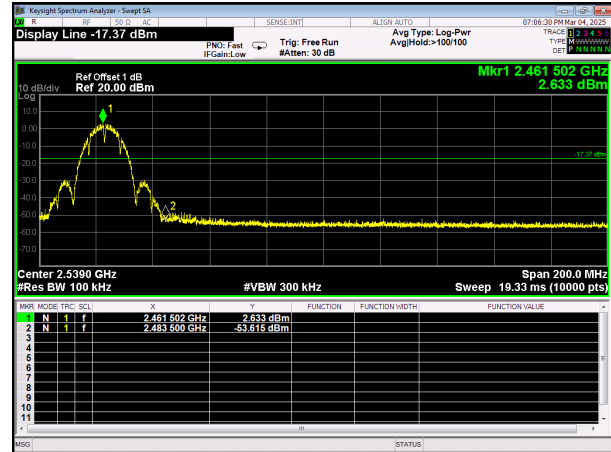


### 10th Harmonic of the fundamental frequency


#### CH01

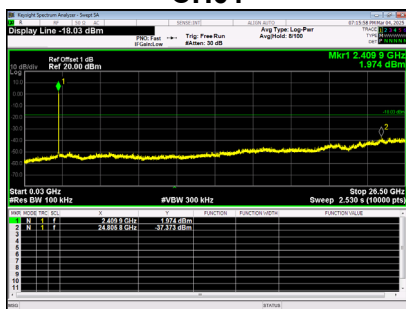

#### CH06

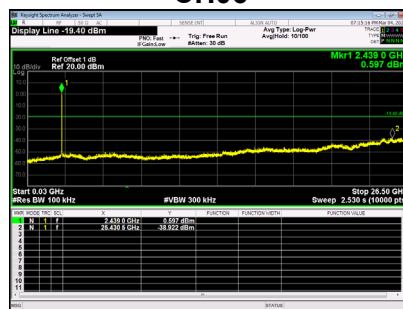


#### CH11

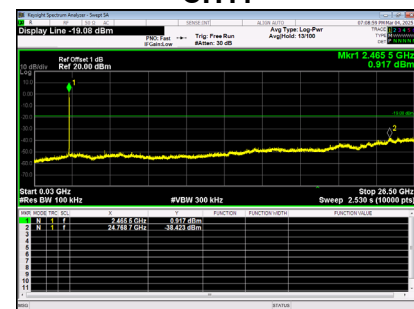


## TX G Mode

### Bandedge-CH01

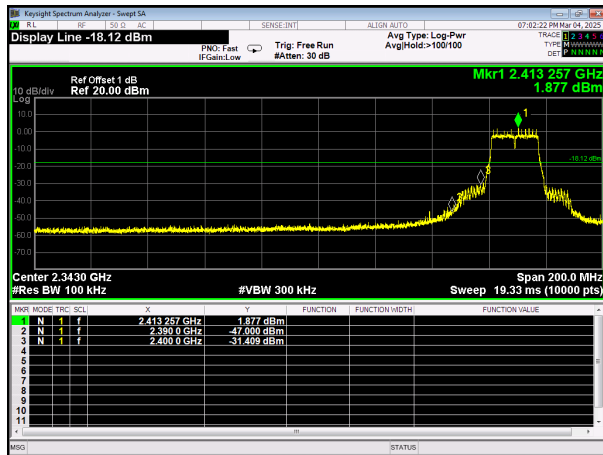


### Bandedge-CH11

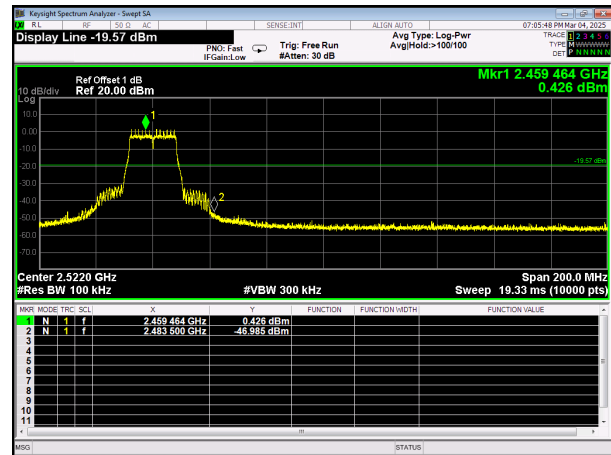


## 10th Harmonic of the fundamental frequency


### CH01

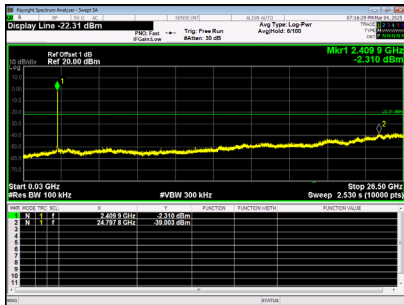

### CH06

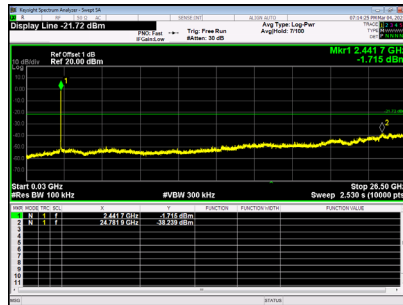


### CH11

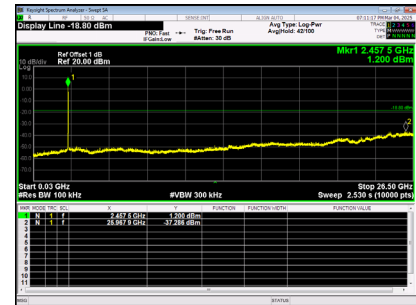


## TX N (HT20) Mode

### Bandedge-CH01

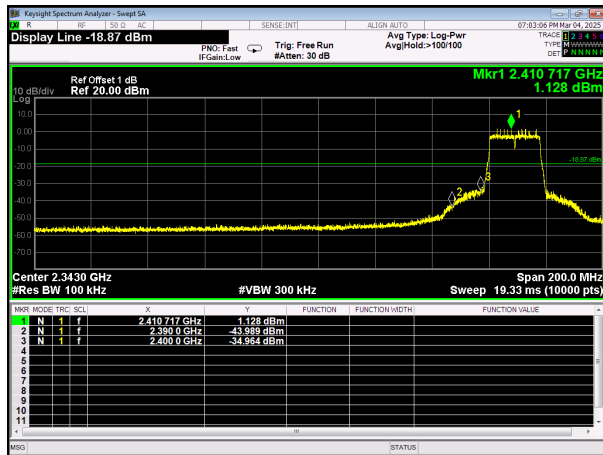


### Bandedge-CH11

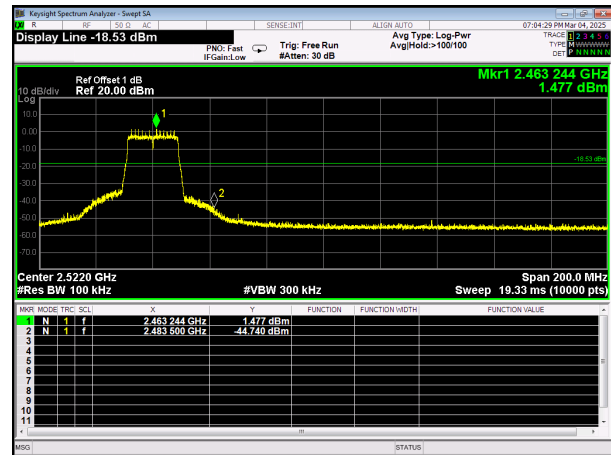


## 10th Harmonic of the fundamental frequency


### CH01

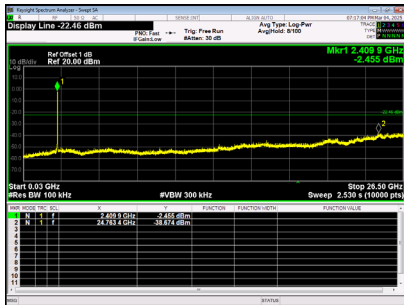

### CH06

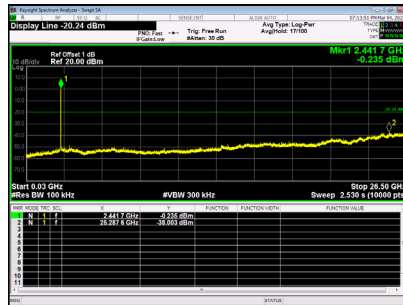

### CH11

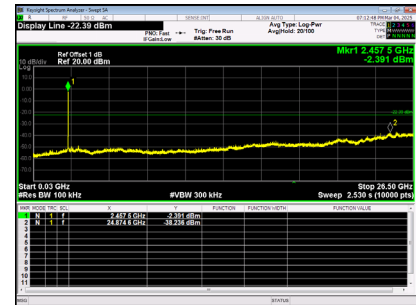

## 9. POWER SPECTRAL DENSITY TEST

### 9.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

### 9.2 TEST PROCEDURE AND SETTING

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method11.10.2 of ANSI C63.10-2013.

### 9.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2025/05/22
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 9.4 TEST SETUP




### 9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


## 9.6 TESTRESULTS

TX B Mode				
Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-15.03	8	PASS
06	2437	-13.21	8	PASS
11	2462	-16.07	8	PASS


CH01

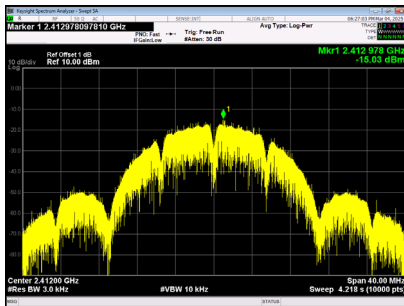

CH06

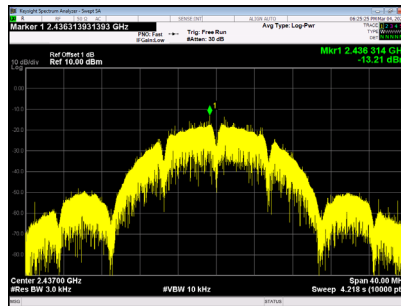


CH11

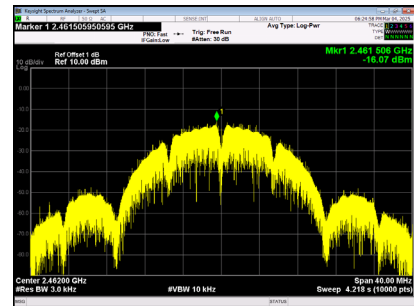


TX G Mode				
Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-13.61	8	PASS
06	2437	-15.55	8	PASS
11	2462	-15.15	8	PASS


CH01

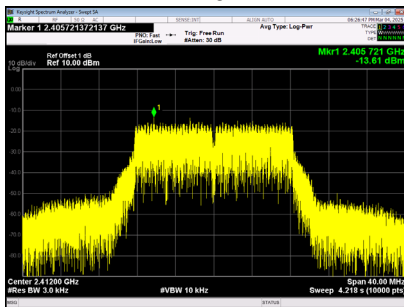

CH06

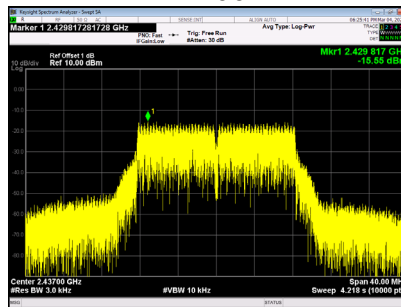


CH11

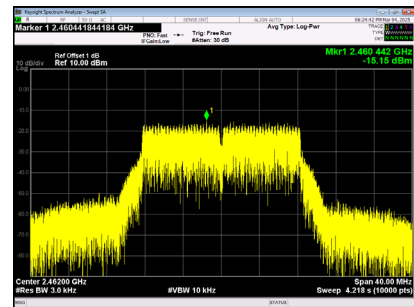




TX N (HT20) Mode				
Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit: <dBm/3KHz	Result
01	2412	-14.91	8	PASS
06	2437	-15.49	8	PASS
11	2462	-15.30	8	PASS


CH01

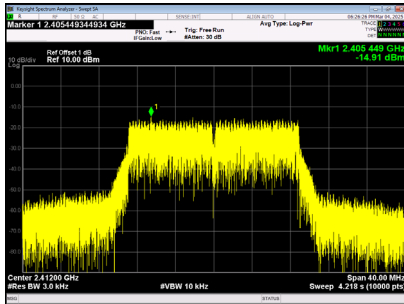

CH06

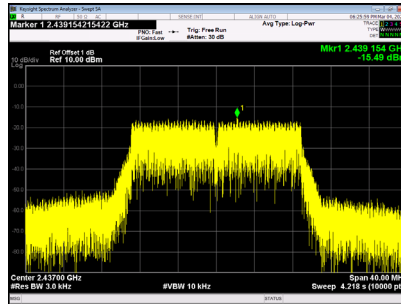

CH11

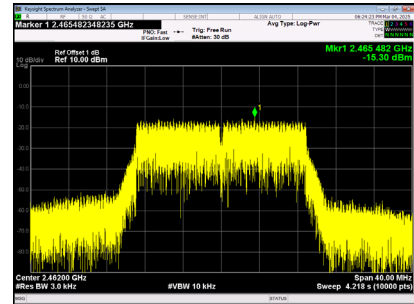

END OF TEST REPORT