

# FCC TEST REPORT

**FCC ID: 2AXJ7-ANCCHARGE**

**Report No.** : SSP24030119-1E

**Applicant** : MIXX LIMITED

**Product Name** : Bluetooth Wireless Earphone

**Model Name** : MIXX ANC Charge

**Test Standard** : FCC Part 15.247

**Date of Issue** : 2024-05-16



**Shenzhen CCUT Quality Technology Co., Ltd.**

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,  
Guangdong, China; (Tel.:+86-755-23406590 website: [www.ccuttest.com](http://www.ccuttest.com))

This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

**Test Report Basic Information**

<b>Applicant</b> .....:	MIXX LIMITED
<b>Address of Applicant</b> .....:	Unit 5 The Pavilions Brighton Road, Pease Pottage, RH11 9B, United Kingdom
<b>Manufacturer</b> .....:	Shenzhen Kingvie Technology Co.,Ltd
<b>Address of Manufacturer</b> .....:	201, 301, No.2 Building, 84# Fuqian Rd, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, China
<b>Product Name</b> .....:	Bluetooth Wireless Earphone
<b>Brand Name</b> .....:	MIXX
<b>Main Model</b> .....:	MIXX ANC Charge
<b>Series Models</b> .....:	SBFX-ANC-BK-402, SBFX-ANC-XX-XXX, USFX-ANC-BK-024, USFX-ANC-XX-XXX
<b>Test Standard</b> .....:	FCC Part 15 Subpart C ANSI C63.4-2014 ANSI C63.10-2013
<b>Date of Test</b> .....	2024-04-30 to 2024-05-06
<b>Test Result</b> .....:	PASS
<b>Tested By</b> .....	<u>Walker Wu</u> (Walker Wu)
<b>Reviewed By</b> .....:	<u>Lieber Ouyang</u> (Lieber Ouyang)
<b>Authorized Signatory</b> .....:	<u>Lahm Peng</u> (Lahm Peng)



Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.

## CONTENTS

<b>1. General Information.....</b>	<b>5</b>
1.1 Product Information .....	5
1.2 Test Setup Information.....	6
1.3 Compliance Standards.....	7
1.4 Test Facilities.....	7
1.5 List of Measurement Instruments .....	8
1.6 Measurement Uncertainty .....	8
<b>2. Summary of Test Results .....</b>	<b>9</b>
<b>3. Antenna Requirement.....</b>	<b>10</b>
3.1 Standard and Limit.....	10
3.2 Test Result.....	10
<b>4. Conducted Emissions .....</b>	<b>11</b>
4.1 Standard and Limit.....	11
4.2 Test Procedure.....	11
4.3 Test Data and Results .....	12
<b>5. Radiated Emissions .....</b>	<b>15</b>
5.1 Standard and Limit.....	15
5.2 Test Procedure.....	15
5.3 Test Data and Results .....	17
<b>6. Band-edge Emissions(Radiated).....</b>	<b>21</b>
6.1 Standard and Limit.....	21
6.2 Test Procedure.....	21
6.3 Test Data and Results .....	21
<b>7. Frequency Hopping System.....</b>	<b>23</b>
7.1 Standard and Limit.....	23
7.2 Test Procedure.....	23
7.3 Test Data and Results .....	24
<b>8. Dwell Time.....</b>	<b>25</b>
8.1 Standard and Limit.....	25
8.2 Test Procedure.....	25
8.3 Test Data and Results .....	26
<b>9. Maximum Peak Conducted Output Power .....</b>	<b>31</b>
9.1 Standard and Limit.....	31
9.2 Test Procedure.....	31
9.3 Test Data and Results .....	31
<b>10. Occupied Bandwidth(-20dB) .....</b>	<b>35</b>
10.1 Standard and Limit.....	35
10.2 Test Procedure.....	35
10.3 Test Data and Results .....	35
<b>11. Carrier Frequencies Separation.....</b>	<b>39</b>
11.1 Standard and Limit.....	39
11.2 Test Procedure.....	39
11.3 Test Data and Results .....	39
<b>12. Number of Hopping Channel.....</b>	<b>43</b>
12.1 Standard and Limit.....	43
12.2 Test Procedure.....	43
12.3 Test Data and Results .....	43
<b>13. Band-edge Emission(Conducted).....</b>	<b>46</b>
13.1 Standard and Limit.....	46
13.2 Test Procedure.....	46
13.3 Test Data and Results .....	46
<b>14. Conducted RF Spurious Emissions.....</b>	<b>56</b>
14.1 Standard and Limit.....	56
14.2 Test Procedure.....	56
14.3 Test Data and Results .....	56

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2024-05-16	Initial Release	Lahm Peng

## 1. General Information

### 1.1 Product Information

Product Name:	Bluetooth Wireless Earphone
Trade Name:	MIXX
Main Model:	MIXX ANC Charge
Series Models:	SBFX-ANC-BK-402, SBFX-ANC-XX-XXX, USFX-ANC-BK-024, USFX-ANC-XX-XXX
Rated Voltage:	DC 3.6V by battery, USB 5V charging
Battery:	DC 3.6V, 45mAh
Hardware Version:	T24-FPC-V1.0
Software Version:	1.6.1
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	
Note 3: XXX represents    number, representing a different color.	

Wireless Specification	
Wireless Standard:	Bluetooth BR/EDR
Operating Frequency:	2402MHz ~ 2480MHz
RF Output Power:	0.62dBm
Number of Channel:	79
Channel Separation:	1MHz
Modulation:	GFSK, Pi/4 DQPSK
Antenna Gain:	-1.02dBi
Type of Antenna:	FPCB Antenna
Type of Device:	<input checked="" type="checkbox"/> Portable Device <input type="checkbox"/> Mobile Device <input type="checkbox"/> Modular Device

## 1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Lowest Channel	2402MHz(DH5/2DH5)	
TM2	Middle Channel	2441MHz(DH5/2DH5)	
TM3	Highest Channel	2480MHz(DH5/2DH5)	
TM4	Hopping	2402MHz~2480MHz	
TM5	Charging	AC 120V/60Hz	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
USB Cable	100	Unshielded	Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
Adapter	Huawei	HW-100225C00	HC78E2N6A23645
-	-	-	-

List of Channels							
No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)	No. of Channel	Frequency (MHz)
01	2402	21	2422	41	2442	61	2462
02	2403	22	2423	42	2443	62	2463
03	2404	23	2424	43	2444	63	2464
04	2405	24	2425	44	2445	64	2465
05	2406	25	2426	45	2446	65	2466
~	~	~	~	~	~	~	~
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

### 1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

### 1.4 Test Facilities

Laboratory Name:	<b>Shenzhen CCUT Quality Technology Co., Ltd.</b> 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

## 1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
<b>Conducted Emissions</b>					
AMN	ROHDE&SCHWARZ	ENV216	101097	2023-10-21	2024-10-20
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2023-07-31	2024-07-30
<b>Radiated Emissions</b>					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2023-07-31	2024-07-30
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40-N	101692	2023-07-31	2024-07-30
Amplifier	SCHWARZBECK	BBV 9743B	00251	2023-07-31	2024-07-30
Amplifier	HUABO	YXL0518-2.5-45	--	2023-07-31	2024-07-30
Amplifier	COM-MW	DLAN-18G-4G-02	10229104	2023-07-31	2024-07-30
Loop Antenna	DAZE	ZN30900C	21104	2023-08-07	2024-08-06
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2023-08-07	2024-08-06
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2023-08-07	2024-08-06
Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2023-08-07	2024-08-06
<b>Conducted RF Testing</b>					
RF Test System	MWRFTest	MW100-RFCB	220418SQS-37	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2023-07-31	2024-07-30

## 1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Conducted Output Power	9kHz ~ 26GHz	±0.50 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %
Conducted Spurious Emission	9kHz ~ 26GHz	±1.32 dB



## 2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.247(i)	RF Exposure(see the RF exposure report)	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209, 15.247(d)	Radiated Emissions	Passed
FCC Part 15.247(d)	Band-edge Emissions(Radiated)	Passed
FCC Part 15.247(a)(1), (g), (h)	Frequency Hopping System	Passed
FCC Part 15.247(a)(1)(iii)	Dwell Time	Passed
FCC Part 15.247(b)(1)	Maximum Peak Conducted Output Power	Passed
FCC Part 15.215(c)	Occupied Bandwidth(-20dB)	Passed
FCC Part 15.247(a)(1)	Carrier Frequencies Separation	Passed
FCC Part 15.247(a)(1)(iii)	Number of Hopping Channel	Passed
FCC Part 15.247(d)	Band-edge Emissions(Conducted)	Passed
FCC Part 15.247(d)	Conducted RF Spurious Emissions	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

### **3. Antenna Requirement**

---

#### **3.1 Standard and Limit**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an FPCB antenna, fulfill the requirement of this section.

## 4. Conducted Emissions

### 4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz  
 Note 2: The lower limit applies at the band edges

### 4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

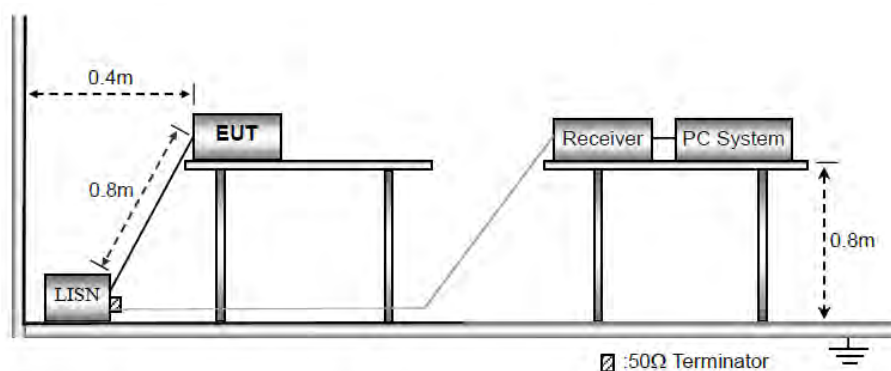

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.

### **4.3 Test Data and Results**

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit


## Test Plots and Data of Conducted Emissions

Tested Mode: TM5

Test Voltage: AC 120V/60Hz

Test Power Line: Neutral

Remark:

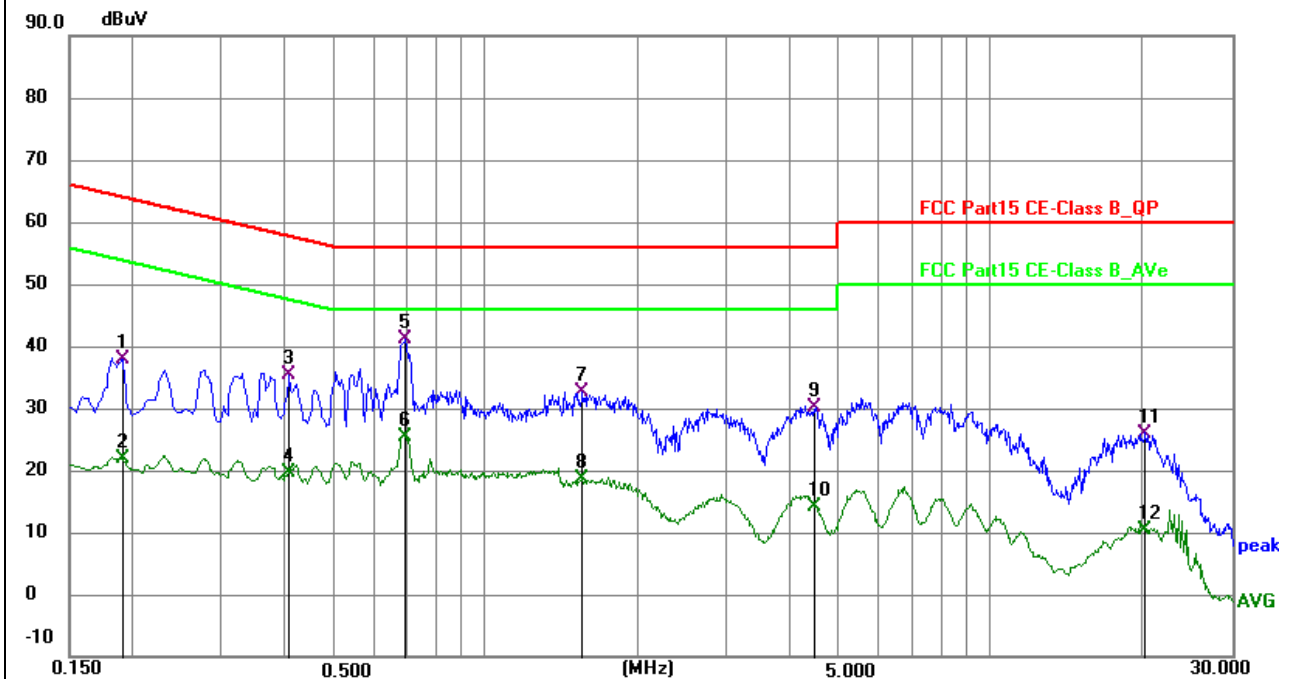

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1905	28.54	9.44	37.98	64.01	-26.03	QP	P	
2	0.1905	12.48	9.44	21.92	54.01	-32.09	AVG	P	
3	0.4065	25.51	9.94	35.45	57.72	-22.27	QP	P	
4	0.4065	9.71	9.94	19.65	47.72	-28.07	AVG	P	
5 *	0.6945	31.57	9.62	41.19	56.00	-14.81	QP	P	
6	0.6945	15.83	9.62	25.45	46.00	-20.55	AVG	P	
7	1.5585	22.59	10.03	32.62	56.00	-23.38	QP	P	
8	1.5585	8.70	10.03	18.73	46.00	-27.27	AVG	P	
9	4.5104	20.06	10.19	30.25	56.00	-25.75	QP	P	
10	4.5104	3.94	10.19	14.13	46.00	-31.87	AVG	P	
11	20.2470	15.61	10.39	26.00	60.00	-34.00	QP	P	
12	20.2470	0.07	10.39	10.46	50.00	-39.54	AVG	P	


## Test Plots and Data of Conducted Emissions

Tested Mode: TM5

Test Voltage: AC 120V/60Hz

Test Power Line: Live

Remark:

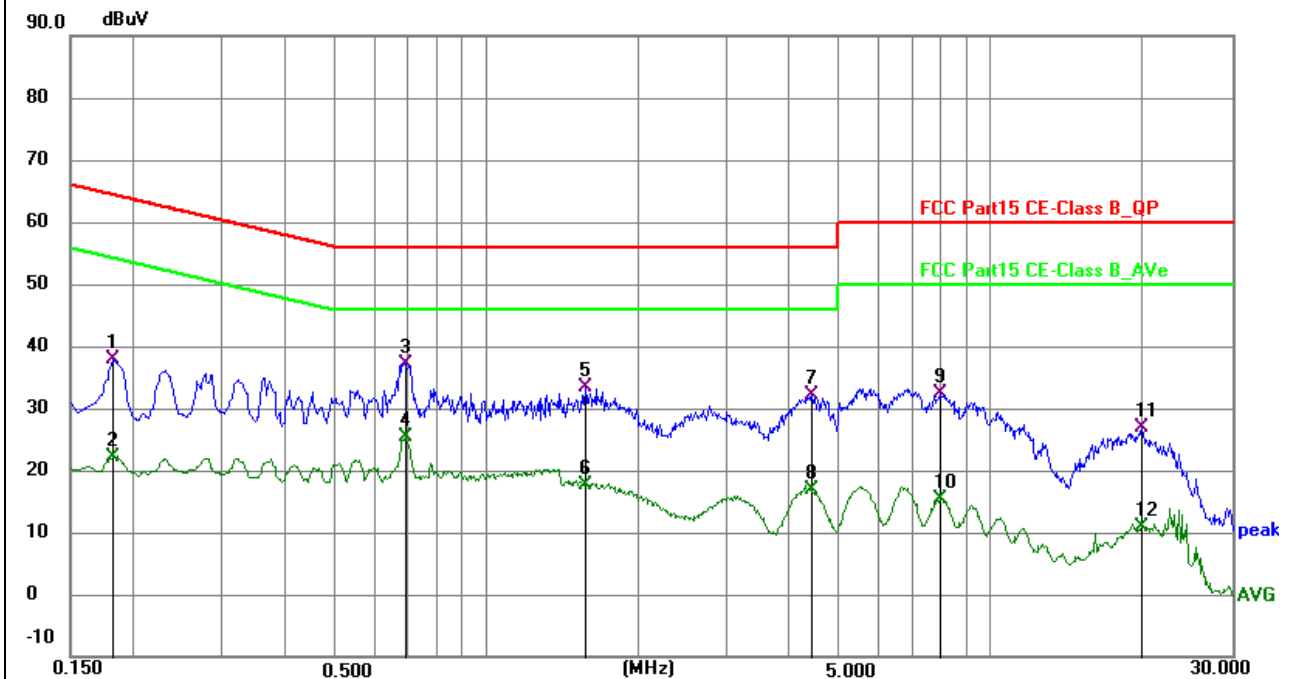

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1814	28.75	9.02	37.77	64.42	-26.65	QP	P	
2	0.1814	13.01	9.02	22.03	54.42	-32.39	AVG	P	
3 *	0.6900	27.25	9.85	37.10	56.00	-18.90	QP	P	
4	0.6900	15.62	9.85	25.47	46.00	-20.53	AVG	P	
5	1.5720	23.44	10.03	33.47	56.00	-22.53	QP	P	
6	1.5720	7.63	10.03	17.66	46.00	-28.34	AVG	P	
7	4.4294	21.90	10.18	32.08	56.00	-23.92	QP	P	
8	4.4294	6.73	10.18	16.91	46.00	-29.09	AVG	P	
9	7.9080	22.21	10.20	32.41	60.00	-27.59	QP	P	
10	7.9080	5.28	10.20	15.48	50.00	-34.52	AVG	P	
11	19.9140	16.22	10.54	26.76	60.00	-33.24	QP	P	
12	19.9140	0.34	10.54	10.88	50.00	-39.12	AVG	P	

## 5. Radiated Emissions

### 5.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:


Frequency of emission (MHz)	Radiated emissions (3m)
	Quasi-peak (dBuV/m)
30-88	40
88-216	43.5
216-960	46
Above 960	54
Note: The more stringent limit applies at transition frequencies.	

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


*Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.*

### 5.2 Test Procedure


Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

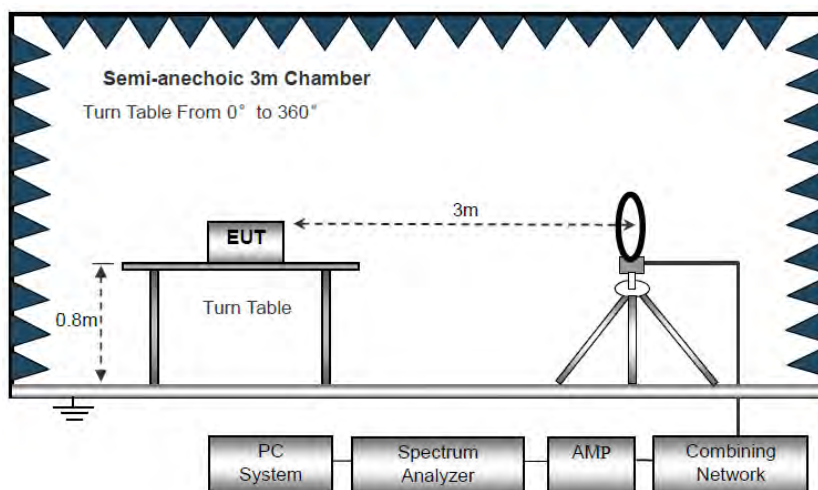

Block Diagram of Radiated Emission Below 30MHz

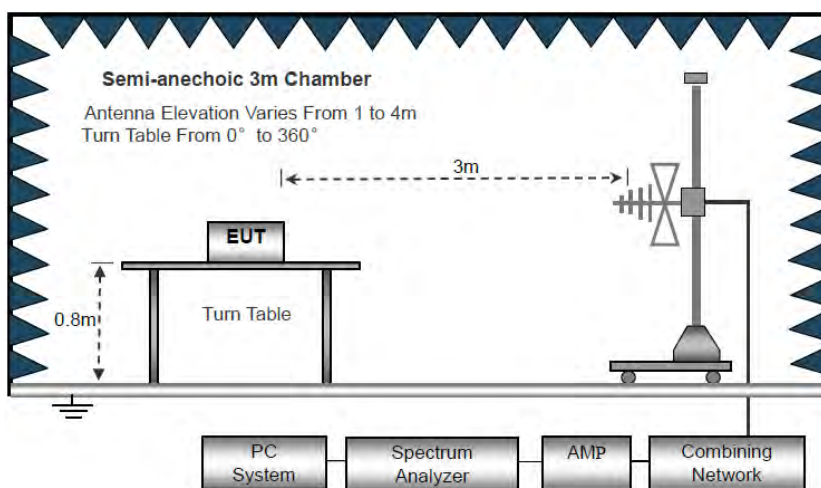

Block Diagram of Radiated Emission From 30MHz to 1GHz

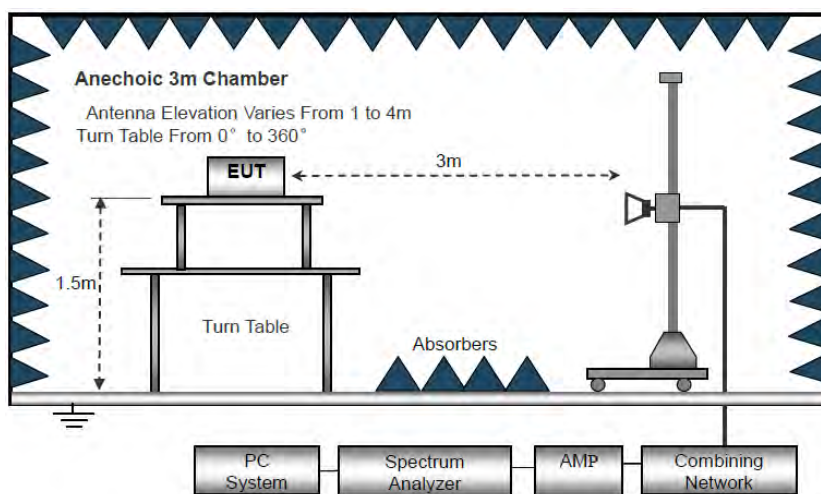

Block Diagram of Radiated Emission Above 1GHz



- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{GHz}$ , 10kHz for  $f < 30\text{MHz}$   
VBW  $\geq$  RBW, Sweep = auto  
Detector function = peak  
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.

### 5.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as DH5\_2402MHz below:


Remark: Level = Reading + Factor, Margin = Level - Limit

## Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode: TM1

Test Antenna Polarization: Horizontal

Remark:

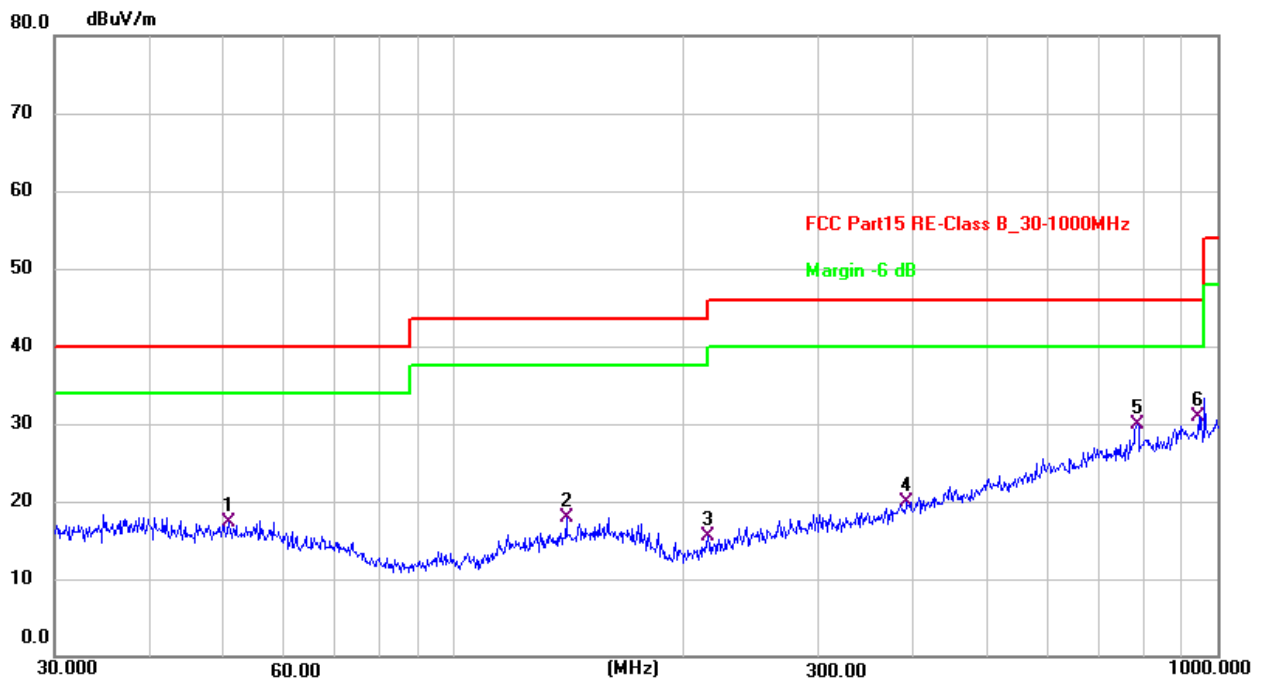


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	50.7637	26.11	-8.77	17.34	40.00	-22.66	QP	100	146	P	
2	140.3421	27.27	-9.27	18.00	43.50	-25.50	QP	100	292	P	
3	215.2678	27.01	-11.44	15.57	43.50	-27.93	QP	100	270	P	
4	392.0951	26.06	-6.17	19.89	46.00	-26.11	QP	100	85	P	
5	785.0935	28.06	1.89	29.95	46.00	-16.05	QP	100	281	P	
6 *	945.4399	27.77	3.23	31.00	46.00	-15.00	QP	100	350	P	

## Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode: TM1

Test Antenna Polarization: Vertical

Remark:

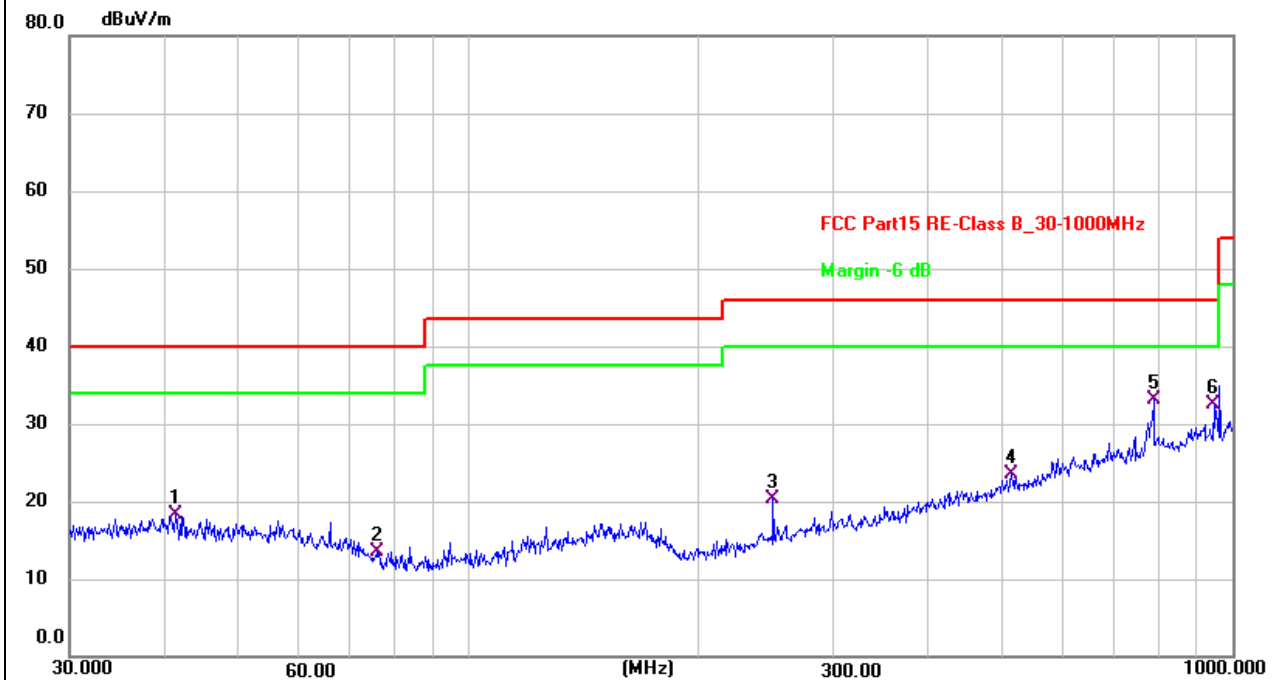

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	41.2765	26.63	-8.31	18.32	40.00	-21.68	QP	100	224	P	
2	75.9773	25.95	-12.36	13.59	40.00	-26.41	QP	100	45	P	
3	250.3012	30.00	-9.75	20.25	46.00	-25.75	QP	100	1	P	
4	513.6331	26.90	-3.32	23.58	46.00	-22.42	QP	100	350	P	
5 *	787.8513	31.20	1.97	33.17	46.00	-12.83	QP	100	35	P	
6	945.4399	29.24	3.23	32.47	46.00	-13.53	QP	100	139	P	

Radiated Emission Test Data (Above 1GHz)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
GFSK Lowest Channel (2402MHz)							
4804	78.64	-14.72	63.92	74	-10.08	H	PK
4804	60.3	-14.72	45.58	54	-8.42	H	AV
7206	64.51	-8.41	56.1	74	-17.9	H	PK
7206	47.76	-8.41	39.35	54	-14.65	H	AV
4804	75.01	-14.72	60.29	74	-13.71	V	PK
4804	57.23	-14.72	42.51	54	-11.49	V	AV
7206	64.31	-8.41	55.9	74	-18.1	V	PK
7206	50.66	-8.41	42.25	54	-11.75	V	AV
GFSK Middle Channel (2441MHz)							
4882	78.21	-14.64	63.57	74	-10.43	H	PK
4882	60.06	-14.64	45.42	54	-8.58	H	AV
7323	64.97	-8.28	56.69	74	-17.31	H	PK
7323	45.34	-8.28	37.06	54	-16.94	H	AV
4882	77.83	-14.64	63.19	74	-10.81	V	PK
4882	58.43	-14.64	43.79	54	-10.21	V	AV
7323	62.38	-8.28	54.1	74	-19.9	V	PK
7323	45.32	-8.28	37.04	54	-16.96	V	AV
GFSK Highest Channel (2480MHz)							
4960	74.63	-14.53	60.1	74	-13.9	H	PK
4960	59.87	-14.53	45.34	54	-8.66	H	AV
7440	64.04	-8.13	55.91	74	-18.09	H	PK
7440	45.95	-8.13	37.82	54	-16.18	H	AV
4960	73.15	-14.53	58.62	74	-15.38	V	PK
4960	58.41	-14.53	43.88	54	-10.12	V	AV
7440	62.74	-8.13	54.61	74	-19.39	V	PK
7440	49.37	-8.13	41.24	54	-12.76	V	AV

Note 1: this EUT was tested in 3 orthogonal positions and the worst case position data was reported

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

Note 3: Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report. 18GHz-26GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.


## 6. Band-edge Emissions(Radiated)

### 6.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### 6.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6 and section 6.10.

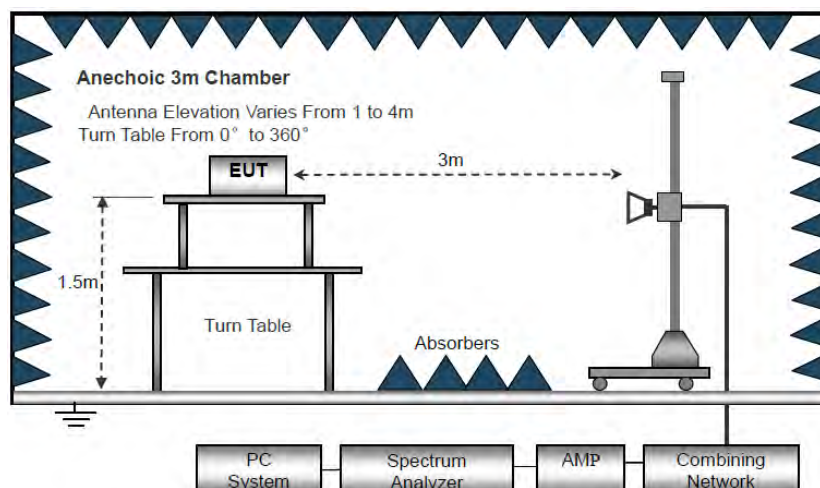

Test Setup Block Diagram

As the radiated emissions testing, set the Lowest and Highest Transmitting Channel, observed the outside band of 2310MHz to 2400MHz and 2483.5MHz to 2500MHz, than mark the higher-level emission for comparing with the FCC rules.

### 6.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.247 standard limit, and with the worst case as below:

Test Mode	Frequency	Limit	Result
	MHz	dBuV/dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

Radiated Emission Test Data (Band edge emissions)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Lowest Channel GFSK (2402MHz)							
2310	67.09	-21.34	45.75	74	-28.25	H	PK
2310	51.46	-21.34	30.12	54	-23.88	H	AV
2390	65.95	-20.96	44.99	74	-29.01	H	PK
2390	50.29	-20.96	29.33	54	-24.67	H	AV
2400	69.63	-20.91	48.72	74	-25.28	H	PK
2400	55.77	-20.91	34.86	54	-19.14	H	AV
2310	64.46	-21.34	43.12	74	-30.88	V	PK
2310	51.09	-21.34	29.75	54	-24.25	V	AV
2390	65.07	-20.96	44.11	74	-29.89	V	PK
2390	52.28	-20.96	31.32	54	-22.68	V	AV
2400	74.83	-20.91	53.92	74	-20.08	V	PK
2400	56.23	-20.91	35.32	54	-18.68	V	AV
Highest Channel GFSK (2480MHz)							
2483.50	71.25	-20.51	50.74	74	-23.26	H	PK
2483.50	54.52	-20.51	34.01	54	-19.99	H	AV
2500	66.19	-20.43	45.76	74	-28.24	H	PK
2500	51.12	-20.43	30.69	54	-23.31	H	AV
2483.50	70.8	-20.51	50.29	74	-23.71	V	PK
2483.50	56.58	-20.51	36.07	54	-17.93	V	AV
2500	68.99	-20.43	48.56	74	-25.44	V	PK
2500	50.09	-20.43	29.66	54	-24.34	V	AV

Remark: Level = Reading + Factor, Margin = Level - Limit

## 7. Frequency Hopping System

---

### 7.1 Standard and Limit

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 7.2 Test Procedure

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with an bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for DA 00-705 and FCC Part 15.247 rule.

### 7.3 Test Data and Results

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.




## 8. Dwell Time

### 8.1 Standard and Limit

According to 15.247 (a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 8.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Spectrum Setting: RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
- 3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- 4) Sweep Time is more than once pulse time.
- 5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- 6) Measure the maximum time duration of one single pulse.
- 7) Set the EUT for packet transmitting.
- 8) Measure the maximum time duration of one single pulse.
- 9) The EUT was set to the Hopping Mode for Dwell Time Test.

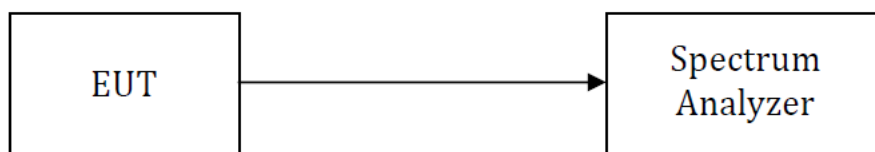

Test Setup Block Diagram

### 8.3 Test Data and Results

Left earphone:

Test Mode	Data Packet	Channel (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	2441	0.382	120.33	<400	Pass
	DH3	2441	1.638	273.546	<400	Pass
	DH5	2441	2.885	302.925	<400	Pass
Pi/4 DQPSK	2DH1	2441	0.391	123.165	<400	Pass
	2DH3	2441	1.644	251.532	<400	Pass
	2DH5	2441	2.891	358.484	<400	Pass


Right earphone:

Test Mode	Data Packet	Channel (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Result
GFSK	DH1	2441	0.383	122.177	<400	Pass
	DH3	2441	1.639	265.518	<400	Pass
	DH5	2441	2.887	326.231	<400	Pass
Pi/4 DQPSK	2DH1	2441	0.393	125.367	<400	Pass
	2DH3	2441	1.644	259.752	<400	Pass
	2DH5	2441	2.892	332.58	<400	Pass


Left earphone:

## GFSK (2441MHz)


## Burst(DH1)

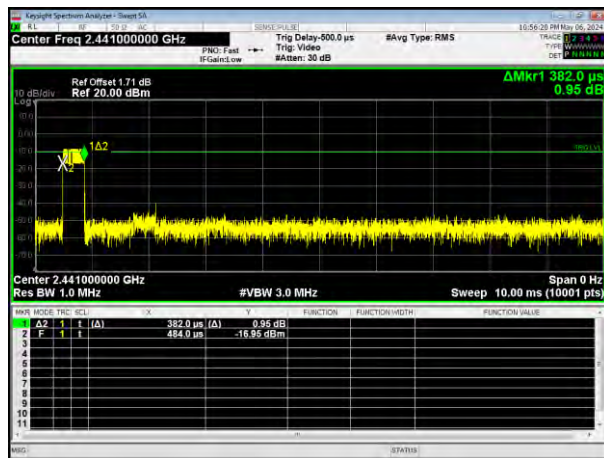


## Accumulate(DH1)

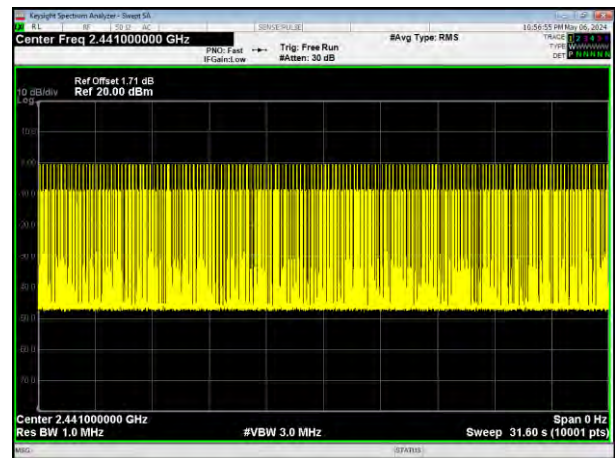

## Burst(DH3)

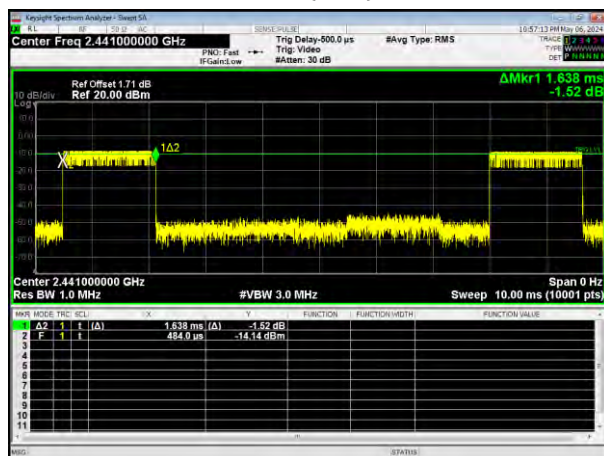


## Accumulate(DH3)

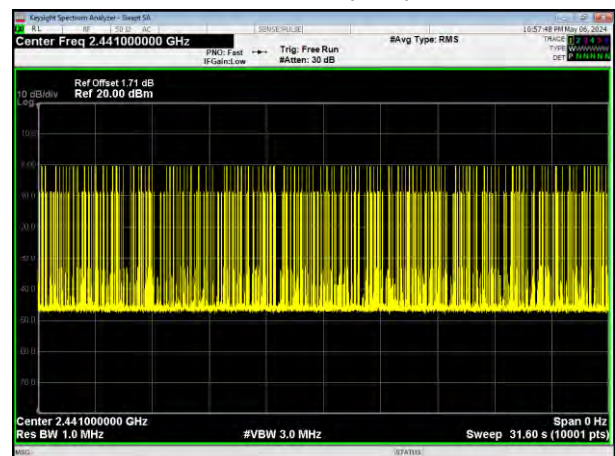


## Burst(DH5)



## Accumulate(DH5)

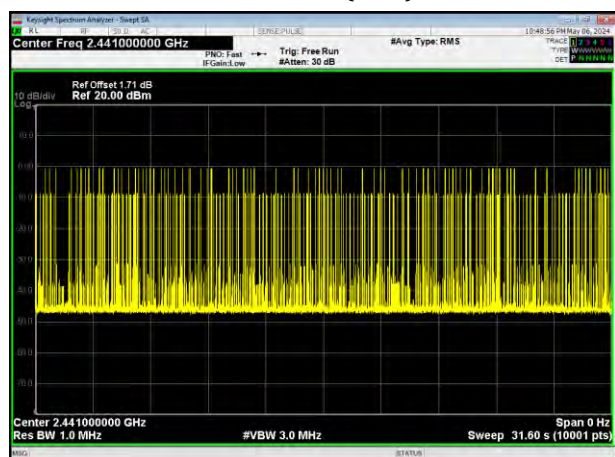

## Burst(2DH1)

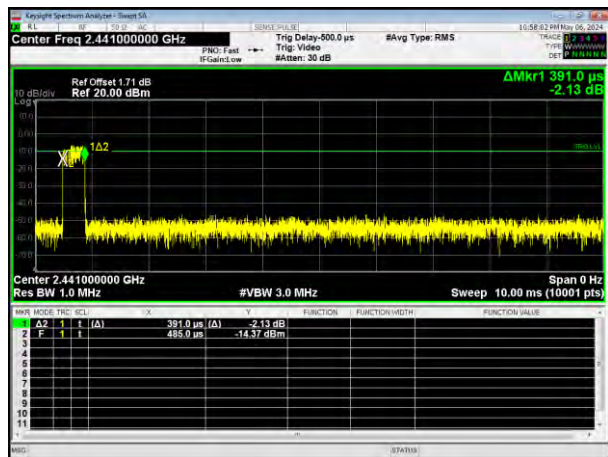

Keysight Spectrum Analyzer - Sweet 55

BL 48 135.5 40 SOURCE: ANALYZE 10:58:35 PM May 06, 2024

Center Freq 2.441000000 GHz PNO: Fast IFGain: Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS

Ref Offset 1.71 dB Ref 20.00 dBm

10 dB/div

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

Center 2.441000000 GHz Span 0 Hz

Res BW 1.0 MHz #VBW 3.0 MHz Sweep 31.60 s (10001 pts)

MAG: (STATUS)

The screenshot displays a Keysight Spectrum Analyzer interface. At the top, the center frequency is set to 2.441000000 GHz. The signal is a periodic waveform, and the period is measured as 1.644 ms. The width of the signal is 354.0 μs. The amplitude is -3.63 dBm. The signal is labeled 'X1' and '1Δ2'. The background is green, and the signal is shown as a yellow waveform. The x-axis is labeled 'Time' and the y-axis is labeled 'dBm'. The top status bar shows the date and time: 10:59:57 AM May 06, 2024.

Center Freq 2.441000000 GHz

Ref Offset 171 dB

Ref 20.00 dBm

Trig Delay: 500.0 μs

Trig Video: 30 dB

SAW: 30 dB

SAW Type: RMS

Span 0 Hz

Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 10.00 ms (10001 pts)

ΔMkr1 1.644 ms

-0.24 dB

1Δ2

X1

1.644 ms (Δ)

354.0 μs

-3.63 dBm

NR MODE TRG: SCL

FUNCTION

FUNCTION WIDTH

FUNCTION VALUE

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

Keysight Spectrum Analyzer - Sweet SA

Center Freq 2.441000000 GHz

PNO: Fast Trig: Free Run #Avg Type: RMS

10 dBm 1.5 dBm

Ref Offset 1.71 dB Ref 20.00 dBm

Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Span 0 Hz Sweep 31.60 s (10001 pts)

Center Freq 2.41000000 GHz

Ref Offset 1.71 dB  
Ref 20.00 dBm

Trig Delay: 500.0  $\mu$ s  
Trig Video  
#Atten: 30 dB

Avg Type: RMS

16:53:36 PM May 09, 2024

AMkr1 2.891 mV  
3.07 dB

Center 2.41000000 GHz  
#VBW 3.0 MHz  
Sweep 10.00 ms  
Span 0 Hz  
Res BW 1.0 MHz

Row	Mode	THz	Sub	dBm	dB	Function	Function Width	Function Value
1	2.41	0.0	0.0	2.891 mV	3.07 dB			
2	1.0	0.0	0.0	484.0 $\mu$ s	-13.77 dBm			

Keysight Spectrum Analyzer - Sweep 24

Center Freq 2.441000000 GHz

Span 0 Hz

Ref Offset 171 dB

Ref 20.00 dBm

Trig: Free Run

#Attenu: 30 dB

#Avg Type: RMS

10 dB/div

Log

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 31.60 s (10001 pts)

Span 0 Hz

10:54:04 PM May 09, 2024

TYPE: CW

DET: P

10.0

9.0

8.0

7.0

6.0

5.0

4.0

3.0

2.0

1.0

0.0

-1.0

-2.0

-3.0

-4.0

-5.0

-6.0

-7.0

-8.0

-9.0

-10.0

-11.0

-12.0

-13.0

-14.0

-15.0

-16.0

-17.0

-18.0

-19.0

-20.0

-21.0

-22.0

-23.0

-24.0

-25.0

-26.0

-27.0

-28.0

-29.0

-30.0

-31.0

-32.0

-33.0

-34.0

-35.0

-36.0

-37.0

-38.0

-39.0

-40.0

-41.0

-42.0

-43.0

-44.0

-45.0

-46.0

-47.0

-48.0

-49.0

-50.0

-51.0

-52.0

-53.0

-54.0

-55.0

-56.0

-57.0

-58.0

-59.0

-60.0

-61.0

-62.0

-63.0

-64.0

-65.0

-66.0

-67.0

-68.0

-69.0

-70.0

-71.0

-72.0

-73.0

-74.0

-75.0

-76.0

-77.0

-78.0

-79.0

-80.0

-81.0

-82.0

-83.0

-84.0

-85.0

-86.0

-87.0

-88.0

-89.0

-90.0

-91.0

-92.0

-93.0

-94.0

-95.0

-96.0

-97.0

-98.0

-99.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0

10.0

0.0

-10.0

-20.0

-30.0

-40.0

-50.0

-60.0

-70.0

-80.0

-90.0

-100.0

100.0

90.0

80.0

70.0

60.0

50.0

40.0

30.0

20.0


10.0



Right earphone:


## GFSK (2441MHz)

## Burst(DH1)

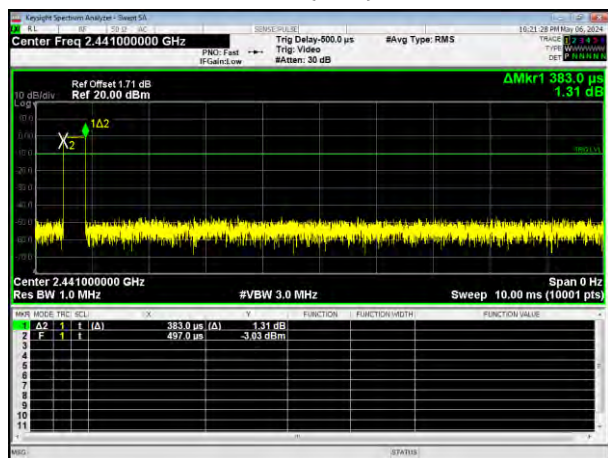


## Pi/4 DQPSK (2441MHz)


Burst(2DH1)

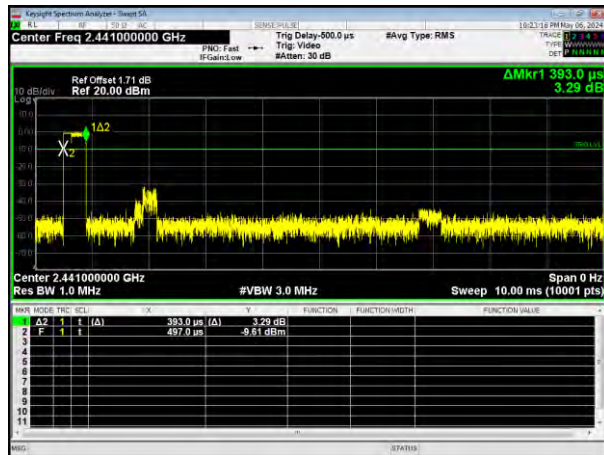


Accumulate(2DH1)

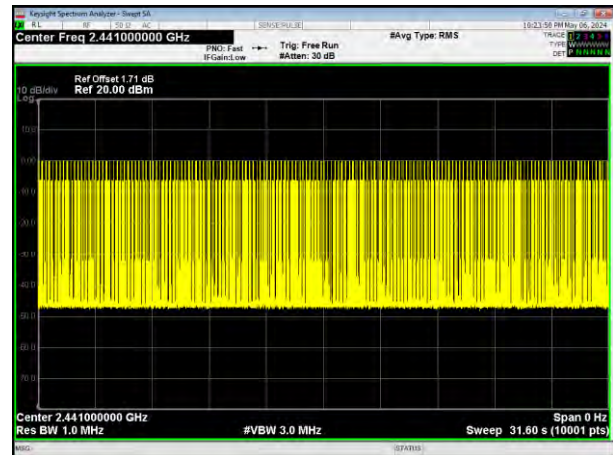

Burst(2DH3)

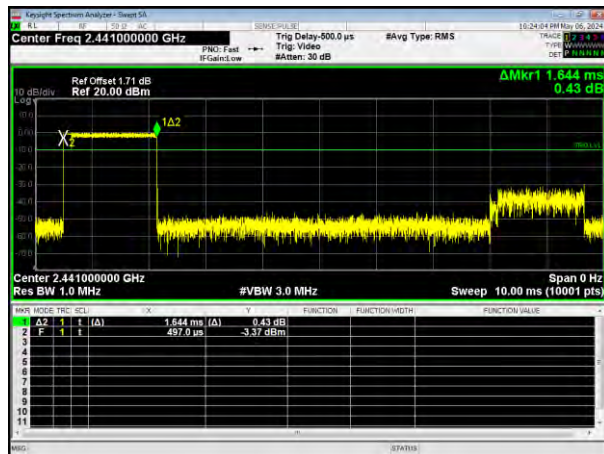


Accumulate(2DH3)

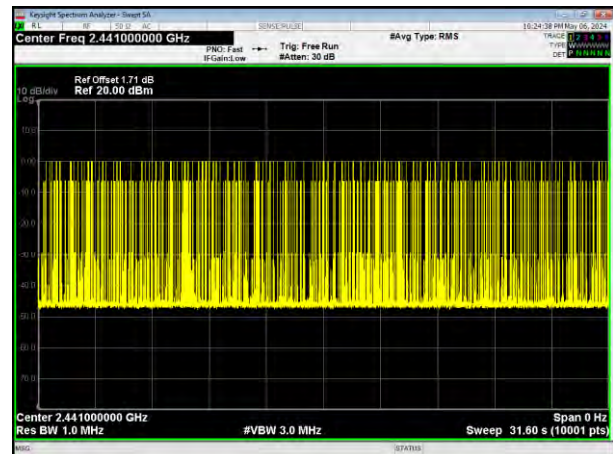

Burst(2DH5)



Accumulate(2DH5)

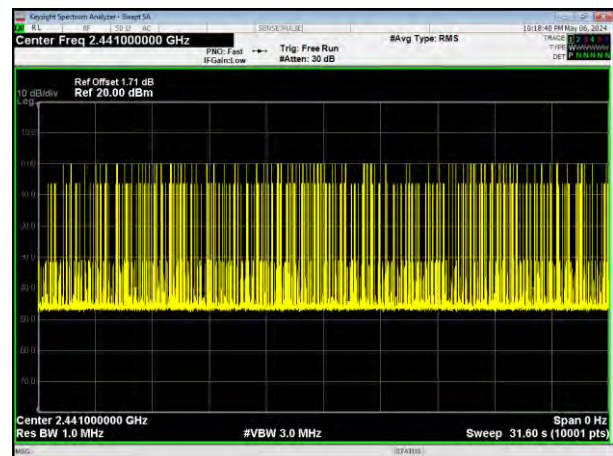

## 9. Maximum Peak Conducted Output Power

### 9.1 Standard and Limit

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 9.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 2MHz, VBW = 6MHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and mark the value.
- 5) Repeat the above procedures until all frequencies measured were complete.



Test Setup Block Diagram

### 9.3 Test Data and Results

Left earphone:


Test Mode	Test Channel MHz	Conducted Output Power (dBm)	Limit (dBm)	Test Result
GFSK	2402	-0.42	21	Pass
	2441	-0.51	21	Pass
	2480	-0.73	21	Pass
Pi/4 DQPSK	2402	0.51	21	Pass
	2441	0.44	21	Pass
	2480	0.22	21	Pass

Right earphone:


Test Mode	Test Channel MHz	Conducted Output Power (dBm)	Limit (dBm)	Test Result
GFSK	2402	-0.25	21	Pass
	2441	-0.49	21	Pass
	2480	-0.79	21	Pass
Pi/4 DQPSK	2402	0.62	21	Pass
	2441	0.41	21	Pass
	2480	0.11	21	Pass



Left earphone:

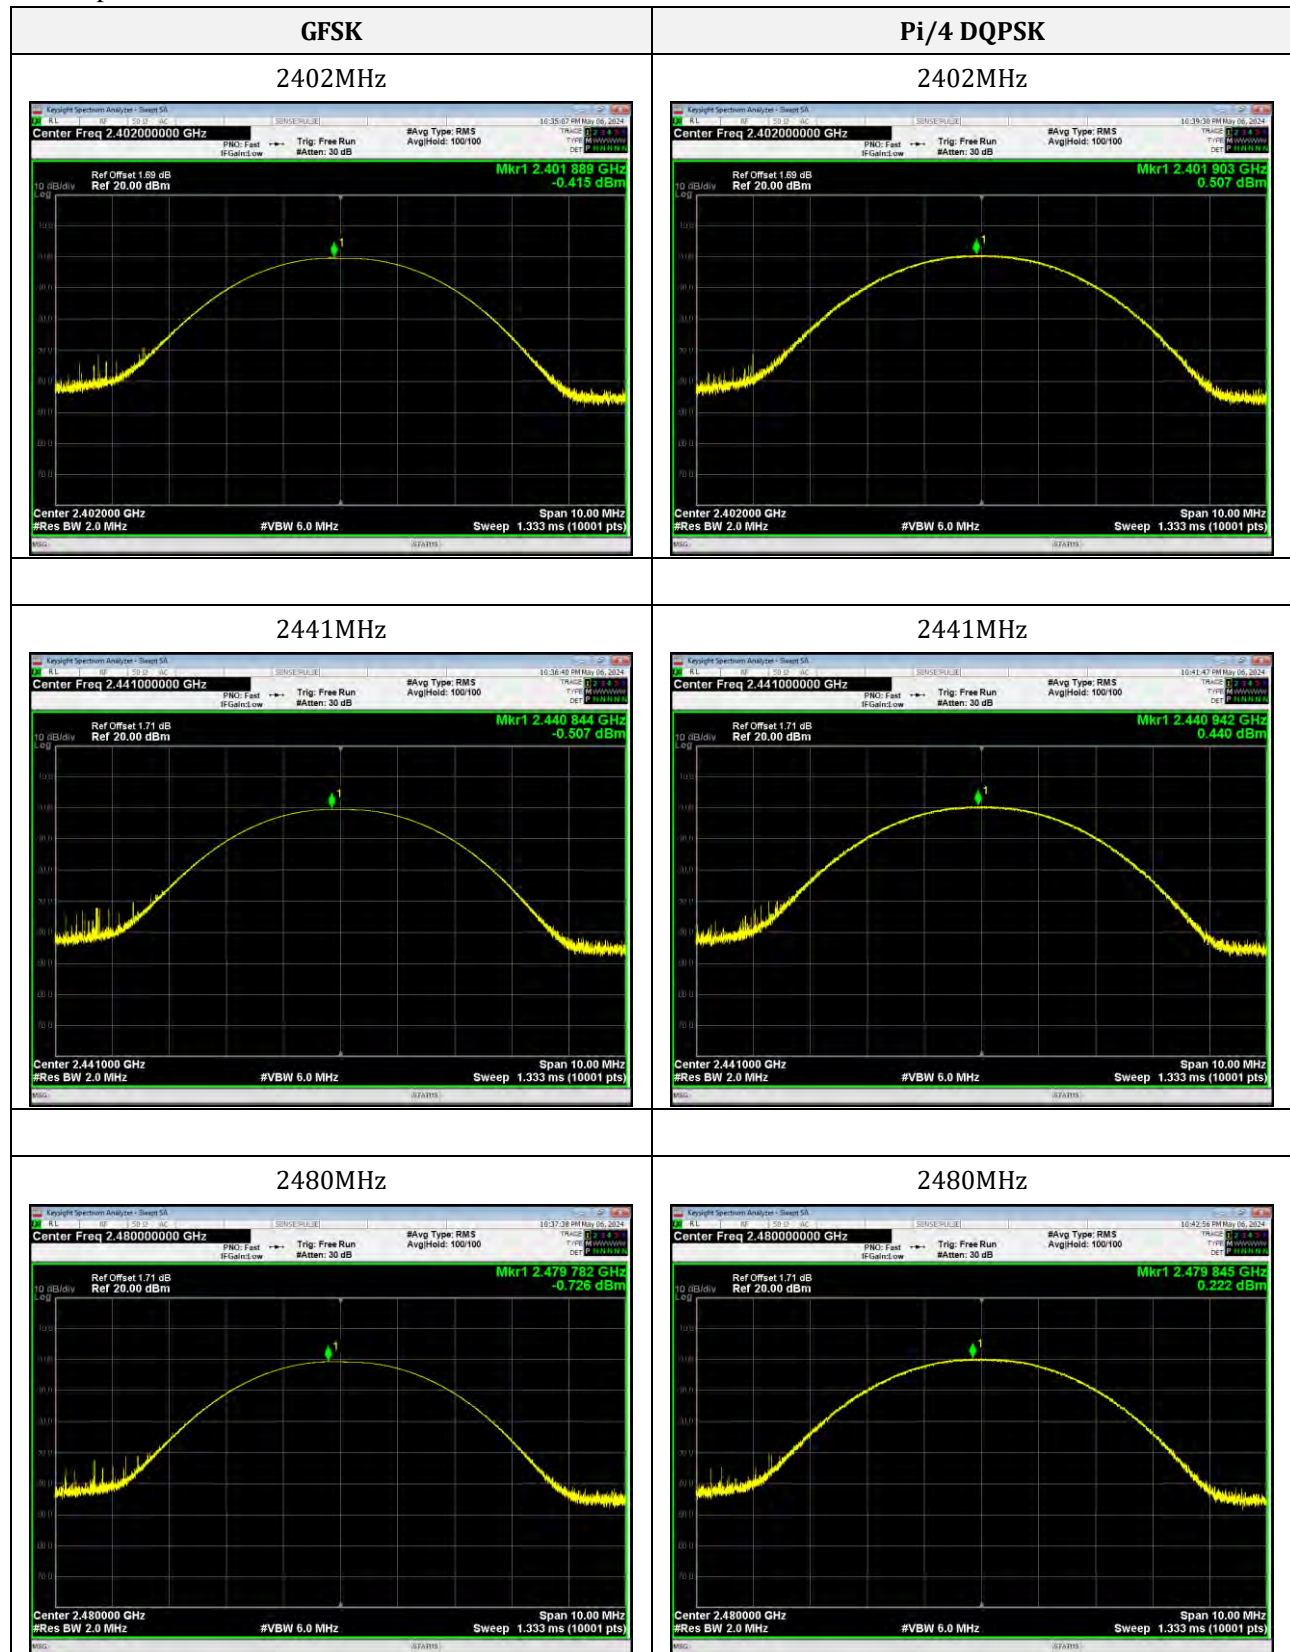

Right earphone:

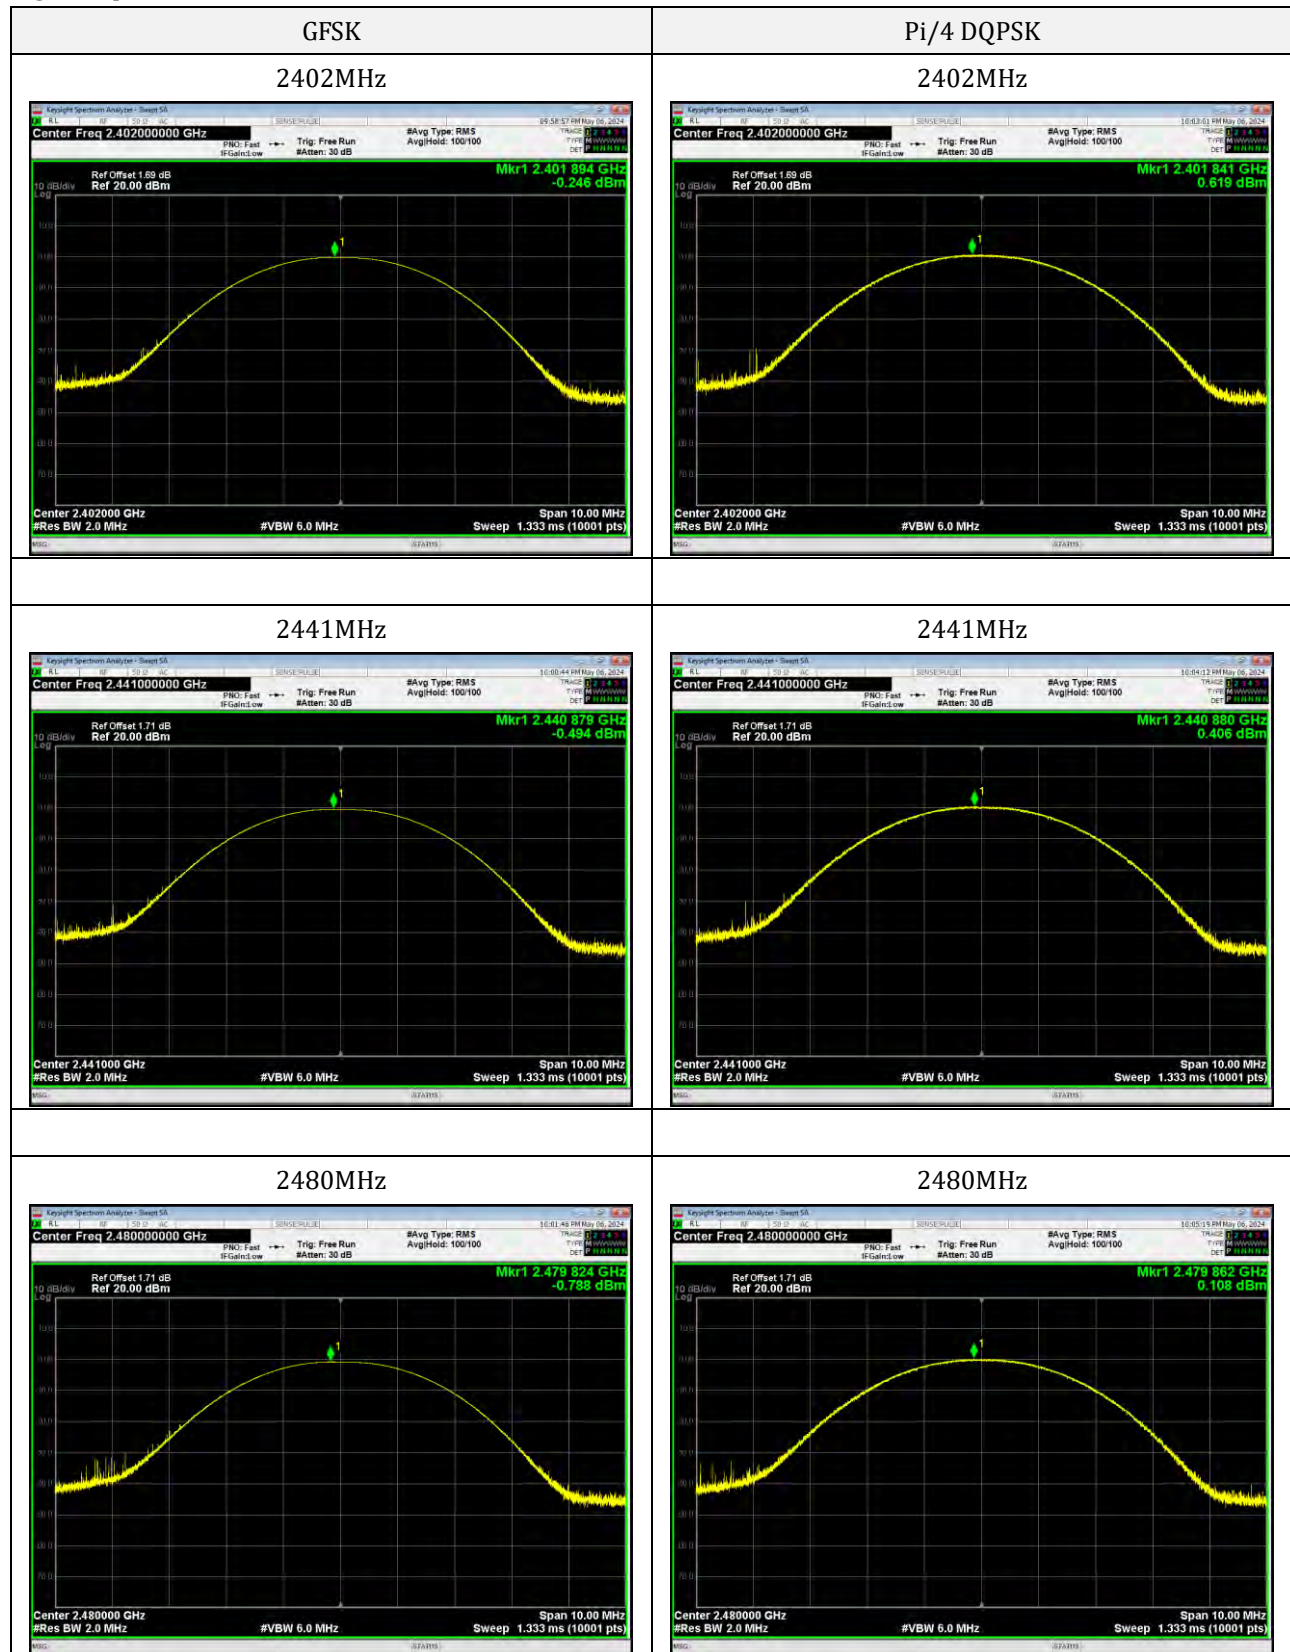

## 10. Occupied Bandwidth(-20dB)

### 10.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 10.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 30kHz, VBW = 100kHz, Sweep = Auto.
- 4) Set a reference level on the measuring instrument equal to the highest peak value.
- 5) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- 6) Repeat the above procedures until all frequencies measured were complete.



Test Setup Block Diagram

### 10.3 Test Data and Results

Left earphone:


Test Mode	Test Channel (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
GFSK	2402	0.945	0.86254
	2441	0.951	0.86474
	2480	0.953	0.85478
Pi/4 DQPSK	2402	1.299	1.1798
	2441	1.273	1.1763
	2480	1.276	1.1812

Right earphone:


Test Mode	Test Channel (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
GFSK	2402	0.949	0.85450
	2441	0.943	0.85471
	2480	0.941	0.86282
Pi/4 DQPSK	2402	1.273	1.1761
	2441	1.335	1.2007
	2480	1.276	1.1828



Left earphone:

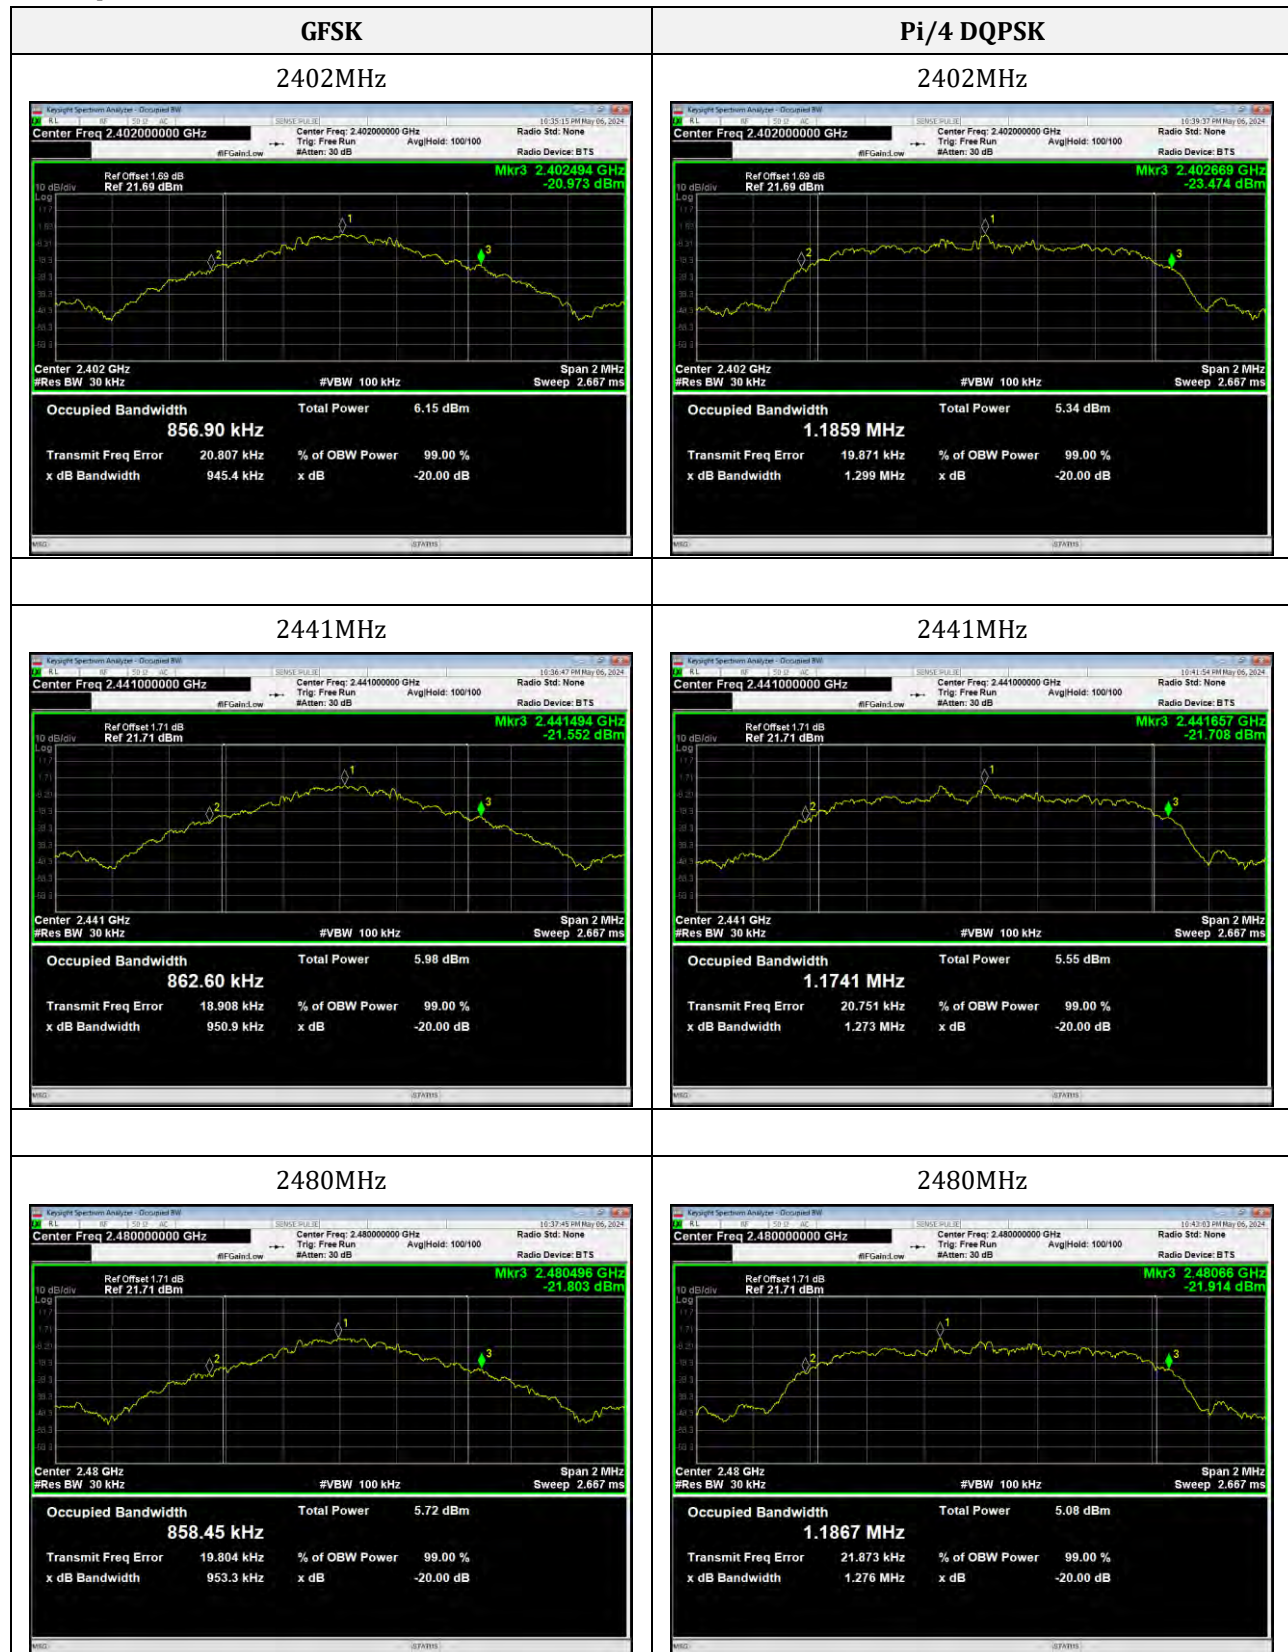

Right earphone:

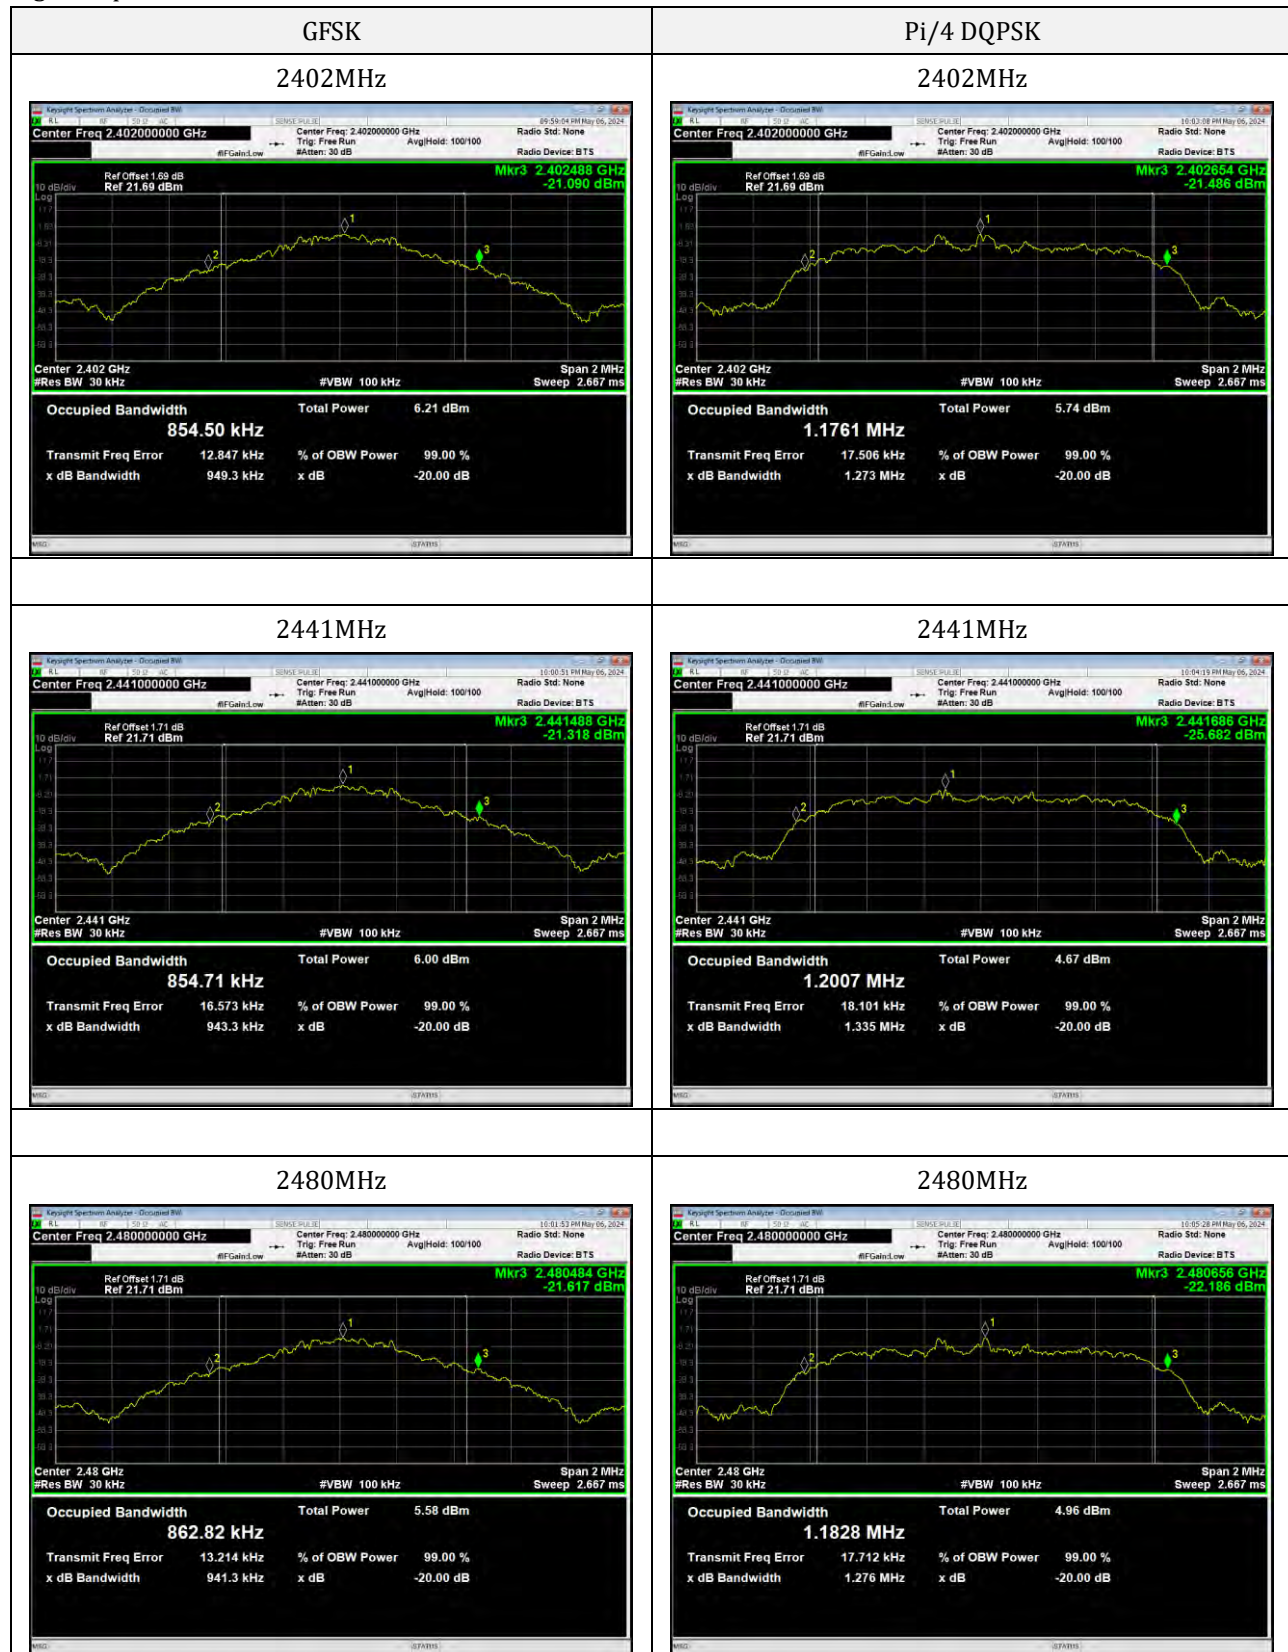

## 11. Carrier Frequencies Separation

### 11.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 11.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 30kHz, VBW = 100kHz, Sweep = Auto, Detector = Peak.
- 4) By using the Max Hold function, record the separation of two adjacent channels.
- 5) Measure the frequency difference of these two adjacent channels by spectrum analyzer mark function. and then plot the result on the screen of the spectrum analyzer.
- 6) Repeat above procedures until all frequencies measured were complete.



Test Setup Block Diagram

### 11.3 Test Data and Results

Left earphone:

Test Mode	Test Channel	Test Freq. 1 (MHz)	Test Freq. 2 (MHz)	CFS (MHz)	Limit (MHz)
GFSK	Lowest	2401.998	2402.998	1	0.63
	Middle	2440.996	2441.994	0.998	0.634
	Highest	2479.006	2479.998	0.992	0.635
Pi/4 DQPSK	Lowest	2402.01	2403.014	1.004	0.866
	Middle	2441.006	2441.998	0.992	0.849
	Highest	2478.862	2480.162	1.3	0.851


Right earphone:

Test Mode	Test Channel	Test Freq. 1 (MHz)	Test Freq. 2 (MHz)	CFS (MHz)	Limit (MHz)
GFSK	Lowest	2402.016	2403.006	0.99	0.632
	Middle	2441.014	2441.992	0.978	0.629
	Highest	2479.08	2480.08	1	0.627
Pi/4 DQPSK	Lowest	2401.85	2402.996	1.146	0.849
	Middle	2440.854	2441.984	1.13	0.89
	Highest	2478.876	2480.164	1.288	0.851


Note:  $CFS(\text{Channel Frequency Separation}) = \text{Test Freq. 2} - \text{Test Freq. 1}$



Left earphone:

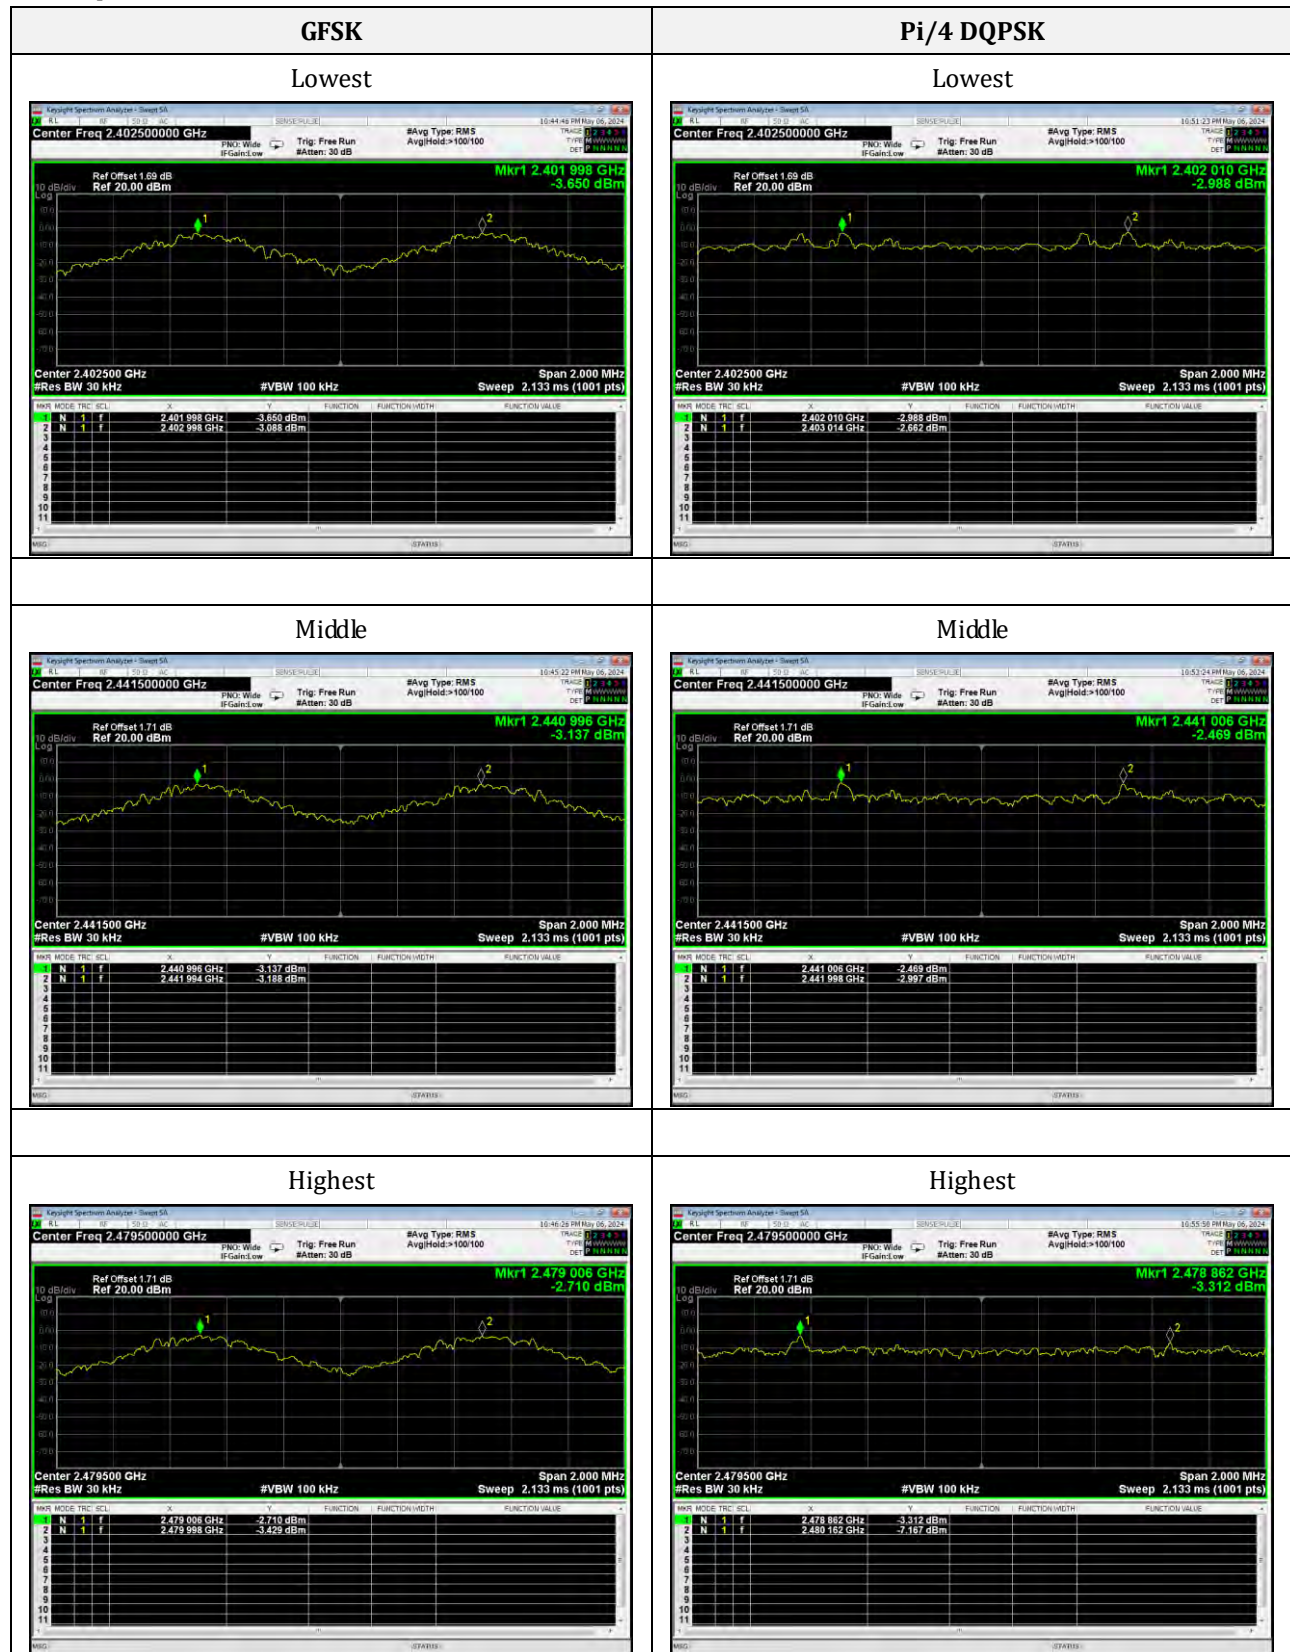

Right earphone:

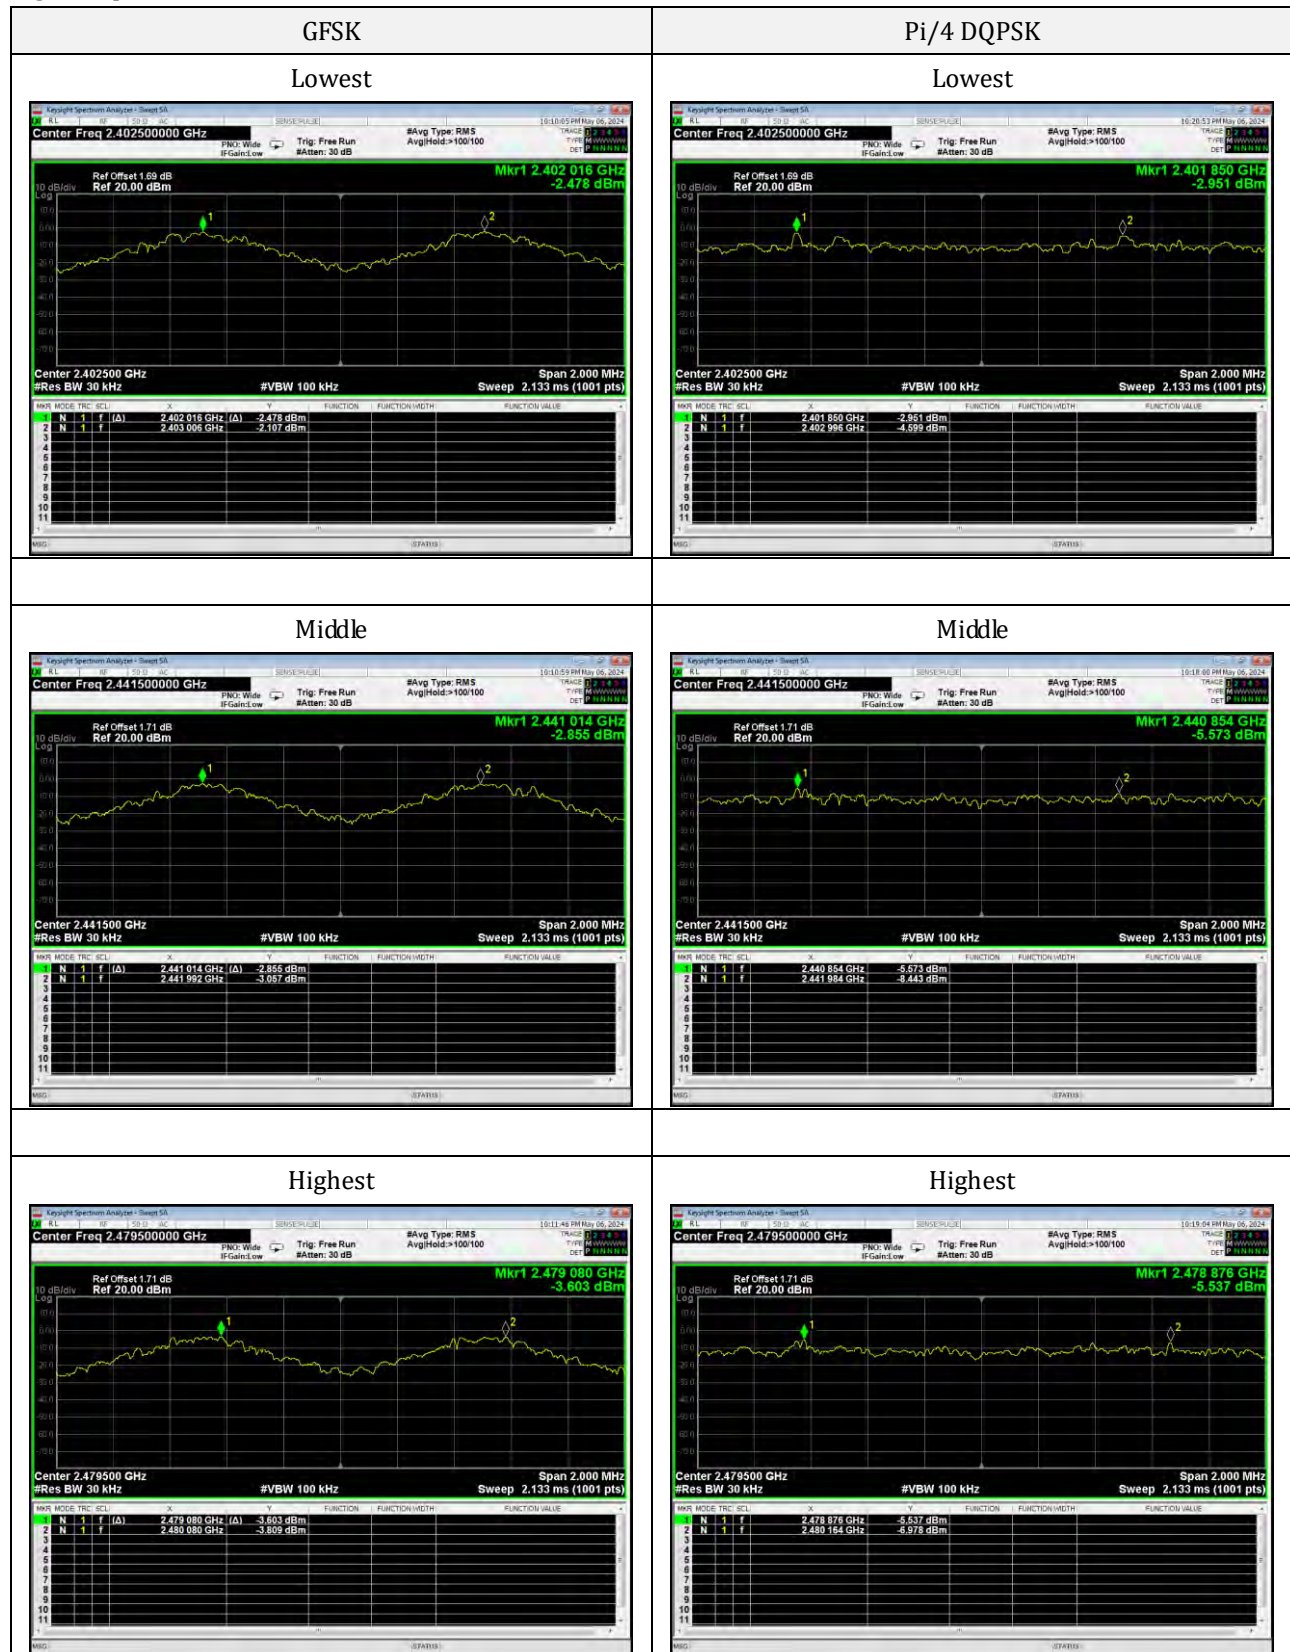

## 12. Number of Hopping Channel

### 12.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Set the spectrum analyzer on Max hold mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 5) Set the spectrum analyzer on View mode and then plot the result on the screen of the spectrum analyzer.
- 6) Repeat the above procedures until all frequencies measured were complete.



### 12.3 Test Data and Results

Left earphone:


Test Mode	Number of Hopping Channel	Limit	Test Result
GFSK	79	15	Pass
Pi/4 DQPSK	79	15	Pass

Right earphone:


Test Mode	Number of Hopping Channel	Limit	Test Result
GFSK	79	15	Pass
Pi/4 DQPSK	79	15	Pass

Number of Hopping Channel
---------------------------

GFSK

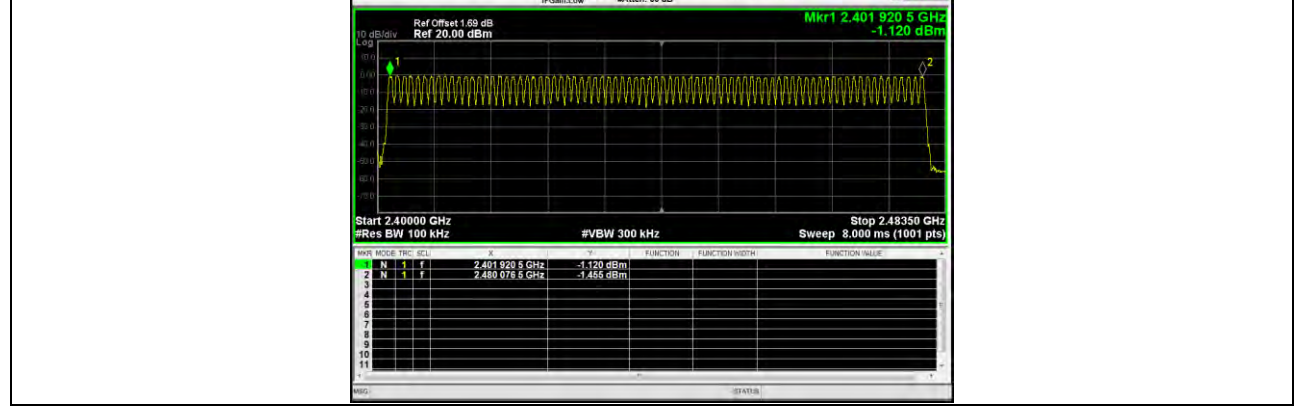[illegible]


Pi/4 DQPSK	
------------	--

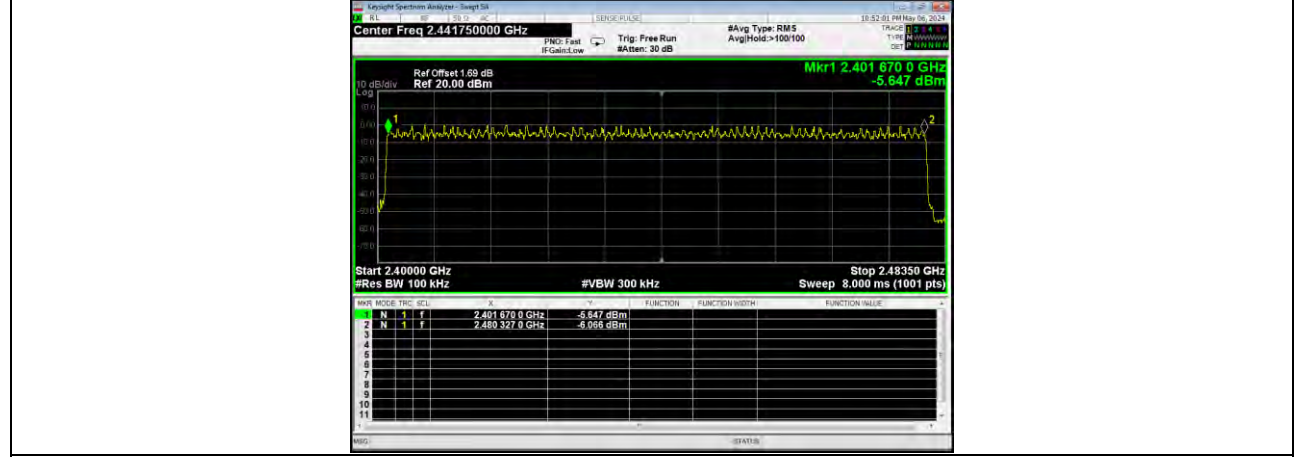




Number of Hopping Channel	
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

GFSK
------

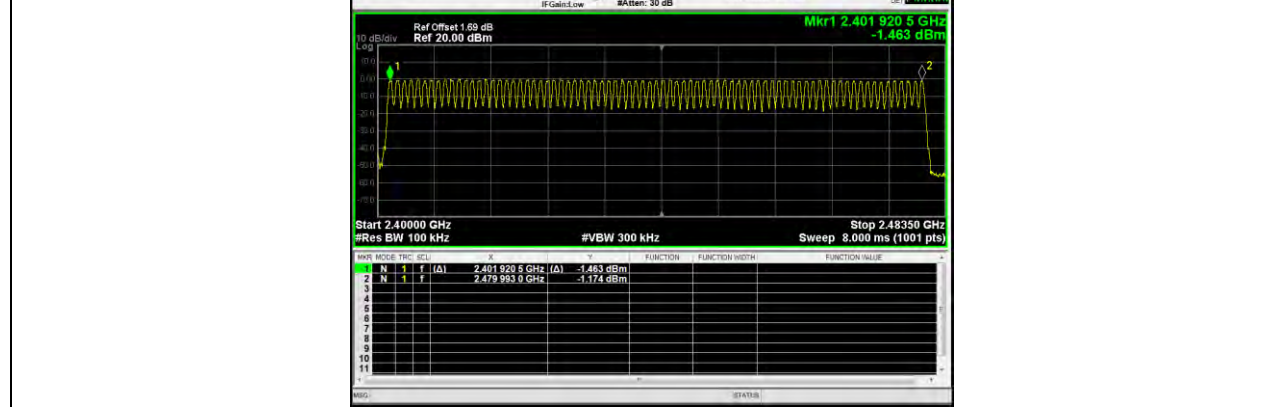

---

Pi/4 DQPSK

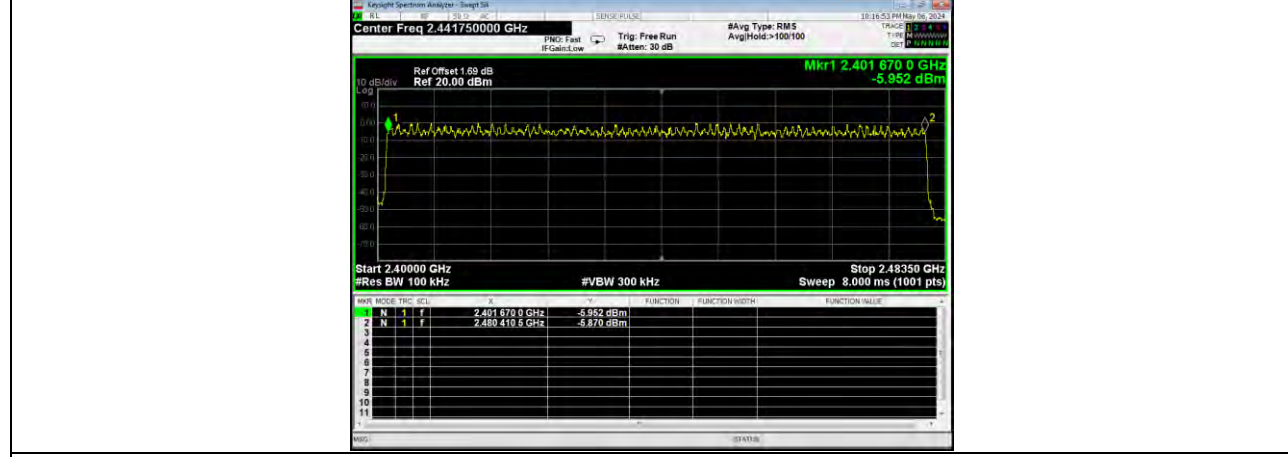

## 13. Band-edge Emission(Conducted)

### 13.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### 13.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.10.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Set a convenient frequency span including 100 kHz bandwidth from band edge.
- 6) Measure the emission and marking the edge frequency.
- 7) Repeat above procedures until all frequencies measured were complete.



Test Setup Block Diagram

### 13.3 Test Data and Results

Left earphone:

Test Mode	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
No-Hopping					
GFSK	Lowest	2402	-43.22	-20	Pass
	Highest	2480	-54.18	-20	Pass
Pi/4 DQPSK	Lowest	2402	-45.16	-20	Pass
	Highest	2480	-54.03	-20	Pass
Hopping					
GFSK	Lowest	2402	-52.74	-20	Pass
	Highest	2480	-51.15	-20	Pass
Pi/4 DQPSK	Lowest	2402	-52.98	-20	Pass
	Highest	2480	-52.12	-20	Pass

Right earphone:

Test Mode	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
No-Hopping					
GFSK	Lowest	2402	-41.5	-20	Pass
	Highest	2480	-53.69	-20	Pass
Pi/4 DQPSK	Lowest	2402	-41.36	-20	Pass
	Highest	2480	-52.44	-20	Pass
Hopping					
GFSK	Lowest	2402	-53.03	-20	Pass
	Highest	2480	-52.52	-20	Pass
Pi/4 DQPSK	Lowest	2402	-52.41	-20	Pass
	Highest	2480	-51.63	-20	Pass


Left earphone:

## No-Hopping GFSK Lowest

Reference Power




Band-edge Emission

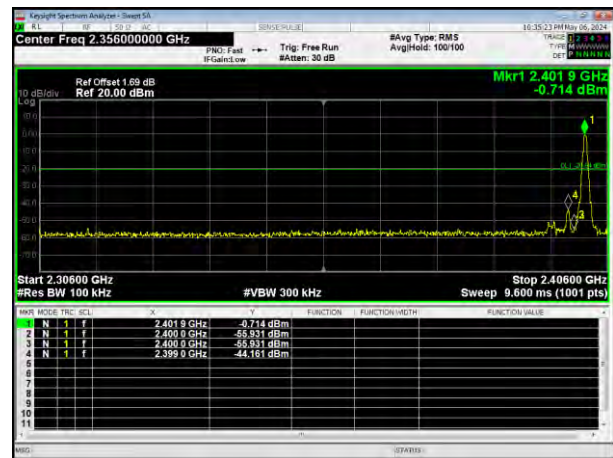


## No-Hopping GFSK Highest

Reference Power

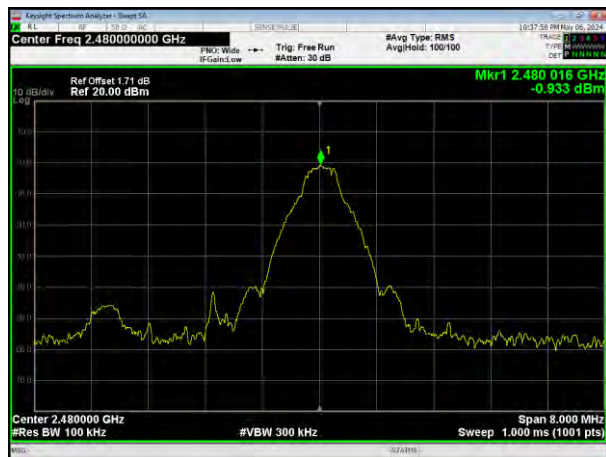


Band-edge Emission

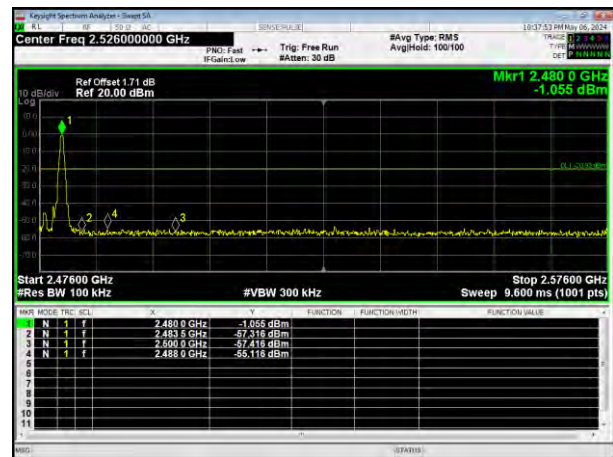




## No-Hopping Pi/4 DQPSK Lowest

Reference Power

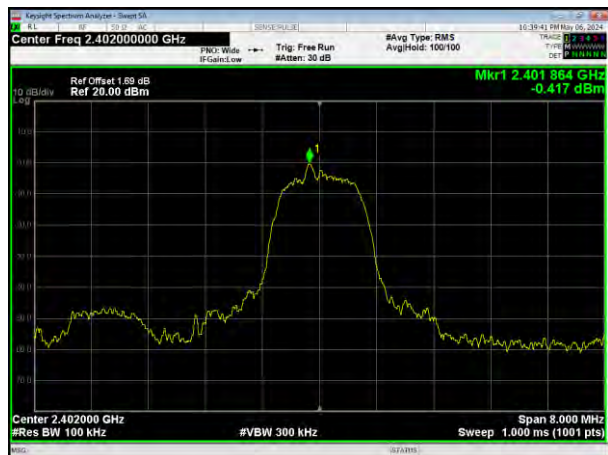


Band-edge Emission

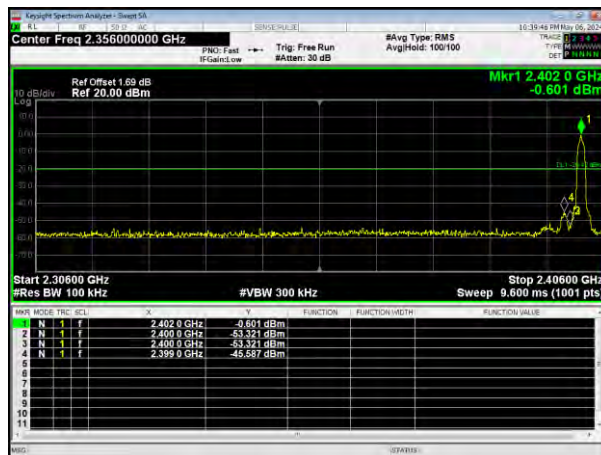


## No-Hopping Pi/4 DQPSK Highest

Reference Power

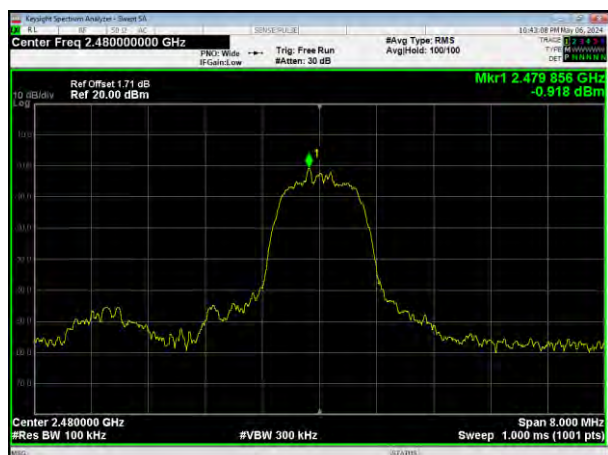

Band-edge Emission

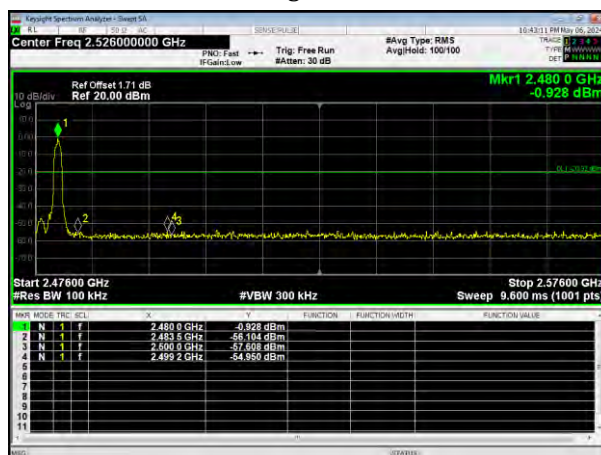


## Hopping GFSK Lowest

Reference Power



Band-edge Emission

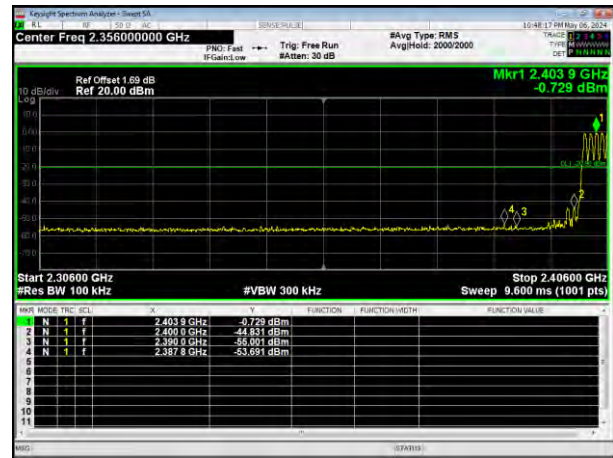


## Hopping GFSK Highest

Reference Power



Band-edge Emission

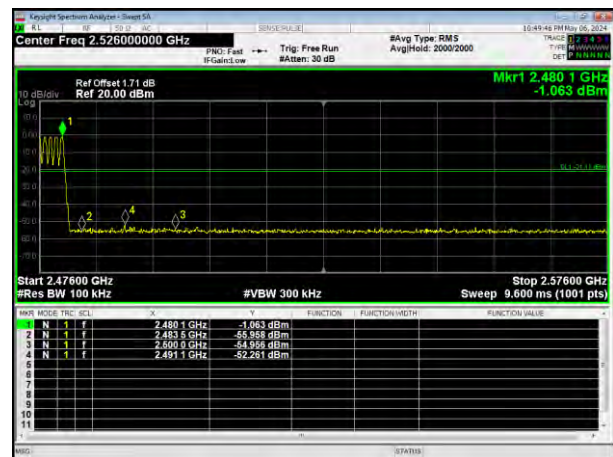


## Hopping Pi/4 DQPSK Lowest

Reference Power




Band-edge Emission

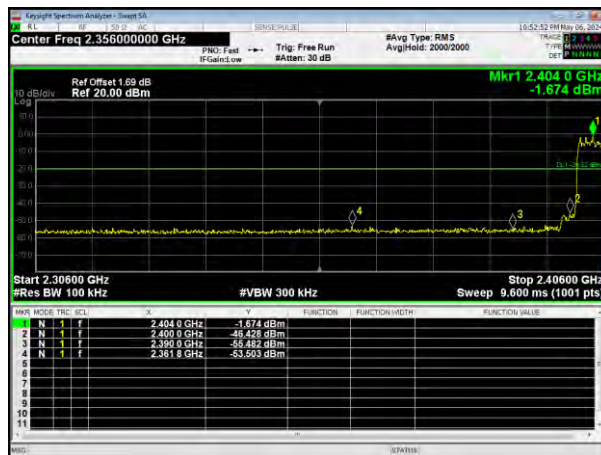


## Hopping Pi/4 DQPSK Highest

Reference Power

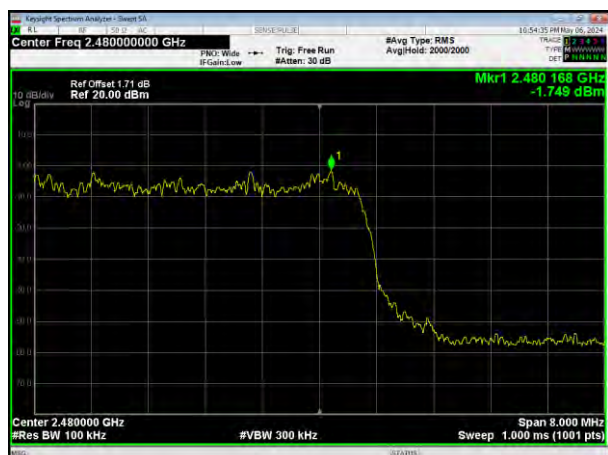

Band-edge Emission

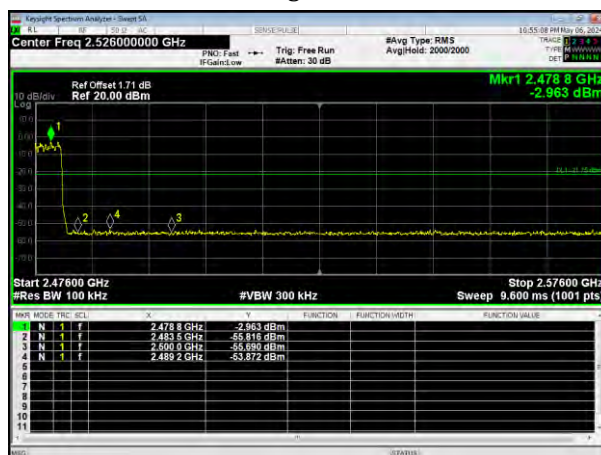




Right earphone:

## No-Hopping GFSK Lowest

Reference Power




Band-edge Emission

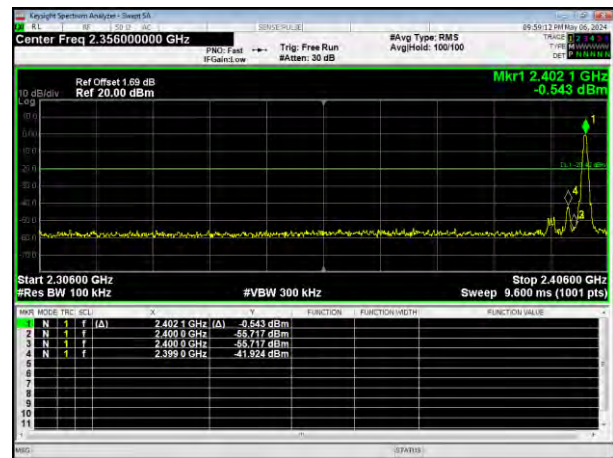


## No-Hopping GFSK Highest

Reference Power

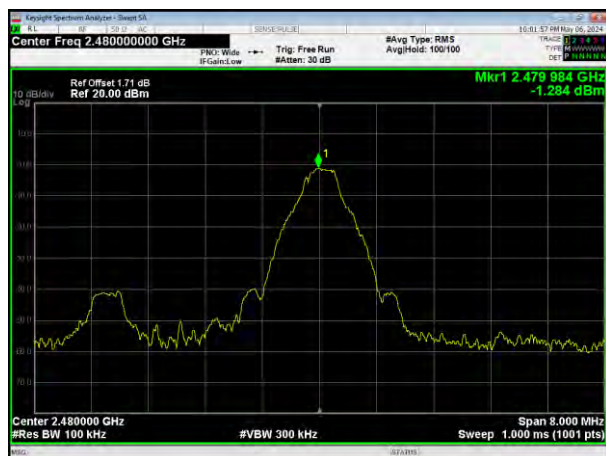


Band-edge Emission

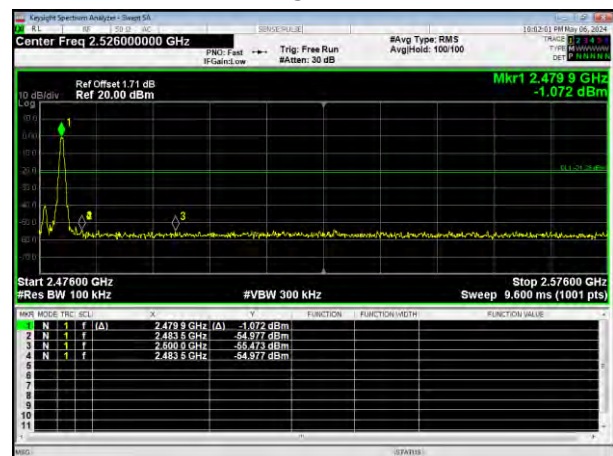


## No-Hopping Pi/4 DQPSK Lowest

Reference Power

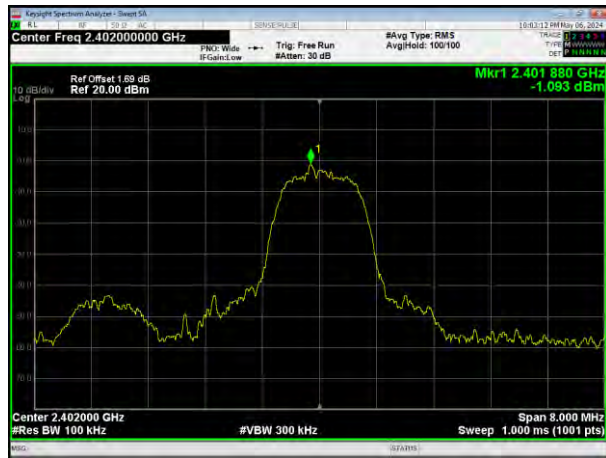

Band-edge Emission

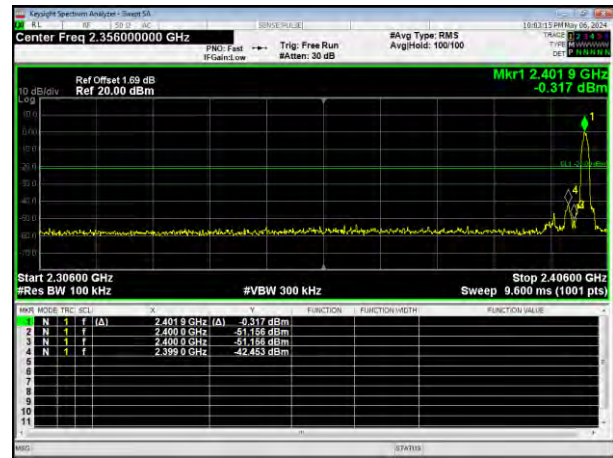


## No-Hopping Pi/4 DQPSK Highest

Reference Power



Band-edge Emission

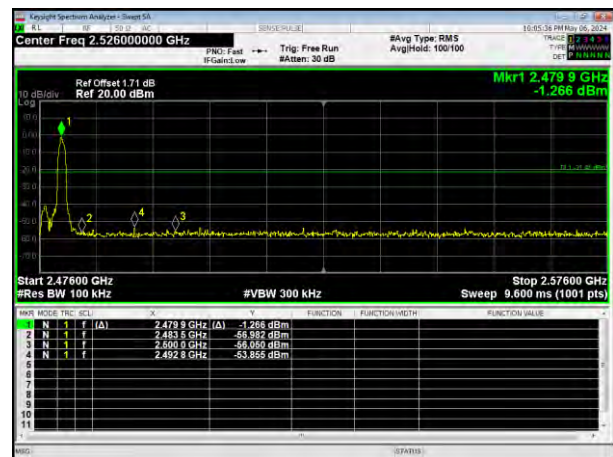


## Hopping GFSK Lowest

Reference Power



Band-edge Emission

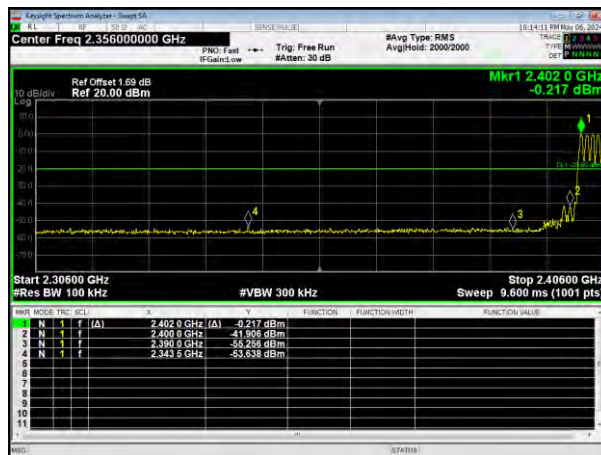


## Hopping GFSK Highest

Reference Power



Band-edge Emission

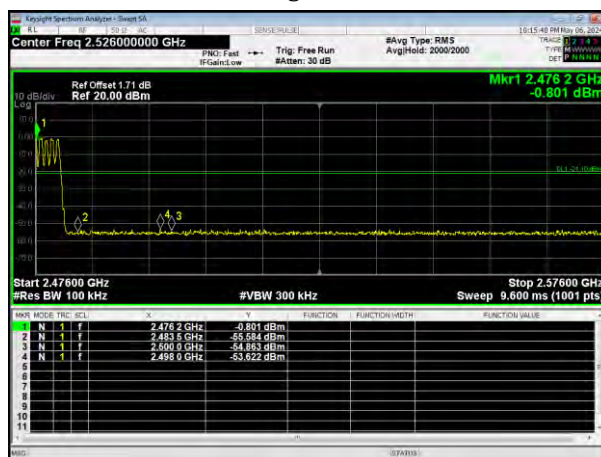




## Hopping Pi/4 DQPSK Lowest

Reference Power



Band-edge Emission

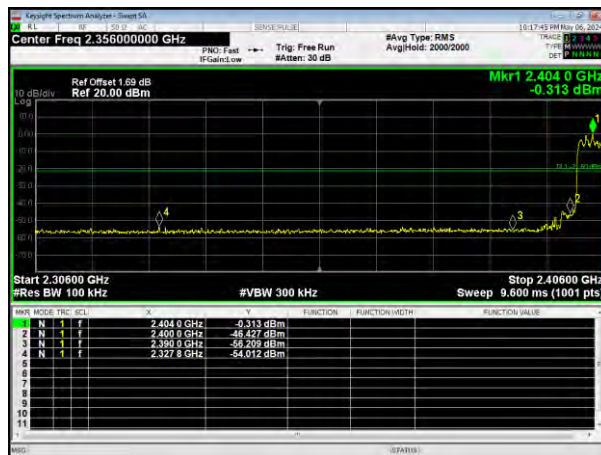


## Hopping Pi/4 DQPSK Highest

Reference Power



Band-edge Emission

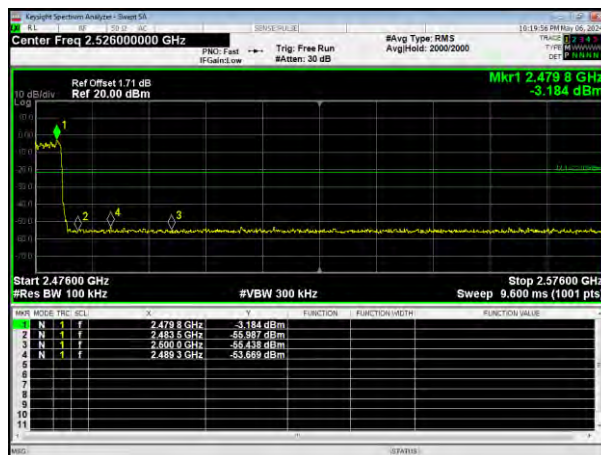

## 14. Conducted RF Spurious Emissions

### 14.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### 14.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.7.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Measure the spurious emissions with frequency range from 9kHz to 26.5GHz.
- 6) Repeat above procedures until all measured frequencies were complete.



Test Setup Block Diagram

### 14.3 Test Data and Results

*Note: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions measurement data.*




Left earphone:

## GFSK Lowest

## Reference Power



## Spurious Emissions

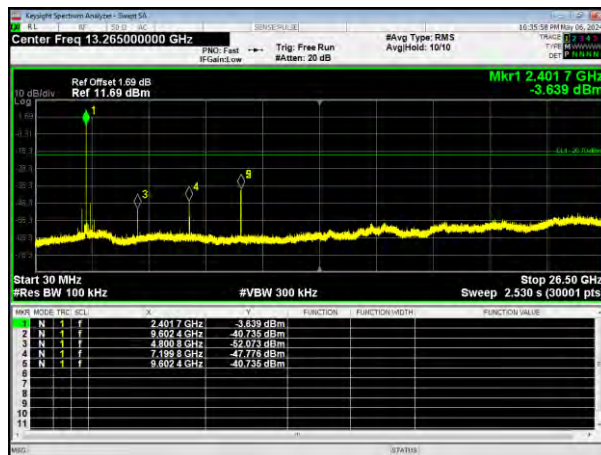


## GFSK Middle

## Reference Power



## Spurious Emissions

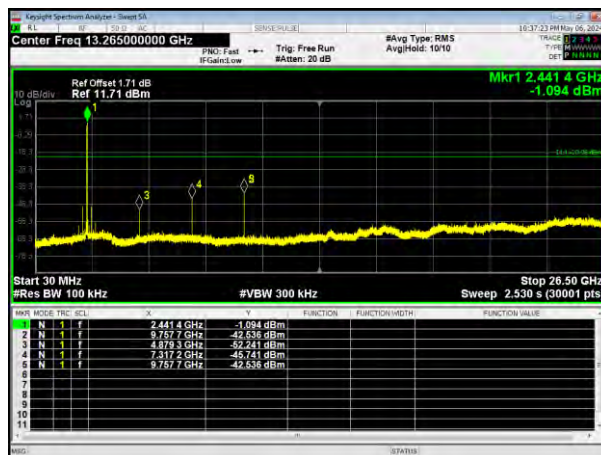


## GFSK Highest

## Reference Power




## Spurious Emissions

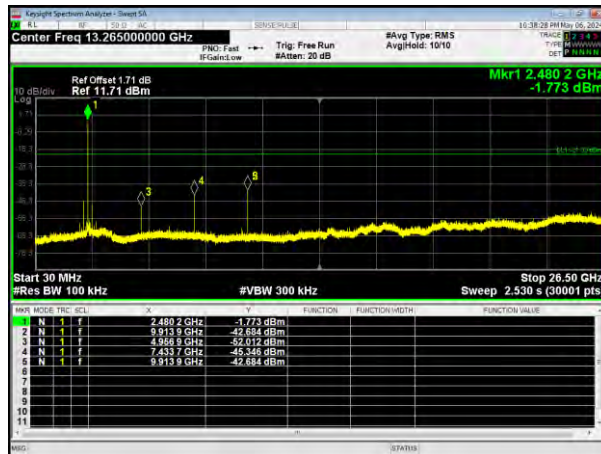


## Pi/4 DQPSK Lowest

Reference Power

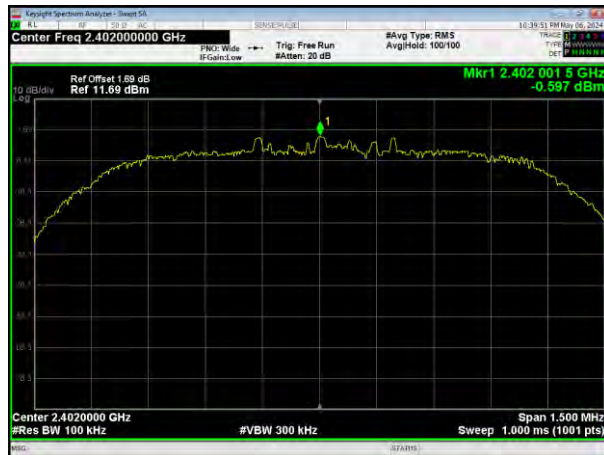

Spurious Emissions

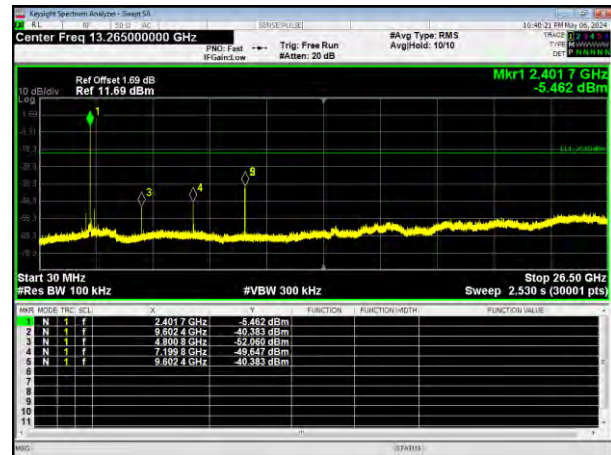


## Pi/4 DQPSK Middle

Reference Power



Spurious Emissions

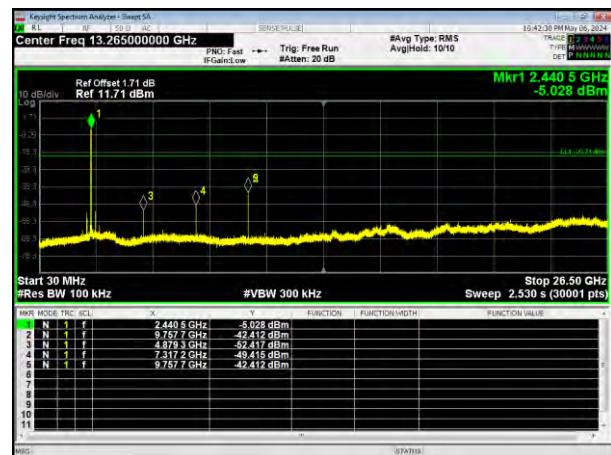


## Pi/4 DQPSK Highest

Reference Power



Spurious Emissions

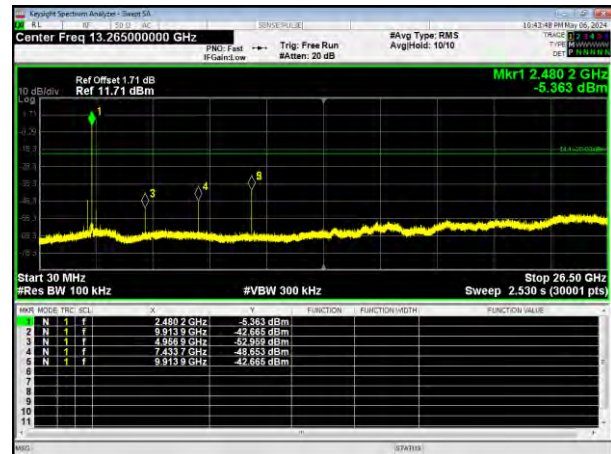




Right earphone:

## GFSK Lowest

## Reference Power



## Spurious Emissions

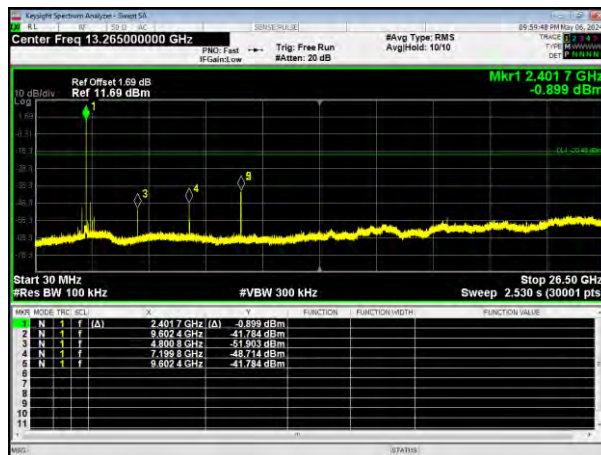


## GFSK Middle

## Reference Power



## Spurious Emissions

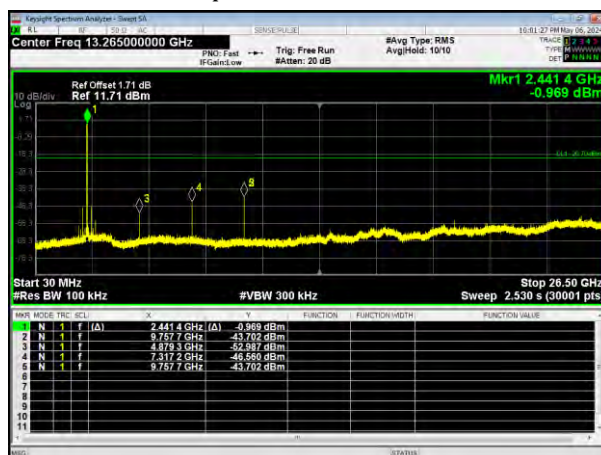


## GFSK Highest

## Reference Power



## Spurious Emissions

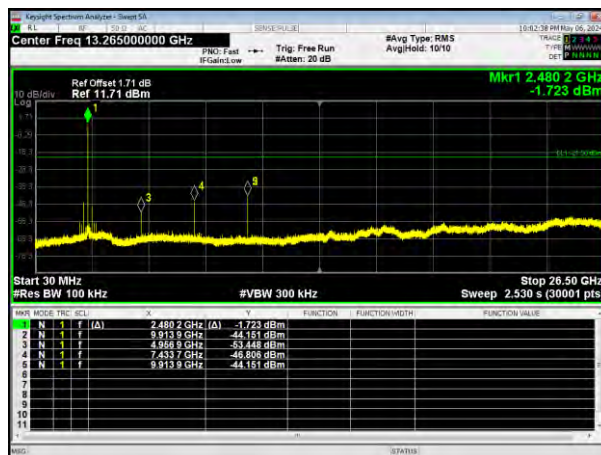


## Pi/4 DQPSK Lowest

Reference Power



Spurious Emissions

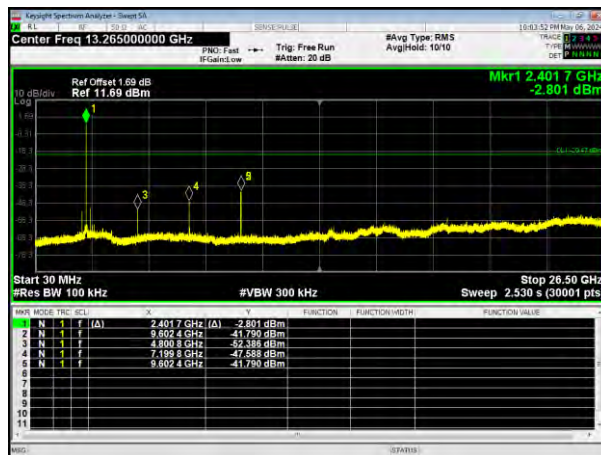


## Pi/4 DQPSK Middle

Reference Power



Spurious Emissions

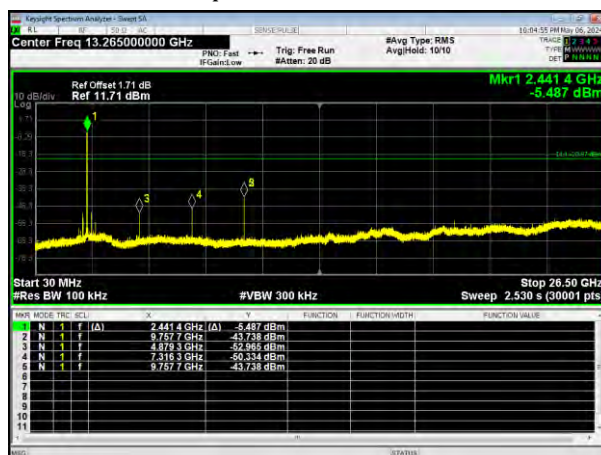


## Pi/4 DQPSK Highest

Reference Power



Spurious Emissions

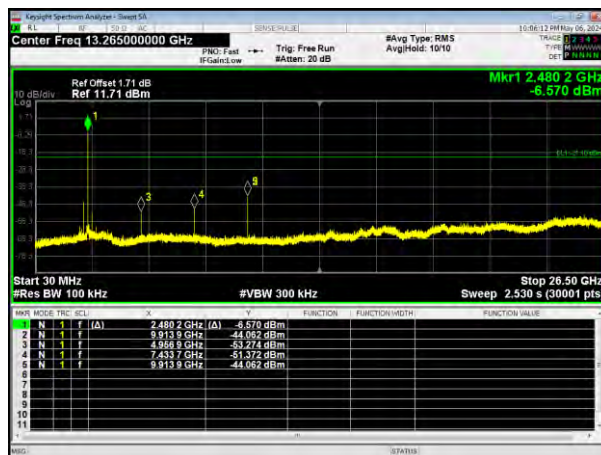

\*\*\*\*\* END OF REPORT \*\*\*\*\*