

TEST REPORT

Applicant Name: Shenzhen Grand Time Technology Co.,Ltd
Address: 24B, Microsoft Comtech Tower, No.55 Gaoxin South 9th Road, Nanshan District, Shenzhen 518057, P.R. China
Report Number: 2401Z105021E-RF-00B
FCC ID: 2AM6P-F2S

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: 4G Body worn camera
Model No.: F2S-A
Multiple Model(s) No.: F2S, F2S-B, F2S-C, F2S-D, F2S-E, F2S-F, F2S-G, F2S-P, F2S-S, F2S-L, F2S-V, F2S-R, F2S-W, F2S-Q, F2S-Y, F2S-X, F2S-H, F3S-A, F3S-B, F3S-C, F3S-D, F3S-S, F3S-P, F5S-A, F5S-B, F5S-C, F5S-D, F5S-S, F5S-P
Trade Mark: Grand Time
Date Received: 2024-11-25
Issue Date: 2025-02-17

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Jim Cheng

Jim Cheng
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, Futian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
REQUIREMENTS AND TEST PROCEDURES	13
AC LINE CONDUCTED EMISSIONS.....	13
UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS	15
6 dB EMISSION BANDWIDTH.....	18
PEAK OUTPUT POWER MEASUREMENT.....	19
100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	20
POWER SPECTRAL DENSITY	21
DUTY CYCLE	22
ANTENNA REQUIREMENT	23
TEST DATA AND RESULTS.....	24
AC LINE CONDUCTED EMISSIONS.....	24
UNWANTED EMISSION FREQUENCIES AND RESTRICTED BANDS	27
6dB EMISSION BANDWIDTH	57
MAXIMUM CONDUCTED OUTPUT POWER	60
POWER SPECTRAL DENSITY	63
100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	66
DUTY CYCLE	68
RF EXPOSURE EVALUATION	70
EUT PHOTOGRAPHS	71
TEST SETUP PHOTOGRAPHS	72

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Z105021E-RF-00B	Original Report	2025-02-17

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	4G Body worn camera
Tested Model	F2S-A
Multiple Model(s)	F2S, F2S-B, F2S-C, F2S-D, F2S-E, F2S-F, F2S-G, F2S-P, F2S-S, F2S-L, F2S-V, F2S-R, F2S-W, F2S-Q, F2S-Y, F2S-X, F2S-H, F3S-A, F3S-B, F3S-C, F3S-D, F3S-S, F3S-P, F5S-A, F5S-B, F5S-C, F5S-D, F5S-S, F5S-P
Frequency Range	BLE 1M: 2402~2480MHz BLE 2M: 2404~2478MHz
Maximum Conducted Output Peak Power	-3.53dBm
Modulation Technique	GFSK
Antenna Specification[#]	2.75dBi (provided by the applicant)
Voltage Range	DC 3.8V from battery or DC 5V from Adapter
Sample serial number	2UKG-2 for Conducted and Radiated Emissions Test 2UKG-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: QL010-0502000UU Input: 100-240V, 50/60Hz, 0.45A Output: 5.0V, 2.0A

Note: The Multiple models are electrically identical with the test model except for appearance, model name and sale channel. Please refer to the declaration letter[#] for more detail, which was provided by manufacturer.

Objective

This report is in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209, 15.247 rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance ANSI C63.10-2013.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.63dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE 1M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

For BLE 2M mode, 38 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2404	20	2444
1	2406	21	2446
2	2408	22	2448
3	2410	23	2450
4	2412	24	2452
5	2414	25	2454
6	2416	26	2456
7	2418	27	2458
8	2420	28	2460
9	2422	29	2462
10	2424	30	2464
11	2426	31	2466
12	2428	32	2468
13	2430	33	2470
14	2432	34	2472
15	2434	35	2474
16	2436	36	2476
17	2438	37	2478
18	2440	38	/
19	2442	39	/

EUT was tested with Channel 0, 18 and 37.

EUT Exercise Software

Exercise Software [#]	Engineer Mode		
Power Level [#]			
Mode	Low Channel	Middle Channel	High Channel
BLE 1M	Default	Default	Default
BLE 2M	Default	Default	Default

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Receptacle	Unknown	Unknown
Unknown	SD Card	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	0.8	EUT	Adapter
Shielded Un-detachable AC Cable	1.5	Receptacle	LISN/AC Mains

Block Diagram of Test Setup


For Conducted Emissions:

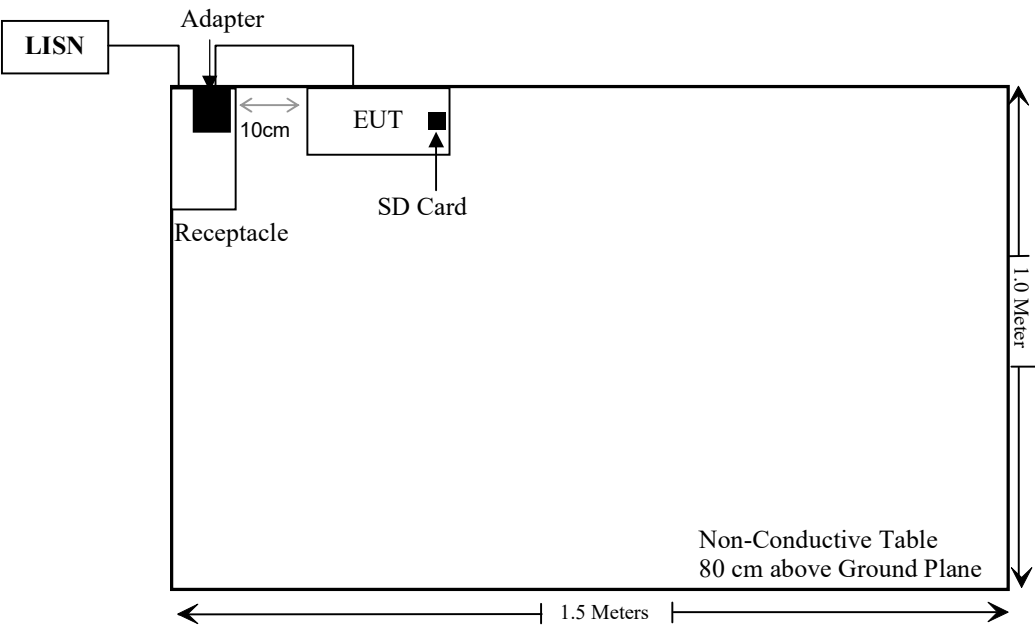

For Radiated Emissions below 1GHz:

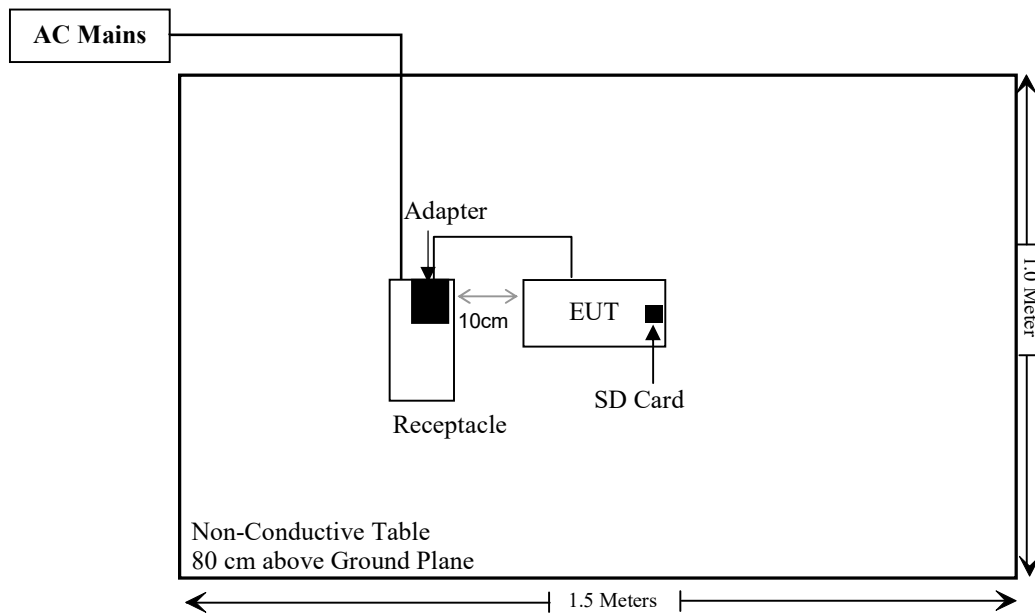

For Radiated Emissions above 1GHz:

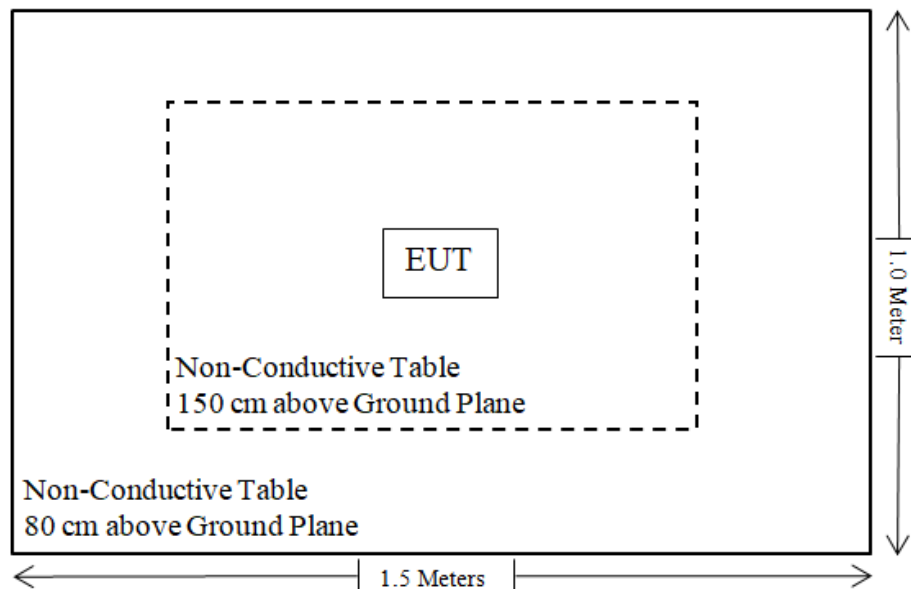

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205,§15.209,§15.247(d)	Radiated Spurious Emission	Compliant
FCC §15.207(a)(2)	6dB Emission Bandwidth	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant
C63.10 §11.6	Duty Cycle	/
FCC §1.1307&§2.1093&§15.247(i)	RF Exposure	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber Cable 1	F-03-EM236	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Filter Switch Unit	DT7220FSU	DS79906	2024/09/09	2025/09/08
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
MARCONI	10dB Attenuator	6534/3	2942	2024/06/27	2025/06/26

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

AC Line Conducted Emissions

Applicable Standard

FCC§15.207

EUT Setup

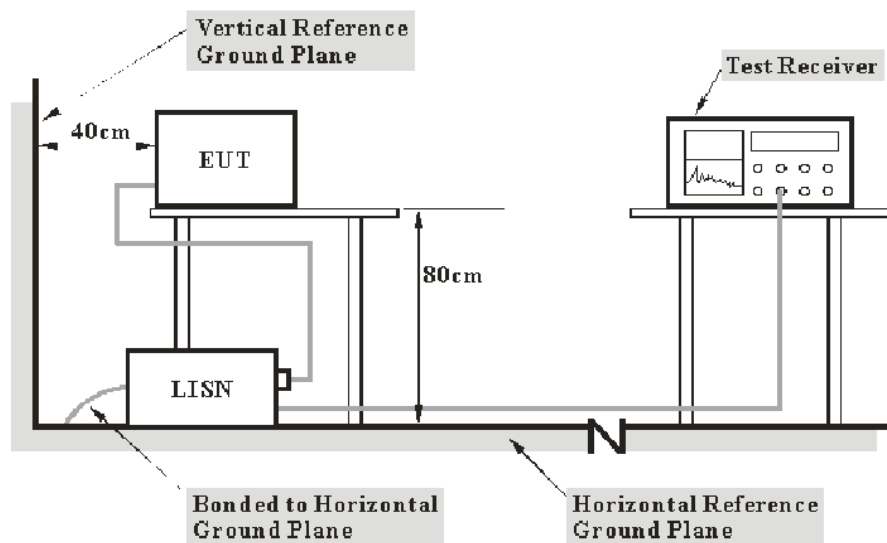

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Unwanted Emission Frequencies and Restricted Bands

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;


EUT Setup

9 kHz-30MHz:

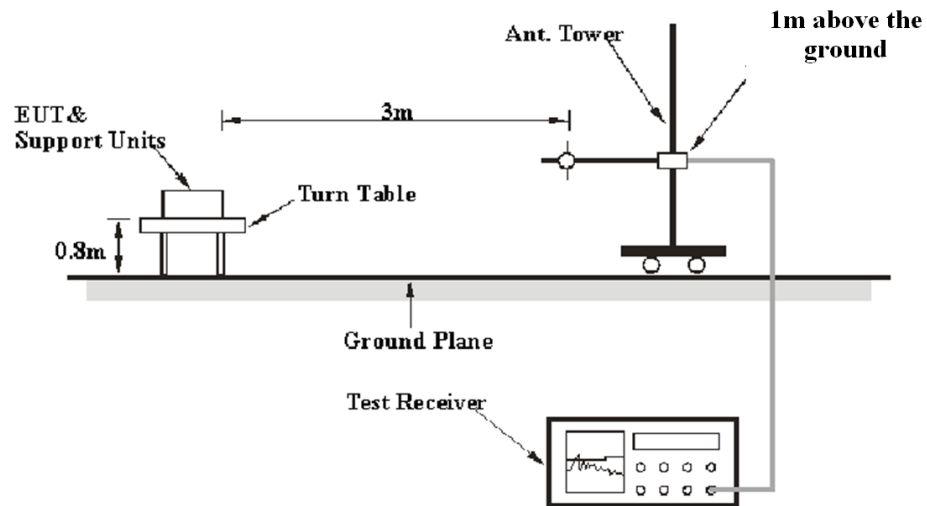

30MHz-1GHz:

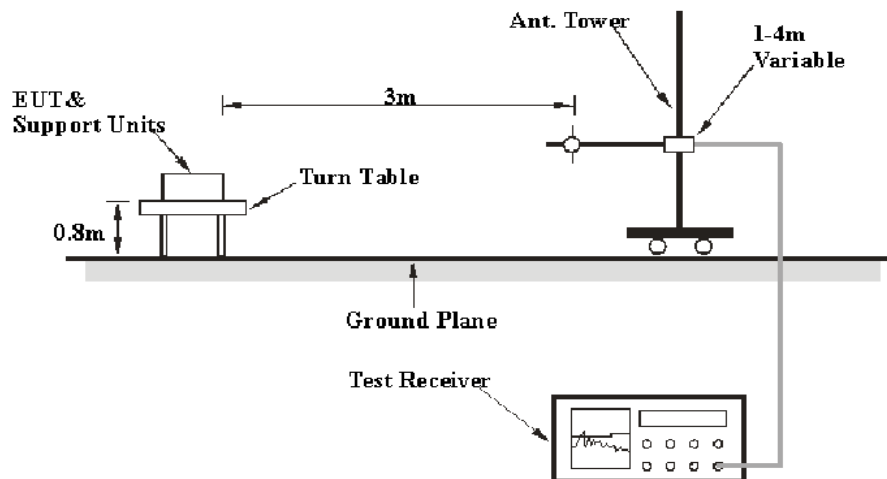

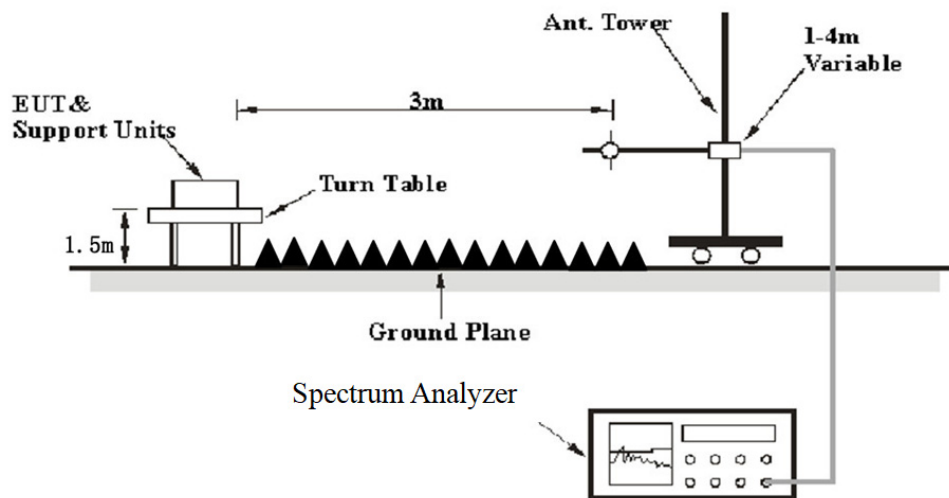Above 1GHz:

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.205, FCC 15.209, FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	1 kHz
	<98%	1MHz	≥1/Ton

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	≥10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

6 dB Emission Bandwidth

Standard Applicable

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

- a. Set RBW = 100 kHz.
- b. Set the VBW $\geq [3 \times \text{RBW}]$.
- c. Detector = peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Procedure as below

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

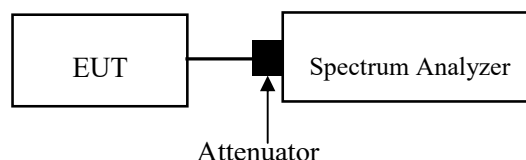

Peak Output Power Measurement


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.
4. Set the RBW \geq DTS bandwidth.
5. Set the VBW $\geq [3 \times \text{RBW}]$.
6. Set span $\geq [3 \times \text{RBW}]$.
7. Sweep time = auto couple.
8. Detector = peak.
9. Trace mode = max hold.
10. Allow the trace to stabilize.
11. Use peak marker function to determine the peak amplitude level.

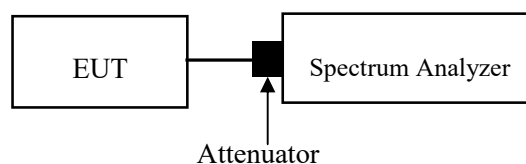

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable loss

100 kHz Bandwidth of Frequency Band Edge

Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Set the RBW =100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak
4. Sweep time = auto couple.
5. Trace mode=max hold
6. All trace to fully stabilize
7. Use the peak marker function to determine the maximum amplitude level.
Ensure that amplitude of all unwanted emissions outside of the authorized frequency band(excluding restricted frequency bands) is attenuated by at least the minimum requirement specified in 11.11.
Report the three highest emissions relative to the limit.

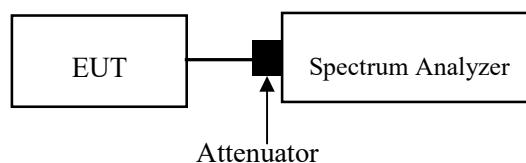

Power Spectral Density

Applicable Standard


According to FCC §15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set analyzer center frequency to DTS channel center frequency
3. Set the span to 1.5 times the DTS bandwidth.
4. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
5. Set the VBW $\geq 3 \times \text{RBW}$.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level within the RBW.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

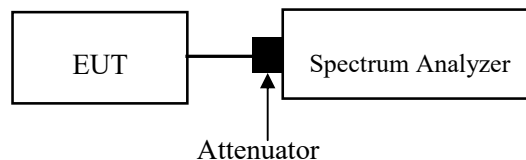

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable loss


Duty Cycle

Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

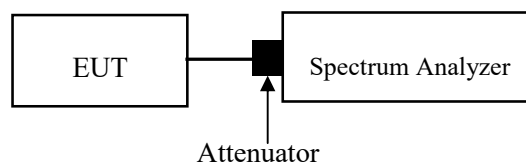

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached, the antenna gain[#] is 2.75dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant


TEST DATA AND RESULTS

AC Line Conducted Emissions

Environmental Conditions

Temperature (°C)	23	Relative Humidity (%)	35
ATM Pressure (kPa)	101.2	Test engineer	Macy shi
Test date	2025.1.4		
EUT operation mode	Transmitting(Maximum output power mode, BLE 1M Middle Channel)		

AC 120V 60 Hz, Line

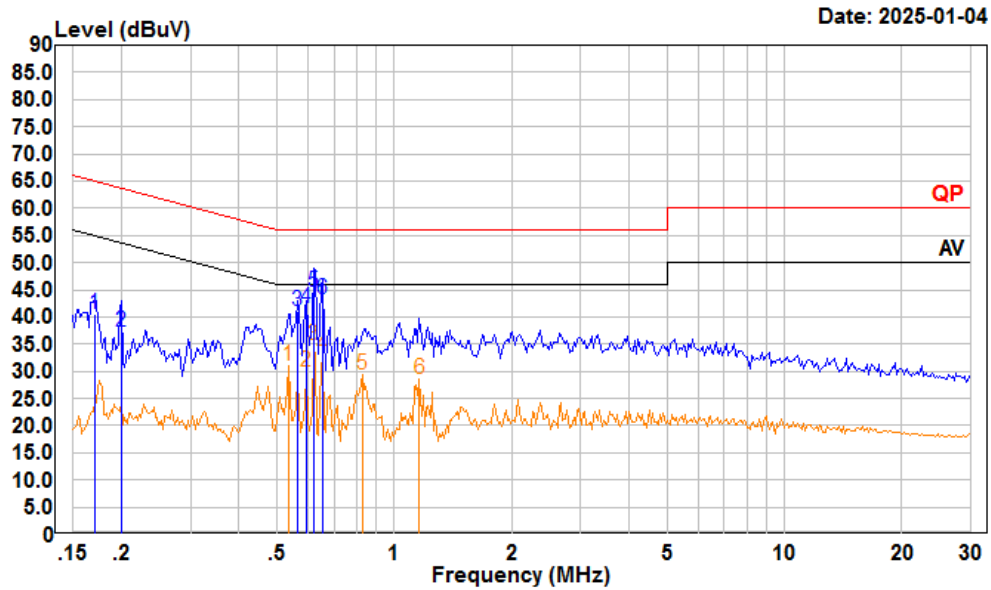

Trace: 1

Condition: Line


Project : 2401Z105021E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

	Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB
1	0.170	19.60	40.56	10.86	10.10	64.94	-24.38 QP
2	0.200	16.30	37.19	10.80	10.09	63.62	-26.43 QP
3	0.564	20.40	41.03	10.50	10.13	56.00	-14.97 QP
4	0.595	21.00	41.62	10.50	10.12	56.00	-14.38 QP
5	0.621	24.00	44.63	10.50	10.13	56.00	-11.37 QP
6	0.654	22.70	43.34	10.50	10.14	56.00	-12.66 QP
	Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB
1	0.535	10.43	31.06	10.50	10.13	46.00	-14.94 Average
2	0.595	9.40	30.02	10.50	10.12	46.00	-15.98 Average
3	0.621	14.28	34.91	10.50	10.13	46.00	-11.09 Average
4	0.654	12.30	32.94	10.50	10.14	46.00	-13.06 Average
5	0.826	8.92	29.48	10.45	10.11	46.00	-16.52 Average
6	1.160	8.02	28.59	10.44	10.13	46.00	-17.41 Average

AC 120V 60 Hz, Neutral

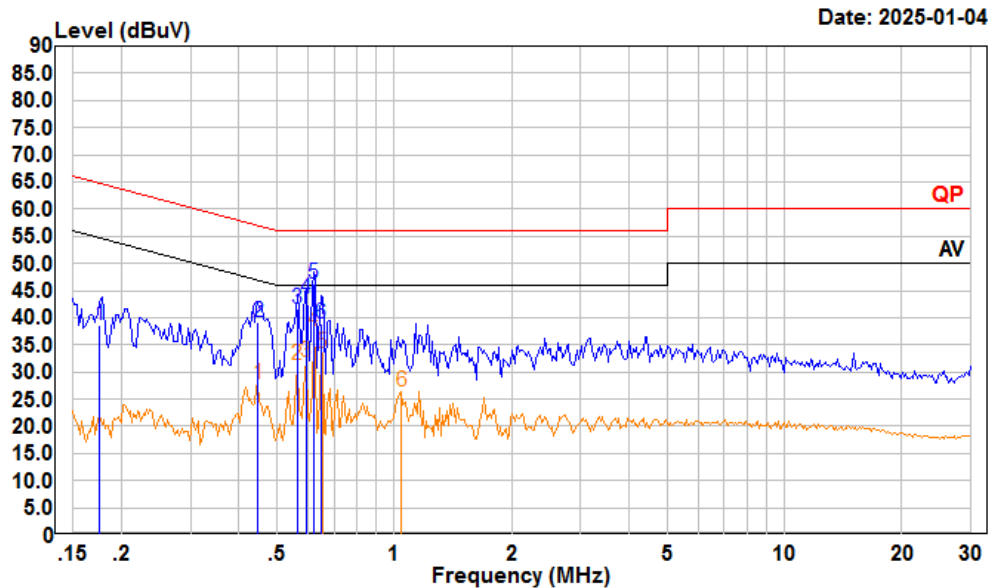


		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.176	18.10	38.69	10.49	10.10	64.68	-25.99	QP
2	0.447	18.40	39.18	10.66	10.12	56.93	-17.75	QP
3	0.564	20.70	41.53	10.70	10.13	56.00	-14.47	QP
4	0.595	22.80	43.62	10.70	10.12	56.00	-12.38	QP
5	0.621	25.40	46.23	10.70	10.13	56.00	-9.77	QP
6	0.647	18.10	38.93	10.70	10.13	56.00	-17.07	QP
	Freq	Read		LISN	Cable	Limit	Over	
		Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.447	6.97	27.75	10.66	10.12	46.93	-19.18	Average
2	0.564	10.45	31.28	10.70	10.13	46.00	-14.72	Average
3	0.595	11.14	31.96	10.70	10.12	46.00	-14.04	Average
4	0.621	16.78	37.61	10.70	10.13	46.00	-8.39	Average
5	0.654	12.67	33.51	10.70	10.14	46.00	-12.49	Average
6	1.043	5.43	26.42	10.87	10.12	46.00	-19.58	Average

Unwanted Emission Frequencies and Restricted Bands**Environmental Conditions**

Temperature (°C)	24.4-25.3	Relative Humidity (%)	38-46
ATM Pressure (kPa):	101.3-101.5	Test engineer:	Jack Liu&Zenos Qiao
Test date:	2025.1.3-2025.1.8		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, BLE 1M Middle Channel) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 30MHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. After pre-scan in the X, Y and Z axes of orientation, the worst case y-axis of orientation were recorded.		

Below 1GHz:


9kHz-150kHz

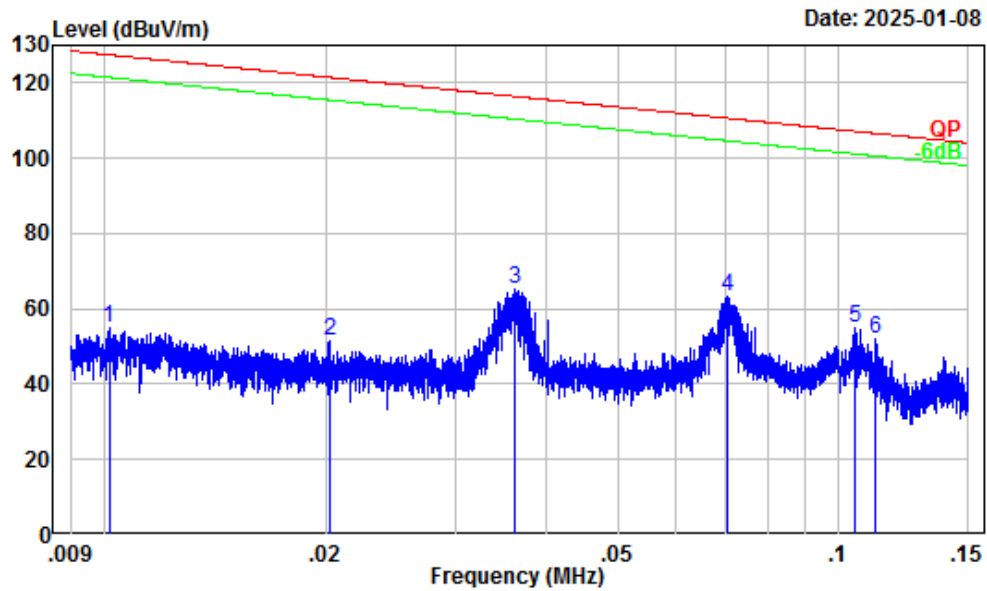

Site : Chamber A
Condition : 3m
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting PK RBW: 0.3KHz VBW:1KHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.27	22.54	54.81	127.47	-72.66	Peak
2	0.02	30.36	21.28	51.64	121.48	-69.84	Peak
3	0.04	27.84	37.20	65.04	116.42	-51.38	Peak
4	0.07	24.37	39.01	63.38	110.66	-47.28	Peak
5	0.11	21.69	33.33	55.02	107.16	-52.14	Peak
6	0.11	21.29	30.78	52.07	106.61	-54.54	Peak


150kHz-30MHz

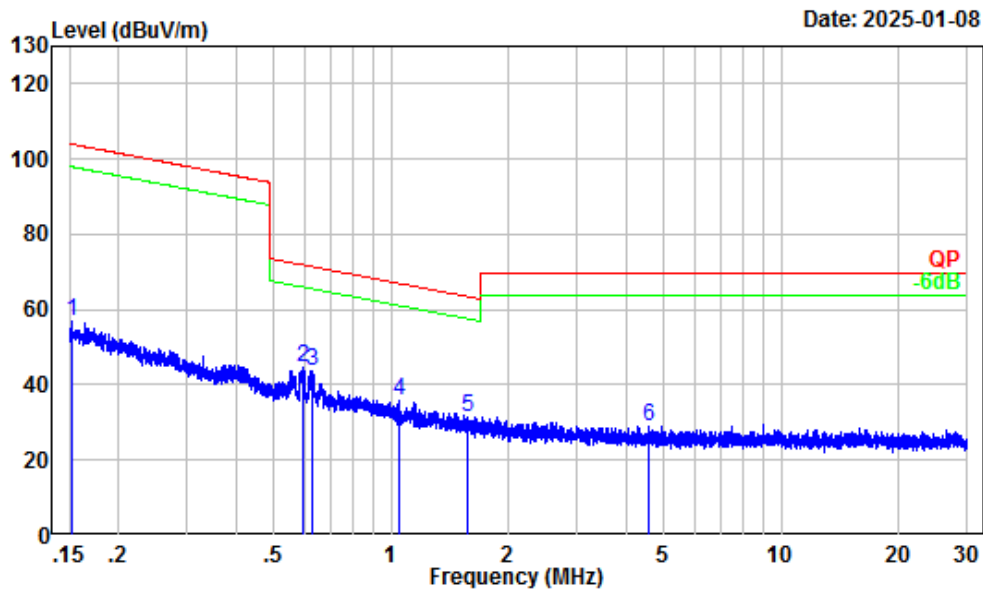

Site : Chamber A
Condition : 3m
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting PK RBW: 10KHz VBW:30KHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.15	18.90	38.05	56.95	103.94	-46.99	Peak
2	0.59	5.26	39.33	44.59	72.11	-27.52	Peak
3	0.63	4.83	39.00	43.83	71.61	-27.78	Peak
4	1.05	1.05	34.61	35.66	67.02	-31.36	Peak
5	1.57	-0.41	31.86	31.45	63.45	-32.00	Peak
6	4.56	-2.76	31.89	29.13	69.54	-40.41	Peak


30MHz-1GHz_Horizontal

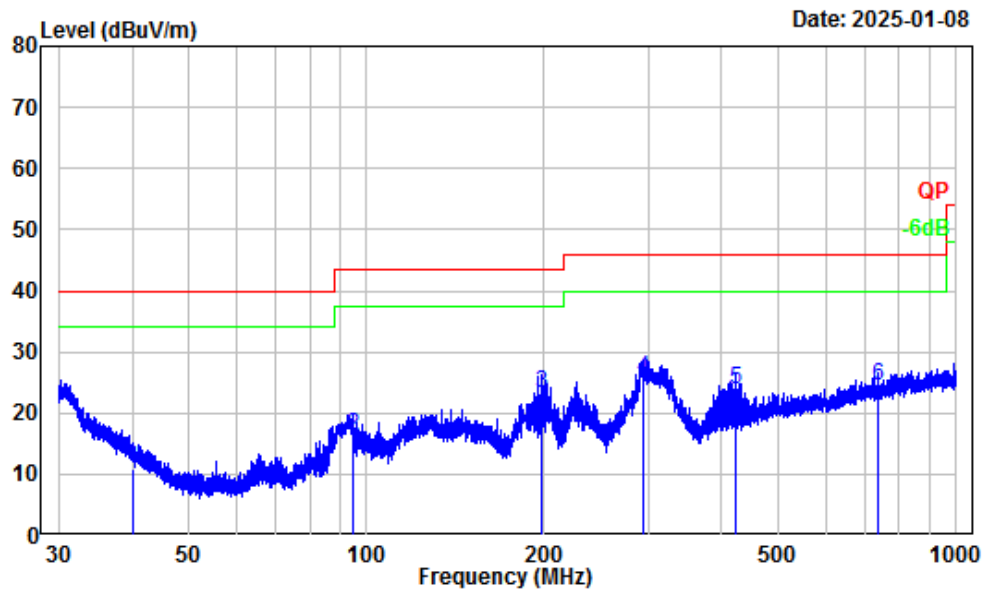

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting QP RBW: 120KHz
Tester : Jack Liu

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	40.24	-12.54	23.51	10.97	40.00	-29.03	QP
2	94.84	-17.36	33.61	16.25	43.50	-27.25	QP
3	197.63	-13.34	36.59	23.25	43.50	-20.25	QP
4	293.73	-11.21	36.89	25.68	46.00	-20.32	QP
5	422.61	-7.92	31.63	23.71	46.00	-22.29	QP
6	739.01	-3.01	27.44	24.43	46.00	-21.57	QP

30MHz-1GHz_Vertical

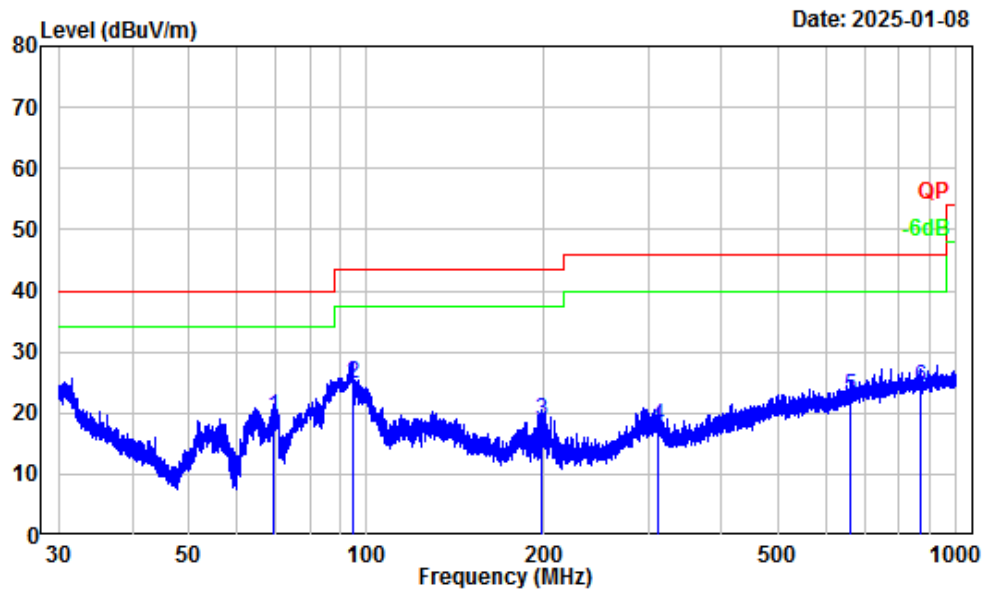

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401Z105021E-RF
Test Mode : Transmitting
Setting QP RBW: 120KHz
Tester : Jack Liu

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	69.33	-17.87	37.29	19.42	40.00	-20.58	QP
2	94.47	-17.44	42.16	24.72	43.50	-18.78	QP
3	197.63	-13.34	31.98	18.64	43.50	-24.86	QP
4	312.18	-11.00	28.73	17.73	46.00	-28.27	QP
5	662.31	-3.93	26.55	22.62	46.00	-23.38	QP
6	870.27	-1.60	25.79	24.19	46.00	-21.81	QP

Above 1GHz:

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
BLE 1M							
Low Channel							
4804.00	51.96	PK	H	-7.79	44.17	74	-29.83
4804.00	37.59	AV	H	-7.79	29.80	54	-24.20
4804.00	51.47	PK	V	-7.79	43.68	74	-30.32
4804.00	37.38	AV	V	-7.79	29.59	54	-24.41
Middle Channel							
4880.00	52.75	PK	H	-7.59	45.16	74	-28.84
4880.00	37.98	AV	H	-7.59	30.39	54	-23.61
4880.00	52.36	PK	V	-7.59	44.77	74	-29.23
4880.00	37.83	AV	V	-7.59	30.24	54	-23.76
High Channel							
4960.00	52.30	PK	H	-7.56	44.74	74	-29.26
4960.00	37.79	AV	H	-7.56	30.23	54	-23.77
4960.00	51.91	PK	V	-7.56	44.35	74	-29.65
4960.00	37.64	AV	V	-7.56	30.08	54	-23.92
BLE 2M							
Low Channel							
4808.00	52.18	PK	H	-7.79	44.39	74	-29.61
4808.00	37.92	AV	H	-7.79	30.13	54	-23.87
4808.00	51.80	PK	V	-7.79	44.01	74	-29.99
4808.00	37.77	AV	V	-7.79	29.98	54	-24.02
Middle Channel							
4880.00	52.72	PK	H	-7.59	45.13	74	-28.87
4880.00	38.30	AV	H	-7.59	30.71	54	-23.29
4880.00	52.41	PK	V	-7.59	44.82	74	-29.18
4880.00	38.15	AV	V	-7.59	30.56	54	-23.44
High Channel							
4956.00	52.37	PK	H	-7.63	44.74	74	-29.26
4956.00	38.09	AV	H	-7.63	30.46	54	-23.54
4956.00	52.04	PK	V	-7.63	44.41	74	-29.59
4956.00	37.93	AV	V	-7.63	30.30	54	-23.70

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots


Left Band edge_Horizontal_BLE 1M_2402MHz

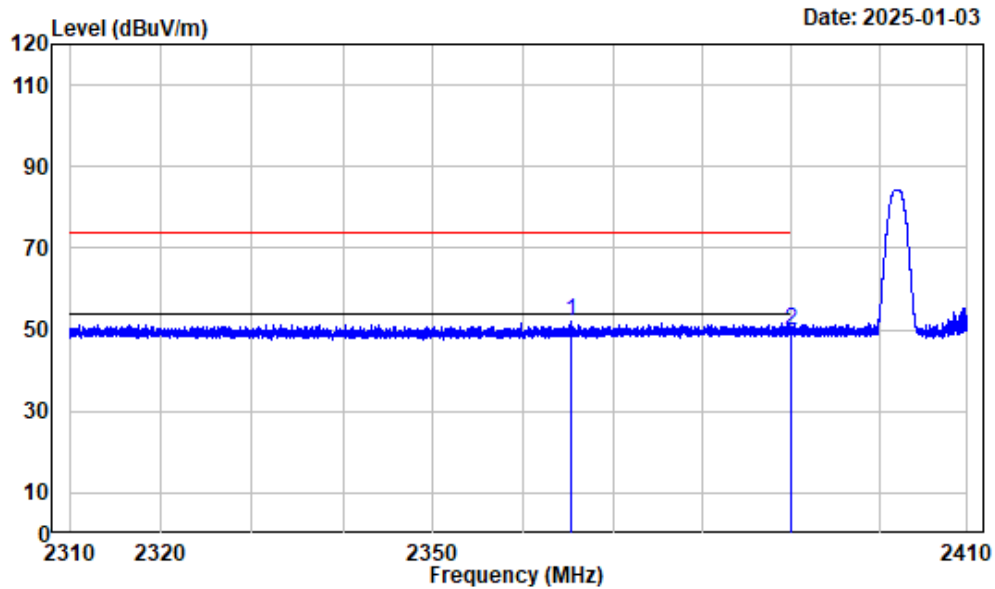

Condition : Horizontal
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE1M-2402

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2365.357	-10.92	62.78	51.86	74.00	-22.14	Peak
2	2390.000	-10.98	60.85	49.87	74.00	-24.13	Peak


Left Band edge_Vertical_BLE 1M_2402MHz

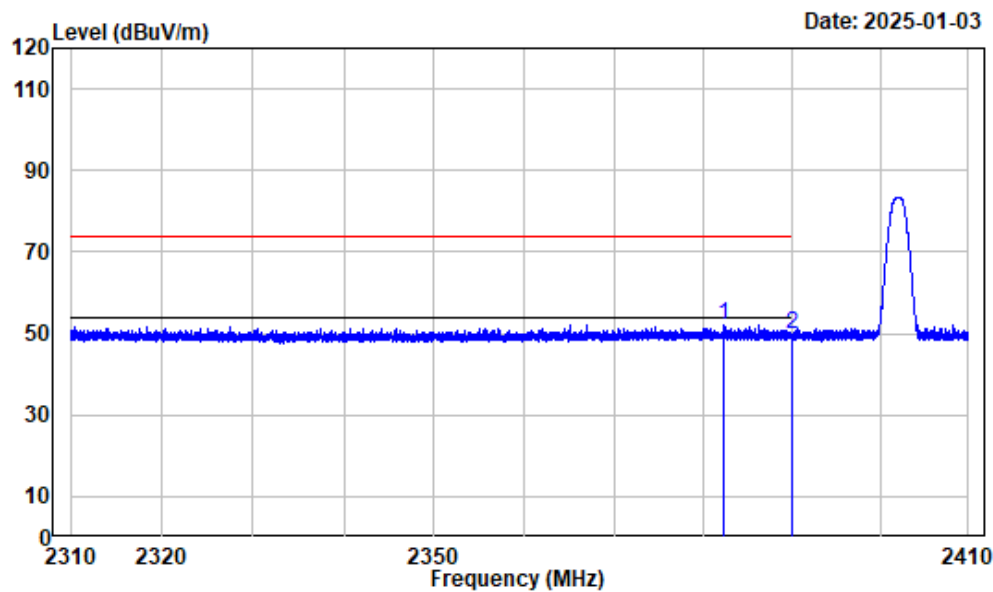

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2402

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2382.346	-10.97	63.21	52.24	74.00	-21.76 Peak
2	2390.000	-10.98	60.70	49.72	74.00	-24.28 Peak


Right Band edge_Horizontal_BLE 1M_2480MHz

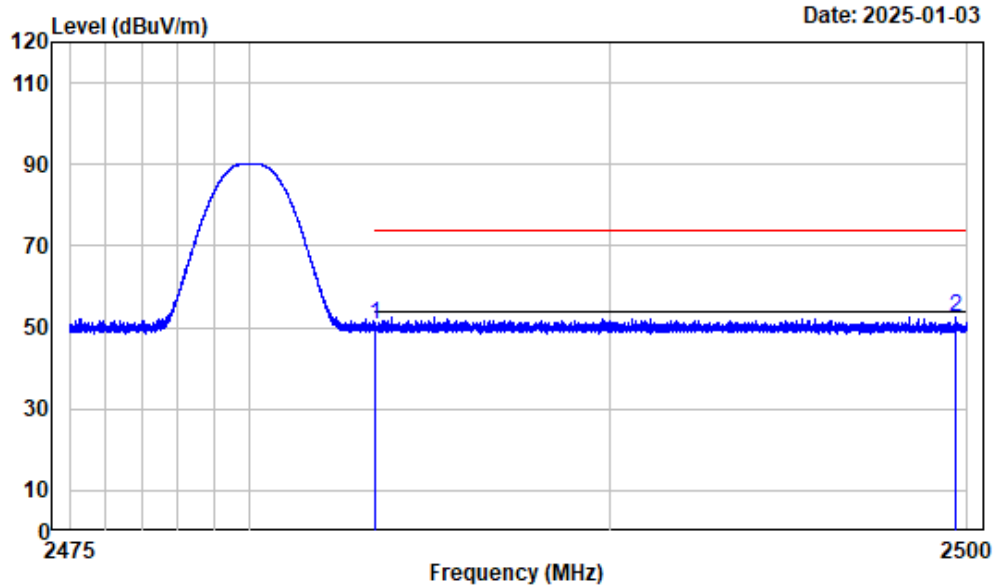

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2480

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 2483.500	-10.97	61.80	50.83	74.00	-23.17	Peak
2 2499.691	-11.00	63.62	52.62	74.00	-21.38	Peak


Right Band edge_Vertical_BLE 1M_2480MHz

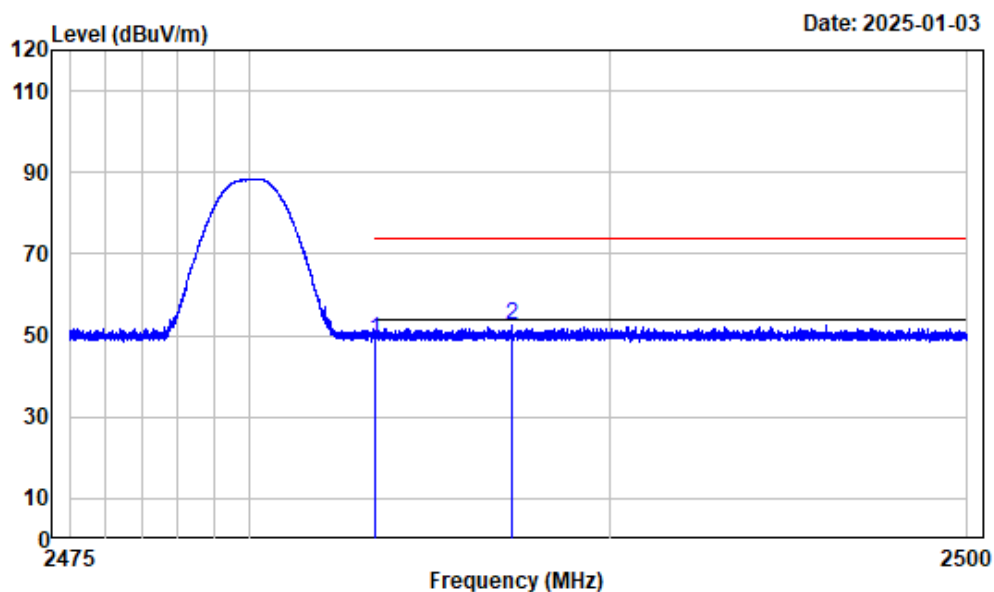

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2480

Freq		Factor	Read Level	Level	Limit	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	59.79	48.82	74.00	-25.18	Peak
2	2487.308	-10.97	63.57	52.60	74.00	-21.40	Peak


Left Band edge_Horizontal_BLE 2M_2404MHz

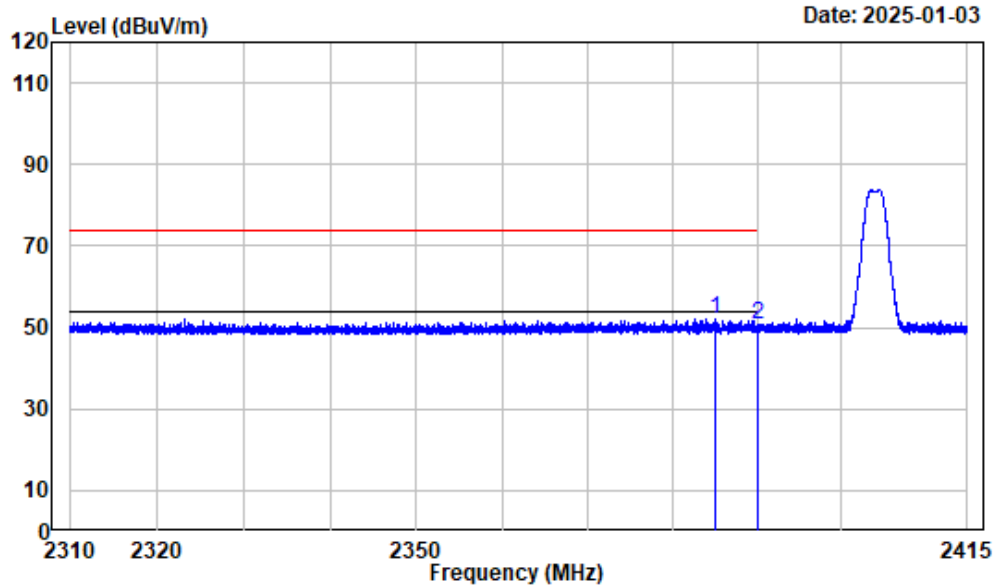

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2404

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2384.992	-10.97	63.07	52.10	74.00	-21.90 Peak
2	2390.000	-10.98	61.58	50.60	74.00	-23.40 Peak


Left Band edge_Vertical_BLE 2M_2404MHz

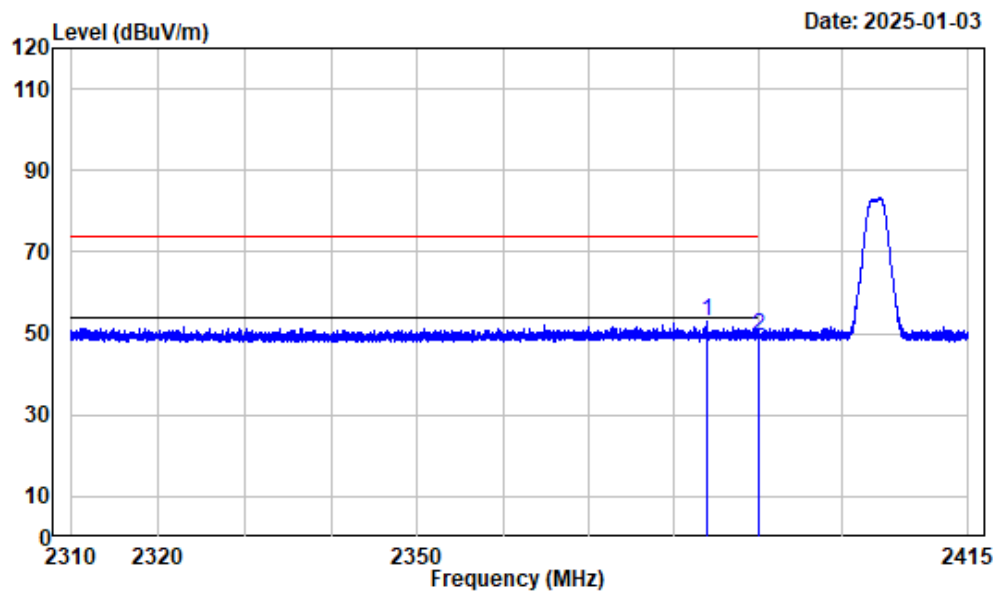

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2404

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2383.890	-10.97	63.75	52.78	74.00	-21.22	Peak
2	2390.000	-10.98	60.15	49.17	74.00	-24.83	Peak


Right Band edge_Horizontal_BLE 2M_2478MHz

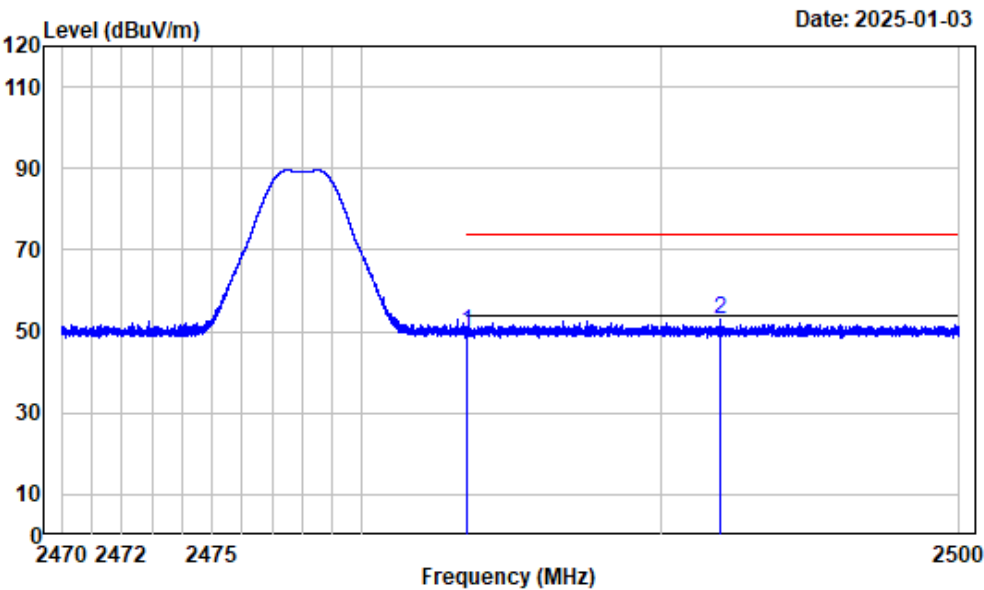

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2478

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	60.72	49.75	74.00	-24.25	Peak
2	2491.997	-10.98	63.87	52.89	74.00	-21.11	Peak

Right Band edge_Vertical_BLE 2M_2478MHz

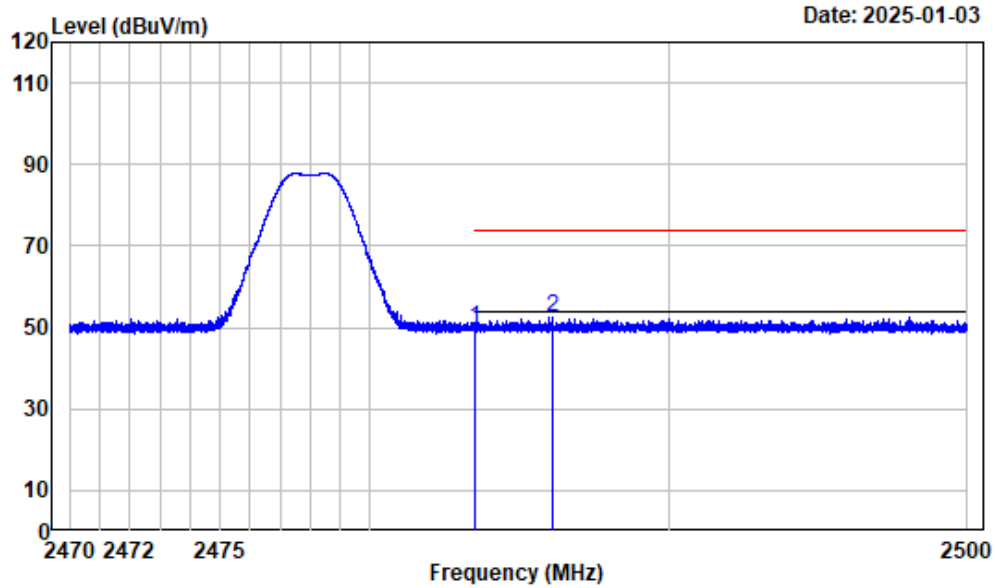


Condition : Vertical
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE2M-2478

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2483.500	-10.97	60.69	49.72	74.00	-24.28	Peak
2	2486.101	-10.97	63.60	52.63	74.00	-21.37	Peak

Listed with the worst harmonic margin test plot


1-4GHz_Horizontal_BLE 1M

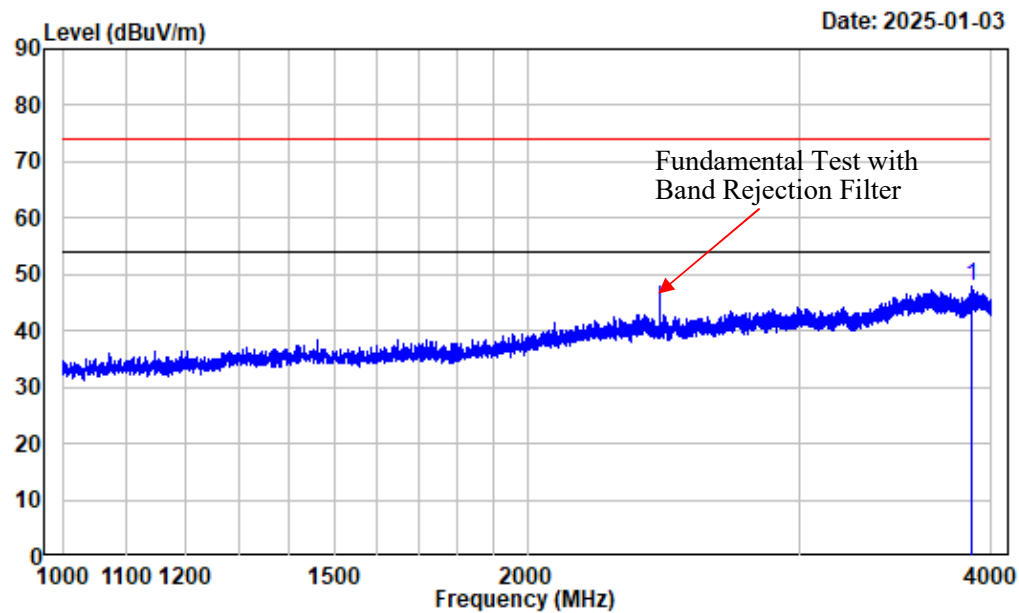

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2440

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 3882.985	-9.88	57.62	47.74	74.00	-26.26	Peak


1-4GHz_Vertical_BLE 1M

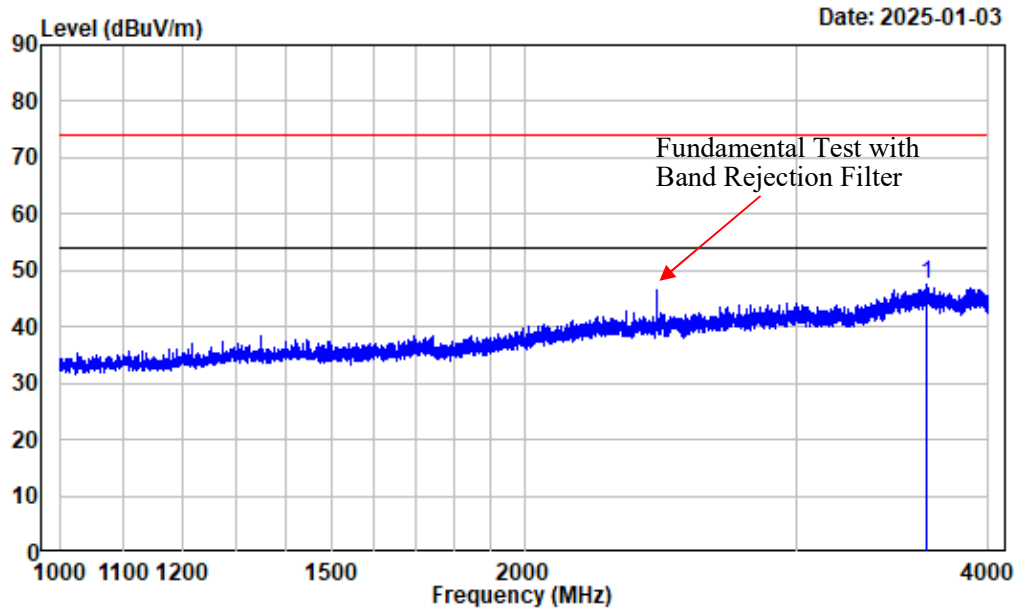

Condition : Vertical
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE1M-2440

Freq Factor		Read Level	Level	Limit	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3651.206	-9.77	57.39	47.62	74.00	-26.38 Peak


4-18GHz_Horizontal_Peak_BLE 1M

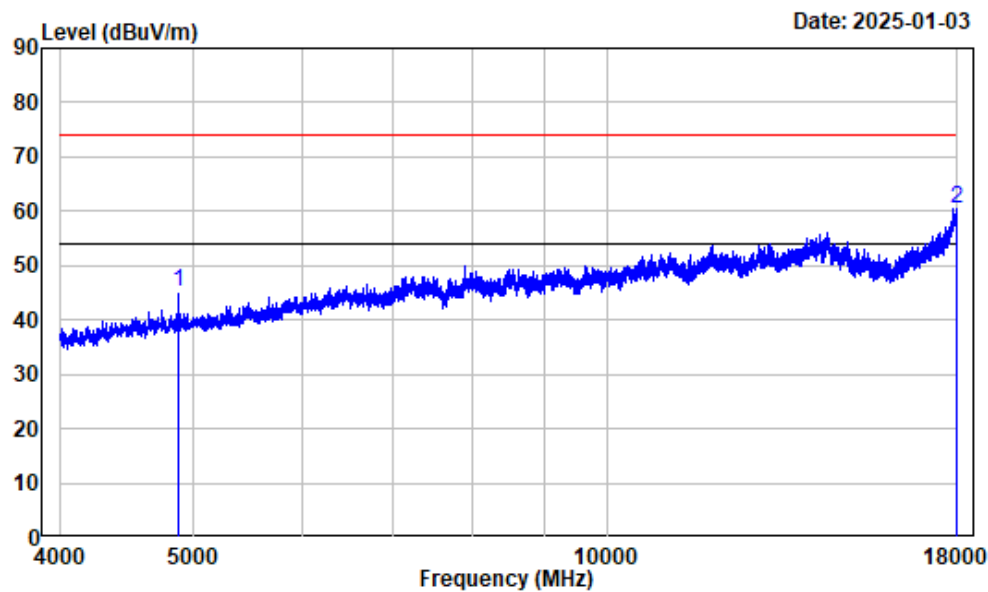

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2440

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4880.000	-7.59	52.75	45.16	74.00	-28.84	Peak
2	17994.750	13.17	47.43	60.60	74.00	-13.40	Peak


4-18GHz_Horizontal_Average_BLE 1M

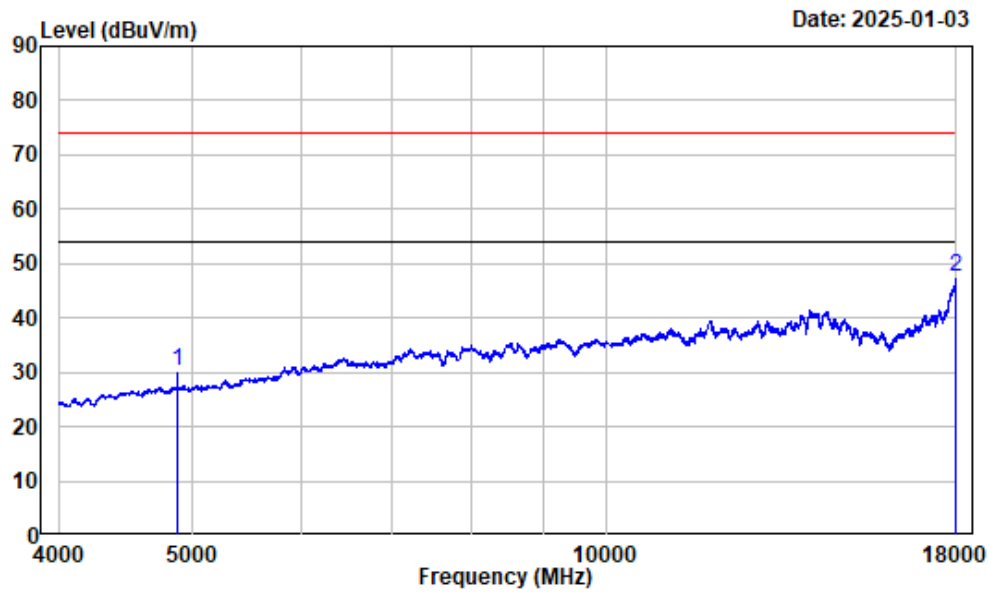

Condition : Horizontal
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : BLE1M-2440

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4880.000	-7.59	37.98	30.39	54.00	-23.61	Average
2	17986.000	13.13	34.37	47.50	54.00	-6.50	Average


4-18GHz_Veritical_Peak_BLE 1M

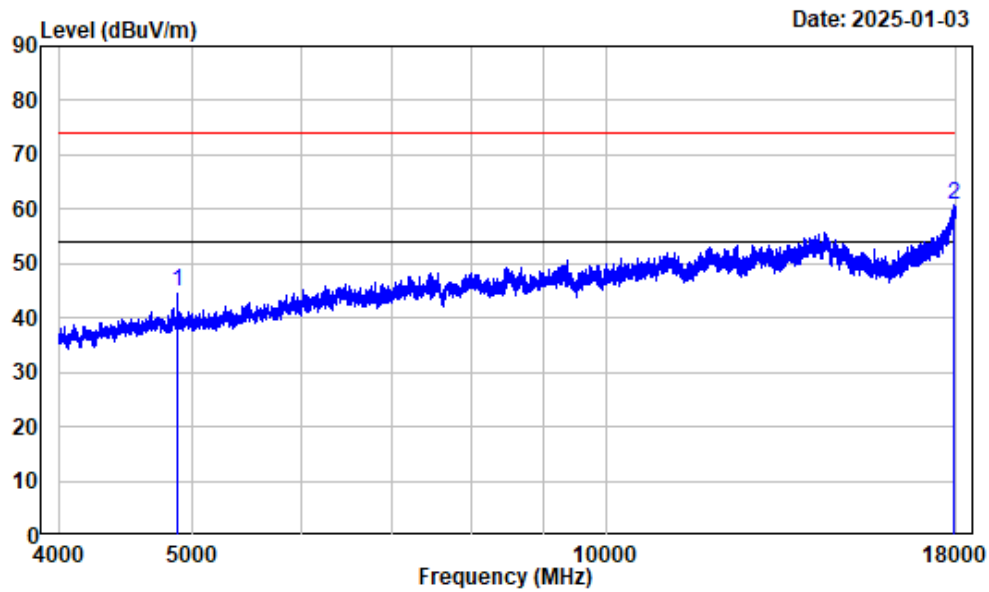

Condition : Vertical
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE1M-2440

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4880.000	-7.59	52.36	44.77	74.00	-29.23	Peak
2	17940.490	12.90	47.93	60.83	74.00	-13.17	Peak


4-18GHz_Vertical_Average_BLE 1M

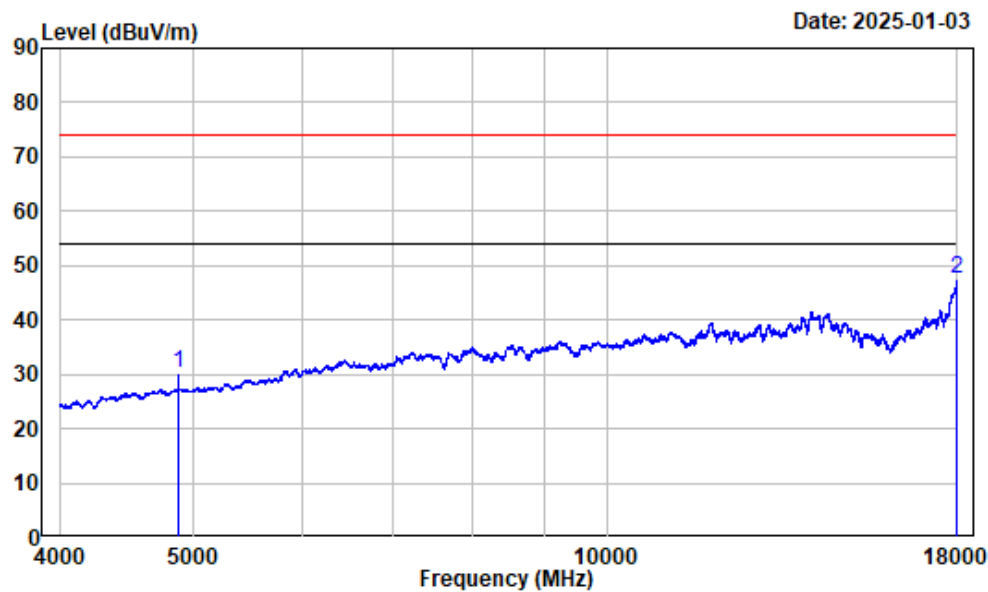

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE1M-2440

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4880.000	-7.59	37.83	30.24	54.00	-23.76	Average
2 17996.500	13.19	34.20	47.39	54.00	-6.61	Average


18-25GHz_Horizontal_BLE 1M

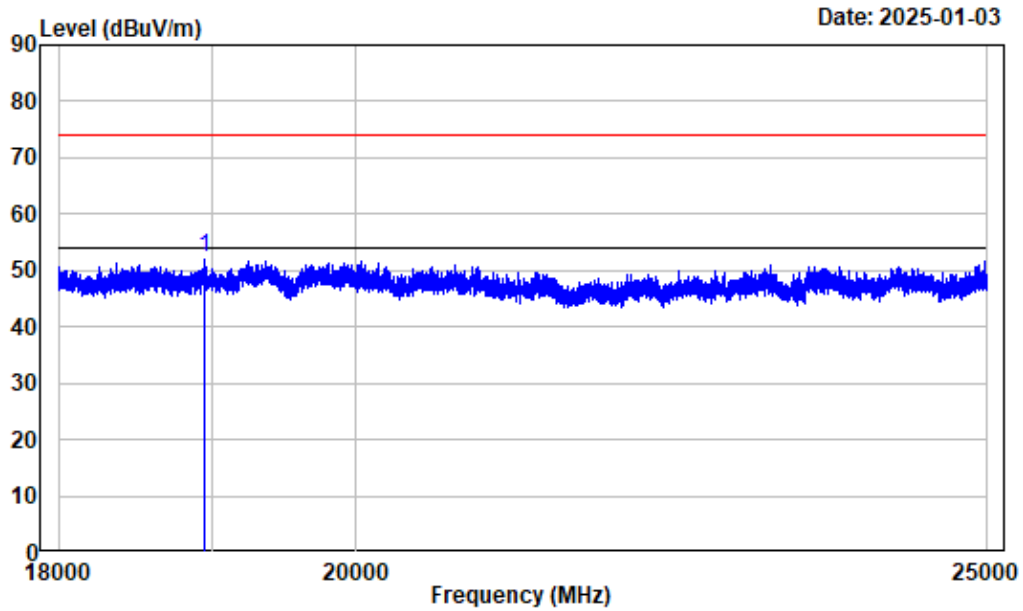

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE1M-2440

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	18957.370	15.14	37.19	52.33	74.00	-21.67	Peak


18-25GHz_Vertical_BLE 1M

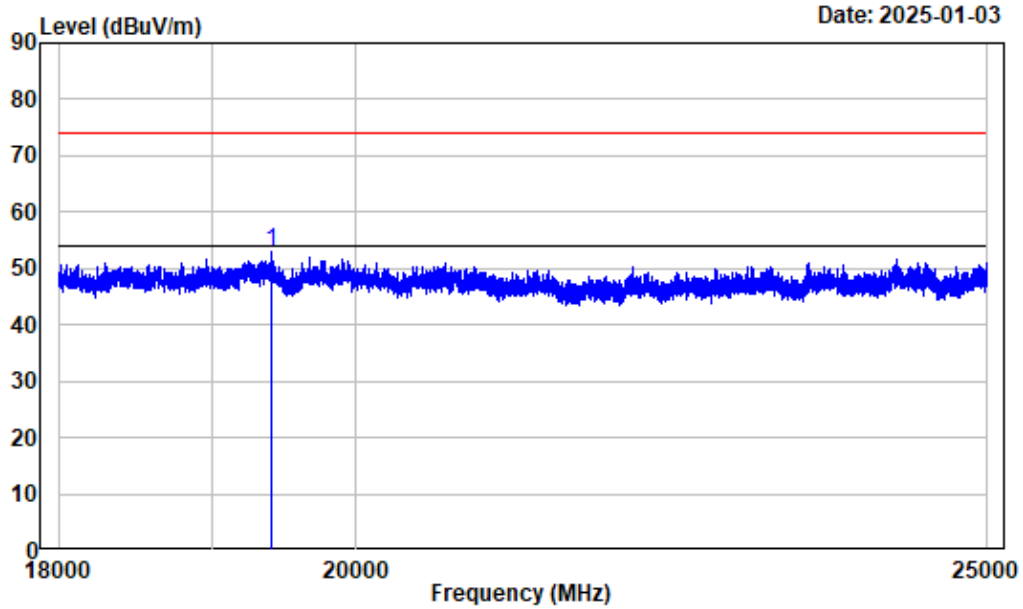

Condition : Vertical
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE1M-2440

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19408.050	15.09	37.76	52.85	74.00	-21.15	Peak


1-4GHz_Horizontal_BLE 2M

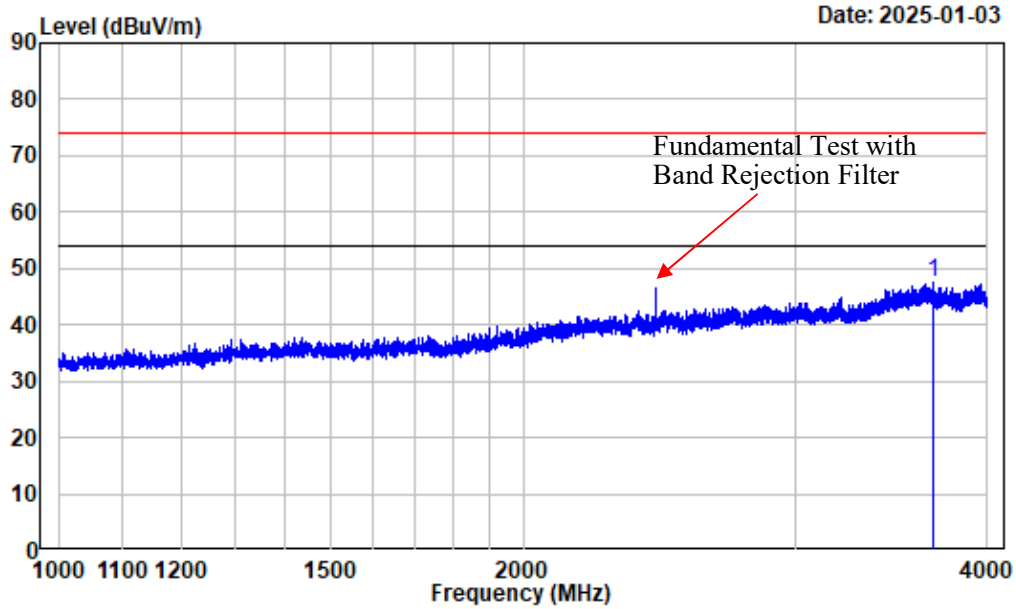

Condition : Horizontal
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE2M-2440

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3686.836	-9.56	57.03	47.47	74.00	-26.53	Peak


1-4GHz_Vertical_BLE 2M

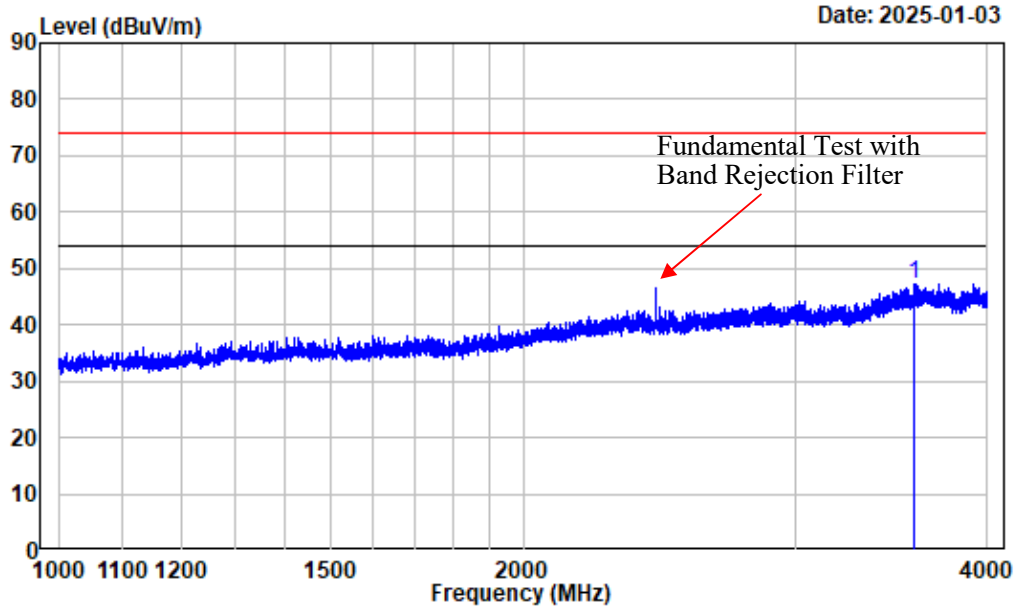

Condition : Vertical
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE2M-2440

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	3590.824	-10.08	57.42	47.34	74.00	-26.66	Peak


4-18GHz_Horizonta_Peak_BLE 2M

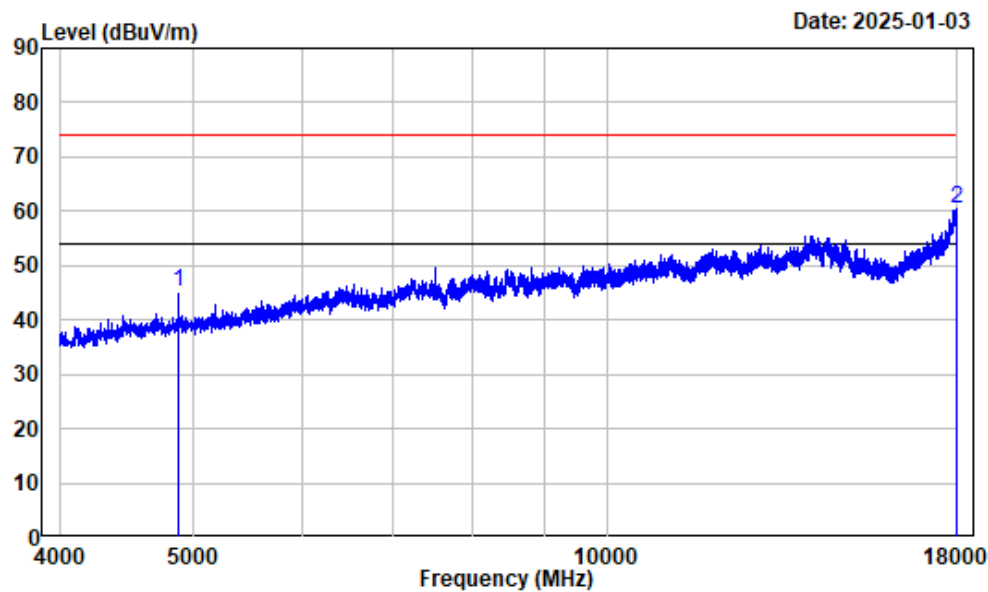

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4880.000	-7.59	52.72	45.13	74.00	-28.87	Peak
2	17973.750	13.08	47.41	60.49	74.00	-13.51	Peak


4-18GHz_Horizontal_Average_BLE 2M

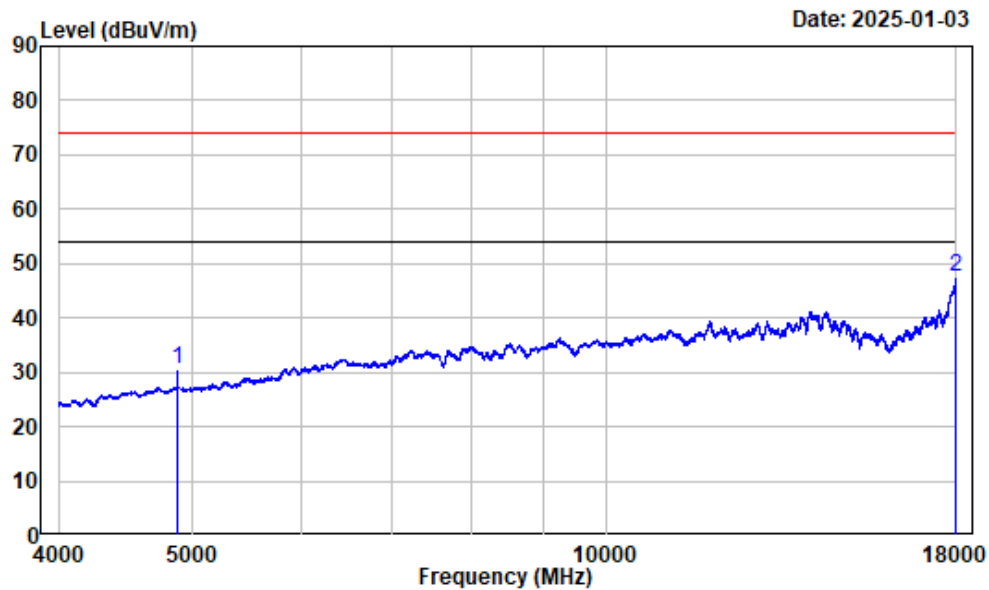

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2440

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4880.000	-7.59	38.30	30.71	54.00	-23.29	Average
2 17993.000	13.17	34.33	47.50	54.00	-6.50	Average


4-18GHz_Vertical_Peak_BLE 2M

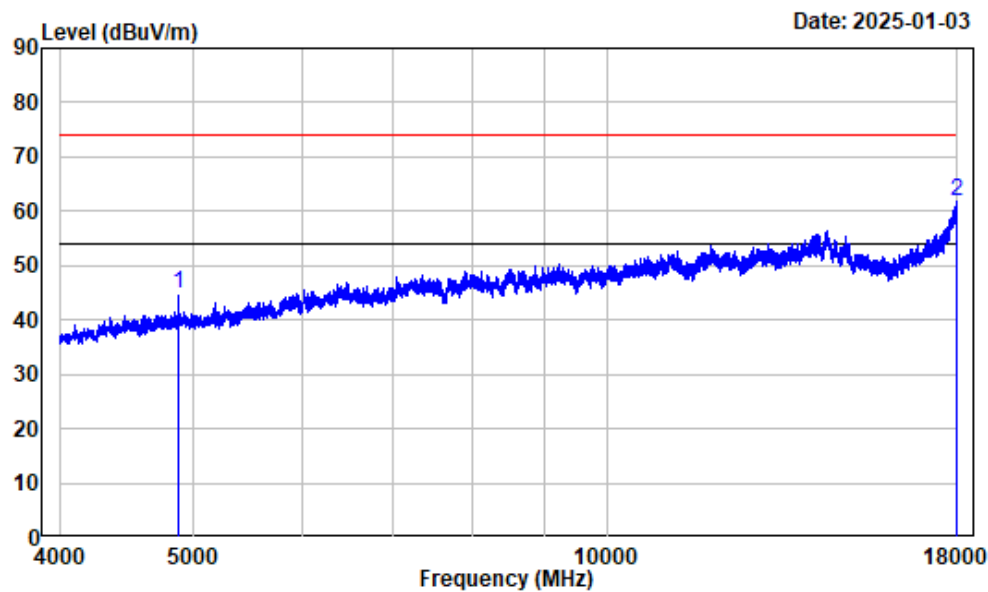

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4880.000	-7.59	52.41	44.82	74.00	-29.18	Peak
2	17980.750	13.11	48.84	61.95	74.00	-12.05	Peak


4-18GHz_Vertical_Average_BLE 2M

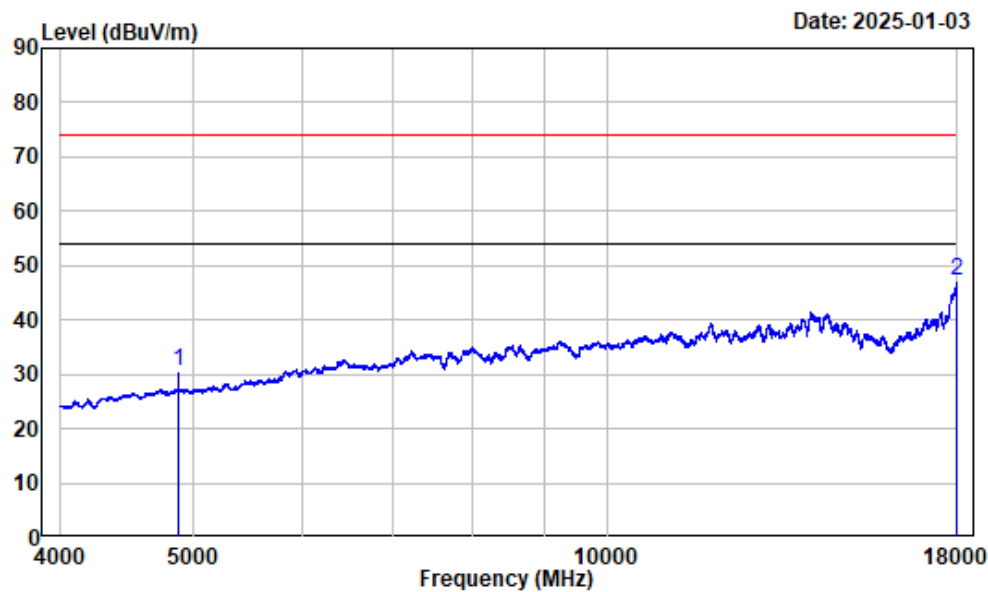

Condition : Vertical
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : BLE2M-2440

Freq		Factor	Read Level	Level	Limit Line	Over Limit	Remark
MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4880.000	-7.59	38.15	30.56	54.00	-23.44	Average
2	17994.750	13.17	34.18	47.35	54.00	-6.65	Average


18-25GHz_Horizontal_BLE 2M

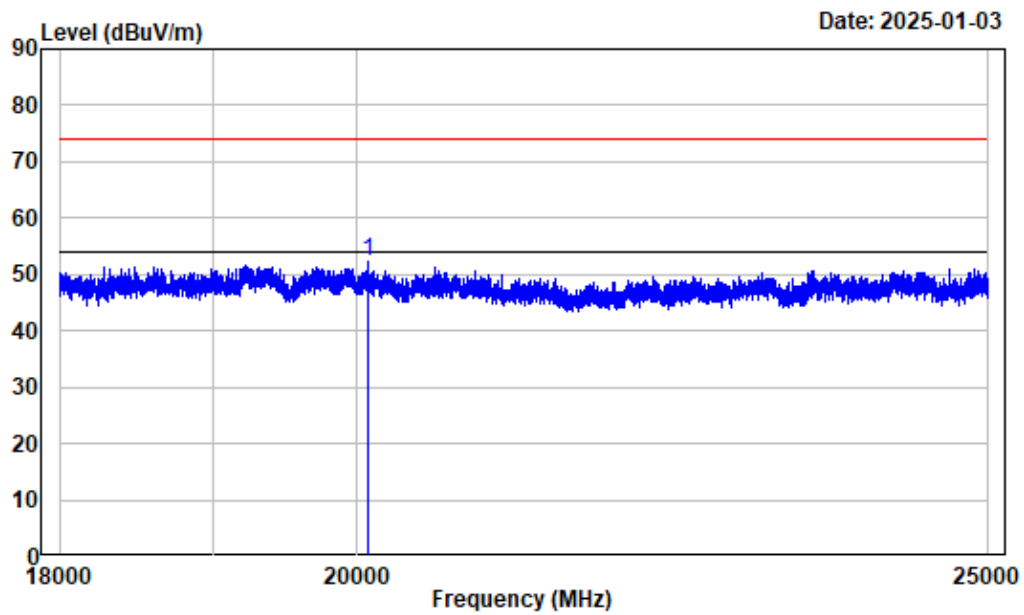

Condition : Horizontal
Project No. : 2401Z105021E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : BLE2M-2440

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	20073.130	15.45	36.94	52.39	74.00	-21.61	Peak

18-25GHz_Vertical_BLE 2M

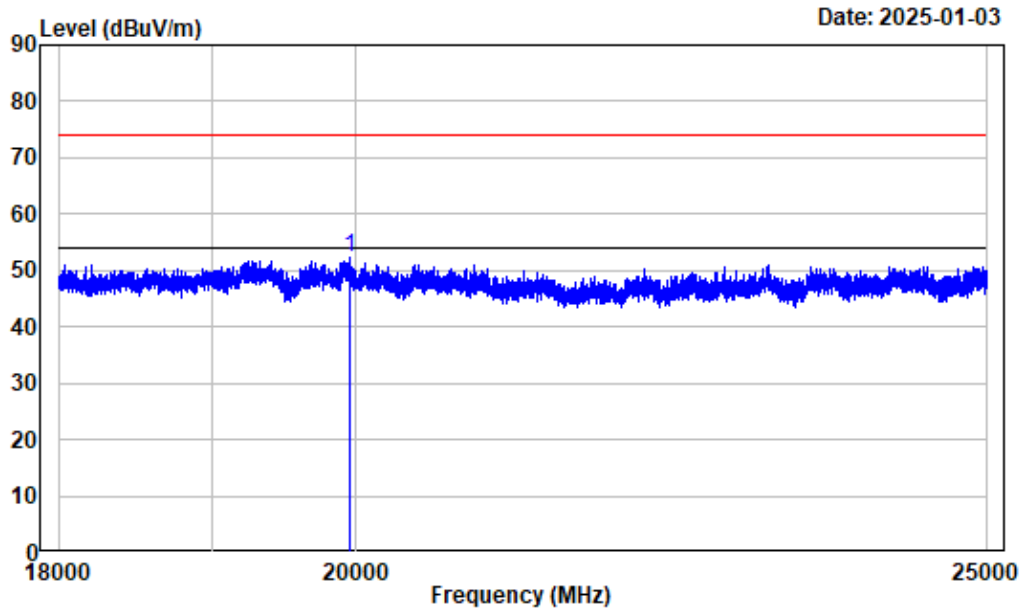

Condition : Vertical
 Project No. : 2401Z105021E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : BLE2M-2440

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	19958.490	15.44	36.83	52.27	74.00	-21.73	Peak

6dB Emission Bandwidth

Test Information:

Sample No.:	2UKG-1	Test Date:	2024/12/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.5-26.8	Relative Humidity: (%)	50-53	ATM Pressure: (kPa)	101
-----------------------	-----------	------------------------------	-------	------------------------	-----

Test Data:**BLE 1M**


Channel	Result (MHz)	Limit (MHz)	Verdict
Low Channel	0.677	≥ 0.5	Pass
Middle Channel	0.677	≥ 0.5	Pass
High Channel	0.677	≥ 0.5	Pass

BLE 2M

Channel	Result (MHz)	Limit (MHz)	Verdict
Low Channel	1.165	≥ 0.5	Pass
Middle Channel	1.189	≥ 0.5	Pass
High Channel	1.183	≥ 0.5	Pass


BLE 1M

BLE_1M_Low_Channel

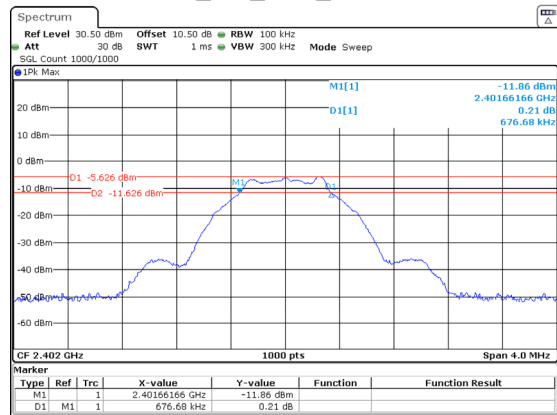

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:52:32


BLE_1M_Middle_Channel

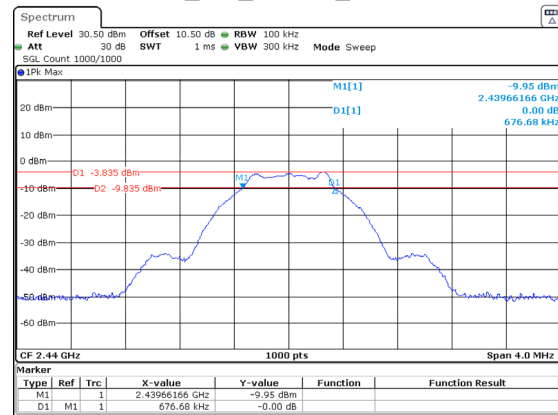

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:52:59


BLE 2M

BLE_1M_High_Channel

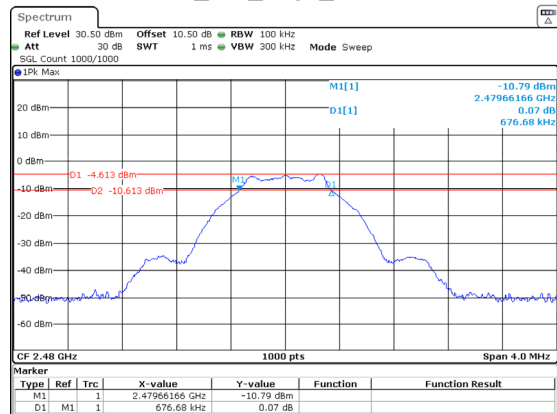


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:53:29

BLE_2M_Low_Channel

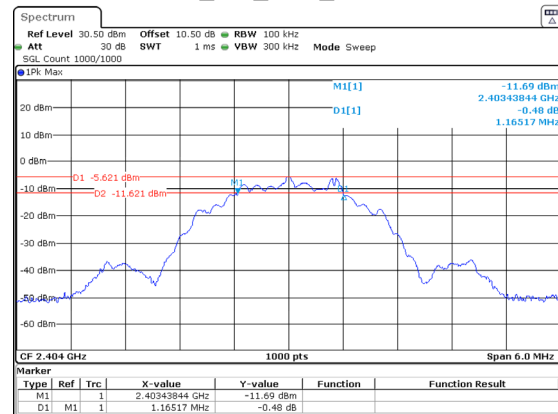


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:54:01

BLE_2M_Middle_Channel

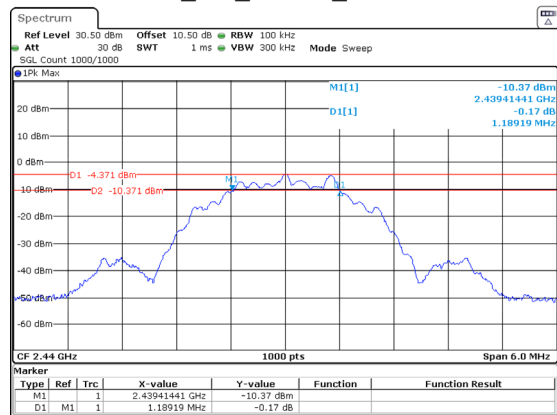

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:54:29

BLE_2M_High_Channel

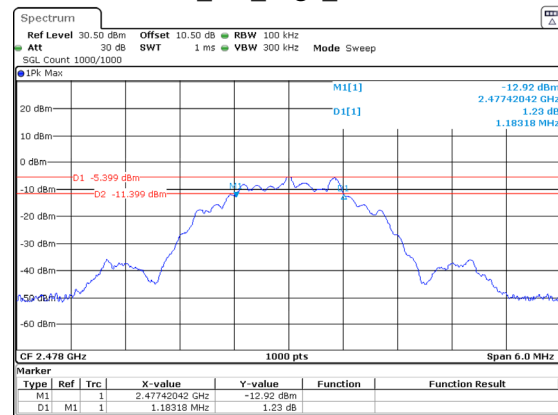

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:55:03

Maximum Conducted Output Power

Test Information:

Sample No.:	2UKG-1	Test Date:	2024/12/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.5-26.8	Relative Humidity: (%)	50-53	ATM Pressure: (kPa)	101
-----------------------	-----------	------------------------------	-------	------------------------	-----

Test Data:**BLE 1M**


Channel	Result (dBm)	Limit (dBm)	Verdict
Low Channel	-5.30	30.00	Pass
Middle Channel	-3.53	30.00	Pass
High Channel	-4.27	30.00	Pass

BLE 2M

Channel	Result (dBm)	Limit (dBm)	Verdict
Low Channel	-4.61	30.00	Pass
Middle Channel	-3.54	30.00	Pass
High Channel	-4.42	30.00	Pass


BLE 1M

BLE_1M_Low_Channel

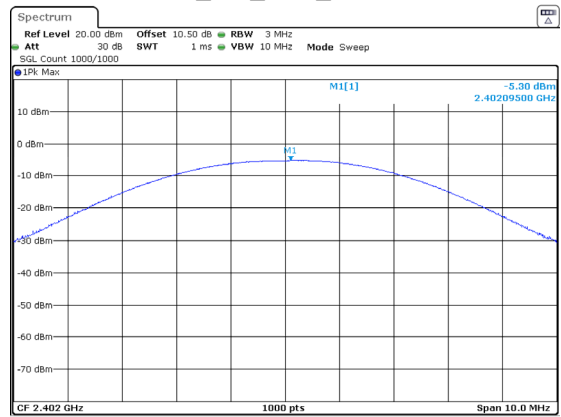

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:59:19


BLE_1M_Middle_Channel

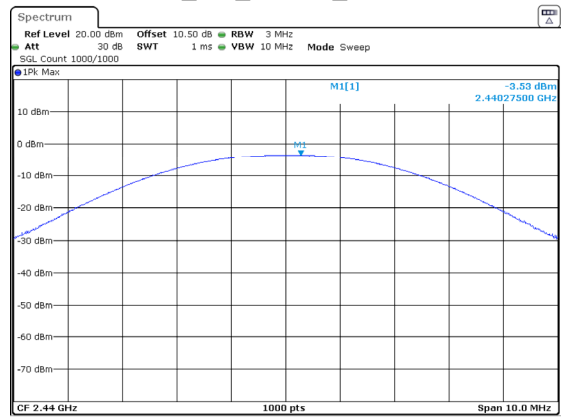

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 17:59:42


BLE 2M

BLE_1M_High_Channel

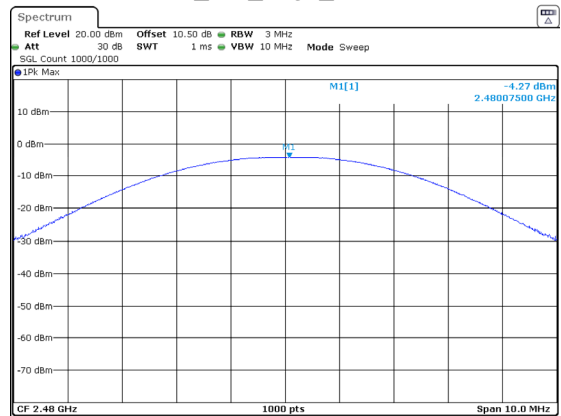


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 18:00:06

BLE_2M_Low_Channel

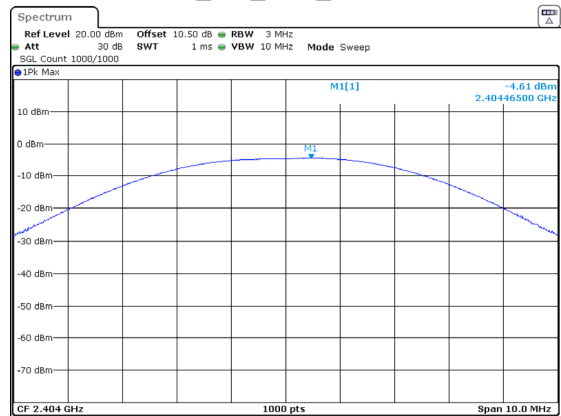


ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 18:00:31

BLE_2M_Middle_Channel

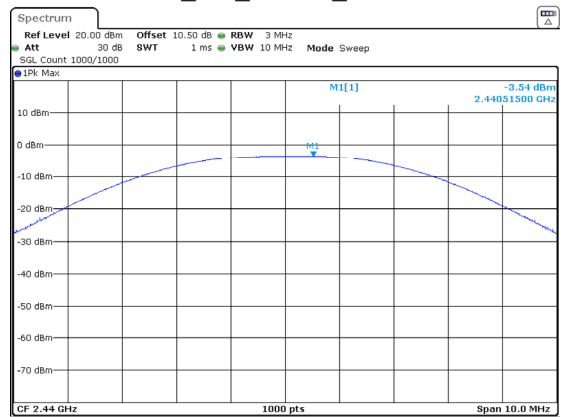

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 18:01:02

BLE_2M_High_Channel

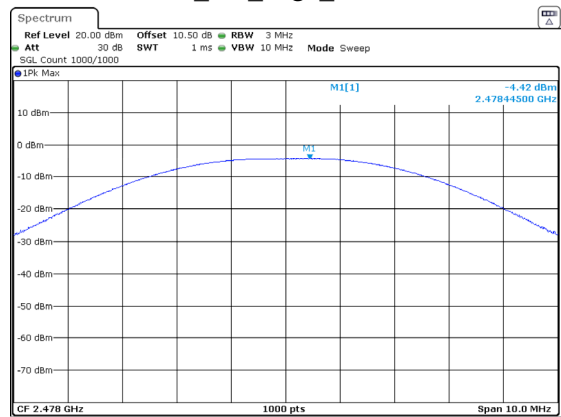

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 18:01:27

Power Spectral Density

Test Information:

Sample No.:	2UKG-1	Test Date:	2024/12/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	25.5-26.8	Relative Humidity: (%)	50-53	ATM Pressure: (kPa)	101
-----------------------	-----------	------------------------------	-------	------------------------	-----

Test Data:**BLE 1M**


Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-22.15	8	Pass
Middle Channel	-20.26	8	Pass
High Channel	-21.09	8	Pass

BLE 2M

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-23.60	8	Pass
Middle Channel	-22.41	8	Pass
High Channel	-23.36	8	Pass


BLE 1M

BLE_1M_Low_Channel

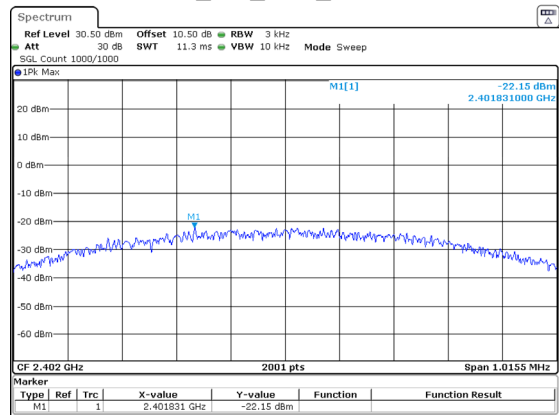

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 18:02:51


BLE_1M_Middle_Channel

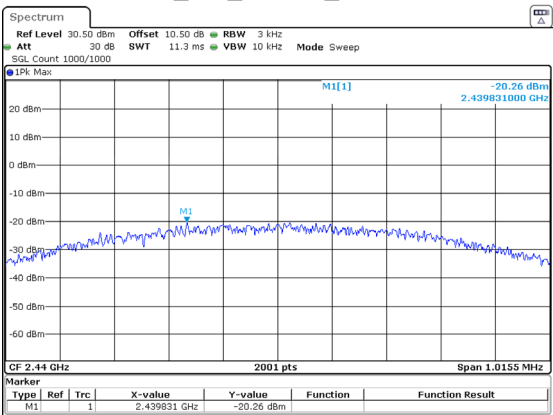

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 18:04:02


BLE 2M

BLE_1M_High_Channel

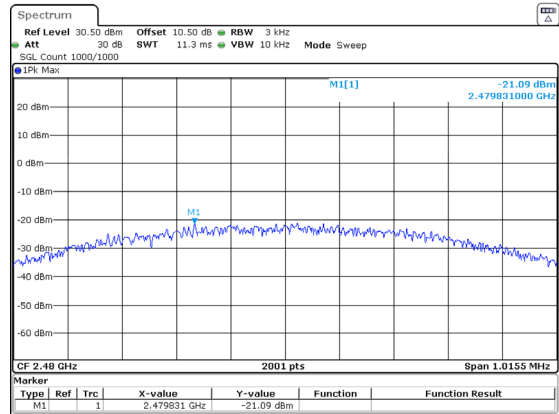


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 18:05:50

BLE_2M_Low_Channel

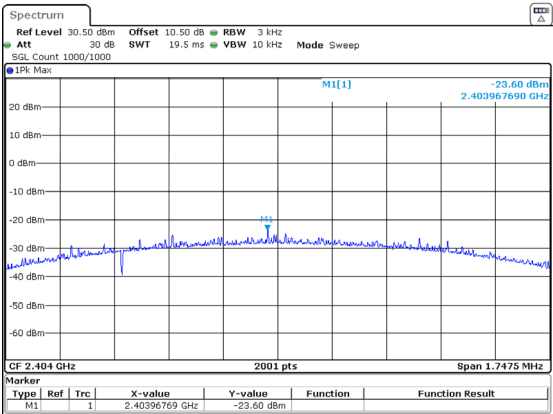


ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 18:07:27

BLE_2M_Middle_Channel

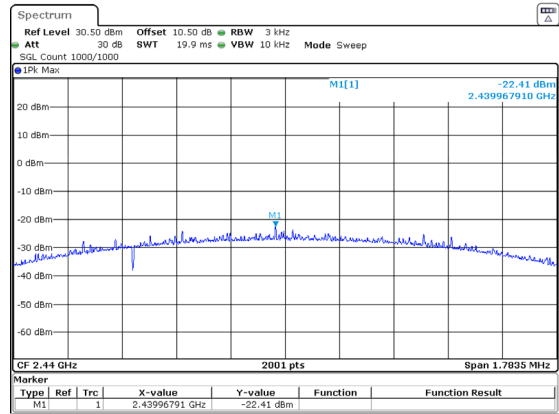

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 18:08:46

BLE_2M_High_Channel

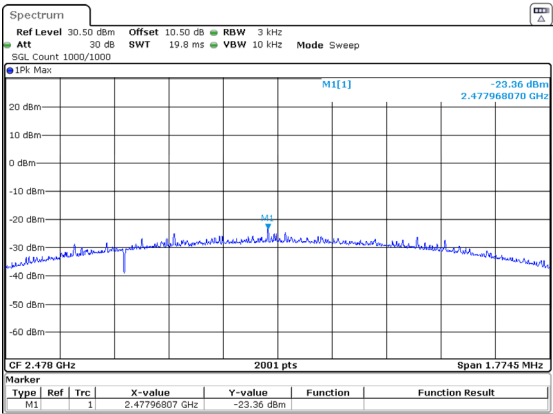

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 18:10:07

100 kHz Bandwidth of Frequency Band Edge

Test Information:

Sample No.:	2UKG-1	Test Date:	2024/12/19~2025/02/07
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass


Environmental Conditions:

Temperature: (°C):	25.5-26.8	Relative Humidity: (%)	50-53	ATM Pressure: (kPa)	101
-----------------------	-----------	------------------------------	-------	------------------------	-----

Test Data:


BLE 1M

BLE_1M_Low_Channel

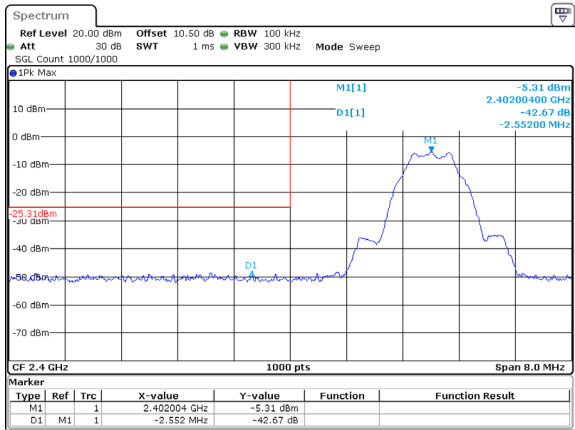

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 7.FEB.2025 23:58:15


BLE_1M_High_Channel

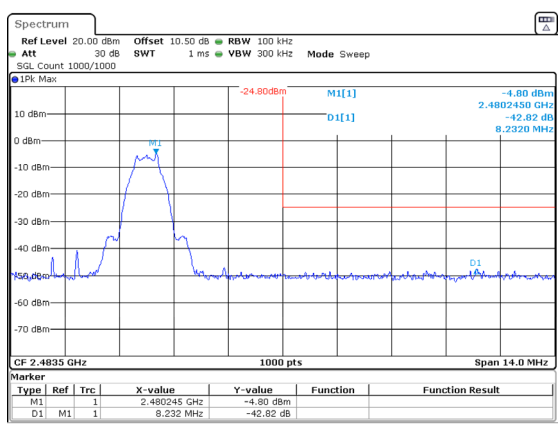

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 20:17:35


BLE 2M

BLE_2M_Low_Channel

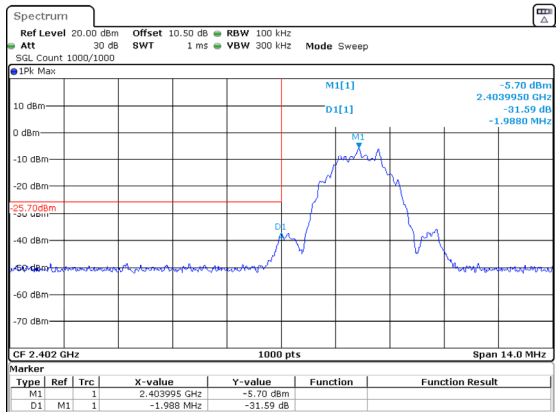

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 20:18:17

BLE_2M_High_Channel

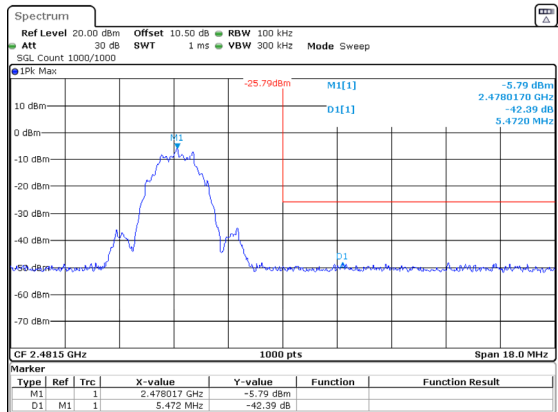

ProjectNo.:2401Z105021E-RF Tester:Kungfumaater Liang
Date: 19.DEC.2024 20:19:20

Duty Cycle

Test Information:

Sample No.:	2UKG-1	Test Date:	2024/12/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C):	25.5-26.8	Relative Humidity: (%)	50-53	ATM Pressure: (kPa)	101
-----------------------	-----------	------------------------------	-------	------------------------	-----

Test Data:

BLE 1M


Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
Middle Channel	2.112	2.484	85.02	0.70	473	1

BLE 2M

Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)	1/Ton (Hz)	VBW Setting (kHz)
Middle Channel	1.066	1.870	57.01	2.44	938	1

BLE 1M


BLE_1M_Middle_Channel

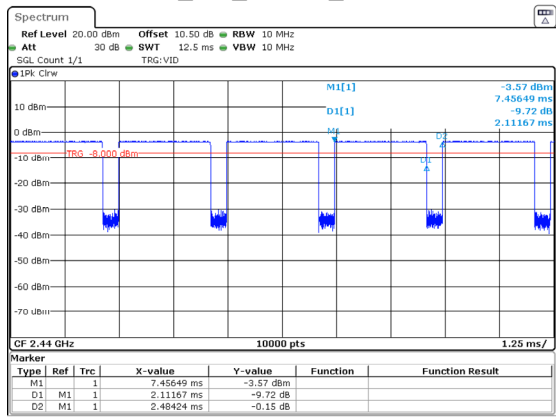

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 17:56:47

BLE 2M

BLE_2M_Middle_Channel

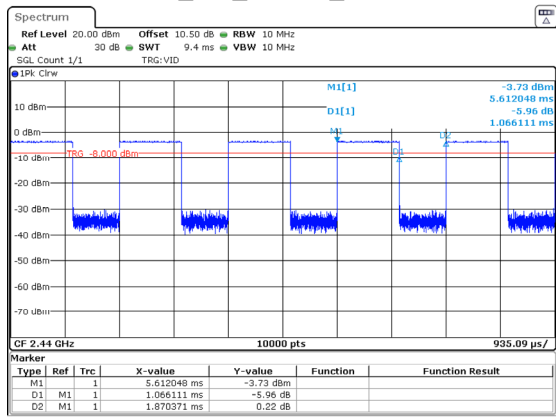

ProjectNo.:2401Z105021E-RF Tester:Kungfumaster Liang
Date: 19.DEC.2024 17:57:58

RF EXPOSURE EVALUATION

RF Exposure

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Result

Mode	Frequency (MHz)	Max tune-up conducted power [#]		Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(W)				
BLE	2402-2480	-3.0	0.50	5	0.2	3.0	Yes

Note: The tune up conducted power was declared by the applicant.

Result: Compliant

EUT PHOTOGRAPHS

Please refer to the attachment 2401Z105021E-RF External photo and 2401Z105021E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Z105021E-RF-00A Test Setup photo.

******* END OF REPORT *******