



Report No.: GZEM210100051101

Page: 1 of 86

FCC ID: 2AYVT-E3-EN

TEST REPORT

Application No.: GZEM2101000511CR
Applicant: Wear Future Technologies Co., LTD
Address of Applicant: 23A Floor, Building 3, Zhongke R&D Park, No.009, Gaoxin South 1st Road, High-tech Zone Community, Yuehai Street, Shenzhen City, Guangdong Province, P.R.China
Manufacturer: Wear Future Technologies Co., LTD
Address of Manufacturer: 23A Floor, Building 3, Zhongke R&D Park, No.009, Gaoxin South 1st Road, High-tech Zone Community, Yuehai Street, Shenzhen City, Guangdong Province, P.R.China
Factory: Wear Future Technologies Co., LTD
Address of Factory: 23A Floor, Building 3, Zhongke R&D Park, No.009, Gaoxin South 1st Road, High-tech Zone Community, Yuehai Street, Shenzhen City, Guangdong Province, P.R.China
Equipment Under Test (EUT):
EUT Name: Eye Massager
Model No.: E3-EN
Trade mark: SKG
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2021-01-22
Date of Test: 2021-01-25 to 2021-03-07
Date of Issue: 2021-03-10

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Testing Center EEC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-03-10		Original

Authorized for issue by			
Tested By		 Lily Kuang/Project Engineer	
Reviewed By		 Ricky Liu/Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass



3 Contents

	Page
1 Cover Page	1
2 Test Summary.....	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units.....	6
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Test Facility.....	7
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement.....	12
6.1 Antenna Requirement	12
6.1.1 Test Requirement:	12
6.1.2 Conclusion	12
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	13
6.2.1 Test Requirement:	13
6.2.2 Conclusion	13
7 Radio Spectrum Matter Test Results	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	14
7.1.1 E.U.T. Operation	14
7.1.2 E.U.T. Operation	14
7.1.3 Test Setup Diagram	15
7.1.4 Measurement Procedure and Data.....	15
7.2 Conducted Peak Output Power	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Setup Diagram	18
7.2.3 Measurement Procedure and Data.....	18
7.3 20dB Bandwidth	19
7.3.1 E.U.T. Operation	19
7.3.2 Test Setup Diagram	19
7.3.3 Measurement Procedure and Data.....	19
7.4 Carrier Frequencies Separation.....	20
7.4.1 E.U.T. Operation	20
7.4.2 Test Setup Diagram	20
7.4.3 Measurement Procedure and Data.....	20
7.5 Hopping Channel Number	21
7.5.1 E.U.T. Operation	21
7.5.2 Test Setup Diagram	21
7.5.3 Measurement Procedure and Data.....	21



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.6	Dwell Time	22
7.6.1	E.U.T. Operation	22
7.6.2	Test Setup Diagram	22
7.6.3	Measurement Procedure and Data	22
7.7	Conducted Band Edges Measurement	23
7.7.1	E.U.T. Operation	23
7.7.2	Test Setup Diagram	23
7.7.3	Measurement Procedure and Data	23
7.8	Conducted Spurious Emissions	24
7.8.1	E.U.T. Operation	24
7.8.2	Test Setup Diagram	24
7.8.3	Measurement Procedure and Data	24
7.9	Radiated Emissions which fall in the restricted bands	25
7.9.1	E.U.T. Operation	25
7.9.2	Test Setup Diagram	25
7.9.3	Measurement Procedure and Data	26
7.10	Radiated Spurious Emissions	31
7.10.1	E.U.T. Operation	31
7.10.2	Test Setup Diagram	32
7.10.3	Measurement Procedure and Data	33
8	Appendix	42
8.1	Appendix A: 20dB Emission Bandwidth	42
8.1.1	Test Result	42
8.1.2	Test Graphs	43
8.2	Appendix B: Maximum conducted output power	46
8.2.1	Test Result	46
8.2.2	Test Graphs	47
8.3	Appendix C: Carrier frequency separation	50
8.3.1	Test Result	50
8.3.2	Test Graphs	50
8.4	Appendix D: Dwell Time	52
8.4.1	Test Result	52
8.4.2	Test Graphs	53
8.5	Appendix E: Number of hopping channels	71
8.5.1	Test Result	71
8.5.2	Test Graphs	71
8.6	Appendix F: Band edge measurements	72
8.6.1	Test Result	72
8.6.2	Test Graphs	73
8.7	Appendix G: Conducted Spurious Emission	77
8.7.1	Test Result	77
8.7.2	Test Graphs	78

4 General Information

4.1 Details of E.U.T.

Power Supply:	Powered by built-in battery as below: Rated: DC 3.7V, 1100mAh DC 5V for charging mode
Test Voltage:	AC 230V, 50Hz with AC/DC adapter refer to section 4.2
Cable:	AC mains (unshielded, 0.8m)
Antenna Gain:	-0.58dBi
Antenna Type:	Integrated antenna
Channel Spacing:	1MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK-
Number of Channels:	79
Operation Frequency:	2402MHz to 2480MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Hardware Version:	FJ235-MAIN
Firmware Version:	V1.00
S/N:	SP-2021031001
Test Software Version:	BT_Tool V1.2.1
Power setting level	-1 dBm can not changed by user

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC/DC Adapter	SGS	DC 5V	REF. No.SEA0500

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Peak Output Power	$\pm 0.75\text{dB}$
20dB Bandwidth	$\pm 3\%$
Carrier Frequencies Separation	$\pm 7.25 \times 10^{-8}$
Hopping Channel Number	$\pm 7.25 \times 10^{-8}$
Dwell Time	$\pm 0.37\%$
Conducted Band Edges Measurement	$\pm 0.75\text{dB}$
Conducted Spurious Emissions	$\pm 0.75\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 4.5\text{dB}$ (Below 1GHz); $\pm 4.8\text{dB}$ (Above 1GHz)
Radiated Spurious Emissions	$\pm 4.5\text{dB}$ (Below 1GHz); $\pm 4.8\text{dB}$ (Above 1GHz)

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
 Guangzhou, China 510663

Tel: +86 20 82155555

Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(9kHz-2.75GHz)	Rohde & Schwarz	ESCS30	EMC0506	2020-11-13	2021-11-12
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-01-08	2022-01-06
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Carrier Frequencies Separation					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Hopping Channel Number					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16



6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Dwell Time

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Conducted Band Edges Measurement

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Conducted Spurious Emissions

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01

Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable	HangTianXing	N/A	EMC0542	2019-06-28	2021-06-27
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2016	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Chamber cable	HangTianXing	N/A	EMC0542	2019-06-28	2021-06-27
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2016	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2020-07-09	2021-07-08
DMM	Fluke	73	EMC0007	2020-07-09	2021-07-08



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.58dBi. Please refer to the internal photo.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 52.5 % RH Atmospheric Pressure: 1010 mbar

7.1.2 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar


Test mode 01:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, π/4DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.1.3 Test Setup Diagram

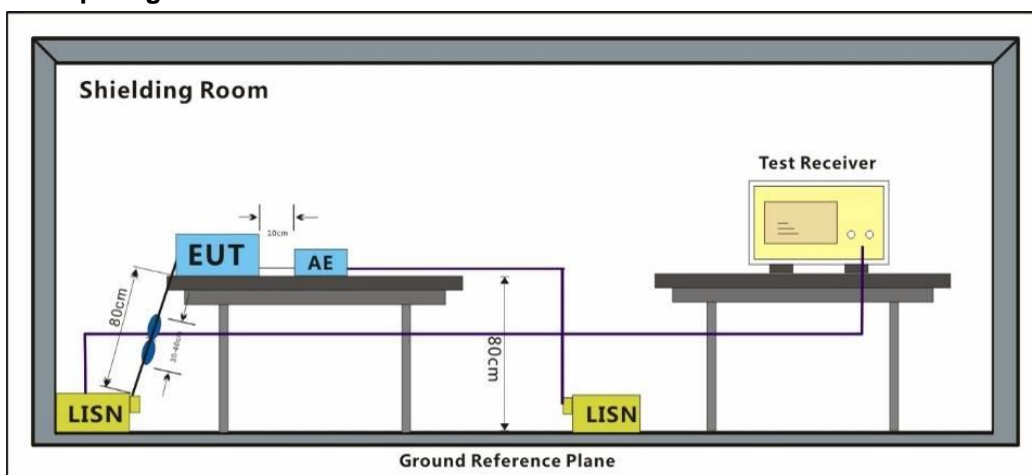


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 50\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor


Test Mode: 01; Line: Live line

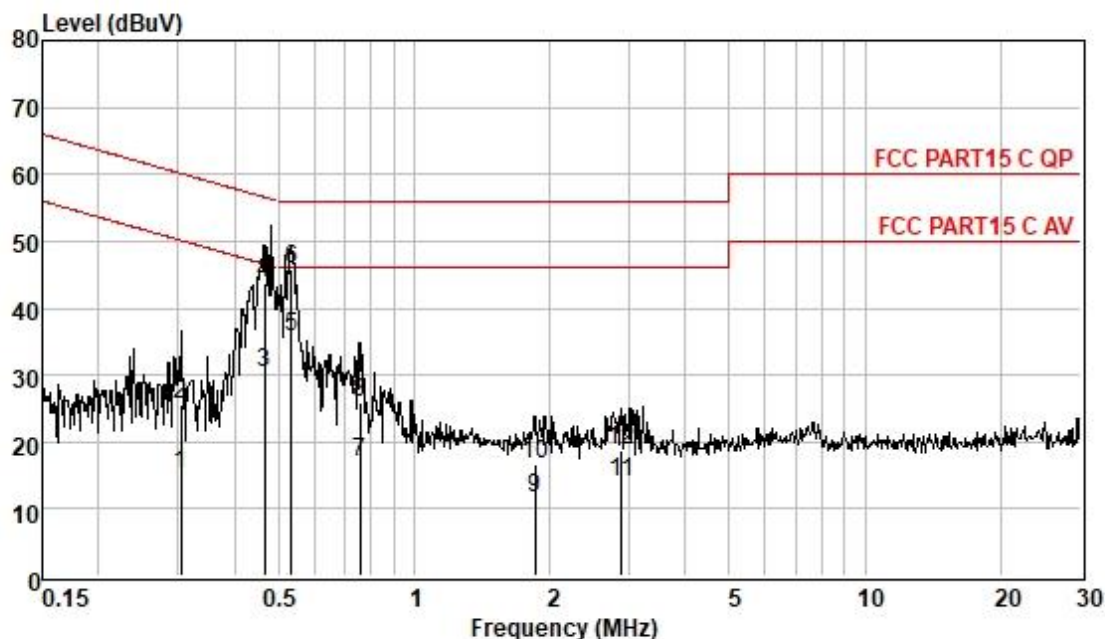

Pol : LINE
Mode :
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.31	5.61	0.06	9.62	15.29	50.10	-34.81	Average
0.31	15.76	0.06	9.62	25.44	60.10	-34.66	QP
0.47	20.62	0.07	9.63	30.32	46.58	-16.26	Average
0.47	34.04	0.07	9.63	43.74	56.58	-12.84	QP
0.53	25.99	0.07	9.63	35.69	46.00	-10.31	Average
0.53	36.18	0.07	9.63	45.88	56.00	-10.12	QP
0.76	7.22	0.07	9.63	16.92	46.00	-29.08	Average
0.76	16.31	0.07	9.63	26.01	56.00	-29.99	QP
1.86	1.72	0.11	9.62	11.45	46.00	-34.55	Average
1.86	7.06	0.11	9.62	16.79	56.00	-39.21	QP
2.88	4.08	0.14	9.62	13.84	46.00	-32.16	Average
2.88	8.97	0.14	9.62	18.73	56.00	-37.27	QP

Test Mode: 01; Line: Neutral Line

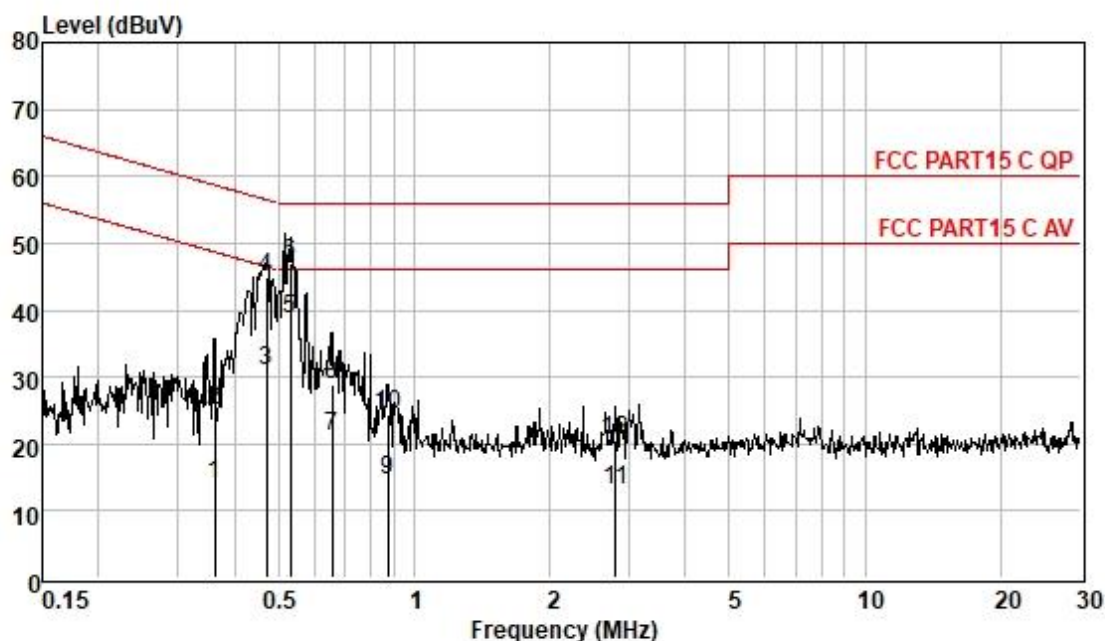

Pol : NEUTRAL

Mode :

Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.36	4.36	0.06	9.54	13.96	48.69	-34.73	Average
0.36	15.44	0.06	9.54	25.04	58.69	-33.65	QP
0.47	21.40	0.07	9.55	31.02	46.49	-15.47	Average
0.47	35.24	0.07	9.55	44.86	56.49	-11.63	QP
0.53	28.92	0.07	9.55	38.54	46.00	-7.46	Average
0.53	37.36	0.07	9.55	46.98	56.00	-9.02	QP
0.66	11.58	0.07	9.55	21.20	46.00	-24.80	Average
0.66	19.21	0.07	9.55	28.83	56.00	-27.17	QP
0.88	5.03	0.07	9.55	14.65	46.00	-31.35	Average
0.88	14.74	0.07	9.55	24.36	56.00	-31.64	QP
2.79	3.36	0.14	9.55	13.05	46.00	-32.95	Average
2.79	10.72	0.14	9.55	20.41	56.00	-35.59	QP

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.5
 Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar

Test mode 01:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.2 Test Setup Diagram

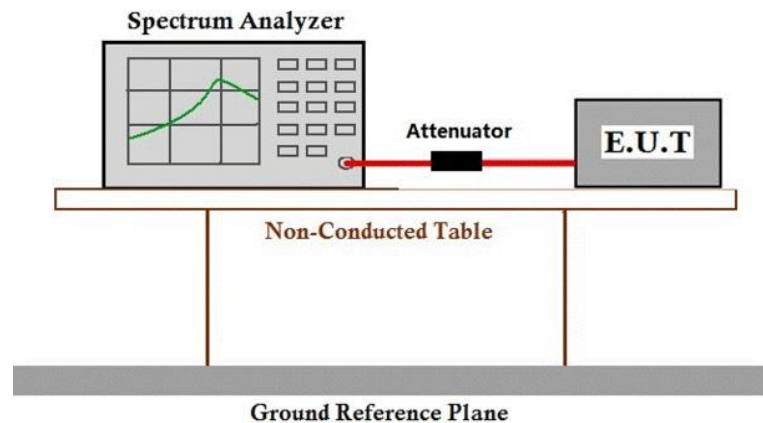

7.2.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar

Test mode 02:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.2 Test Setup Diagram

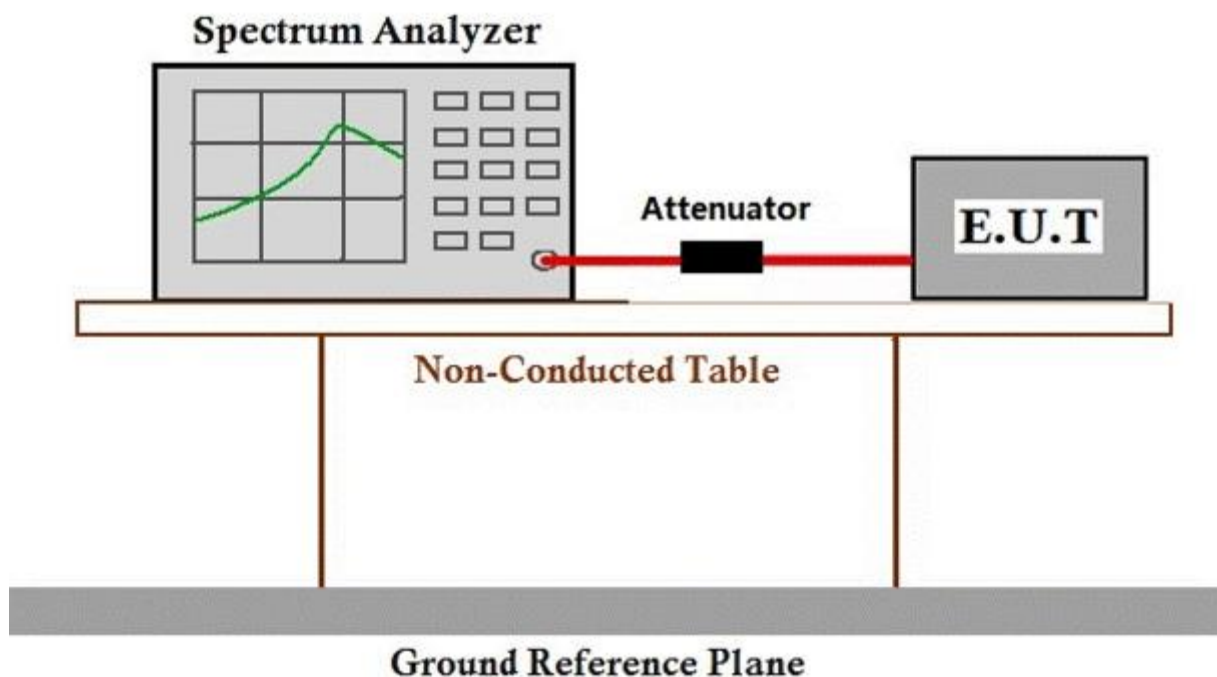

7.3.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.4 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar

Test mode 01:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

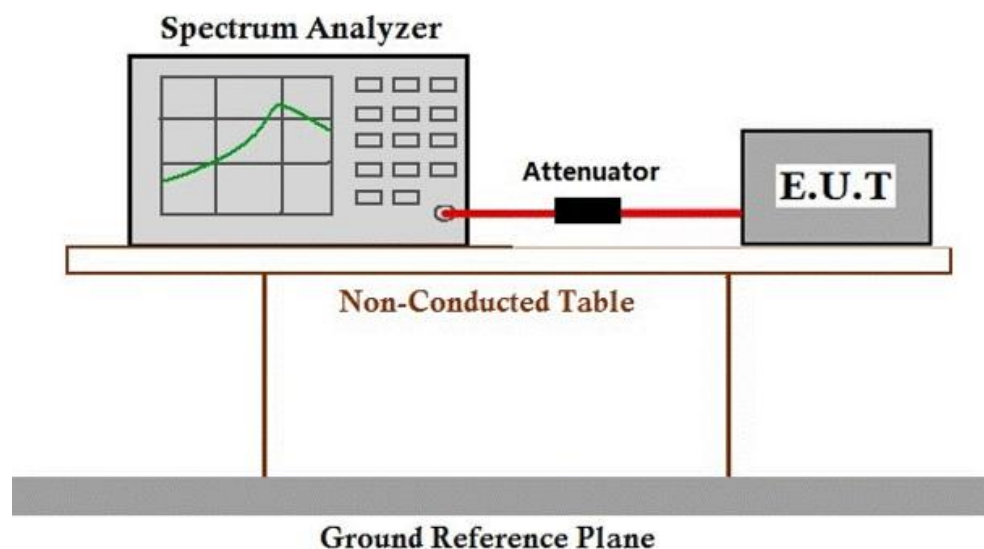

7.4.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar

Test mode 01:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.2 Test Setup Diagram

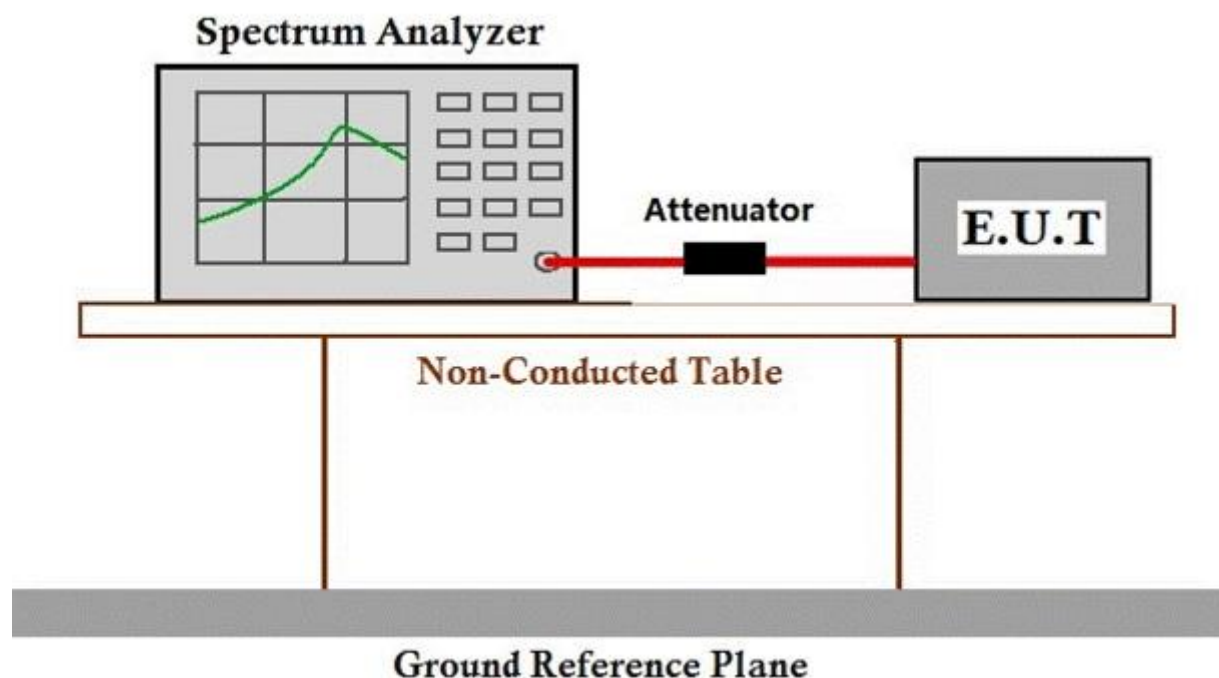

7.5.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4s within a 20s period(20dB bandwidth<250kHz)
	0.4s within a 10s period(20dB bandwidth≥250kHz)
2400-2483.5	0.4s within a period of 0.4s multiplied by the number of hopping channels
5725-5850	0.4s within a 30s period


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar

Test mode 01:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.2 Test Setup Diagram

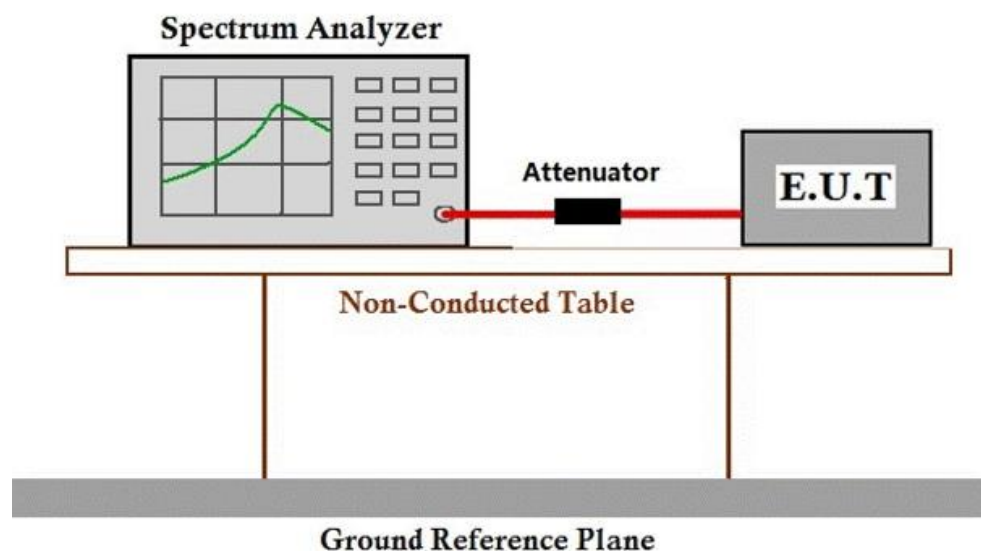

7.6.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar

Test mode: 01:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
 02:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.2 Test Setup Diagram

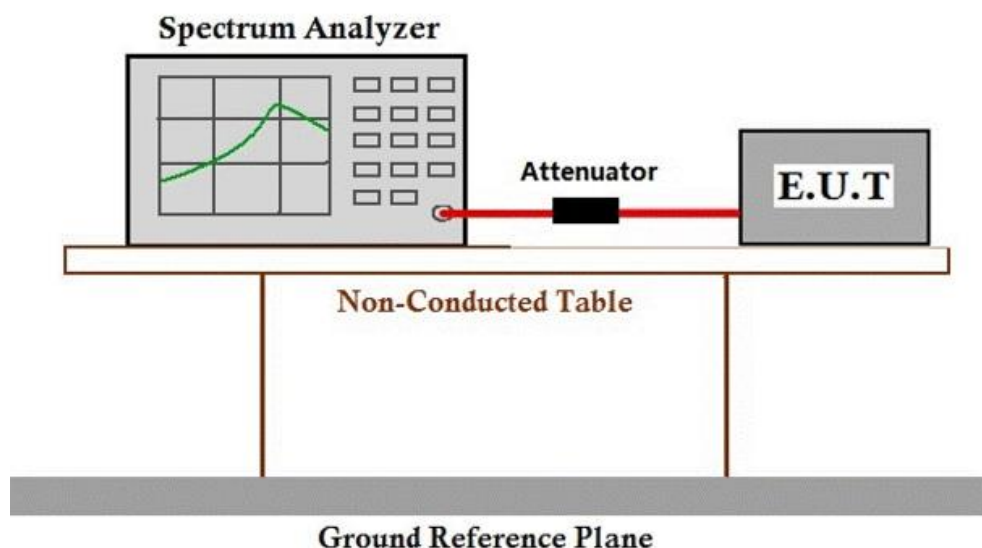

7.7.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C Humidity: 55.8 % RH Atmospheric Pressure: 1020 mbar

Test mode 02:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram

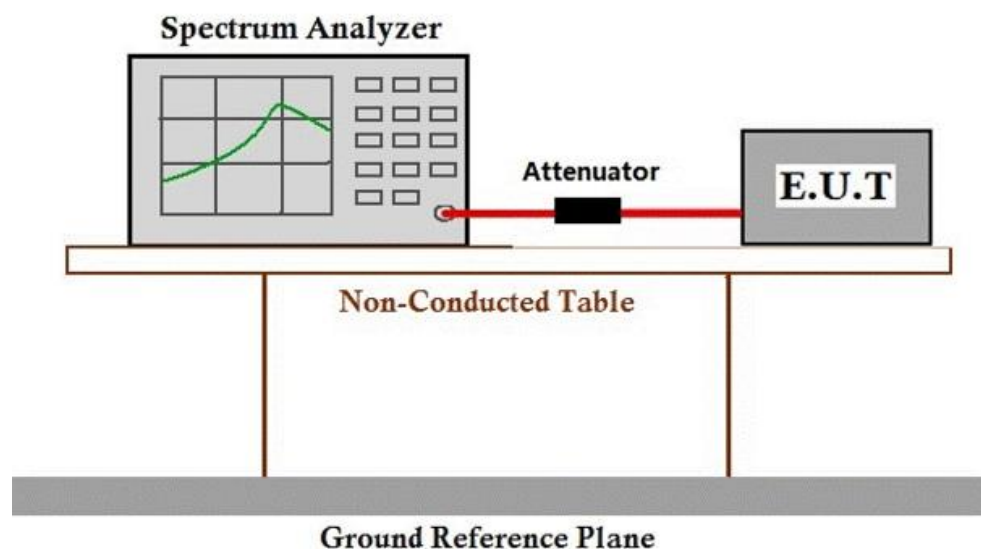

7.8.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C Humidity: 55.1 % RH Atmospheric Pressure: 1020 mbar

Test mode: 02:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.2 Test Setup Diagram

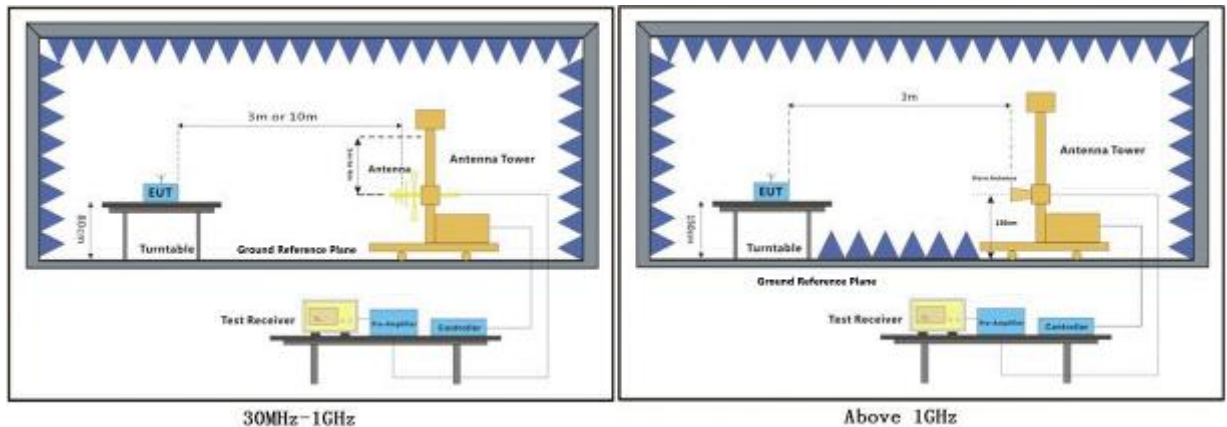


7.9.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; ; Channel:High;

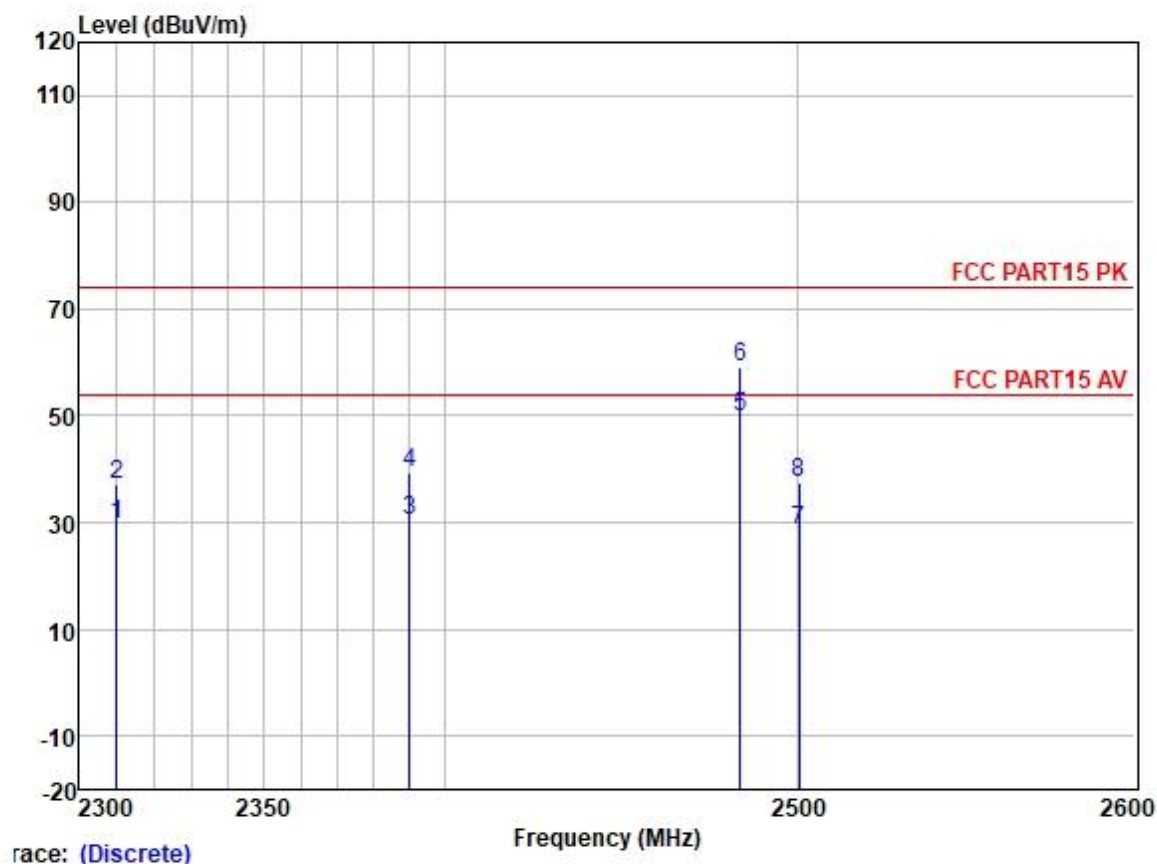


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	36.84	27.15	3.32	37.62	29.69	54.00	-24.31	HORIZONTAL Average
2	2310.000	44.10	27.15	3.32	37.62	36.95	74.00	-37.05	HORIZONTAL Peak
3	2390.000	37.15	27.33	3.48	37.59	30.37	54.00	-23.63	HORIZONTAL Average
4	2390.000	46.06	27.33	3.48	37.59	39.28	74.00	-34.72	HORIZONTAL Peak
5	2483.500	56.36	27.48	3.53	37.57	49.80	54.00	-4.20	HORIZONTAL Average
6	2483.500	65.75	27.48	3.53	37.57	59.19	74.00	-14.81	HORIZONTAL Peak
7	2500.583	35.32	27.50	3.40	37.56	28.66	54.00	-25.34	HORIZONTAL Average
8	2500.583	44.01	27.50	3.40	37.56	37.35	74.00	-36.65	HORIZONTAL Peak

Test Mode: 02; Polarity: Horizontal; Modulation:GFSK; ; Channel:Low;

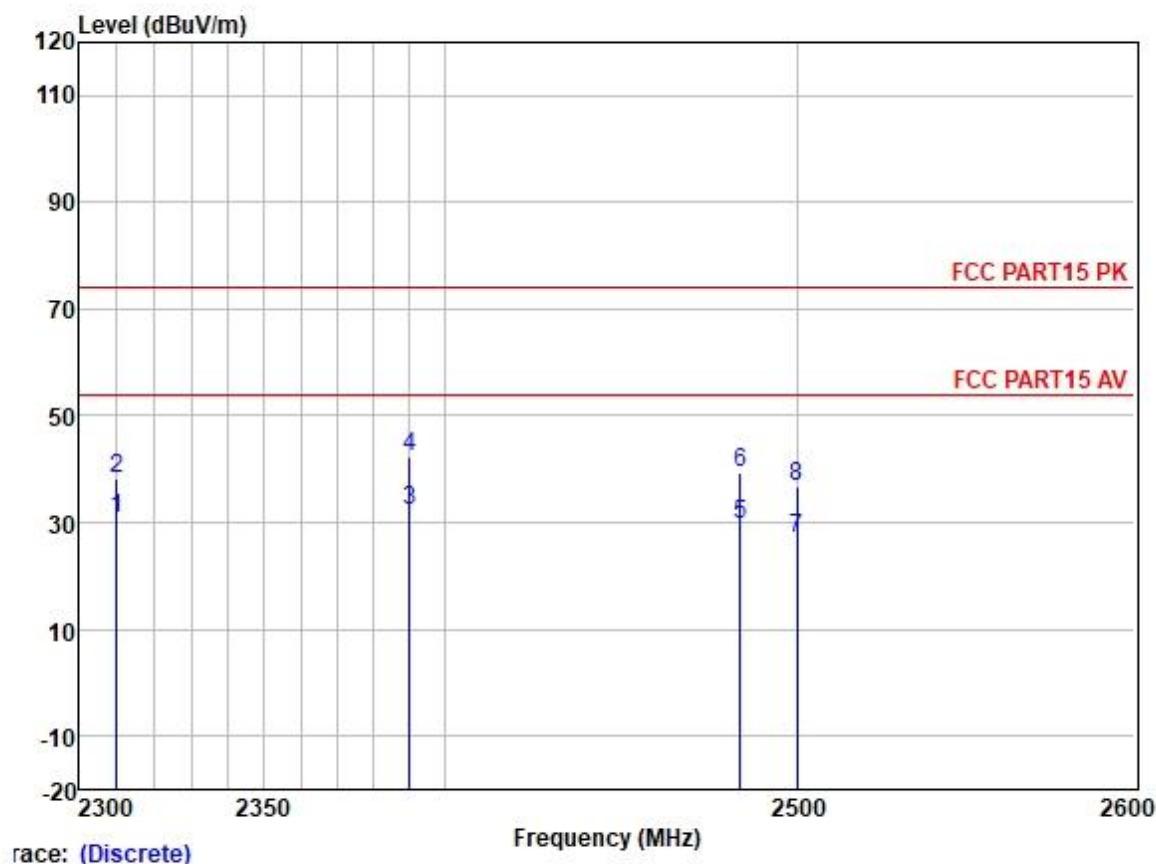


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	37.84	27.15	3.32	37.62	30.69	54.00	-23.31	HORIZONTAL Average
2	2310.000	45.21	27.15	3.32	37.62	38.06	74.00	-35.94	HORIZONTAL Peak
3	2390.000	39.01	27.33	3.48	37.59	32.23	54.00	-21.77	HORIZONTAL Average
4	2390.000	49.01	27.33	3.48	37.59	42.23	74.00	-31.77	HORIZONTAL Peak
5	2483.500	36.03	27.48	3.53	37.57	29.47	54.00	-24.53	HORIZONTAL Average
6	2483.500	45.80	27.48	3.53	37.57	39.24	74.00	-34.76	HORIZONTAL Peak
7	2500.000	33.78	27.50	3.40	37.56	27.12	54.00	-26.88	HORIZONTAL Average
8	2500.000	43.52	27.50	3.40	37.56	36.86	74.00	-37.14	HORIZONTAL Peak

Test Mode: 02; Polarity: Vertical; Modulation:GFSK; ; Channel:High;

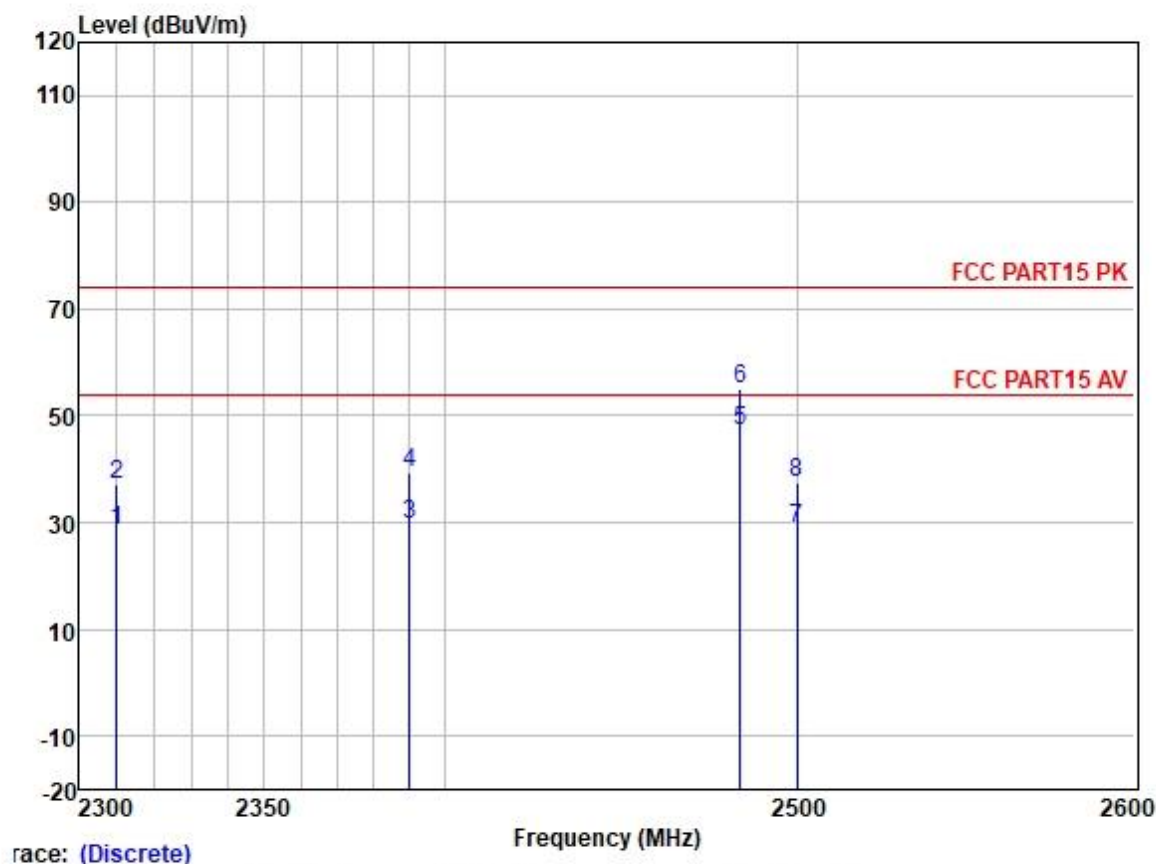

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	35.75	27.15	3.32	37.62	28.60	54.00	-25.40	VERTICAL Average
2	2310.000	44.45	27.15	3.32	37.62	37.30	74.00	-36.70	VERTICAL Peak
3	2390.000	36.56	27.33	3.48	37.59	29.78	54.00	-24.22	VERTICAL Average
4	2390.000	46.01	27.33	3.48	37.59	39.23	74.00	-34.77	VERTICAL Peak
5	2483.500	53.70	27.48	3.53	37.57	47.14	54.00	-6.86	VERTICAL Average
6	2483.500	61.44	27.48	3.53	37.57	54.88	74.00	-19.12	VERTICAL Peak
7	2500.000	35.69	27.50	3.40	37.56	29.03	54.00	-24.97	VERTICAL Average
8	2500.000	43.99	27.50	3.40	37.56	37.33	74.00	-36.67	VERTICAL Peak

Test Mode: 02; Polarity: Vertical; Modulation: GFSK; ; Channel: Low;

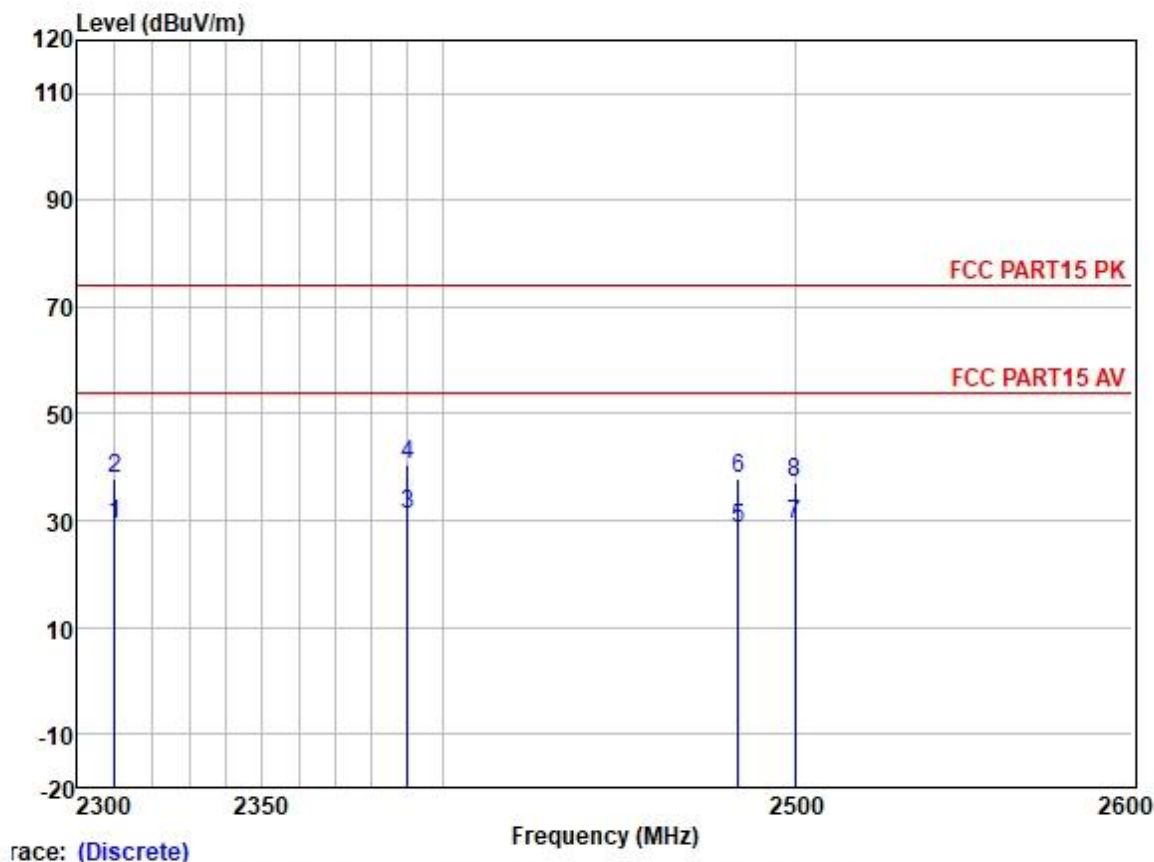

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	36.46	27.15	3.32	37.62	29.31	54.00	-24.69	VERTICAL	Average
2	2310.000	45.07	27.15	3.32	37.62	37.92	74.00	-36.08	VERTICAL	Peak
3	2390.000	38.11	27.33	3.48	37.59	31.33	54.00	-22.67	VERTICAL	Average
4	2390.000	47.08	27.33	3.48	37.59	40.30	74.00	-33.70	VERTICAL	Peak
5	2483.500	35.26	27.48	3.53	37.57	28.70	54.00	-25.30	VERTICAL	Average
6	2483.500	44.46	27.48	3.53	37.57	37.90	74.00	-36.10	VERTICAL	Peak
7	2500.000	35.83	27.50	3.40	37.56	29.17	54.00	-24.83	VERTICAL	Average
8	2500.000	43.81	27.50	3.40	37.56	37.15	74.00	-36.85	VERTICAL	Peak

7.10 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C Humidity: 51.2 % RH Atmospheric Pressure: 1020 mbar

Test mode: 02:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.10.2 Test Setup Diagram

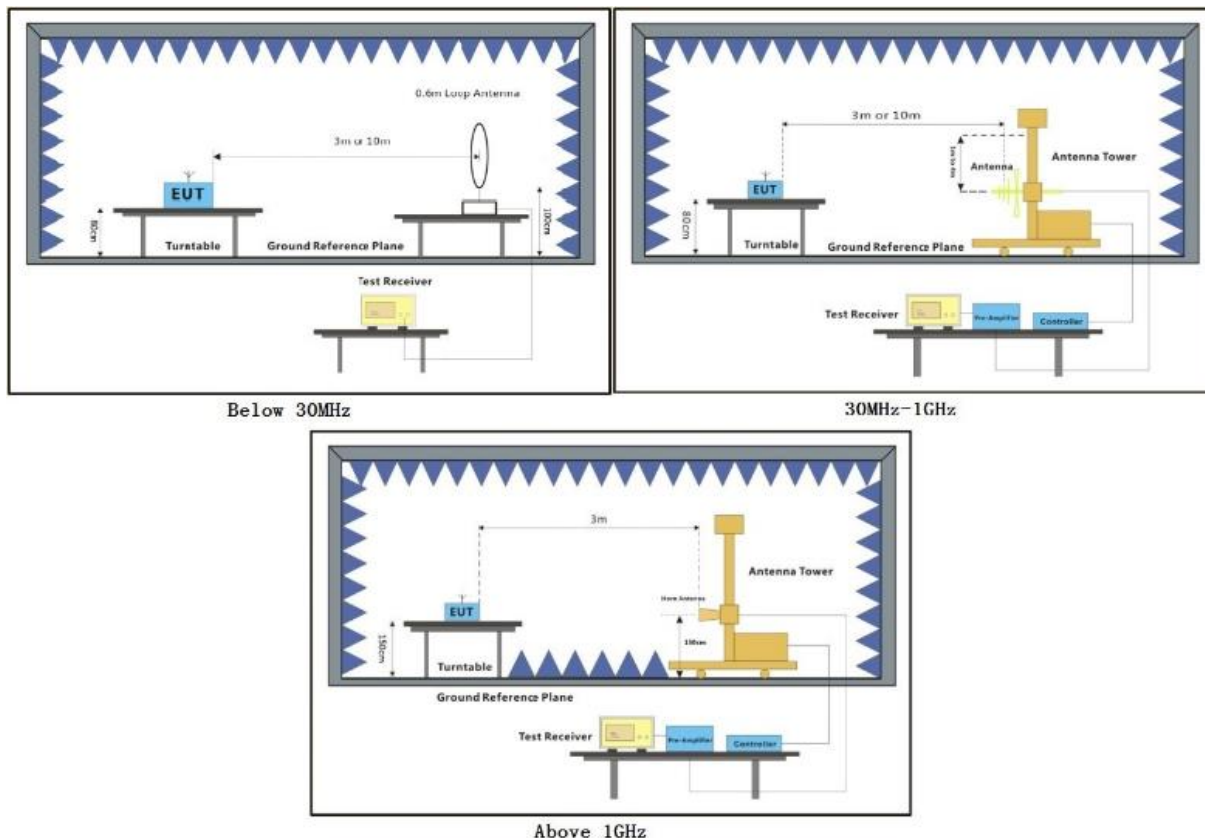



7.10.3 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the highest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Mode:02; Polarization:Horizontal; Modulation:GFSK; Channel:Low

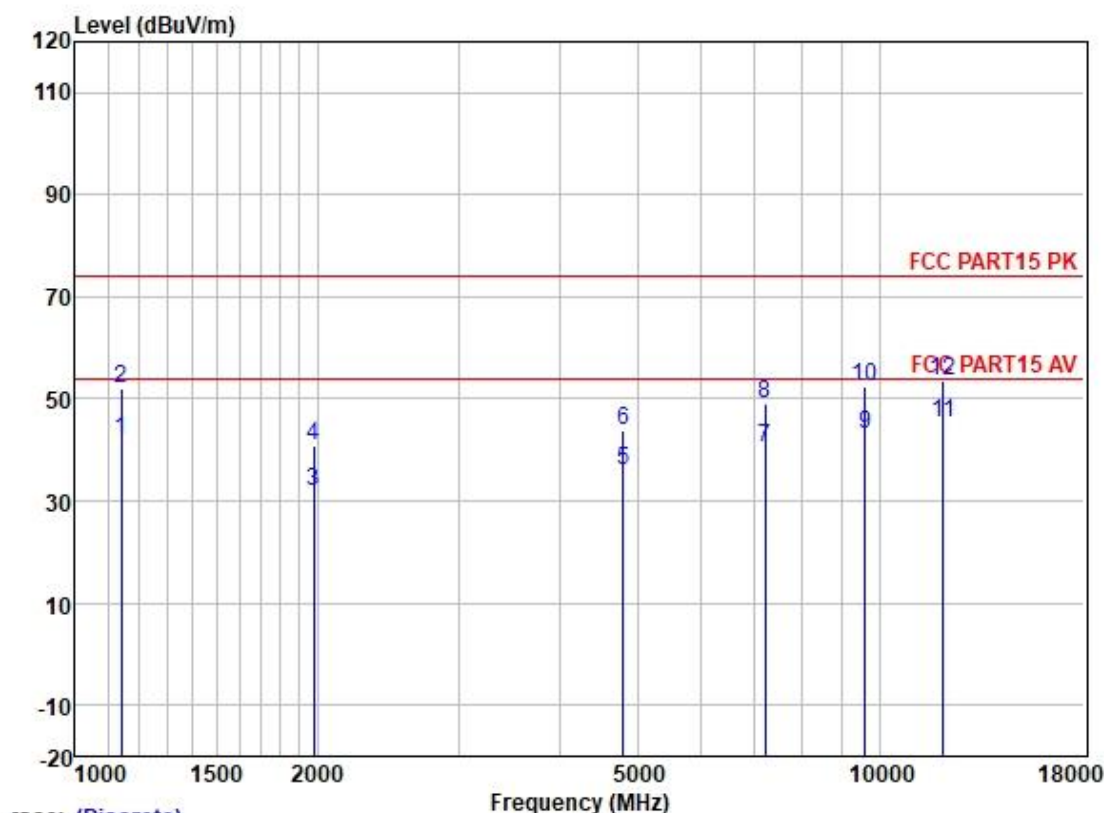


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1142.201	53.48	24.47	2.30	38.42	41.83	54.00	-12.17	HORIZONTAL	Average
2	1142.201	63.57	24.47	2.30	38.42	51.92	74.00	-22.08	HORIZONTAL	Peak
3	1978.082	40.42	26.09	3.06	37.71	31.86	54.00	-22.14	HORIZONTAL	Average
4	1978.082	49.28	26.09	3.06	37.71	40.72	74.00	-33.28	HORIZONTAL	Peak
5	4804.271	36.16	31.42	5.40	36.83	36.15	54.00	-17.85	HORIZONTAL	Average
6	4804.271	44.00	31.42	5.40	36.83	43.99	74.00	-30.01	HORIZONTAL	Peak
7	7206.836	36.50	35.54	5.98	37.38	40.64	54.00	-13.36	HORIZONTAL	Average
8	7206.836	44.83	35.54	5.98	37.38	48.97	74.00	-25.03	HORIZONTAL	Peak
9	9608.164	35.00	38.37	7.07	37.42	43.02	54.00	-10.98	HORIZONTAL	Average
10	9608.164	44.30	38.37	7.07	37.42	52.32	74.00	-21.68	HORIZONTAL	Peak
11	12010.130	35.38	38.90	8.19	37.10	45.37	54.00	-8.63	HORIZONTAL	Average
12	12010.130	43.64	38.90	8.19	37.10	53.63	74.00	-20.37	HORIZONTAL	Peak

Mode:02; Polarization:Vertical; Modulation:GFSK; Channel:Low

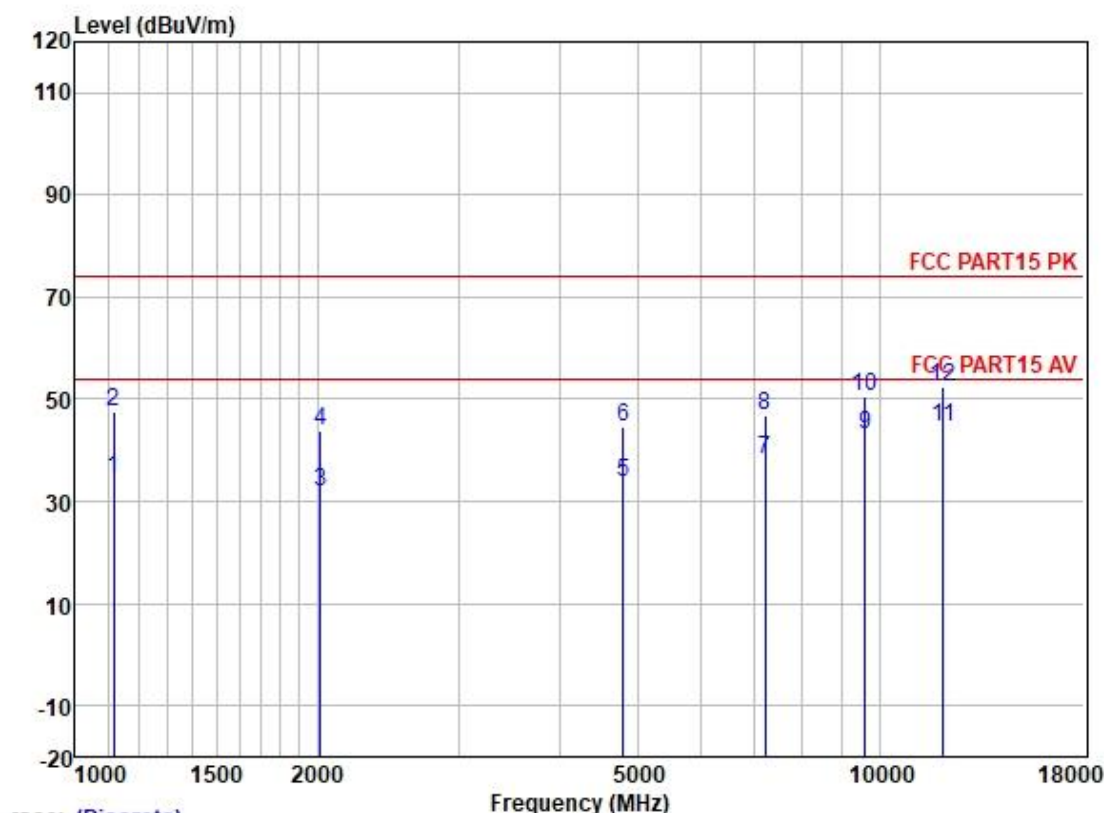

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1116.093	46.17	24.40	2.25	38.43	34.39	54.00	-19.61	VERTICAL Average
2	1116.093	59.22	24.40	2.25	38.43	47.44	74.00	-26.56	VERTICAL Peak
3	2018.511	40.18	26.13	3.11	37.69	31.73	54.00	-22.27	VERTICAL Average
4	2018.511	52.24	26.13	3.11	37.69	43.79	74.00	-30.21	VERTICAL Peak
5	4804.300	33.63	31.42	5.40	36.83	33.62	54.00	-20.38	VERTICAL Average
6	4804.300	44.66	31.42	5.40	36.83	44.65	74.00	-29.35	VERTICAL Peak
7	7206.906	34.22	35.54	5.98	37.38	38.36	54.00	-15.64	VERTICAL Average
8	7206.906	42.84	35.54	5.98	37.38	46.98	74.00	-27.02	VERTICAL Peak
9	9608.725	35.25	38.37	7.07	37.42	43.27	54.00	-10.73	VERTICAL Average
10	9608.725	42.41	38.37	7.07	37.42	50.43	74.00	-23.57	VERTICAL Peak
11	12010.230	34.49	38.90	8.19	37.10	44.48	54.00	-9.52	VERTICAL Average
12	12010.230	42.54	38.90	8.19	37.10	52.53	74.00	-21.47	VERTICAL Peak


Mode:02; Polarization:Horizontal; Modulation:GFSK; Channel:middle

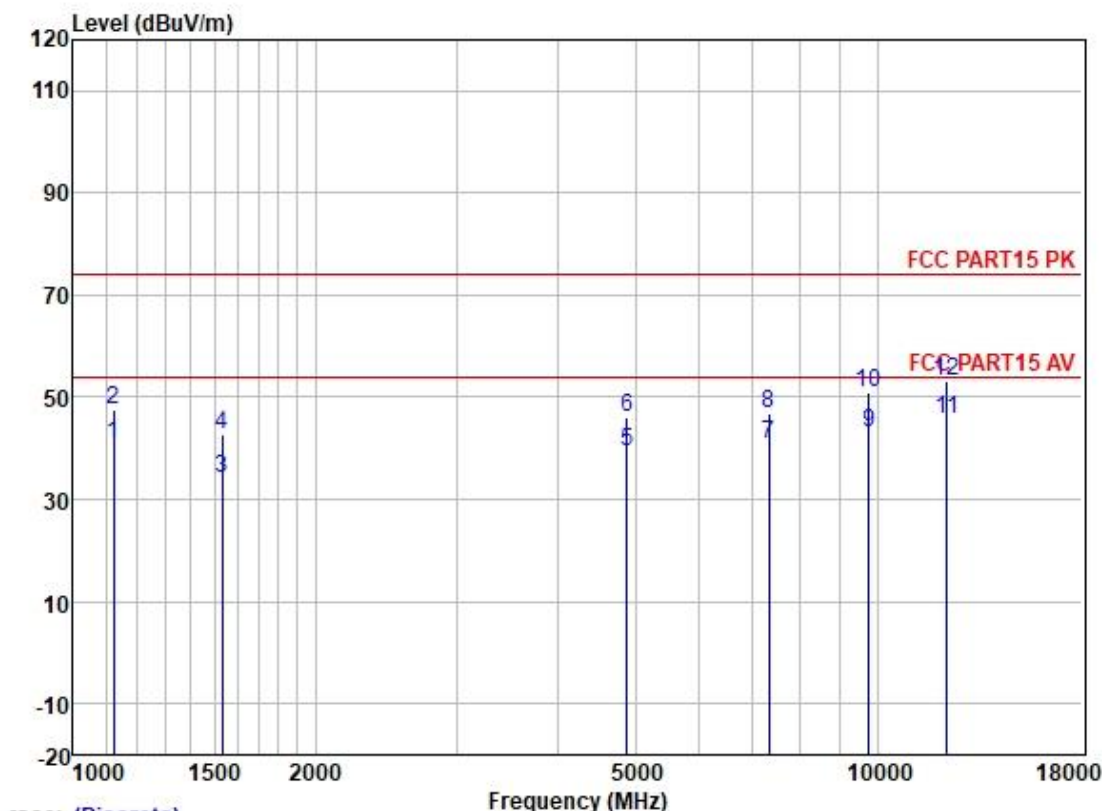

race: (Discrete)

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1122.563	52.65	24.42	2.22	38.43	40.86	54.00	-13.14	HORIZONTAL	Average
2	1122.563	59.31	24.42	2.22	38.43	47.52	74.00	-26.48	HORIZONTAL	Peak
3	1533.841	44.06	25.52	2.80	38.07	34.31	54.00	-19.69	HORIZONTAL	Average
4	1533.841	52.51	25.52	2.80	38.07	42.76	74.00	-31.24	HORIZONTAL	Peak
5	4882.771	39.08	31.56	5.52	36.84	39.32	54.00	-14.68	HORIZONTAL	Average
6	4882.771	45.76	31.56	5.52	36.84	46.00	74.00	-28.00	HORIZONTAL	Peak
7	7323.542	36.24	36.00	6.13	37.43	40.94	54.00	-13.06	HORIZONTAL	Average
8	7323.542	42.17	36.00	6.13	37.43	46.87	74.00	-27.13	HORIZONTAL	Peak
9	9764.462	35.16	38.50	7.02	37.41	43.27	54.00	-10.73	HORIZONTAL	Average
10	9764.462	42.72	38.50	7.02	37.41	50.83	74.00	-23.17	HORIZONTAL	Peak
11	12205.710	36.06	38.74	8.08	37.00	45.88	54.00	-8.12	HORIZONTAL	Average
12	12205.710	43.37	38.74	8.08	37.00	53.19	74.00	-20.81	HORIZONTAL	Peak


Mode:02; Polarization:Vertical; Modulation:GFSK; Channel:middle

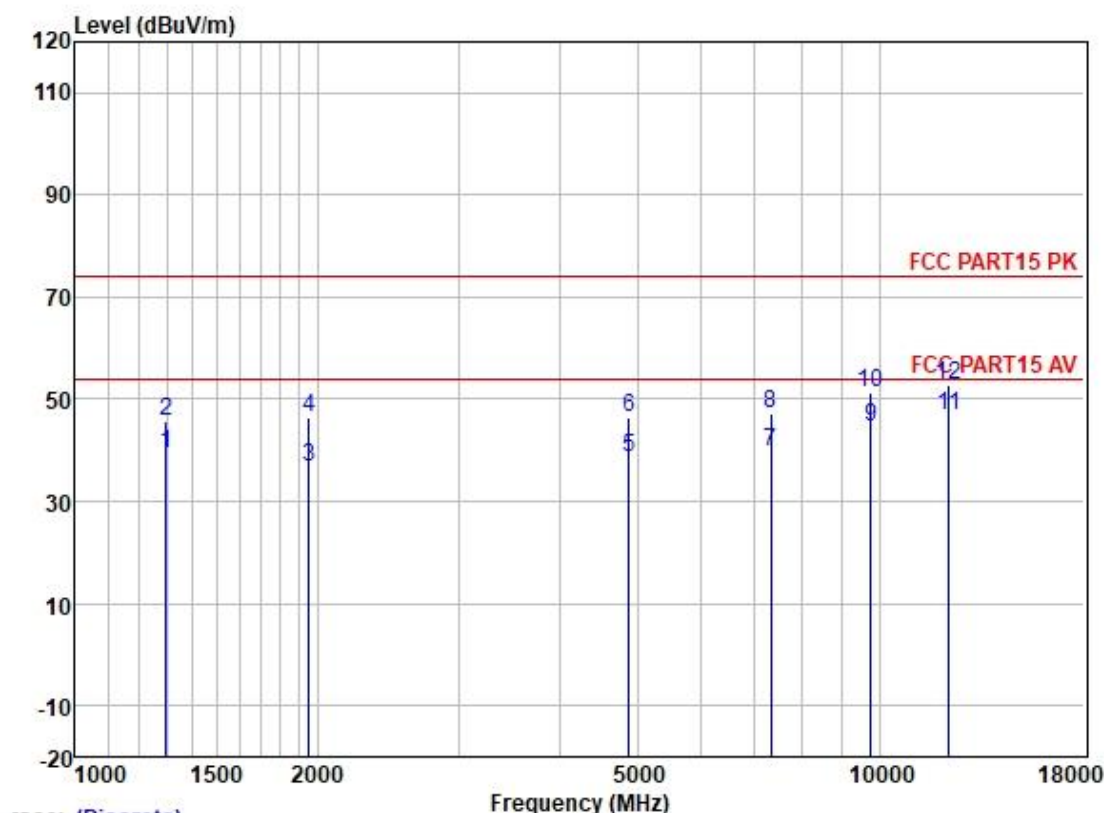

Trace: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1297.103	49.86	25.19	2.58	38.31	39.32	54.00	-14.68	VERTICAL	Average
2	1297.103	56.14	25.19	2.58	38.31	45.60	74.00	-28.40	VERTICAL	Peak
3	1955.344	45.50	26.08	3.01	37.73	36.86	54.00	-17.14	VERTICAL	Average
4	1955.344	55.15	26.08	3.01	37.73	46.51	74.00	-27.49	VERTICAL	Peak
5	4882.016	38.31	31.56	5.52	36.84	38.55	54.00	-15.45	VERTICAL	Average
6	4882.016	46.12	31.56	5.52	36.84	46.36	74.00	-27.64	VERTICAL	Peak
7	7323.727	35.20	36.00	6.13	37.43	39.90	54.00	-14.10	VERTICAL	Average
8	7323.727	42.37	36.00	6.13	37.43	47.07	74.00	-26.93	VERTICAL	Peak
9	9764.062	36.50	38.50	7.02	37.41	44.61	54.00	-9.39	VERTICAL	Average
10	9764.062	43.06	38.50	7.02	37.41	51.17	74.00	-22.83	VERTICAL	Peak
11	12205.200	36.93	38.74	8.08	37.00	46.75	54.00	-7.25	VERTICAL	Average
12	12205.200	43.12	38.74	8.08	37.00	52.94	74.00	-21.06	VERTICAL	Peak


Mode:02; Polarization:Horizontal; Modulation:GFSK; Channel:High

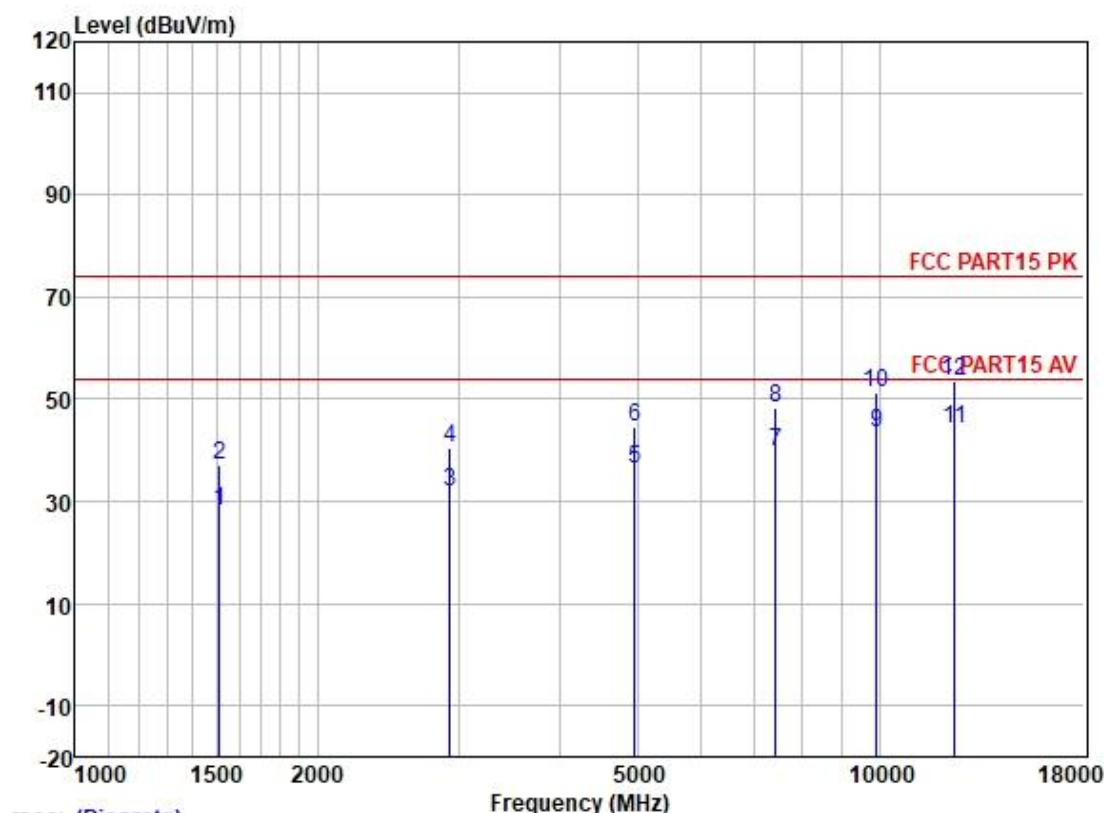

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1511.833	37.77	25.51	2.80	38.10	27.98	54.00	-26.02	HORIZONTAL	Average
2	1511.833	46.82	25.51	2.80	38.10	37.03	74.00	-36.97	HORIZONTAL	Peak
3	2922.174	37.08	28.32	3.72	37.32	31.80	54.00	-22.20	HORIZONTAL	Average
4	2922.174	45.68	28.32	3.72	37.32	40.40	74.00	-33.60	HORIZONTAL	Peak
5	4960.497	35.84	31.65	5.65	36.84	36.30	54.00	-17.70	HORIZONTAL	Average
6	4960.497	44.15	31.65	5.65	36.84	44.61	74.00	-29.39	HORIZONTAL	Peak
7	7440.038	34.73	36.27	6.22	37.47	39.75	54.00	-14.25	HORIZONTAL	Average
8	7440.038	43.30	36.27	6.22	37.47	48.32	74.00	-25.68	HORIZONTAL	Peak
9	9920.588	35.18	38.65	6.96	37.40	43.39	54.00	-10.61	HORIZONTAL	Average
10	9920.588	43.10	38.65	6.96	37.40	51.31	74.00	-22.69	HORIZONTAL	Peak
11	12400.180	34.72	38.57	7.97	36.88	44.38	54.00	-9.62	HORIZONTAL	Average
12	12400.180	43.79	38.57	7.97	36.88	53.45	74.00	-20.55	HORIZONTAL	Peak

Mode:02; Polarization:Horizontal; Modulation:GFSK; Channel:High

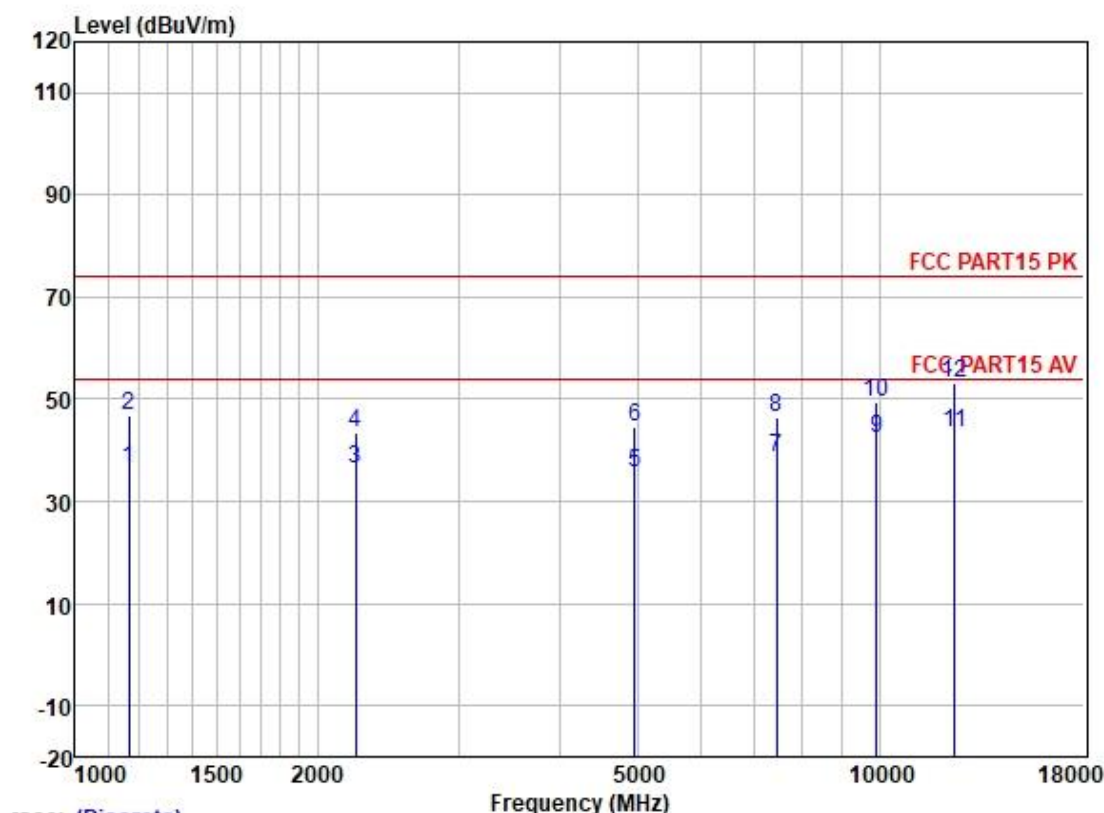


Trace: (Discrete)

Acc. (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1165.546	47.68	24.54	2.39	38.40	36.21	54.00	-17.79	VERTICAL	Average
2	1165.546	58.27	24.54	2.39	38.40	46.80	74.00	-27.20	VERTICAL	Peak
3	2233.396	43.88	26.80	3.23	37.64	36.27	54.00	-17.73	VERTICAL	Average
4	2233.396	51.16	26.80	3.23	37.64	43.55	74.00	-30.45	VERTICAL	Peak
5	4960.975	35.35	31.65	5.65	36.84	35.81	54.00	-18.19	VERTICAL	Average
6	4960.975	44.04	31.65	5.65	36.84	44.50	74.00	-29.50	VERTICAL	Peak
7	7440.763	33.61	36.27	6.22	37.47	38.63	54.00	-15.37	VERTICAL	Average
8	7440.763	41.58	36.27	6.22	37.47	46.60	74.00	-27.40	VERTICAL	Peak
9	9920.836	34.31	38.65	6.96	37.40	42.52	54.00	-11.48	VERTICAL	Average
10	9920.836	41.30	38.65	6.96	37.40	49.51	74.00	-24.49	VERTICAL	Peak
11	12400.540	33.96	38.57	7.97	36.88	43.62	54.00	-10.38	VERTICAL	Average
12	12400.540	43.33	38.57	7.97	36.88	52.99	74.00	-21.01	VERTICAL	Peak


Mode:02; Polarization:Horizontal; Modulation:GFSK; Channel:High

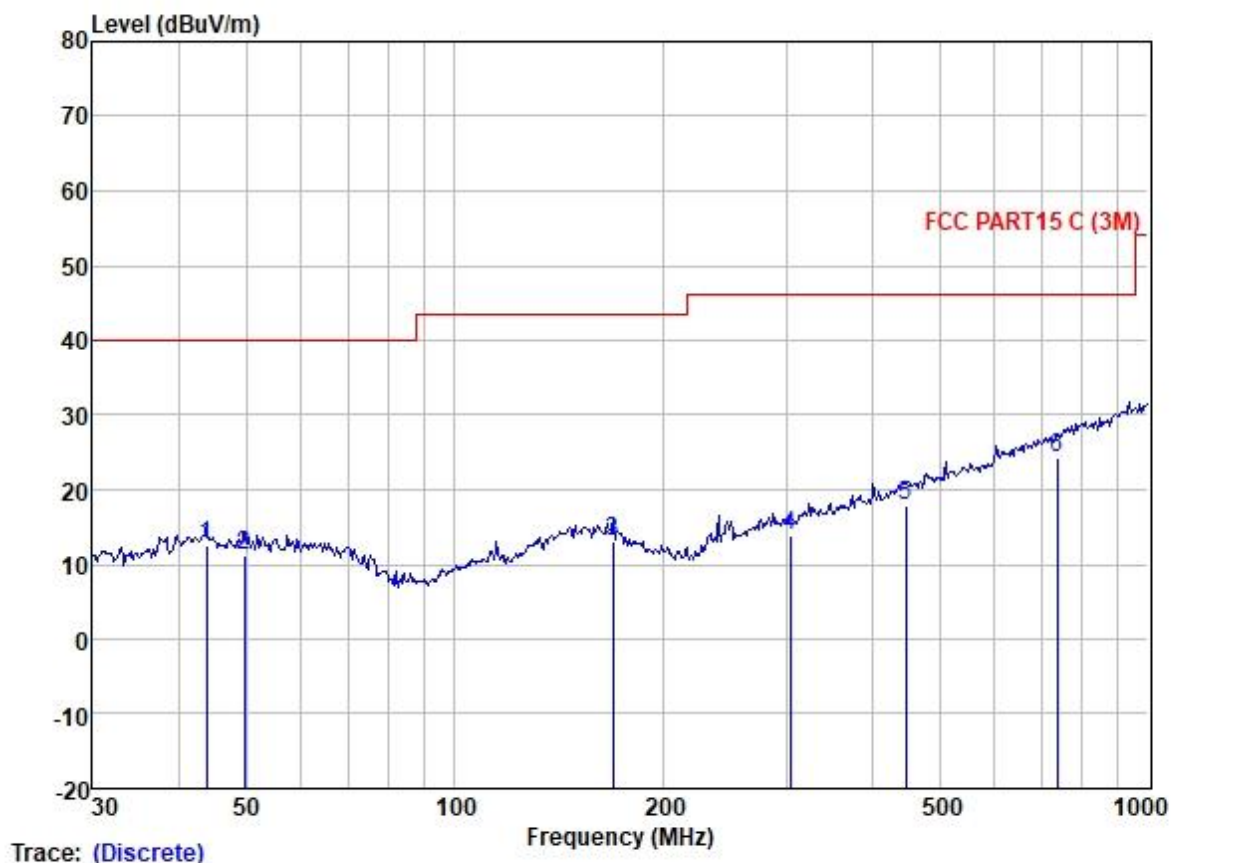

Site : SGS
Condition : FCC PART15 C (3M) HORIZONTAL
Job :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	43.81	24.71	13.79	1.12	27.17	12.45	40.00	-27.55	HORIZONTAL	QP
2	49.71	23.41	13.91	1.14	27.17	11.29	40.00	-28.71	HORIZONTAL	QP
3	169.01	24.25	13.20	2.39	26.77	13.07	43.50	-30.43	HORIZONTAL	QP
4	304.61	23.58	13.70	3.21	26.57	13.92	46.00	-32.08	HORIZONTAL	QP
5	446.41	24.23	17.23	4.19	27.65	18.00	46.00	-28.00	HORIZONTAL	QP
6	739.66	24.57	22.00	5.93	28.11	24.39	46.00	-21.61	HORIZONTAL	QP

Mode:02; Polarization:Vertical; Modulation:GFSK; Channel:High

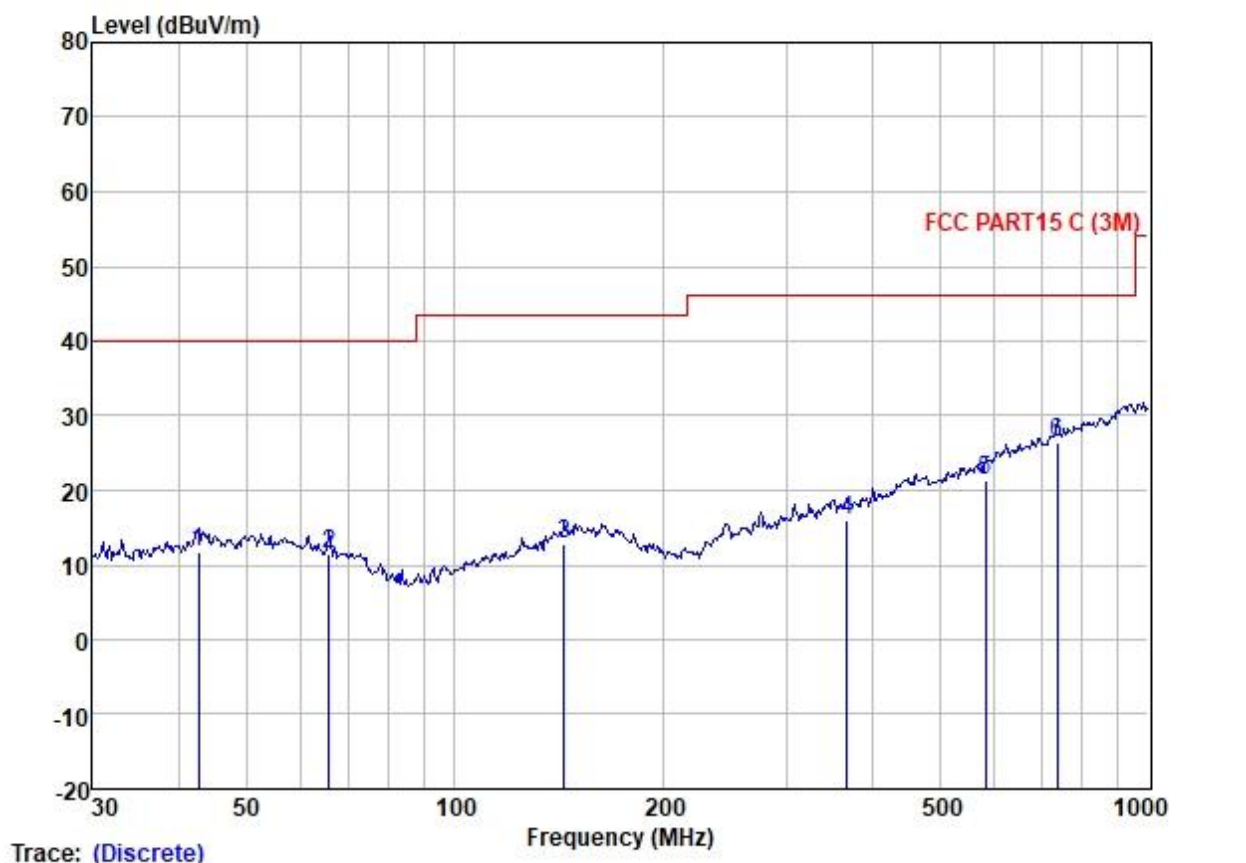

Site : SGS
Condition : FCC PART15 C (3M) VERTICAL
Job :
Model :
Power :
Test Mode :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Measured Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dBuV		
1	42.60	23.99	13.73	1.11	27.17	11.66	40.00	-28.34	VERTICAL	QP
2	65.80	24.53	12.63	1.36	27.15	11.37	40.00	-28.63	VERTICAL	QP
3	143.83	23.94	13.60	2.15	26.88	12.81	43.50	-30.69	VERTICAL	QP
4	368.11	24.28	15.13	3.76	27.18	15.99	46.00	-30.01	VERTICAL	QP
5	582.74	25.12	19.25	5.06	28.19	21.24	46.00	-24.76	VERTICAL	QP
6	739.66	26.53	22.00	5.93	28.11	26.35	46.00	-19.65	VERTICAL	QP



8 Appendix

Cable Loss=0.9 dB

8.1 Appendix A: 20dB Emission Bandwidth

8.1.1 Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.888	2401.544	2402.432	---	PASS
		2441	0.870	2440.538	2441.408	---	PASS
		2480	0.885	2479.544	2480.429	---	PASS
2DH5	Ant1	2402	1.323	2401.334	2402.657	---	PASS
		2441	1.287	2440.337	2441.624	---	PASS
		2480	1.272	2479.337	2480.609	---	PASS



8.1.2 Test Graphs

DH5_Ant1_2402




DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402

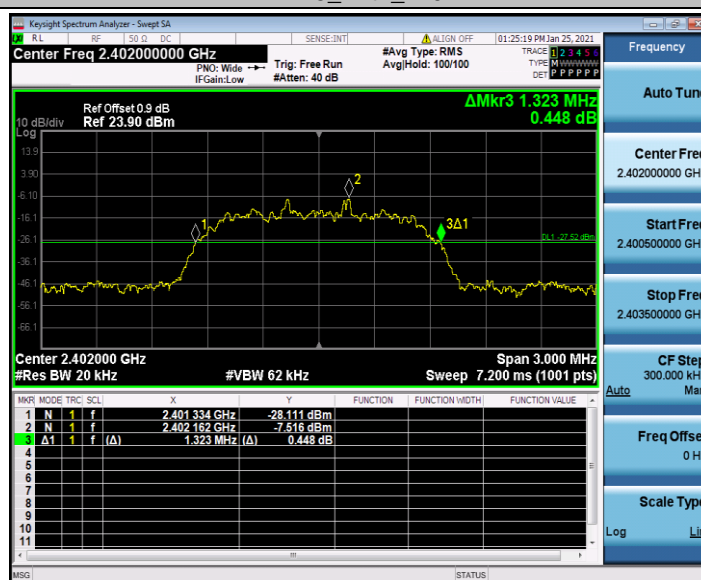

2DH5_Ant1_2441



2DH5_Ant1_2480





8.2 Appendix B: Maximum conducted output power

8.2.1 Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-2.59	<=20.97	PASS
		2441	-2.47	<=20.97	PASS
		2480	-2.42	<=20.97	PASS
2DH5	Ant1	2402	-1.91	<=20.97	PASS
		2441	-1.85	<=20.97	PASS
		2480	-1.79	<=20.97	PASS




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


8.2.2 Test Graphs

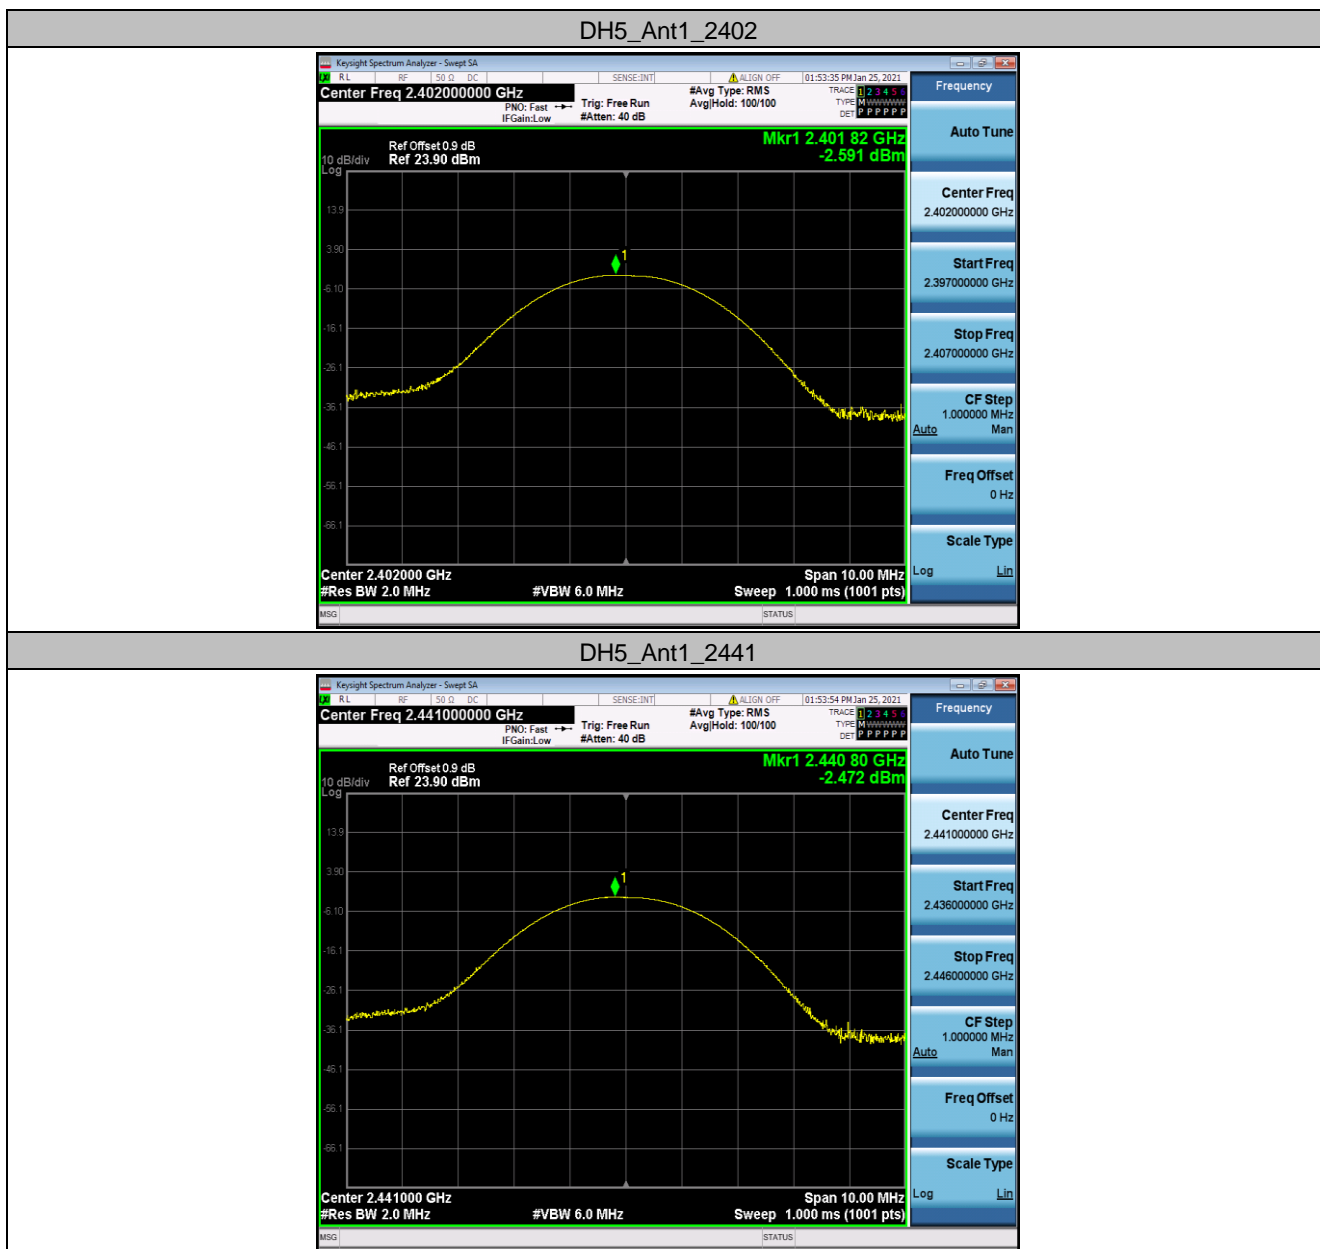


DH5_Ant1_2480

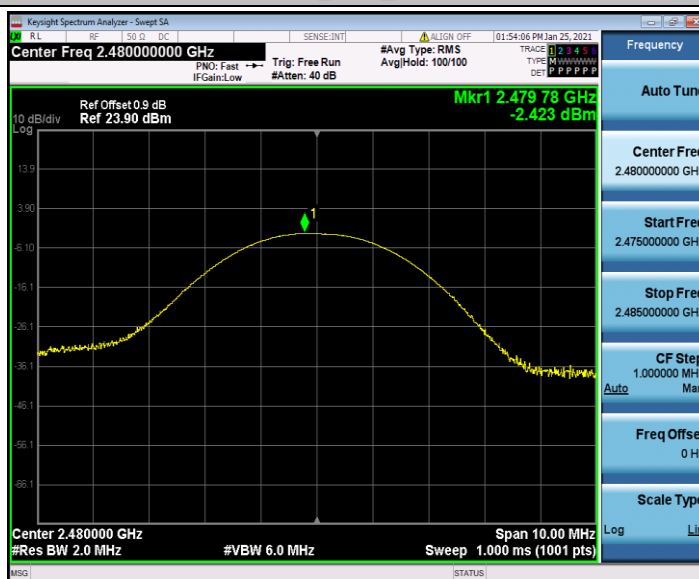


2DH5_Ant1_2402

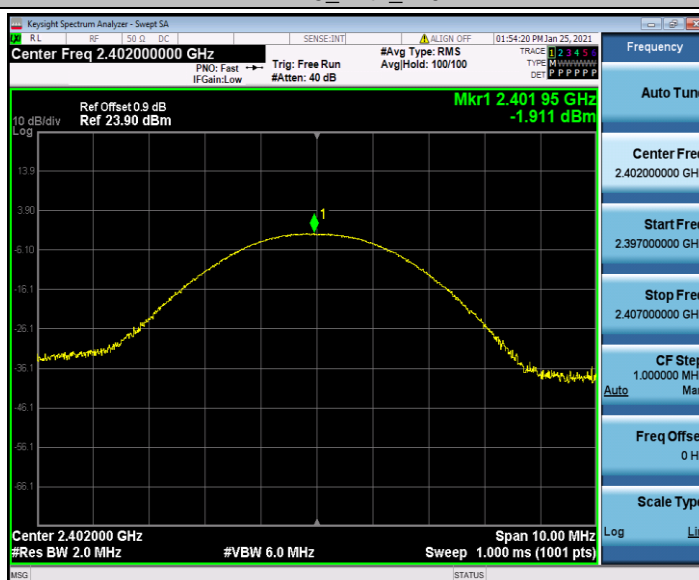

2DH5_Ant1_2441

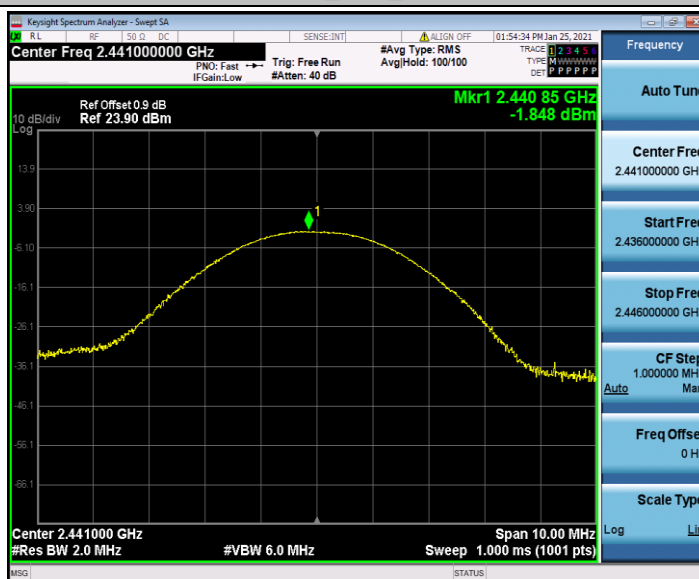

2DH5_Ant1_2480

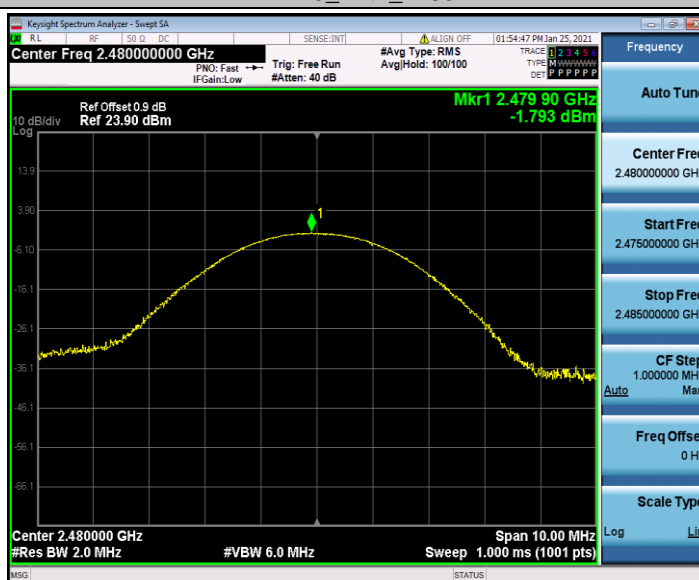



8.3 Appendix C: Carrier frequency separation

8.3.1 Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop_2402	1.047	≥ 0.592	PASS
		Hop_2441	0.930	≥ 0.580	PASS
		Hop_2480	0.996	≥ 0.590	PASS

8.3.2 Test Graphs

