



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX n Mode(40M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2422	36.01	500	Pass
2437	36.32	500	Pass
2452	36.34	500	Pass


TX CH 03

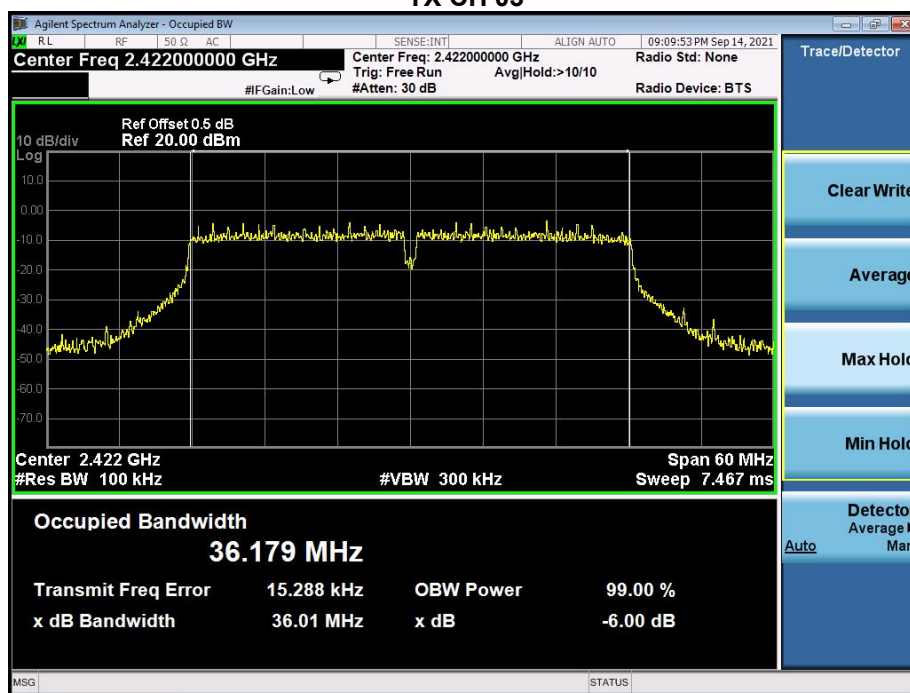

TX CH 06

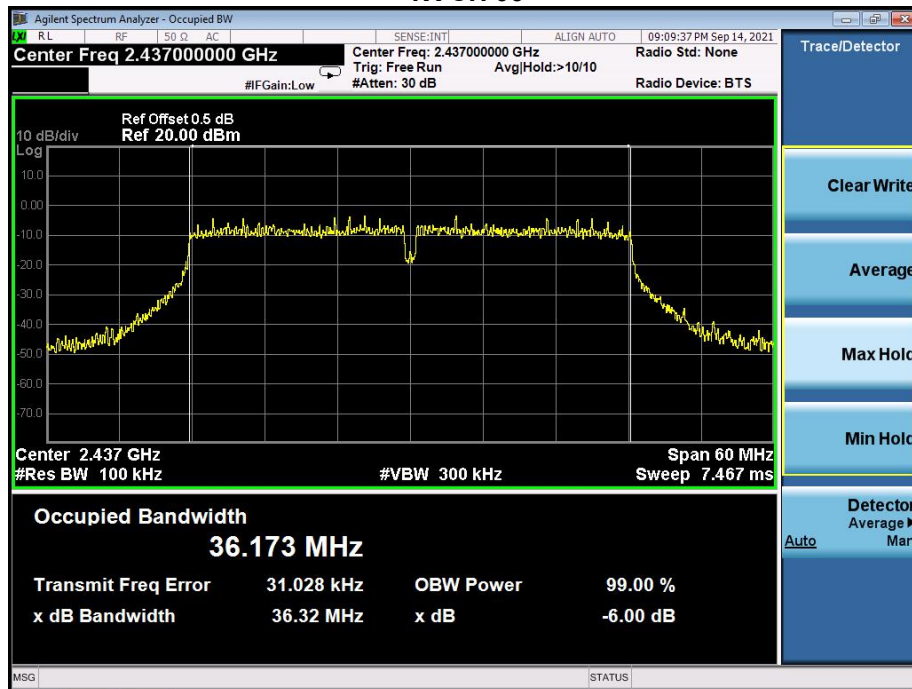

TX CH 09

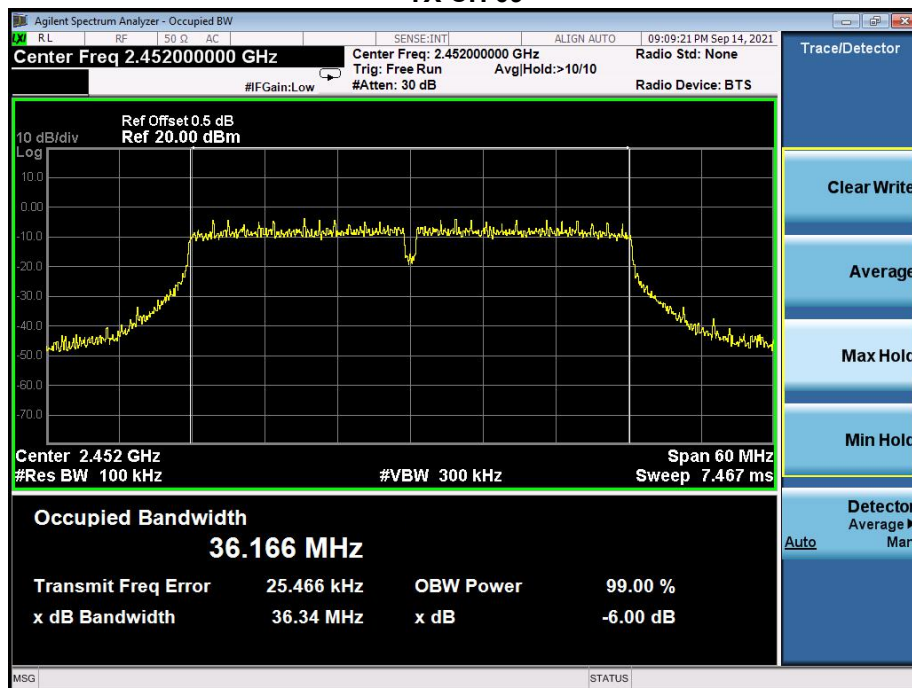

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	30dBm	2400-2483.5	PASS

11.3 Test Procedure

- The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

11.5 Test Result

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	13.887	30
	2437	14.619	30
	2462	14.628	30
802.11g	2412	13.449	30
	2437	13.576	30
	2462	13.442	30
802.11n20	2412	12.183	30
	2437	12.373	30
	2462	12.161	30
802.11n40	2422	11.332	30
	2437	11.277	30
	2452	11.421	30

12. 100 Khz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test Procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize..

12.4 EUT Operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

12.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V


802.11b: Band Edge, Left Side

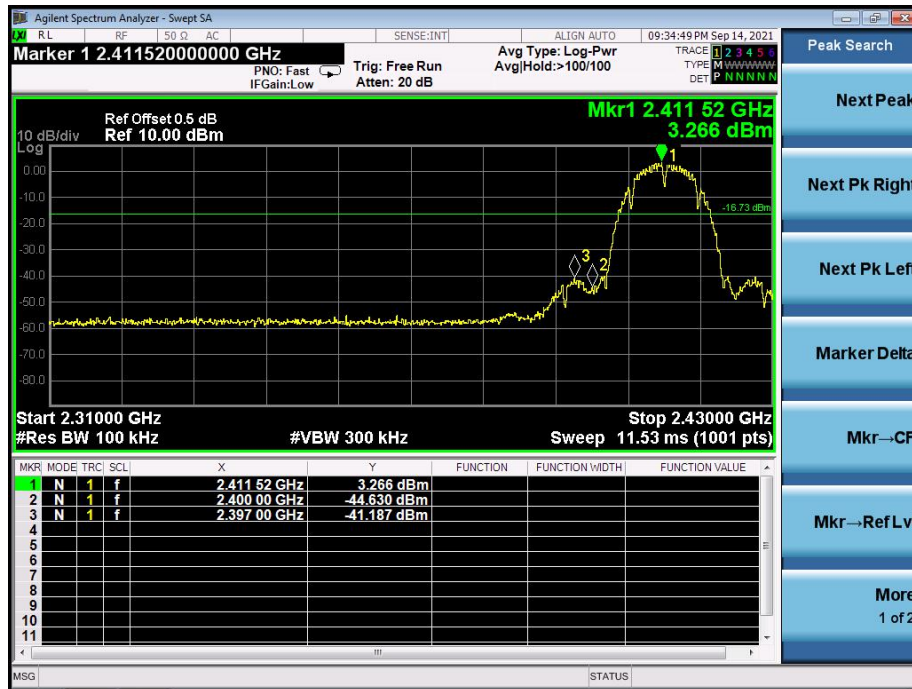


802.11b: Band Edge, Right Side




802.11g: Band Edge, Left Side

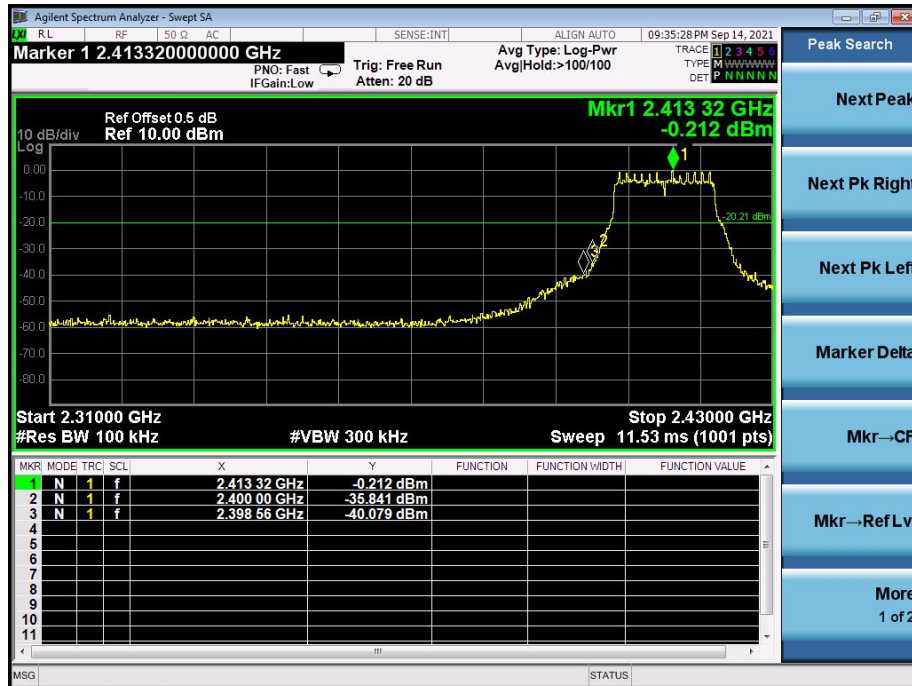


802.11g: Band Edge, Right Side

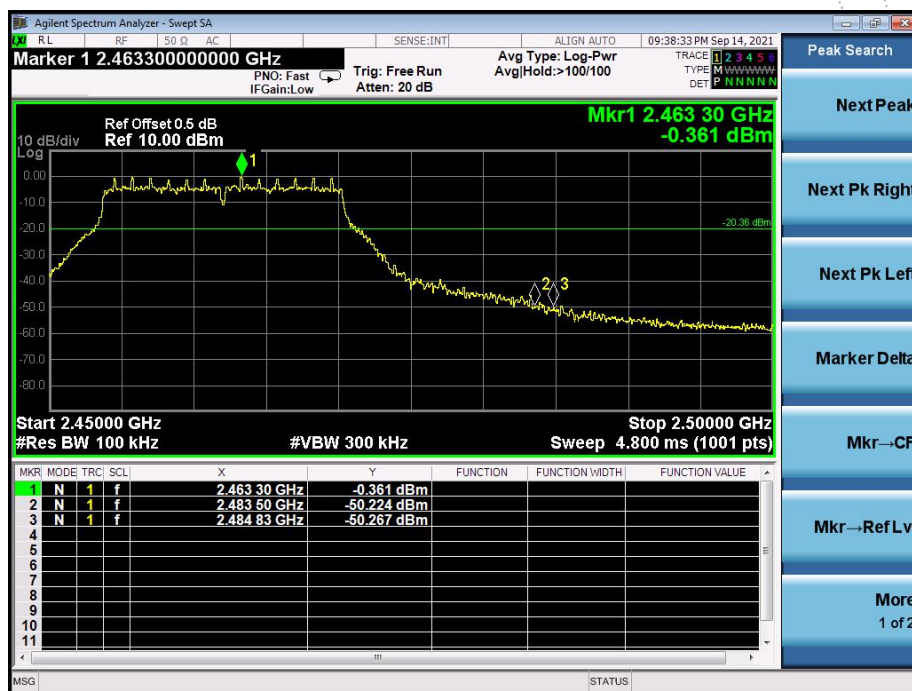

802.11n-HT20: Band Edge, Left Side

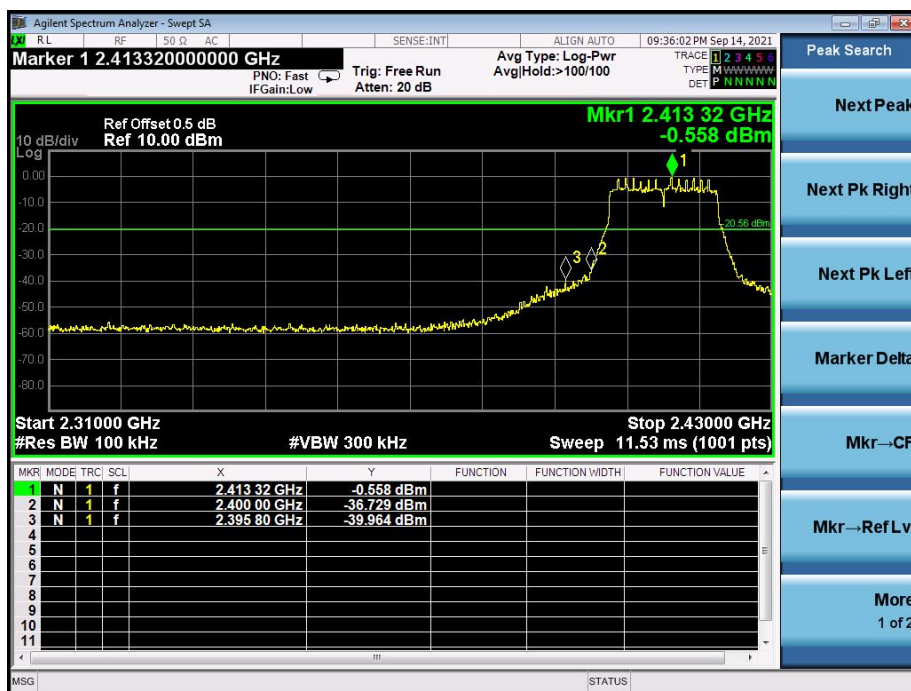


802.11n-HT20: Band Edge, Right Side

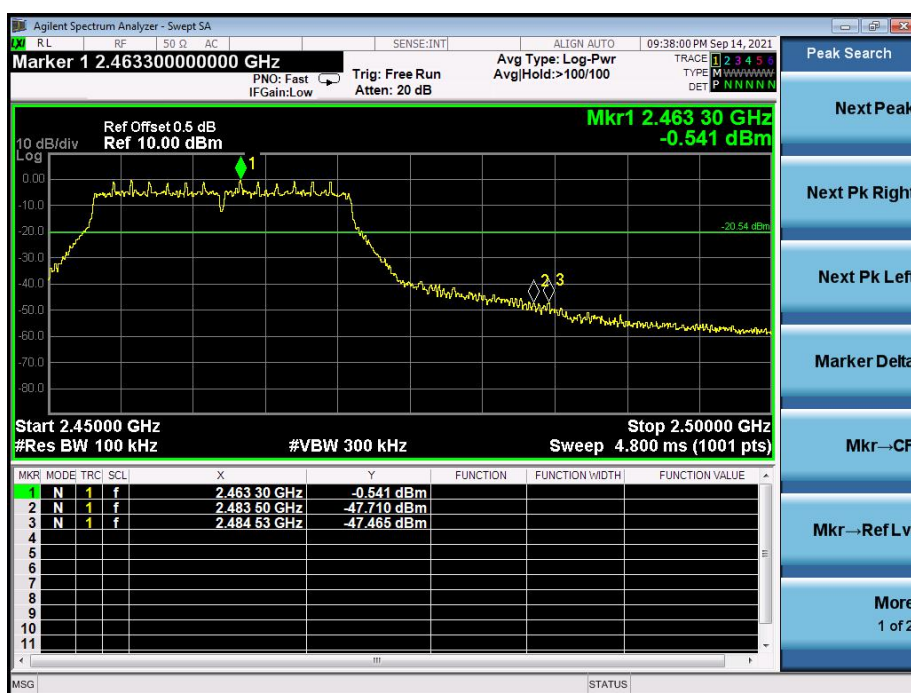

802.11n-HT40: Band Edge, Left Side




802.11n-HT40: Band Edge, Right Side

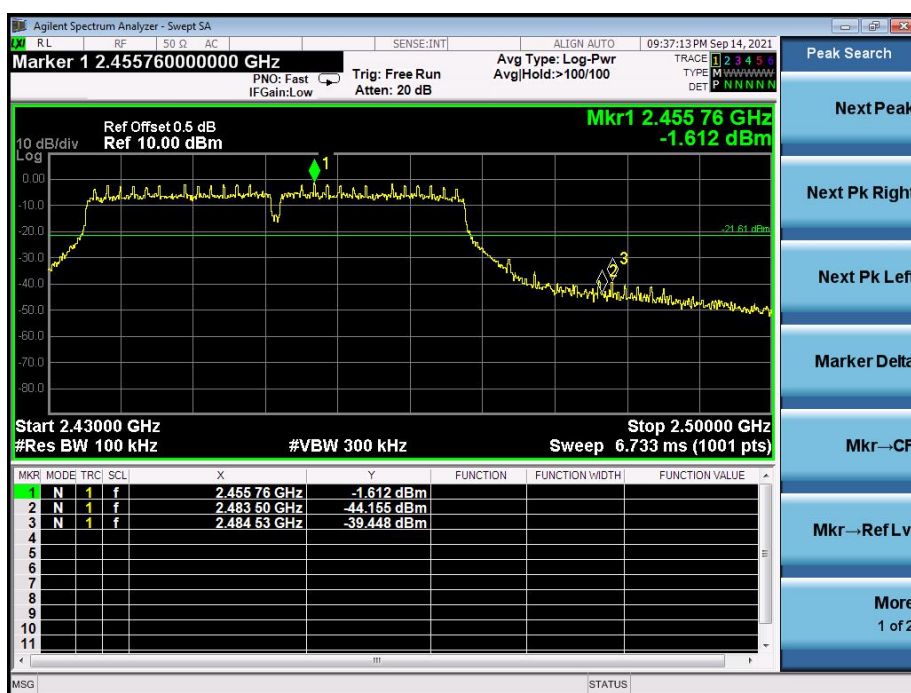


CONDUCTED EMISSION MEASUREMENT

802.11b


Low Channel 2412MHz

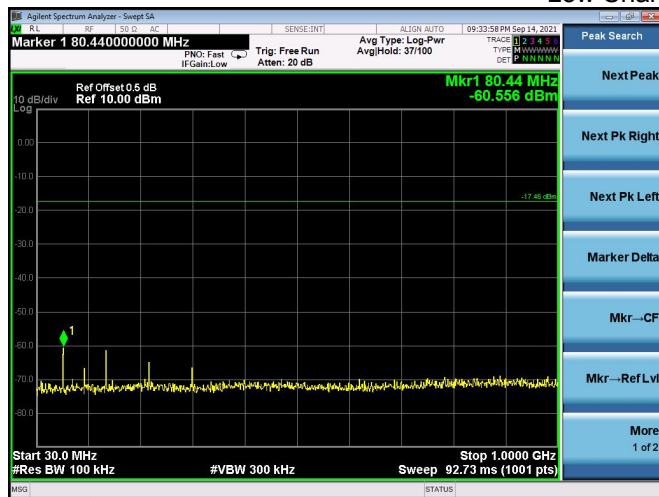

Middle Channel 2437MHz

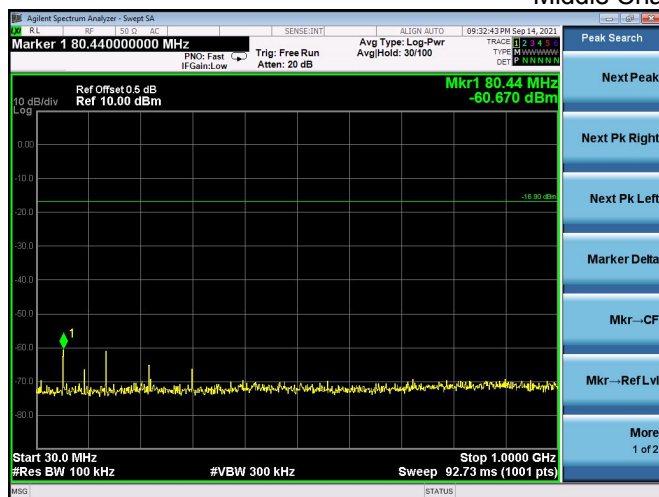


High Channel 2462MHz

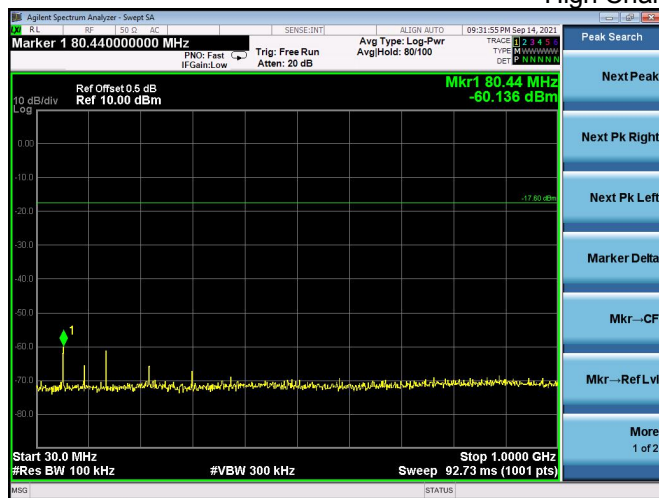


802.11g


Low Channel 2412MHz

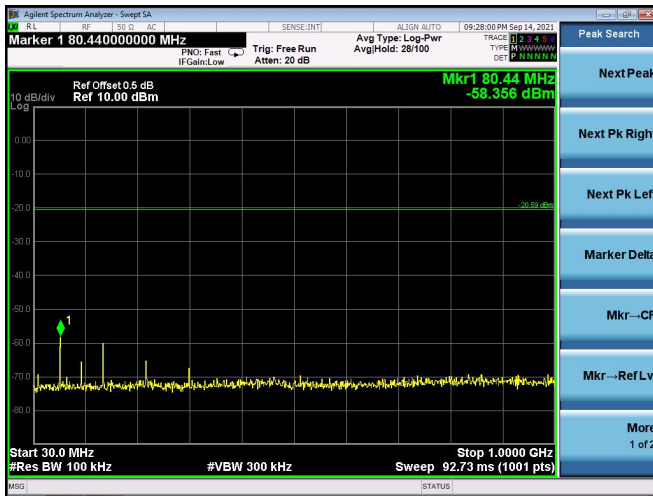

Middle Channel 2437MHz

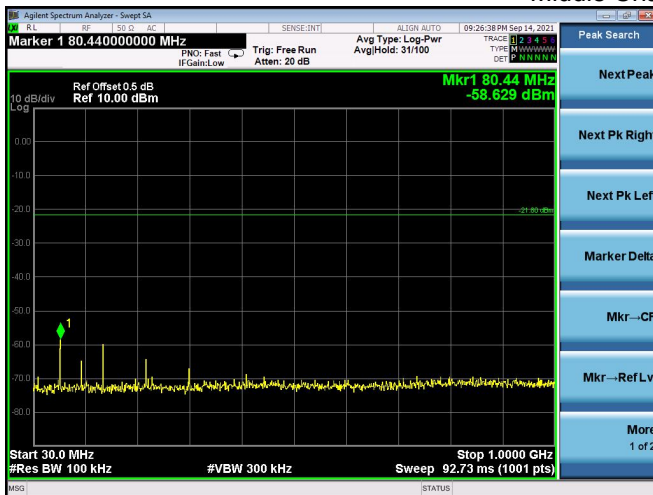


High Channel 2462MHz

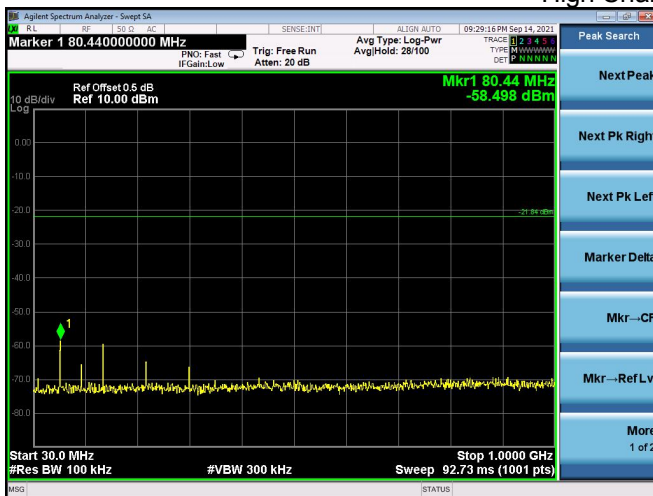


802.11n20

Low Channel 2412MHz

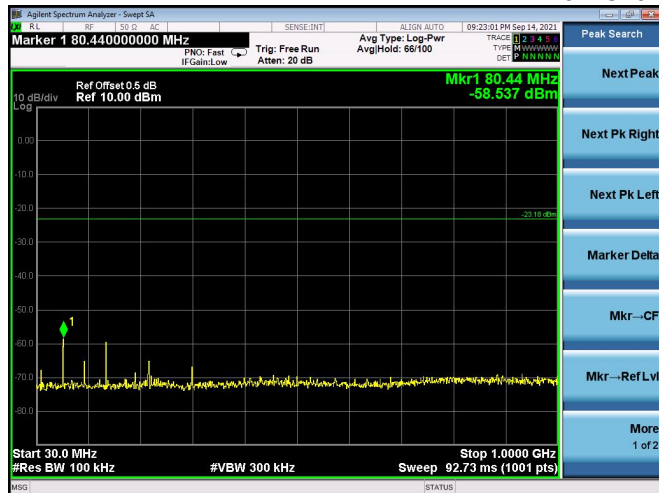

Middle Channel 2437MHz

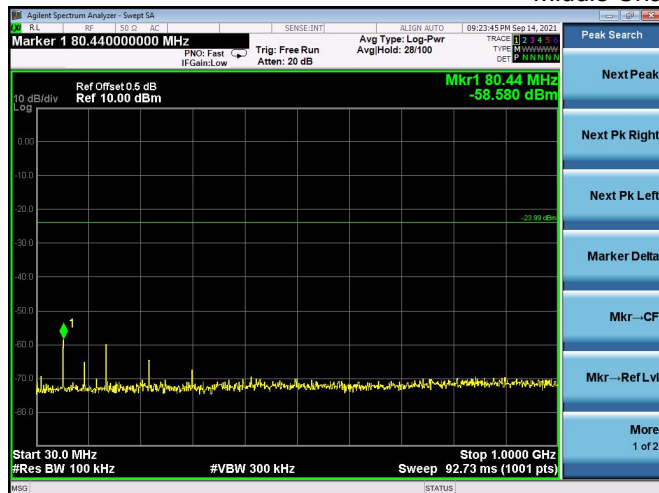

High Channel 2462MHz

