

SAR Plots

- Verification Plots
- SAR Test Plots

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:920

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 38.146$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(7.2, 7.2, 7.2) @ 2450 MHz; Calibrated: 5/27/2020 Electronics: DAE4 Sn1335
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: ELI v6.0; Type: QDOVA002AA; Serial: 1166
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-05-04; Ambient Temp: 19.9; Tissue Temp: 19.7

2450 MHz System Verification (100 mW)


Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.32 W/kg; SAR(10 g) = 2.49 W/kg

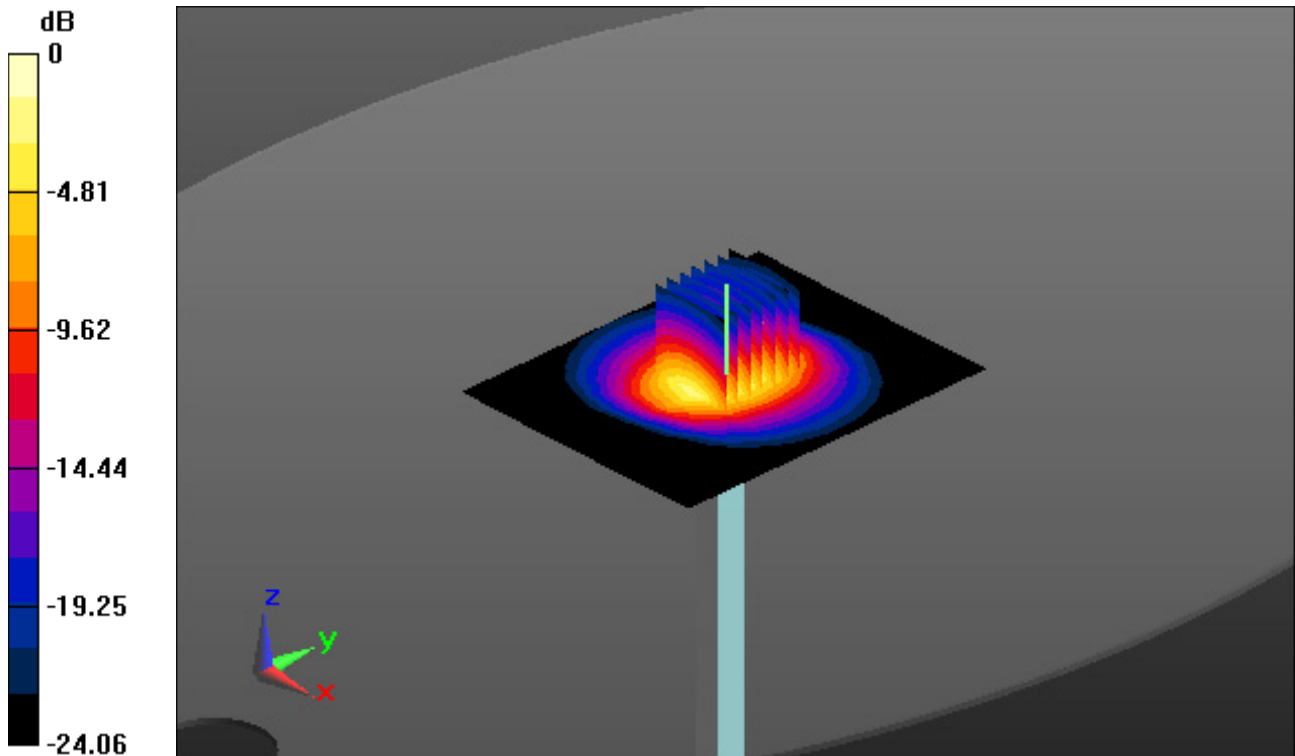

0 dB = 8.9 W/kg

DT&C Co., Ltd.

DUT: SP99; Type: Bluetooth Headset

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(7.2, 7.2, 7.2) @ 2441 MHz; Calibrated: 5/27/2020 Electronics: DAE4 Sn1335

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: ELI v6.0; Type: QDOVA002AA; Serial: 1166

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-05-04; Ambient Temp: 19.9; Tissue Temp: 19.7

Touch from Body, Rear, Bluetooth 1 Mbps Ch. 39, Ant Internal


Area Scan (15x15x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.976 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.291 W/kg

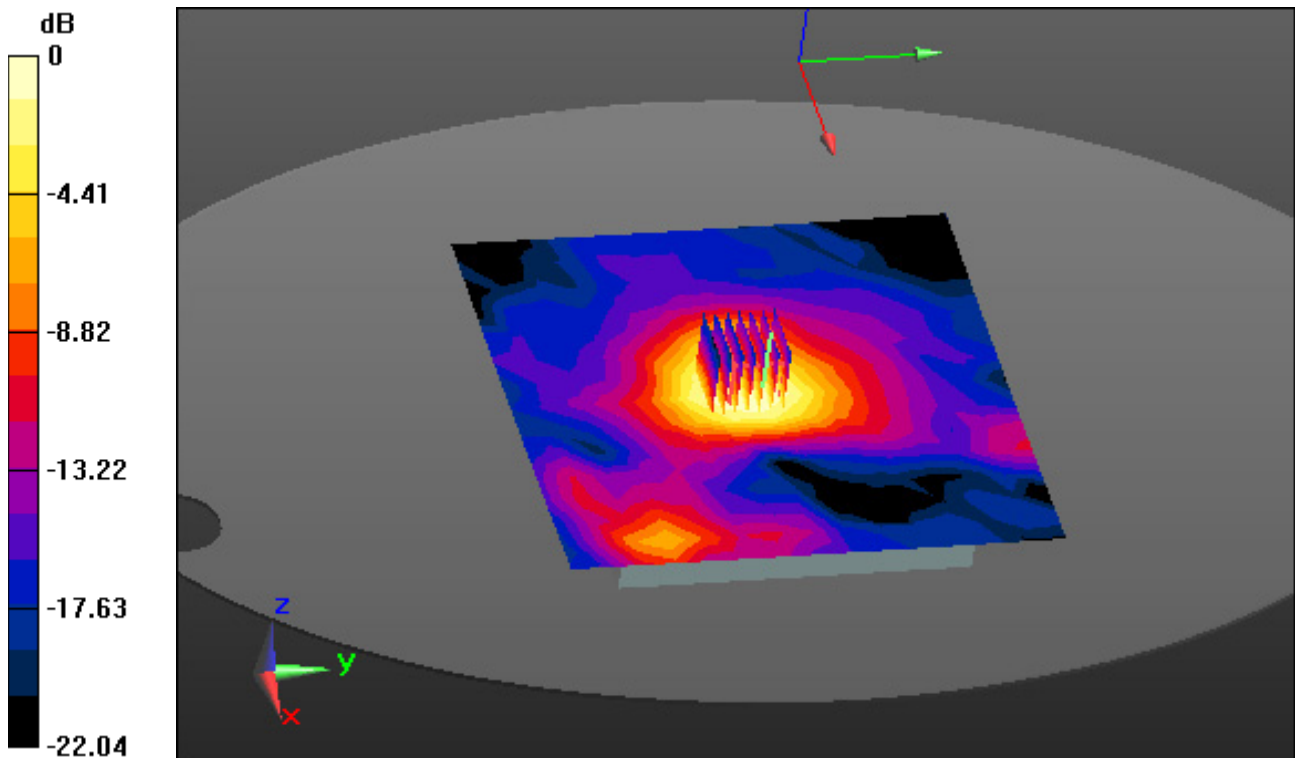

0 dB = 0.756 W/kg