



# TEST REPORT

**Product Name** : 3-in-1 Foldable Wireless Charger  
**Brand Name** : N/A  
**Model** : 141 0020 BD2 WH  
**Series Model** : BXMA1410020,141 0020 BD2 BA,141 0020 BD2 CR,141 0020 BD2 LB,141 0020 BD2 XX  
**FCC ID** : 2ADH6-1410020  
**Applicant** : E-filliate Incorporated  
**Address** : 11321 White Rock Rd., Rancho Cordova, CA 95742, USA  
**Manufacturer** : E-filliate Incorporated  
**Address** : 11321 White Rock Rd., Rancho Cordova, CA 95742, USA  
**Standard(s)** : FCC CFR Title 47 Part 15 Subpart C  
**Date of Receipt** : Aug.02, 2024  
**Date of Test** : Aug.02, 2024~ Aug.14, 2024  
**Issued Date** : Aug.14, 2024

**Issued By:** **Guangdong Asia Hongke Test Technology Limited**  
B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86 0755-230967639      Fax.: +86 0755-230967639

**Reviewed by:**

Leon Yi

Leon.yi

**Approved by:**

Sean She

Sean She



Note: This device has been tested and found to comply with the standard(s) listed, this test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory. This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited. If there is a need to alter or revise this document, the right belongs to Guangdong Asia Hongke Test Technology Limited, and it should give a prior written notice of the revision document. This test report must not be used by the client to claim product endorsement.

**Guangdong Asia Hongke Test Technology Limited**

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.

**Report Revise Record**

Report Version	Issued Date	Notes
M1	Aug.14, 2024	Initial Release

## Contents

<b>1 TEST SUMMARY .....</b>	<b>4</b>
1.1 TEST STANDARDS.....	4
1.2 TEST SUMMARY .....	4
1.3 TEST FACILITY .....	5
1.4 MEASUREMENT UNCERTAINTY .....	5
<b>2 GENGGENERAL INFORMATION .....</b>	<b>6</b>
2.1 ENVIRONMENTAL CONDITIONS.....	6
2.2 GENERAL DESCRIPTION OF EUT .....	6
2.3 DESCRIPTION OF THE TEST MODE.....	7
2.4 SPECIAL ACCESSORIES .....	7
2.5 EQUIPMENT LIST FOR THE TEST .....	7
<b>3 TEST CONDITIONS AND RESULTS .....</b>	<b>9</b>
3.1 CONDUCTED EMISSIONS TEST.....	9
3.2 RADIATED EMISSIONS.....	12
3.3 20DB BANDWIDTH.....	18
3.4 ANTENNA REQUIREMENT.....	20
<b>4 TEST SETUP PHOTOGRAPHS OF EUT .....</b>	<b>21</b>
<b>5 EXTERNAL PHOTOGRAPHS OF EUT .....</b>	<b>21</b>
<b>6 INTERNAL PHOTOGRAPHS OF EUT.....</b>	<b>21</b>

## 1 TEST SUMMARY

### 1.1 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.207, 15.209, 15.215(c)

ANSI C63.10: 2013: American National Standard for Testing Unlicensed Wireless Devices

### 1.2 Test Summary

Test Item	Section in CFR 47	Test Result
Electric Field Radiated Emissions	FCC Part 15 C (Section15.209)	PASS
20dB Bandwidth/99% Bandwidth	FCC Part 15 C (Section15.215(c))	PASS
AC Power Line Conducted Emission	FCC Part 15 C (Section15.207)	PASS
Antenna Requirement	FCC Part 15 C (Section15.203)	PASS

## 1.3 Test Facility

### Test Laboratory:

#### Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

#### FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### IC —Registration No.: 31737 CAB identifier: CN0165

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

#### A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## 1.4 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Guangdong Asia Hongke Test Technology Limited's quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Asia Hongke laboratory is reported:

Test	Measurement Uncertainty	Notes
Power Line Conducted Emission	150KHz~30MHz ±1.20 dB	(1)
Radiated Emission	9KHz~30Hz ±3.10dB	(1)
Radiated Emission	9KHz~1GHz ±3.75dB	(1)
Radiated Emission	1GHz~18GHz ±3.88 dB	(1)
Radiated Emission	18GHz~40GHz ±3.88dB	(1)
RF power, conducted	30MHz~6GHz ±0.16dB	(1)
RF power density, conducted	±0.24dB	(1)
Spurious emissions, conducted	±0.21dB	(1)
Temperature	±1°C	(1)
Humidity	±3%	(1)
DC and low frequency voltages	±1.5%	(1)
Time	±2%	(1)
Duty cycle	±2%	(1)

The report uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty Multiplied by a coverage factor of  $k=2$  , providing a level of confidence of approximately 95%

## 2 GENERAL INFORMATION

### 2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2 General Description of EUT

Product Name:	3-in-1 Foldable Wireless Charger
Model/Type reference:	141 0020 BD2 WH
Power Supply:	Input: 9V=2A, 9V=3A Output:15(Max)/10/7.5/5W for Phone 3W(Max) for Earbud 2.5W(Max) for watch
Hardware version:	N/A
Software version:	N/A
Sample(s) Status:	AiT DG-240802008-01(Normal sample) AiTDG-240802008-02(Engineer sample)
<b>Wireless Charger:</b>	
Operation frequency:	Coil1: For Phone: 113kHz-205kHz Coil2: For Earphone: 113kHz-205kHz Coil3: Watch: 300kHz-350kHz
Modulation Technology:	ASK
Antenna Type:	Loop coil Antenna
Antenna gain:	0dBi
<b>Remark:</b>	The above DUT's information was declared by manufacturer. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.3 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

- Charging and communication mode

Test Modes:		
Mode 1	AC/DC Adapter+ EUT + Earphone + Watch + phone(Battery Status:< 1%)	Record
Mode 2	AC/DC Adapter+ EUT + Earphone + Watch + phone(Battery Status:< 50%)	Pre-tested
Mode 3	AC/DC Adapter+ EUT + Earphone + Watch + phone(Battery Status:< 99%)	Pre-tested
Mode 4	Stand-by mode.	Pre-tested

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

## 2.4 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Serial No.	Provided by	Other
Adapter	HNT	HNT-QC530	/	Test lab	/
Phone	YBZ	15W	/	Test lab	/
Watch	Apple	S6	/	Test lab	/
Earphone	PocBuds	K6	/	Test lab	/

## 2.5 Equipment List for the Test

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal. Due Date
1	Spectrum Analyzer	R&S	FSV40	101470	2023.09.08	2024.09.07
2	Spectrum Analyzer	Keysight	N9020A	MY51280643	2023.09.08	2024.09.07
3	EMI Measuring Receiver	R&S	ESR	101660	2023.09.08	2024.09.07
4	Low Noise Pre-Amplifier	HP	HP8447E	1937A01855	2023.09.08	2024.09.07
5	Low Noise Pre-Amplifier	Tsj	MLA-0120-A02-34	2648A04738	2023.09.08	2024.09.07
6	Passive Loop	ETS	6512	00165355	2022.09.04	2024.09.03
7	TRILOG Super Broadband test Antenna	SCHWARZBECK	VULB9160	9160-3206	2021.08.29	2024.08.28
8	Broadband Horn Antenna	SCHWARZBECK	BBHA9120D	452	2021.08.29	2024.08.28
9	SHF-EHF Horn Antenna 15-40GHz	SCHWARZBECK	BBHA9170	BBHA9170367d	2021.08.29	2024.08.28
10	EMI Measuring Receiver	R&S	ESR	101160	2023.09.13	2024.09.12
11	LISN	SCHWARZBECK	NNLK 8129	8130179	2023.10.29	2024.10.28
12	Pulse Limiter	R&S	ESH3-Z2	102789	2023.09.13	2024.09.12
13	Pro.Temp&Humi.chamber	MENTEK	MHP-150-1C	MAA08112501	2023.09.08	2024.09.07
14	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07

15	Signal Generator	Agilent	N5182A	MY50143009	2023.09.08	2024.09.07
16	Wideband Radio communication tester	R&S	CMW500	1201.0002K50	2023.09.08	2024.09.07
17	RF Automatic Test system	MW	MW100-RFCB	21033016	2023.09.08	2024.09.07
18	DC power supply	ZHAOXIN	RXN-305D-2	28070002559	N/A	N/A
19	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A
20	CE Software	EZ	EZ-EMC_CE	Ver.AIT-03A	N/A	N/A
21	RF Software	MW	MTS 8310	2.0.0.0	N/A	N/A
22	temporary antenna connector(Note)	NTS	R001	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 3 TEST CONDITIONS AND RESULTS


#### 3.1 Conducted Emissions Test

##### LIMIT

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

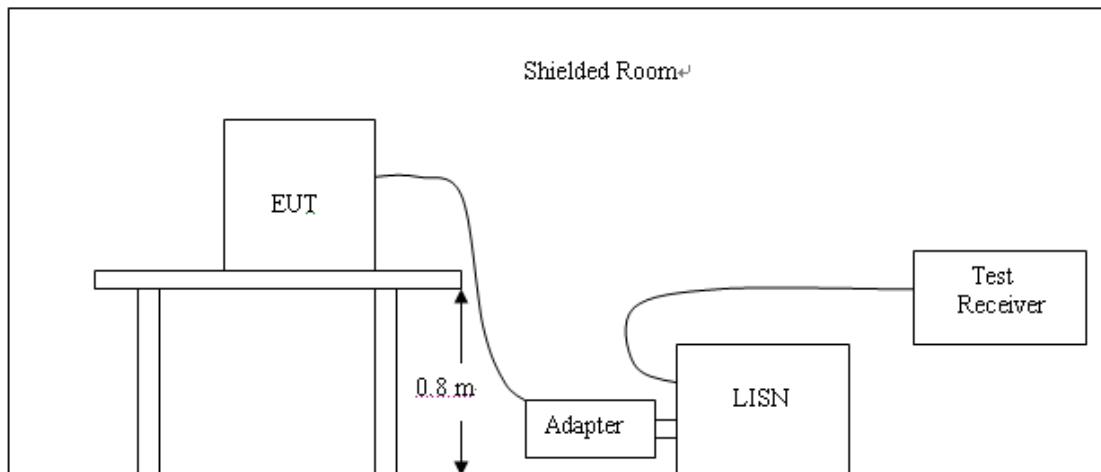


##### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

## TEST RESULTS

Remark: Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

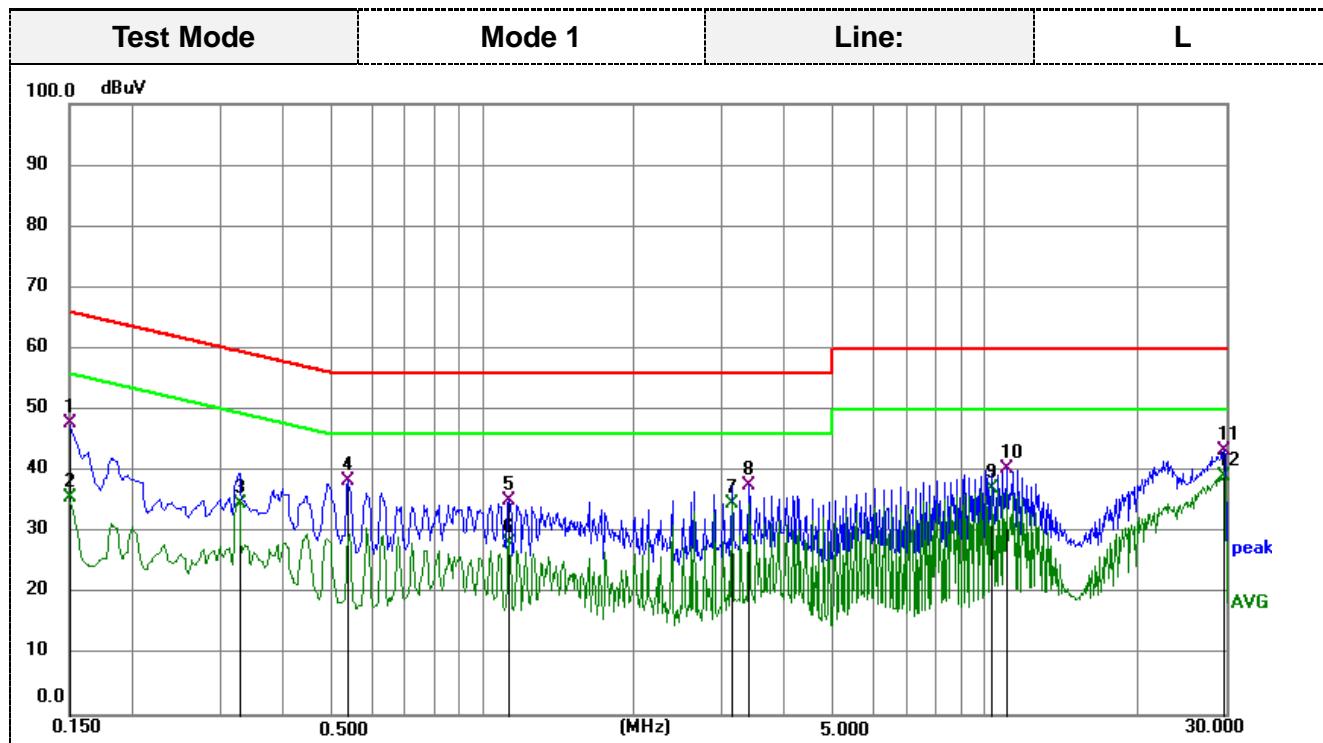


Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;

Measurement Result = Reading Level +Correct Factor;

Margin = Measurement Result- Limit

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark	
1	0.1500	35.85	11.84	47.69	66.00	-18.31	QP	
2	0.1500	23.79	11.84	35.63	56.00	-20.37	AVG	
3	0.3255	23.91	10.70	34.61	49.57	-14.96	AVG	
4	0.5370	27.53	10.69	38.22	56.00	-17.78	QP	
5	1.1265	24.43	10.67	35.10	56.00	-20.90	QP	
6	1.1265	17.56	10.67	28.23	46.00	-17.77	AVG	
7	3.1290	23.83	10.80	34.63	46.00	-11.37	AVG	
8	3.3810	26.70	10.95	37.65	56.00	-18.35	QP	
9	10.2660	25.96	11.06	37.02	50.00	-12.98	AVG	
10	11.0175	29.24	11.18	40.42	60.00	-19.58	QP	
11	29.6970	31.57	11.73	43.30	60.00	-16.70	QP	
12	29.6970	27.44	11.73	39.17	50.00	-10.83	AVG	

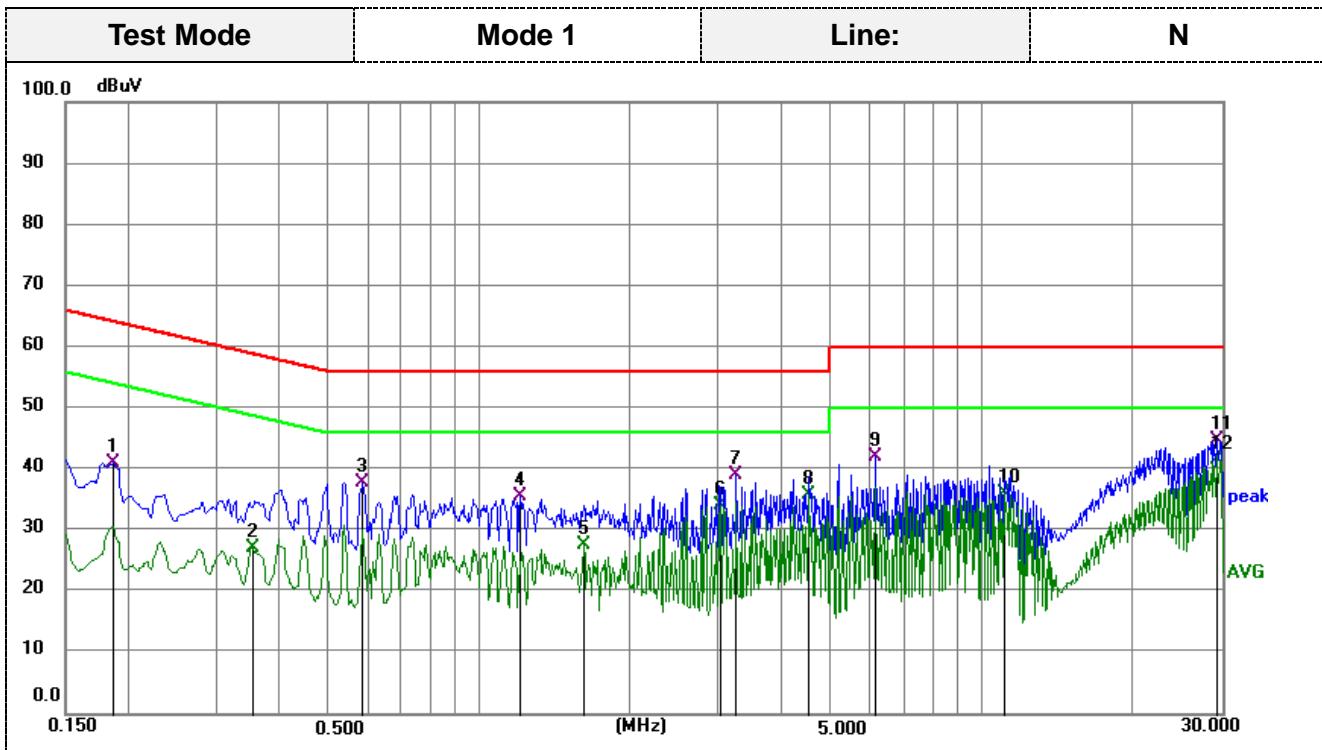

Remark: Correct Factor = Insertion loss of LISN + Cable loss + Insertion loss of Pulse Limiter;

Measurement Result = Reading Level +Correct Factor;

Margin = Measurement Result- Limit

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
1	0.1860	30.31	10.69	41.00	64.21	-23.21	QP
2	0.3525	16.56	10.68	27.24	48.90	-21.66	AVG
3	0.5865	27.19	10.68	37.87	56.00	-18.13	QP
4	1.2075	24.97	10.66	35.63	56.00	-20.37	QP
5	1.6170	16.95	10.72	27.67	46.00	-18.33	AVG
6	3.0120	23.24	10.78	34.02	46.00	-11.98	AVG
7	3.2505	28.25	10.83	39.08	56.00	-16.92	QP
8	4.5285	24.89	11.01	35.90	46.00	-10.10	AVG
9	6.1440	30.98	11.01	41.99	60.00	-18.01	QP
10	11.1345	25.01	11.16	36.17	50.00	-13.83	AVG
11	29.2605	33.12	11.60	44.72	60.00	-15.28	QP
12	29.2605	29.92	11.60	41.52	50.00	-8.48	AVG

## 3.2 Radiated Emissions

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


### TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

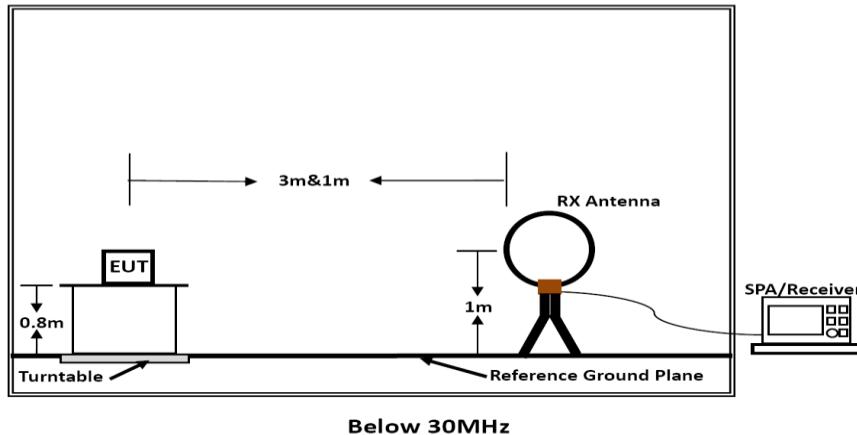


Below 30MHz

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

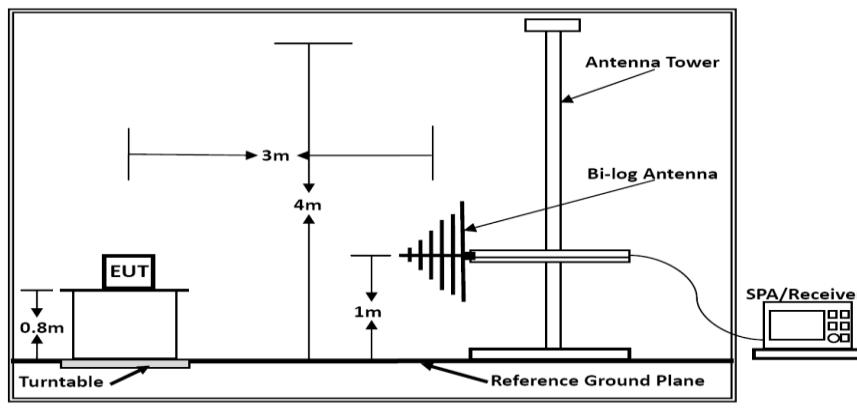

Below 1GHz

**(C) Radiated Emission Test Set-Up, Frequency above 1000MHz**

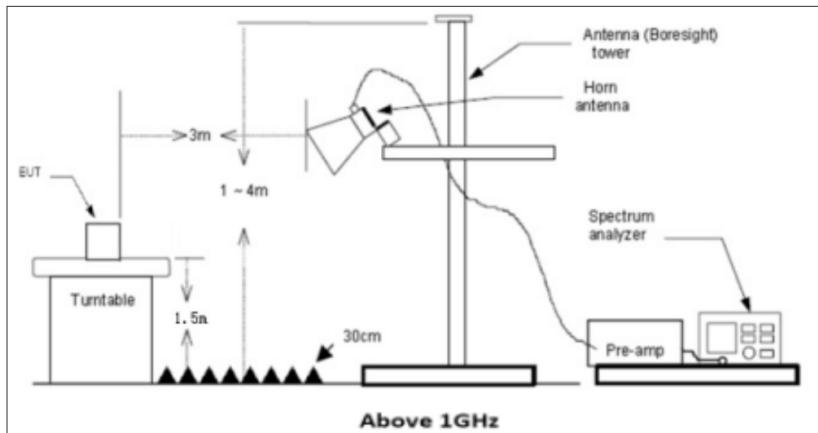

**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 1000MHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP

**TEST RESULTS**

Remark:

All test modes described in section 2.3 has been tested, only the worst result of Mode 1 is recorded as below:

## For 9KHz-150KHz




## Remark:

Emission Level = Reading + Factor;  
 Factor = Antenna Factor + Cable Loss;  
 Margin= Emission Level - Limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.0111	30.75	21.36	52.11	126.70	-74.59	QP
2	0.0303	31.81	21.42	53.23	117.98	-64.75	QP
3	0.0483	30.72	22.50	53.22	113.93	-60.71	QP
4	0.0734	31.12	22.68	53.80	110.29	-56.49	QP
5	0.1237	32.79	22.16	54.95	105.76	-50.81	QP
6 *	0.1466	53.35	21.93	75.28	104.28	-29.00	QP

## For 150KHz-30MHz

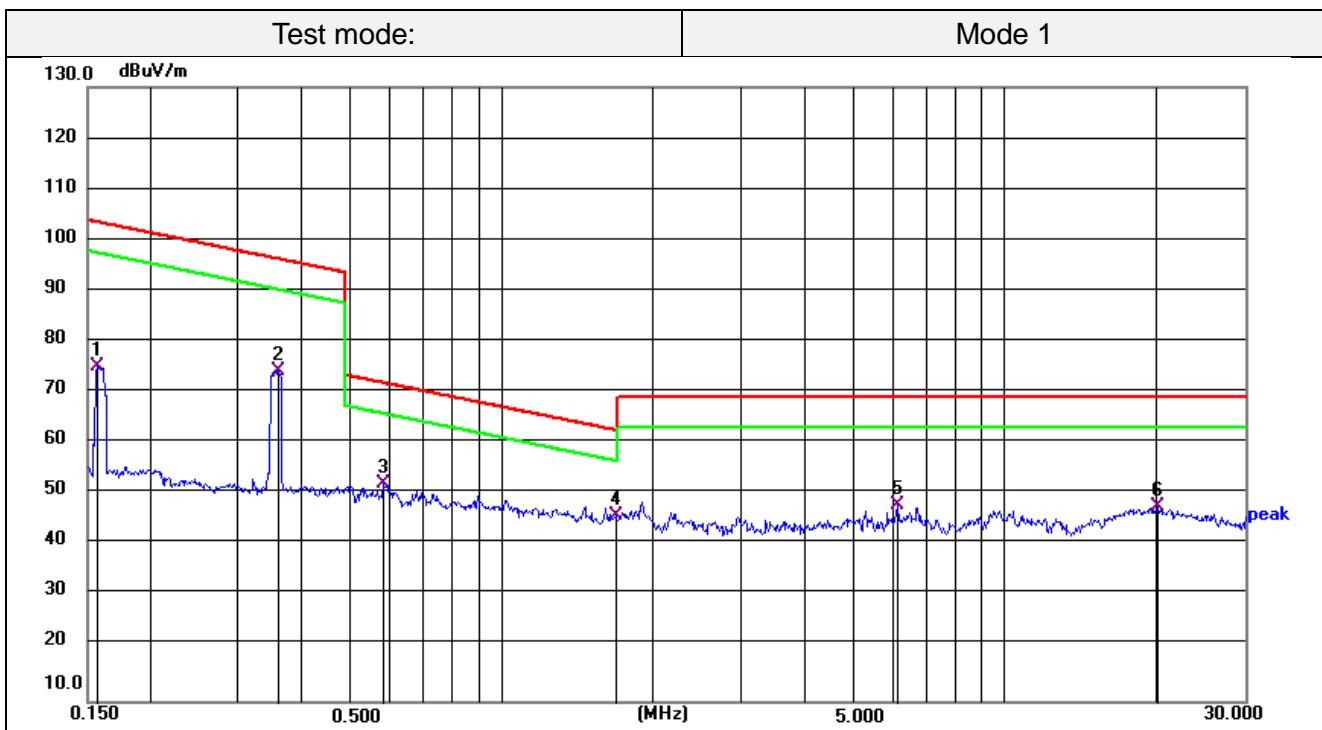


## Remark:

Emission Level = Reading + Factor;  
 Factor = Antenna Factor + Cable Loss;  
 Margin= Emission Level - Limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	0.1572	53.74	21.86	75.60	103.68	-28.08	QP
2	0.3593	53.00	21.57	74.57	96.49	-21.92	QP
3	0.5823	30.56	22.03	52.59	72.30	-19.71	QP
4 *	1.6800	23.82	22.46	46.28	63.10	-16.82	QP
5	6.1208	25.25	23.14	48.39	69.54	-21.15	QP
6	20.1623	23.82	24.34	48.16	69.54	-21.38	QP


## For 30MHz-1GHz

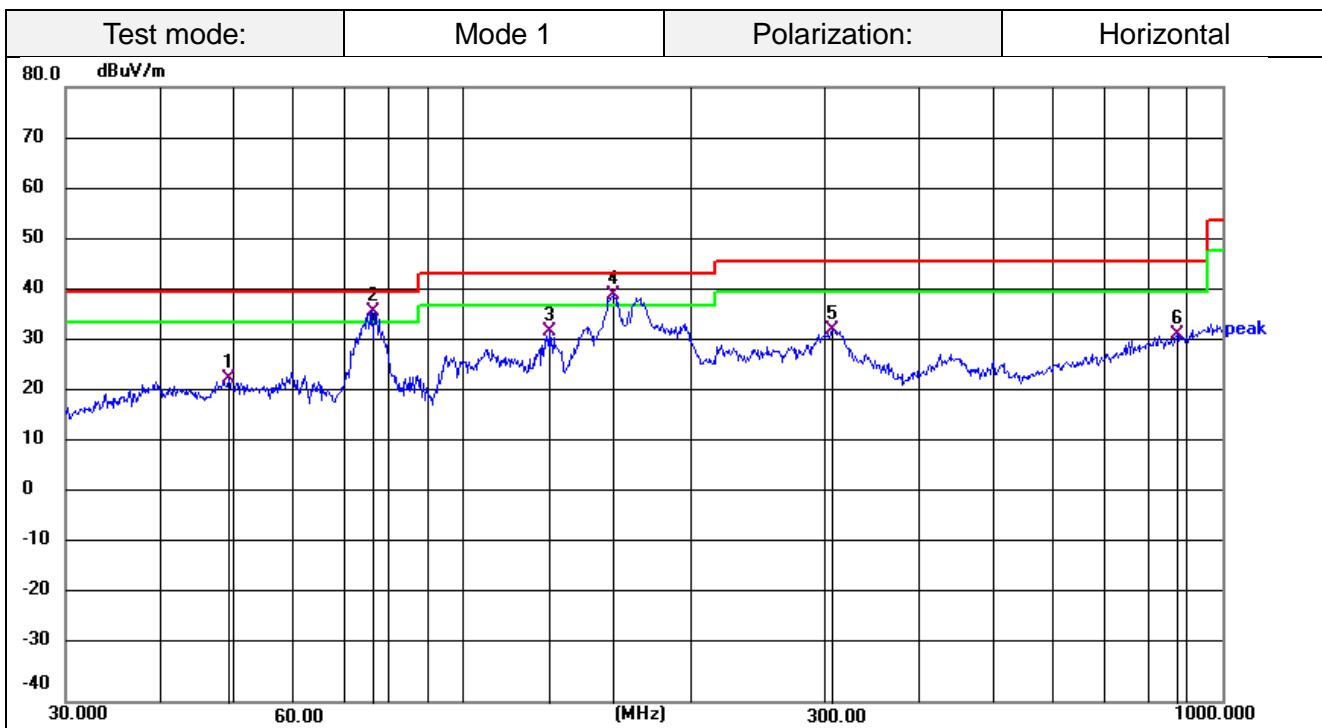

## Remark:

Emission Level = Reading + Factor;  
 Factor = Antenna Factor + Cable Loss – Pre-amplifier;  
 Margin= Emission Level - Limit.

No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Factor (dB/m)	Level (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Det.
1	49.1865	39.80	-16.60	23.20	40.00	-16.80	QP
2 *	76.5119	56.38	-20.23	36.15	40.00	-3.85	QP
3	129.9225	50.11	-17.72	32.39	43.50	-11.11	QP
4 !	158.1123	56.03	-16.53	39.50	43.50	-4.00	QP
5	306.7537	49.27	-16.75	32.52	46.00	-13.48	QP
6	872.1832	36.77	-5.15	31.62	46.00	-14.38	QP

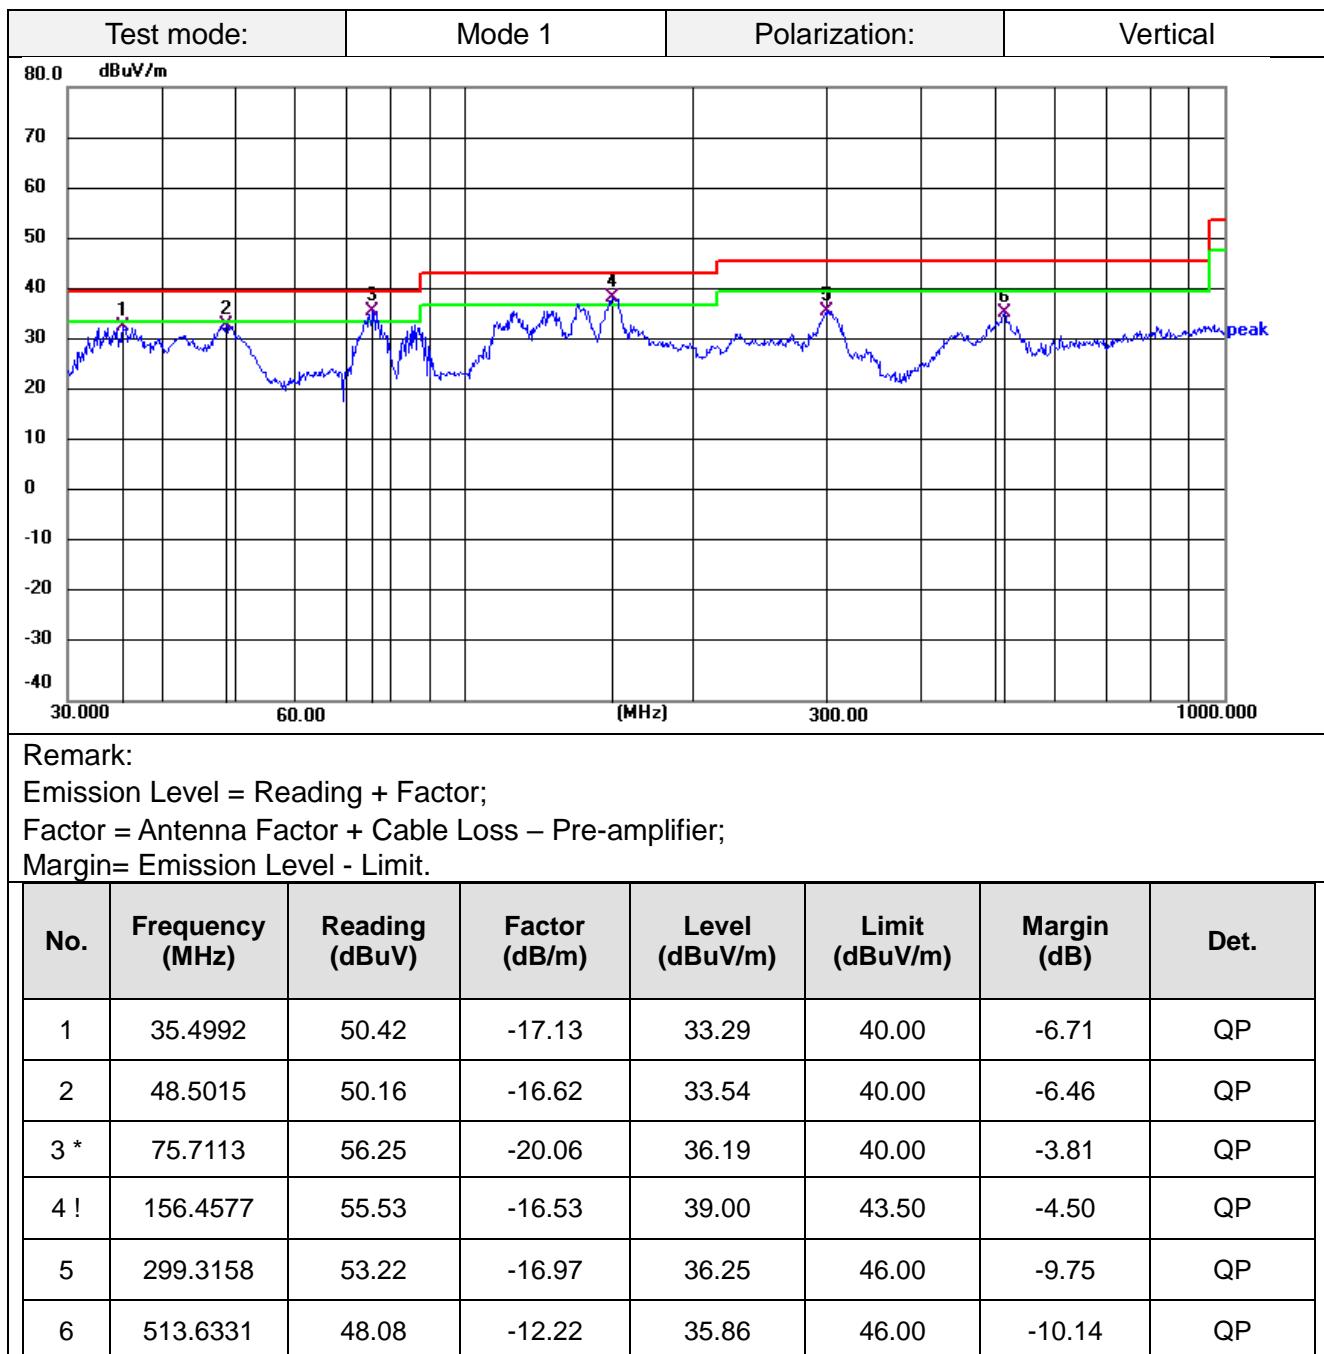

### 3.3 20dB Bandwidth


#### Limit

The 20dB bandwidth shall be less than 80% of the permitted frequency band.

#### Test Procedure



1. Set RBW = 30Hz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Test setup

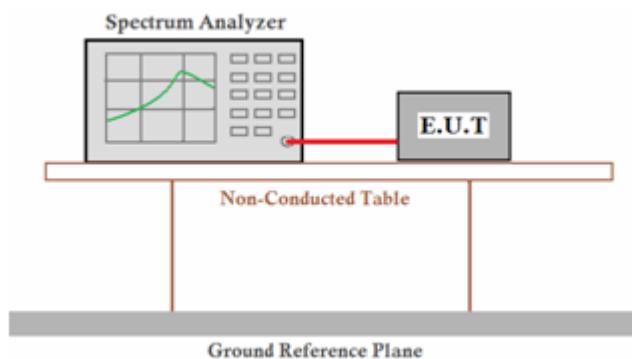

#### Test Results

Mode	Frequency (KHz)	20dB Bandwidth (KHz)	99% OBW (KHz)	Conclusion
Tx Mode	146.6	0.093	-	PASS
Tx Mode	157.2	0.096	-	PASS
Tx Mode	359.3	0.094	-	PASS

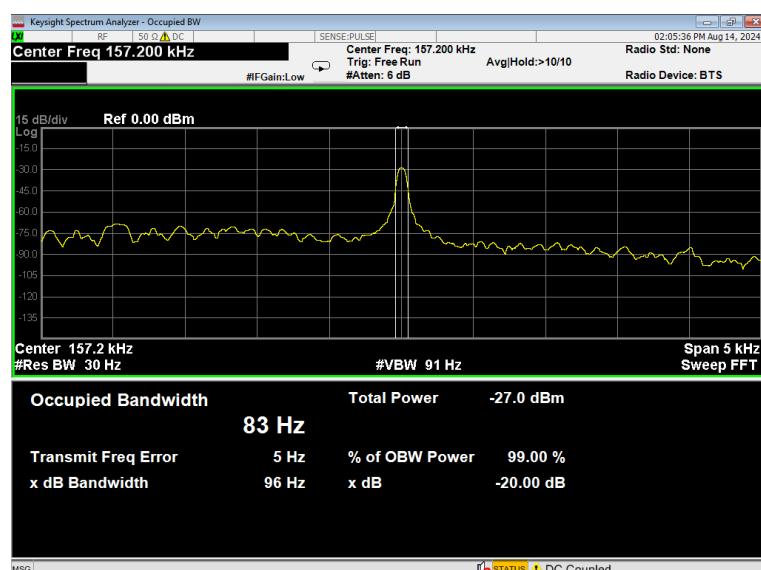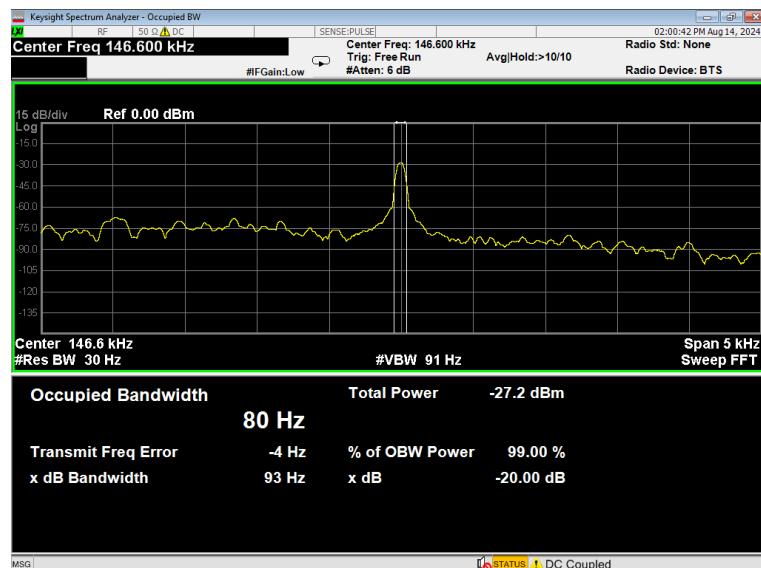

### 3.4 Antenna Requirement

#### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

#### Confirmation

The EUT's antenna is an Inductive Loop coil Antenna, the best case gain of the antenna is 0dBi.

## 4 Test Setup Photographs of EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 5 External Photographs of EUT

Please refer to separated files for External Photos of the EUT.

## 6 Internal Photographs of EUT

Please refer to separated files for Internal Photos of the EUT.

\*\*\*\*\* End of Report \*\*\*\*\*