


LTE Band 26_15MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
26865	831.5	5.16	6.13	13	Pass
26915	836.5	5.40	6.21	13	Pass
26965	841.5	4.64	5.89	13	Pass

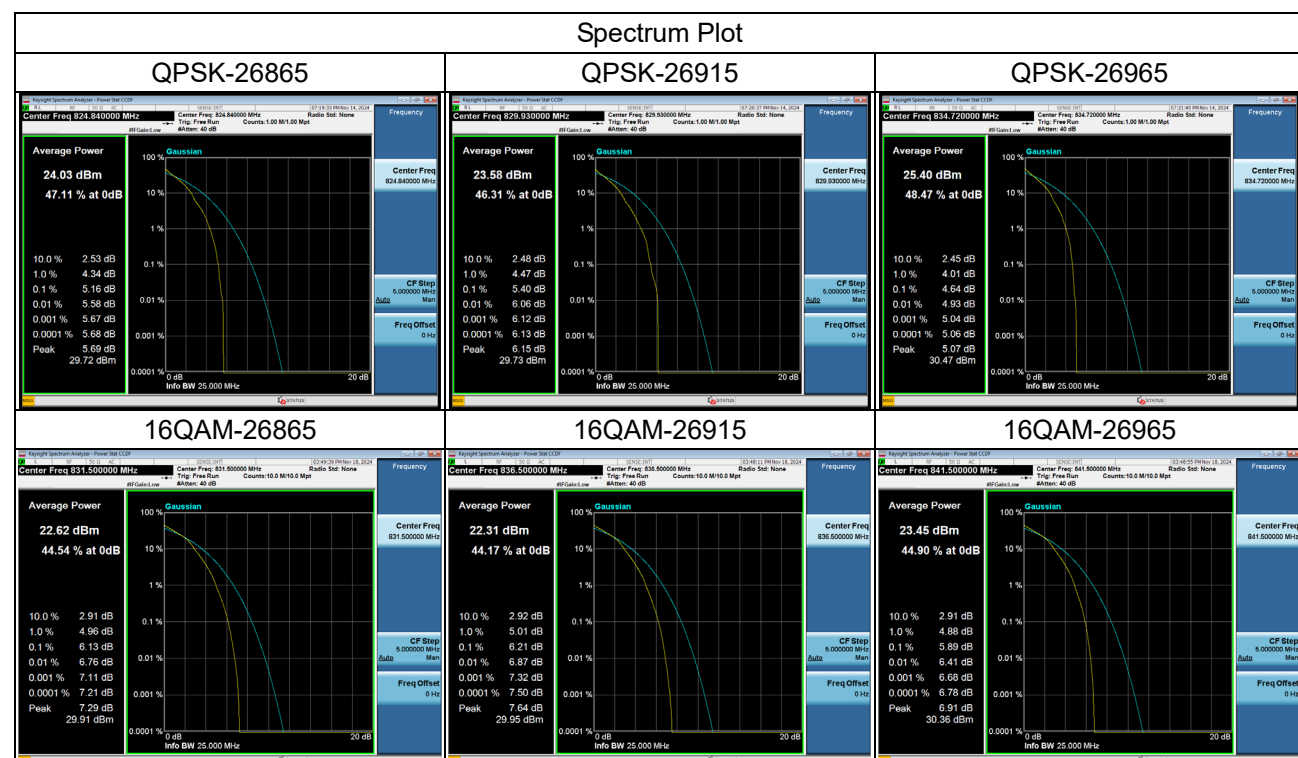

APPENDIX I - FREQUENCY STABILITY

Test Mode	LTE Band 5_CH20525_10MHz
-----------	--------------------------

Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency error (Hz)	ppm	Limit
50	5.32	0.0064	±2.5ppm
40	-2.65	-0.0032	
30	3.46	0.0041	
20	-4.63	-0.0055	
10	-3.56	-0.0043	
0	-3.87	-0.0046	
-10	5.63	0.0067	
-20	4.12	0.0049	
-30	3.54	0.0042	
Minimum voltage	2.89	0.0035	
Maximum voltage	4.16	0.0050	
Nominal voltage	4.18	0.0050	

Note: Nominal voltage= 12V, Maximum voltage= 13.8V, Minimum voltage= 10.2V.

Test Mode	LTE Band 26_CH26915_15MHz
-----------	---------------------------

Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency error (Hz)	ppm	Limit
50	4.32	0.0052	±2.5ppm
40	-4.25	-0.0051	
30	5.68	0.0068	
20	9.23	0.0110	
10	-5.14	-0.0061	
0	5.63	0.0067	
-10	4.42	0.0053	
-20	-4.82	-0.0058	
-30	-7.58	-0.0091	
Minimum voltage	-4.53	-0.0054	
Maximum voltage	-6.21	-0.0074	
Nominal voltage	-3.85	-0.0046	

Note: Nominal voltage= 12V, Maximum voltage= 13.8V, Minimum voltage= 10.2V.

End of Test Report