

PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics U.S.A, Inc. 111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632 United States Date of Testing: 10/5/2020 - 10/12/2020 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2009170151-13-R1.ZNF Date of Issue: 10/20/2020

FCC ID: ZNFK200TM

APPLICANT: LG ELECTRONICS U.S.A, INC.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type: Portable Handset **Model:** LM-K200TM

Additional Model(s): LMK200TM, K200TM

Test Device Serial No.: Pre-Production Sample [S/N: 18878]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M2009170151-13-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 1 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 10172

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	. 18
6.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	. 22
7.	FCC 3G MEASUREMENTS	. 26
8.	T-COIL TEST SUMMARY	. 27
9.	MEASUREMENT UNCERTAINTY	. 37
10.	EQUIPMENT LIST	. 38
11.	TEST DATA	. 39
12.	CALIBRATION CERTIFICATES	. 60
13.	CONCLUSION	. 67
14.	REFERENCES	. 68
15.	TEST SETUP PHOTOGRAPHS	70

FCC ID: ZNFK200TM	PCTEST* Proud to be part of ® simmed	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dog 2 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 2 of 72

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-86581 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 2 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 3 of 72

© 2020 PCTEST

2. DUT DESCRIPTION



FCC ID: ZNFK200TM

Applicant: LG Electronics U.S.A, Inc.

111 Sylvan Avenue, North Building

Englewood Cliffs, NJ 07632

United States

Model: LM-K200TM

Additional Model(s): LMK200TM, K200TM

Serial Number: 18878
HW Version: REV1.0
SW Version: K200TM08g
Antenna: Internal Antenna
DUT Type: Portable Handset

I. LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B26 & B5, LTE B66 & B4, as well as B25 & B2. Each pair of LTE bands have the same target power and share the same transmission path. Since the supported frequency spans for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B26, B66 and B25) were evaluated for hearing aid compliance.

FCC ID: ZNFK200TM	PCTEST . Proud to be port of the simular	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 4 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 4 of 72

Table 2-1 ZNFK200TM HAC Air Interfaces

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated	
	850	VO	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR	
GSM	1900	_					
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo²	OPUS	
	850						
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹	NB AMR	
	1900						
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS	
	680 (B71)		Yes³				
	700 (B12)				VoLTE ¹ , Google Duo ²	VOLTE: NB AMR, WB AMR, EVS Google Duo: OPUS	
	780 (B13)						
	850 (B5)						
LTE (FDD)	LTE (FDD) 850 (B26) VD	VD	Yes	Yes: WIFI or BT			
	1700 (B4)		163				
	1700 (B66)						
	1900 (B2)						
	1900 (B25)						
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS	
WIFI	2450	VD	Yes	Yes: GSM, UMTS, or LTE	Google Duo²	Google Duo: OPUS	
BT	2450	DT	No	Yes: GSM, UMTS, or LTE	N/A	N/A	
DT = Digital Dat	Type Transport V0 = Voice Only DT = Digital Data - Not intended for Voice Services VD = CMRS and/or IP Voice over Data Transport Notes: 1. Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE Interpretation. 2. Reference level is -20dBm0 in accordance with FCC KDB 285076 D02 3. LTE B71, while outside the scope of ANSI C63.19 and FCC HAC regulations, were additionally tested according to the exiprocedures with currently available test equipment.						

FCC ID: ZNFK200TM	PCTEST* Proud to be past of ® element	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg F of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 5 of 72

8/18/2020

ANSI C63.19-2011 PERFORMANCE CATEGORIES 3.

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz - 3000 Hz per §8.3.2.

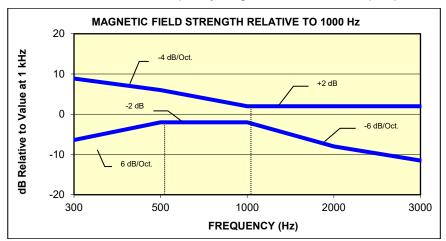


Figure 3-1 Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

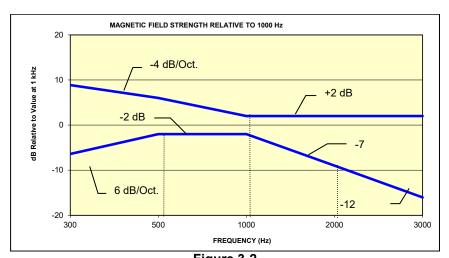


Figure 3-2 Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: ZNFK200TM	PCTEST houd to be pet of a named	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 6 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 6 01 72

© 2020 PCTEST **REV 3.5.M**

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters			
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]			
T1	0 to 10 dB			
T2	10 to 20 dB			
Т3	20 to 30 dB			
T4	> 30 dB			
Table 3-1 Magnetic Coupling Parameters				

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFK200TM	PCTEST* Proud to be port of ® simular	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 7 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 7 of 72

METHOD OF MEASUREMENT

Test Setup I.

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

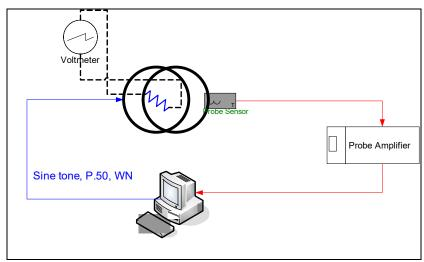


Figure 4-1 Validation Setup with Helmholtz Coil

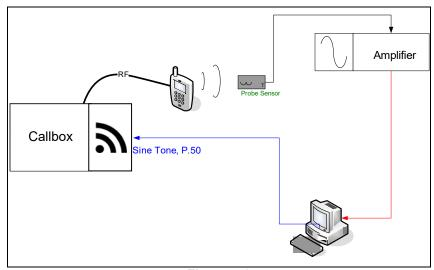


Figure 4-2 T-Coil Test Setup

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 0 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 8 of 72

© 2020 PCTEST **REV 3.5.M**

II. Scanning Mechanism

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm

Maximum speed 6.1 cm/sec

Line Voltage: 115 VAC

Line Frequency: 60 Hz

Material Composite: Delrin (Acetal)

Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

Dimensions: 36" x 25" x 38" Operating Area: 36" x 49" x 55"

Reflections: < -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice


Manufacturer: ITU-T

Active Frequency Range: 100 Hz – 8 kHz

Stimulus Type: Male and Female, no spaces

Single Sample 20.96 seconds

Duration: 20.90 Activity Level: 100%



Spectral Characteristic of full P.50





Figure 4-5
Temporal Characteristic of full P.50

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 9 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 9 01 72



ABM2 Measurement Block Diagram:



Figure 4-6 Magnetic Measurement Processing Steps

IV. Test Procedure

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - b. "A-weighting" and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.08m; R=10.2Ω and using V=18mV:

$$H_c = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of $-10 \, \mathrm{dB(A/m)}$ in the center of the Helmholtz coil which was used to validate the probe measurement at $-10 \, \mathrm{dB(A/m)}$. This was verified to be within $\pm 0.5 \, \mathrm{dB}$ of the $-10 \, \mathrm{dB(A/m)}$ value (see Pages 34 & 35).

FCC ID: ZNFK200TM	PCTEST Proof to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 10 01 72

c. Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the P.50 signal as shown below:




Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

Table 4-1
ABM2 Frequency Response Validation

	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: ZNFK200TM	PCTEST . Thought to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 11 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 11 01 72




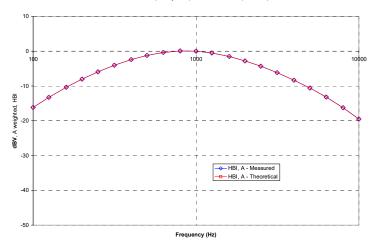


Figure 4-8
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2
ABM2 Power Sum Validation

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: ZNFK200TM	PCTEST: Proud to be port of @ element	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 12 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 12 01 72





Figure 4-10 **ABM2 Power Sum Validation**

- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

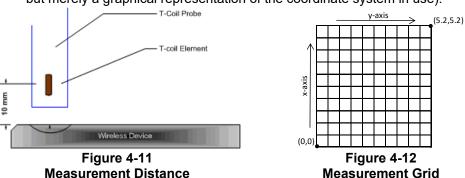

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-14 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN TM	TDMA (22 and 11 Hz)	-18

FCC ID: ZNFK200TM	PCTEST Proud to be port of a rement	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 13 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Faye 13 01 72

- ii. See Section 5 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE).
- iii. See Section 6 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 7 for more information regarding worst-case configurations for UMTS. LTE configuration information can be found in Section 5 and 6. WIFI configuration information can be found in Section 6.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 1 second.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: ZNFK200TM	PCTEST Proud to be port of a comment	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 14 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 14 01 72

V. **Test Setup**

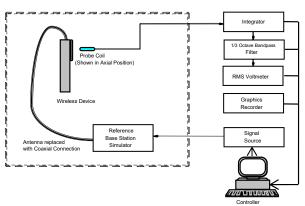


Figure 4-13 **Audio Magnetic Field Test Setup**

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. **Deviation from C63.19 Test Procedure**

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFK200TM	PCTEST: Proud to be port of @ stemand	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 15 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 15 of 72

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes.

Table 4-3
Center Channels and Frequencies

Test frequencies & associated channels				
Channel	Frequency (MHz)			
Cellular 850				
190 (GSM)	836.60			
4183 (UMTS)	836.60			
AWS 1750				
1412 (UMTS)	1730.40			
PCS 1900				
661 (GSM)	1880			
9400 (UMTS)	1880			

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels are additionally tested for LTE TDD. The middle channel and supported bandwidths from the worst-case bands according to Tables 6-5 and 6-6 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 8-4 to 8-11 and Tables 8-14 and 8-15 for LTE bandwidths and channels.

3. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. See Table 8-16 for WIFI standards and channels.

FCC ID: ZNFK200TM	PCTEST* Provid to be port of ® element	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 16 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 10 01 72

IX. Test Flow

The flow diagram below was followed (From C63.19):

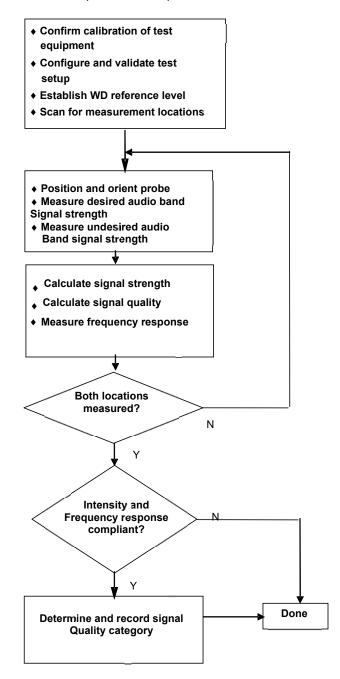


Figure 4-14 C63.19 T-Coil Signal Test Process

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 17 01 72

© 2020 PCTEST Portable Handset REV 3.5.M

5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

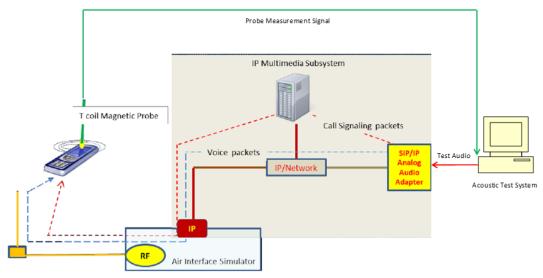


Figure 5-1
Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFK200TM	PCTEST* Proud to be post of ® steemed	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 19 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 18 of 72

© 2020 PCTEST REV 3.5.M 8/18/2020

II. **DUT Configuration for VoLTE over IMS T-coil Testing**

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 99%RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

> Table 5-1 **VoLTE over IMS SNNR by Radio Configuration**

			-1 - 0 0 0 1 110		,				
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
66	1745.0	132322	20	QPSK	1	0	8.55	-45.42	53.97
66	1745.0	132322	20	QPSK	1	50	8.29	-44.32	52.61
66	1745.0	132322	20	QPSK	1	99	8.42	-44.71	53.13
66	1745.0	132322	20	QPSK	50	0	8.30	-46.93	55.23
66	1745.0	132322	20	QPSK	50	25	8.59	-47.12	55.71
66	1745.0	132322	20	QPSK	50	50	8.61	-44.24	52.85
66	1745.0	132322	20	QPSK	100	0	8.70	-46.43	55.13
66	1745.0	132322	20	16QAM	1	0	8.65	-40.87	49.52
66	1745.0	132322	20	16QAM	1	50	8.54	-40.03	48.57
66	1745.0	132322	20	16QAM	1	99	8.64	-38.28	46.92
66	1745.0	132322	20	16QAM	50	0	8.66	-46.38	55.04
66	1745.0	132322	20	16QAM	50	25	8.56	-46.28	54.84
66	1745.0	132322	20	16QAM	50	50	8.71	-46.71	55.42
66	1745.0	132322	20	16QAM	100	0	8.50	-46.93	55.43
66	1745.0	132322	20	64QAM	1	0	8.72	-40.86	49.58
66	1745.0	132322	20	64QAM	1	50	8.86	-40.31	49.17
66	1745.0	132322	20	64QAM	1	99	8.43	-38.77	47.20
66	1745.0	132322	20	64QAM	50	0	8.87	-47.32	56.19
66	1745.0	132322	20	64QAM	50	25	8.39	-47.02	55.41
66	1745.0	132322	20	64QAM	50	50	8.82	-46.87	55.69
66	1745.0	132322	20	64QAM	100	0	8.82	-46.62	55.44

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

> Table 5-2 AMR Codec Investigation - VoLTE over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	9.56	8.66	11.58	9.52			132322
ABM2 (dBA/m)	-41.35	-41.02	-40.22	-40.49	Axial	Band 66 20MHz	
Frequency Response	Pass	Pass	Pass	Pass			
S+N/N (dB)	50.91	49.68	51.80	50.01			


- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 19 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 19 01 72

Table 5-3
EVS Codec Investigation - VoLTE over IMS

= :								
Codec Setting:	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel	
ABM1 (dBA/m)	10.83	9.80	12.26	9.65			132322	
ABM2 (dBA/m)	-40.77	-41.12	-40.75	-40.84	Axial	Band 66 20MHz		
Frequency Response	Pass	Pass	Pass	Pass	Axiai			
S+N/N (dB)	51.60	50.92	53.01	50.49				

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"



Audio Band Magnetic Curve Measurement Block Diagram

3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length T_f = 307200 \cdot T_s = 10 ms, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length 30720 \cdot T_s = 1 ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 \cdot Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Table 5-4
Uplink-Downlink Configurations for Type 2 Frame Structures

	Opinik Bownink Configurations for Typo 2 Frame Ottabla Co											
Uplink-downlink configuration	Downlink-to-Uplink	Subframe number									Calculated Transmission	
configuration	Switch-point periodicity	0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

FCC ID: ZNFK200TM	PCTEST* Proof to be port of 6 storeed	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 20 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 20 01 72

a. Power Class 3 Uplink-Downlink Configuration Investigation

Power Class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 99%RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 0 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-5
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	99	0	8.53	-29.60	38.13
2593.0	40620	20	16QAM	1	99	1	8.67	-29.93	38.60
2593.0	40620	20	16QAM	1	99	2	8.63	-30.42	39.05
2593.0	40620	20	16QAM	1	99	3	8.77	-33.38	42.15
2593.0	40620	20	16QAM	1	99	4	8.75	-31.71	40.46
2593.0	40620	20	16QAM	1	99	5	8.63	-33.18	41.81
2593.0	40620	20	16QAM	1	99	6	8.40	-29.90	38.30

b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 99%RB Offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-6
Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration

	· · · · · · · · · · · · · · · · · · ·											
Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]			
2593.0	40620	20	16QAM	1	99	1	8.91	-27.38	36.29			
2593.0	40620	20	16QAM	1	99	2	8.75	-28.28	37.03			
2593.0	40620	20	16QAM	1	99	3	8.49	-30.91	39.40			
2593.0	40620	20	16QAM	1	99	4	8.59	-31.29	39.88			
2593.0	40620	20	16QAM	1	99	5	8.61	-31.02	39.63			

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

c. Conclusion

Per the investigations above, UL-DL Configuration 0 was used to evaluate Power Class 3 VoLTE over IMS and UL-DL Configuration 1 was used to evaluate Power Class 2 VoLTE over IMS.

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 21 01 72

6. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation². The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 75kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Table 6-1
Codec Investigation – OTT VoIP (EDGE)

Codec Setting:	75kbps	6kbps	Orientation	Channel	
ABM1 (dBA/m)	7.43	7.63			
ABM2 (dBA/m)	-34.46	-35.67	Axial	661	
Frequency Response	Pass	Pass	Axiai		
S+N/N (dB)	41.89	43.30			

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFK200TM	PCTEST* Froud to be port of the second	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 22 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 22 of 72
© 2020 PCTEST				REV 3.5.M

Table 6-2
Codec Investigation – OTT VoIP (HSPA)

Codec investigation – OTT voir (113FA)								
Codec Setting:	75kbps	6kbps	Orientation	Channel				
ABM1 (dBA/m)	7.55	7.45						
ABM2 (dBA/m)	-44.49	-45.85	Axial	9400				
Frequency Response	Pass	Pass	Axiai					
S+N/N (dB)	52.04	53.30						

Table 6-3
Codec Investigation – OTT VoIP (LTE)

Codec investigation – OTT voil (LTL)									
Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel				
ABM1 (dBA/m)	7.39	7.40							
ABM2 (dBA/m)	-39.49	-40.31	A.d1	Band 66 20MHz	132322				
Frequency Response	Pass	Pass	- Axial						
S+N/N (dB)	46.88	47.71							

Table 6-4
Codec Investigation – OTT VoIP (WIFI)

Codec Setting:	75kbps	6kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	7.55	8.04	Axial			6
ABM2 (dBA/m)	-37.82	-38.71		2.4GHz		
Frequency Response	Pass	Pass		2.4GHZ	IEEE 802.11b	
S+N/N (dB)	45.37	46.75				

- Mute on; Backlight off; Max Volume; Max Contrast
- Radio Configurations can be found in Section 8.II.F




Figure 6-1
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFK200TM	PCTEST Proud to be port of a simmer	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 23 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 23 01 72

2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 66 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

Table 6-5
OTT VoIP (LTE FDD) SNNR by LTE Band

			• • . ,	(= : = : = =)						
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]	
71	680.5	133297	20	16QAM	1	99	7.47	-38.55	46.02	
12	707.5	23095	10	16QAM	1	49	7.34	-39.16	46.50	
13	782.0	23230	10	16QAM	1	49	7.39	-40.60	47.99	
26	831.5	26865	15	16QAM	1	74	7.32	-39.10	46.42	
66	1745.0	132322	20	16QAM	1	99	7.36	-37.97	45.33	
25	1882.5	26365	20	16QAM	1	99	7.32	-40.33	47.65	

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

Table 6-6
OTT VoIP (LTE TDD) SNNR by LTE Band

Bai	nd	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
41 (F	(C3)	2593.0	40620	20	16QAM	1	99	7.44	-30.22	37.66
41 (F	C2)	2593.0	40620	20	16QAM	1	99	7.56	-28.35	35.91

FCC ID: ZNFK200TM	PCTEST* Proud to be port of ® simular	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 24 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 24 of 72

3. Radio Configuration for OTT VoIP (WIFI)

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

Table 6-7
IEEE 802.11b SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11b	6	DSSS	1	7.51	-38.61	46.12
IEEE 802.11b	6	DSSS	2	7.43	-38.51	45.94
IEEE 802.11b	6	CCK	5.5	7.42	-39.10	46.52
IEEE 802.11b	6	CCK	11	7.51	-37.79	45.30

Table 6-8 IEEE 802.11g SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11g	6	BPSK	6	7.49	-40.81	48.30
IEEE 802.11g	6	BPSK	9	7.46	-40.65	48.11
IEEE 802.11g	6	QPSK	12	7.52	-40.96	48.48
IEEE 802.11g	6	QPSK	18	7.48	-42.49	49.97
IEEE 802.11g	6	16QAM	24	7.47	-42.14	49.61
IEEE 802.11g	6	16QAM	36	7.47	-42.37	49.84
IEEE 802.11g	6	64QAM	48	7.50	-43.16	50.66
IEEE 802.11g	6	64QAM	54	7.48	-42.27	49.75

Table 6-9
IEEE 802.11n SNNR by Radio Configuration

Mode	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	6	BPSK	0	7.47	-41.03	48.50
IEEE 802.11n	6	QPSK	1	7.53	-41.75	49.28
IEEE 802.11n	6	QPSK	2	7.53	-42.69	50.22
IEEE 802.11n	6	16QAM	3	7.50	-42.29	49.79
IEEE 802.11n	6	16QAM	4	7.46	-43.07	50.53
IEEE 802.11n	6	64QAM	5	7.51	-41.78	49.29
IEEE 802.11n	6	64QAM	6	7.50	-42.88	50.38
IEEE 802.11n	6	64QAM	7	7.54	-42.62	50.16

FCC ID: ZNFK200TM	PCTEST: Proud to be part of 6 sement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 25 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		1 age 25 01 72

FCC 3G MEASUREMENTS 7.

I. **UMTS Test Configurations**

AMR at 12.2kbps, 13.6kbps SRB (thick, purple data curve) was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:


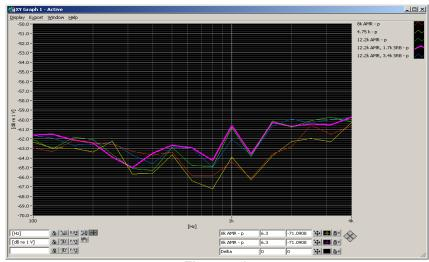


Figure 7-1 **UMTS Audio Band Magnetic Noise**

Table 7-1 **Codec Investigation - UMTS**

Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel
ABM1 (dBA/m)	1.33	1.31	1.05		9400
ABM2 (dBA/m)	-58.34	-58.85	-58.99	Avial	
Frequency Response	Pass	Pass	Pass	– Axial	
S+N/N (dB)	59.67	60.16	60.04		

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFK200TM	PCTEST houd to be port of the element	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 26 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 20 01 72

T-COIL TEST SUMMARY 8.

Table 8-1 **Consolidated Tabled Results**

			Conson							
		•	esponse rgin	_	netic / Verdict		SNNR dict	Margin from FCC Limit	C63.19-2011	
C63 10	Section	8.3	3.2	8.3	3.1	8.3	3.4	(dB)	Rating	
C63. 18	7 Occuon	Axial	Radial	Axial	Radial	Axial	Radial			
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-2.57	Т3	
GSIVI	PCS	PASS	NA	PASS	PASS	PASS	PASS	-2.57	13	
EDGE	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-14.70	T4	
(OTT VoIP)	PCS	PASS	NA	PASS	PASS	PASS	PASS	-14.70	1	
	Cellular	PASS	NA	PASS	PASS	PASS	PASS			
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-28.21	T4	
	PCS	PASS	NA	PASS	PASS	PASS	PASS			
	Cellular	PASS	NA	PASS	PASS	PASS	PASS			
HSPA (OTT VoIP)	AWS	PASS	NA	PASS	PASS	PASS	PASS	-29.78	T4	
(811 76)	PCS	PASS	NA	PASS	PASS	PASS	PASS			
	B71	PASS	NA	PASS	PASS	PASS	PASS			
	B12	PASS	NA	PASS	PASS	PASS	PASS			
LTE FDD	B13	PASS	NA	PASS	PASS	PASS	PASS	44.52	-14.53	T4
LIE FUU	B26	PASS	NA	PASS	PASS	PASS	PASS	-14.55	14	
	B66	PASS	NA	PASS	PASS	PASS	PASS			
	B25	PASS	NA	PASS	PASS	PASS	PASS			
LTE FDD (OTT VoIP)	B66	PASS	NA	PASS	PASS	PASS	PASS	-17.00	T4	
	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	4.04	To	
LTE TDD	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-1.94	Т3	
LTE TDD (OTT VoIP)	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-6.74	Т3	
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS			
WLAN (OTT VoIP)	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	-23.84	T4	
(311 7011)	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS			

FCC ID: ZNFK200TM	PCTEST' Proud to be port of a connect	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 07 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 27 of 72

I. **Raw Handset Data**

Table 8-2 **Raw Data Results for GSM**

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		128	1.96	-25.40		2.00	27.36	20.00	-7.36	Т3	
	Axial	190	2.02	-25.32	-64.24	2.00	27.34	20.00	-7.34	Т3	2.0, 1.8
GSM850		251	2.10	-26.40		2.00	28.50	20.00	-8.50	Т3	
GSWIOSU		128	-7.18	-30.14			22.96	20.00	-2.96	Т3	
	Radial	190	-7.26	-29.83	-63.55	N/A	22.57	20.00	-2.57	Т3	2.6, 2.6
		251	-7.42	-31.87			24.45	20.00	-4.45	Т3	
		512	1.95	-30.67		2.00	32.62	20.00	-12.62	T4	
	Axial	661	2.11	-30.44	-64.24	2.00	32.55	20.00	-12.55	T4	2.0, 1.8
GSM1900		810	1.63	-30.20		2.00	31.83	20.00	-11.83	T4	
G3W1900		512	-7.19	-36.45			29.26	20.00	-9.26	Т3	
	Radial	661	-7.55	-36.56	-63.55	N/A	29.01	20.00	-9.01	Т3	2.6, 2.6
		810	-7.32	-36.13			28.81	20.00	-8.81	Т3	

Table 8-3 Raw Data Results for UMTS

Raw Data Results for DWTS												
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		4132	1.03	-59.11		2.00	60.14	20.00	-40.14	T4		
	Axial	4183	1.08	-57.82	-64.24	2.00	58.90	20.00	-38.90	T4	2.0, 1.8	
UMTS V		4233	1.06	-58.29		2.00	59.35	20.00	-39.35	T4		
OWI S V		4132	-7.67	-57.43			49.76	20.00	-29.76	T4		
	Radial	4183	-7.72	-57.29	-63.55	N/A	49.57	20.00	-29.57	T4	2.6, 2.6	
		4233	-7.69	-55.99			48.30	20.00	-28.30	T4		
		1312	1.11	-59.18		2.00	60.29	20.00	-40.29	T4		
	Axial	1412	1.08	-59.40	-64.24	2.00	60.48	20.00	-40.48	T4	2.0, 1.8	
UMTS IV		1513	1.09	-58.94		2.00	60.03	20.00	-40.03	T4		
OWITO IV		1312	-7.64	-57.14			49.50	20.00	-29.50	T4		
	Radial	1412	-7.70	-57.43	-63.55	N/A	49.73	20.00	-29.73	T4	2.6, 2.6	
		1513	-7.69	-57.01			49.32	20.00	-29.32	T4		
		9262	1.23	-58.76		2.00	59.99	20.00	-39.99	T4		
	Axial	9400	1.13	-58.83	-64.24	2.00	59.96	20.00	-39.96	T4	2.0, 1.8	
UMTS II		9538	1.02	-58.55		2.00	59.57	20.00	-39.57	T4		
OWITS II		9262	-7.60	-55.81			48.21	20.00	-28.21	T4		
	Radial	9400	-7.68	-57.23	-63.55		55 N/A	49.55	20.00	-29.55	T4	2.6, 2.6
		9538	-7.75	-56.96				49.21	20.00	-29.21	T4	

Table 8-4 Raw Data Results for LTE B71

					Data IN							
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	133297	8.02	-39.19		2.00	47.21	20.00	-27.21	T4	
		15MHz	133397	8.12	-41.19		2.00	49.31	20.00	-29.31	T4	
	Axial	15MHz	133297	8.07	-38.50	-64.24	2.00	46.57	20.00	-26.57	T4	2.0, 1.8
	Axiai	15MHz	133197	7.96	-39.61	-04.24	2.00	47.57	20.00	-27.57	T4	2.0, 1.6
		10MHz	133297	8.70	-39.41		2.00	48.11	20.00	-28.11	T4	
LTE Band 71		5MHz	133297	8.58	-40.95		2.00	49.53	20.00	-29.53	T4	
LIE Band / I		20MHz	133297	-0.04	-36.58			36.54	20.00	-16.54	T4	
		15MHz	133397	-0.24	-40.06			39.82	20.00	-19.82	T4	
	Radial	15MHz	133297	-0.33	-34.86	-63.55	N/A	34.53	20.00	-14.53	T4	2.6, 2.6
	Radiai	15MHz	133197	-0.07	-37.88	-03.55	IN/A	37.81	20.00	-17.81	T4	2.0, 2.0
		10MHz	133297	-0.14	-35.73			35.59	20.00	-15.59	T4	
		5MHz	133297	-0.03	-38.87			38.84	20.00	-18.84	T4	

FCC ID: ZNFK200TM	PCTEST* Proud to be port of the interest	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 20 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 28 of 72

Table 8-5 **Raw Data Results for LTE B12**

							<u> </u>					
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	23095	8.64	-40.69		2.00	49.33	20.00	-29.33	T4	
	Axial	5MHz	23095	8.60	-41.75	-64.24	2.00	50.35	20.00	-30.35	T4	2.0. 1.8
	Axiai	3MHz	23095	7.88	-41.36	-04.24	2.00	49.24	20.00	-29.24	T4	2.0, 1.0
LTE Band 12		1.4MHz	23095	7.80	-40.86		2.00	48.66	20.00	-28.66	T4	
LIE Banu 12		10MHz	23095	-0.13	-36.64			36.51	20.00	-16.51	T4	
	Radial	5MHz	23095	0.03	-37.82	-63.55	N/A	37.85	20.00	-17.85	T4	2.6, 2.6
	Natial	3MHz	23095	0.01	-37.75	-03.55	IN/A	37.76	20.00	-17.76	T4	2.0, 2.0
		1.4MHz	23095	0.01	-39.33			39.34	20.00	-19.34	T4	

Table 8-6 **Raw Data Results for LTE B13**

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	10MHz	23230	7.82	-41.65	-64.24	2.00	49.47	20.00	-29.47	T4	2.0, 1.8
LTE Band 13		5MHz	23230	7.88	-39.51	-04.24	2.00	47.39	20.00	-27.39	T4	2.0, 1.0
LIE Band 13	Radial	10MHz	23230	-0.30	-40.97	-63.55	N/A	40.67	20.00	-20.67	T4	2.6. 2.6
	Radiai	5MHz	23230	-0.06	-36.15	-03.55	IN/A	36.09	20.00	-16.09	T4	2.0, 2.0

Table 8-7 Raw Data Results for LTE B26

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		15MHz	26865	7.78	-39.20		2.00	46.98	20.00	-26.98	T4	
		10MHz	26865	7.67	-40.46		2.00	48.13	20.00	-28.13	T4	
	Axial	5MHz	26865	7.91	-41.20	-64.24	2.00	49.11	20.00	-29.11	T4	2.0, 1.8
		3MHz	26865	7.79	-41.00		2.00	48.79	20.00	-28.79	T4	
LTE Band 26		1.4MHz	26865	7.80	-41.70		2.00	49.50	20.00	-29.50	T4	
LIE Ballu 20		15MHz	26865	-0.48	-36.06			35.58	20.00	-15.58	T4	
		10MHz	26865	-0.35	-36.26			35.91	20.00	-15.91	T4	
	Radial	5MHz	26865	-0.28	-38.07	-63.55	N/A	37.79	20.00	-17.79	T4	2.6, 2.6
		3MHz	26865	-0.06	-39.26			39.20	20.00	-19.20	T4	
		1.4MHz	26865	-0.24	-38.82			38.58	20.00	-18.58	T4	

Table 8-8 **Raw Data Results for LTE B66**

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates							
		20MHz	132322	8.20	-38.73		2.00	46.93	20.00	-26.93	T4								
		15MHz	132322	8.40	-39.89		2.00	48.29	20.00	-28.29	T4								
	Axial	10MHz	132322	8.65	-40.66	-64.24	2.00	49.31	20.00	-29.31	T4	2.0, 1.8							
	Axiai	5MHz	132322	8.72	-40.06	-04.24	2.00	48.78	20.00	-28.78	T4	2.0, 1.0							
	00	3MHz	132322	7.84	-40.49		2.00	48.33	20.00	-28.33	T4								
LTE Band 66		1.4MHz	132322	7.65	-40.53		2.00	48.18	20.00	-28.18	T4								
LIE Ballu 66		20MHz	132322	-0.17	-37.26			37.09	20.00	-17.09	T4								
		15MHz	132322	0.09	-35.93			36.02	20.00	-16.02	T4								
	Dadial	10MHz	132322	-0.17	-37.67	62.55	NI/A	37.50	20.00	-17.50	T4	2.6, 2.6							
	Radial -	5MHz	132322	-0.11	-38.17	-63.55	7	-63.55	-63.55	-63.55	-63.55	-63.55	-63.55	N/A	38.06	20.00	-18.06	T4	2.0, 2.0
		3MHz	132322	0.05	-37.30			37.35	20.00	-17.35	T4								
		1.4MHz	132322	-0.38	-38.73			38.35	20.00	-18.35	T4	1							

FCC ID: ZNFK200TM	PCTEST* Proud to be port of @ ninemed	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 20 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 29 of 72
© 2020 PCTEST				REV 3.5.M

Table 8-9 Raw Data Results for LTE B25

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	26365	8.26	-41.51		2.00	49.77	20.00	-29.77	T4	
		15MHz	26365	8.38	-42.17		2.00	50.55	20.00	-30.55	T4	
	Axial	10MHz	26365	8.25	-42.20	-64.24	2.00	50.45	20.00	-30.45	T4	2.0, 1.8
	Axiai	5MHz	26365	8.63	-41.67	-04.24	2.00	50.30	20.00	-30.30	T4	2.0, 1.0
		3MHz	26365	8.63	-40.36		2.00	48.99	20.00	-28.99	T4	
LTE Band 25		1.4MHz	26365	7.99	-41.30		2.00	49.29	20.00	-29.29	T4	
LIE Ballu 25		20MHz	26365	-0.01	-38.67			38.66	20.00	-18.66	T4	
		15MHz	26365	0.00	-39.08			39.08	20.00	-19.08	T4	
	Radial	10MHz	26365	-0.02	-37.86	-63.55	N/A	37.84	20.00	-17.84	T4	2.6, 2.6
	Radiai	5MHz	26365	-0.06	-38.36	-03.55	IVA	38.30	20.00	-18.30	T4	2.0, 2.0
		3MHz	26365	-0.08	-36.79			36.71	20.00	-16.71	T4	
		1.4MHz	26365	-0.05	-38.46			38.41	20.00	-18.41	T4	

Table 8-10 Raw Data Results for LTE B41 Power Class 3

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	8.07	-29.52		2.00	37.59	20.00	-17.59	T4	
	Axial	15MHz	40620	7.93	-29.50	-64.24	2.00	37.43	20.00	-17.43	T4	2.0, 1.8
	Axiai	10MHz	40620	8.36	-29.18	-04.24	2.00	37.54	20.00	-17.54	T4	2.0, 1.0
LTE Band 41		5MHz	40620	8.38	-29.53		2.00	37.91	20.00	-17.91	T4	
LIE Band 41		20MHz	40620	-0.09	-25.09			25.00	20.00	-5.00	T3	
	Radial	15MHz	40620	-0.42	-24.64	-63.55	N/A	24.22	20.00	-4.22	Т3	2.6, 2.6
	Naulai	10MHz	40620	0.19	-24.51	-03.55	IWA	24.70	20.00	-4.70	Т3	2.0, 2.0
		5MHz	40620	0.21	-25.39			25.60	20.00	-5.60	Т3	

Table 8-11 Raw Data Results for LTE B41 Power Class 2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	8.57	-27.44		2.00	36.01	20.00	-16.01	T4	
		15MHz	40620	8.12	-27.67		2.00	35.79	20.00	-15.79	T4	
		10MHz	40620	7.88	-28.04		2.00	35.92	20.00	-15.92	T4	
	Axial	5MHz	41490	8.13	-29.58	-64.24	2.00	37.71	20.00	-17.71	T4	20.10
	Axiai	5MHz	41055	7.99	-28.44	-04.24	2.00	36.43	20.00	-16.43	T4	2.0, 1.8
		5MHz	40620	7.90	-27.32		2.00	35.22	20.00	-15.22	T4	
		5MHz	40185	7.69	-28.53		2.00	36.22	20.00	-16.22	T4	
LTE Band 41		5MHz	39750	7.80	-27.27		2.00	35.07	20.00	-15.07	T4	
LIE Ballu 41		20MHz	40620	-0.05	-22.48			22.43	20.00	-2.43	Т3	
		15MHz	41490	0.00	-23.45			23.45	20.00	-3.45	Т3	
		15MHz	41055	-0.12	-24.38			24.26	20.00	-4.26	Т3	
	Radial	15MHz	40620	-0.05	-21.99	-63.55	N/A	21.94	20.00	-1.94	Т3	2.6, 2.6
	Radiai	15MHz	40185	-0.11	-23.00	-03.55	IVA	22.89	20.00	-2.89	Т3	2.0, 2.0
		15MHz	39750	-0.02	-21.99			21.97	20.00	-1.97	Т3	1
		10MHz	40620	0.05	-22.01			22.06	20.00	-2.06	Т3	
		5MHz	40620	-0.12	-22.86			22.74	20.00	-2.74	Т3	1

Table 8-12 Raw Data Results for EDGE (OTT VoIP)

	Nan Bala Nocallo for EBGE (GT)										
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
EDGE850	Axial	190	7.28	-31.24	-64.24	1.35	38.52	20.00	-18.52	T4	2.0, 1.8
EDGE050	Radial	190	-1.54	-36.24	-63.55	N/A	34.70	20.00	-14.70	T4	2.6, 2.6
EDGE1900	Axial	661	7.10	-34.64	-64.24	1.11	41.74	20.00	-21.74	T4	2.0, 1.8
EDGE 1900	Radial	661	-1.45	-41.21	-63.55	N/A	39.76	20.00	-19.76	T4	2.6, 2.6

FCC ID: ZNFK200TM	PCTEST* Proud to be port of the element	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 20 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 30 of 72

Table 8-13 Raw Data Results for HSPA (OTT VoIP)

				Data it	counto ioi		J	,			
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	7.11	-43.31	-64.24	1.49	50.42	20.00	-30.42	T4	2.0, 1.8
nora v	Radial	4183	-1.63	-52.76	-63.55	N/A	51.13	20.00	-31.13	T4	2.6, 2.6
HSPA IV	Axial	1412	7.41	-45.99	-64.24	1.43	53.40	20.00	-33.40	T4	2.0, 1.8
HOPAIV	Radial	1412	-1.69	-51.47	-63.55	N/A	49.78	20.00	-29.78	T4	2.6, 2.6
HSPA II	Axial	9400	7.14	-44.82	-64.24	1.41	51.96	20.00	-31.96	T4	2.0, 1.8
HOFAII	Radial	9400	-1.60	-52.48	-63.55	N/A	50.88	20.00	-30.88	T4	2.6, 2.6

Table 8-14 Raw Data Results for LTE B66 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	132572	7.58	-40.62		1.29	48.20	20.00	-28.20	T4	
		20MHz	132322	7.49	-38.28		1.33	45.77	20.00	-25.77	T4	
		20MHz	132072	7.64	-40.37		1.31	48.01	20.00	-28.01	T4	
	Axial	15MHz	132322	7.63	-39.44	-64.70	1.29	47.07	20.00	-27.07	T4	2.0, 1.8
	Axiai	10MHz	132322	7.66	-40.15	-04.70	1.31	47.81	20.00	-27.81	T4	2.0, 1.0
		5MHz	132322	7.70	-40.05		1.29	47.75	20.00	-27.75	T4	
		3MHz	132322	7.64	-39.72		1.31	47.36	20.00	-27.36	T4	
LTE Band 66		1.4MHz	132322	7.68	-40.28		1.30	47.96	20.00	-27.96	T4	
LIE Ballu 66		20MHz	132322	-1.43	-41.69			40.26	20.00	-20.26	T4	
		15MHz	132322	-1.45	-39.57			38.12	20.00	-18.12	T4	
		10MHz	132622	-1.48	-42.11			40.63	20.00	-20.63	T4	
	Radial	10MHz	132322	-1.57	-38.57	-63.93	N/A	37.00	20.00	-17.00	T4	2.6, 2.6
	Radiai	10MHz	132022	-1.52	-40.07	-03.93	IN/A	38.55	20.00	-18.55	T4	2.6, 2.6
		5MHz	132322	-1.47	-39.49			38.02	20.00	-18.02	T4	
		3MHz	132322	-1.44	-39.38			37.94	20.00	-17.94	T4	
		1.4MHz	132322	-1.44	-40.24			38.80	20.00	-18.80	T4	

Table 8-15 Raw Data Results for LTE B41 Power Class 2 (OTT VolP)

		110	IW Data	iveauita		D41 PU	WCI Olas	33 Z (O I				
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	7.52	-28.52		1.31	36.04	20.00	-16.04	T4	
		15MHz	40620	7.47	-28.51		1.30	35.98	20.00	-15.98	T4	
		10MHz	40620	7.49	-28.47		1.31	35.96	20.00	-15.96	T4	
	Axial	5MHz	41490	7.40	-30.08	-64.24	1.30	37.48	20.00	-17.48	T4	2.0, 1.8
	Axiai	5MHz	41055	7.47	-29.30	-04.24	1.28	36.77	20.00	-16.77	T4	2.0, 1.0
		5MHz	40620	7.50	-28.12		1.27	35.62	20.00	-15.62	T4	
		5MHz	40185	7.44	-28.86		1.30	36.30	20.00	-16.30	T4	ł
LTE Band 41		5MHz	39750	7.29	-27.92		1.25	35.21	20.00	-15.21	T4	
LIE Ballu 41		20MHz	40620	-6.74	-33.79			27.05	20.00	-7.05	T3	
		15MHz	41490	-6.82	-34.75			27.93	20.00	-7.93	Т3	
		15MHz	41055	-6.82	-34.91			28.09	20.00	-8.09	Т3	
	Radial	15MHz	40620	-6.72	-33.46	62.55	N/A	26.74	20.00	-6.74	Т3	2.8, 0.2
	Radiai	15MHz	40185	-6.86	-34.34	-63.55	IN/A	27.48	20.00	-7.48	Т3	2.0, 0.2
		15MHz	39750	-6.82	-33.81			26.99	20.00	-6.99	T3	
		10MHz	40620	-6.70	-33.62			26.92	20.00	-6.92	T3	
		5MHz	40620	-6.79	-33.95			27.16	20.00	-7.16	Т3	

FCC ID: ZNFK200TM	PCTEST* Proud to be port of the sentent	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dog 21 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 31 of 72
© 2020 PCTEST		·		REV 3.5.M

Table 8-16 Raw Data Results for 2.4GHz WIFI (OTT VoIP)

					10 101 2.		. (3	• /			
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		1	7.42	-38.47		1.32	45.89	20.00	-25.89	T4	
	Axial	6	7.39	-37.67	-64.24	1.33	45.06	20.00	-25.06	T4	2.0, 1.8
IEEE		11	7.50	-37.09		1.31	44.59	20.00	-24.59	T4	
802.11b		1	-1.60	-47.03			45.43	20.00	-25.43	T4	
	Radial	6	-1.67	-45.51	-63.55	N/A	43.84	20.00	-23.84	T4	2.6, 2.6
		11	-1.57	-47.84			46.27	20.00	-26.27	T4	
IEEE	Axial	6	7.41	-40.95	-64.24	1.30	48.36	20.00	-28.36	T4	2.0, 1.8
802.11g	Radial	6	-1.94	-50.31	-63.55	N/A	48.37	20.00	-28.37	T4	2.6, 2.6
IEEE	Axial	6	7.43	-41.14	-64.24	1.32	48.57	20.00	-28.57	T4	2.0, 1.8
802.11n	Radial	6	-1.69	-50.94	-63.55	N/A	49.25	20.00	-29.25	T4	2.6, 2.6

II. **Test Notes**

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Settings→Accessibility→Hearing aids) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G modes.
- 6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);

C. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);

D. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 99%RB offset
- 3. Vocoder Configuration: WB AMR 6.60kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 71 at 15MHz is the worst-case for the Axial probe orientation. LTE Band 71 at 15MHz bandwidth is the worst-case for the Radial probe orientation.

FCC ID: ZNFK200TM	PCTEST . Thought to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 32 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 32 01 72

E. LTE TDD


- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 99%RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 0
- 4. Power Class 2 Uplink-Downlink configuration: 1
- 5. Vocoder Configuration: WB AMR 6.60kbps
- 6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 15MHz is the worst-case for the Radial probe orientation.

F. OTT VolP


- 1. Vocoder Configuration: 75kbps
- 2. EDGE Configuration
 - a. MCS Index: 7
 - b. Number of TX slots: 2
- 3. HSPA Configuration:
 - a. Release: 6
 - b. 3GPP 34.121 Subtest 1
- 4. LTE FDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 99%RB offset
 - c. LTE Band 66 was the worst-case band from Table 6-5 and was used to test both Axial and Radial probe orientations.
 - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 66 at 20MHz is the worst-case for the Axial probe orientation. LTE Band 66 at 10MHz bandwidth is the worst-case for the Radial probe orientation.
- 5. LTE TDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 99%RB offset
 - c. Power Class 2 Uplink-Downlink configuration: 1
 - d. LTE Band 41 (Power Class 2) was the worst-case band from Table 6-6 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 15MHz is the worst-case for the Radial probe orientation.
- 6. WIFI Configuration:
 - a. Radio Configuration
 - i. IEEE 802.11b: CCK, 11Mbps
 - ii. IEEE 802.11g: BPSK, 9Mbps
 - iii. IEEE 802.11n: BPSK, MCS 0
 - b. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for both the Axial and Radial probe orientations.

FCC ID: ZNFK200TM	PCTEST Proud to be port of a stemment	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 22 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 33 of 72

III. 1 kHz Vocoder Application Check

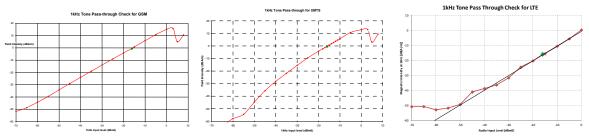

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

IV. T-Coil Validation Test Results

Table 8-17
Helmholtz Coil Validation Table of Results – 10/5/2020

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.229	PASS
Environmental Noise	< -58 dBA/m	-64.24	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.296	PASS
Environmental Noise	< -58 dBA/m	-63.55	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS


FCC ID: ZNFK200TM	PCTEST houd to be pet of a classed	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 34 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 34 01 72

Table 8-18 Helmholtz Coil Validation Table of Results - 10/12/2020

ltem	Target	Result	Verdict	
Axial				
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.237	PASS	
Environmental Noise	< -58 dBA/m	-64.70	PASS	
Frequency Response, from limits	> 0 dB	0.70	PASS	
Radial				
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.390	PASS	
Environmental Noise	< -58 dBA/m	-63.93	PASS	
Frequency Response, from limits	> 0 dB	0.70	PASS	

FCC ID: ZNFK200TM	PCTEST . Proud to be port of the simular	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dogg 25 of 70	
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 35 of 72	

٧. **ABM1 Magnetic Field Distribution Scan Overlays**

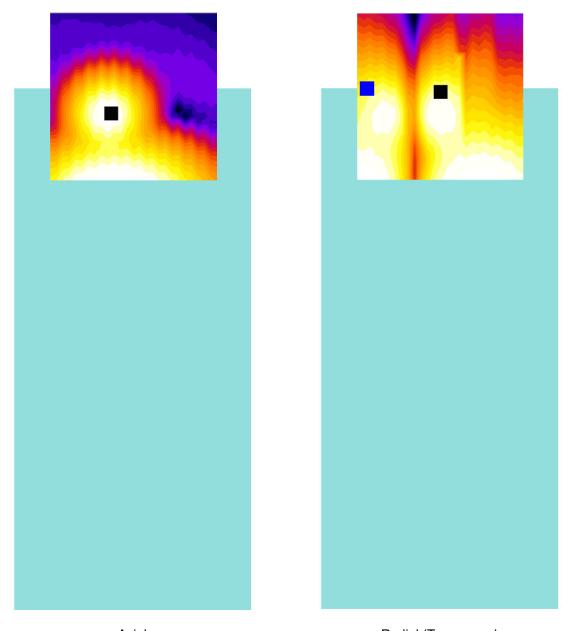

Axial Radial (Transverse) Figure 8-1

T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots. The blue cursor indicates the Radial test location for Radial LTE TDD Band 41 Power Class 2
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFK200TM	PCTEST Proud to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 36 of 72	
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 30 01 72	

9. MEASUREMENT UNCERTAINTY

Table 9-1 Uncertainty Estimation Table

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)							0.71
Expanded uncertainty (k=2), 95% confidence level							1.31

Notes:

- 1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFK200TM	PCTEST* Provid to be port of ® element	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 37 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		9

© 2020 PCTEST REV 3.5.M

EQUIPMENT LIST 10.

Table 10-1 Equipment List

		=94:5::0::: =:0:				
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Temperature / Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291470
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	4/24/2019	Biennial	4/24/2021	7BFNM32
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	4/24/2019	Biennial	4/24/2021	23528889
Listen	SoundConnect	Microphone Power Supply	4/22/2019	Biennial	4/22/2021	PS2612
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/4/2020	Annual	2/4/2021	162125
Rohde & Schwarz	CMW500	Radio Communication Tester	5/21/2020	Annual	5/21/2021	128635
Seekonk	NC-100	Torque Wrench (8" lb)	8/4/2020	Biennial	8/4/2022	N/A
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A
TEM	Helmholtz Coil	Helmholtz Coil	5/20/2019	Biennial	5/20/2021	925
TEM	Axial T-Coil Probe	Axial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1124
TEM	Radial T-Coil Probe	Radial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1130

FCC ID: ZNFK200TM	PCTEST . Proud to be port of the simular	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 20 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 38 of 72

11. TEST DATA

FCC ID: ZNFK200TM	PCTEST Proud to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 20 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 39 of 72



DUT: HH Coil - SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

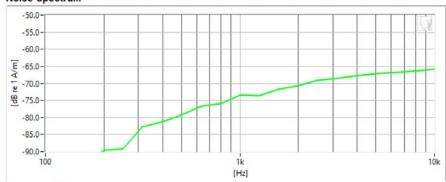

Frequency Response

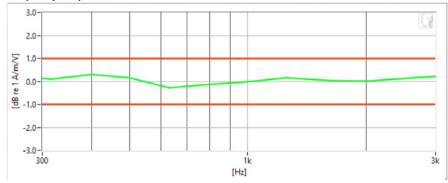

Results

Verification 1kHz Intensity	-10.229	dB	\checkmark	Max/Min	-9.5/-10.5
Verification ABM2	-64.24	dB	\checkmark	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 40 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 40 01 72




DUT: HH Coil - SN: 925 Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

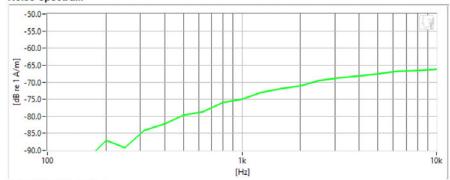

Frequency Response

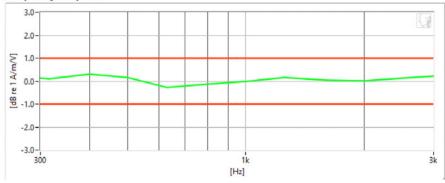

Results

Verification 1kHz Intensity	-10.237	dB	\checkmark	Max/Min	-9.5/-10.5
Verification ABM2	-64.7	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK200TM	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 41 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 41 01 72



DUT: HH Coil - SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

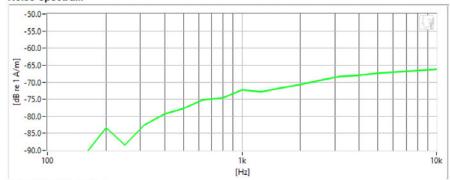

Frequency Response

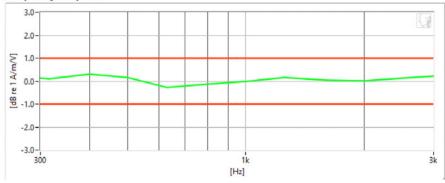

Results

Verification 1kHz Intensity	-10.296	dB	\checkmark	Max/Min	-9.5/-10.5
Verification ABM2	-63.55	dB	\checkmark	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK200TM	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 42 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 42 of 72



DUT: HH Coil - SN: 925


Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

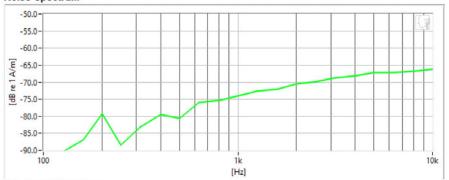

Frequency Response

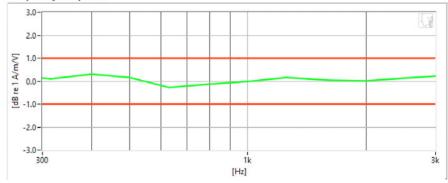

Results

Verification 1kHz Intensity	-10.39 dB	\checkmark	Max/Min	-9.5/-10.5
Verification ABM2	-63.93 dB	₹	Maximum	-58.0
Frequency Response Margin	700m dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFK200TM	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 43 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 43 01 72



Serial: 18878


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: GSM 850 Channel: 190
- Speech Signal: ITU-T P.50 Artificial Voice

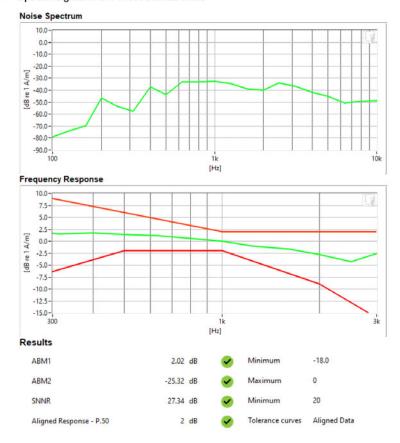

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 44 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		raye 44 01 72



Serial: 18878


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: GSM 1900 Channel: 810
- Speech Signal: ITU-T P.50 Artificial Voice

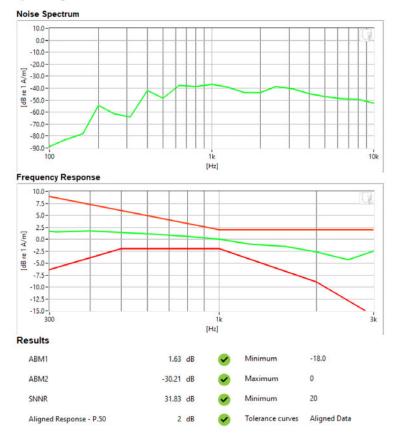

FCC ID: ZNFK200TM	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 45 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 45 of 72



Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

. Mode: UMTS Band V

Channel: 4183

Speech Signal: ITU-T P.50 Artificial Voice

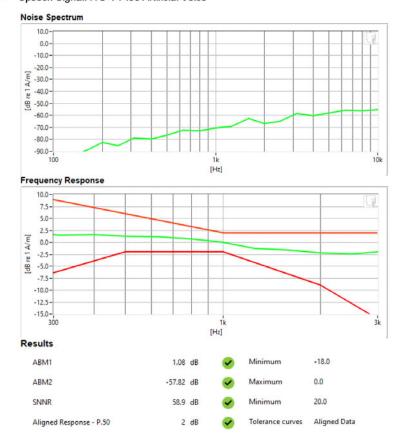

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 46 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		raye 40 01 72




Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: UMTS Band IV
- Channel: 1513
- Speech Signal: ITU-T P.50 Artificial Voice

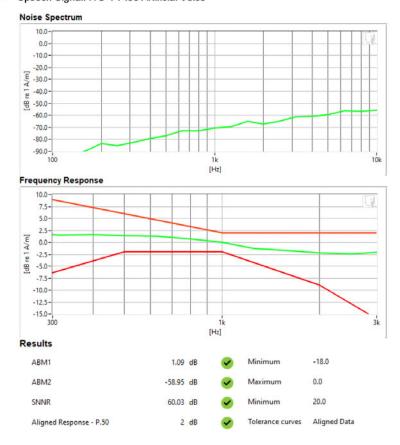

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 47 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		raye 47 01 72



Serial: 18878


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: UMTS Band II
- Channel: 9538
- · Speech Signal: ITU-T P.50 Artificial Voice

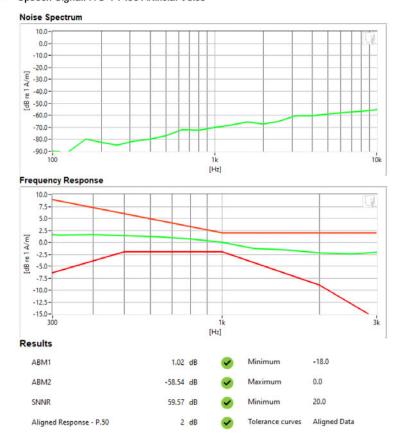

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 48 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 40 01 72



Serial: 18878

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

Mode: LTE FDD Band 71 Bandwidth: 15MHz Channel: 133297

Speech Signal: ITU-T P.50 Artificial Voice

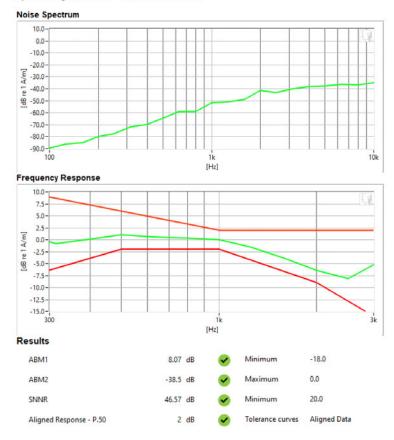

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 49 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 49 01 72



Serial: 18878


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- . Mode: LTE TDD Band 41 (Power Class 2)
- Bandwidth: 5MHzChannel: 39750
- Speech Signal: ITU-T P.50 Artificial Voice

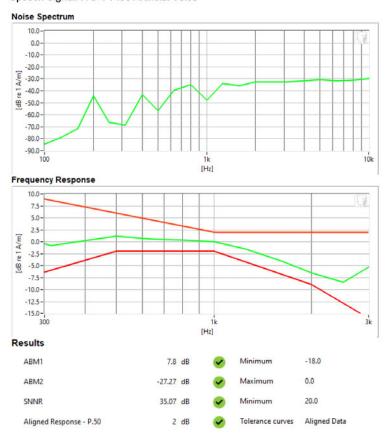

FCC ID: ZNFK200TM	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 50 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 50 01 72



Serial: 18878


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- VolP Application: Google Duo
- Mode: LTE TDD Band 41 (Power Class 2)
- Bandwidth: 5MHz Channel: 39750
- Speech Signal: ITU-T P.50 Artificial Voice

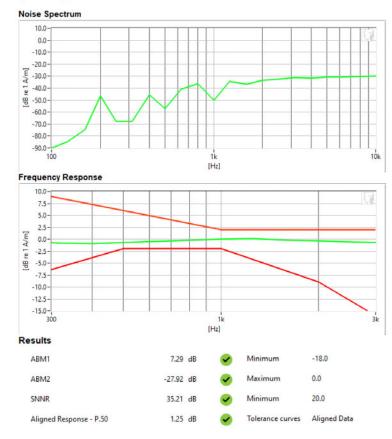

FCC ID: ZNFK200TM	PCTEST . Thought to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 51 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 51 01 72




Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

 Mode: GSM 850 Channel: 190

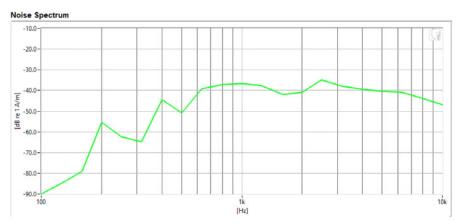

Results

Al	BM1	-7.26	dB	•	Minimum	-18.0
A	BM2	-29.83	dB	•	Maximum	0.0
SI	NNR	22.57	dB	✓	Minimum	20.0

FCC ID: ZNFK200TM	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 32 01 72



Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

 Mode: GSM 1900 • Channel: 810

Noise Spectrum

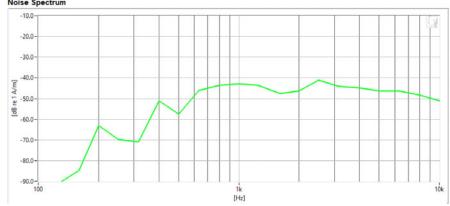

Results

ABM1	-7.32	dB	\checkmark	Minimum	-18.0
ABM2	-36.13	dB	•	Maximum	0.0
SNNR	28.81	dB	~	Minimum	20.0

FCC ID: ZNFK200TM	PCTEST . Thought to be port of a demonstration	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 52 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 53 of 72



Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

. Mode: UMTS Band V Channel: 4233

Noise Spectrum

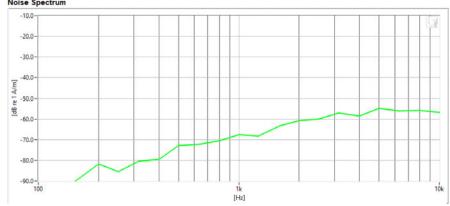

Results

ABM1	-7.69	dB	\checkmark	Minimum	-18.0
ABM2	-55.99	dB	•	Maximum	0.0
SNNR	48.3	dB	•	Minimum	20.0

FCC ID: ZNFK200TM	POTEST Proud to be port of the interested	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 54 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 34 01 72



Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

. Mode: UMTS Band IV Channel: 1513

Noise Spectrum

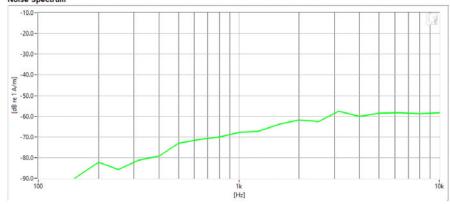

Results

ABM1	-7.69	dB	\checkmark	Minimum	-18.0
ABM2	-57.01	dB	•	Maximum	0.0
SNNR	49.32	dB	•	Minimum	20.0

FCC ID: ZNFK200TM	POTEST Proud to be port of the interested	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 55 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 55 01 72



Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

. Mode: UMTS Band II Channel: 9262

Noise Spectrum

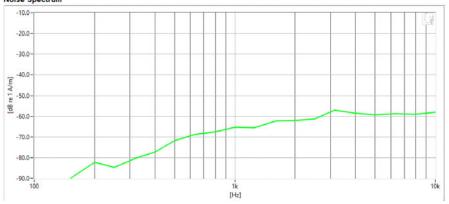

Results

ABM1	-7.6	dB	\checkmark	Minimum	-18.0
ABM2	-55.81	dB	•	Maximum	0.0
SNNR	48.21	dB		Minimum	20.0

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 56 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 50 01 72



Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

 Mode: LTE FDD Band 71 Bandwidth: 15MHz Channel: 133297

Noise Spectrum

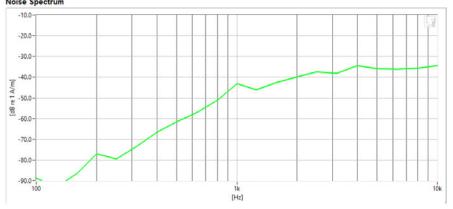

Results

ABM1	-330m	dB	\checkmark	Minimum	-18.0
ABM2	-34.87	dB	•	Maximum	0.0
SNNR	34.53	dB	~	Minimum	20.0

FCC ID: ZNFK200TM	PCTEST Proud to be port of a comment	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 57 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 37 01 72



Serial: 18878

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

Mode: LTE TDD Band 41 (Power Class 2)

Bandwidth: 15MHz Channel: 40620

Noise Spectrum

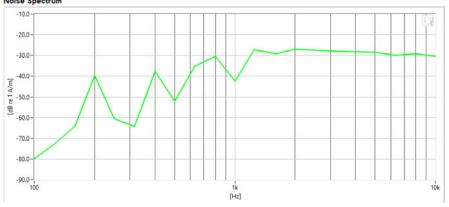

Results

ABM1	-50m	dB	$ \checkmark $	Minimum	-18.0
ABM2	-21.99	dB	•	Maximum	0.0
SNNR	21.94	dB	•	Minimum	20.0

FCC ID: ZNFK200TM	POTEST Proud to be port of the interested	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 58 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 36 01 72



pe: Portable Handse Serial: 18878

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019


Test Configuration:

VolP Application: Google Duo

Mode: LTE TDD Band 41 (Power Class 2)

Bandwidth: 15MHzChannel: 40620

Noise Spectrum

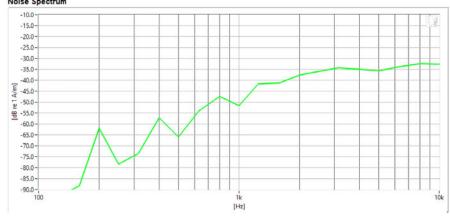

Results

ABM1	-6.72	dB	\checkmark	Minimum	-18.0
ABM2	-33.46	dB	•	Maximum	0.0
SNNR	26.74	dB	•	Minimum	20.0

FCC ID: ZNFK200TM	PCTEST . Thought to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 59 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Fage 39 01 72

CALIBRATION CERTIFICATES 12.

FCC ID: ZNFK200TM	PCTEST* Proud to be part of @ sterood	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 60 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		raye 00 01 72

© 2020 PCTEST **REV 3.5.M**



Certificate of Calibration

for

AXIAL T COIL PROBE

Manufactured by:

TEM CONSULTING AXIAL T COIL PROBE

Model No: Serial No:

TEM-1124 29973

Calibration Recall No:

Submitted By:

Customer:

ANDREW HARWELL

Company: Address:

PCTEST ENGINEERING LAB 6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM C

6/4/2019

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.
The information supplied relates to the calibrated item listed above.
West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

17-May-19

James Zhu

Certificate No:

QA Doc. #1051 Rev. 2.0 10/1/01

29973 -1

Quality Manager ISO/IEC 17025:2005

West Caldwell Calibration

Certificate Page 1 of 1

ACCREDITED

uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

FCC ID: ZNFK200TM

HAC (T-COIL) TEST REPORT

LG

Approved by:
Quality Manager

Filename:

1M2009170151-13-R1.ZNF

10/5/2020 - 10/12/2020

Portable Handset

Approved by:
Quality Manager

Page 61 of 72

© 2020 PCTEST

REV 3.5.M



ACCREDITED

Calibration Lab. Cert. # 1533.01

ISO/IEC 17025: 2005

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

for

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Labs

Model No.: Axial T Coil Probe

Serial No.: TEM-1124

I. D. No.: XXXX

Probe Sensitivity measured wit	h Helmhol	tz Coil			
Helmholtz Coil;			Before & after data same:	X	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.09	Α	Ambient Temperature:	20.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	42.7	% RH
Helmholtz Coil magnetic field;	5.96	A/m	Ambient Pressure:	98.256	kPa
			Calibration Date:	17-May-2019	
Probe Sensitivity at	1000	Hz.	Calibration Due:	17-May-2020	
was	-60.41	dBV/A/m	Report Number:	29973	-1
	0.954	mV/A/m	Control Number:	29973	
Probe resistance	903	Ohms			


The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers:

683/290345-18

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

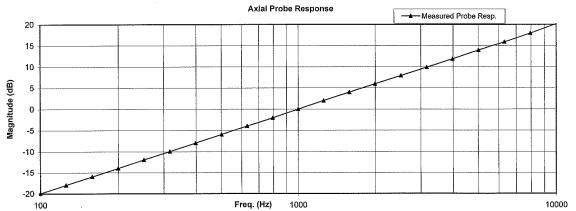

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 17025

Cal. Date: 17-May-2019

Measurements performed by:

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 1 of 2

FCC ID: ZNFK200TM	PCTEST* Proof to be post of ® element	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 60 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 62 of 72

HCATEMC_TEM-1124_May-17-2019

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

N

Model No.: Axial T Coil Probe

Serial No.: TEM-1124

TEM	Con	sultir	ng LP	Axial	Т	Coil	Prob
Company	: PC	Test	Engi	neerin	g	Labs	5

Test	Function	Tolera	nce	Measured values			
				Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.41			
			dB				
2.0	Probe Level Linearity		6	6.10			
		Ref. (0 dB)	0	0.00			
			-6	-6.00			
			-12	-12.00			
			Hz				
3.0	Probe Frequency Response		100	-19.9			
			126	-17.9			
			158	-16.0			
			200	-14.0			
			251	-12.0			
			316	-10.0			
			398	-8.0			
			f 501	-6.0			
			631	-3.9			
			794	-2.0			
		Ref. (0 dB)	1000	0.0			
			1259	2.0			
			1585	4.0			
			1995	5.9			
			2512	7.9			
			3162	9.9			
			3981	11.9			
			5012	13.9			
			6310	15.9			
			7943	18.0			
			10000	20.2			

			'		
Instruments used for c	alibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

FCC ID: ZNFK200TM	PCTEST	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 62 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 63 of 72



Certificate of Calibration

for

RADIAL T COIL PROBE

Manufactured by:

TEM CONSULTING

Model No:

RADIAL T COIL PROBE

Serial No: Calibration Recall No: TEM-1130 29973

Submitted By:

Customer:

ANDREW HARWELL

Company: Address: PCTEST ENGINEERING LAB 6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

6/4/2019

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above.

West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015 and ISO 17025.

Note: With this Certificate, Report of Calibration is Included.

Approved by:

Calibration Date:

17-May-19

James Zhu

Certificate No:

29973 -2

Quality Manager ISO/IEC 17025:2005

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

ACCREDITED

West Caldwell Calibration

10/5/2020 - 10/12/2020

uncompromised calibration Laboratories, Inc.

Calibration Lab. Cert. # 1533.01

1575 State Route 96, Victor, NY 14564, U.S.A.

FCC ID: ZNFK200TM

PCTEST:
MAC (T-COIL) TEST REPORT

Filename:
DUT Type:
Page 64 of 72

Portable Handset

© 2020 PCTEST

1M2009170151-13-R1.ZNF

REV 3.5.M



1575 State Route 96, Victor NY 14564



REPORT OF CALIBRATION

for

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Labs

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

I. D. No.: XXXX

Probe Sensitivity measured wit	h Helmhol	tz Coil			
Helmholtz Coil;			Before & after data same:	X	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.08	Α	Ambient Temperature:	20.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	42.7	% RH
Helmholtz Coil magnetic field;	5.94	A/m	Ambient Pressure:	98.256	kPa
			Calibration Date:	17-May-2019	
Probe Sensitivity at	1000	Hz.	Calibration Due:	17-May-2020	
was	-60.37	dBV/A/m	Report Number:	29973	-2
	0.958	mV/A/m	Control Number:	29973	
Probe resistance	895	Ohms			


The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers:

683/290345-18

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

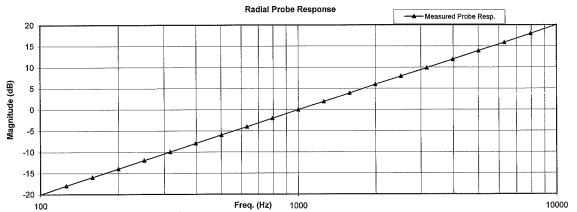

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 17025

Cal. Date: 17-May-2019

Measurements performed by:

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 1 of 2

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 65 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 03 01 72

HCRTEMC_TEM-1130_May-17-2019

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

for

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Labs

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

Function	Tolera	Measured values			
			Before	Out	Remarks
Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37		
		dB			
Probe Level Linearity		6	6.00		
	Ref. (0 dB)	0	0.00		
		-6	-6.10		
		-12	-12.10		ŀ
		Hz			
Probe Frequency Response		100	-20.0		
		126	-17.9		
		158	-16.0		
		200	-14.0		
		251	-12.0		
		316	-10.0		
		398			1
		501	-6.0		
		631	-4.0		
		794	-2.0		
	Ref. (0 dB)	1000	0.0		
		1259	1.9		
		1585	3.9		
		1995			
		2512	7.9		
		3162	9.9		
		3981	11.9		
		5012	13.9		
		6310	15.9		
		7943	18.0		
		10000	20.1		
	Probe Level Linearity	Probe Sensitivity at 1000 Hz. Probe Level Linearity Ref. (0 dB) Probe Frequency Response	Probe Sensitivity at 1000 Hz. dBV/A/m Probe Level Linearity 6 Ref. (0 dB) 0 -6 -12 Probe Frequency Response 100 126 158 200 251 316 398 501 631 794 Ref. (0 dB) 1000 1259 1585 1995 2512 3162 3981 5012 6310 7943	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37 Probe Level Linearity Ref. (0 dB) 0 0.00 -6 -6.10 -12 -12.10 Probe Frequency Response Hz Probe Frequency Response 100 -20.0 126 -17.9 158 -16.0 200 -14.0 251 -12.0 316 -10.0 398 -8.0 501 -6.0 631 -4.0 794 -2.0 Ref. (0 dB) 1000 0.0 1259 1.9 1585 3.9 1995 5.9 2512 7.9 3162 9.9 3981 11.9 5012 13.9 6310 15.9 7943 18.0	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37 Probe Level Linearity Ref. (0 dB) Ref. (0 dB)

Instruments used for o	alibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

FCC ID: ZNFK200TM	PCTEST'	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 66 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		rage 00 01 72

13. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFK200TM	PCTEST: Proud to be part of the element	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 67 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		

REFERENCES 14.

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, "IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- 11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, " U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- 12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report, Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

FCC ID: ZNFK200TM	PCTEST Proud to be port of a rement	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 60 of 70
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		Page 68 of 72

- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFK200TM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 69 of 72
1M2009170151-13-R1.ZNF	10/5/2020 - 10/12/2020	Portable Handset		1 age 09 01 72