



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless Headphone

Model: 861, 850, 862, 863, 894, 895, 897, 883, 881, 304, 806, 866, 853

Brand: ANC/ aoni

Test Report Number:

C151026Z04-RP1

Prepared for

ShenZhen Aoni Electronic Industry Co., Ltd
HongHui Industrial Park, 2nd LiuXian Road, Xin'An streets, District 68,
Bao'an District, ShenZhen, China

Prepared by

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: November 12, 2015



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 12, 2015	Initial Issue	ALL	Nancy Fu



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....4

2. EUT DESCRIPTION5

3. TEST METHODOLOGY6

 3.1 DESCRIPTION OF TEST MODES6

4. FACILITIES AND ACCREDITATIONS.....7

 4.1 FACILITIES.....7

 4.2 ACCREDITATIONS7

 4.3 MEASUREMENT UNCERTAINTY7

5. SETUP OF EQUIPMENT UNDER TEST8

 5.1 SETUP CONFIGURATION OF EUT8

 5.2 SUPPORT EQUIPMENT8

6. FCC PART 15.247 REQUIREMENTS9

 6.1 20DB BANDWIDTH.....9

 6.2 ANTENNA GAIN14

 6.3 PEAK POWER15

 6.4 PEAK POWER SPECTRAL DENSITY.....17

 6.5 BAND EDGES MEASUREMENT18

 6.6 FREQUENCY SEPARATION.....28

 6.7 NUMBER OF HOPPING FREQUENCY.....31

 6.8 TIME OF OCCUPANCY (DWELL TIME).....33

 6.9 SPURIOUS EMISSIONS.....40

 6.10 POWERLINE CONDUCTED EMISSIONS.....58



1. TEST RESULT CERTIFICATION

Product	Wireless Headphone
Model	861, 850, 862, 863, 894, 895, 897, 883, 881, 304, 806, 866, 853
Brand	ANC/ aoni
Tested	October 26~ November 12, 2015
Applicant	ShenZhen Aoni Electronic Industry Co., Ltd HongHui Industrial Park, 2nd LiuXian Road, Xin'An streets, District 68, Bao'an District, ShenZhen, China
Manufacturer	ShenZhen Aoni Electronic Industry Co., Ltd HongHui Industrial Park, 2nd LiuXian Road, Xin'An streets, District 68, Bao'an District, ShenZhen, China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Sunday Hu
Supervisor of EMC Dept.
Compliance Certification Services (Shenzhen) Inc.

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Services (Shenzhen) Inc.



2. EUT DESCRIPTION

Product	Wireless Headphone
Model Number	861, 850, 862, 863, 894, 895, 897, 883, 881, 304, 806, 866, 853
Brand	ANC/ aoni
Model Discrepancy	All models are identical to each other except their model name.
Identify Number	C151026Z04-RP1
Received Date	October 26, 2015
Power Supply	DC5V supplied by the notebook or DC3.7V supplied by the battery
Battery Manufacturer /Model No.	Shenzhen Jhy Science & Technology Co Ltd Model: JHY503030 Output: 3.7Vdc, 400mA
Frequency Range	2402 ~ 2480 MHz
Transmit Power	GFSK : -1.28dBm $\pi/4$ -DQPSK: 2.54dBm 8DPSK : 3.69dBm
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	PCB Antenna with -0.5dBi gain (Max)
Temperature Range	-20°C ~ +55°C
Hardware Version	1.0
Software Version	1.0
USB Cable	Unshielded, 0.80m
AUX Cable	Unshielded, 0.60m

Note: This submittal(s) (test report) is intended for FCC ID: Z63-BTHDP003 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

3.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charge + BT	<input checked="" type="checkbox"/>
	Mode 2: Charge + AUX	<input type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

Channel Low (2402MHz) 、 Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK 、 $\pi/4$ -DQPSK and 8DPSK, GFSK and 8DPSK were the worse case and print in the report.



4. FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



5. SETUP OF EQUIPMENT UNDER TEST

5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC	Brand	Data Cable	Power Cord
1	Notebook	E335	R9-WN1EF	DOC	Thinkpad	N/A	Unshielded 1.50m

Notes:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



6. FCC PART 15.247 REQUIREMENTS

6.1 20DB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.


TEST RESULTS

No non-compliance noted




Test plot

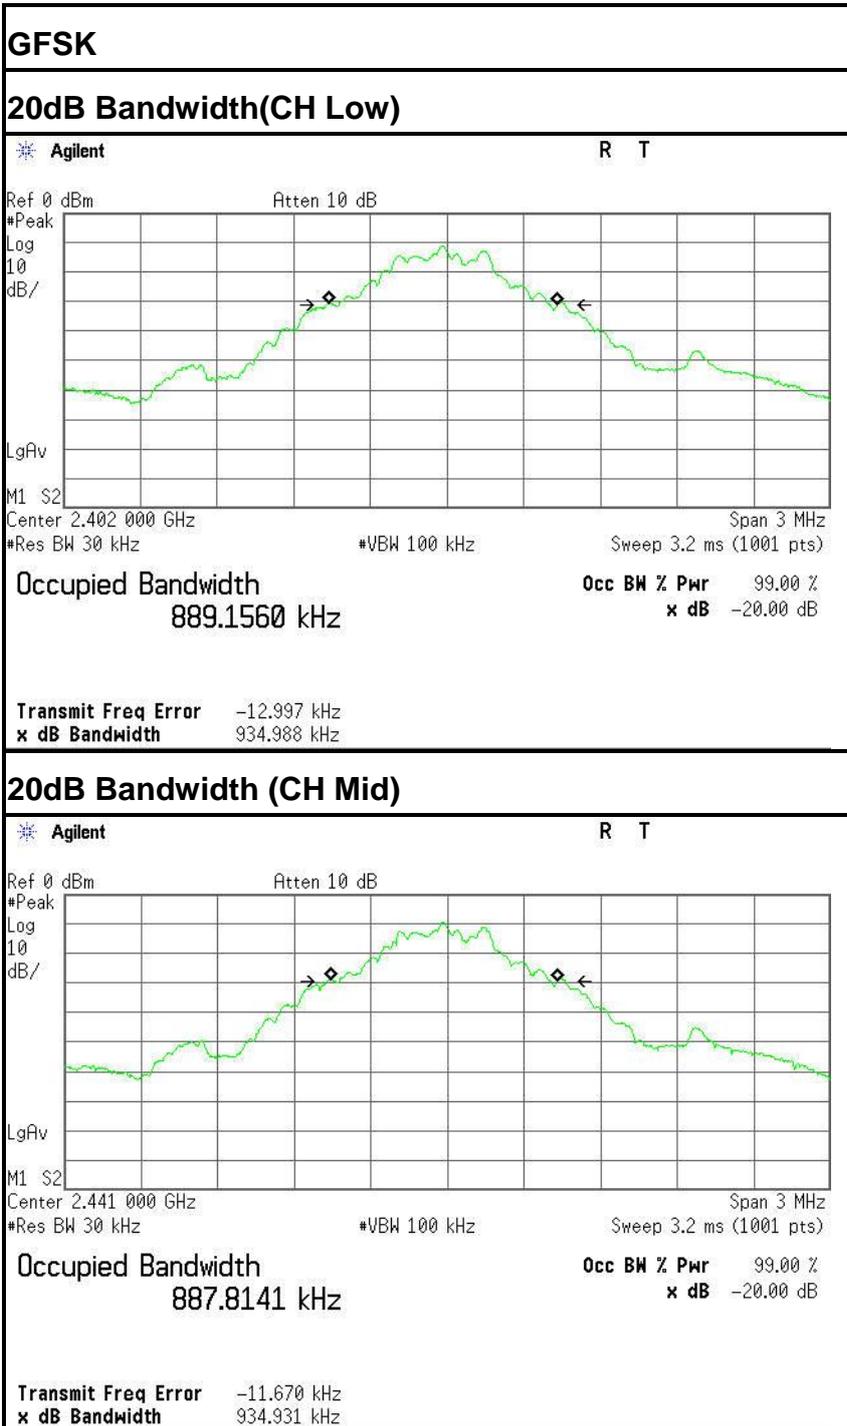


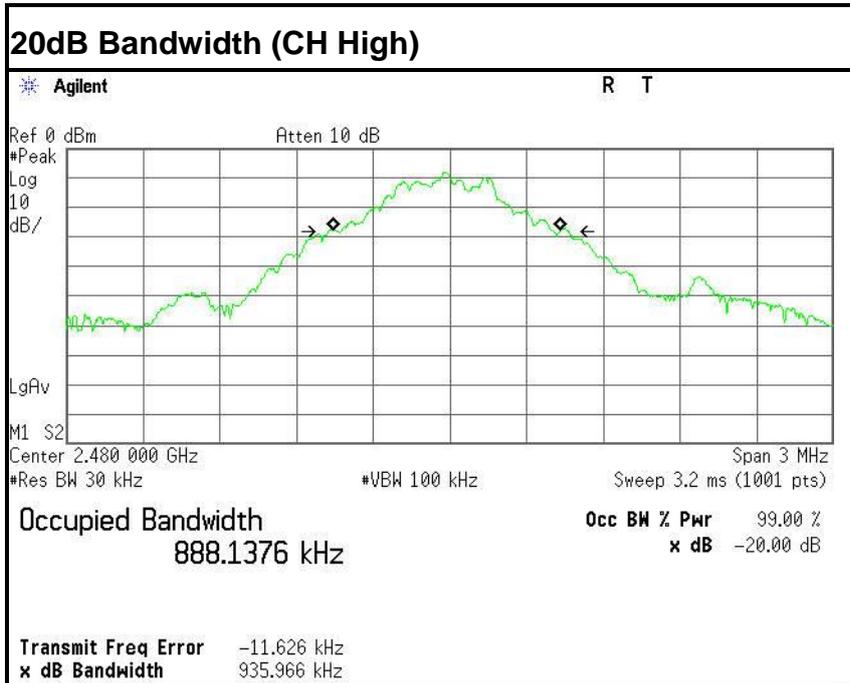



Test plot

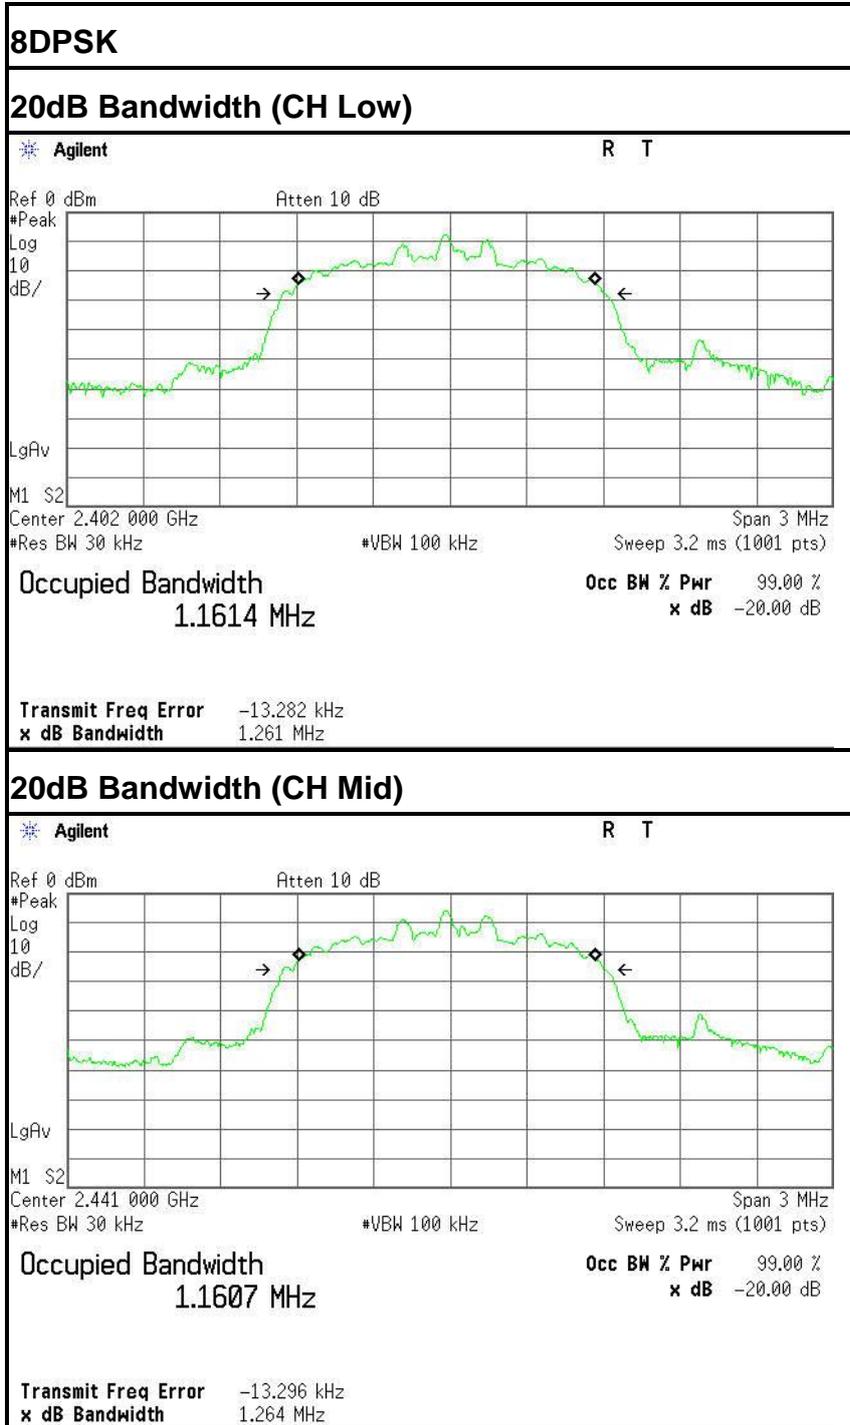

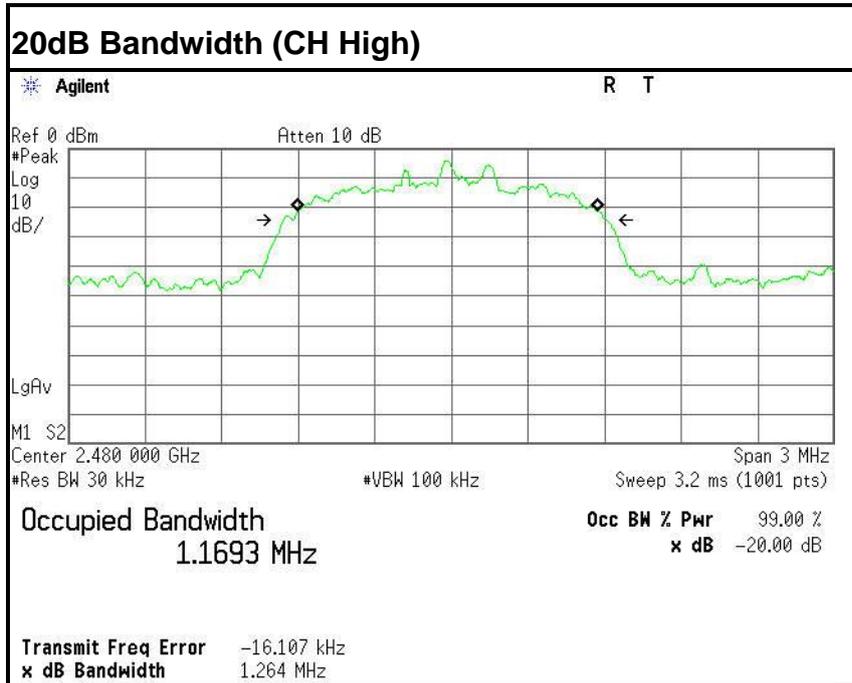



6.2 ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

GFSK

T _{nom}	V _{nom}	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with GFSK modulation		-4.51	-2.87	-1.28
Radiated power [dBm] Measured with GFSK modulation		-6.74	-6.34	-5.91
Gain [dBi] Calculated		-2.23	-3.47	-4.01
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

8DPSK

T _{nom}	V _{nom}	Lowest channel 2402MHz	Middle channel 2441MHz	Highest channel 2480MHz
Conducted power [dBm] Measured with 8DPSK modulation		0.10	1.96	3.69
Radiated power [dBm] Measured with 8DPSK modulation		-4.00	-3.92	-3.86
Gain [dBi] Calculated		-4.10	-5.88	-7.55
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		



6.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	02/28/2015	02/27/2016
Power Sensor	Anritsu	MA2411B	1126150	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

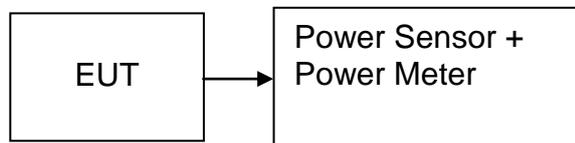

TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-8.01	3.50	-4.51	0.00035	1	peak	PASS
Mid	2441	-6.37	3.50	-2.87	0.00052			PASS
High	2480	-4.78	3.50	-1.28	0.00074			PASS
Low	2402	-8.89	3.50	-5.39	0.00029	1	AVG	PASS
Mid	2441	-7.04	3.50	-3.54	0.00044			PASS
High	2480	-5.40	3.50	-1.90	0.00065			PASS

$\pi/4$ -DQPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-3.77	3.50	-0.27	0.00094	1	peak	PASS
Mid	2441	-1.96	3.50	1.54	0.00143			PASS
High	2480	-0.96	3.50	2.54	0.00179			PASS
Low	2402	-6.09	3.50	-2.59	0.00055	1	AVG	PASS
Mid	2441	-4.05	3.50	-0.55	0.00088			PASS
High	2480	-3.55	3.50	-0.05	0.00099			PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Cable loss (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak /AVG	Result
Low	2402	-3.40	3.50	0.10	0.00102	1	peak	PASS
Mid	2441	-1.54	3.50	1.96	0.00157			PASS
High	2480	0.19	3.50	3.69	0.00234			PASS
Low	2402	-6.28	3.50	-2.78	0.00053	1	AVG	PASS
Mid	2441	-3.98	3.50	-0.48	0.00090			PASS
High	2480	-2.28	3.50	1.22	0.00132			PASS



6.4 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.



6.5 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	Agilent	N9038A	US44300399	02/28/2015	02/27/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2016
High Noise Amplifier	Agilent	8449B	3008A01838	02/28/2015	02/27/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2015	02/27/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/28/2015	02/27/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2015	02/27/2016
Loop Antenna	A、R、A	PLA-1030/B	1029	09/25/2015	09/24/2016
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Test Configuration

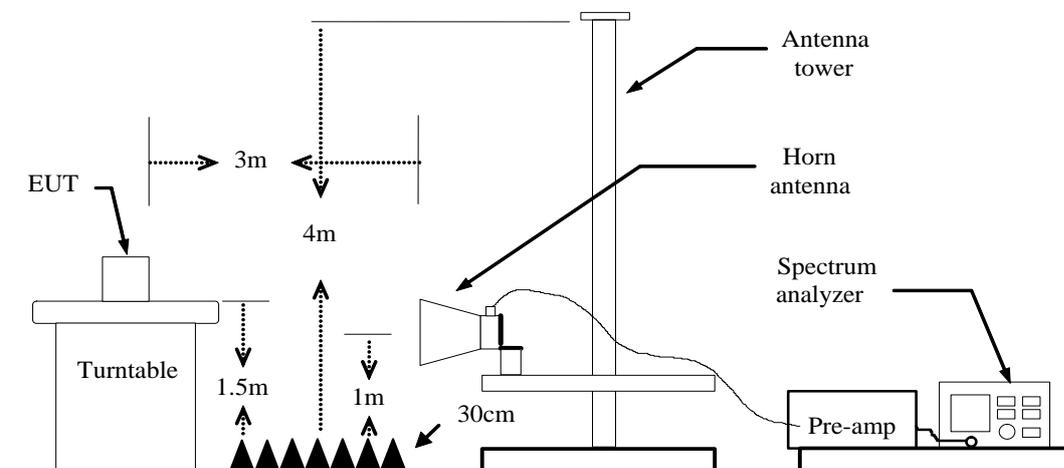



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=330Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



TEST RESULTS

Refer to attach spectrum analyzer data chart.





Test Data (GFSK)

Band Edges (CH-Low)

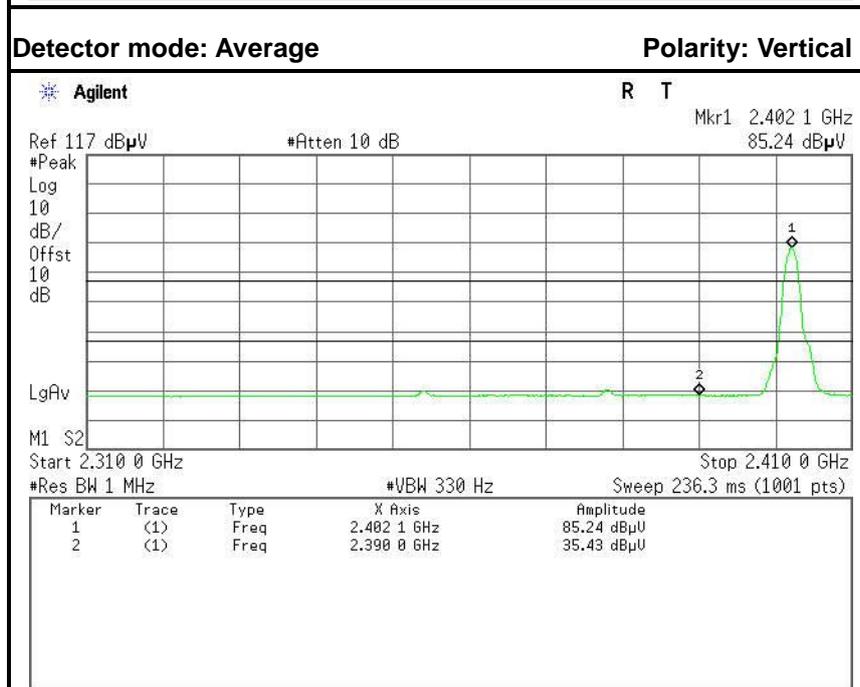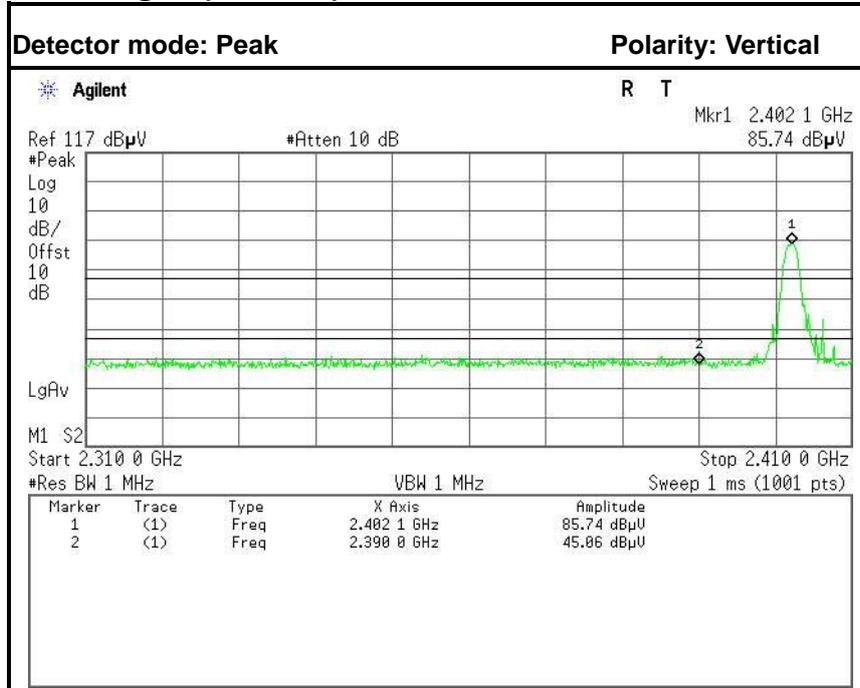



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	38.46	-6.60	45.06	74.00	-28.94	Peak	Vertical
2	2390.0000	28.83	-6.60	35.43	54.00	-18.57	Average	Vertical

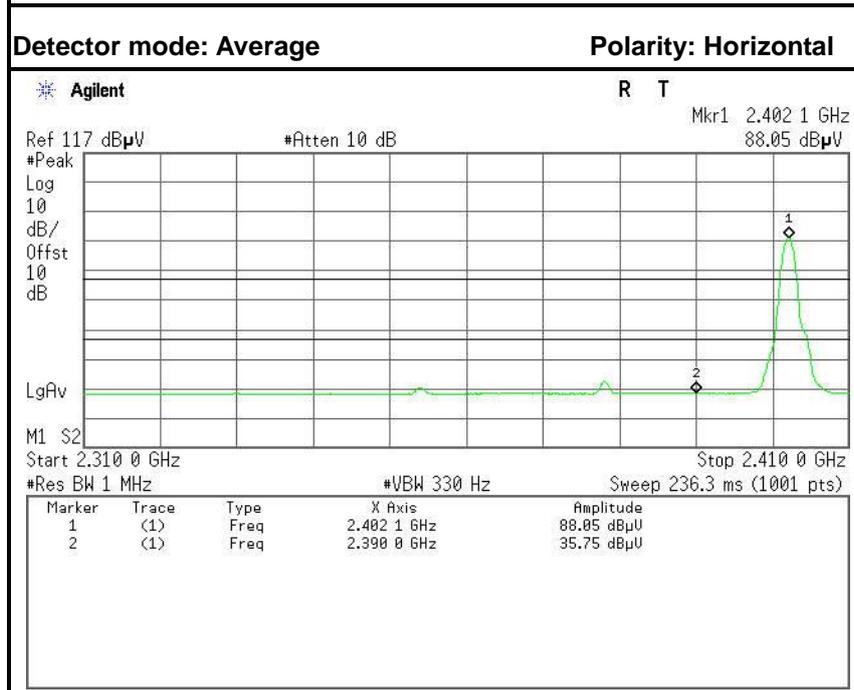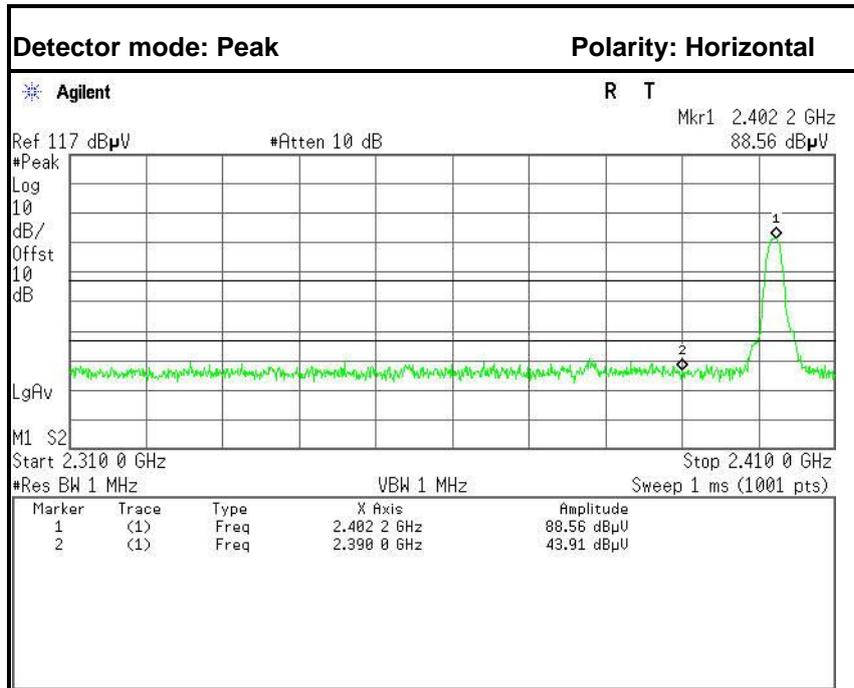



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	37.31	-6.60	43.91	74.00	-30.09	Peak	Horizontal
2	2390.0000	29.15	-6.60	35.75	54.00	-18.25	Average	Horizontal



Band Edges (CH-High)

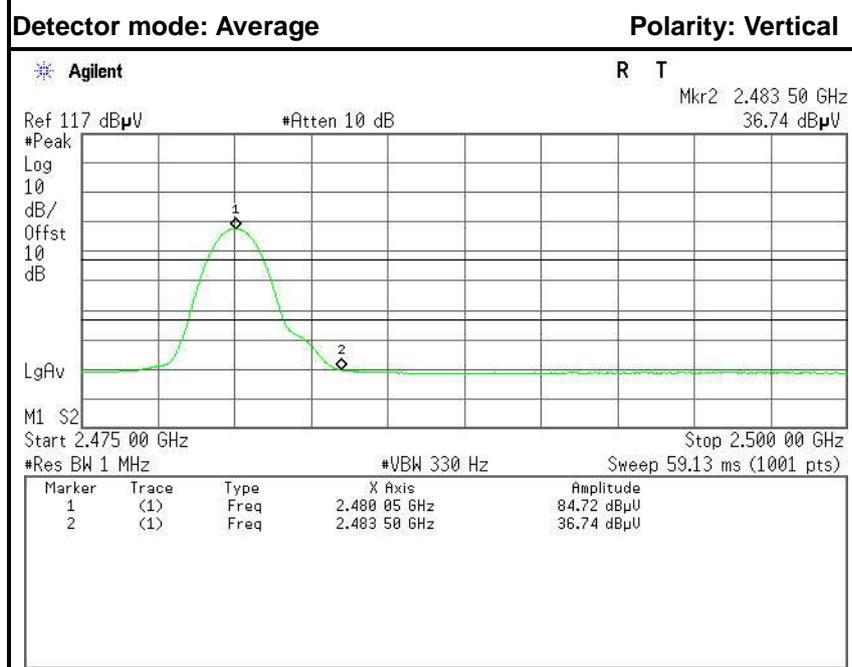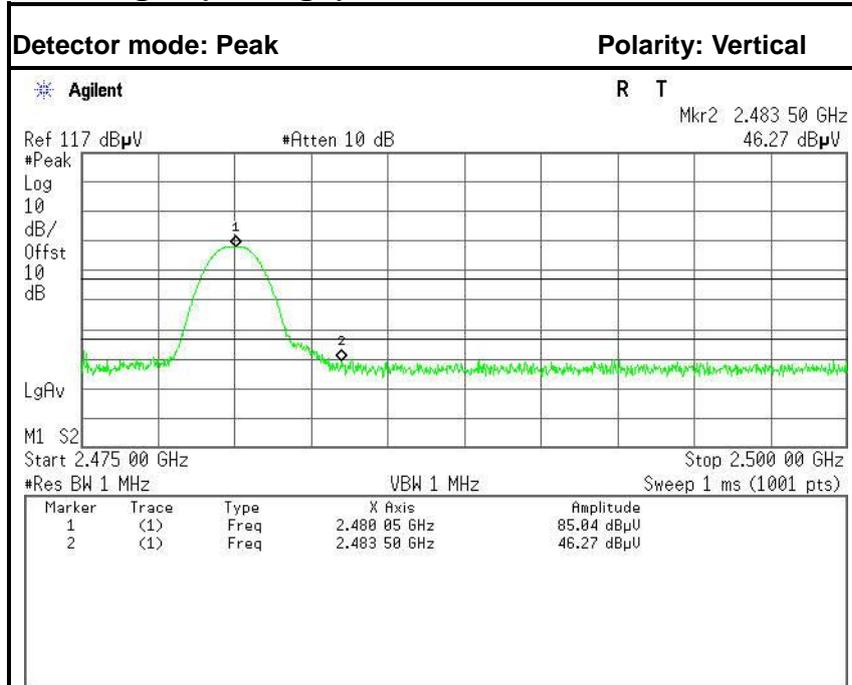

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	40.03	-6.24	46.27	74.00	-27.73	Peak	Vertical
2	2483.5000	30.50	-6.24	36.74	54.00	-17.26	Average	Vertical

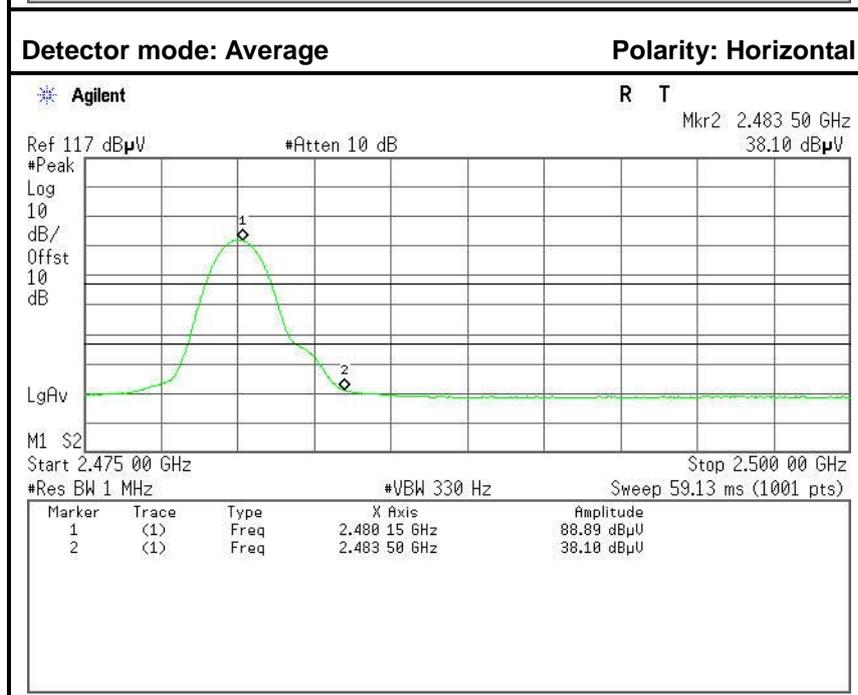
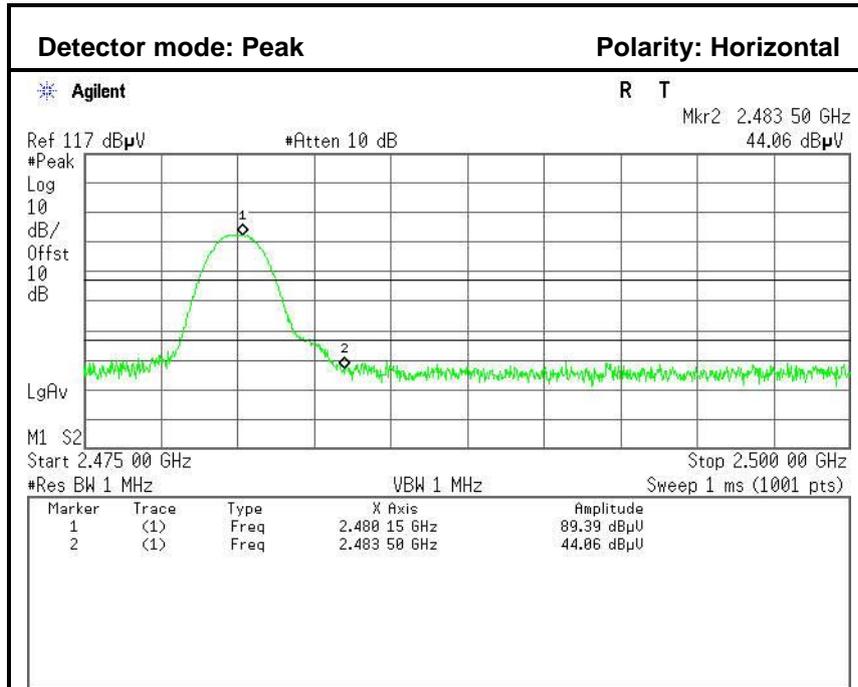


No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	37.82	-6.24	44.06	74.00	-29.94	Peak	Horizontal
2	2483.5000	31.86	-6.24	38.10	54.00	-15.90	Average	Horizontal





8DPSK

Band Edges (CH-Low)

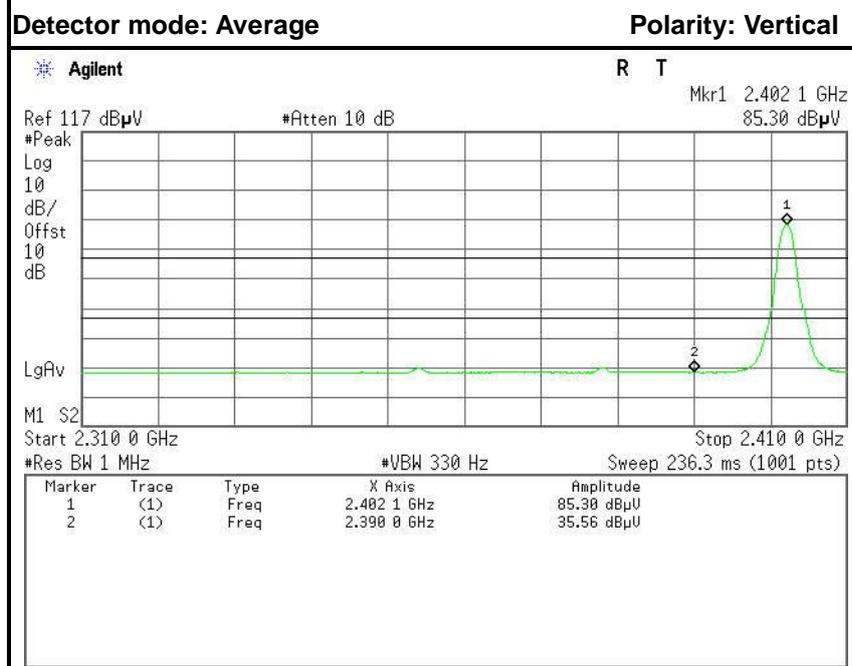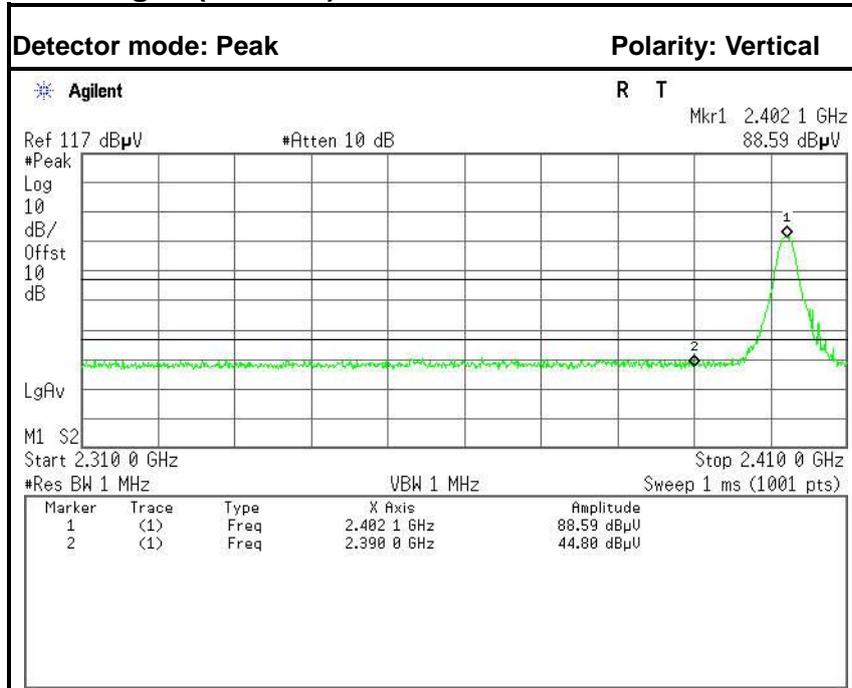



No.	Frequency (MHz)	Reading (dBµV)	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	38.20	-6.60	44.80	74.00	-29.20	Peak	Vertical
2	2390.0000	28.96	-6.60	35.56	54.00	-18.44	Average	Vertical

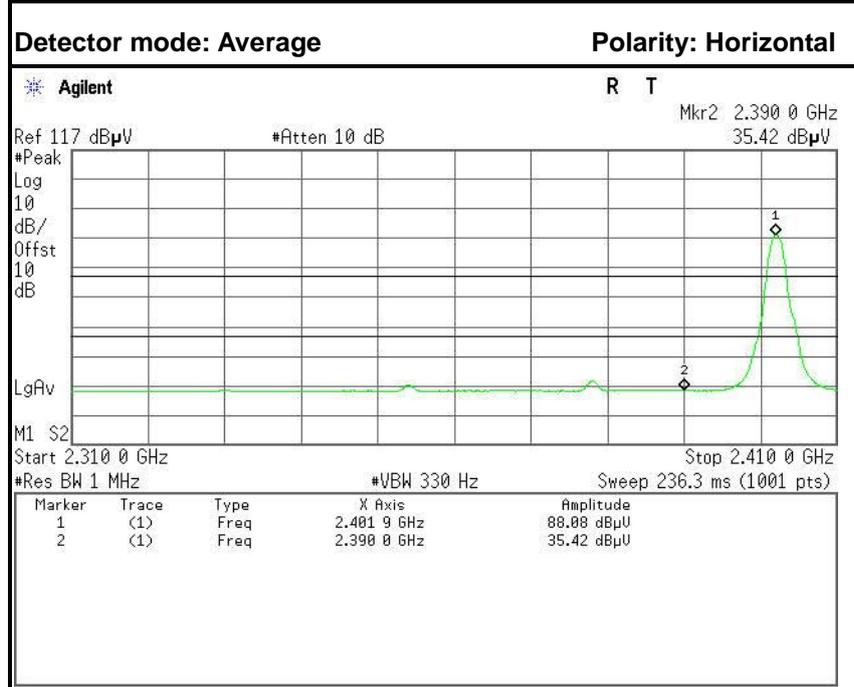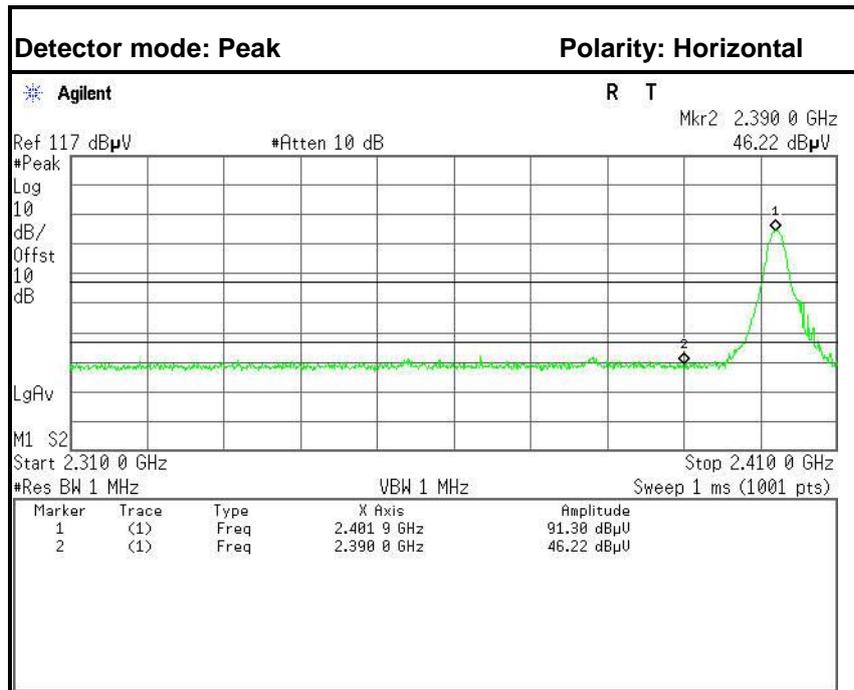



No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2390.0000	39.62	-6.60	46.22	74.00	-27.78	Peak	Horizontal
2	2390.0000	28.82	-6.60	35.42	54.00	-18.58	Average	Horizontal



Band Edges (CH-High)

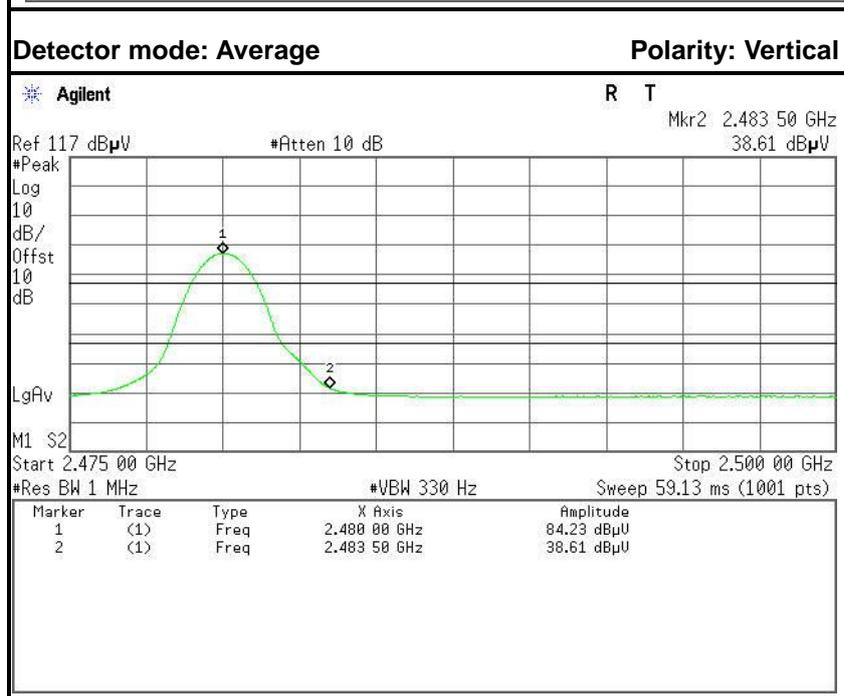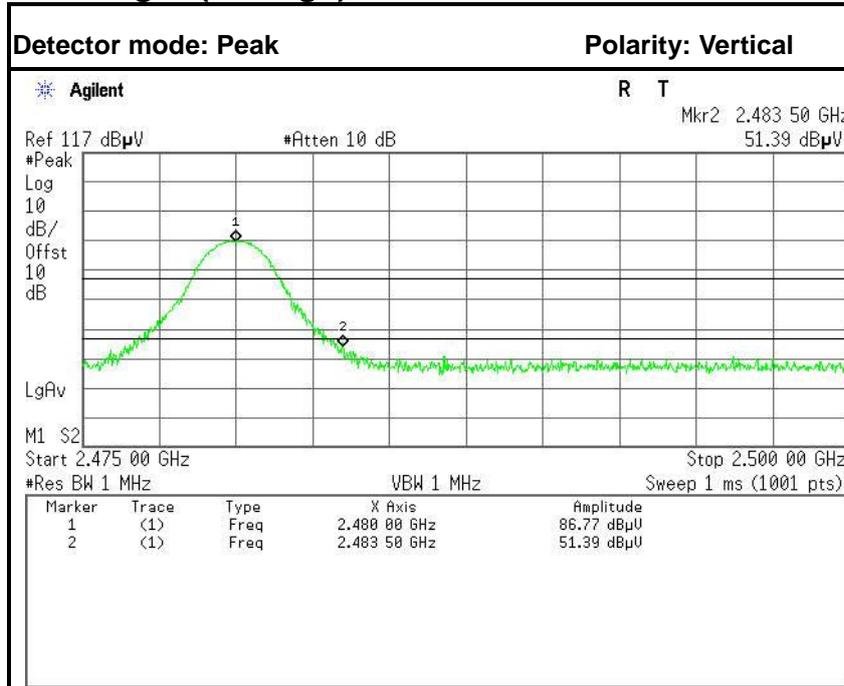

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	45.15	-6.24	51.39	74.00	-22.61	Peak	Vertical
2	2483.5000	32.37	-6.24	38.61	54.00	-15.39	Average	Vertical

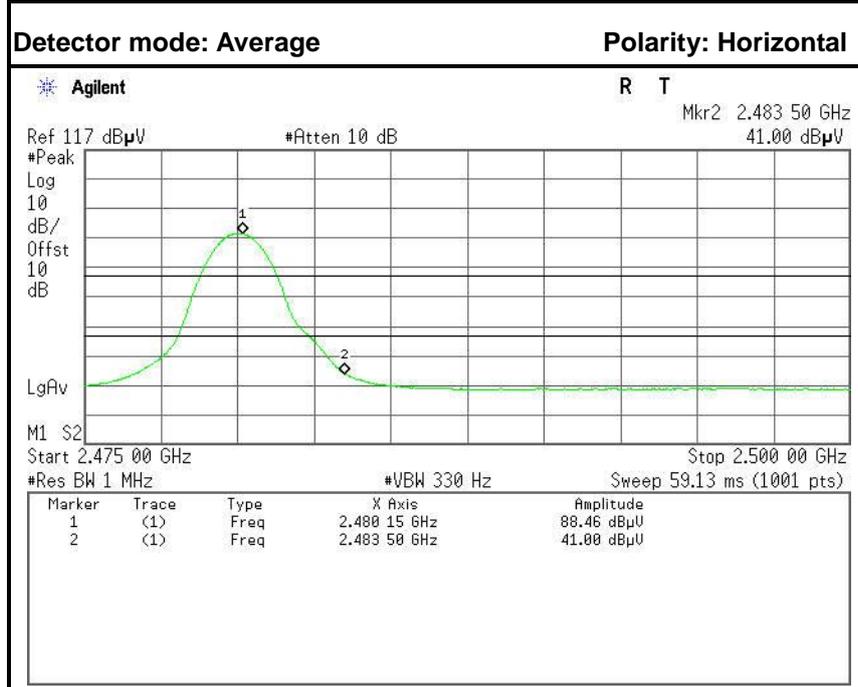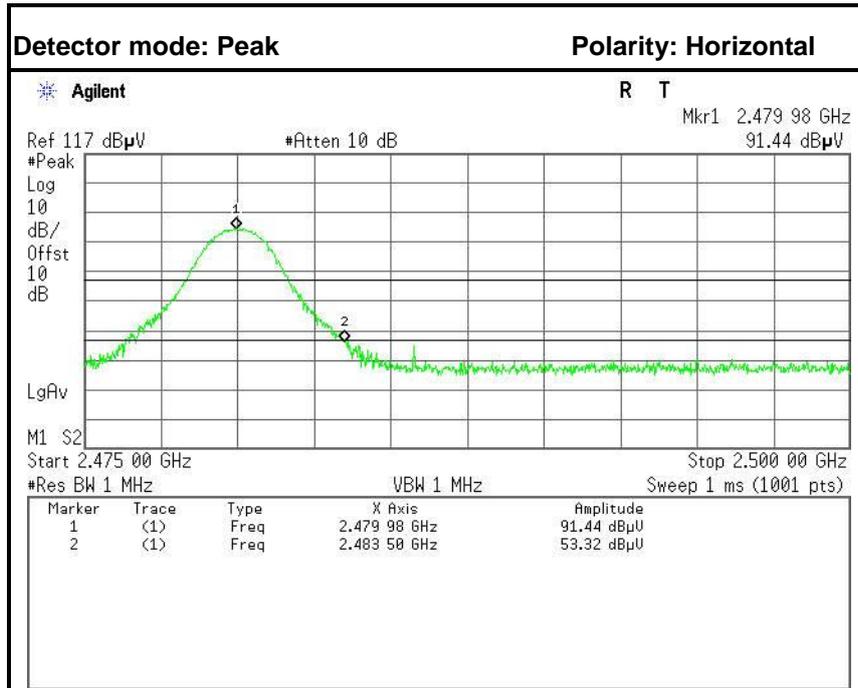

No.	Frequency (MHz)	Reading (dBuV)	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Antenna Pole
1	2483.5000	47.08	-6.24	53.32	74.00	-20.68	Peak	Horizontal
2	2483.5000	34.76	-6.24	41.00	54.00	-13.00	Average	Horizontal



6.6 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	685.333	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK


Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	880.000	> Two-thirds of the 20 dB Bandwidth	Pass




GFSK

Test Plot

Measurement of Channel Separation

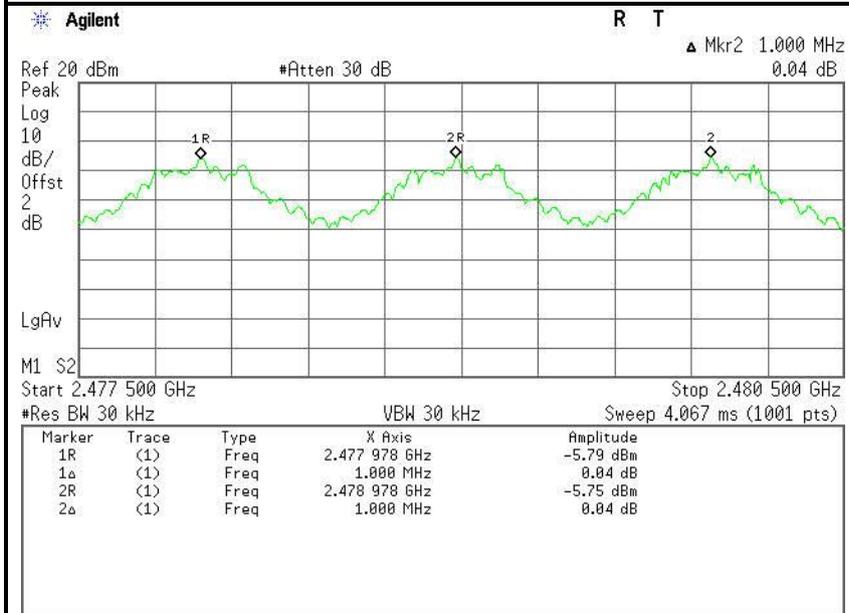

20 dB bandwidth(CH High)

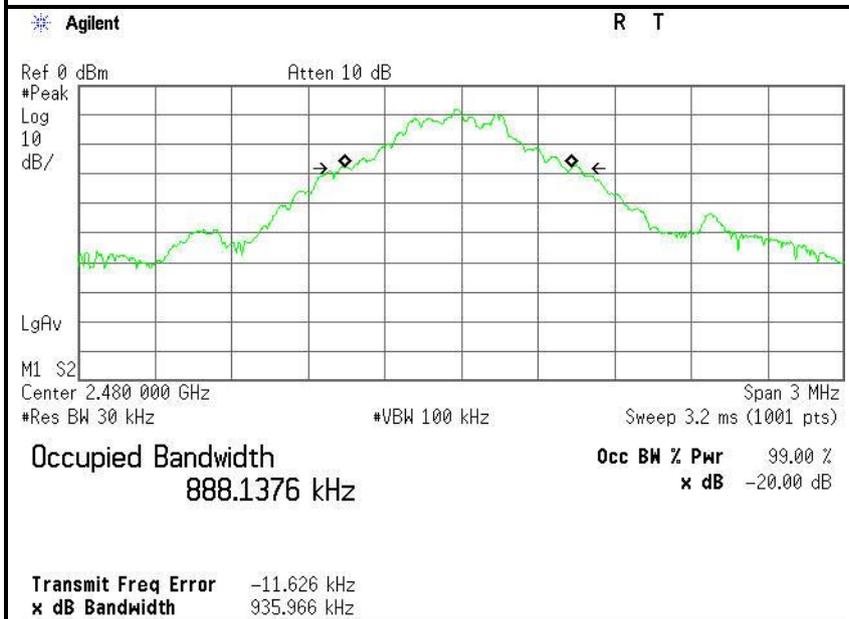





8DPSK

Test Plot

Measurement of Channel Separation

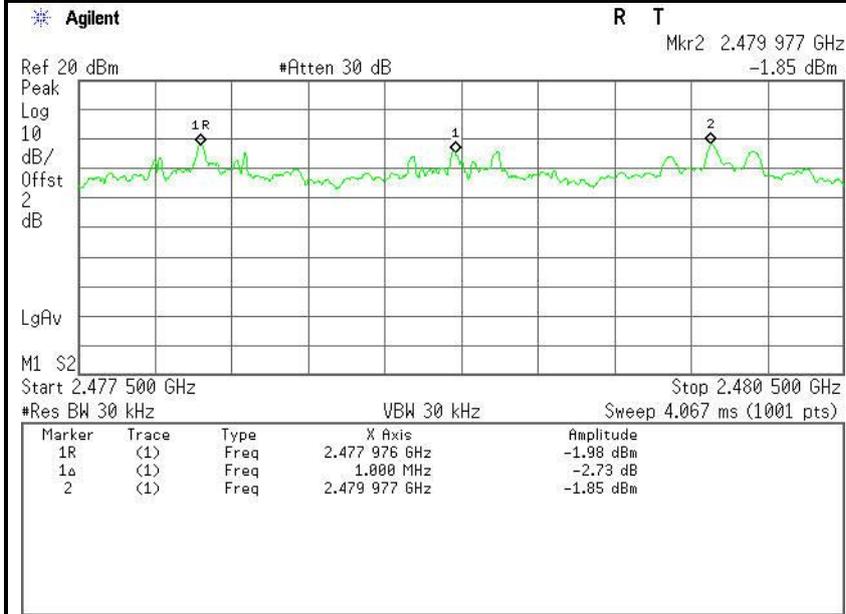

20 dB bandwidth(CH High)

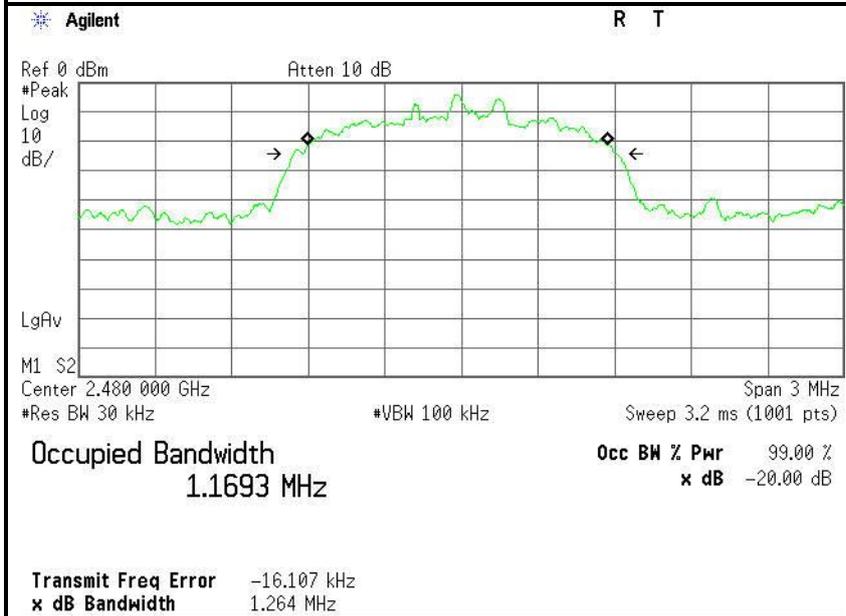



6.7 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted


Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS




Test Plot

Channel Number

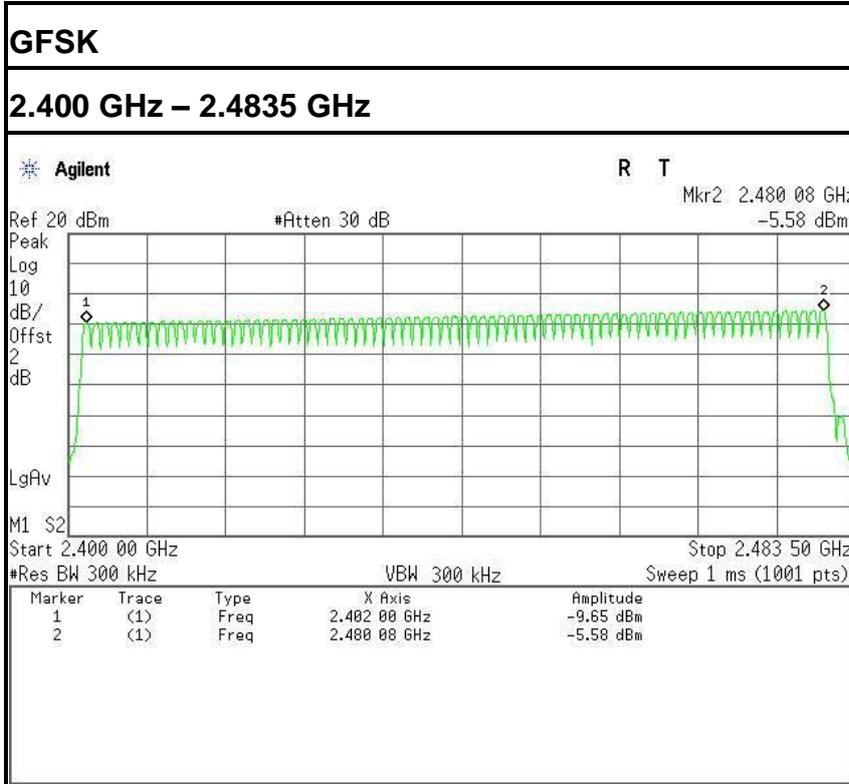

8DPSK

2.400 GHz – 2.4835 GHz

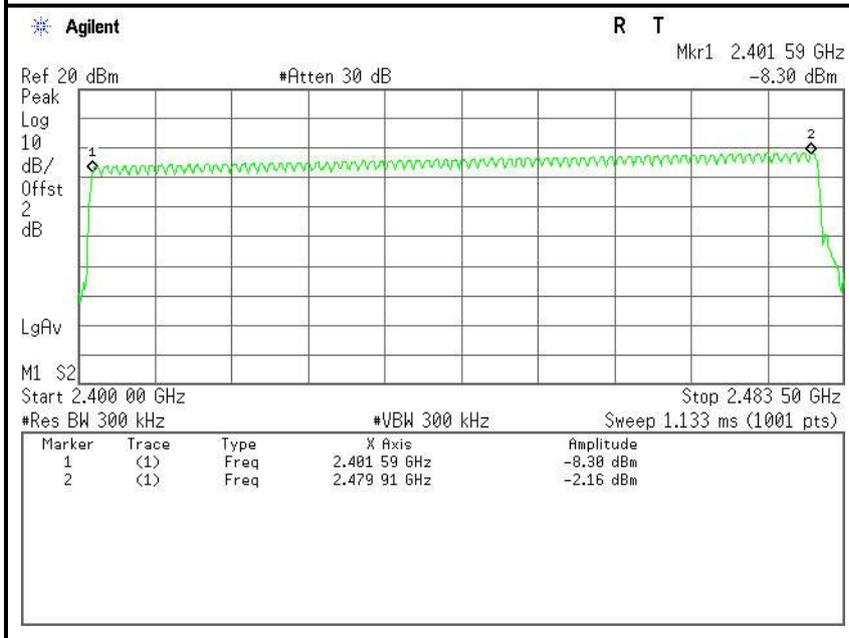



6.8 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Low: $0.423 * (1600/2)/79 * 31.6 = 135.360(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.423	135.360	31.60	400.00	PASS

DH 3

CH Low: $1.698 * (1600/4)/79 * 31.6 = 271.680 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.698	271.680	31.60	400.00	PASS

DH 5

CH Low: $2.940 * (1600/6)/79 * 31.6 = 313.600(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.940	313.600	31.60	400.00	PASS



8DPSK

DH 1

CH Low: $0.435 * (1600/2)/79 * 31.6 = 139.200$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.435	139.200	31.60	400.00	PASS

DH 3

CH Low: $1.695 * (1600/4)/79 * 31.6 = 271.200$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.695	271.200	31.60	400.00	PASS

DH 5


CH Low: $2.944 * (1600/6)/79 * 31.6 = 314.027$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.944	314.027	31.60	400.00	PASS





Test Plot

GFSK

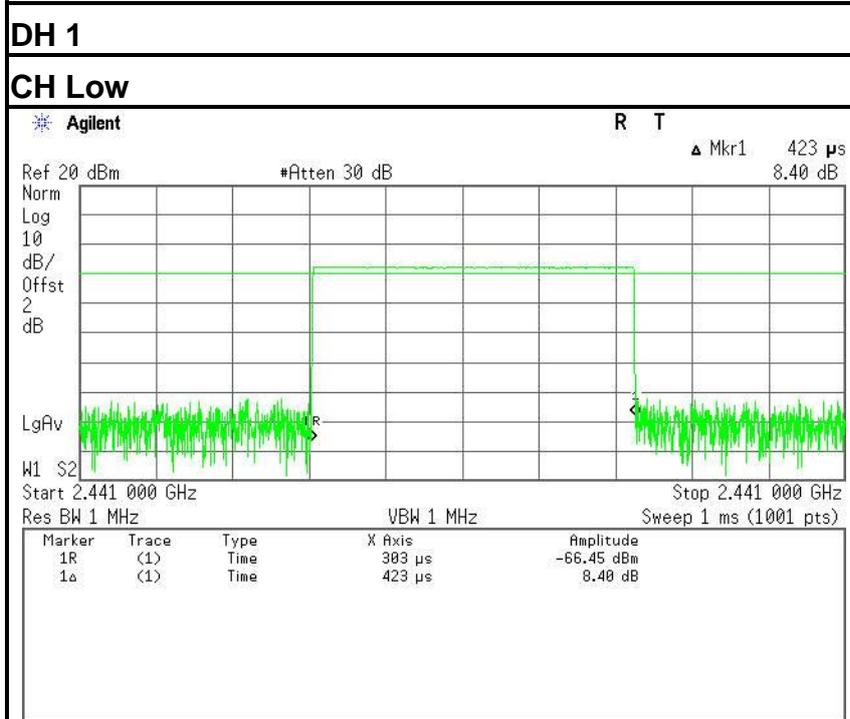



DH 3

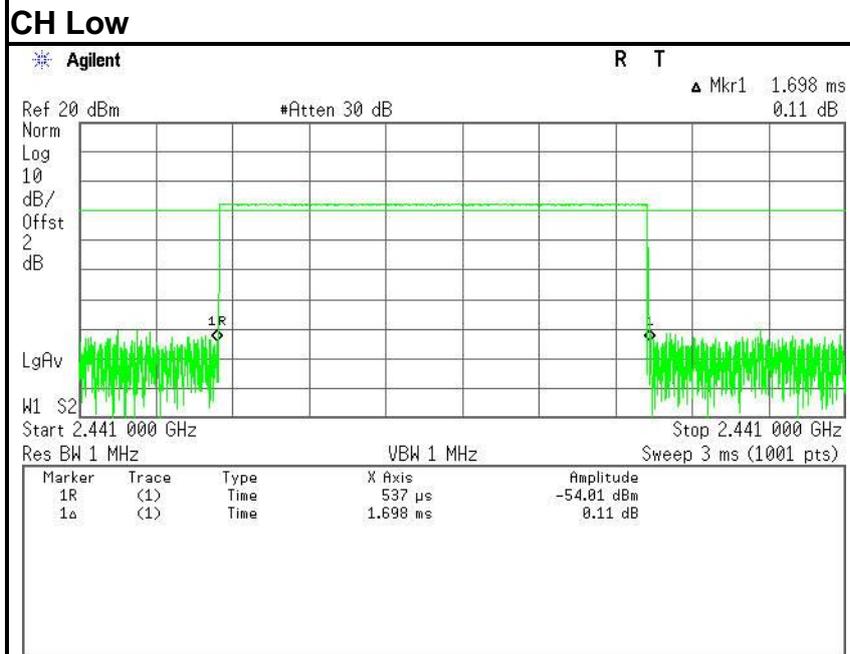


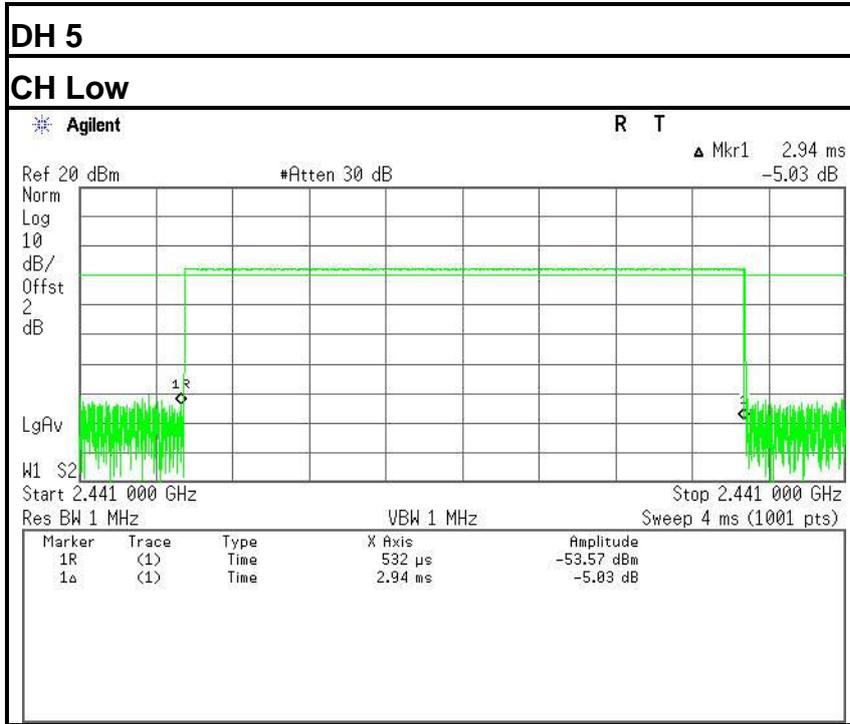



Test Plot
8DPSK

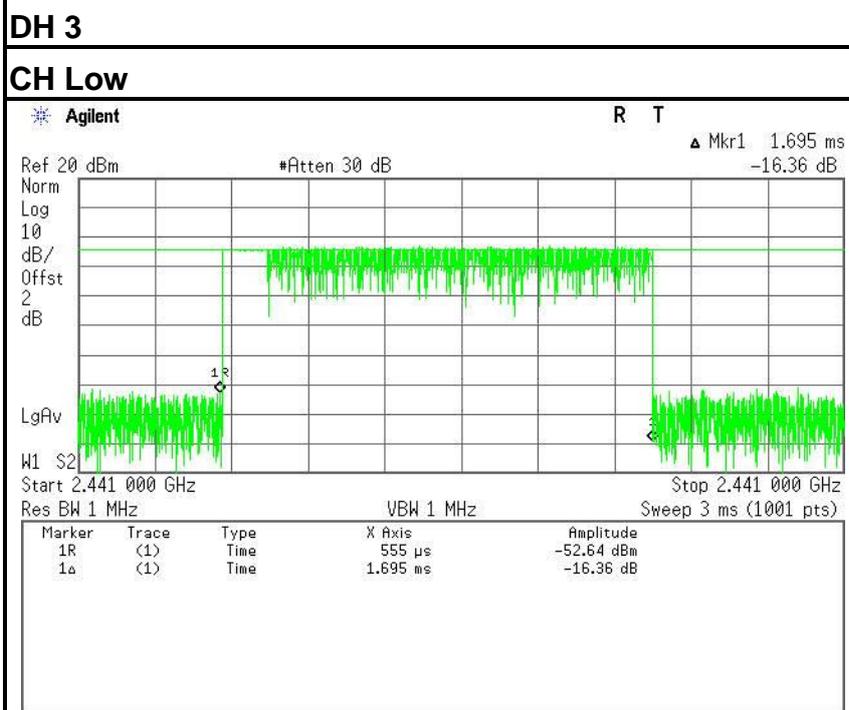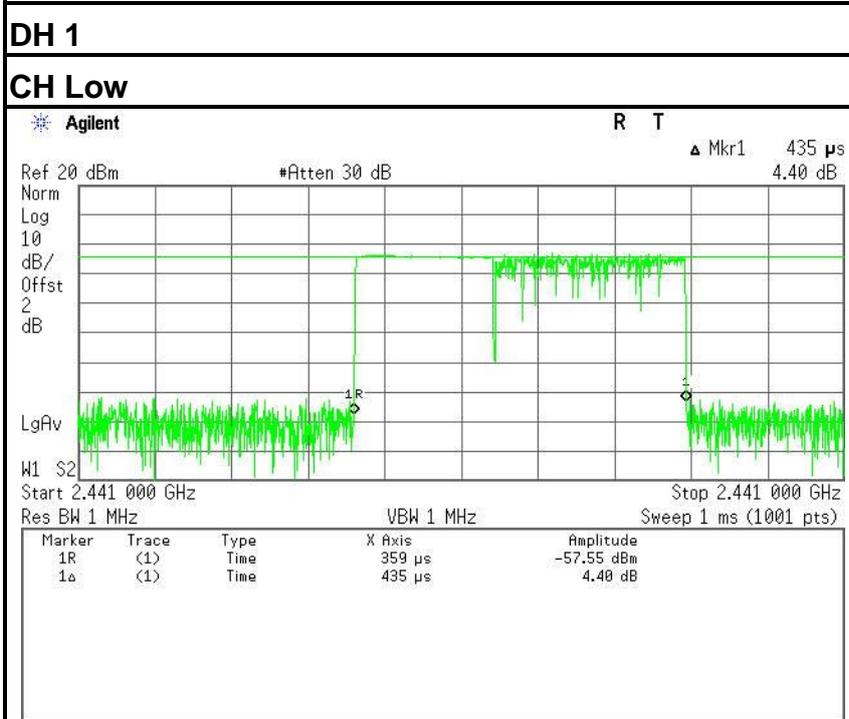

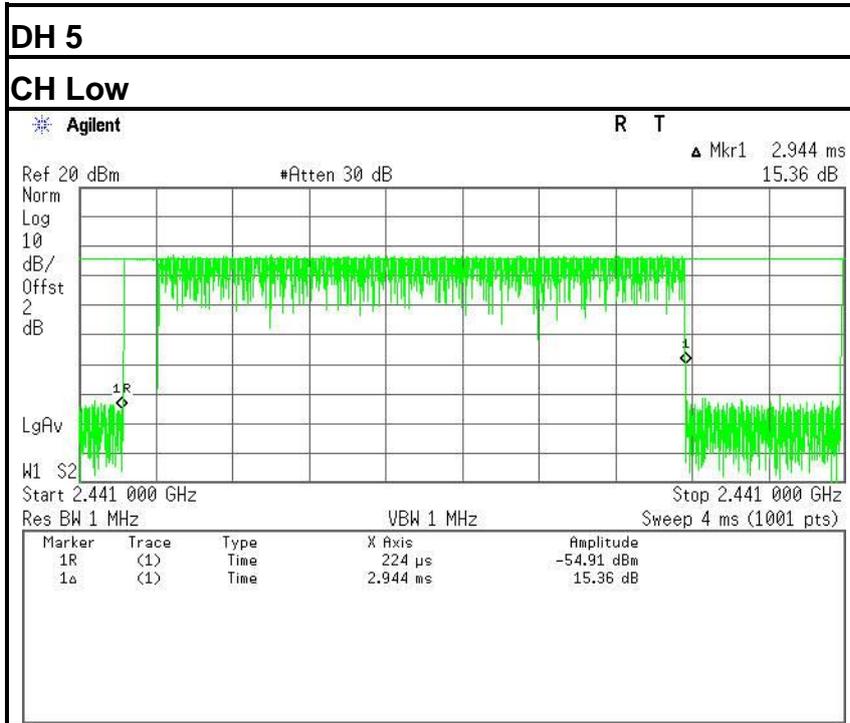



6.9 SPURIOUS EMISSIONS

6.9.1. CONDUCTED MEASUREMENT

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 10MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz, it is only recorded 10MHz to 26GHz.



TEST RESULTS


No non-compliance noted

Remark: The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.




Test Plot (GFSK)

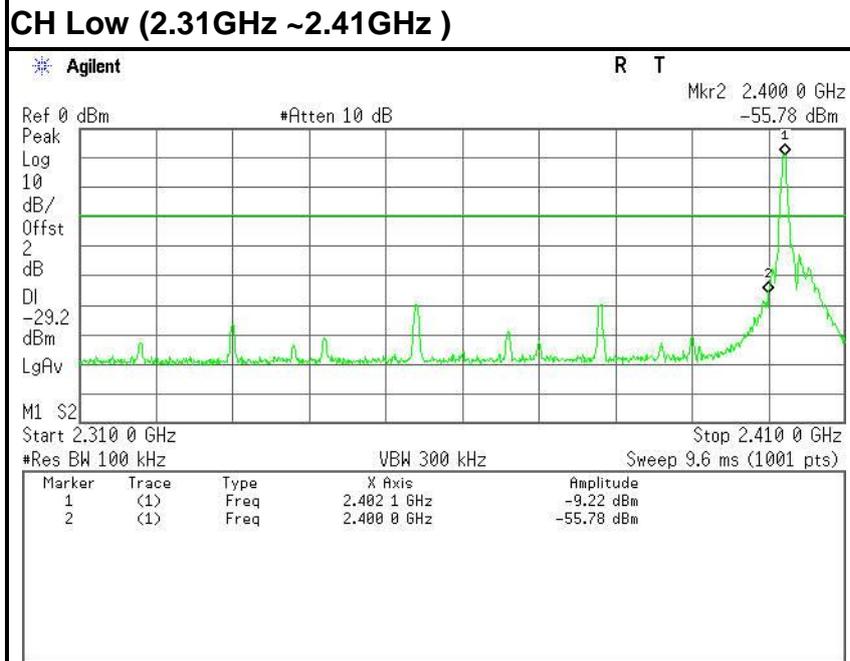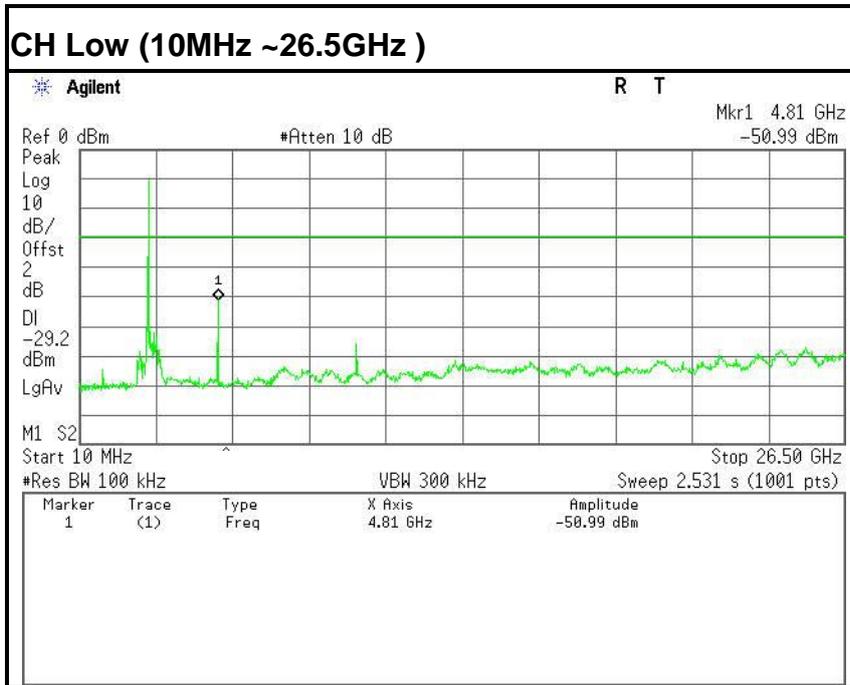

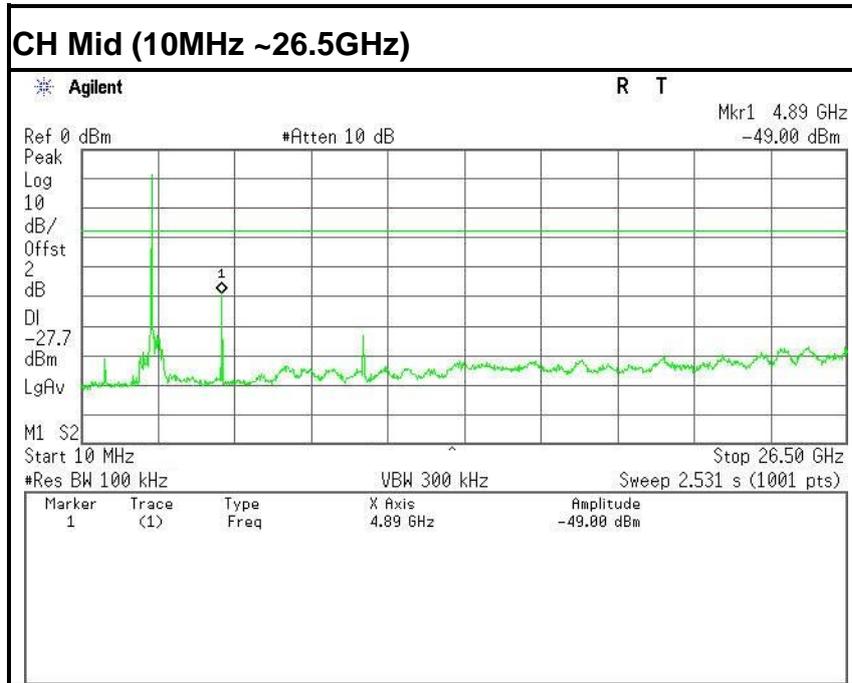




CH High (10MHz ~26.5GHz)


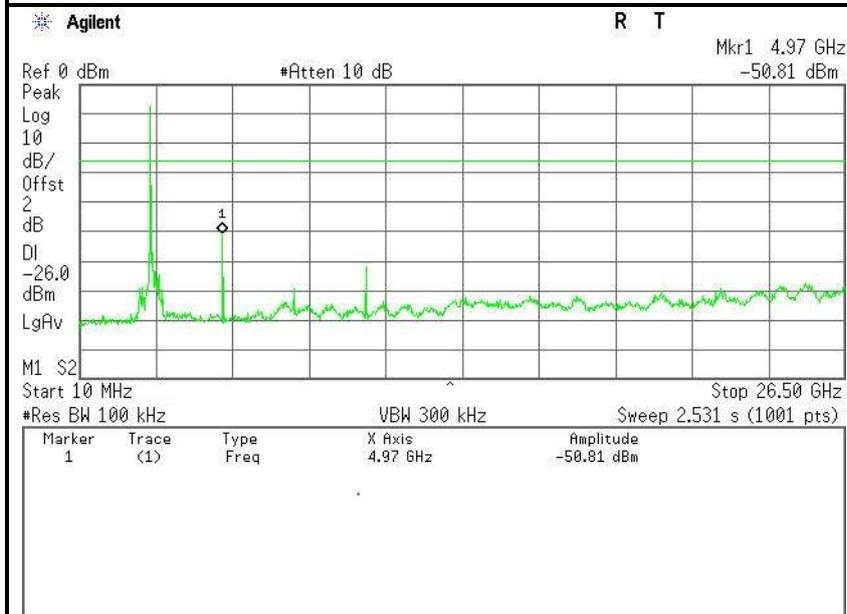



CH High (2.475GHz ~ 2.5GHz)

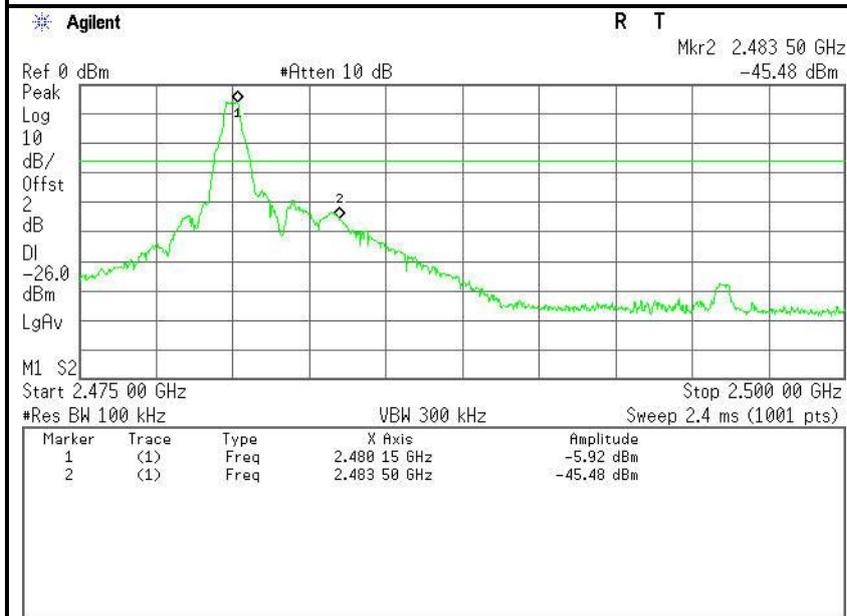




Test Plot (8DPSK)

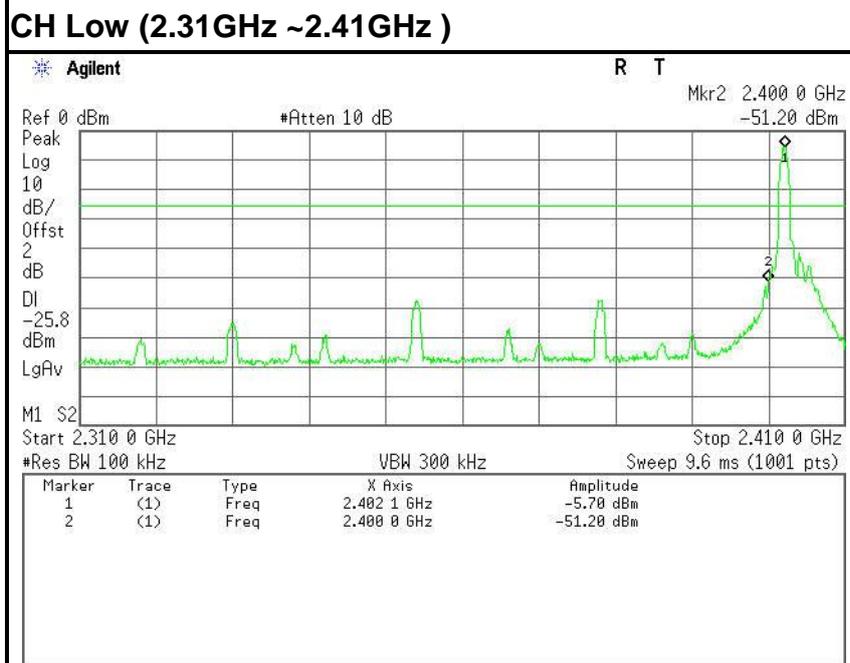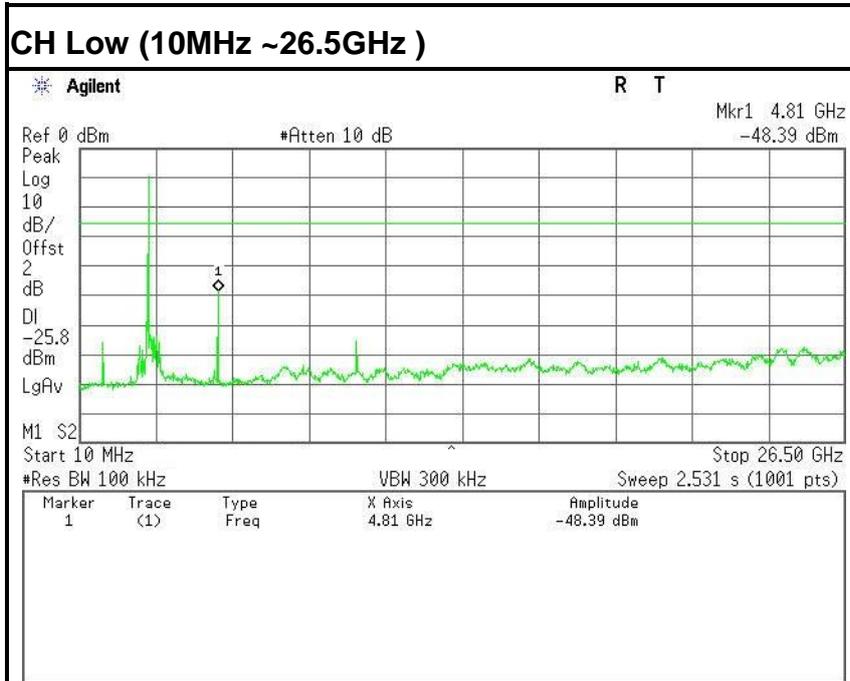

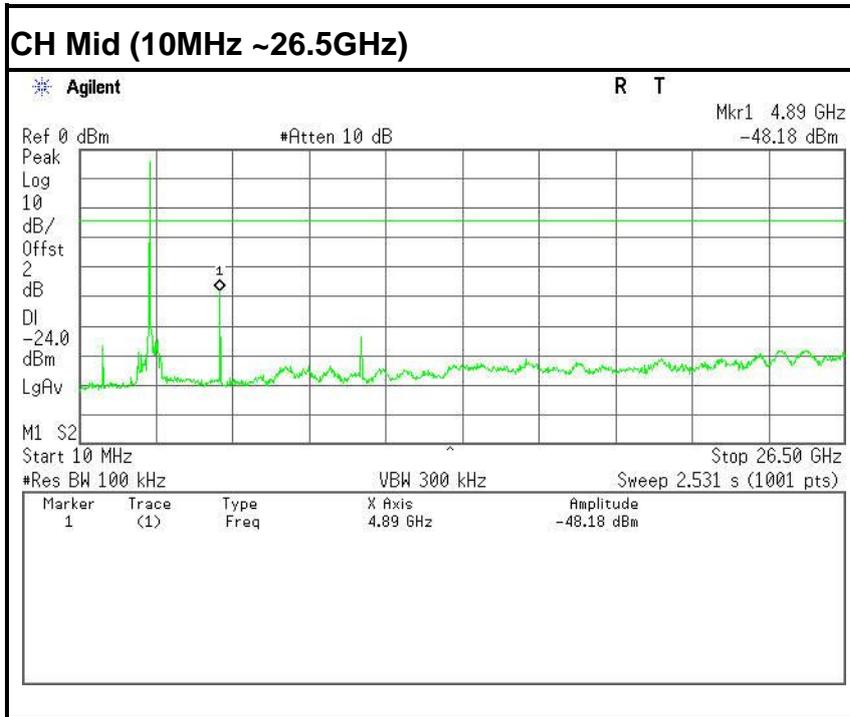

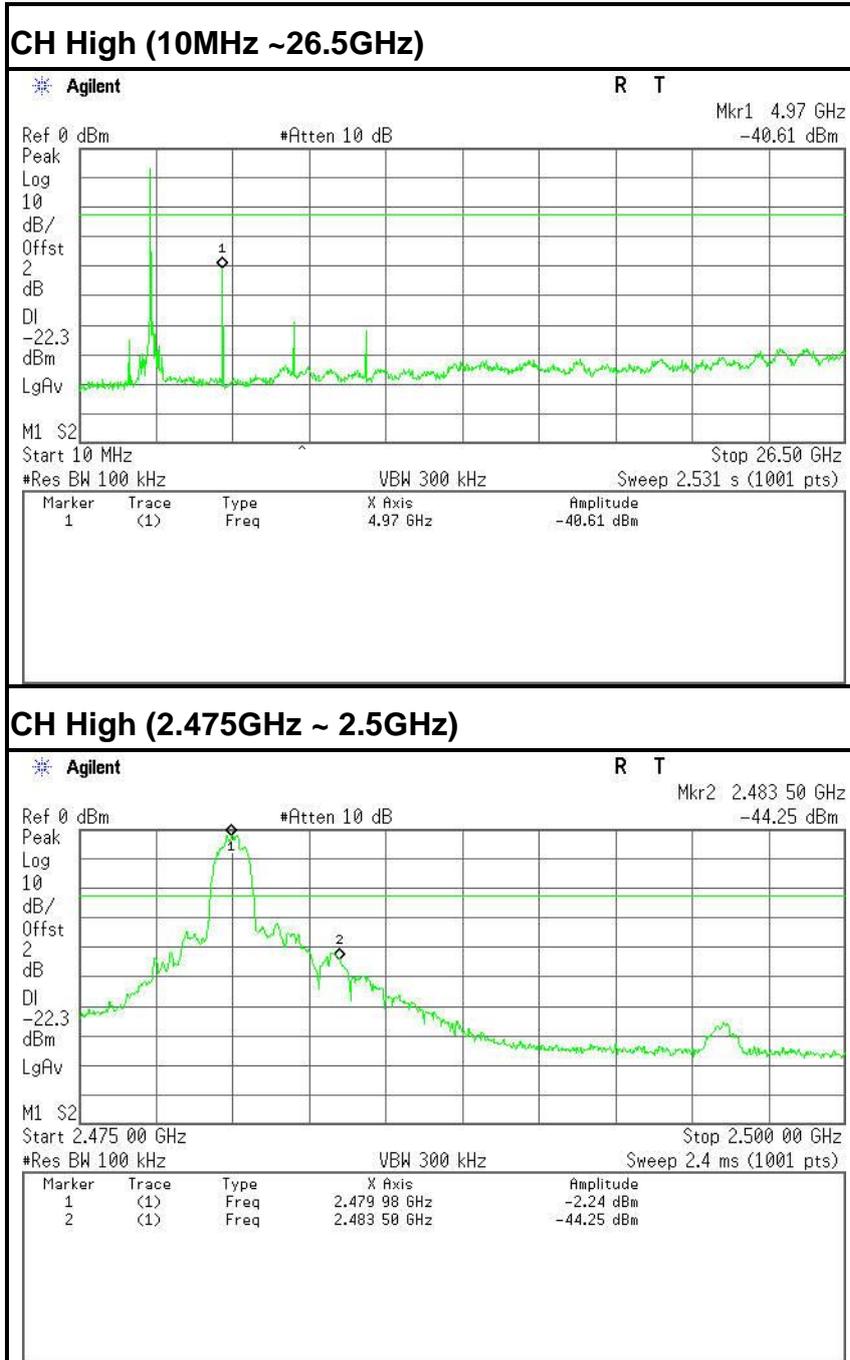



6.9.2. RADIATED EMISSIONS

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/28/2015	02/27/2016	
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016	
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/18/2016	
High Noise Amplifier	Agilent	8449B	3008A01838	02/28/2015	02/27/2016	
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2015	02/27/2016	
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/28/2015	02/27/2016	
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2015	02/27/2016	
Loop Antenna	A. R. A	PLA-1030/B	1029	09/25/2015	09/24/2016	
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R	
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R	
Controller	CT	N/A	N/A	N.C.R	N.C.R	
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016	
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R	
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2				

Remark: Each piece of equipment is scheduled for calibration once a year.


Test Configuration

Below 30MHz

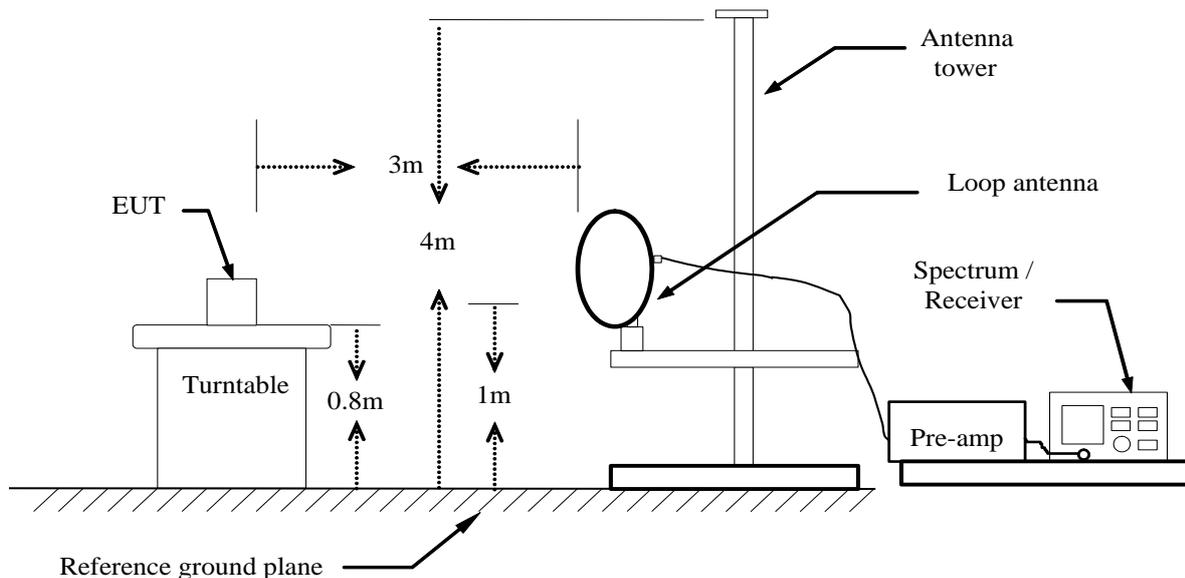




Below 1 GHz

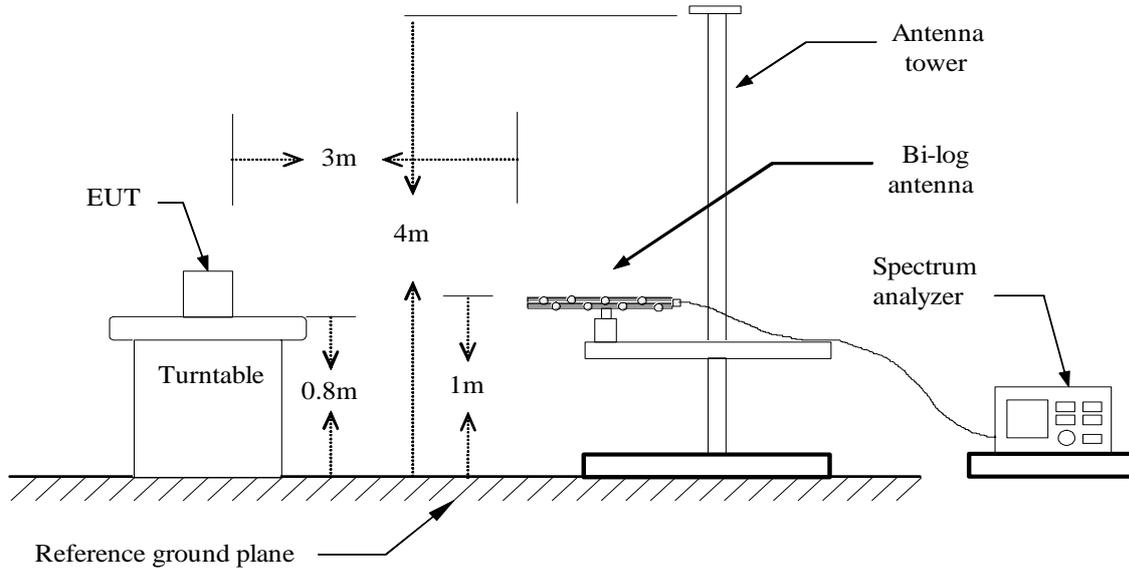

Above 1 GHz

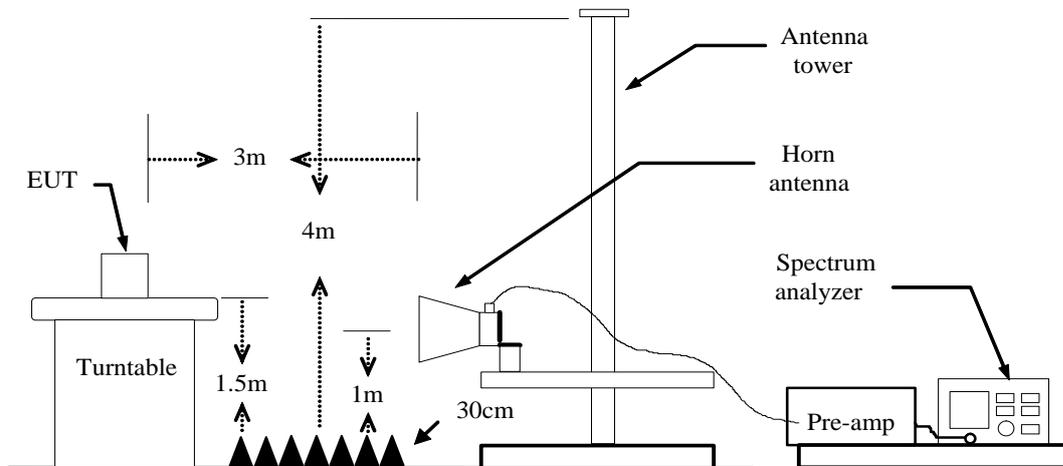



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m or 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Test Mode: TX

Tested by: Jack Chen

Ambient temperature: 24°C Relative humidity: 52% RH Date: October 30, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
144.4600	51.27	-21.48	29.79	43.50	-13.71	V	QP
228.8500	51.09	-21.68	29.41	46.00	-16.59	V	QP
446.1300	45.93	-15.55	30.38	46.00	-15.62	V	QP
474.2600	47.50	-14.57	32.93	46.00	-13.07	V	QP
666.3200	43.80	-12.22	31.58	46.00	-14.42	V	QP
806.9700	40.09	-10.87	29.22	46.00	-16.78	V	QP
62.9800	57.63	-24.49	33.14	40.00	-6.86	H	QP
216.2400	53.83	-20.79	33.04	46.00	-12.96	H	QP
276.3800	51.36	-20.43	30.93	46.00	-15.07	H	QP
408.3000	46.67	-15.69	30.98	46.00	-15.02	H	QP
453.8900	46.06	-15.35	30.71	46.00	-15.29	H	QP
494.6300	44.78	-14.36	30.42	46.00	-15.58	H	QP

****Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz). = Emission frequency in MHz
 Reading (dBuV) = Receiver reading
 Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain
 Actual FS (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
 Limit (dBuV/m) = Limit stated in standard
 Margin(dB) = Measured (dBuV/m) – Limits (dBuV/m)
 Antenna Pole(V/H) = Current carrying line of reading



Above 1 GHz

GFSK

Test Mode: TX(CH Low)

Tested by: Jack Chen

Ambient temperature: 24°C Relative humidity: 52% RH Date: November 10, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1711.000	58.29	-9.38	48.91	74.00	-25.09	V	peak
4186.000	42.09	-0.49	41.60	74.00	-32.40	V	peak
4807.000	46.89	1.71	48.60	74.00	-25.40	V	peak
7012.000	40.56	7.72	48.28	74.00	-25.72	V	peak
7597.000	40.68	8.86	49.54	74.00	-24.46	V	peak
8371.000	42.39	9.45	51.84	74.00	-22.16	V	peak
4015.000	42.13	-1.00	41.13	74.00	-32.87	H	Peak
4807.000	47.94	1.71	49.65	74.00	-24.35	H	Peak
6436.000	40.16	5.27	45.43	74.00	-28.57	H	Peak
6994.000	40.54	7.67	48.21	74.00	-25.79	H	peak
7210.000	43.72	8.11	51.83	74.00	-22.17	H	peak
7930.000	40.83	9.51	50.34	74.00	-23.66	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX(CH Mid)

Tested by: Jack Chen

Ambient temperature: 24°C Relative humidity: 52% RH Date: November 10, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1711.000	53.04	-9.38	43.66	74.00	-30.34	V	peak
3718.000	43.32	-2.08	41.24	74.00	-32.76	V	peak
4879.000	43.97	2.01	45.98	74.00	-28.02	V	peak
5320.000	41.66	2.54	44.20	74.00	-29.80	V	peak
7048.000	40.31	7.79	48.10	74.00	-25.90	V	peak
7399.000	41.61	8.48	50.09	74.00	-23.91	V	peak
1711.000	52.35	-9.38	42.97	74.00	-31.03	H	Peak
3736.000	43.17	-2.02	41.15	74.00	-32.85	H	Peak
4879.000	48.08	2.01	50.09	74.00	-23.91	H	Peak
6994.000	41.08	7.67	48.75	74.00	-25.25	H	peak
7327.000	45.93	8.34	54.27	74.00	-19.73	H	peak
7327.000	40.58	8.34	48.92	54.00	-5.08	H	AVG
7921.000	40.06	9.50	49.56	74.00	-24.44	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX(CH High)

Tested by: Jack Chen

Ambient temperature: 24°C Relative humidity: 52% RH Date: November 10, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3322.000	44.21	-3.21	41.00	74.00	-33.00	V	peak
4663.000	41.09	1.11	42.20	74.00	-31.80	V	peak
5536.000	41.39	2.61	44.00	74.00	-30.00	V	peak
6913.000	40.88	7.33	48.21	74.00	-25.79	V	peak
7165.000	41.02	8.02	49.04	74.00	-24.96	V	peak
7435.000	41.91	8.55	50.46	74.00	-23.54	V	peak
4960.000	48.09	2.34	50.43	74.00	-23.57	H	Peak
6013.000	40.93	3.45	44.38	74.00	-29.62	H	Peak
6886.000	40.75	7.21	47.96	74.00	-26.04	H	Peak
7435.000	48.50	8.55	57.05	74.00	-16.95	H	peak
7435.000	43.45	8.55	52.00	54.00	-2.00	H	AVG
8020.000	39.92	9.64	49.56	74.00	-24.44	H	peak
8335.000	40.38	9.47	49.85	74.00	-24.15	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



8DPSK

Test Mode: TX(CH Low)

Tested by: Jack Chen

Ambient temperature: 24°C Relative humidity: 52% RH Date: November 10, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.000	48.31	-8.31	40.00	74.00	-34.00	V	peak
3331.000	43.82	-3.20	40.62	74.00	-33.38	V	peak
4807.000	51.81	1.71	53.52	74.00	-20.48	V	peak
4807.000	47.59	1.71	49.30	54.00	-4.70	V	AVG
5536.000	41.21	2.61	43.82	74.00	-30.18	V	peak
6697.000	41.35	6.39	47.74	74.00	-26.26	V	peak
7498.000	40.99	8.67	49.66	74.00	-24.34	V	peak
4006.000	42.96	-1.02	41.94	74.00	-32.06	H	Peak
4807.000	53.84	1.71	55.55	74.00	-18.45	H	Peak
4807.000	48.64	1.71	50.35	54.00	-3.65	H	AVG
4951.000	41.26	2.31	43.57	74.00	-30.43	H	Peak
6913.000	40.98	7.33	48.31	74.00	-25.69	H	peak
7210.000	46.19	8.11	54.30	74.00	-19.70	H	peak
7786.000	40.70	9.23	49.93	74.00	-24.07	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX(CH Mid)

Tested by: Jack Chen

Ambient temperature: 24°C Relative humidity: 52% RH Date: November 10, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
3898.000	42.70	-1.42	41.28	74.00	-32.72	V	peak
4879.000	45.85	2.01	47.86	74.00	-26.14	V	peak
6877.000	40.90	7.17	48.07	74.00	-25.93	V	peak
7318.000	41.60	8.32	49.92	74.00	-24.08	V	peak
7696.000	41.33	9.06	50.39	74.00	-23.61	V	peak
8389.000	41.21	9.44	50.65	74.00	-23.35	V	peak
1765.000	51.83	-8.91	42.92	74.00	-31.08	H	Peak
3844.000	43.51	-1.62	41.89	74.00	-32.11	H	Peak
4879.000	51.13	2.01	53.14	74.00	-20.86	H	Peak
4879.000	46.69	2.01	48.70	54.00	-5.30	H	AVG
6193.000	40.98	4.22	45.20	74.00	-28.80	H	peak
7327.000	48.74	8.34	57.08	74.00	-16.92	H	peak
7327.000	43.51	8.34	51.85	54.00	-2.15	H	AVG
8587.000	41.48	9.33	50.81	74.00	-23.19	H	peak

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX(CH High)

Tested by: Jack Chen

Ambient temperature: 24°C Relative humidity: 52% RH Date: November 10, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.000	48.75	-8.31	40.44	74.00	-33.56	V	peak
4960.000	42.36	2.34	44.70	74.00	-29.30	V	peak
5464.000	41.25	2.55	43.80	74.00	-30.20	V	peak
6481.000	41.94	5.46	47.40	74.00	-26.60	V	peak
7444.000	43.63	8.57	52.20	74.00	-21.80	V	peak
8371.000	41.36	9.45	50.81	74.00	-23.19	V	peak
3988.000	42.24	-1.08	41.16	74.00	-32.84	H	Peak
4195.000	42.07	-0.47	41.60	74.00	-32.40	H	Peak
4960.000	46.03	2.34	48.37	74.00	-25.63	H	Peak
5779.000	40.92	3.02	43.94	74.00	-30.06	H	peak
6994.000	40.03	7.67	47.70	74.00	-26.30	H	peak
7444.000	49.03	8.57	57.60	74.00	-16.40	H	peak
7444.000	43.23	8.57	51.80	54.00	-2.20	H	AVG

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 330Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz
 Reading (dBuV/m) =Uncorrected Analyzer / Receiver Reading
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
 Limit (dBuV/m) = Limit stated in standard
 Margin (dB) = Result (dBuV/m)- Limit (dBuV/m)
 Pk = Peak Reading
 AV. = Average Reading
 Remark = Mark Peak Reading or Average Reading



6.10 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.


MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/28/2015	02/27/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	02/28/2015	02/27/2016
LISN	EMCO	3825/2	8901-1459	02/28/2015	02/27/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	02/28/2015	02/27/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Remark: Each piece of equipment is scheduled for calibration once a year.



Test Configuration

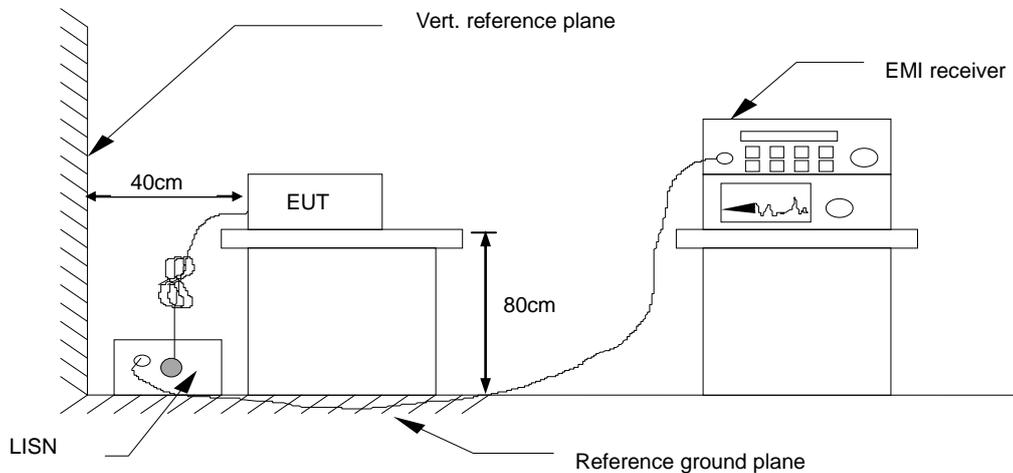

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Test Data

Model No.	861	Operation Mode	Mode 1
Environmental Conditions	22°C, 45% RH	Test Date	October 27, 2015
Tested by	Jack Chen		

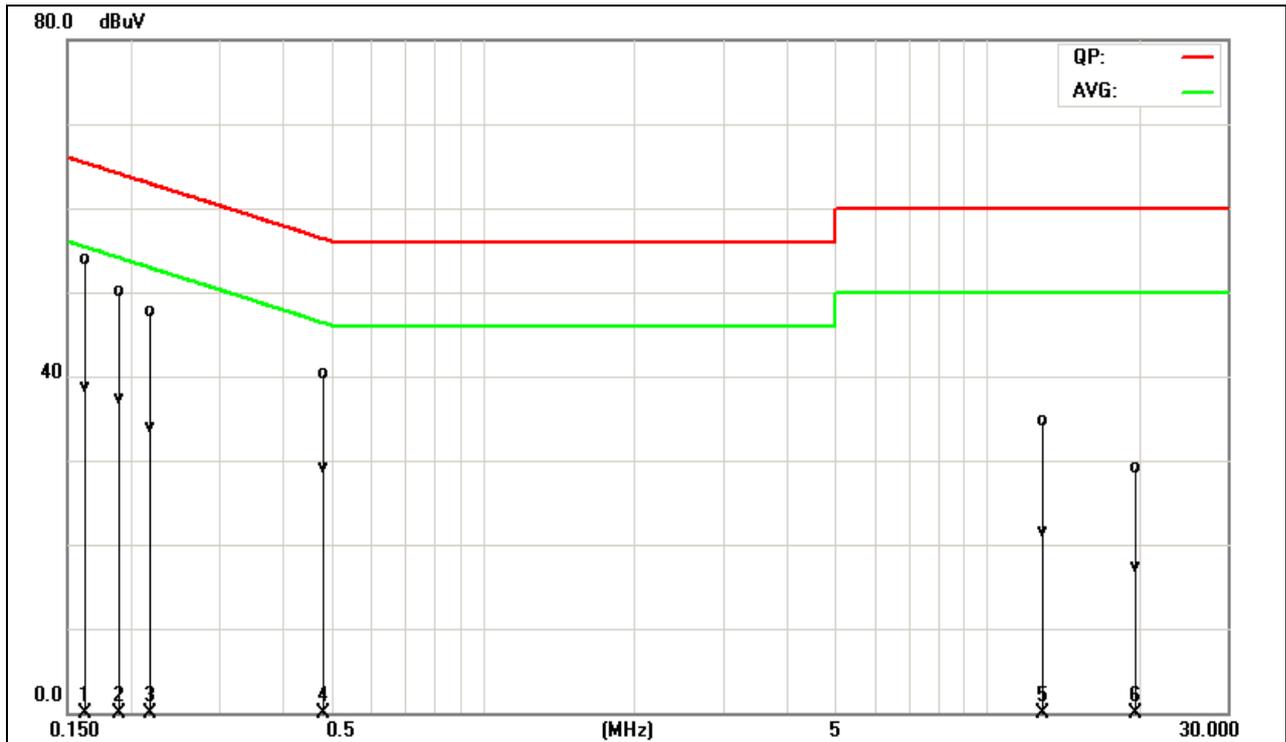


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.1620	44.35	29.15	9.60	53.95	38.75	65.36	55.36	-11.41	-16.61	L1
0.1900	40.39	27.60	9.67	50.06	37.27	64.03	54.04	-13.97	-16.77	L1
0.2180	38.09	24.25	9.69	47.78	33.94	62.89	52.89	-15.11	-18.95	L1
0.4820	30.57	19.45	9.68	40.25	29.13	56.30	46.30	-16.05	-17.17	L1
12.8380	24.78	11.54	9.89	34.67	21.43	60.00	50.00	-25.33	-28.57	L1
19.6140	19.21	7.37	9.84	29.05	17.21	60.00	50.00	-30.95	-32.79	L1

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)



Model No.	861	Operation Mode	Mode 1
Environmental Conditions	22°C, 45% RH	Test Date	October 27, 2015
Tested by	Jack Chen		

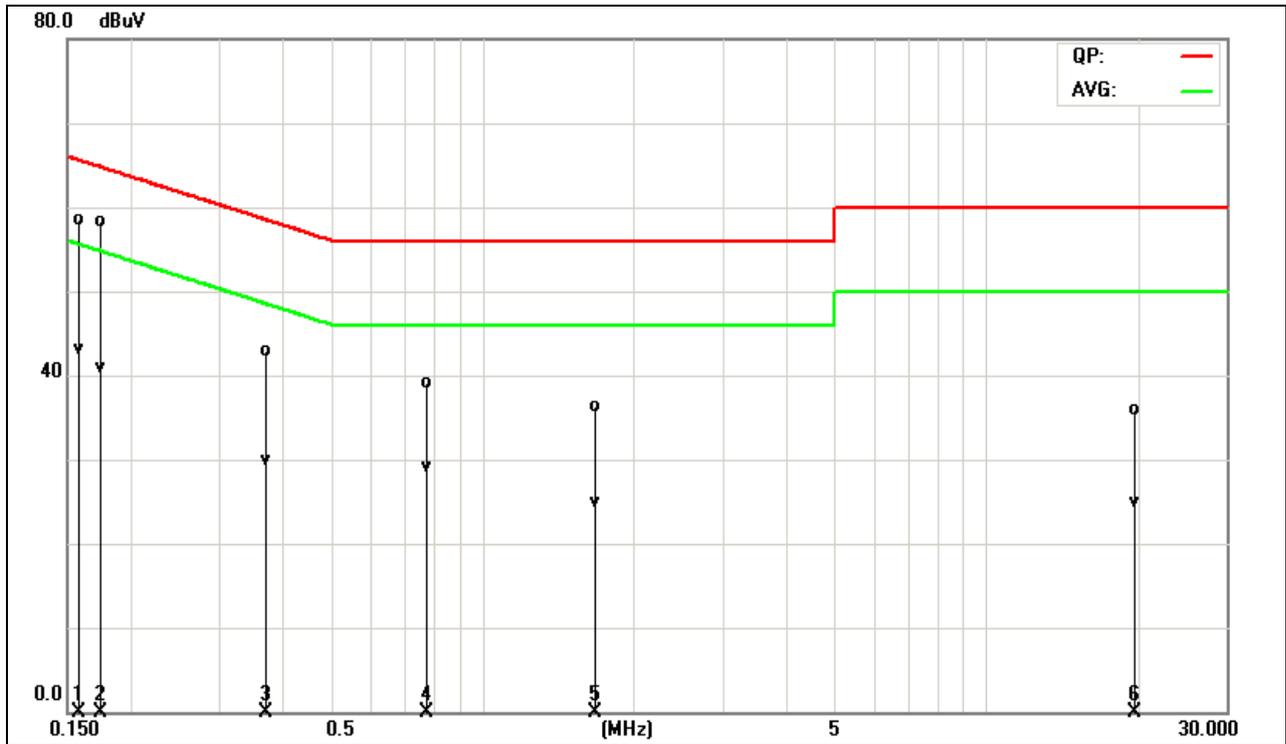

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.1580	48.81	33.24	9.78	58.59	43.02	65.56	55.57	-6.97	-12.55	L2
0.1749	48.46	31.04	9.78	58.24	40.82	64.72	54.72	-6.48	-13.90	L2
0.3700	33.12	20.20	9.72	42.84	29.92	58.50	48.50	-15.66	-18.58	L2
0.7740	29.39	19.47	9.71	39.10	29.18	56.00	46.00	-16.90	-16.82	L2
1.6660	26.58	15.11	9.75	36.33	24.86	56.00	46.00	-19.67	-21.14	L2
19.5540	26.18	15.15	9.73	35.91	24.88	60.00	50.00	-24.09	-25.12	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L2= Line Two (Neutral Line)