


# ENGINEERING TEST REPORT



**VHF Marine Transceiver**  
**Model No.: IC-M330, IC-M330G**  
**FCC ID: AFJ397400**

*Applicant:*

**ICOM Incorporated**  
1-1-32, Kamiminami,  
Hirano-ku, Osaka  
Japan 547-0003

**Tested in Accordance With**

**Federal Communications Commission (FCC)**  
**47 CFR, Part 2, Part 80 (Marine in 156.025-157.425 MHz)**

**UltraTech's File No.: 17ICOM-471Q\_FCC80**

This Test report is Issued under the Authority of  
Tri M. Luu  
Vice President of Engineering  
UltraTech Group of Labs

Date: October 24, 2017

Report Prepared by: Santhosh Fernandez

Tested by: Nimisha Desai

Issued Date: October 24, 2017

Test Dates: October 16- 23, 2017

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by any agency of the US Government.
- This test report shall not be reproduced, except in full, without a written approval from UltraTech.

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com), Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri@ultratech-labs.com](mailto:tri@ultratech-labs.com)



91038



1309



46390-2049



AT-1945



SL2-IN-E-  
1119R



CA2049

## TABLE OF CONTENTS

|                   |                                                                                        |           |
|-------------------|----------------------------------------------------------------------------------------|-----------|
| <b>EXHIBIT 1.</b> | <b>INTRODUCTION .....</b>                                                              | <b>1</b>  |
| 1.1.              | SCOPE.....                                                                             | 1         |
| 1.2.              | RELATED SUBMITTAL(S)/GRANT(S).....                                                     | 1         |
| 1.3.              | NORMATIVE REFERENCES .....                                                             | 1         |
| <b>EXHIBIT 2.</b> | <b>PERFORMANCE ASSESSMENT .....</b>                                                    | <b>2</b>  |
| 2.1.              | CLIENT INFORMATION .....                                                               | 2         |
| 2.2.              | EQUIPMENT UNDER TEST (EUT) INFORMATION.....                                            | 2         |
| 2.3.              | EUT'S TECHNICAL SPECIFICATIONS .....                                                   | 3         |
| 2.4.              | LIST OF EUT'S PORTS .....                                                              | 3         |
| 2.5.              | ANCILLARY EQUIPMENT .....                                                              | 3         |
| <b>EXHIBIT 3.</b> | <b>EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS .....</b>                  | <b>4</b>  |
| 3.1.              | CLIMATE TEST CONDITIONS .....                                                          | 4         |
| 3.2.              | OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS .....                       | 4         |
| <b>EXHIBIT 4.</b> | <b>SUMMARY OF TEST RESULTS .....</b>                                                   | <b>5</b>  |
| 4.1.              | LOCATION OF TESTS .....                                                                | 5         |
| 4.2.              | APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....                             | 5         |
| 4.3.              | MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....                     | 5         |
| 4.4.              | DEVIATION OF STANDARD TEST PROCEDURES .....                                            | 5         |
| <b>EXHIBIT 5.</b> | <b>TEST DATA.....</b>                                                                  | <b>6</b>  |
| 5.1.              | RF POWER OUTPUT [§§ 2.1046 & 80.215] .....                                             | 6         |
| 5.2.              | RF EXPOSURE REQUIREMENTS @ 1.1310 & 2.1091.....                                        | 7         |
| 5.3.              | MODULATION CHARACTERISTICS & AUDIO FREQUENCY RESPONSE [§§ 2.1047(A) & 80.213(E)] ..... | 9         |
| 5.4.              | MODULATION LIMITING [§ 80.213 & § 2.1047(B)].....                                      | 12        |
| 5.5.              | EMISSION MASK [§§2.1049, 80.205 & 80.211] .....                                        | 15        |
| 5.6.              | TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 80.211(F)(3)].      | 24        |
| 5.7.              | TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§ 80.211(F)(3)] .....                | 33        |
| 5.8.              | FREQUENCY STABILITY [§§ 2.1055 & 80.209] .....                                         | 35        |
| <b>EXHIBIT 6.</b> | <b>TEST EQUIPMENT LIST .....</b>                                                       | <b>37</b> |
| <b>EXHIBIT 7.</b> | <b>MEASUREMENT UNCERTAINTY.....</b>                                                    | <b>38</b> |
| 7.1.              | LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY .....                                  | 38        |
| 7.2.              | RADIATED EMISSION MEASUREMENT UNCERTAINTY .....                                        | 38        |
| <b>EXHIBIT 8.</b> | <b>MEASUREMENT METHODS .....</b>                                                       | <b>39</b> |
| 8.1.              | CONDUCTED POWER MEASUREMENTS.....                                                      | 39        |
| 8.2.              | RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD.....                | 40        |
| 8.3.              | FREQUENCY STABILITY .....                                                              | 43        |
| 8.4.              | EMISSION MASK.....                                                                     | 44        |
| 8.5.              | SPURIOUS EMISSIONS (CONDUCTED) .....                                                   | 44        |

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

|                               |                                                                                                                                                                                                                   |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Reference:</b>             | FCC Parts 2 and 80                                                                                                                                                                                                |
| <b>Title:</b>                 | Telecommunication - Code of Federal Regulations, 47CFR, Parts 2 and 80                                                                                                                                            |
| <b>Purpose of Test:</b>       | To gain FCC Equipment Authorization for Radio operating in the frequency bands, 156.025-157.425 MHz (Marine)                                                                                                      |
| <b>Test Procedures:</b>       | Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603 E (2016) – Land Mobile FM or PM Communications Equipment Measurement and performance Standards. |
| <b>Categories of Station:</b> | Ship station transceiver operating in 156.025-157.425 MHz band                                                                                                                                                    |

### 1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

### 1.3. NORMATIVE REFERENCES

| Publication                | Year                 | Title                                                                                                                                                               |
|----------------------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CFR Parts 0-19, 80-End | 2017                 | Code of Federal Regulations – Telecommunication                                                                                                                     |
| ANSI C63.4                 | 2014                 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| TIA/EIA 603, Edition E     | 2016                 | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards                                                                                 |
| CISPR 16-1-1<br>+A1<br>+A2 | 2006<br>2006<br>2007 | Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus                                                     |
| CISPR 16-1-2<br>+A1<br>+A2 | 2003<br>2004<br>2006 | Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances                                                  |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

| APPLICANT              |                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>           | Icom Incorporated                                                                                                     |
| <b>Address:</b>        | 1-1-32, Kamiminami<br>Hirano-ku, Osaka<br>Japan, 547-0003                                                             |
| <b>Contact Person:</b> | Mr. Atsushi Tomiyama<br>Phone #: +81 6 6793 5302<br>Fax #: +81 6 6793 0013<br>Email Address: world_support@icom.co.jp |

| MANUFACTURER           |                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Name:</b>           | Icom Incorporated                                                                                                     |
| <b>Address:</b>        | 1-1-32, Kamiminami<br>Hirano-ku, Osaka<br>Japan, 547-0003                                                             |
| <b>Contact Person:</b> | Mr. Atsushi Tomiyama<br>Phone #: +81 6 6793 5302<br>Fax #: +81 6 6793 0013<br>Email Address: world_support@icom.co.jp |

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

|                                             |                                            |
|---------------------------------------------|--------------------------------------------|
| <b>Brand Name:</b>                          | ICOM Incorporated                          |
| <b>Product Name:</b>                        | VHF Marine Transceiver                     |
| <b>Model Name or Number:</b>                | IC-M330, IC-M330G                          |
| <b>Serial Number:</b>                       | 00000003                                   |
| <b>Type of Equipment:</b>                   | Licensed Non-Broadcast Station Transceiver |
| <b>Power Supply Requirement:</b>            | 13.8 V DC                                  |
| <b>Transmitting/Receiving Antenna Type:</b> | Non-integral                               |
| <b>Primary User Functions of EUT:</b>       | VHF Marine Transceiver for Ship Station    |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 2.3. EUT'S TECHNICAL SPECIFICATIONS

| Transmitter                     |                                         |
|---------------------------------|-----------------------------------------|
| Equipment Type:                 | Mobile or Fixed Station                 |
| Intended Operating Environment: | Marine                                  |
| Power Supply Requirement:       | 13.8 V DC                               |
| RF Output Power Rating:         | 25 Watts (High) and 1 Watt (Low)        |
| Operating Frequency Range:      | 156.025-157.425 MHz (Marine)            |
| RF Output Impedance:            | 50 Ohm                                  |
| Channel Spacing:                | 25 kHz                                  |
| Modulation Employed:            | Variable reactance Frequency Modulation |
| Occupied Bandwidth (99%):       | 14.95 kHz (FM) & 13.75 kHz (DSC)        |
| Emission Designation*:          | 16K0G3E (FM), 16K0G2B (DSC)             |
| Antenna Connector Type:         | PL-259                                  |

\*For an average case of commercial telephony, the necessary Bandwidth is calculated as follows:

Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2(3) + 2(5)(1) = 16 \text{ kHz}$

Emission designation: 16K0G3E

## 2.4. LIST OF EUT'S PORTS

| Port Number | EUT's Port Description | Number of Identical Ports | Connector Type | Cable Type (Shielded/Non-shielded) |
|-------------|------------------------|---------------------------|----------------|------------------------------------|
| 1           | DC Power               | 1                         | 2 Wire         | Non Shielded                       |
| 2           | AF OUT                 | 1                         | 4 wire         | Non Shielded                       |
| 3           | NMEA IN/OUT            | 1                         | 4 wire         | Non Shielded                       |
| 4           | GPS receiver connector | 1                         | SMA            | Shielded                           |
| 5           | Antenna                | 1                         | PL-259         | Shielded                           |
| 6           | Ground                 | 1                         | --             | --                                 |

## 2.5. ANCILLARY EQUIPMENT

| Ancillary Equipment # 1 |                            |
|-------------------------|----------------------------|
| Description:            | GPS Active antenna Antenna |
| Brand Name:             | Taoglas                    |
| Model Name or Number:   | AA-162                     |
| Connected to port:      | GPS receiver connector     |

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

|                     |              |
|---------------------|--------------|
| Temperature:        | 21°C to 23°C |
| Humidity:           | 30 to 55%    |
| Pressure:           | 102 kPa      |
| Power input source: | 13.8 V DC    |

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

|                                  |                                                                                                                          |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Modes:</b>          | The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data. |
| <b>Special Test Software:</b>    | N/A                                                                                                                      |
| <b>Special Hardware Used:</b>    | N/A                                                                                                                      |
| <b>Transmitter Test Antenna:</b> | The EUT is tested with the transmitter antenna port terminated to a 50 Ohm RF Load.                                      |

| Transmitter Test Signals                                                                                                                                                                                            |                                                                                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <b>Frequency Band(s):</b>                                                                                                                                                                                           | 156.025 – 157.425 MHz                                                                          |
| <b>Test Frequency(ies):</b>                                                                                                                                                                                         | 156.025 and 157.425 MHz                                                                        |
| <b>Transmitter Wanted Output Test Signals:</b> <ul style="list-style-type: none"><li>Transmitter Power (measured maximum output power):</li><li>Normal Test Modulation:</li><li>Modulating signal source:</li></ul> | 23.44 Watts High, 0.74 Watt Low<br><br>Variable reactance Frequency Modulation<br><br>External |

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

| FCC Section(s)                  | Test Requirements                                     | Applicability (Yes/No) |
|---------------------------------|-------------------------------------------------------|------------------------|
| 2.1046 & 80.215                 | RF Power Output                                       | Yes                    |
| 2.1047(a) & 80.213(e)           | Modulation Characteristics - Audio Frequency Response | Yes                    |
| 2.1047(b) & 80.213              | Modulation Characteristics - Modulation Limiting      | Yes                    |
| 2.1049, 80.205 & 80.211(f)      | Occupied Bandwidth and Emission Limitations           | Yes                    |
| 2.1051, 2.1057 & 80.211(f)(3)   | Spurious Emissions at Antenna Terminal                | Yes                    |
| 2.1053, 2.1057 & 80.211(f)(3)   | Field Strength of Spurious Emissions                  | Yes                    |
| 2.1055 & 80.209                 | Frequency Stability                                   | Yes                    |
| 80.217                          | Suppression of Interference aboard ships              | Yes <sup>1</sup>       |
| 1.1307, 1.1310, 2.1091 & 2.1093 | RF Exposure Limit                                     | Yes                    |

<sup>1</sup> Complies with FCC Part 15, Subpart B.

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

### 4.4. DEVIATION OF STANDARD TEST PROCEDURES

None

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 5. TEST DATA

### 5.1. RF POWER OUTPUT [§§ 2.1046 & 80.215]

#### 5.1.1. Limits

§ 80.215(e)(1) Ship stations 156–162 MHz - 25W<sup>1,2</sup>

Marine utility stations and hand-held portable transmitters: 156–162 MHz -10W


<sup>1</sup> Reducible to 1 watt or less, except for transmitters limited to public correspondence channels and used in an automated system.

<sup>2</sup> The frequencies 156.775 and 156.825 MHz are available for navigation-related port operations or ship movement only, and all precautions must be taken to avoid harmful interference to channel 16. Transmitter output power is limited to 1 watt for ship stations, and 10 watts for coast stations.

#### 5.1.2. Method of Measurements

Refer to Section 8.1 of this report for measurement details.

#### 5.1.3. Test Arrangement

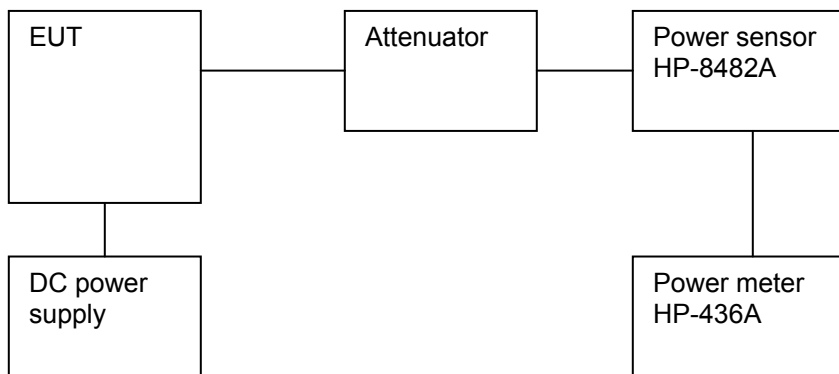

#### 5.1.4. Test Data

| Transmitter Channel Output | Fundamental Frequency (MHz) | Measured (Average) Conducted Power (W) | Power Rating (W) |
|----------------------------|-----------------------------|----------------------------------------|------------------|
| Power Setting: High        |                             |                                        |                  |
| Lowest                     | 156.025                     | 23.44                                  | 25.0             |
| Highest                    | 157.425                     | 23.23                                  | 25.0             |
| Power Setting: Low         |                             |                                        |                  |
| Lowest                     | 156.025                     | 0.74                                   | 1.0              |
| Highest                    | 157.425                     | 0.74                                   | 1.0              |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 5.2. RF EXPOSURE REQUIREMENTS @ 1.1310 & 2.1091

### 5.2.1. Limits

**1.1310:** The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

**LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

| Frequency Range (MHz)                                          | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Average Time (minutes) |
|----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|------------------------|
| <b>(A) Limits for Occupational/Control Exposures</b>           |                               |                               |                                     |                        |
| 30-300                                                         | 61.4                          | 0.163                         | 1.0                                 | 6                      |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                        |
| 30-300                                                         | 27.5                          | 0.073                         | 0.2                                 | 30                     |

### 5.2.2. Method of Measurements

#### Calculation Method of RF Safety Distance:

$$S = \frac{PG}{4\pi \cdot r^2} = \frac{EIRP}{4\pi \cdot r^2}$$

Where,  
P: power input to the antenna in mW  
EIRP: Equivalent (effective) isotropic radiated power.  
S: power density mW/cm<sup>2</sup>  
G: numeric gain of antenna relative to isotropic radiator  
r: distance to centre of radiation in cm

$$r = \sqrt{\frac{PG}{4\pi \cdot S}} = \sqrt{\frac{EIRP}{4\pi \cdot S}}$$

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device.

### 5.2.3. Evaluation of RF Exposure Compliance Requirements

MPE Limit for Occupational/Controlled Exposure,  $S_{\text{controlled}}[\text{mW}/\text{cm}^2] = 1.0$

MPE Limit for General Population/Uncontrolled Exposure,  $S_{\text{uncontrolled}}[\text{mW}/\text{cm}^2] = 0.2$

Maximum RF Power conducted,  $P_{\text{conducted}}[\text{dBm}] = 43.98$

Maximum Antenna Gain,  $G[\text{dBi}] = 9$

Maximum EIRP,  $P_{\text{EIRP}} = 52.98 \text{ dBm}$  or 198609.49 mwatts

User-based time-average for PTT = 50%

Calculated RF Safety Distance for Occupational/Controlled Exposure,  $r_{\text{safety\_controlled}}[\text{cm}] = 89 \text{ cm}$

Calculated RF Safety Distance for General Population/Uncontrolled Exposure,  $r_{\text{safety\_uncontrolled}}[\text{cm}] = 199 \text{ cm}$

### 5.3. MODULATION CHARACTERISTICS & AUDIO FREQUENCY RESPONSE [§§ 2.1047(a) & 80.213(e)]


#### 5.3.1. Limits

(e) Coast station transmitters operated in the 156–162 MHz band must be equipped with an audio low-pass filter. The filter must be installed between the modulation limiter and the modulated radio frequency stage. At frequencies between 3 kHz and 20 kHz it must have an attenuation greater than at 1 kHz by at least  $60\log_{10}(f/3)$  dB where “f” is the audio frequency in kilohertz. At frequencies above 20 kHz the attenuation must be at least 50 dB greater than at 1 kHz

#### 5.3.2. Method of Measurements

The rated audio input signal was applied to the input of the audio lowpass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT (Audio) spectrum analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

#### 5.3.3. Test Arrangement

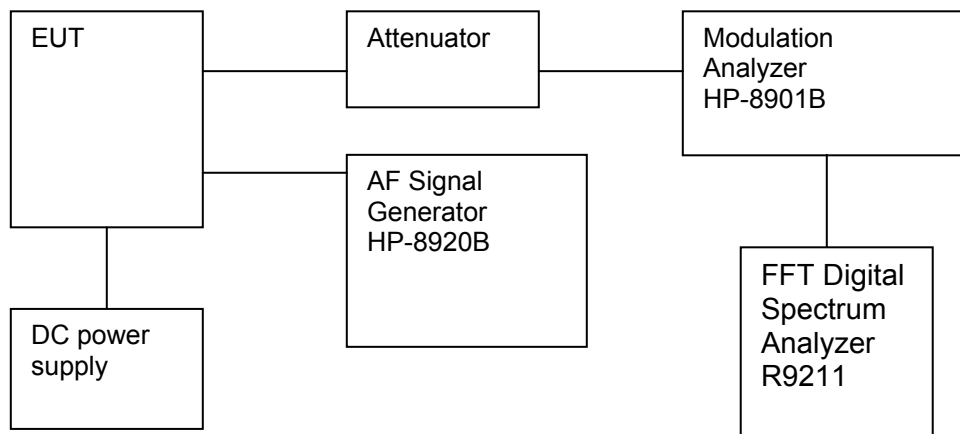

### 5.3.4. Test Data

**Note:** Due to the difficulty of measuring the Frequency Response of the internal lowpass filter, the Frequency Response of All Modulation States are performed to show the roll-off at 3 kHz in comparison with the limit for audio low-pass filter.

▪ **Minimum Attenuation Rel. to 1 kHz Attenuation (25 kHz channel spacing)**


| Frequency (kHz) | Audio IN (dBV) | Audio OUT (dBV) | Attenuation (OUT - IN) (dB) | Attenuation wrt. 1 kHz (dB) | Recommended FCC Limit (dB) |
|-----------------|----------------|-----------------|-----------------------------|-----------------------------|----------------------------|
| 0.1             | -33.98         | -29.08          | 4.9                         | -34.1                       | --                         |
| 0.2             | -33.98         | -14.05          | 19.9                        | -19.1                       | --                         |
| 0.4             | -33.98         | -3.25           | 30.7                        | -8.3                        | --                         |
| 0.6             | -33.98         | 0.49            | 34.5                        | -4.5                        | --                         |
| 0.8             | -33.98         | 3.08            | 37.1                        | -2.0                        | --                         |
| 1.0             | -33.98         | 5.03            | 39.0                        | 0.0                         | --                         |
| 1.5             | -33.98         | 8.19            | 42.2                        | 3.2                         | --                         |
| 2.0             | -33.98         | 9.60            | 43.6                        | 4.6                         | --                         |
| 2.5             | -33.98         | 9.38            | 43.4                        | 4.4                         | --                         |
| 3.0             | -33.98         | 7.96            | 41.9                        | 2.9                         | 0                          |
| 3.5             | -33.98         | 5.66            | 39.6                        | 0.6                         | -4                         |
| 4.0             | -33.98         | 2.34            | 36.3                        | -2.7                        | -7                         |
| 4.5             | -33.98         | -1.15           | 32.8                        | -6.2                        | -11                        |
| 5.0             | -33.98         | -4.39           | 29.6                        | -9.4                        | -13                        |
| 6.0             | -33.98         | -10.48          | 23.5                        | -15.5                       | -18                        |
| 7.0             | -33.98         | -15.72          | 18.3                        | -20.8                       | -22                        |
| 8.0             | -33.98         | -20.29          | 13.7                        | -25.3                       | -26                        |
| 9.0             | -33.98         | -24.44          | 9.5                         | -29.5                       | -29                        |
| 10.0            | -33.98         | -28.19          | 5.8                         | -33.2                       | -31                        |
| 12.0            | -33.98         | -35.31          | -1.3                        | -40.3                       | -36                        |
| 14.0            | -33.98         | -41.69          | -7.7                        | -46.7                       | -40                        |
| 16.0            | -33.98         | -50.81          | -16.8                       | -55.8                       | -44                        |
| 18.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -47                        |
| 20.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -49                        |
| 22.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -50                        |
| 25.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -50                        |
| 30.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -50                        |
| 35.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -50                        |
| 40.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -50                        |
| 45.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -50                        |
| 50.0            | -33.98         | -60.00          | -26.0                       | -65.0                       | -50                        |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

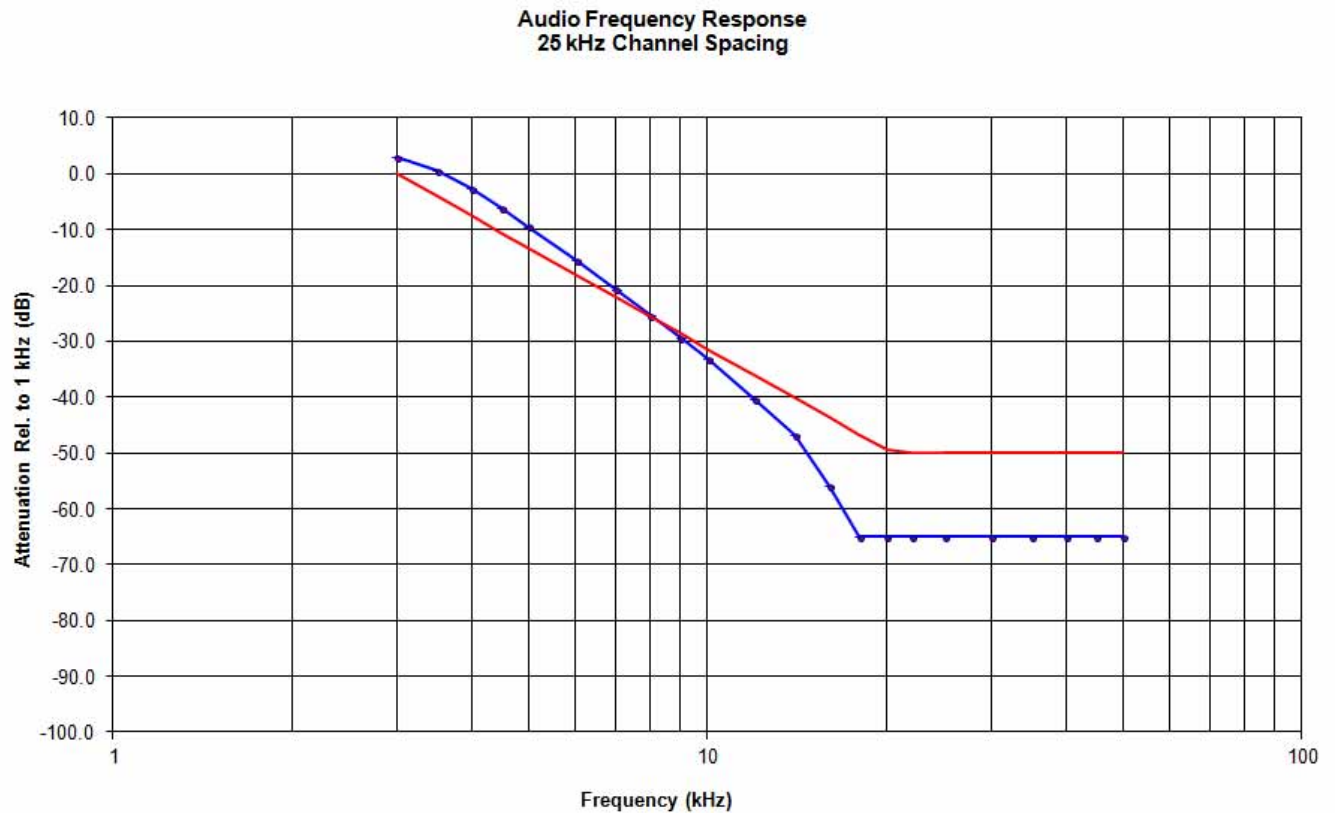

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

#### 5.4. MODULATION LIMITING [§ 80.213 & § 2.1047(b)]

##### 5.4.1. Limits

**§ 80.213** (a)(2) When phase or frequency modulation is used in the 156-162 MHz band the peak modulation must be maintained between 75 and 100 percent. A frequency deviation of  $\pm 5$  kHz is defined as 100 percent peak modulation; and


**§ 80.213** (b) Radiotelephone transmitters using A3E, F3E and G3E emission must have a modulation limiter to prevent any modulation over 100 percent. This requirement does not apply to survival craft transmitters, to transmitters that do not require a license or to transmitters whose output power does not exceed 3 watts.

**§ 80.213** (d) Ship and coast station transmitters operating in the 156-162 MHz and 216-220 bands must be capable of proper operation with a frequency deviation that does not exceed  $\pm 5$  kHz when using any emission authorized by Sec. 80.207.

##### 5.4.2. Method of Measurements

**For Audio Transmitter:-** The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

##### 5.4.3. Test Arrangement

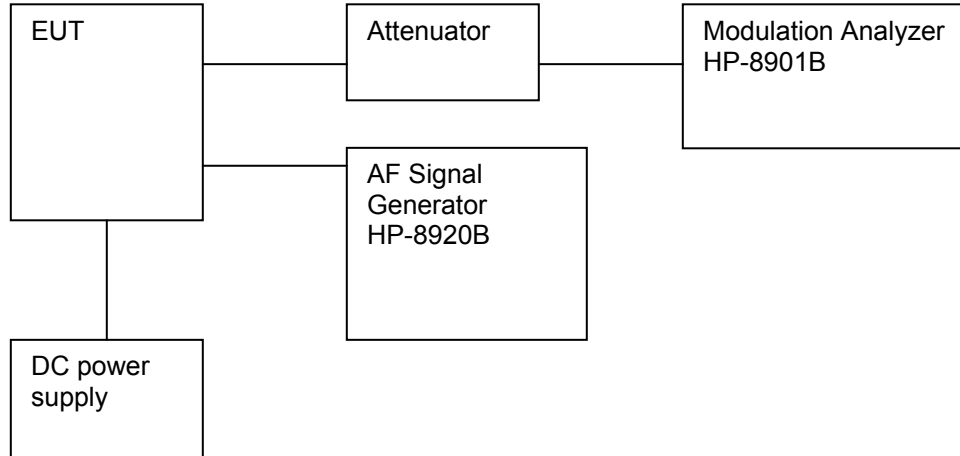

#### 5.4.4. Test Data

**Test Channel:** 156.025MHz High Power

##### 5.4.4.1. Voice Modulation Limiting

| Modulating Signal Level | Peak Frequency Deviation (kHz) |         |         |         |         | Maximum Limit |
|-------------------------|--------------------------------|---------|---------|---------|---------|---------------|
| (mVrms)                 | 0.1 kHz                        | 0.5 kHz | 1.0 kHz | 3.0 kHz | 5.0 kHz | (kHz)         |
| 1                       | 0.06                           | 0.13    | 0.15    | 0.34    | 0.14    | 5.0           |
| 2                       | 0.05                           | 0.14    | 0.29    | 0.62    | 0.53    | 5.0           |
| 4                       | 0.05                           | 0.27    | 0.55    | 1.24    | 0.45    | 5.0           |
| 6                       | 0.07                           | 0.40    | 0.80    | 1.80    | 0.63    | 5.0           |
| 8                       | 0.09                           | 0.52    | 1.07    | 2.40    | 0.75    | 5.0           |
| 10                      | 0.06                           | 0.63    | 1.27    | 2.86    | 0.80    | 5.0           |
| 15                      | 0.07                           | 0.94    | 1.89    | 3.52    | 0.85    | 5.0           |
| 20                      | 0.07                           | 1.25    | 2.55    | 3.63    | 0.86    | 5.0           |
| 25                      | 0.09                           | 1.56    | 3.14    | 3.67    | 0.87    | 5.0           |
| 30                      | 0.10                           | 1.85    | 3.67    | 3.67    | 0.89    | 5.0           |
| 35                      | 0.10                           | 2.15    | 3.82    | 3.68    | 0.88    | 5.0           |
| 40                      | 0.12                           | 2.44    | 4.03    | 3.69    | 0.90    | 5.0           |
| 45                      | 0.12                           | 2.75    | 4.18    | 3.71    | 0.92    | 5.0           |
| 50                      | 0.14                           | 3.04    | 4.23    | 3.71    | 0.93    | 5.0           |
| 60                      | 0.15                           | 3.67    | 4.27    | 3.71    | 0.96    | 5.0           |
| 70                      | 0.16                           | 3.78    | 4.28    | 3.72    | 0.96    | 5.0           |
| 80                      | 0.18                           | 3.79    | 4.29    | 3.73    | 0.97    | 5.0           |
| 90                      | 0.19                           | 3.81    | 4.30    | 3.74    | 0.97    | 5.0           |
| 100                     | 0.21                           | 4.12    | 4.30    | 3.75    | 0.98    | 5.0           |

| Voice Signal Input Level = STD MOD Level + 16 dB<br>= 42.02 dB(mVrms)<br>= 126.19 mVrms |                      |                     |
|-----------------------------------------------------------------------------------------|----------------------|---------------------|
| Modulation Frequency (kHz)                                                              | Peak Deviation (kHz) | Maximum Limit (kHz) |
| 0.1                                                                                     | 0.30                 | 5.0                 |
| 0.2                                                                                     | 1.90                 | 5.0                 |
| 0.4                                                                                     | 3.97                 | 5.0                 |
| 0.6                                                                                     | 4.27                 | 5.0                 |
| 0.8                                                                                     | 4.28                 | 5.0                 |
| 1.0                                                                                     | 4.29                 | 5.0                 |
| 1.2                                                                                     | 4.28                 | 5.0                 |
| 1.4                                                                                     | 4.24                 | 5.0                 |
| 1.6                                                                                     | 4.23                 | 5.0                 |
| 1.8                                                                                     | 4.26                 | 5.0                 |
| 2.0                                                                                     | 4.29                 | 5.0                 |
| 2.5                                                                                     | 4.25                 | 5.0                 |
| 3.0                                                                                     | 3.73                 | 5.0                 |
| 3.5                                                                                     | 2.79                 | 5.0                 |
| 4.0                                                                                     | 1.93                 | 5.0                 |
| 4.5                                                                                     | 1.34                 | 5.0                 |
| 5.0                                                                                     | 0.99                 | 5.0                 |
| 6.0                                                                                     | 0.60                 | 5.0                 |
| 7.0                                                                                     | 0.34                 | 5.0                 |
| 8.0                                                                                     | 0.29                 | 5.0                 |
| 9.0                                                                                     | 0.16                 | 5.0                 |
| 10.0                                                                                    | 0.29                 | 5.0                 |

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



## 5.5. EMISSION MASK [§§2.1049, 80.205 & 80.211]

### 5.5.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

| Emission designator | Maximum Authorized BW (kHz) | Channel Spacing (kHz) | Recommended Frequency Deviation (kHz) | Applicable Mask  |
|---------------------|-----------------------------|-----------------------|---------------------------------------|------------------|
| 16K0G3E             | 20                          | 25                    | 5                                     | See § 80.211 (f) |


§ 80.211 (f) Emission Limitations:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus 10log10 (mean power in watts) dB.

### 5.5.2. Method of Measurements

Refer to Section 8.4 of this report for measurement details

### 5.5.3. Test Arrangement

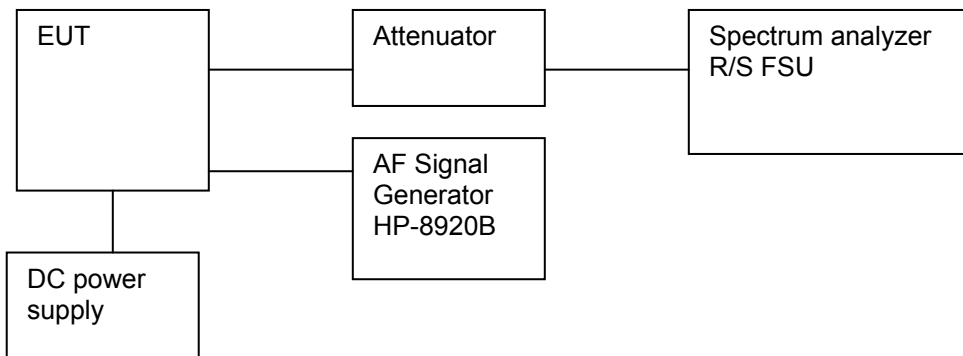


### 5.5.4. Test Data

#### 5.5.4.1. 99% Occupied Bandwidth

| <b>Remark:</b> 99% Occupied Bandwidth measurements were done using the built-in auto function of the analyzer. |                       |                        |                            |
|----------------------------------------------------------------------------------------------------------------|-----------------------|------------------------|----------------------------|
| Frequency (MHz)                                                                                                | Channel Spacing (kHz) | Measured 99% OBW (kHz) | Authorized Bandwidth (kHz) |
| 156.025                                                                                                        | 25                    | 14.86                  | 20                         |
| 157.425                                                                                                        | 25                    | 14.95                  | 20                         |
| 156.525 (DSC)                                                                                                  | 25                    | 13.75                  | 20                         |

See the following plots for details of measurements.

**Plot 5.5.4.1.1.** Occupied Bandwidth for 156.025 MHz, 25 kHz Channel Spacing, High Power , G3E

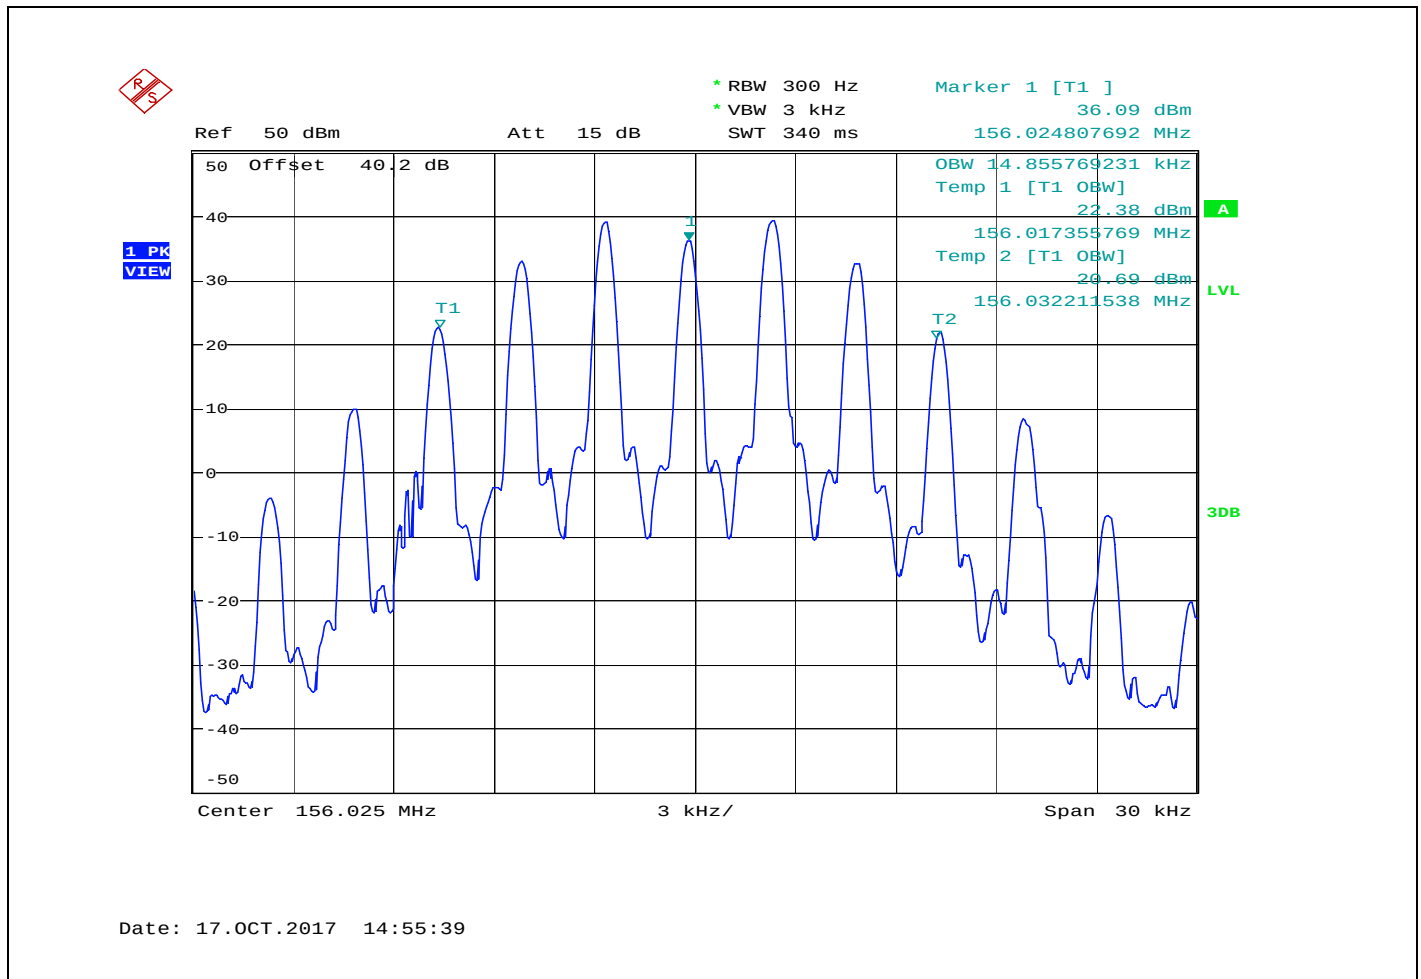

**ULTRATECH GROUP OF LABS**


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.5.4.1.2. Occupied Bandwidth for 157.425 MHz, 25 kHz Channel Spacing, High Power, G3E

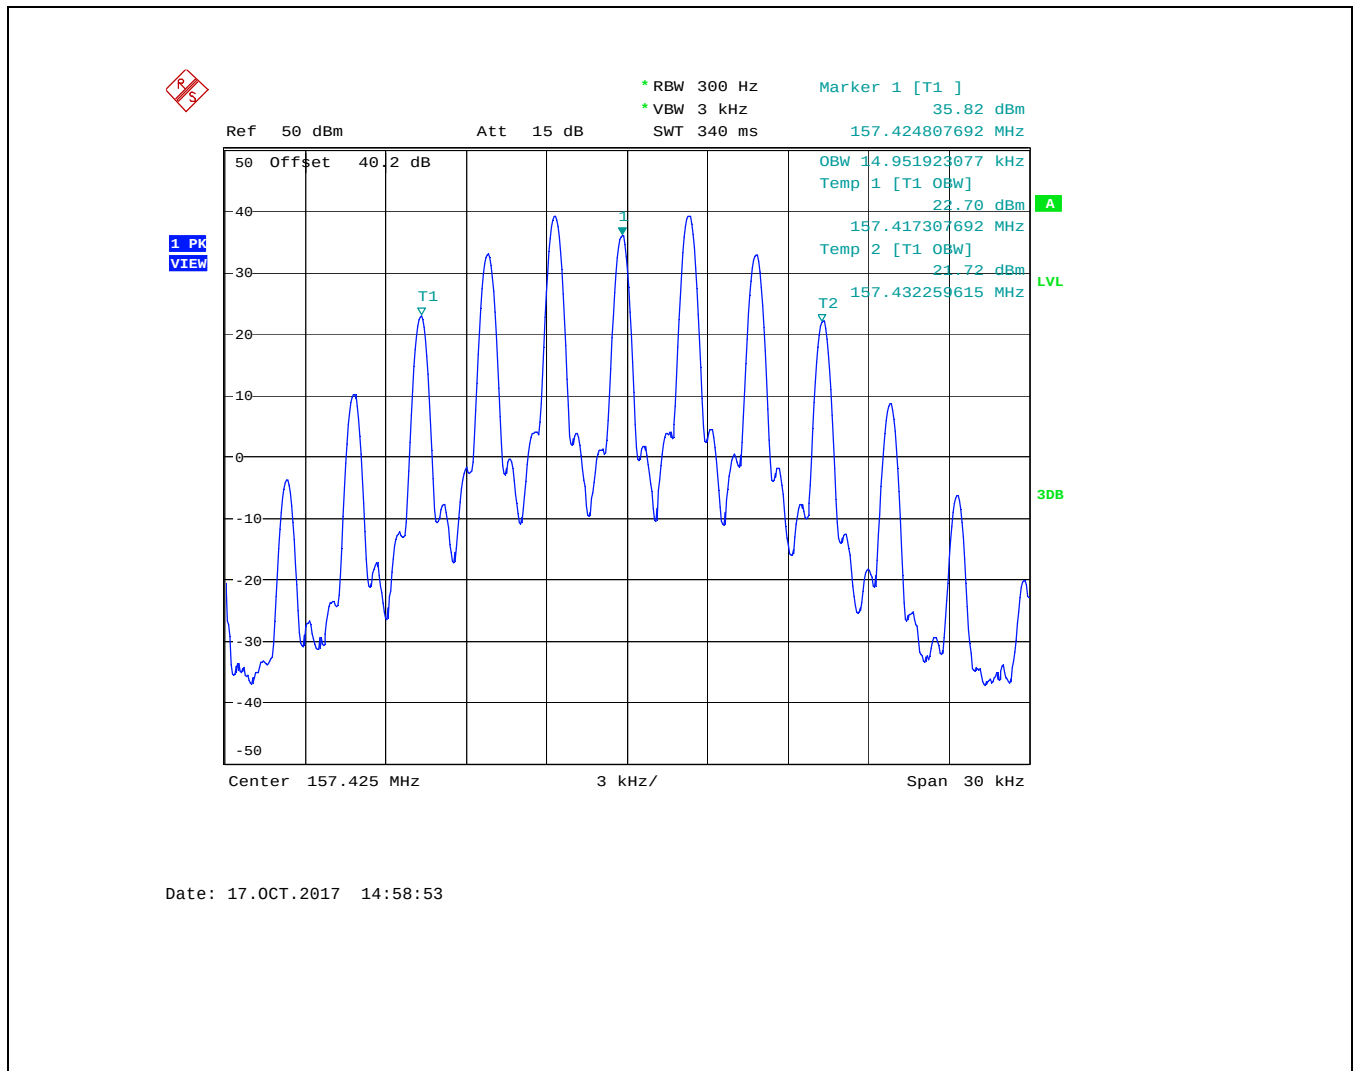

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80

October 24, 2017


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot 5.5.4.1.3.** Occupied Bandwidth for 156.525 MHz, 25 kHz Channel Spacing, High Power, DSC-G2B



## 5.5.4.2. Emission Limitation

Plot 5.5.4.2.1. Emission Limitation for 156.025 MHz, 25 kHz Channel Spacing, High Power , G3E

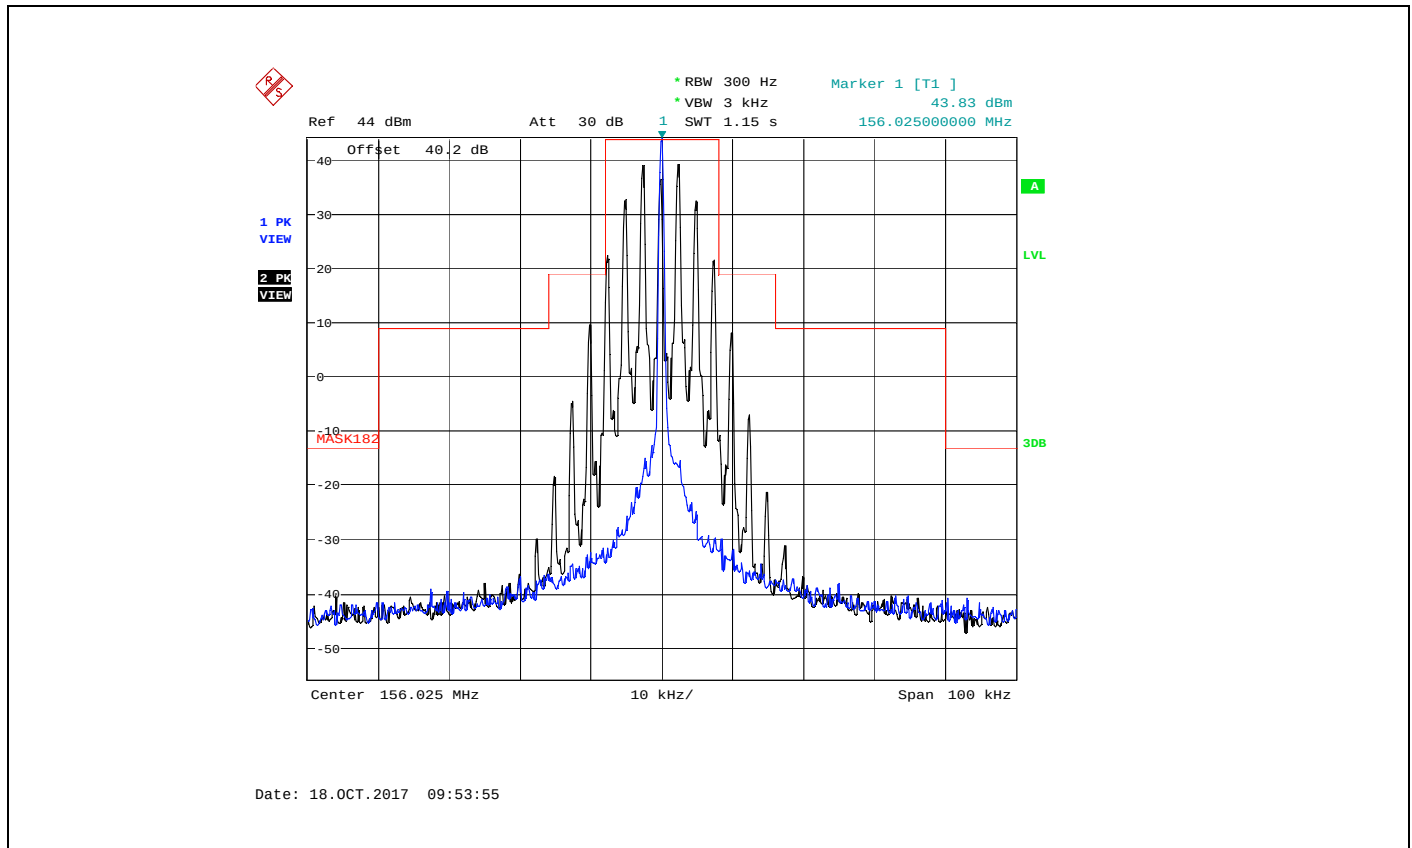

## ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80


October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**Plot 5.5.4.2.2.** Emission Limitation for 156.025 MHz, 25 kHz Channel Spacing, Low Power G3E,

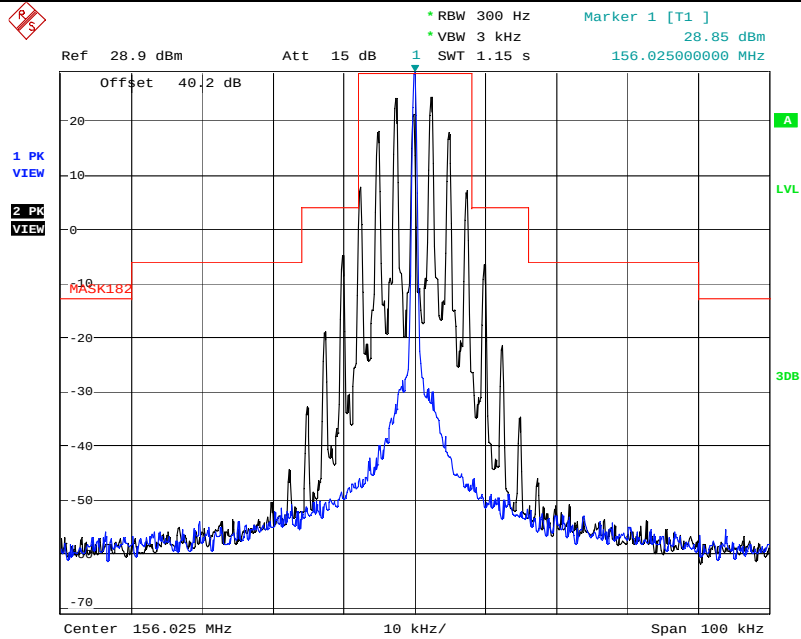


Date: 18.OCT.2017 10:06:26

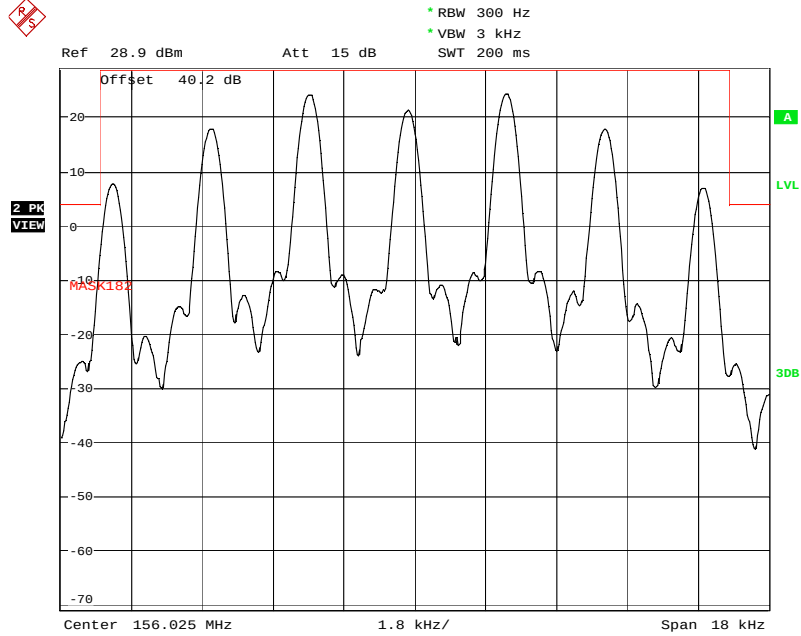


Date: 18.OCT.2017 10:08:21



Plot 5.5.4.2.4. Emission Limitation for 157.425 MHz ,25 kHz Channel Spacing, Low Power , G3E

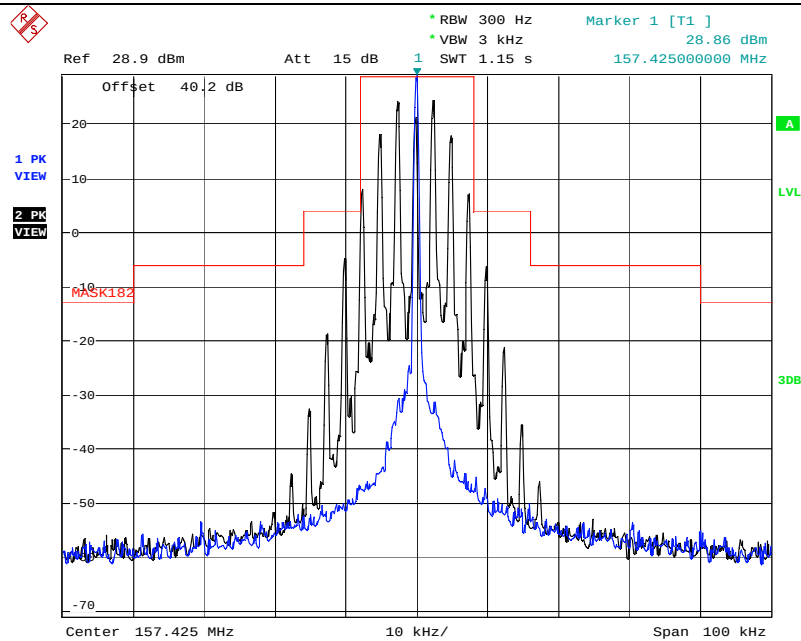

Date: 18.OCT.2017 10:17:51

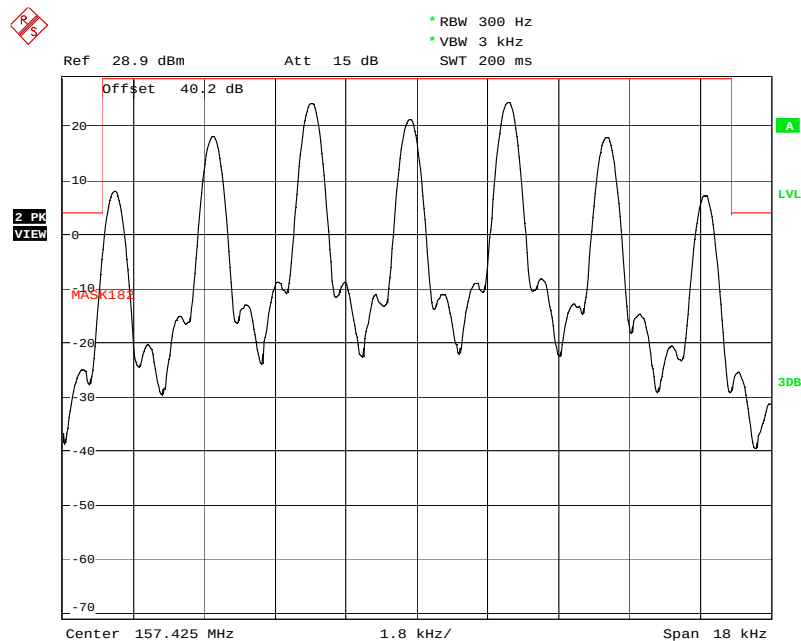

Date: 18.OCT.2017 10:19:04

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**Plot 5.5.4.2.5.** Emission Limitation for 156.525 MHz, 25 kHz Channel Spacing, High Power , DSC-G2B

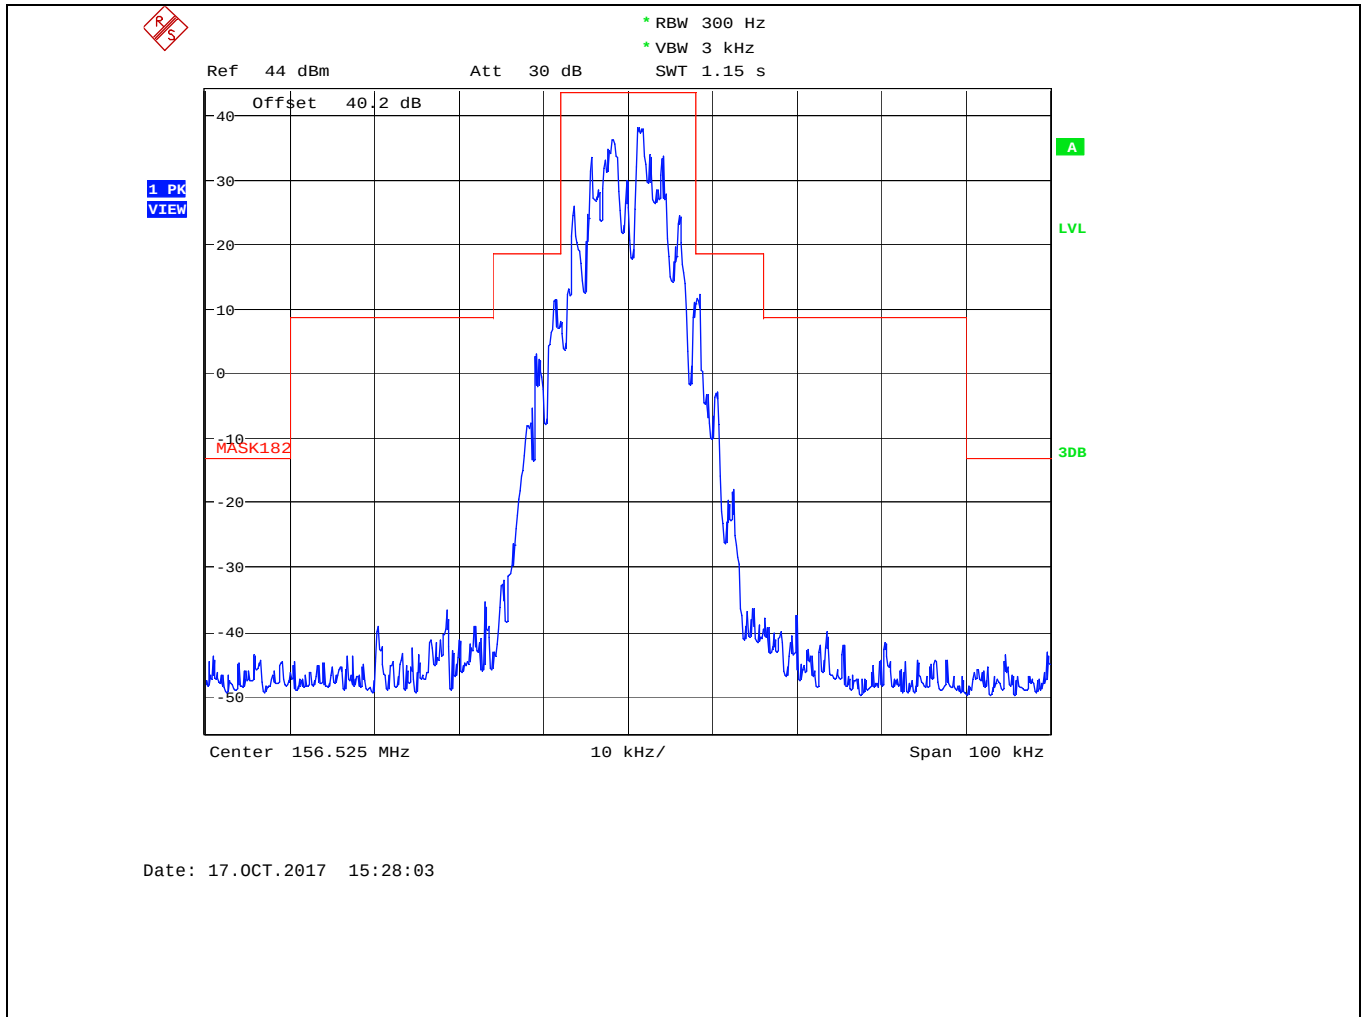

## 5.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 80.211(f)(3)]


### 5.6.1. Limits

§ 80.211 (f)(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus  $10\log_{10}$  (mean power in watts) dB.

### 5.6.2. Method of Measurements


Refer to Section 8.5 of this report for measurement details

### 5.6.3. Test Arrangement

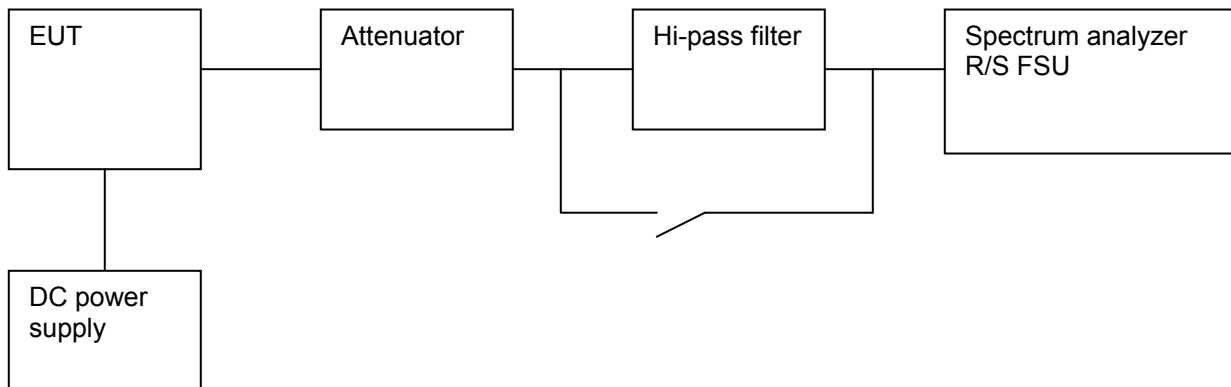

#### 5.6.4. Test Data

Plot 5.6.4.1. Spurious Emissions at Antenna Terminals, 156.025 MHz, 25 kHz Channel Spacing, High Power, 30 MHz - 2 GHz

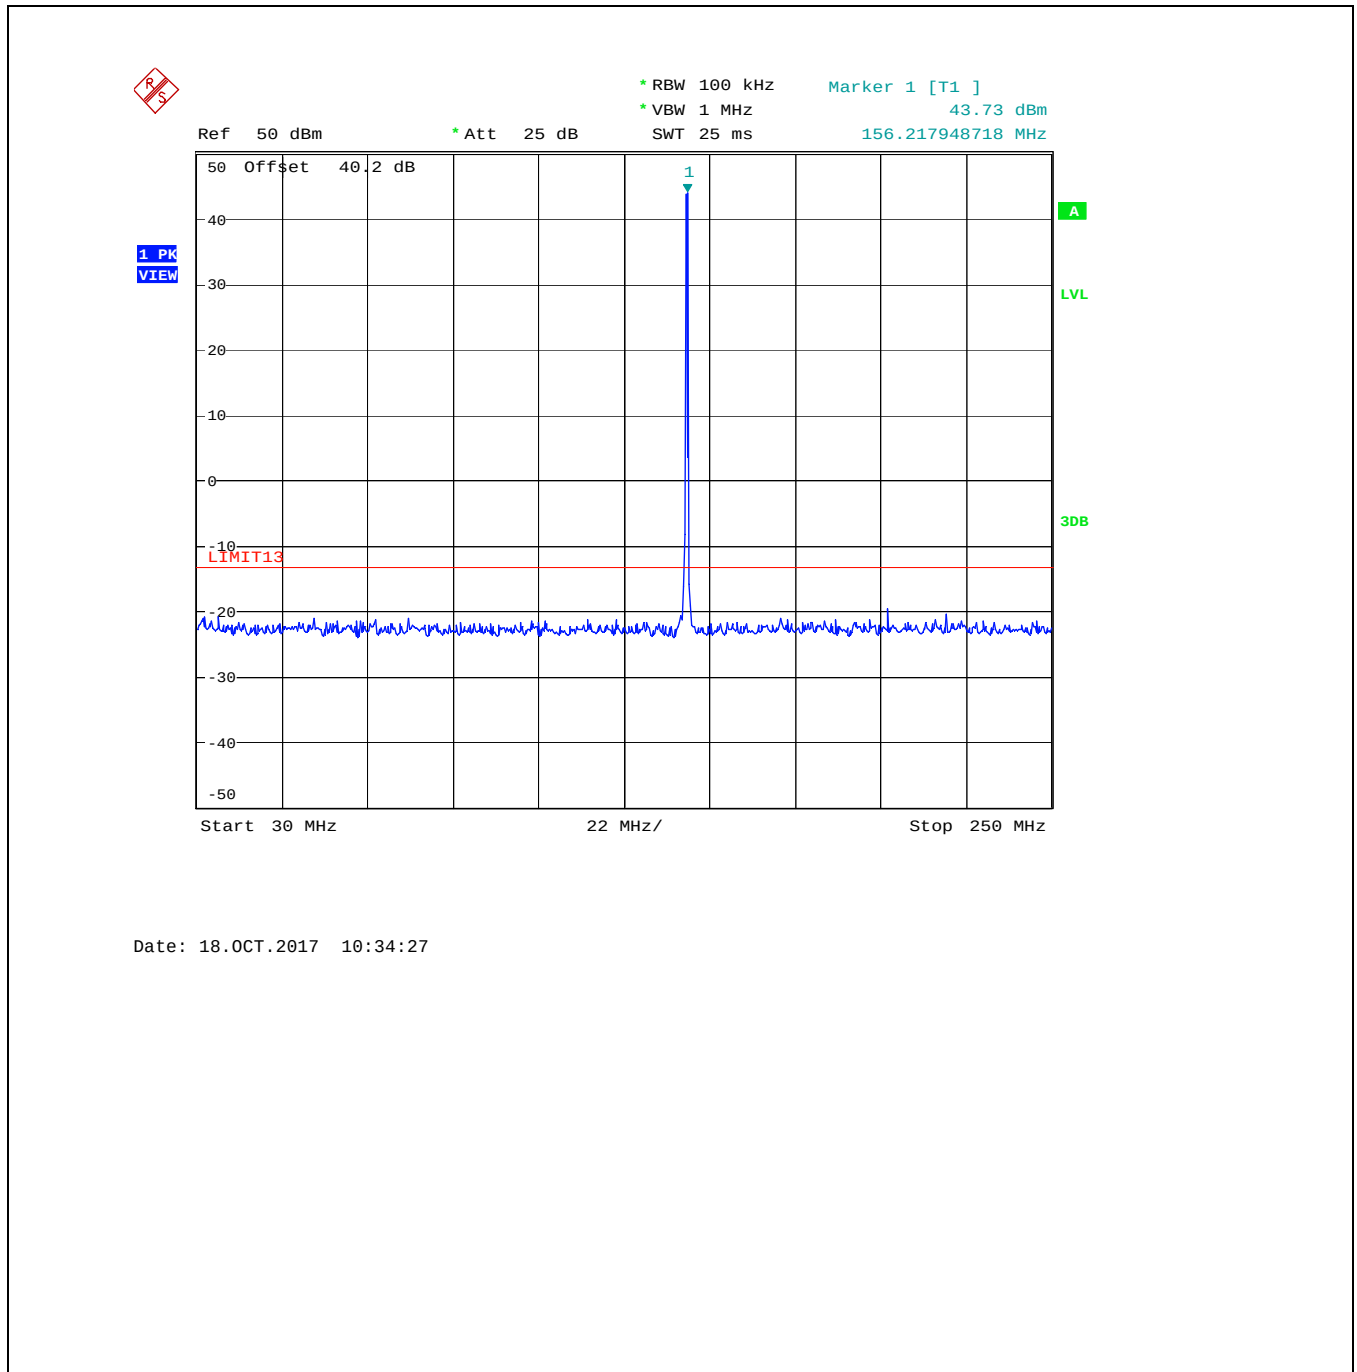


#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

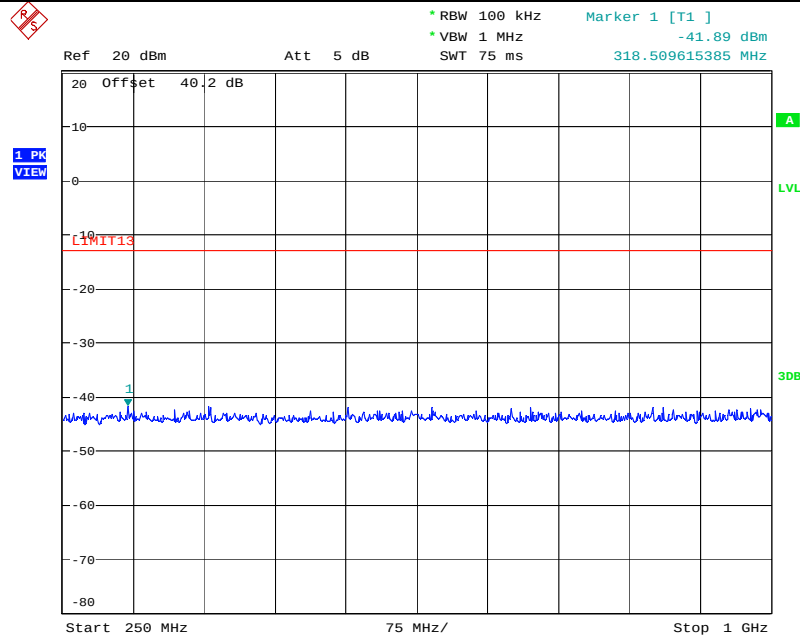

Date: 18.OCT.2017 10:49:33

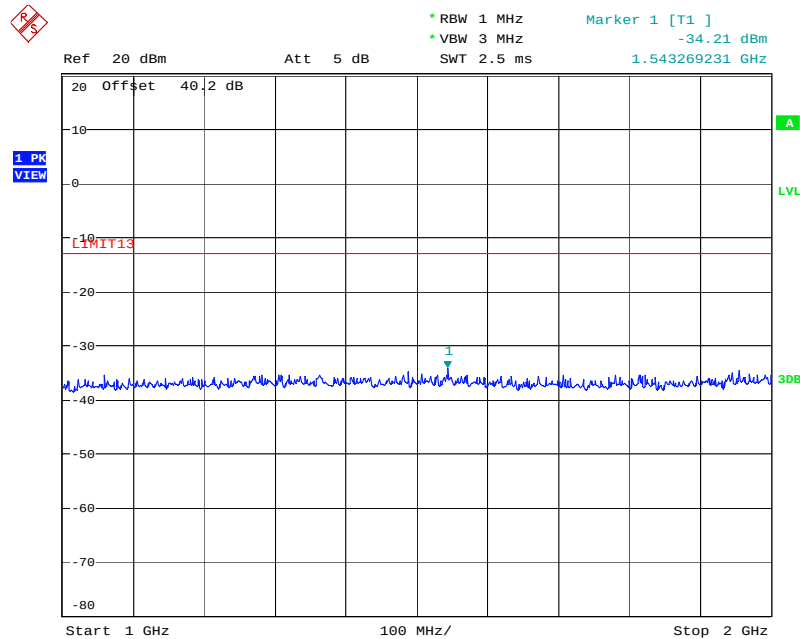

Date: 18.OCT.2017 10:54:08


# ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot 5.6.4.2.** Spurious Emissions at Antenna Terminals, 156.025 MHz, 25 kHz Channel Spacing, Low Power, 30 MHz - 2 GHz

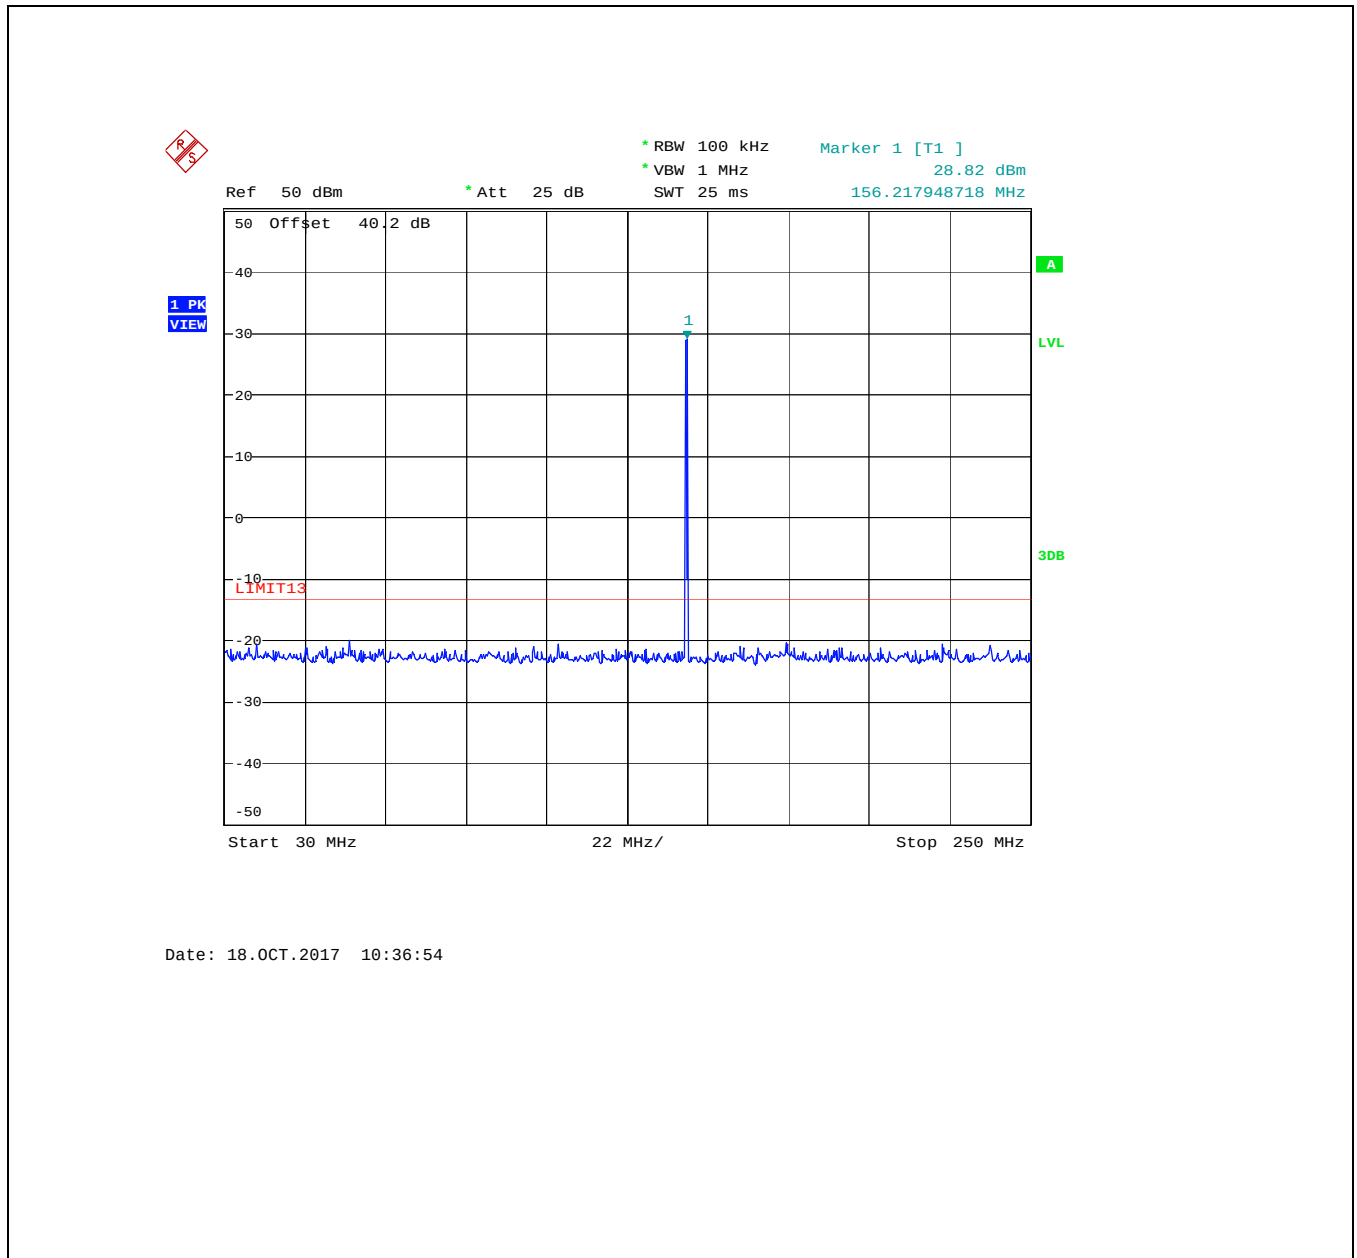

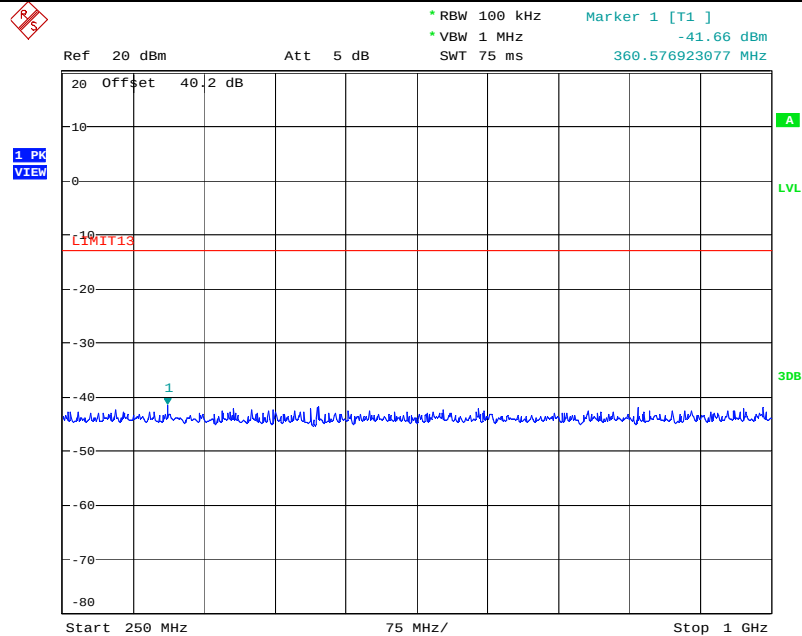

Date: 18.OCT.2017 10:51:09

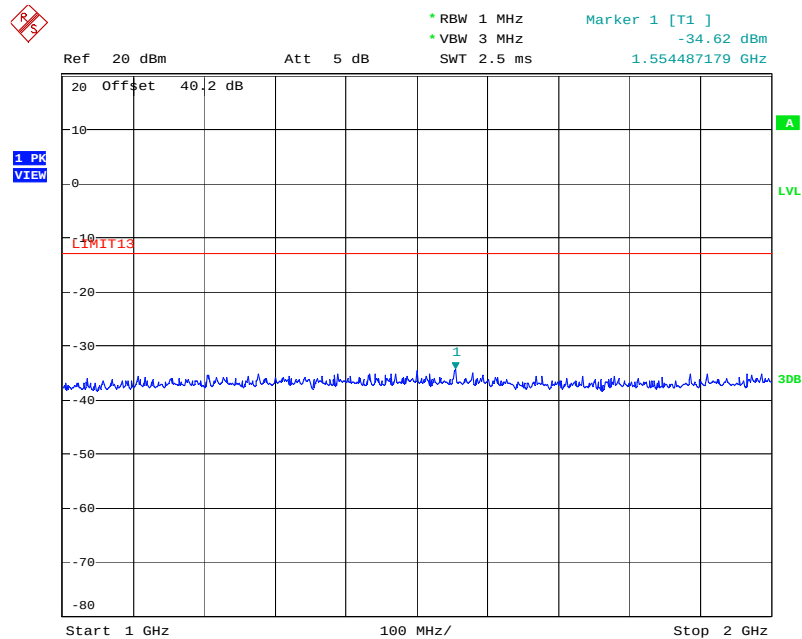

Date: 18.OCT.2017 10:52:44

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4


Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**Plot 5.6.4.3.** Spurious Emissions at Antenna Terminals, 157.425 MHz, 25 kHz Channel Spacing, High Power, 30 MHz - 2 GHz

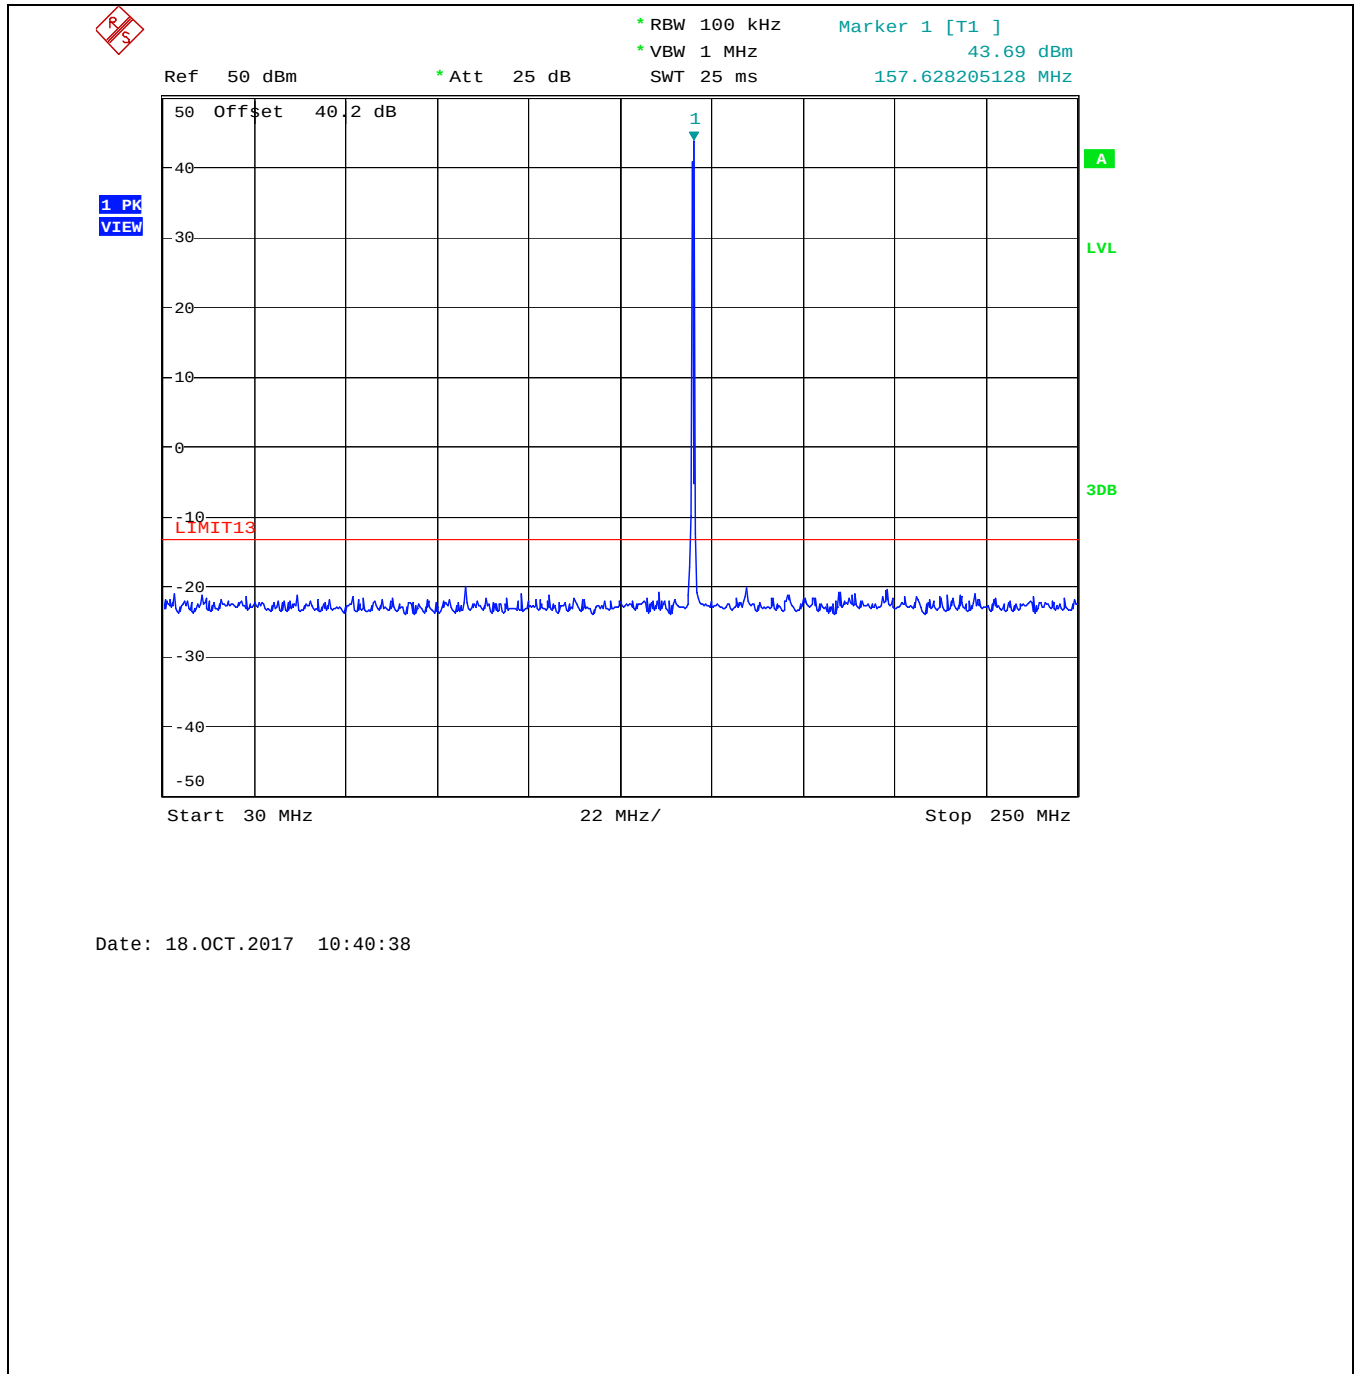


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

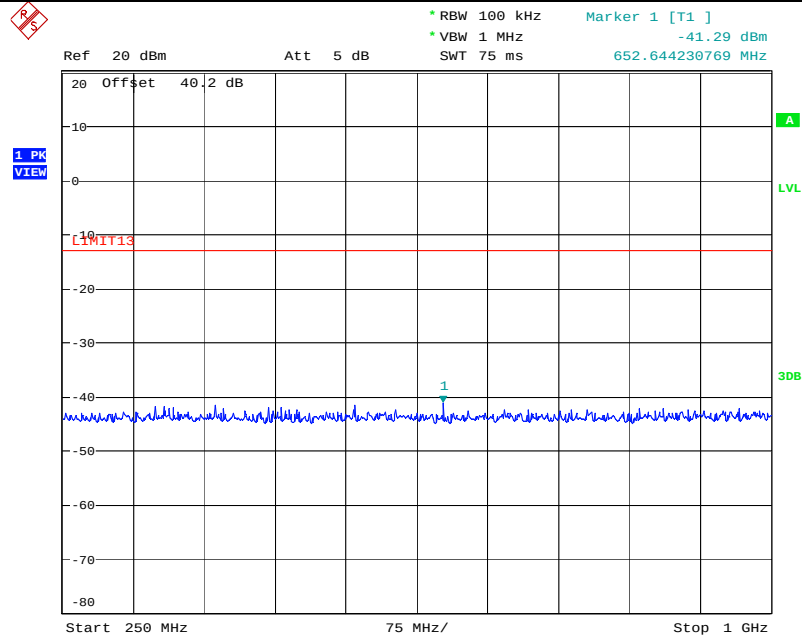

Date: 18.OCT.2017 10:46:22

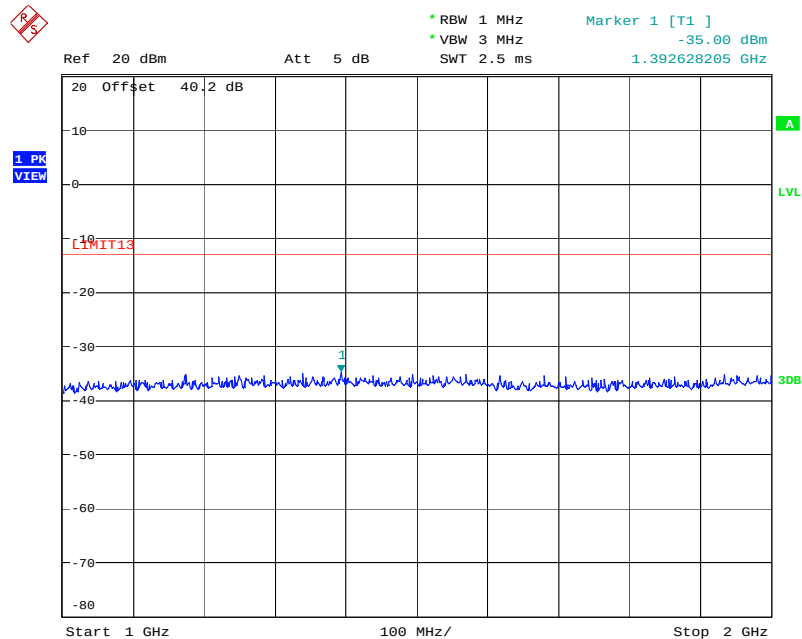

Date: 18.OCT.2017 10:55:34

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 171COM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**Plot 5.6.4.4.** Spurious Emissions at Antenna Terminals, 157.425 MHz, 25 kHz Channel Spacing, Low Power, 30 MHz - 2 GHz

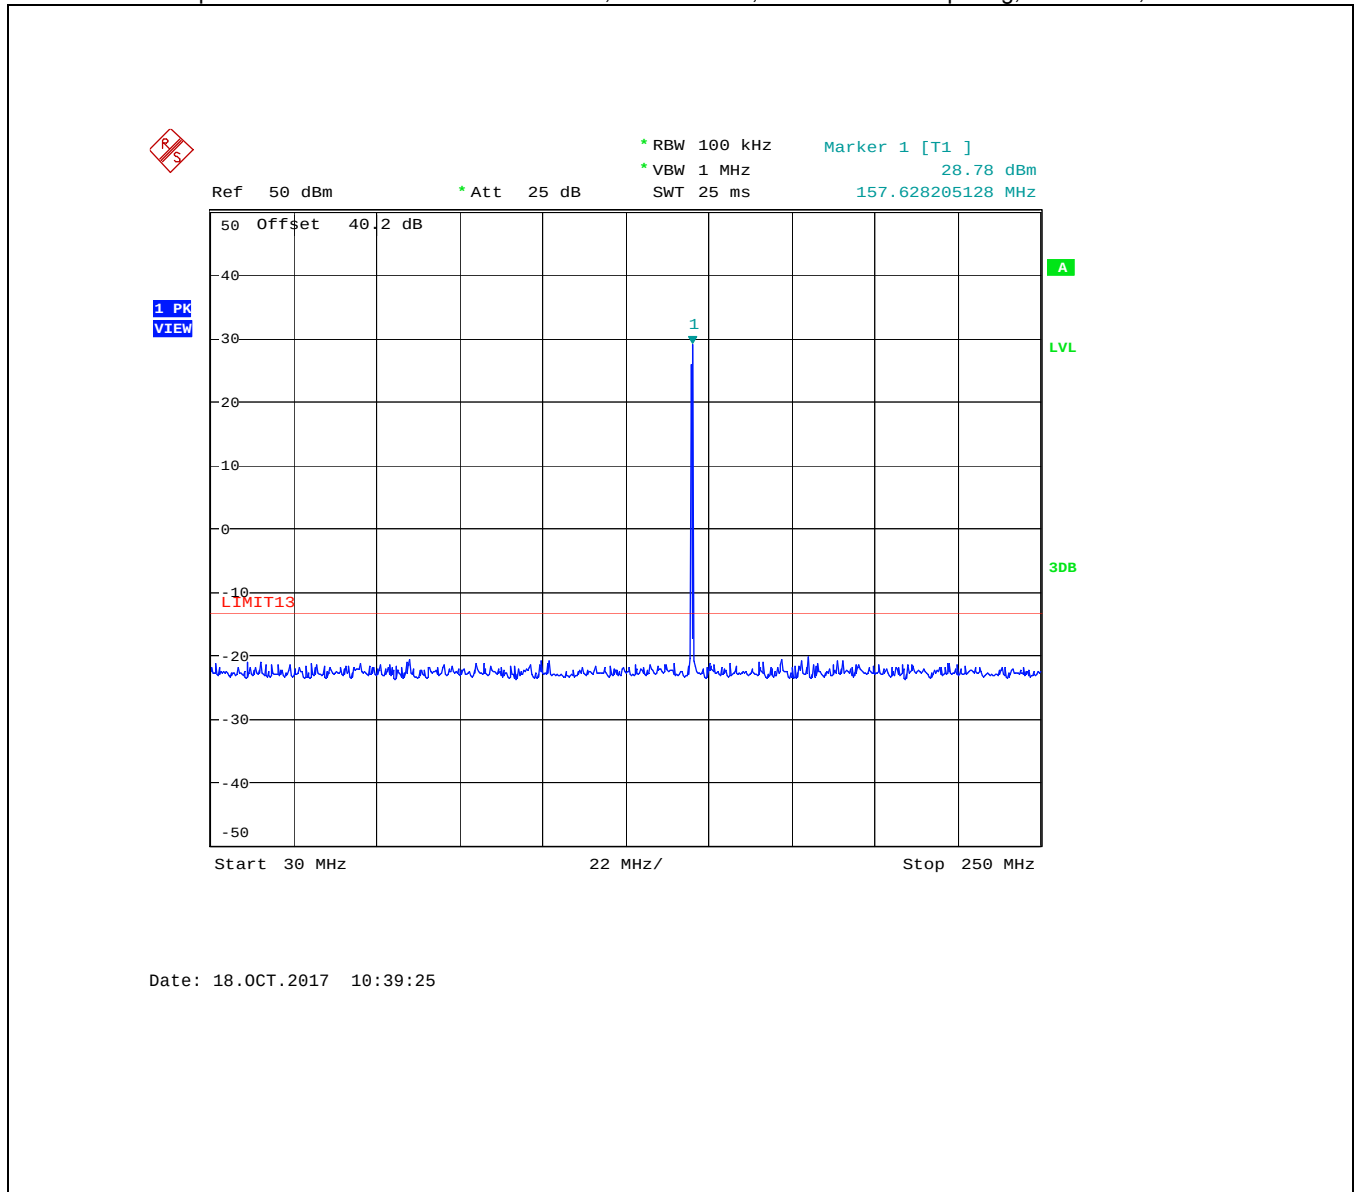


**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>


File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

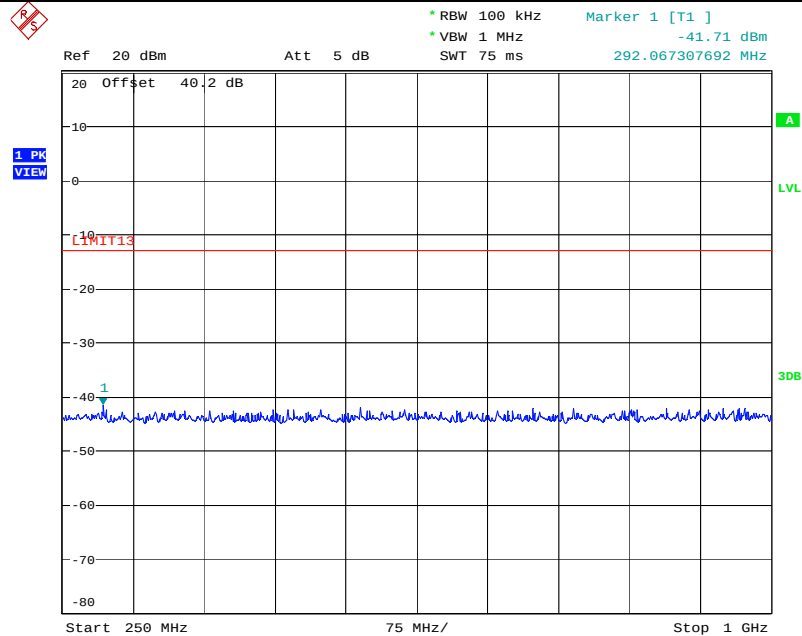

Date: 18.OCT.2017 10:47:45

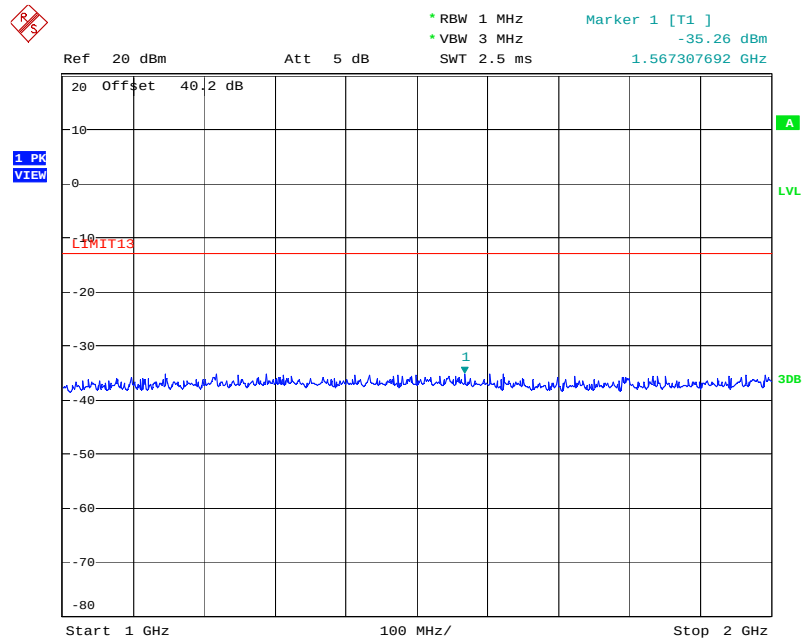

Date: 18.OCT.2017 10:56:43

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§ 80.211(f)(3)]

### 5.7.1. Limits


§ 80.211 (f)(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus  $10\log_{10}$  (mean power in watts) dB.

### 5.7.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:  
Lowest ERP of the carrier =  $EIRP - 2.15 \text{ dB} = P_c + G - 2.15 \text{ dB} = P_c \text{ dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$

### 5.7.3. Test Arrangement

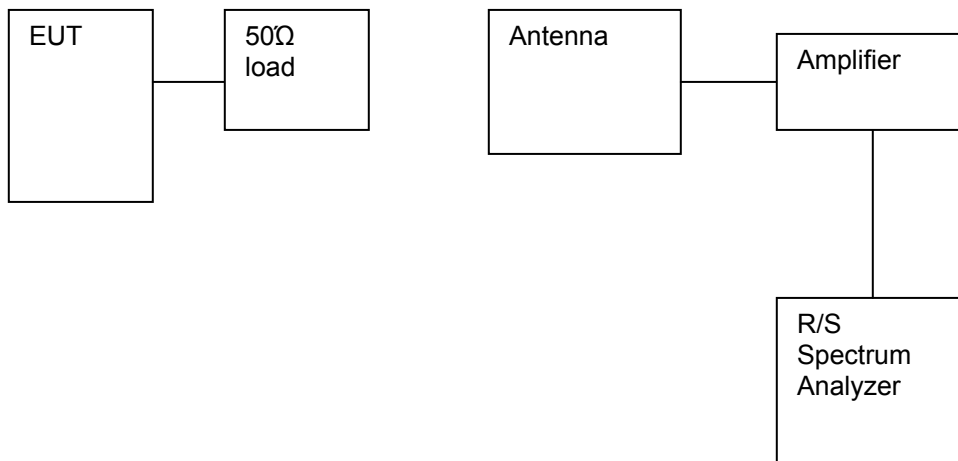

#### 5.7.4. Test Data

##### Remarks:

- The radiated emissions were performed with high power setting and 25 kHz channel spacing at 3 m distance to represents the worst-case test configuration.
- The emissions were scanned from 30 MHz to 6 GHz; all significant emissions were recorded.

| <b>Carrier Frequency:</b>                                                                       |                           | 156.025 MHz               |                                  |              |                |                |
|-------------------------------------------------------------------------------------------------|---------------------------|---------------------------|----------------------------------|--------------|----------------|----------------|
| <b>Power:</b>                                                                                   |                           | 23.44 W                   |                                  |              |                |                |
| <b>Limit:</b>                                                                                   |                           | -13.0 dBm                 |                                  |              |                |                |
| Frequency<br>(MHz)                                                                              | E-Field<br>(dB $\mu$ V/m) | EMI Detector<br>(Peak/QP) | Antenna<br>Polarization<br>(H/V) | ERP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit. |                           |                           |                                  |              |                |                |

| <b>Carrier Frequency:</b>                                                                       |                           | 157.425 MHz               |                                  |              |                |                |
|-------------------------------------------------------------------------------------------------|---------------------------|---------------------------|----------------------------------|--------------|----------------|----------------|
| <b>Power:</b>                                                                                   |                           | 23.23 W                   |                                  |              |                |                |
| <b>Limit:</b>                                                                                   |                           | -13.0 dBm                 |                                  |              |                |                |
| Frequency<br>(MHz)                                                                              | E-Field<br>(dB $\mu$ V/m) | EMI Detector<br>(Peak/QP) | Antenna<br>Polarization<br>(H/V) | ERP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
| All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit. |                           |                           |                                  |              |                |                |

## 5.8. FREQUENCY STABILITY [§§ 2.1055 & 80.209]

### 5.8.1. Limits

| Frequency Band | Coast Stations |                    | Ship Stations       |
|----------------|----------------|--------------------|---------------------|
|                | Below 3 W      | 3 to 100 W         |                     |
| 156–162 MHz    | 10 ppm         | <sup>1</sup> 5 ppm | <sup>2</sup> 10 ppm |


<sup>1</sup> For transmitters operated at private coast stations with antenna heights less than 6 meters (20 feet) above ground and output power of 225 Watts or less the frequency tolerance is 10 parts in  $10^6$ .

<sup>2</sup> For transmitters in the radiolocation and associated telecommand service operating on 154.585 MHz, 159.480 MHz, 160.725 MHz and 160.785 MHz the frequency tolerance is 15 parts in  $10^6$ .

### 5.8.2. Method of Measurements

Refer to Section 8.3 of this report for measurement details

### 5.8.3. Test Arrangement

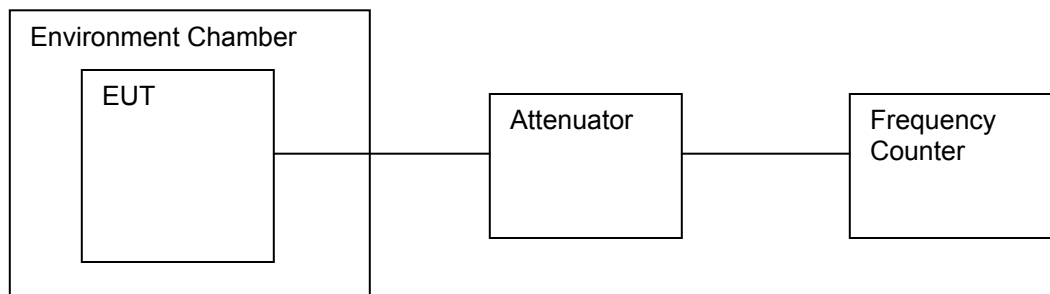

#### 5.8.4. Test Data

| <b>Carrier Frequency:</b>                      |                                           | 156.025                                                      | MHz                                                |              |
|------------------------------------------------|-------------------------------------------|--------------------------------------------------------------|----------------------------------------------------|--------------|
| <b>Full Power Level:</b>                       |                                           | 23.44                                                        | Watts                                              |              |
| <b>Frequency Tolerance Limit (Worst Case):</b> |                                           | 5                                                            | ppm                                                | (780.125 Hz) |
| <b>Max. Frequency Tolerance Measured:</b>      |                                           | 1.37                                                         | ppm                                                | (213 Hz)     |
| <b>Input Voltage Rating:</b>                   |                                           | 13.8                                                         | Vdc                                                |              |
| Ambient<br>Temperature<br>(°C)                 | Frequency Drift (Hz)                      |                                                              |                                                    |              |
|                                                | Supply Voltage<br>(Nominal)<br>13.8 Volts | Supply Voltage<br>(Minimum before switch-off)<br>11.73 Volts | Supply Voltage<br>(115% of Nominal)<br>15.87 Volts |              |
| -20                                            | 213                                       | --                                                           | --                                                 |              |
| -10                                            | 186                                       | --                                                           | --                                                 |              |
| 0                                              | 129                                       | --                                                           | --                                                 |              |
| 10                                             | 63                                        | --                                                           | --                                                 |              |
| 20                                             | 19                                        | 8                                                            | -18                                                |              |
| 30                                             | 31                                        | --                                                           | --                                                 |              |
| 40                                             | -48                                       | --                                                           | --                                                 |              |
| 50                                             | -77                                       | --                                                           | --                                                 |              |
| 60                                             | -164                                      | --                                                           | --                                                 |              |

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80

October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 6. TEST EQUIPMENT LIST

| Test Instrument               | Manufacturer       | Model No    | Serial No        | Frequency Range         | Cal Due date |
|-------------------------------|--------------------|-------------|------------------|-------------------------|--------------|
| Power Meter                   | HP                 | 436A        | 2016A07747       | 100KHz-sensor dependant | 08 Mar 2018  |
| Power Sensor                  | HP                 | 8481A       | 2349A40815       | 10MHz-18GHz             | 24 Jul 2018  |
| Attenuator(20dB)              | Aeroflex\Weinschel | 34-20-34    | BP6023           | DC-18GHz                | Cal on use   |
| Attenuator(20dB)              | Narda              | 26298       | A577             | DC-1GHz                 | Cal on use   |
| Power Supply                  | XANTREX            | XKW 60-50   | ---              | 0-60V,50A               | ----         |
| Multimeter                    | Tektronix          | TEKDDMM157  | 51167            | DC-100KHz               | 25 Nov 2017  |
| Modulation Analyzer           | HP                 | HP-8901B    | 3226A04606       | 150KHz-1300MHz          | 08 Mar 2018  |
| AF Signal Generator           | HP                 | HP-8920B    | US39064699       | 30MHz-1GHz              | 08 Mar 2018  |
| Digital Voltmeter             | HP                 | 3456A       | 2015A04523       |                         | 24 Nov 2017  |
| FFT Digital Spectrum Analyzer | Advantest          | R9211E      | 8202336          | 10MHz-100KHz            | 13 Sep 2018  |
| Signal Generator              | IFR                | 2025        | 202304/141       | 9KHz-2.51GHz            | 05 May 2018  |
| Attenuator(20dB)              | Aeroflex\Weinschel | 34-20-34    | BP6023           | DC-4GHz                 | Cal on use   |
| Spectrum Analyzer             | Rohde & Schwarz    | FSU         | 100398           | 20Hz-26.5GHz            | 06 Oct 2019  |
| Hi-pass filter                | Mini-Circuit       | SHP-250     | --               | Cut off 230MHz          | Cal on use   |
| Combiner                      | Weinschel 93458    | 1515        | PS119            | DC-18GHz                | Cal on use   |
| Bicon Antenna                 | ETS                | 3110B       | 3379             | 30-200MHz               | 10 Apr 2018  |
| Log Periodic Antenna          | ETS                | 3148        | 00023845         | 200-2000MHz             | 20 Jul 2018  |
| Horn Antenna                  | ETS                | 3117        | 00119425         | 1-18GHz                 | 29 Jun 2019  |
| Log Periodic Antenna          | ETS                | 93148       | 1101             | 200-2000MHz             | 10 May 2018  |
| Preamplifier                  | Com-Power          | PAM-118A    | 551016           | 500MHz-18GHz            | 15 Mar 2018  |
| Preamplifier                  | Com-Power          | PA-103      | 161040           | 1-1000MHz               | 05 Jun 2018  |
| Environmental Chamber         | Envirotronics      | SSH32C      | 11994847-S-11059 | -60 to 177° C           | 02 Jun 2018  |
| Frequency Counter             | HP                 | 5352B       | 3049A04423       | 10Hz-18GHz              | 05 May 2018  |
| Attenuator                    | Weinschel          | 50HF-020N   | Att8             | 130MHz-15GHz            | Cal on use   |
| Attenuator                    | Weinschel          | WA 35-20-33 | A164             | DC-8.5GHz               | Cal on use   |

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: 17ICOM-471Q\_FCC80  
October 24, 2017

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

### 7.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

|       | Line Conducted Emission Measurement Uncertainty<br>(150 kHz – 30 MHz):    | Measured   | Limit     |
|-------|---------------------------------------------------------------------------|------------|-----------|
| $u_c$ | Combined standard uncertainty:<br>$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$ | $\pm 1.57$ | $\pm 1.8$ |
| $U$   | Expanded uncertainty U:<br>$U = 2u_c(y)$                                  | $\pm 3.14$ | $\pm 3.6$ |

### 7.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

|       | Radiated Emission Measurement Uncertainty @ 3m, Horizontal<br>(30-1000 MHz): | Measured   | Limit     |
|-------|------------------------------------------------------------------------------|------------|-----------|
| $u_c$ | Combined standard uncertainty:<br>$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$    | $\pm 2.15$ | $\pm 2.6$ |
| $U$   | Expanded uncertainty U:<br>$U = 2u_c(y)$                                     | $\pm 4.30$ | $\pm 5.2$ |

|       | Radiated Emission Measurement Uncertainty @ 3m, Vertical<br>(30-1000 MHz): | Measured   | Limit     |
|-------|----------------------------------------------------------------------------|------------|-----------|
| $u_c$ | Combined standard uncertainty:<br>$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$  | $\pm 2.39$ | $\pm 2.6$ |
| $U$   | Expanded uncertainty U:<br>$U = 2u_c(y)$                                   | $\pm 4.78$ | $\pm 5.2$ |

|       | Radiated Emission Measurement Uncertainty @ 3 m, Horizontal &<br>Vertical (1 – 18 GHz): | Measured   | Limit                  |
|-------|-----------------------------------------------------------------------------------------|------------|------------------------|
| $u_c$ | Combined standard uncertainty:<br>$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$               | $\pm 1.87$ | Under<br>consideration |
| $U$   | Expanded uncertainty U:<br>$U = 2u_c(y)$                                                | $\pm 3.75$ | Under<br>consideration |



## EXHIBIT 8. MEASUREMENT METHODS

### 8.1. CONDUCTED POWER MEASUREMENTS

The following shall be applied to the combination(s) of the radio device and its intended antenna(e).

- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
  - The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
  - The measurement shall be performed using normal operation of the equipment with modulation.
- Test procedure shall be as follows:

**Step 1:** Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter,  $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$  with  $0 < x < 1$ , is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


**Step 2:** Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

{  $X = 1$  for continuous transmission  $\Rightarrow 10\log(1/x) = 0 \text{ dB}$  }

**Figure 1.**

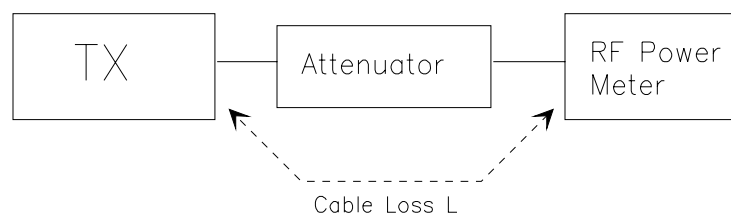

## 8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

### 8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency  
Resolution BW: 100 kHz  
Video BW: same  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through  $360^\circ$  about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

### 8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source  
Resolution BW: 100 kHz  
Video BW: VBW > RBW  
Detector Mode: positive  
Average: off  
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.  
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
  - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
  - ◆ HORN antenna for frequency above 1 GHz }.(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.  
(f) Use one of the following antenna as a receiving antenna:
  - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
  - ◆ HORN antenna for frequency above 1 GHz }.(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.  
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.  
(i) Tune the EMI Receivers to the test frequency.  
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.  
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.  
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.  
P1: Power output from the signal generator  
P2: Power measured at attenuator A input  
P3: Power reading on the Average Power Meter  
EIRP: EIRP after correction  
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)  
(p) Repeat step (d) to (o) for different test frequency  
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.  
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


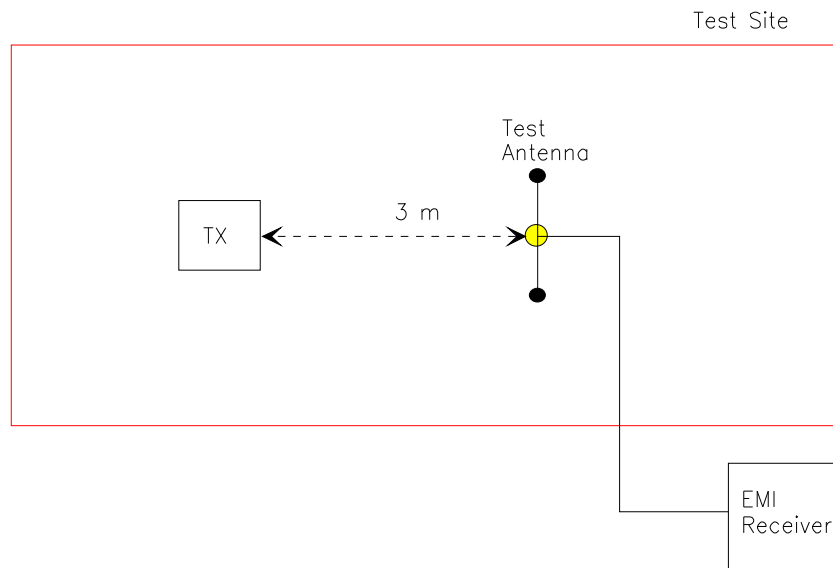


Figure 3

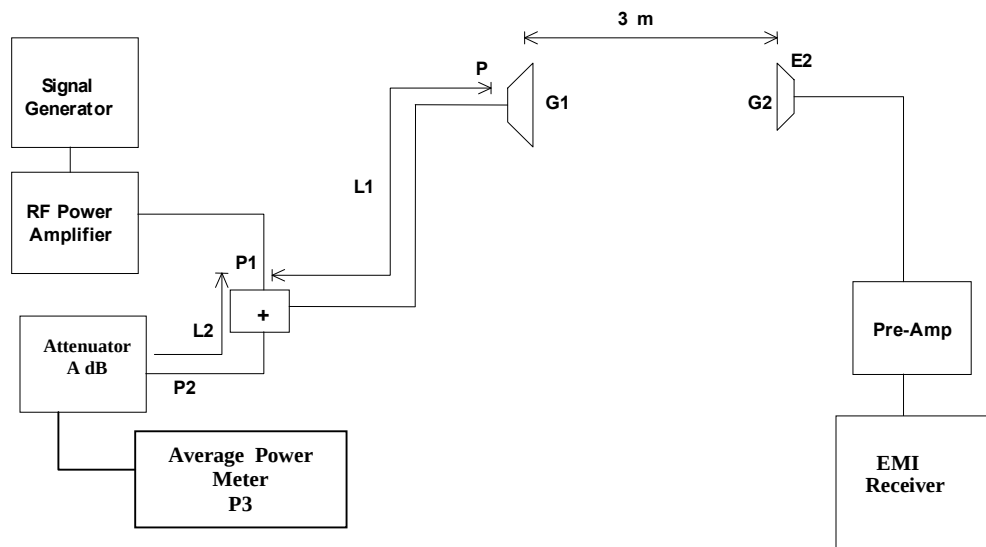

### 8.3. FREQUENCY STABILITY

Refer to § 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
  - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
  - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
  - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

#### 8.4. EMISSION MASK

**Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):** The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.:  $\pm 2.5$  KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

**Digital Modulation Through a Data Input Port @ 2.1049(h):** Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

For 25 kHz Channel Spacing: RBW = 300 Hz

For 12.5 kHz or 6.25 kHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

#### 8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 kHz minimum , VBW  $\geq$  RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

**FCC 47 CFR 2.1057 - Frequency Spectrum to be investigated:** The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

**FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal:** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.