

# Electromagnetic Emission

## FCC MEASUREMENT REPORT

---

### CERTIFICATION OF COMPLIANCE

### FCC Part 15 Certification Measurement

**PRODUCT** : LCD TV  
**MODEL/TYPE NO** : DLN-30D3  
**FCC ID** : OIODLN-30D3  
**APPLICANT** : Erae Electronics Industry Co., Ltd.  
#371-51, Kasan-Dong, Keumcheon-Ku, Seoul, 153-803, Korea  
Attn.: Woon-Seok, Yu / Deputy General Manager  
**FCC CLASSIFICATION** : Class B personal computers and peripherals  
**FCC RULE PART(S)** : FCC Part 15 Subpart B  
**FCC PROCEDURE** : Certification  
**TRADE NAME** : DAEWOO, Erae  
**TEST REPORT No.** : E05.0207.FCC.101N  
**DATES OF TEST** : January 17 ~ February 05, 2005  
**DATES OF ISSUE** : February 07, 2005  
**TEST LABORATORY** : ETL Inc. ( FCC Registration Number : 95422)  
#584 Sangwhal-ri, Kanam-myon, Yoju-kun, Kyounggi-do,  
469-885, Korea  
Tel : (031) 885-0072 Fax : (031) 885-0074

This LCD TV, Model DLN-30D3 has been tested in accordance with the measurement procedures specified in ANSI C63.4-2001 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

*Yo Han, Park*

Yo Han, Park / Chief Engineer

**ETL Inc.**

**#584 Sangwhal-ri, Kanam-myon, Yoju-kun,  
Kyounggi-do, 469-885, Korea**



## Table of Contents

### FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
  - 5.1 Summary of Test Results
  - 5.2 Conducted Emissions Measurement
  - 5.3 Radiated Emissions Measurement
6. Sample Calculation
7. List of test Equipment for Measurement

- Appendix A. FCC ID Label and Location
- Appendix B. Test Setup Photographs
- Appendix C. External Photographs
- Appendix D. Internal Photographs
- Appendix E. Block Diagram
- Appendix F. User Manual

**Scope** – *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

## General Information

**Applicant Name** : Erae Electronics Industry Co., Ltd.

**Address** : #371-51, Kasan-Dong, Keumcheon-Ku, Seoul,  
153-803, Korea

**Attention** : Woon-Seok, Yu / Deputy General Manager

- **EUT Type** : LCD TV
- **Model Number** : DLN-30D3
- **FCC ID** : OIODLN-30D3
- **S/N** : N/A
- **FCC Rule Part(s)** : FCC Part 15 Subpart B
- **Test Procedure** : ANSI C63.4-2001
- **FCC Classification** : Class B personal computers and peripherals
- **Dates of Tests** : January 17 ~ February 05, 2005  
ETL Inc.  
EMC Testing Lab (FCC Registration Number : 95422)
- **Place of Tests** : 584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,  
Kyounggi-Do, Korea  
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No.** : E05.0207.FCC.101N

## 1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyounggi-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2001 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2001 and registered to the Federal Communications Commission(Registration Number : 95422 ).

The measurement procedure described in America national standard for method of measurement of radio-noise emission from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz (ANSI C.63.4-2001) was used in determining radiated and conducted emissions from the Erae Electronics Industry Co., Ltd. Model: DLN-30D3

## 2. PRODUCT INFORMATION

### 2.1 General Remark

The Equipment Under Test (EUT) is the Erae Electronics Industry Co., Ltd., LCD TV, Model: DLN-30D3, ELT-3022AN, ELT-3022BN & ELT-3000P has a minor changes to the basic model.

**Model Difference:** Basic model name: DLN-30D3

Multi listing model name: ELT-3022AN, ELT-3022BN & ELT-3000P

**Technical Deviation:** Models DLN-30D3, ELT-3022AN, ELT-3022BN & ELT-3000P are same with basic model except for model name, brand name and front design.

### 2.2 Equipment Description

The Equipment Under Test (EUT) is the Erae Electronics Industry Co., Ltd., LCD TV, DLN-30D3

### 2.3 General Specification

- Chassis Type : Plastic
- List of Each OSC. Or  
X-Tal. Freq. ( $\geq 1$ MHz) : X-Tal: 18.432, 20.25, 13.50, 14.31818 MHz
- Aspect Ratio : 15:9
- Screen Size (H x V) : 643.2 x 385.92 mm
- Resolution : 1280 x 1024
- Pixel pitch : 0.1675 x RGB x 0.5025 mm
- Displayable Colors : 16.7M
- Brightness : 550cd/m<sup>2</sup>(Typical)
- Contrast : 600:1
- Viewing Angle : 85 ° / 85 ° / 85 ° / 85 °
- Input signal : NTSC, SD ~ HD, VGA ~ SXGA
- Tuner : NTSC
- RGB Input : D-Sub, DVID
- AC Input : AC 100 – 240 V, 50/60 Hz, 2 A
- Power Consumption : 150 W

## 3. DESCRIPTION OF TESTS

### 3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-2001 "measurement of information technology equipment ". The measurement were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 /50uH LISN as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

#### - Procedure of Test

The line-conducted facility is located inside a shielded room 1 m X 1.5 m wooden table 80cm high is placed 40cm away from the vertical wall and more than 0.8 m away from the side wall of the shielded room. Grounds of two LISN are bonded to the reference horizontal ground plane. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Powers of the LISN are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer or test receiver to determine the frequency producing the maximized emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

## 3. DESCRIPTION OF TESTS

### 3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-2001 "measurement of information technology equipment ". The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

#### - Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the maximized emission in shielded room. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using broadband antenna. For above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3-meters. The test equipment was placed on a wooden turn-able table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. Emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 4. TEST CONDITION

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

### 4.2 EUT operation

Operating Mode	The worst operating condition
Stand-by mode	X
640 * 480, 75 Hz, Full "H" pattern display & MP3 play mode	X
720 * 400, 70 Hz, Full "H" pattern display & MP3 play mode	X
800 * 600, 75 Hz, Full "H" pattern display & MP3 play mode	X
1024 * 768, 75 Hz, Full "H" pattern display & MP3 play mode	X
1280 * 1024, 60 Hz, Full "H" pattern display & MP3 play mode	

: Worst case investigated during the test.

### 4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

#### EUT – LCD TV

FCC ID	: OIODLN-30D3
Model Name	: DLN-30D3
Serial No.	: N/A
Manufacturer	: Erae Electronics Industry Co., Ltd.
Power Supply Type	: Switching
Power Cord	: Non-Shielded, Detachable: 1.5 m
Data Cable	: 1.8 m Shielded RGB, 1.8 m Shielded DVI-D, 1.2m Shielded RCA, 1.2m Shielded S-Video

#### Support unit 1 – Personal computer (DELL)

FCC ID	: N/A (DoC)
Model Name	: DHM
Serial No.	: H9MB71S
Manufacturer	: DELL
Power Supply Type	: Switching
Power Cord	: Non-Shielded, Detachable: 1.2 m
Data Port	: RGB IN:1, Parallel:1, RS-232:1, PS/2: 2, USB: 4, RJ-45:1
	: Audio in:1, Audio out:1, MIC IN:1

**Support unit 2 –Keyboard (COMPAQ)**

FCC ID : N/A (DoC)  
Model Name : KB-9963  
Serial No. : B26960GBUKO13F  
Manufacturer : COMPAQ  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.5m

**Support unit 3 – Mouse (LOGITECH)**

FCC ID : DZL211029  
Model Name : M-S34  
Serial No. : LZC01002314  
Manufacturer : LOGITECH  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : None-Shielded, 1.2m

**Support unit 4 – USB Mouse (N/A)**

FCC ID : N/A  
Model Name : HL898W  
Serial No. : HL80811837  
Manufacturer : N/A  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.2m

**Support unit 5 – Serial Mouse (PETRA)**

FCC ID : JKGMUS5S01  
Model Name : MUS5S  
Serial No. : E183027  
Manufacturer : PETRA  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.2m

**Support unit 6 – DVD Box (ALPHACAST)**

FCC ID : N/A  
Model Name : DVDP-M100  
Serial No. : N/A  
Manufacturer : ALPHACAST  
Power Supply Type : DC 12 V of Adaptor  
Power Cord : Non-shielded, Detachable: 1.2 m  
Data Cable : Shielded, 1.2m

## 5. TEST RESULTS

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Test Rule Parts	Measurement Required	Result
15.107	Conducted emissions measurement	Passed by 6.92 dB
15.109	Radiated emissions measurement	Passed by 3.15 dB

The data collected shows that the **Erae Electronics Industry Co., Ltd. / LCD TV / DLN-30D3** complies with technical requirements of above rules part 15.107 and 15.109 Class B.

## 5. TEST RESULTS

### 5.2 Conducted Emissions Measurement

EUT	LCD TV / DLN-30D3 (SN: N/A)
Limit apply to	FCC Part 15. 107(Class B)
Test Date	February 03, 2005
Operating Condition	Full "H" pattern display(1280 x 1024, 60Hz) & MP3 play mode
Environment Condition	Humidity Level: 42 %RH, Temperature: 19
Result	Passed by 6.92 dB


### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.  
Detector mode: CISPR Quasi-Peak mode ( 6dB Bandwidth : 9 kHz )

Frequency [MHz]	Reading [dB $\mu$ V]		Phase [*H/**V]	Limit [dB $\mu$ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.172	43.12	38.56	N	64.86	54.86	21.74	16.30
0.264	50.16	44.38	N	61.30	51.30	11.14	6.92
0.311	42.67	38.82	H	59.94	49.94	17.27	11.12
0.397	42.12	36.78	H	57.92	47.92	15.80	11.14
0.461	38.35	33.87	H	56.67	46.67	18.32	12.80
14.315	31.83	29.19	N	60.00	50.00	28.17	20.81
23.750	38.43	31.63	H	60.00	50.00	21.57	18.37

#### NOTES:

- \* H : HOT Line , \*\*N : Neutral Line
- Margin value = Limit – Reading
- If the reading Quasi-Peak value is below the average limit, do not test average mode.



Test Engineer: H. S. Lee

## 5. TEST RESULTS

### Line: HOT Line

ETL EMC Laboratory

#### Conducted Emission Test Result


EUT: DLN-30D3  
 Manuf: Erae  
 Op Cond:  
 Operator:  
 Test Spec: FCC Part 15 CLASS B  
 Comment: Hot

#### Scan Settings (3 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	1000kHz	1000Hz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
1000kHz	5MHz	2kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
5MHz	30MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	

Transducer No. 1 Start 9kHz Stop 30MHz Name Factor

Prescan Measurement: Detectors: X PK / + AV  
 Meas Time: see scan settings  
 Peaks: 8  
 Acc Margin: 10 dB

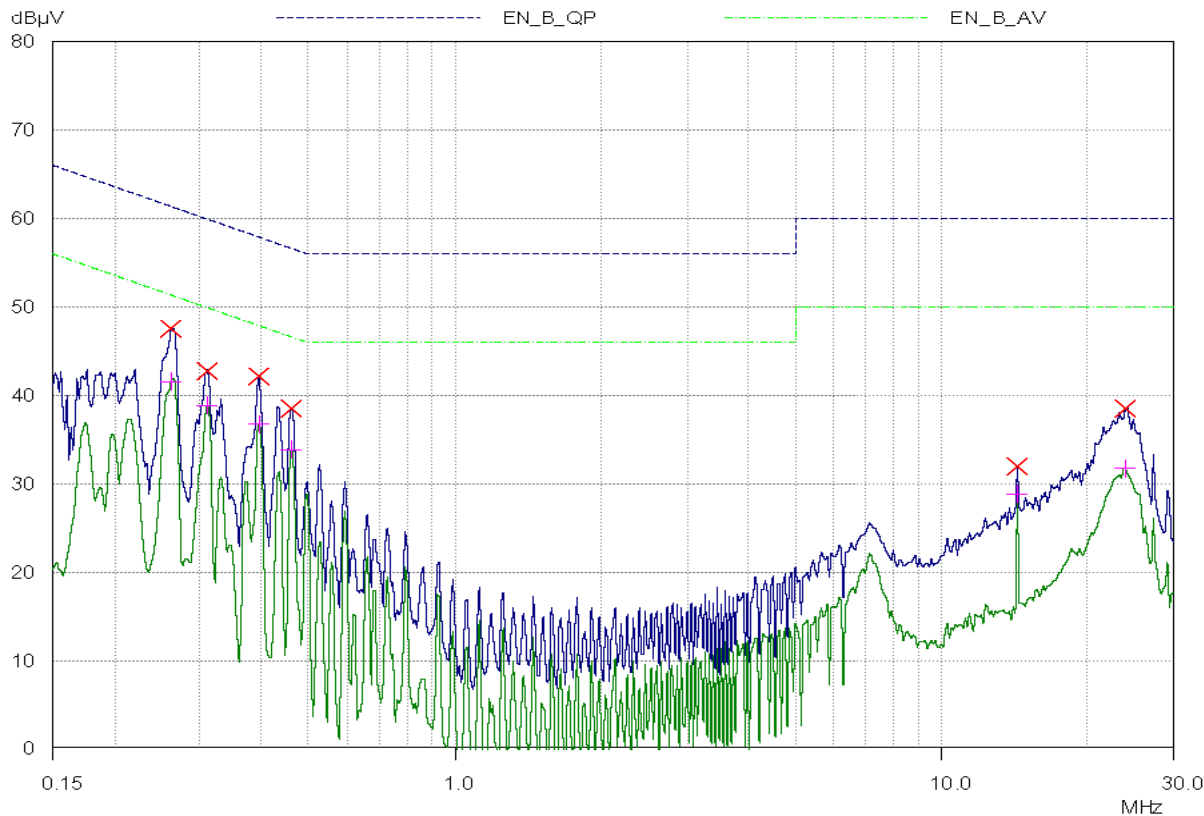

## 5. TEST RESULTS

### Line: Neutral Line

ETL EMC Laboratory

#### Conducted Emission Test Result


EUT: DLN-30D3  
 Manuf: Erae  
 Op Cond:  
 Operator:  
 Test Spec: FCC Part 15 CLASS B  
 Comment: Neutral

#### Scan Settings (3 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150kHz	1000kHz	1000Hz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
1000kHz	5MHz	2kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	
5MHz	30MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB	

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	Factor

Prescan Measurement: Detectors: X PK / + AV  
 Meas Time: see scan settings  
 Peaks: 8  
 Acc Margin: 10 dB

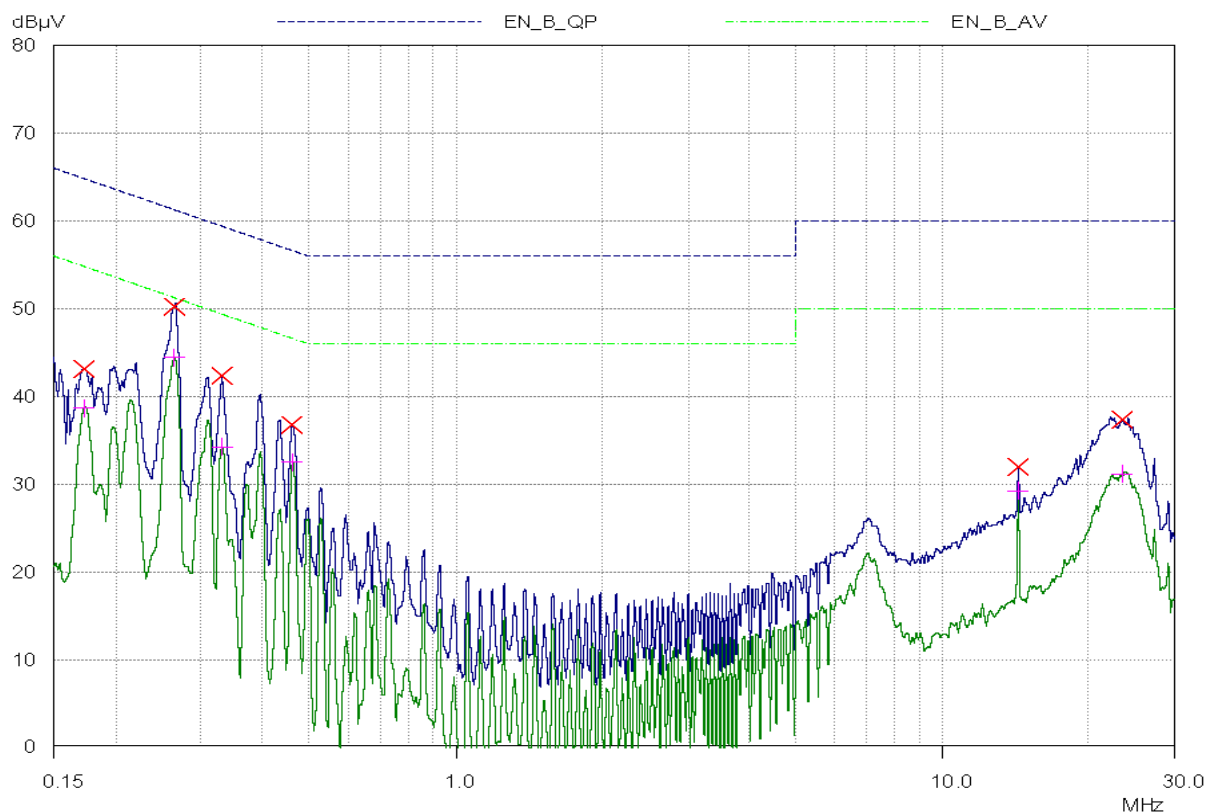

## 5. TEST RESULTS

### 5.3 Radiated Emissions Measurement

EUT	LCD TV / DLN-30D3 (SN: N/A)
Limit apply to	FCC Part 15. 109(Class B)
Test Date	February 03, 2005
Operating Condition	Full "H" pattern display(1280 x 1024, 60Hz) & MP3 play mode
Environment Condition	Humidity Level: 30 %RH, Temperature: 9
Result	Passed by 3.15 dB


### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.  
Detector mode: CISPR Quasi-Peak mode ( 6dB Bandwidth : 120 kHz )

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization [*H/**V]	Ant.Factor [dB/m]	Cable Loss [dB]	Result [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
42.36	20.25	V	12.01	1.89	34.15	40.00	5.85
47.88	22.43	V	12.25	2.06	36.74	40.00	3.26
146.56	18.95	V	13.33	3.50	35.77	43.50	7.73
651.45	15.51	H	17.81	9.31	42.63	46.00	3.37
716.50	11.73	H	20.44	9.83	42.00	46.00	4.00
781.74	8.57	H	22.95	10.62	42.13	46.00	3.87
912.03	8.55	V	22.36	11.95	42.85	46.00	3.15
938.24	6.62	V	22.87	12.05	41.54	46.00	4.46

NOTES : \* H : Horizontal polarization , \*\* V : Vertical polarization

1. Result = Reading + Antenna factor + Cable loss
2. Margin value = Limit - Result



Test Engineer: H. S. Lee

## 6. SAMPLE CALCULATION

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V / m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example: @ 912.03 MHz

$$\text{Class B Limit} = 46 \text{ dB } \mu V/m$$

$$\text{Reading} = 8.55 \text{ dB } \mu V$$

$$\text{Antenna Factor + Cable Loss} = 22.36 + 11.95 = 34.30 \text{ dB } \mu V/m$$

$$\text{Total} = 42.85 \text{ dB } \mu V/m$$

$$\text{Margin} = 46.00 - 42.85 = 3.15 \text{ dB}$$

$$= 3.15 \text{ dB below Limit}$$

## 7. List of Test Equipments for Measurements

	Test Equipment	Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7402A	H.P	US39110107	05-10-18
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3261A	Advantest	21720033	05-10-26
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	05-04-12
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESHS30	Rohde & Schwarz	0401901/002	05-10-18
<input type="checkbox"/>	Preamplifier	HP 8347A	HP	2834A00544	05-04-12
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	05-04-13
<input checked="" type="checkbox"/>	TriLog Antenna	VULB9160	Schwarz Beck	3082	05-07-27
<input type="checkbox"/>	LogBicon	VULB9165	Schwarz Beck	2023	05-07-06
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	05-06-10
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	05-07-09
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	05-07-09
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	05-06-10
<input type="checkbox"/>	Broad-band Horn Antenna	BBHA 9120D	Schwarz Beck	227	05-05-02
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input type="checkbox"/>	Plotter	7440A	H.P	2725A 75722	N/A
<input checked="" type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input type="checkbox"/>	Thermo Hygrograph	3-3122	ISUZU	3312201	05-04-16
<input type="checkbox"/>	BaroMeter	-	Regulus	-	-