

LTE Band 25


MEASUREMENT 1

Middle Band SAR (Channel 26140):


Date: 10/29/2024

Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.262443
Relative permittivity (imaginary part)	13.658301
Conductivity (S/m)	1.402220
Variation (%)	-4.340000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 25(1 RB#0)</u>

SURFACE SAR

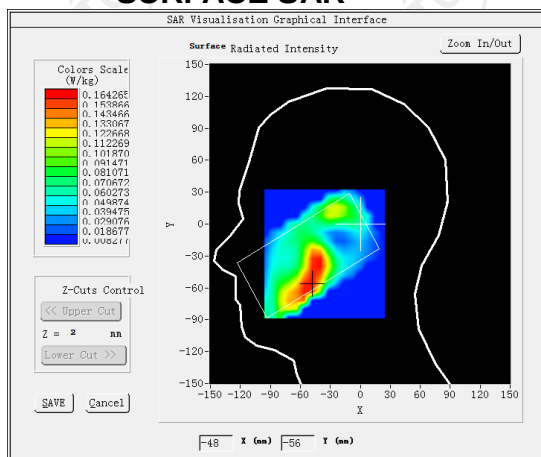


VOLUME SAR

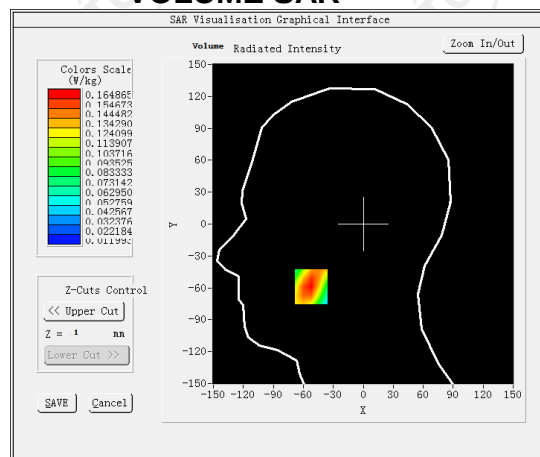


Maximum location: X=-52.00, Y=-59.00 SAR Peak: 0.24 W/kg


SAR 10g (W/Kg)	0.096014
SAR 1g (W/Kg)	0.157171

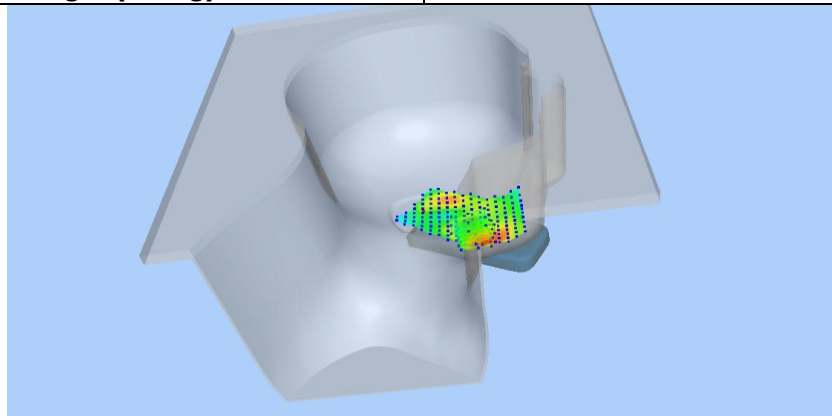

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2413	0.1649	0.1023	0.0656	0.0450

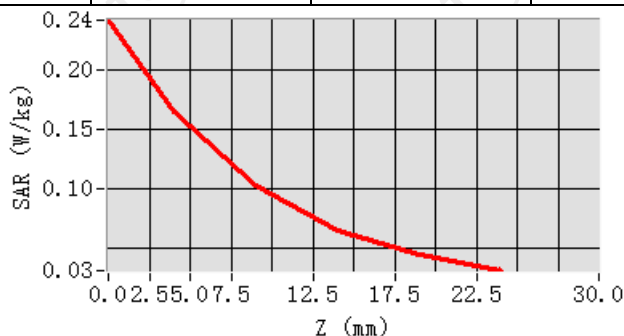

Hot spot position

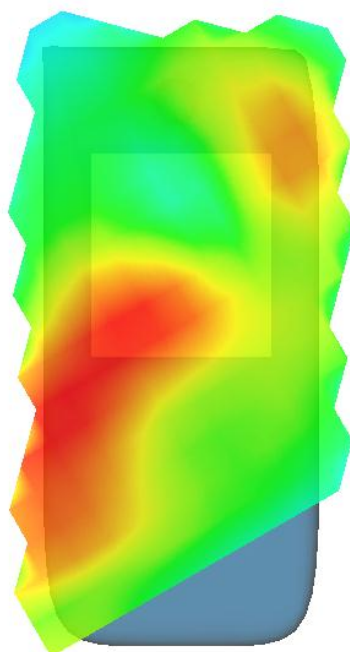

MEASUREMENT 2


Middle Band SAR (Channel 26140):

Date: 10/29/2024


Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.262443
Relative permittivity (imaginary part)	13.658301
Conductivity (S/m)	1.402220
Variation (%)	2.570000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	LTE band 25(1 RB#0)

SURFACE SAR

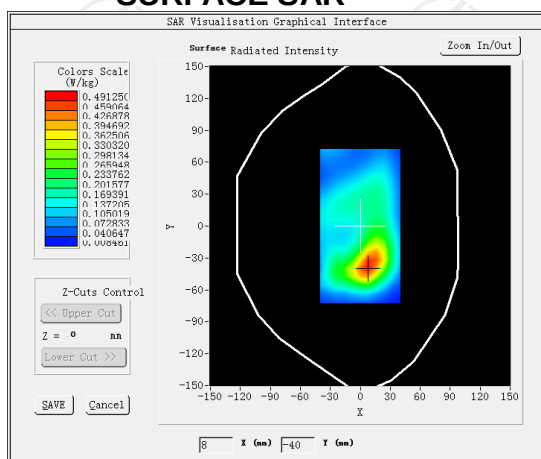


VOLUME SAR

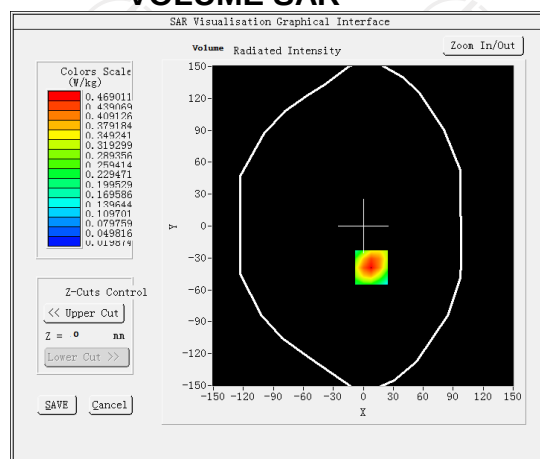


Maximum location: X=8.00, Y=-39.00 SAR Peak: 0.69 W/kg


SAR 10g (W/Kg)	0.256456
SAR 1g (W/Kg)	0.442655

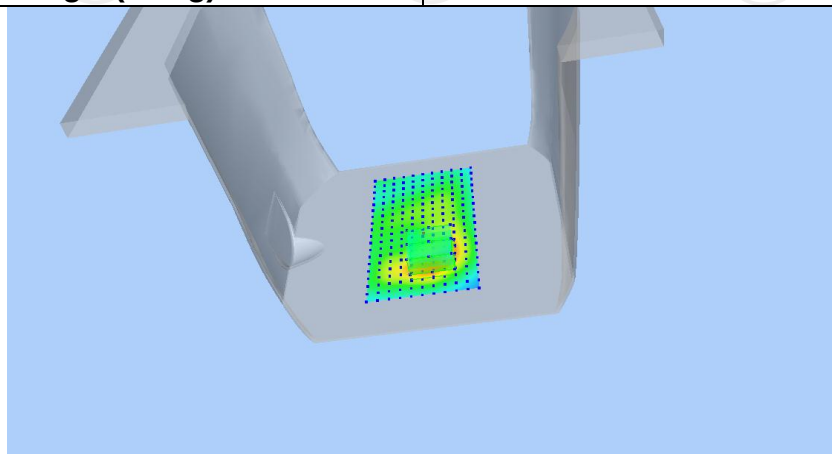

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6918	0.4690	0.2827	0.1699	0.1032

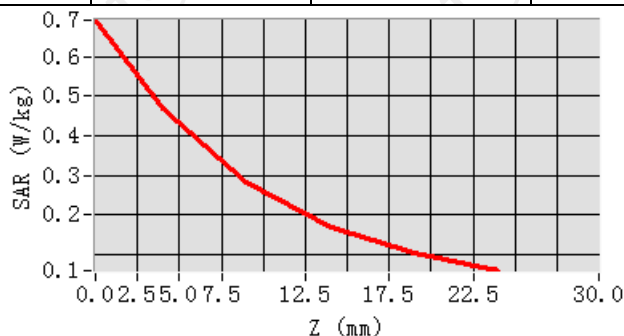

Hot spot position

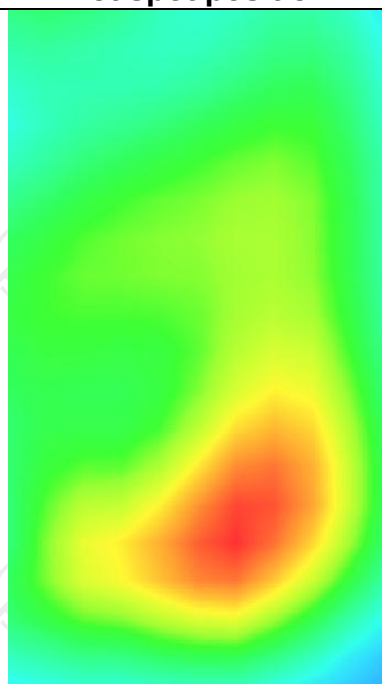

MEASUREMENT 3


Middle Band SAR (Channel 26140):

Date: 10/29/2024


Frequency (MHz)	1860.000000
Relative permittivity (real part)	39.262443
Relative permittivity (imaginary part)	13.658301
Conductivity (S/m)	1.402220
Variation (%)	-3.400000
Crest Factor	1.0
Probe Conversion factor	2.23
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back((hotspot 10mm)
Band	LTE band 25(1 RB#0)

SURFACE SAR

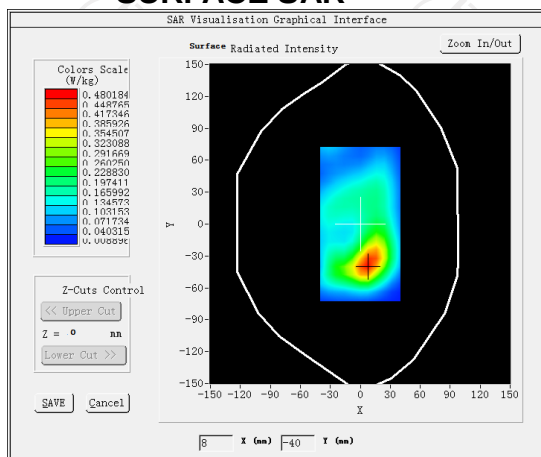


VOLUME SAR

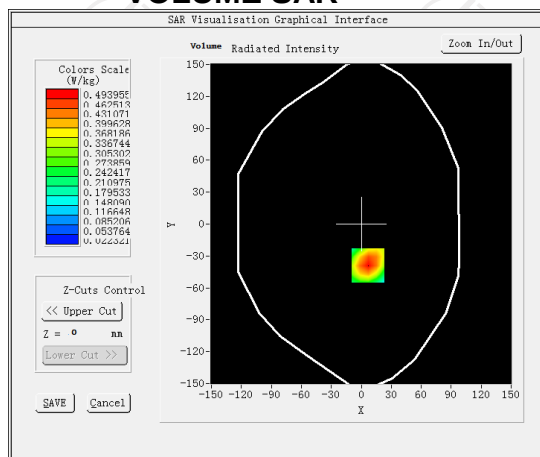


Maximum location: X=7.00, Y=-39.00 SAR Peak: 0.73 W/kg


SAR 10g (W/Kg)	0.270050
SAR 1g (W/Kg)	0.465273

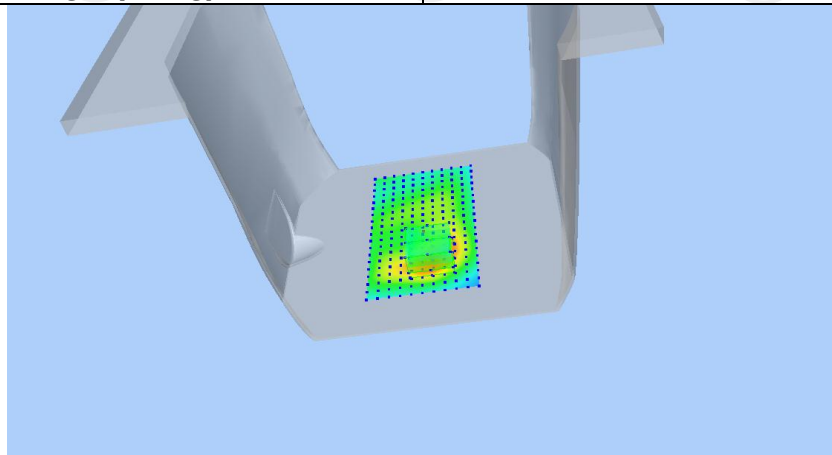

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7275	0.4940	0.2989	0.1808	0.1112

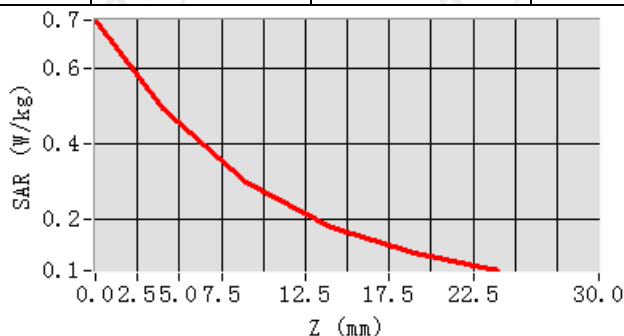

Hot spot position

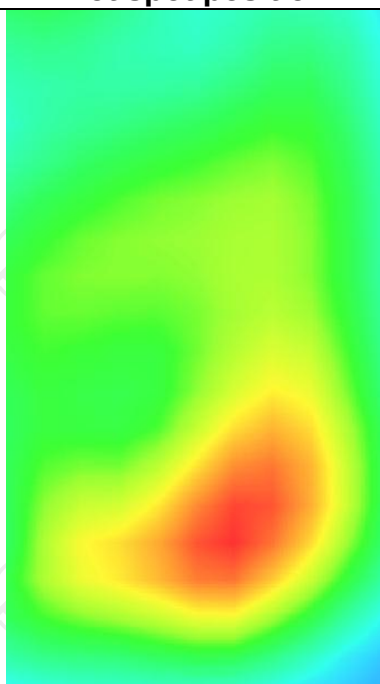

LTE Band 26-1


MEASUREMENT 1

Middle Band SAR (Channel 26740):


Date: 10/17/2024

Frequency (MHz)	819.000000
Relative permittivity (real part)	40.633298
Relative permittivity (imaginary part)	19.894406
Conductivity (S/m)	0.918279
Variation (%)	-2.300000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 26-1(1 RB#0)</u>

SURFACE SAR

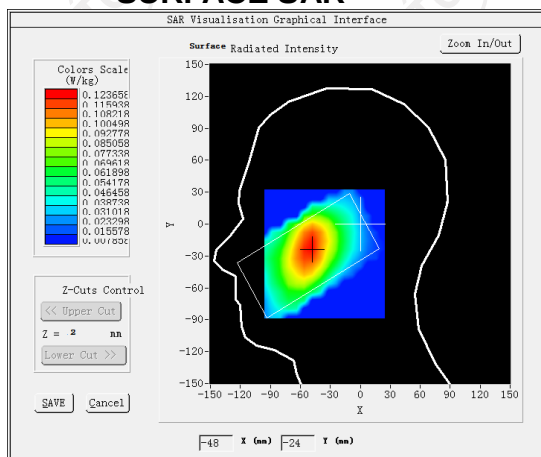


VOLUME SAR

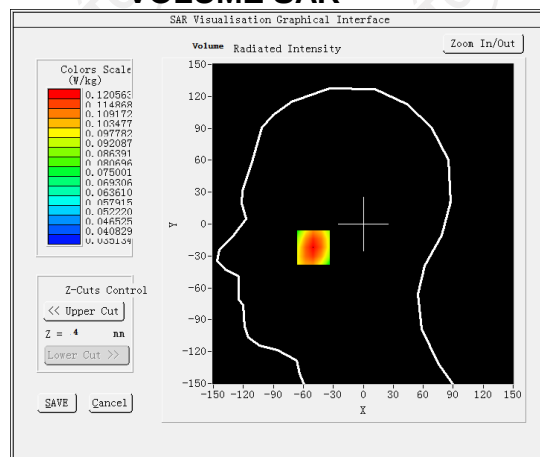


Maximum location: X=-50.00, Y=-22.00 SAR Peak: 0.13 W/kg


SAR 10g (W/Kg)	0.093549
SAR 1g (W/Kg)	0.116973

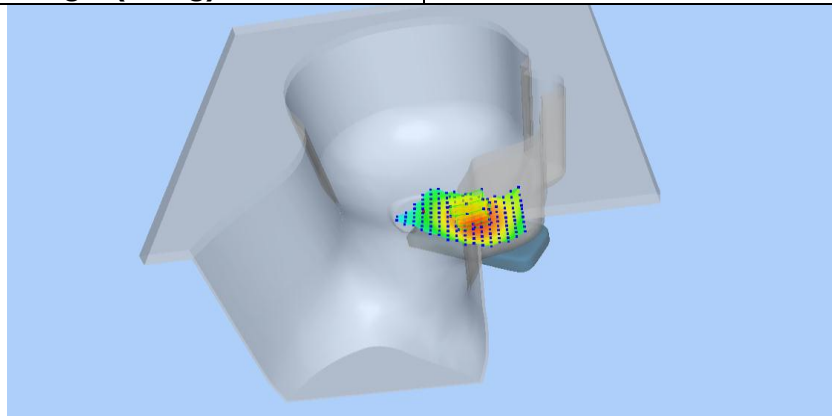

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1329	0.1206	0.1046	0.0884	0.0724

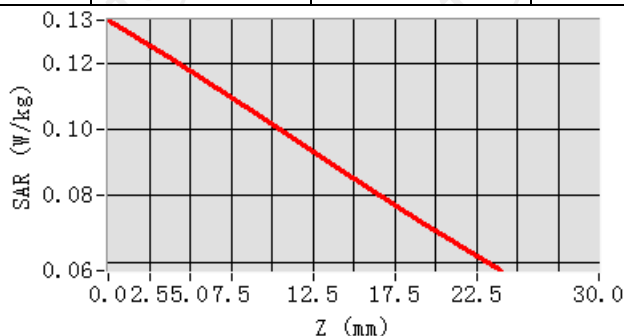

Hot spot position

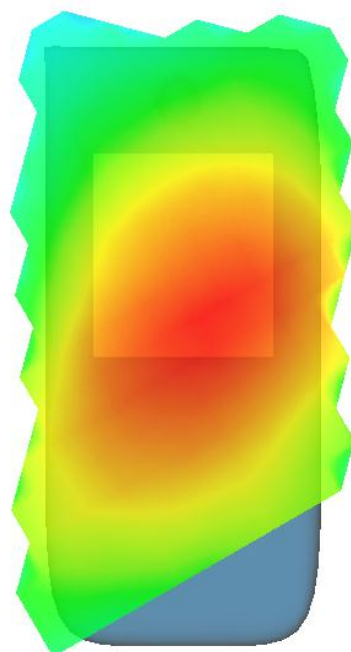

MEASUREMENT 2


Middle Band SAR (Channel 26740):

Date: 10/17/2024


Frequency (MHz)	819.000000
Relative permittivity (real part)	40.633298
Relative permittivity (imaginary part)	19.894406
Conductivity (S/m)	0.918279
Variation (%)	-4.010000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	<u>Validation plane</u>
Device Position	<u>Body back(10mm)</u>
Band	<u>LTE band 26-1(1 RB#0)</u>

SURFACE SAR

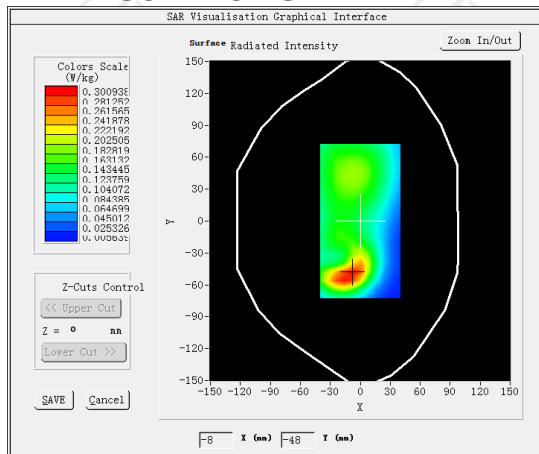


VOLUME SAR

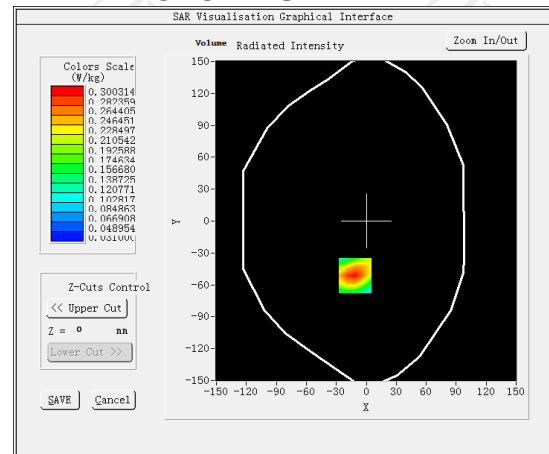


Maximum location: X=-11.00, Y=-51.00 SAR Peak: 0.45 W/kg


SAR 10g (W/Kg)	0.165504
SAR 1g (W/Kg)	0.282808

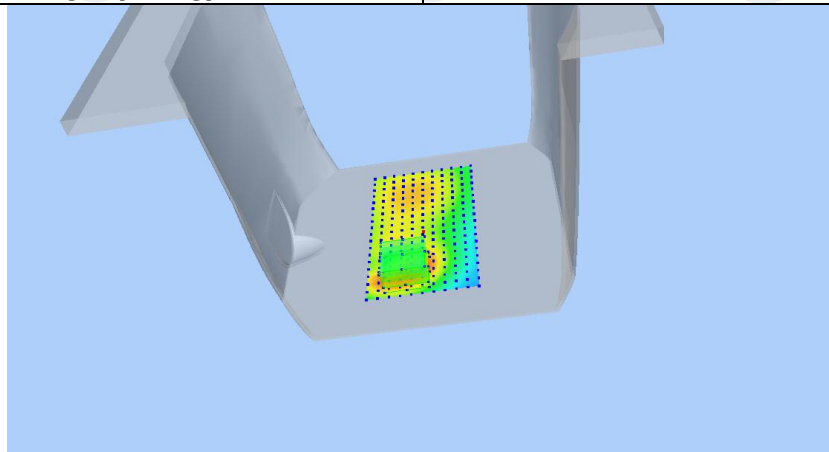

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4429	0.3003	0.1826	0.1126	0.0723

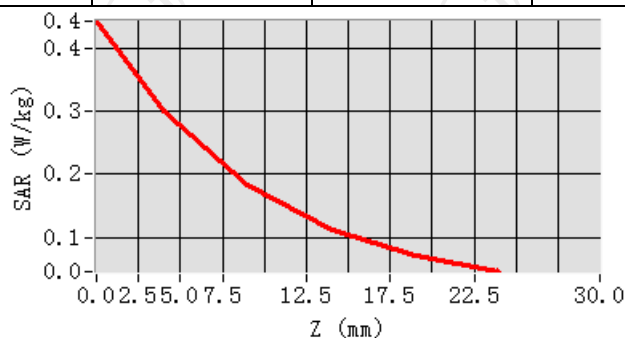



Hot spot position

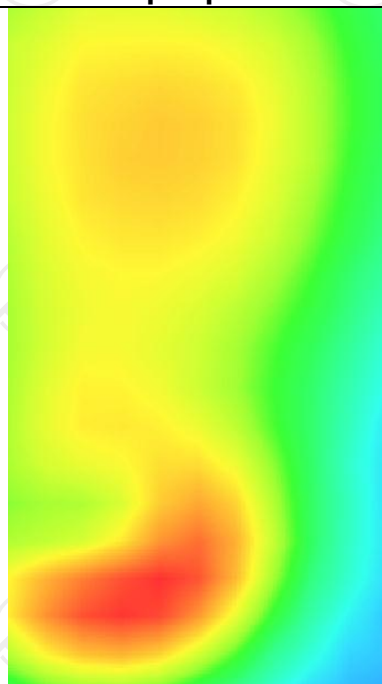


MEASUREMENT 3


Middle Band SAR (Channel 26740):

Date: 10/17/2024

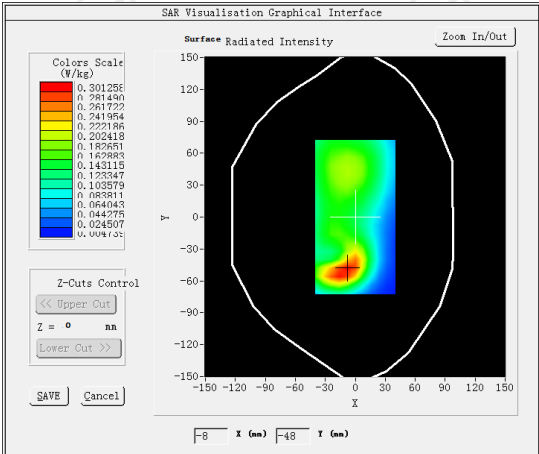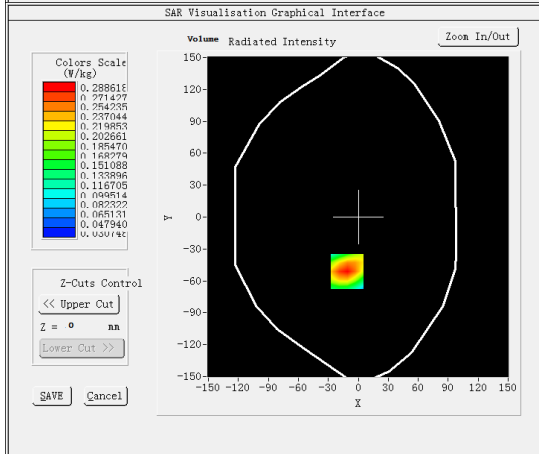
Frequency (MHz)	819.000000
Relative permittivity (real part)	40.633298
Relative permittivity (imaginary part)	19.894406
Conductivity (S/m)	0.918279
Variation (%)	-3.730000
Crest Factor	
Probe Conversion factor	
E-Field Probe:	
Area Scan	
ZoomScan	
Phantom	
Device Position	
Band	
SURFACE SAR	VOLUME SAR
	
Maximum location: X=-11.00, Y=-51.00 SAR Peak: 0.43 W/kg	
SAR 10g (W/Kg)	0.160583
SAR 1g (W/Kg)	0.271584

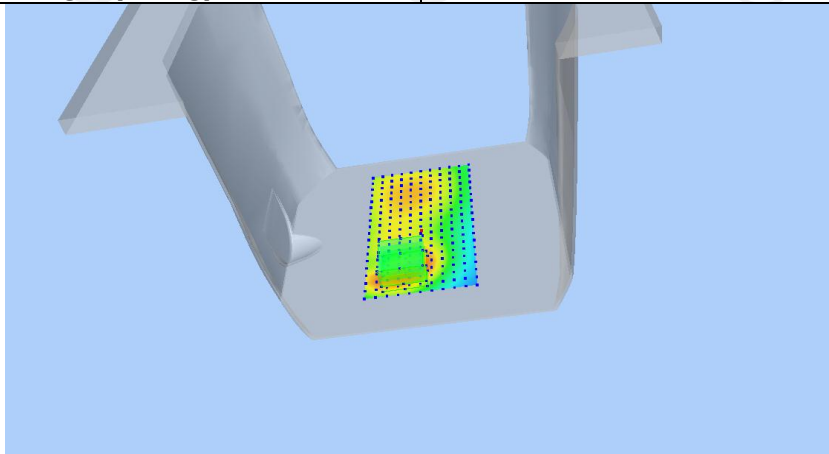

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4233	0.2886	0.1771	0.1107	0.0722

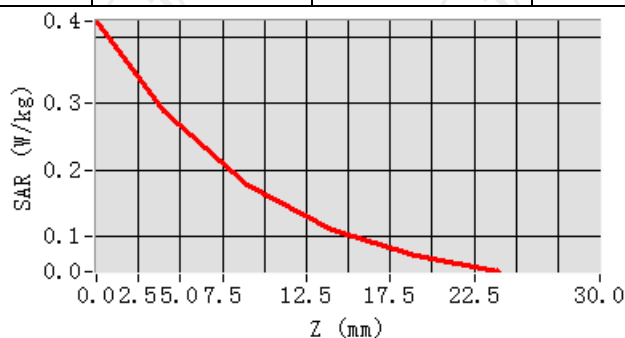

Hot spot position

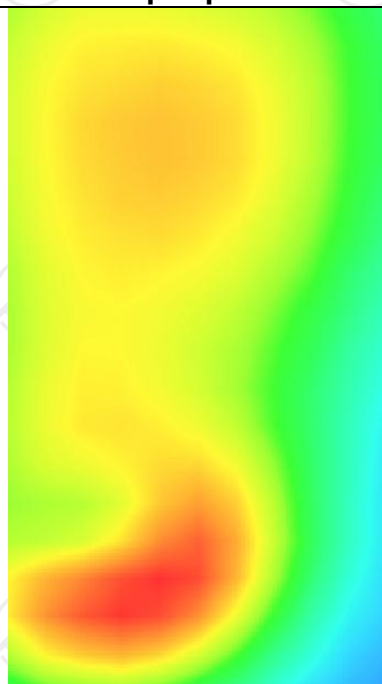

LTE Band 26-2


MEASUREMENT 1

Low Band SAR (Channel 26915):


Date: 10/17/2024

Frequency (MHz)	836.500000
Relative permittivity (real part)	40.578436
Relative permittivity (imaginary part)	19.524288
Conductivity (S/m)	0.921310
Variation (%)	-1.610000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 26-2(1 RB#38)</u>

SURFACE SAR

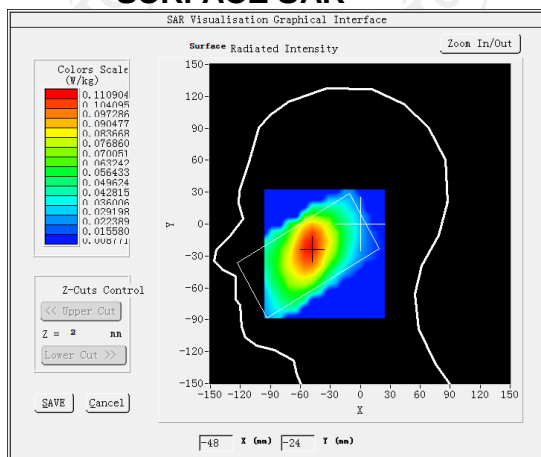

VOLUME SAR

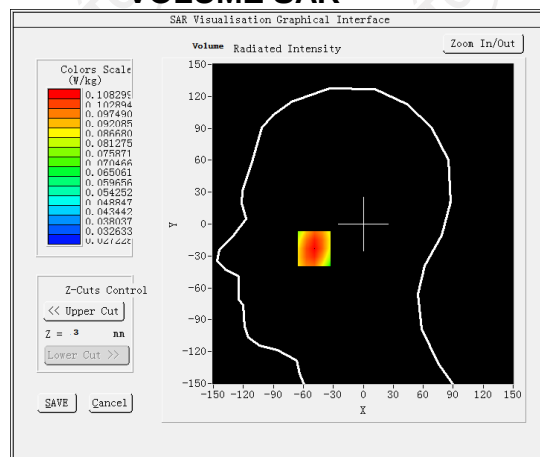


Maximum location: X=-49.00, Y=-23.00 SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)


0.086555

SAR 1g (W/Kg)


0.105916

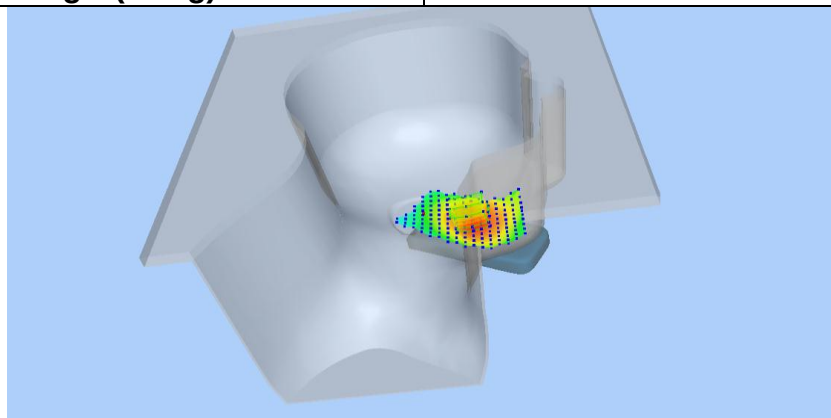

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1097	0.1083	0.1000	0.0853	0.0666

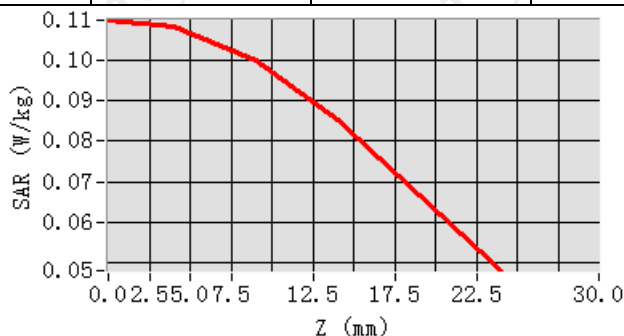

Hot spot position

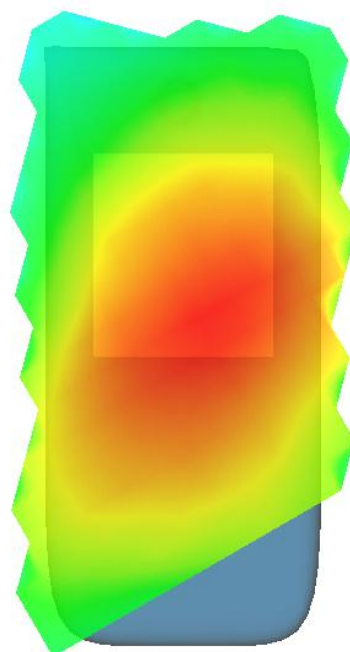

MEASUREMENT 2


Low Band SAR (Channel 26915):

Date: 10/17/2024


Frequency (MHz)	836.500000
Relative permittivity (real part)	40.578436
Relative permittivity (imaginary part)	19.524288
Conductivity (S/m)	0.921310
Variation (%)	-2.420000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	LTE band 26-2(1 RB#38)

SURFACE SAR

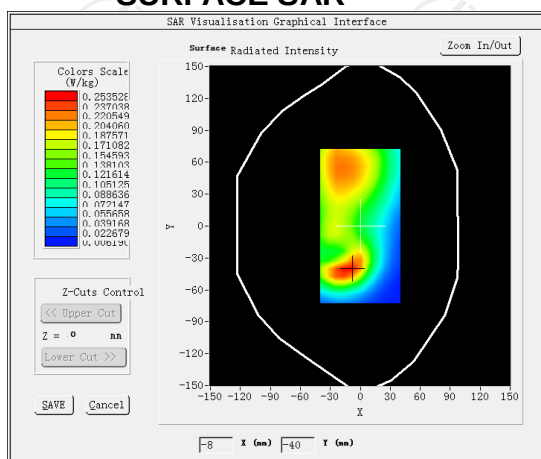

VOLUME SAR

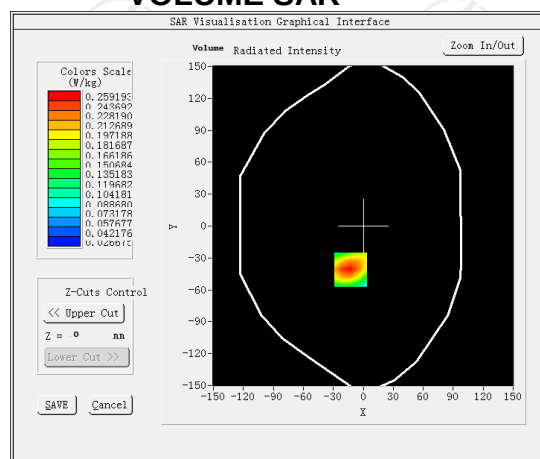


Maximum location: X=-13.00, Y=-41.00 SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)


0.142929

SAR 1g (W/Kg)


0.244576

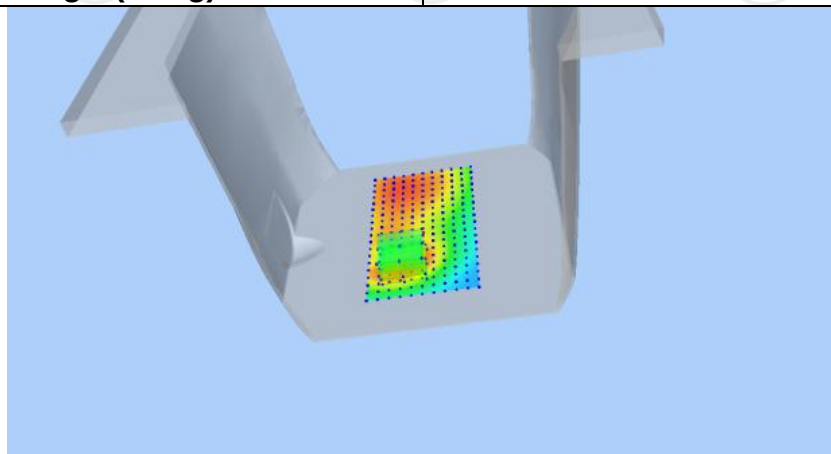

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3892	0.2592	0.1540	0.0933	0.0595

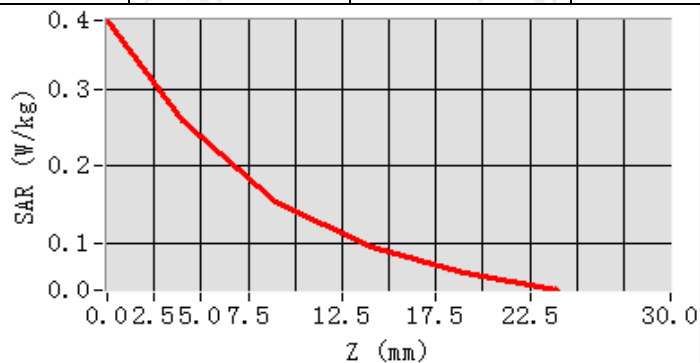

Hot spot position

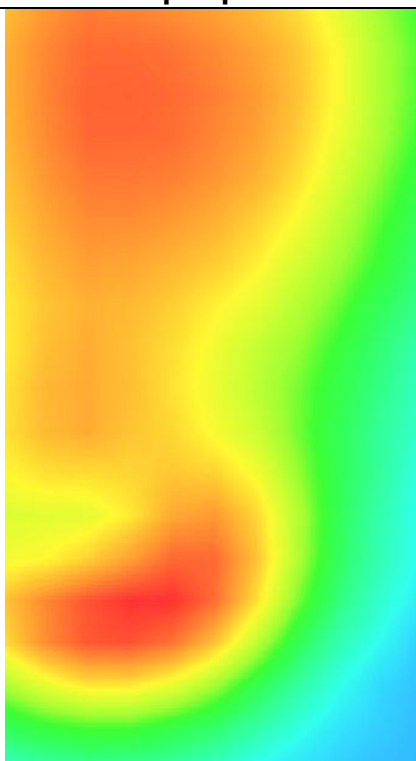

MEASUREMENT 3


Low Band SAR (Channel 26915):

Date: 10/17/2024


Frequency (MHz)	836.500000
Relative permittivity (real part)	40.578436
Relative permittivity (imaginary part)	19.524288
Conductivity (S/m)	0.921310
Variation (%)	-4.120000
Crest Factor	1.0
Probe Conversion factor	1.80
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back((hotspot 10mm)
Band	<u>LTE band 26-2(1 RB#38)</u>

SURFACE SAR

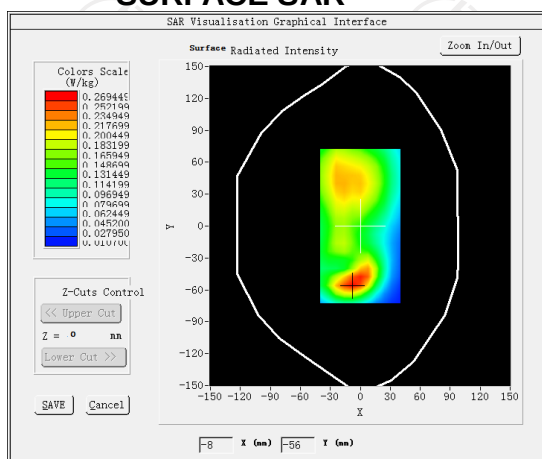


VOLUME SAR

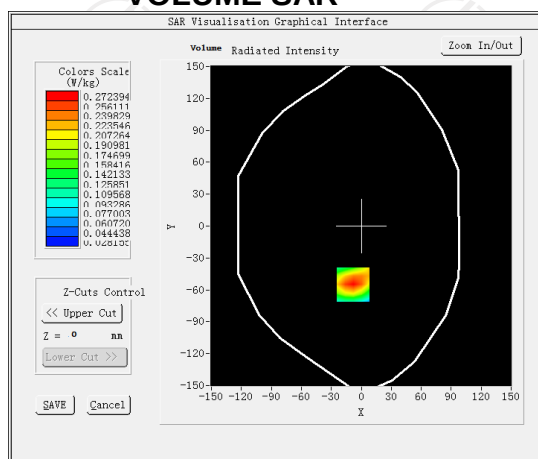


Maximum location: X=-8.00, Y=-55.00 SAR Peak: 0.41 W/kg


SAR 10g (W/Kg)	0.148932
SAR 1g (W/Kg)	0.256820

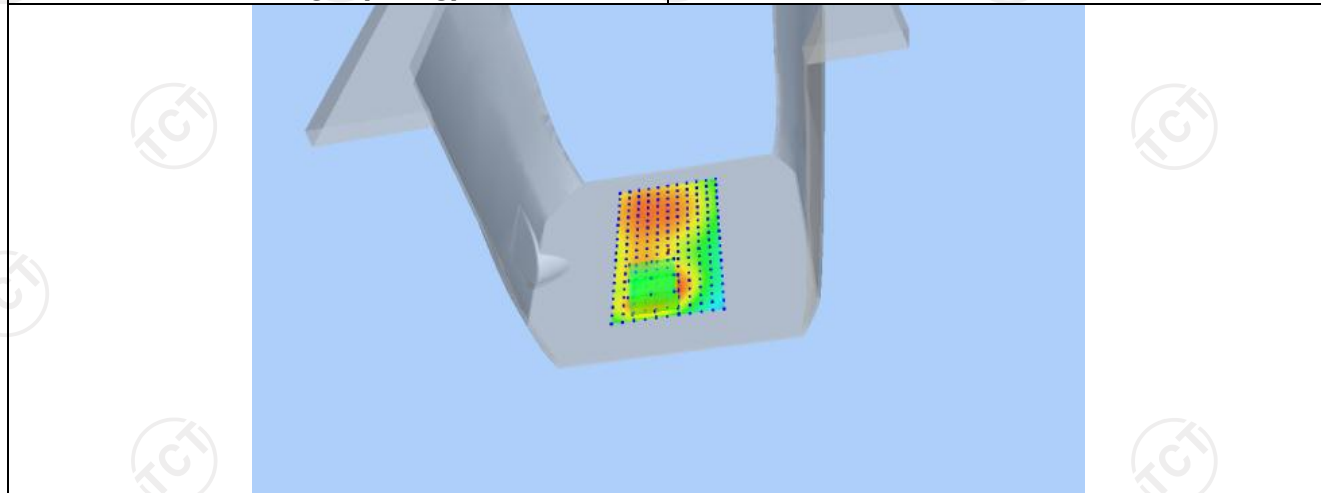

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4096	0.2724	0.1619	0.0987	0.0638

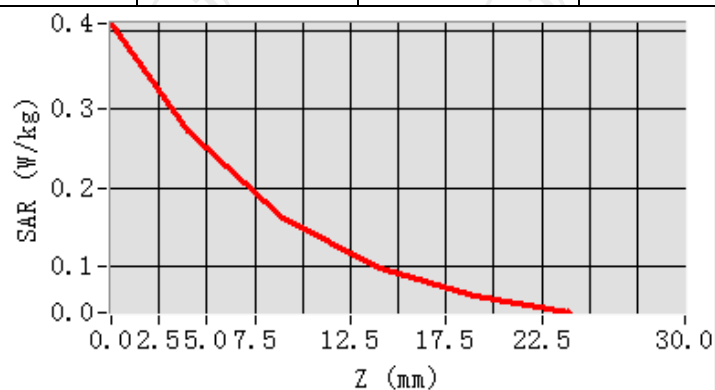

Hot spot position

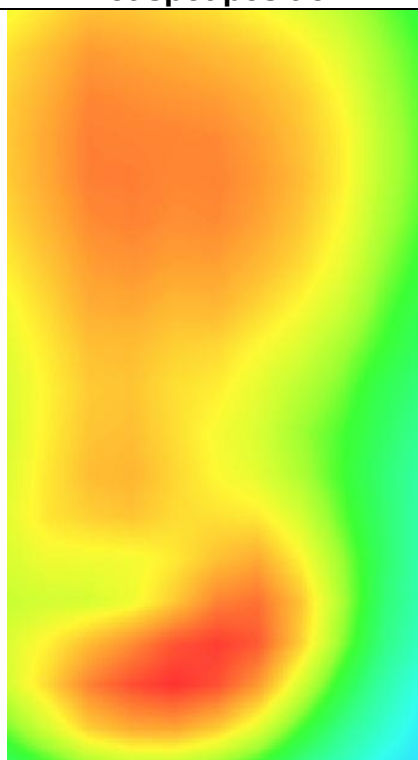

LTE Band 41


MEASUREMENT 1

Middle Band SAR (Channel 39750):


Date: 11/07/2024

Frequency (MHz)	2506.000000
Relative permittivity (real part)	38.168264
Relative permittivity (imaginary part)	13.070311
Conductivity (S/m)	1.822482
Variation (%)	-0.480000
Crest Factor	1.0
Probe Conversion factor	4.36
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 41(1 RB#0)</u>

SURFACE SAR

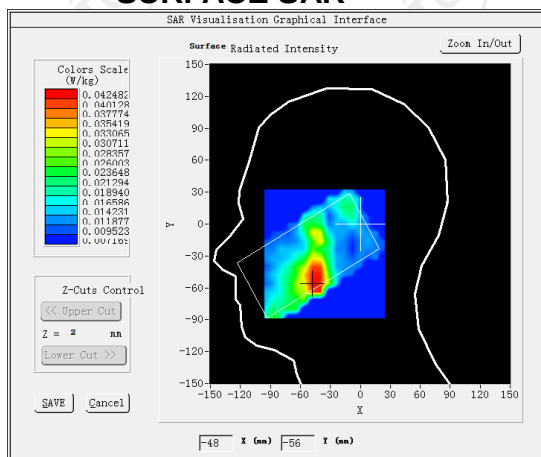

VOLUME SAR

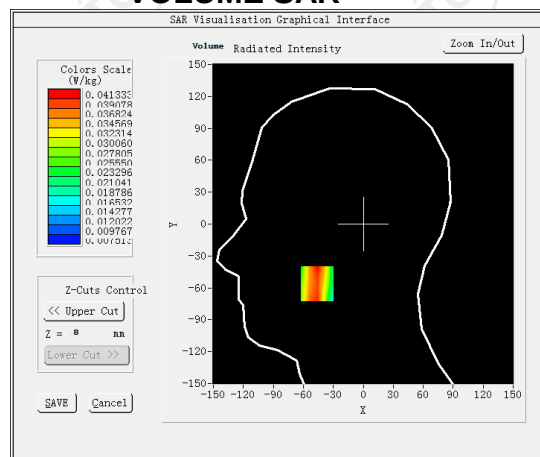


Maximum location: X=-46.00, Y=-56.00 SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)


0.026473

SAR 1g (W/Kg)


0.039853

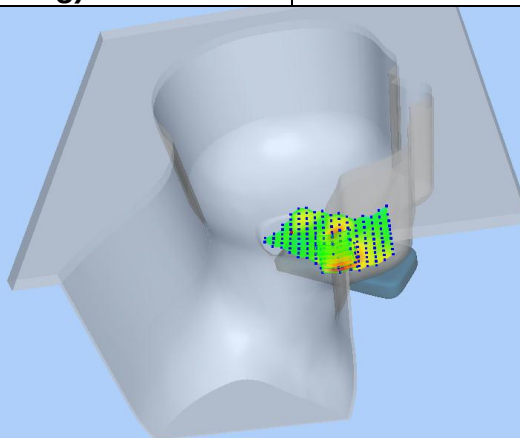

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0954	0.0413	0.0262	0.0236	0.0145

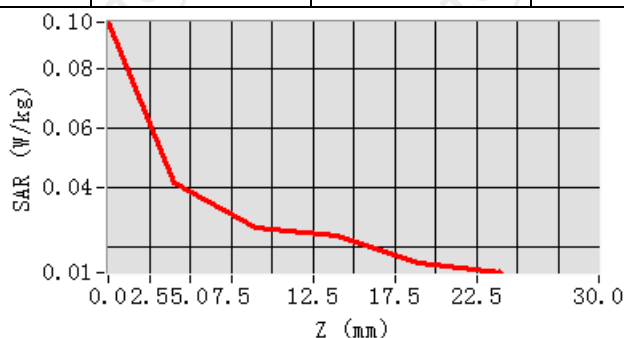

Hot spot position

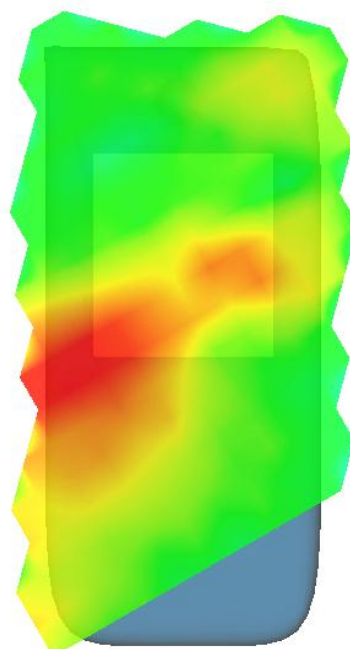


MEASUREMENT 2

Middle Band SAR (Channel 39750):


Date: 11/07/2024

Frequency (MHz)	2506.000000
Relative permittivity (real part)	38.168264
Relative permittivity (imaginary part)	13.070311
Conductivity (S/m)	1.822482
Variation (%)	-3.380000
Crest Factor	1.0
Probe Conversion factor	4.36
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	dx=12mm dy=12mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back (10mm)
Band	LTE band 41(1 RB#0)

SURFACE SAR

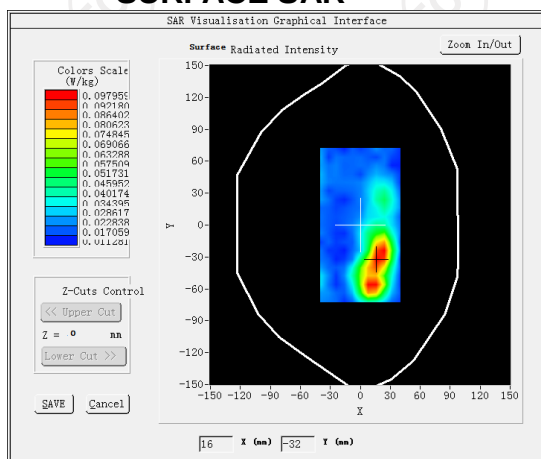

VOLUME SAR

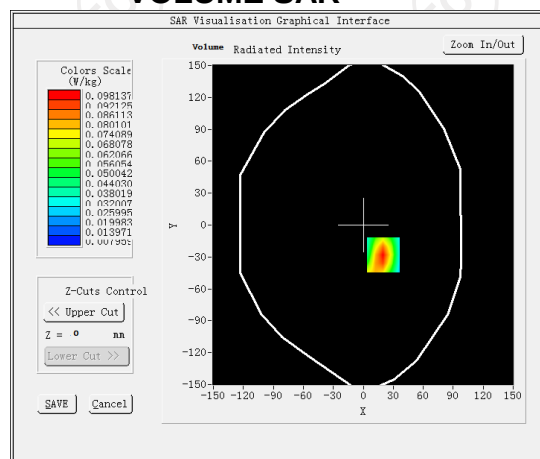


Maximum location: X=20.00, Y=-28.00 SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)


0.049376

SAR 1g (W/Kg)


0.092016

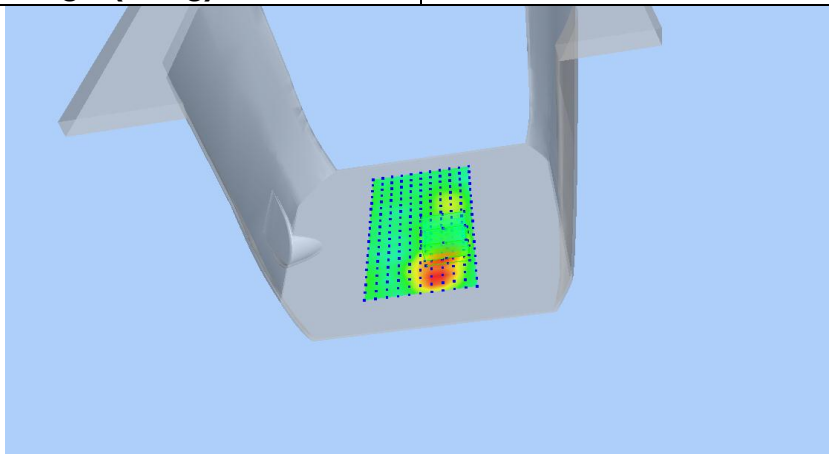

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1593	0.0981	0.0528	0.0300	0.0196

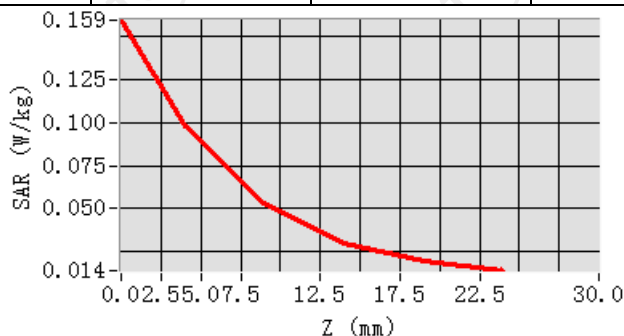

Hot spot position

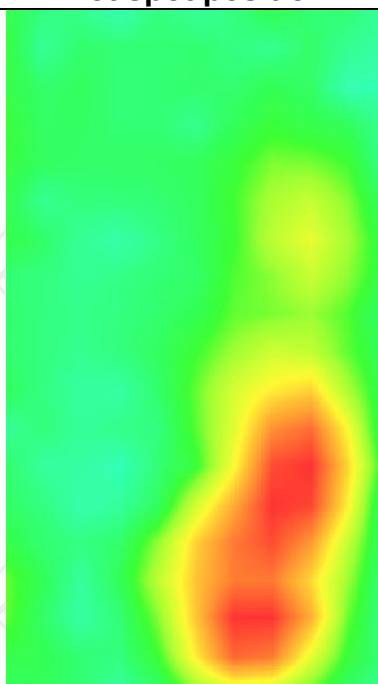

MEASUREMENT 3


Middle Band SAR (Channel 39750):

Date: 11/07/2024


Frequency (MHz)	2506.000000
Relative permittivity (real part)	38.089326
Relative permittivity (imaginary part)	12.815114
Conductivity (S/m)	1.873020
Variation (%)	-2.480000
Crest Factor	1.0
Probe Conversion factor	4.36
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back (hotspot 10mm)
Band	LTE band 41(1 RB#0)

SURFACE SAR

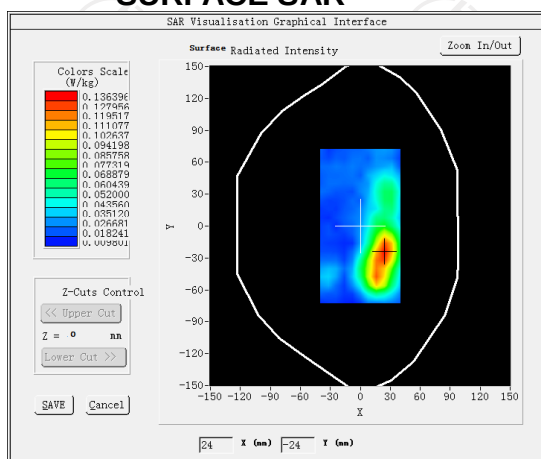

VOLUME SAR

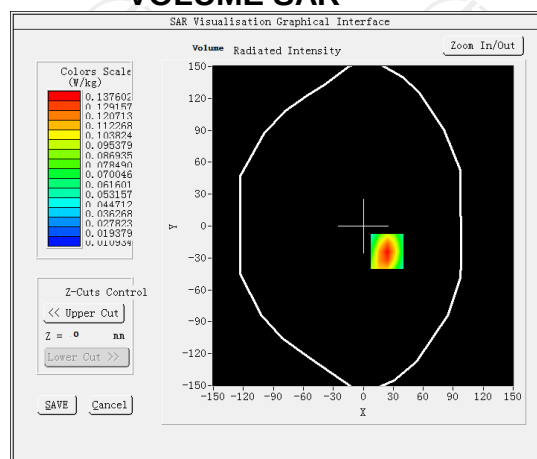


Maximum location: X=24.00, Y=-24.00 SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)


0.075612

SAR 1g (W/Kg)


0.129410

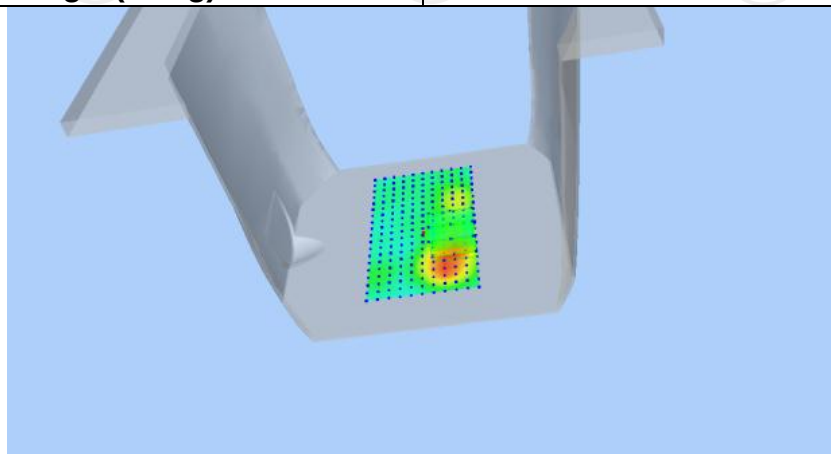

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2014	0.1376	0.0851	0.0540	0.0363

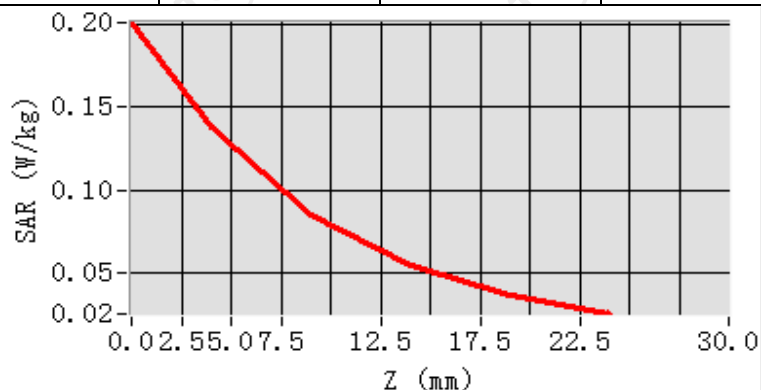

Hot spot position

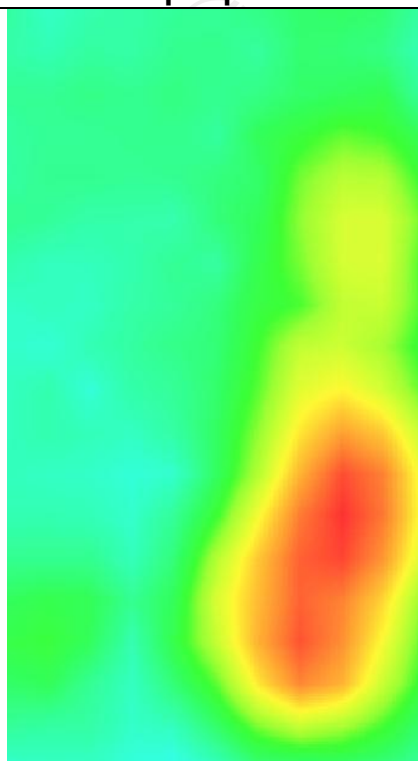


LTE Band 66


MEASUREMENT 1

High Band SAR (Channel 132572):		Date: 10/23/2024
Frequency (MHz)	1770.000000	
Relative permittivity (real part)	39.379002	
Relative permittivity (imaginary part)	14.288432	
Conductivity (S/m)	1.375196	
Variation (%)	-2.130000	
Crest Factor	1.0	
Probe Conversion factor	2.08	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Left head	
Device Position	Cheek	
Band	LTE band 66(1 RB#0)	

SURFACE SAR

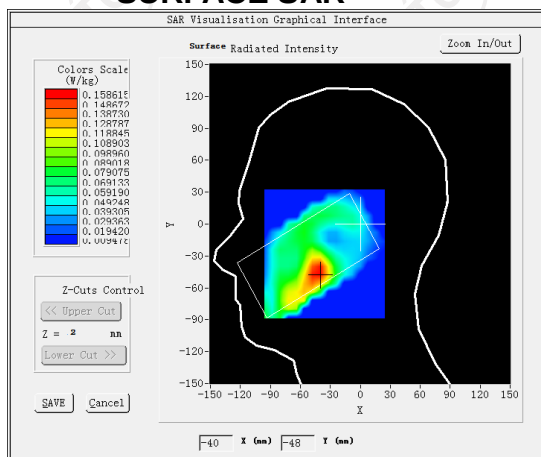

VOLUME SAR

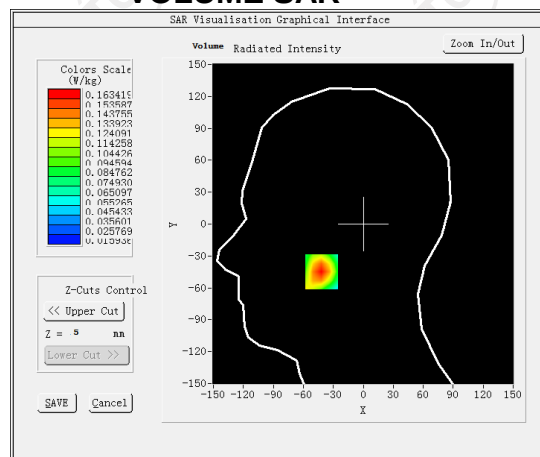


Maximum location: X=-42.00, Y=-45.00 SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)


0.095404

SAR 1g (W/Kg)


0.153524

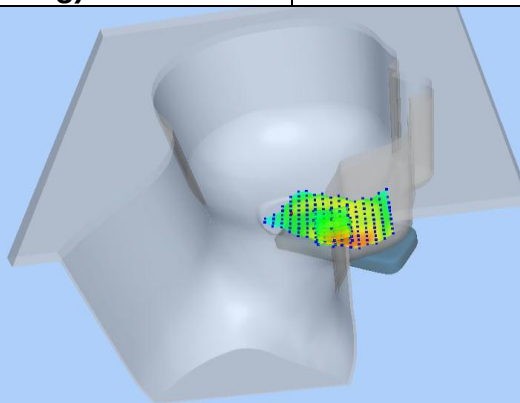

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2260	0.1634	0.1095	0.0756	0.0549

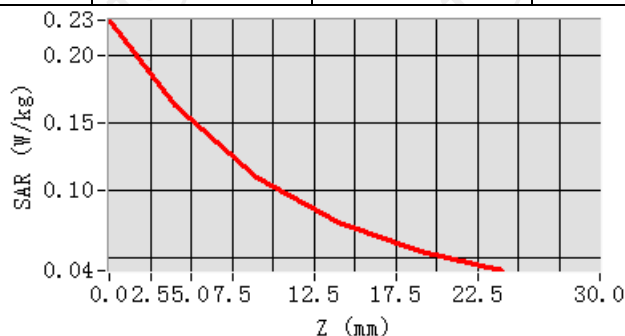

Hot spot position

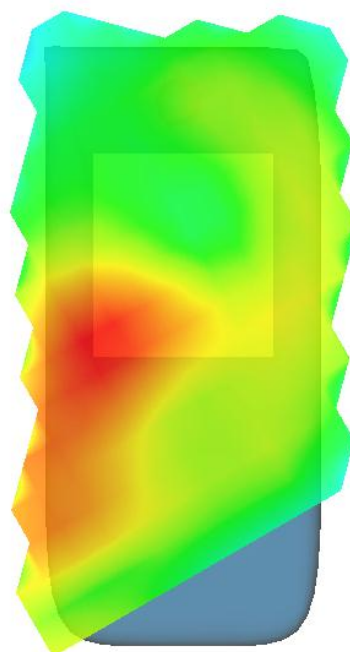

MEASUREMENT 2


High Band SAR (Channel 132572):

Date: 10/23/2024


Frequency (MHz)	1770.000000
Relative permittivity (real part)	39.379002
Relative permittivity (imaginary part)	14.288432
Conductivity (S/m)	1.375196
Variation (%)	-1.390000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	LTE band 66(1 RB#0)

SURFACE SAR

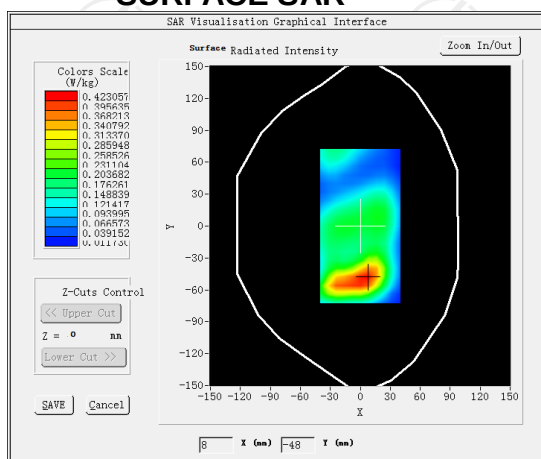


VOLUME SAR

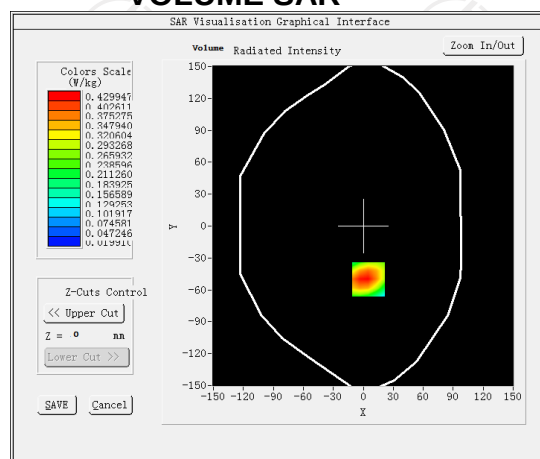


Maximum location: X=5.00, Y=-50.00 SAR Peak: 0.64 W/kg


SAR 10g (W/Kg)	0.236389
SAR 1g (W/Kg)	0.408463

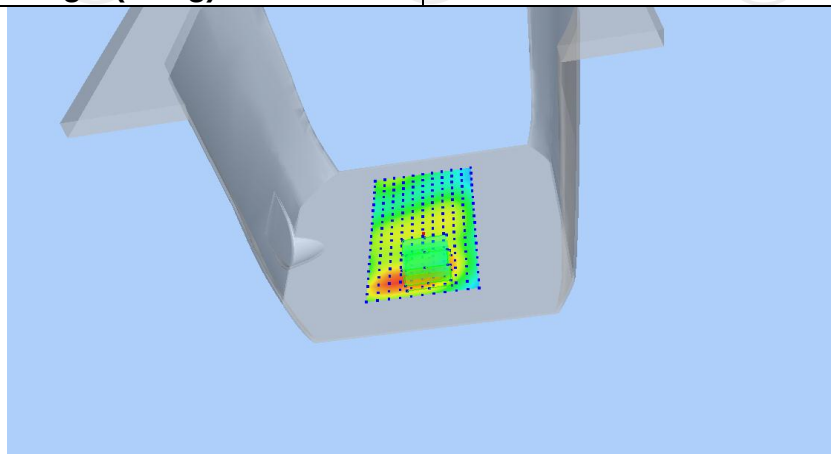



Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6375	0.4299	0.2566	0.1517	0.0900

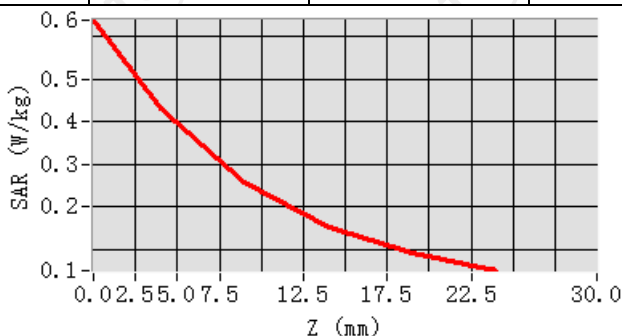


Hot spot position

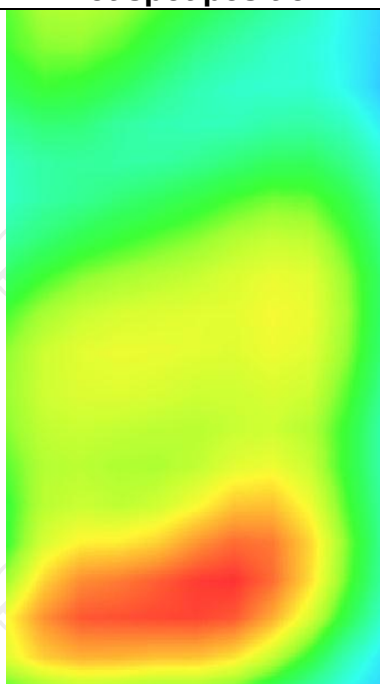


MEASUREMENT 3

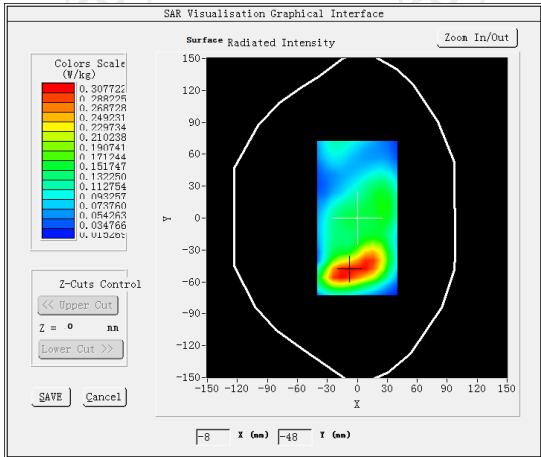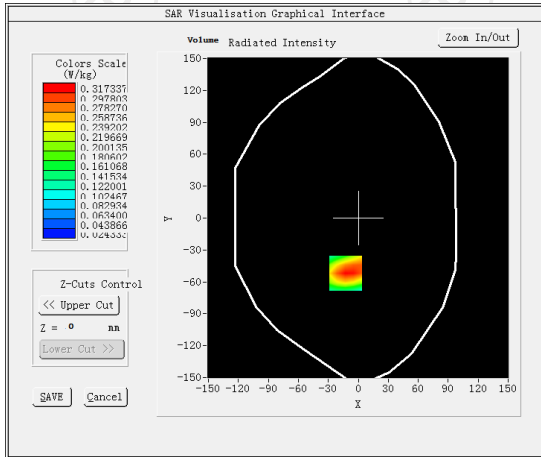
High Band SAR (Channel 132572):		Date: 10/23/2024
Frequency (MHz)	1770.000000	
Relative permittivity (real part)	39.379002	
Relative permittivity (imaginary part)	14.288432	
Conductivity (S/m)	1.375196	
Variation (%)	2.830000	
Crest Factor	1.0	
Probe Conversion factor	2.08	
E-Field Probe:	SSE2 (SN 25/22 EPG0375)	
Area Scan	dx=8mm dy=8mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm	
Phantom	Validation plane	
Device Position	Body back((hotspot10mm)	
Band	LTE band 66(1 RB#0)	
SURFACE SAR		VOLUME SAR
		
Maximum location: X=-13.00, Y=-52.00 SAR Peak: 0.47 W/kg		
SAR 10g (W/Kg)	0.177675	
SAR 1g (W/Kg)	0.301199	

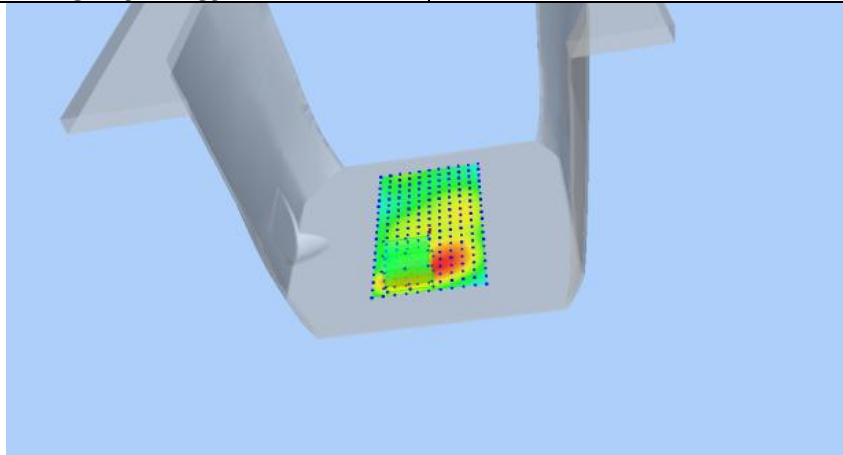

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4669	0.3173	0.1928	0.1178	0.0738

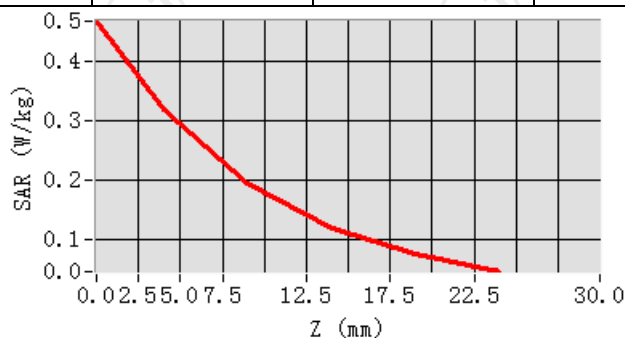

Hot spot position

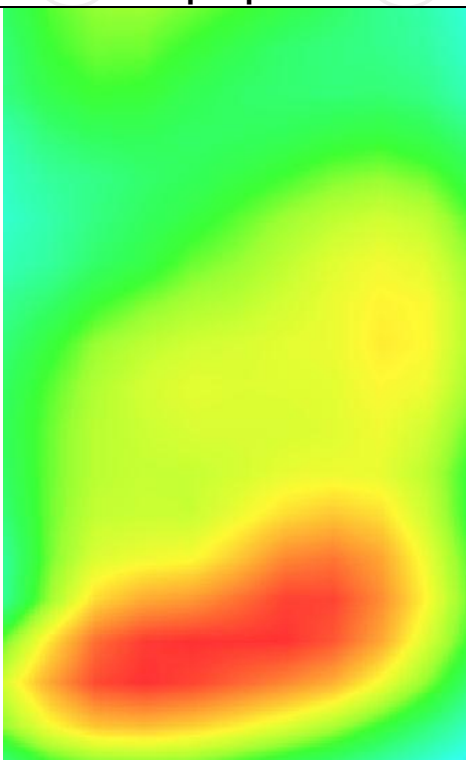

LTE Band 71


MEASUREMENT 1

High Band SAR (Channel 133222):


Date: 10/11/2024

Frequency (MHz)	673.000000
Relative permittivity (real part)	41.114346
Relative permittivity (imaginary part)	23.199212
Conductivity (S/m)	0.901086
Variation (%)	3.410000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7, dx=8mm dy=8mm</u> <u>dz=5mm, Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 71(1 RB#50)</u>

SURFACE SAR

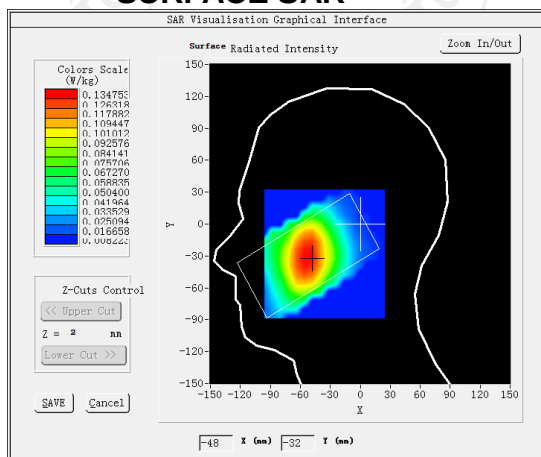


VOLUME SAR

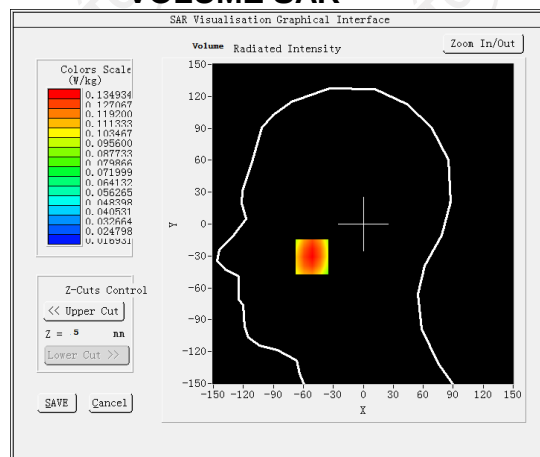


Maximum location: X=-51.00, Y=-31.00 SAR Peak: 0.15 W/kg


SAR 10g (W/Kg)	0.099970
SAR 1g (W/Kg)	0.130388

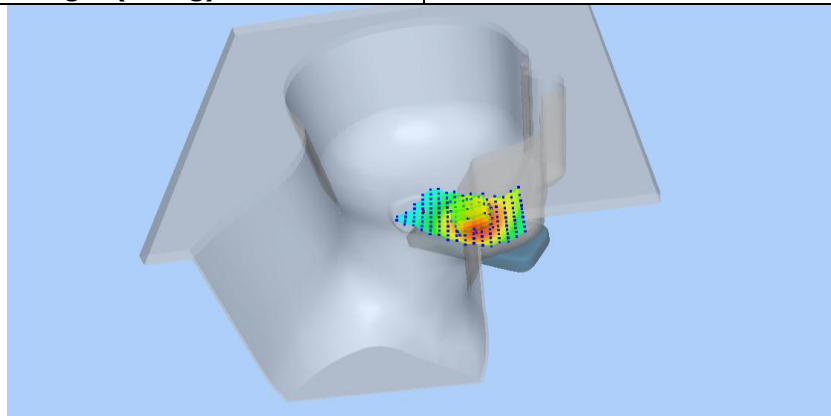

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1492	0.1349	0.1140	0.0909	0.0675

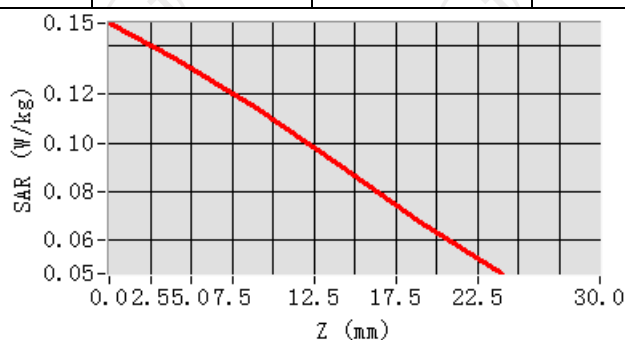

Hot spot position

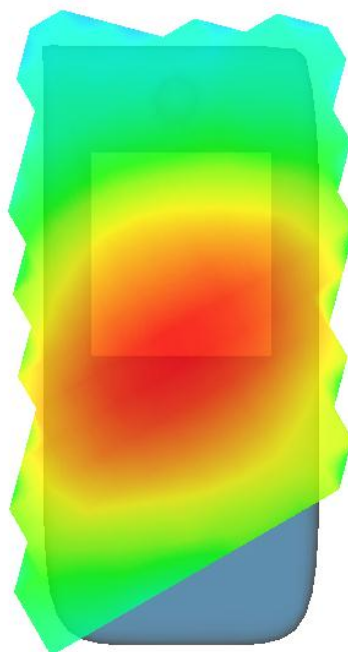

MEASUREMENT 2


High Band SAR (Channel 133222):

Date: 10/11/2024


Frequency (MHz)	673.000000
Relative permittivity (real part)	41.114346
Relative permittivity (imaginary part)	23.199212
Conductivity (S/m)	0.901086
Variation (%)	-4.620000
Crest Factor	1.0
Probe Conversion factor	1.71
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>LTE band 71(1 RB#50)</u>

SURFACE SAR

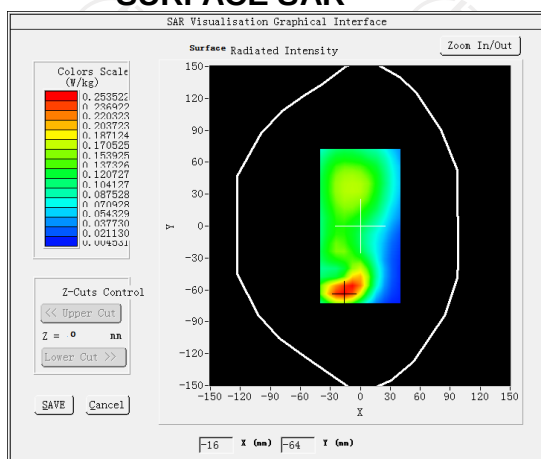

VOLUME SAR

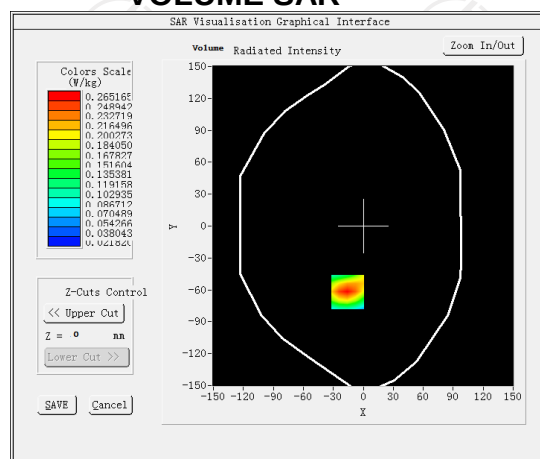


Maximum location: X=-16.00, Y=-62.00 SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)


0.140047

SAR 1g (W/Kg)


0.248096

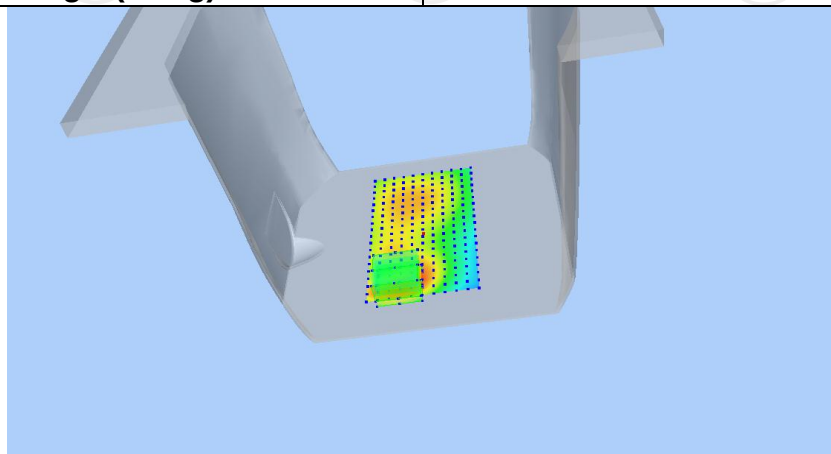

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4040	0.2652	0.1544	0.0920	0.0581

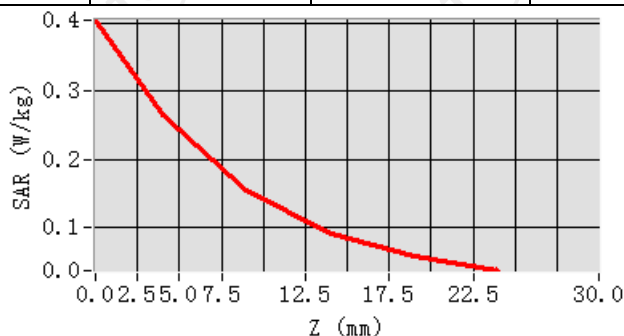

Hot spot position

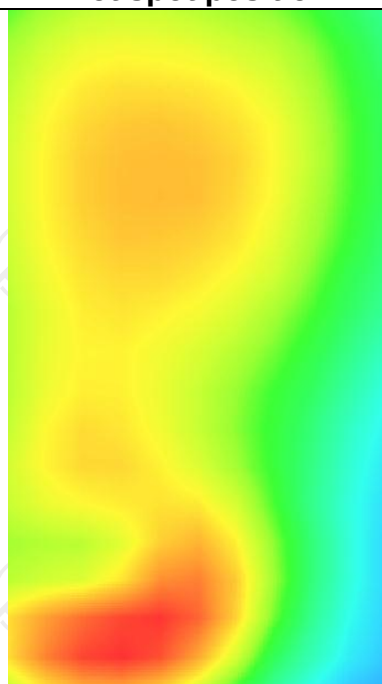


MEASUREMENT 3

High Band SAR (Channel 133222):


Date: 10/11/2024

Frequency (MHz)	673.000000
Relative permittivity (real part)	41.114346
Relative permittivity (imaginary part)	23.199212
Conductivity (S/m)	0.901086
Variation (%)	-2.470000
Crest Factor	1.0
Probe Conversion factor	2.08
E-Field Probe:	SSE2 (SN 25/22 EPGO375)
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back((hotspot10mm)
Band	LTE band 71(1 RB#50)

SURFACE SAR

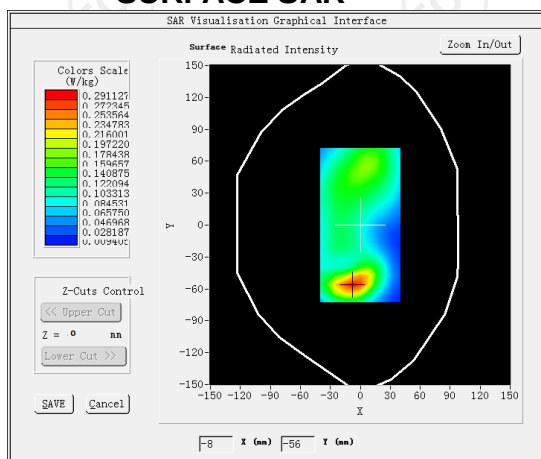


VOLUME SAR

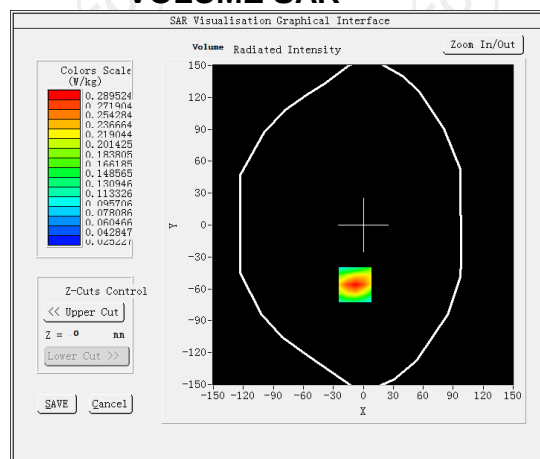


Maximum location: X=-8.00, Y=-56.00 SAR Peak: 0.43 W/kg


SAR 10g (W/Kg)	0.156812
SAR 1g (W/Kg)	0.270270

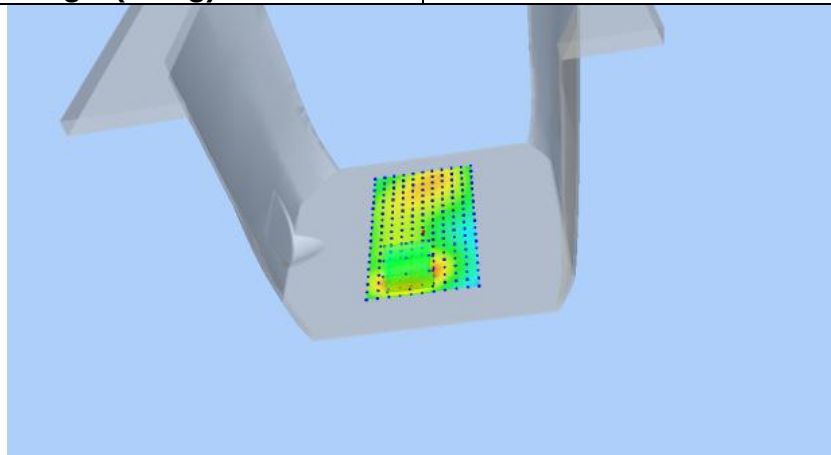

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5434	0.3849	0.2476	0.1603	0.1057

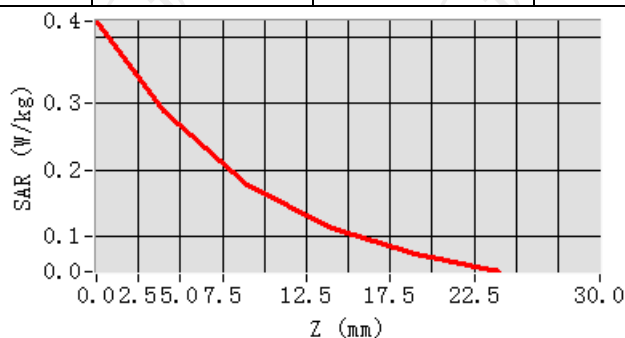

Hot spot position

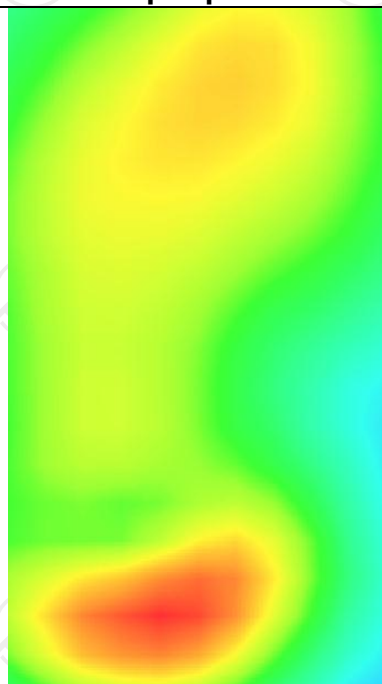

WLAN 2.4G


MEASUREMENT 1

Middle Band SAR (Channel 1):


Date: 11/01/2024

Frequency (MHz)	2412.000000
Relative permittivity (real part)	38.316442
Relative permittivity (imaginary part)	13.335300
Conductivity (S/m)	1.745256
Variation (%)	-1.810000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	dx=12mm dy=12mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11b ISM

SURFACE SAR

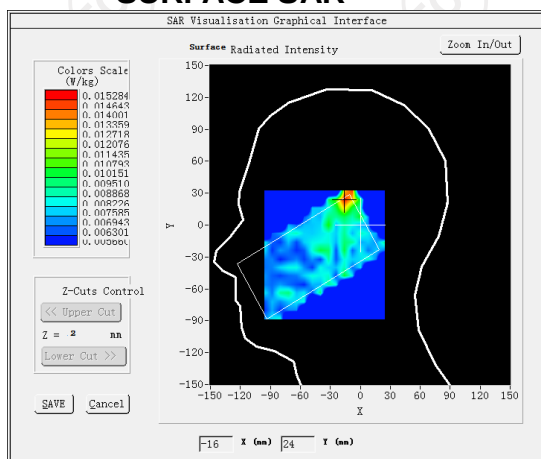

VOLUME SAR

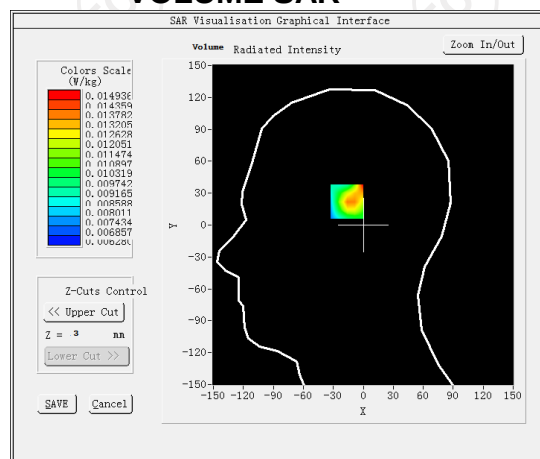


Maximum location: X=-15.00, Y=24.00 SAR Peak: 0.02 W/kg

SAR 10g (W/Kg)


0.009957

SAR 1g (W/Kg)


0.013588

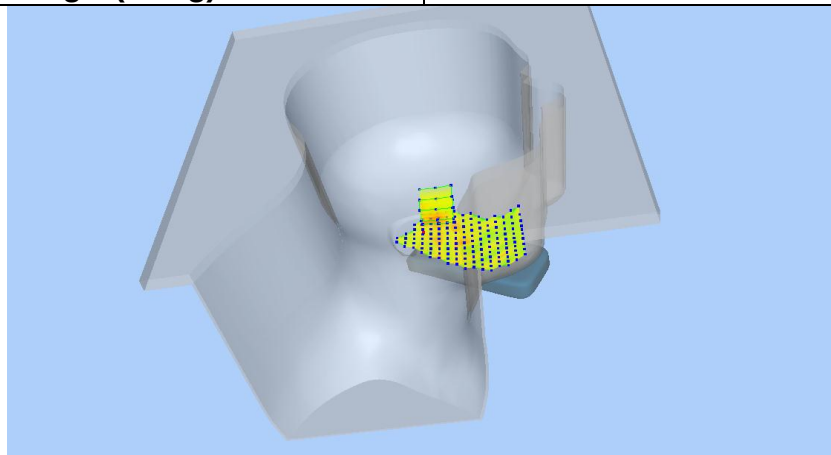

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0548	0.0149	0.0065	0.0089	0.0066

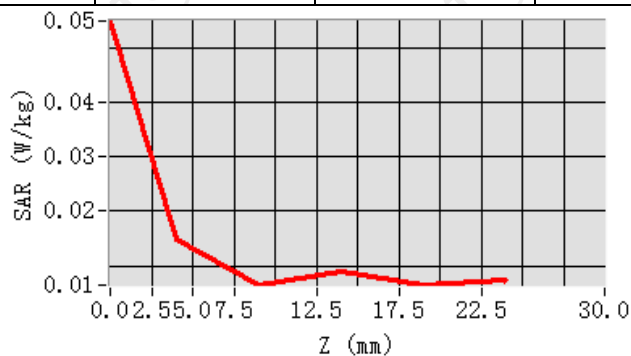

Hot spot position

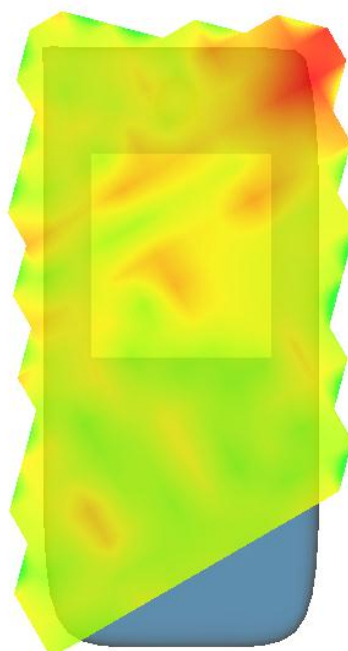

MEASUREMENT 2


Middle Band SAR (Channel 1):

Date: 11/01/2024


Frequency (MHz)	2412.000000
Relative permittivity (real part)	38.316442
Relative permittivity (imaginary part)	13.335300
Conductivity (S/m)	1.745256
Variation (%)	-2.560000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11b ISM</u>

SURFACE SAR

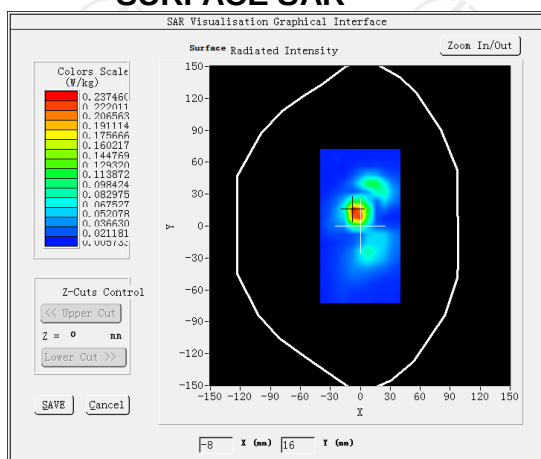


VOLUME SAR

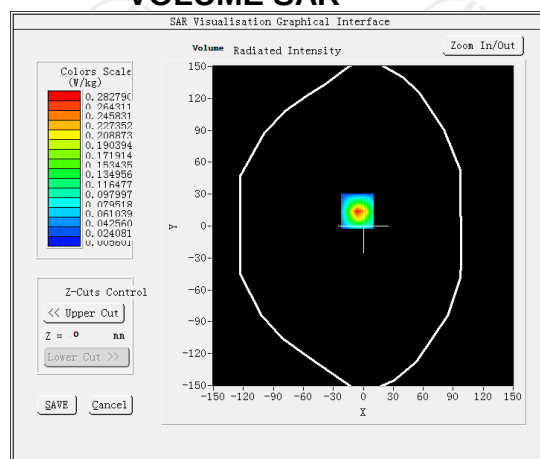


Maximum location: X=-6.00, Y=14.00 SAR Peak: 0.39 W/kg


SAR 10g (W/Kg)	0.121044
SAR 1g (W/Kg)	0.251581

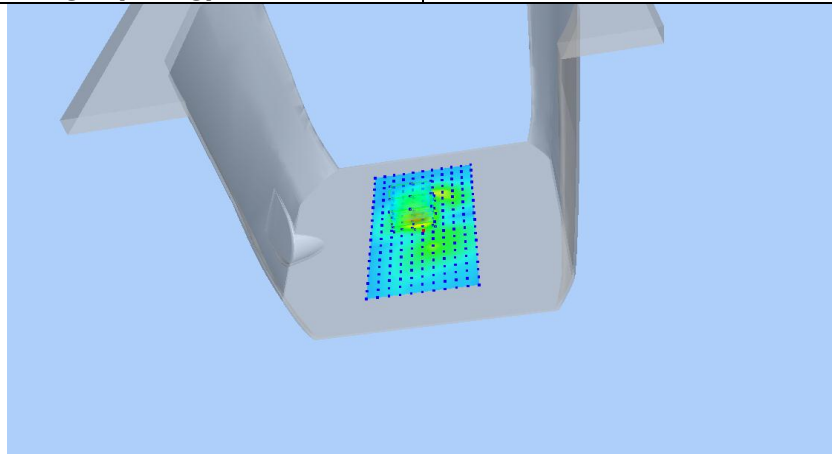

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3797	0.2828	0.1881	0.1180	0.0677

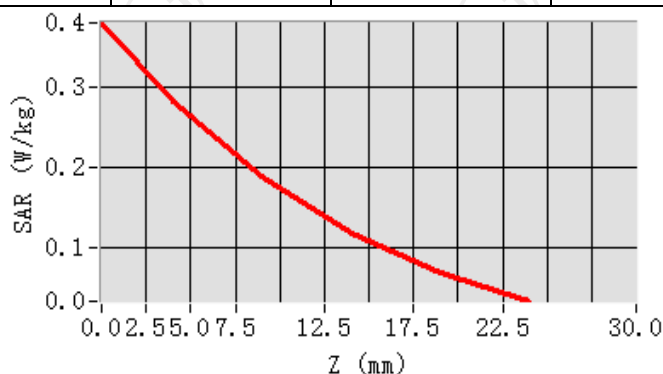

Hot spot position

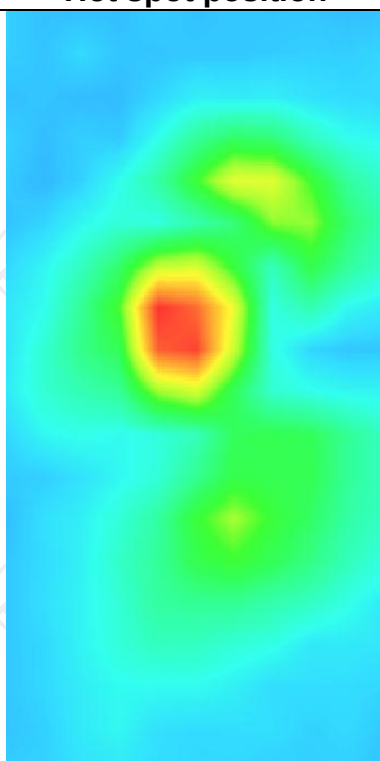

MEASUREMENT 3


Middle Band SAR (Channel 1):

Date: 11/01/2024


Frequency (MHz)	2412.000000
Relative permittivity (real part)	38.316442
Relative permittivity (imaginary part)	13.335300
Conductivity (S/m)	1.745256
Variation (%)	-1.690000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	<u>IEEE 802.11b ISM(hotspot)</u>

SURFACE SAR

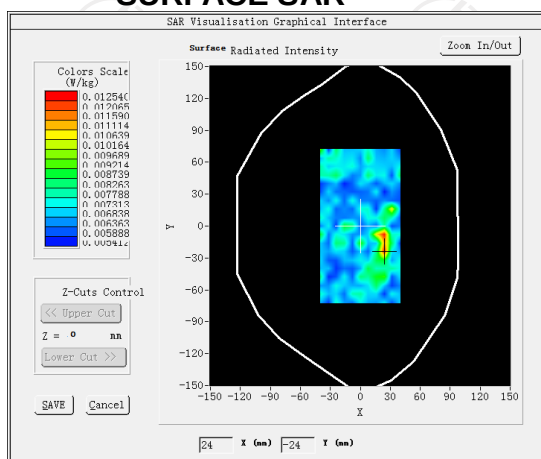


VOLUME SAR

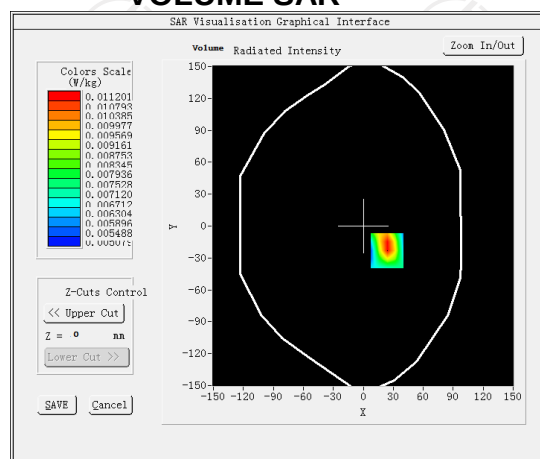


Maximum location: X=24.00, Y=-23.00 SAR Peak: 0.02 W/kg


SAR 10g (W/Kg)	0.008057
SAR 1g (W/Kg)	0.011240

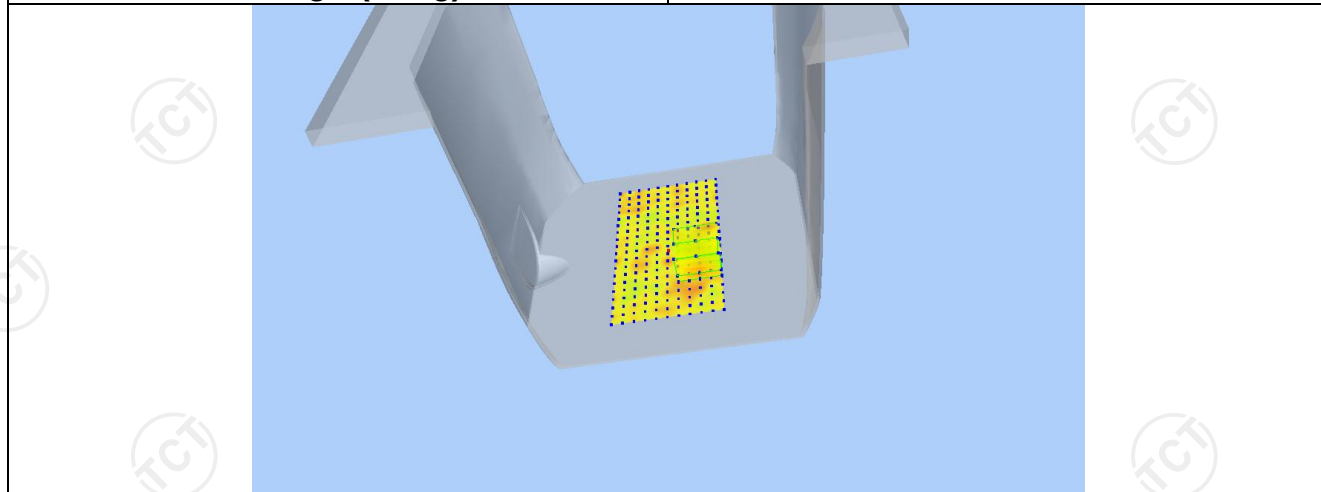

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0168	0.0112	0.0072	0.0055	0.0053

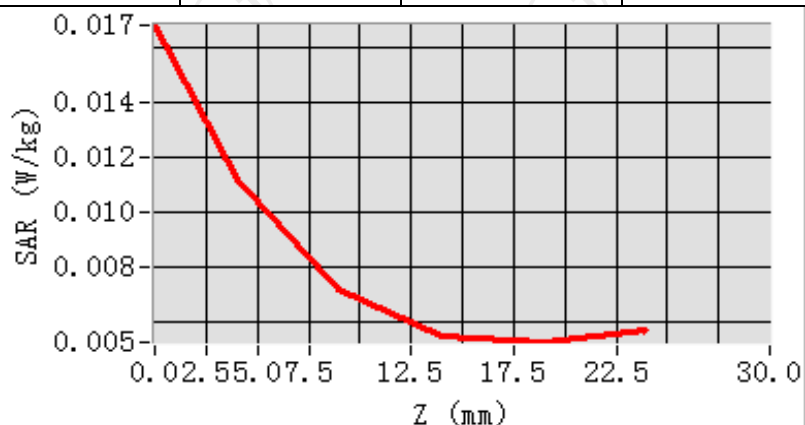

Hot spot position

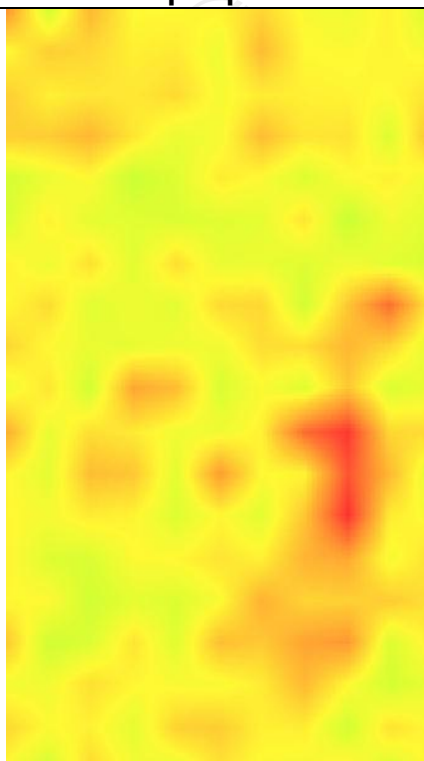

Bluetooth


MEASUREMENT 1

Middle Band SAR (Channel 39):


Date: 11/04/2024

Frequency (MHz)	2441.000000
Relative permittivity (real part)	38.266300
Relative permittivity (imaginary part)	13.334269
Conductivity (S/m)	1.764374
Variation (%)	-2.930000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	dx=12mm dy=12mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	Bluetooth

SURFACE SAR

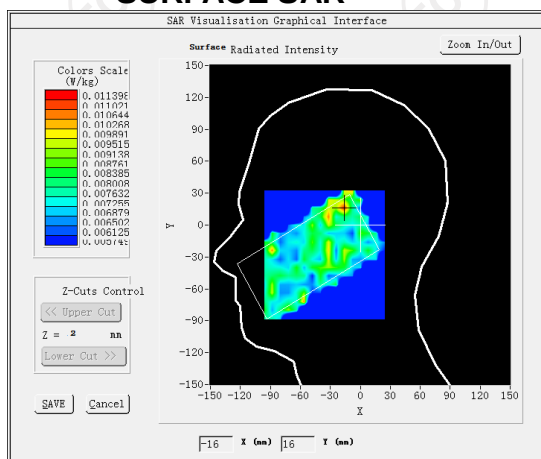

VOLUME SAR

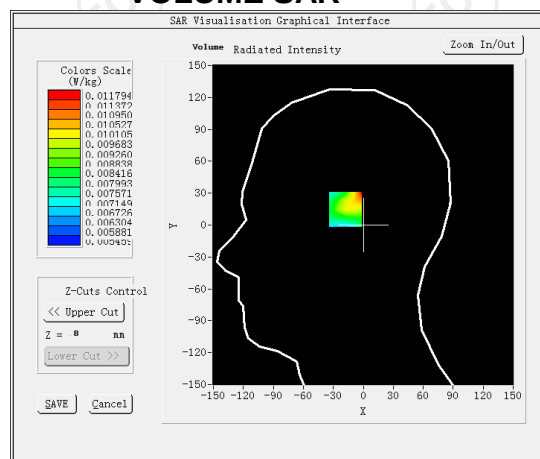


Maximum location: X=-16.00, Y=16.00 SAR Peak: 0.02 W/kg

SAR 10g (W/Kg)


0.008369

SAR 1g (W/Kg)


0.011018

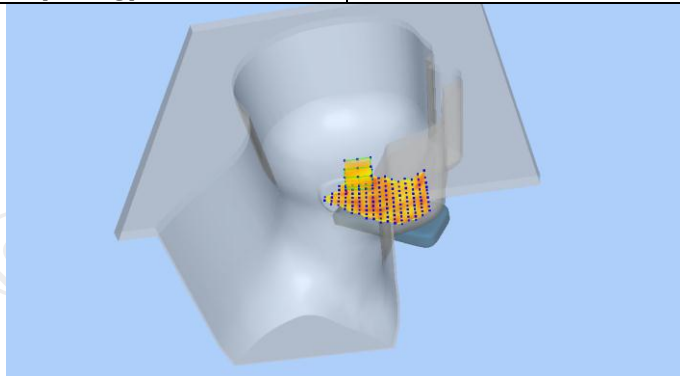

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0067	0.0118	0.0082	0.0055	0.0076

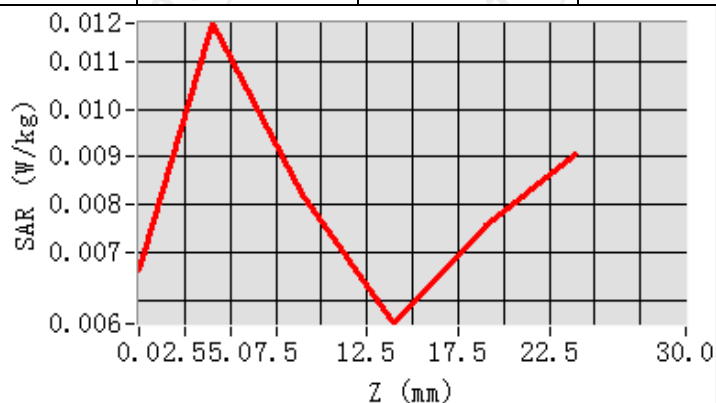

Hot spot position

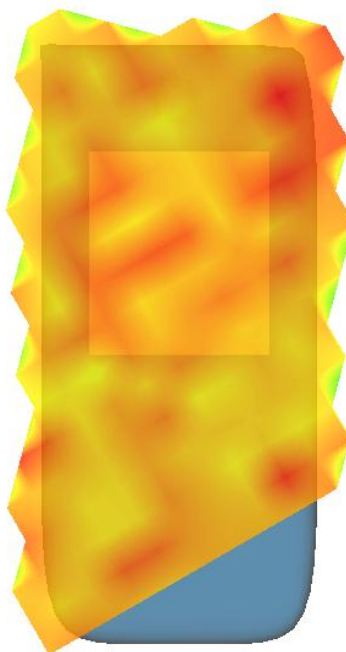

MEASUREMENT 2


Middle Band SAR (Channel 39):

Date: 11/04/2024


Frequency (MHz)	2441.000000
Relative permittivity (real part)	38.266300
Relative permittivity (imaginary part)	13.334269
Conductivity (S/m)	1.764374
Variation (%)	-0.490000
Crest Factor	1.0
Probe Conversion factor	2.31
E-Field Probe:	SSE2 (SN 25/22 EPG0375)
Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm</u> <u>dz=5mm,Complete/ndx=8mm dy=8mm, h=</u> <u>5.00 mm</u>

Phantom	Validation plane
Device Position	Body back(10mm)
Band	Bluetooth

SURFACE SAR

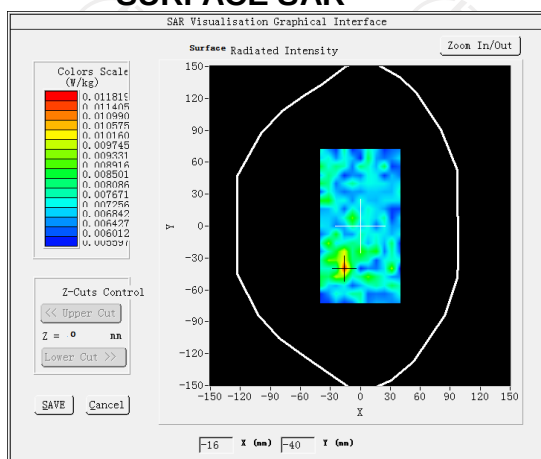


VOLUME SAR

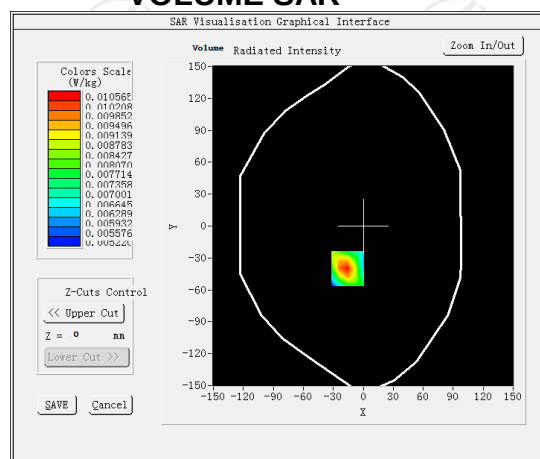


Maximum location: X=-16.00, Y=-40.00 SAR Peak: 0.01 W/kg


SAR 10g (W/Kg)	0.008470
SAR 1g (W/Kg)	0.010221

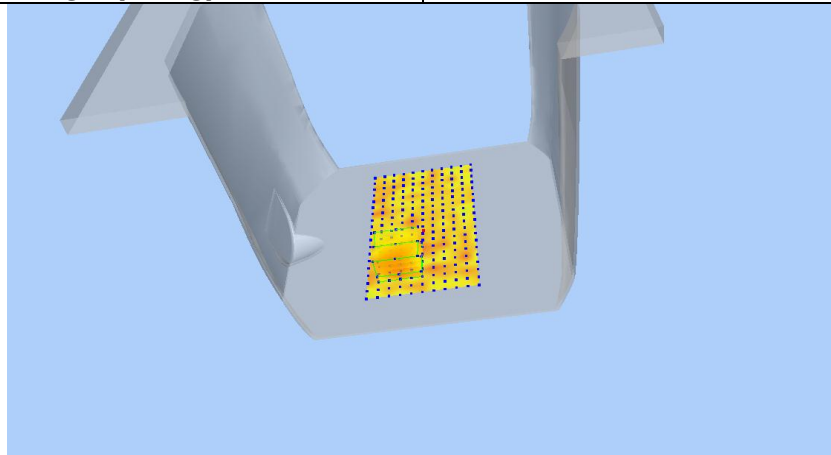



Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0116	0.0106	0.0094	0.0083	0.0074

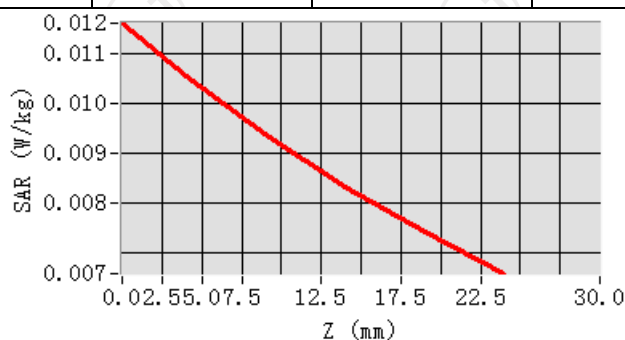

Hot spot position

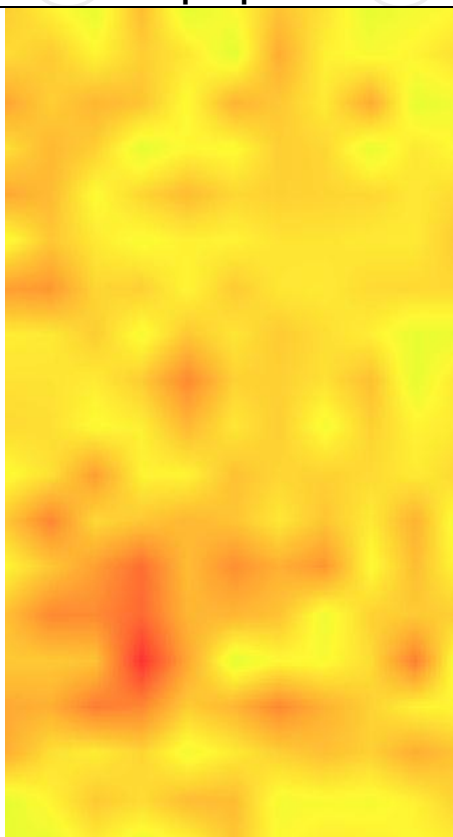

Appendix A: EUT Photos

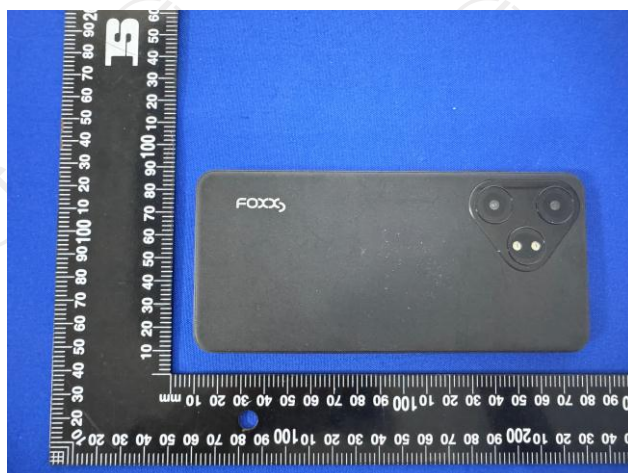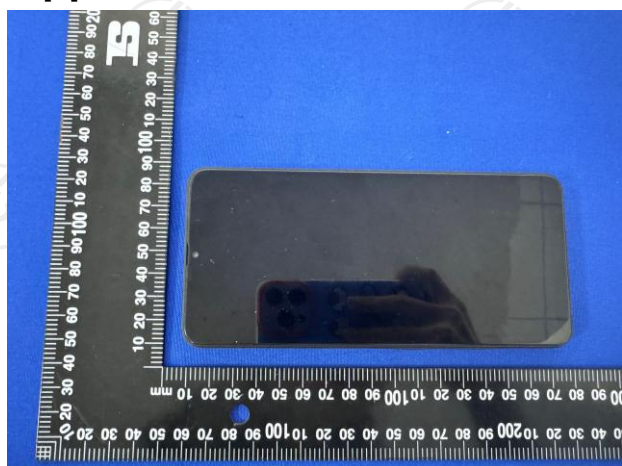


Liquid depth



The Body Liquid of 750MHz (15.3cm)



The Body Liquid of 835MHz (15.4cm)

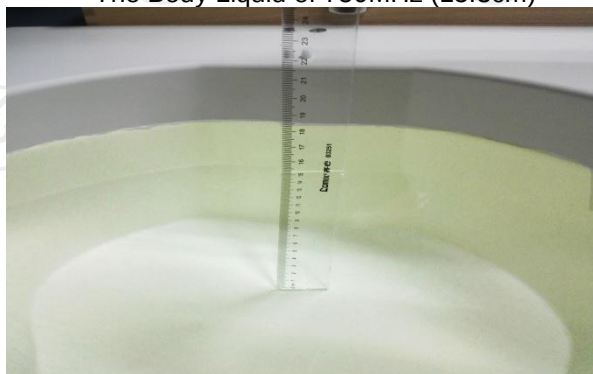

The Body Liquid of 1800MHz (15.2 cm)



The Body Liquid of 1900MHz (16.4 cm)



The Body Liquid of 2450MHz (15.3cm)



The Body Liquid of 2600MHz (16.5cm)

Appendix B: Test Setup Photos




Right Cheek




Right Tilted



Left Cheek

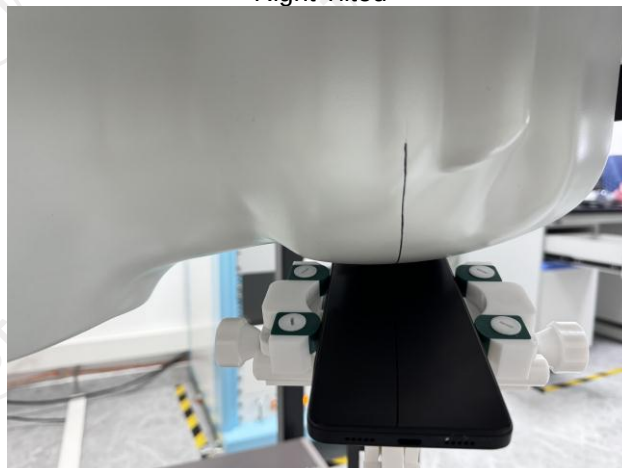


Left Tilted

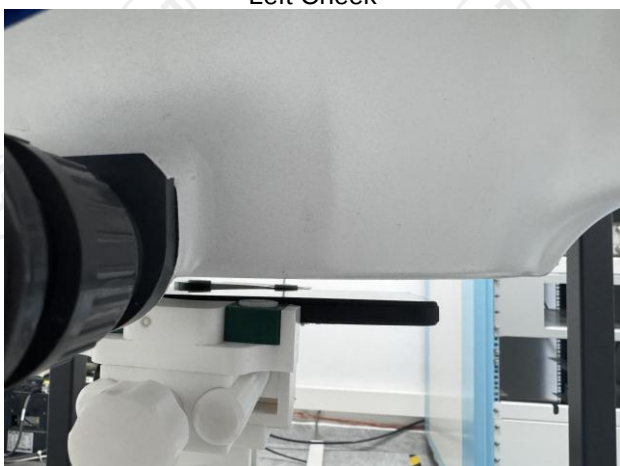

Body worn – Front (10mm)



Body worn – Back (10mm)

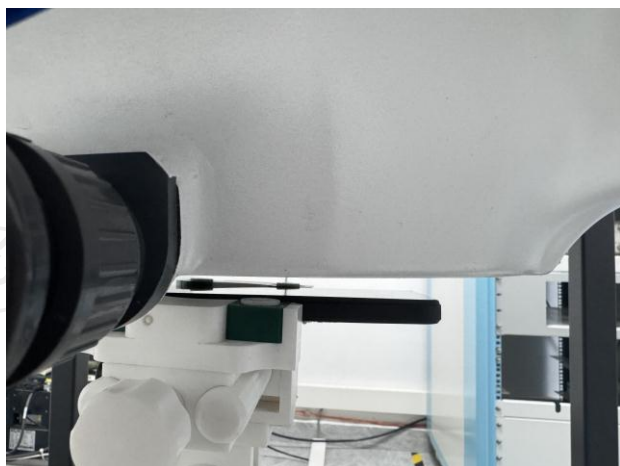

Hotspo Front (10mm)



Hotspo Back (10mm)




Hotspot Top (10mm)



Hotspot Right (10mm)



Hotspot Bottom (10mm)

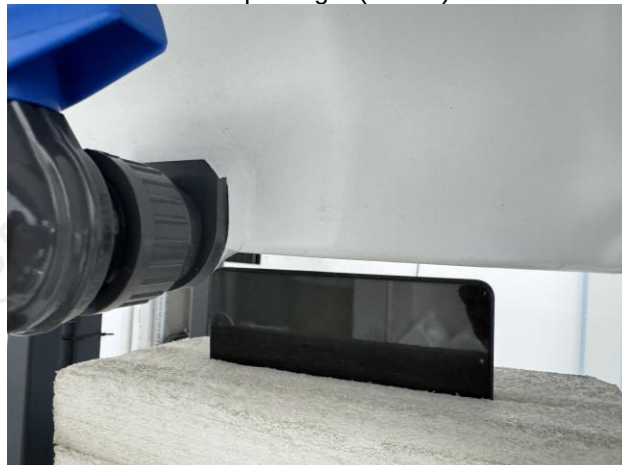

Hotspot Left (10mm)

Appendix C: Probe Calibration Certificate

COMOSAR E-FIELD Probe



COMOSAR E-Field Probe Calibration Report

Ref : ACR.180.7.22.BES.B

SHENZHEN TONGCE TESTING LAB

2101 & 2201, ZHENCHANG FACTORY RENSHAN INDUSTRIAL
ZONE, FUHAI SUBDISTRICT, BAO'AN DISTRICT SHENZHEN,
GUANGDONG, 518103, PEOPLE'S REPUBLIC OF CHINA

MVG COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 25/22 EPG0375

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 06/29/2024



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

	Name	Function	Date	Signature
Prepared by :	Jérôme Le Gall	Measurement Responsible	6/30/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	6/30/2024	
Authorized by:	Yann Toutain	Laboratory Director	7/05/2024	

	Customer Name
Distribution :	Shenzhen Tongce Testing Lab

Issue	Name	Date	Modifications
A	Jérôme Le Gall	6/30/2024	Initial release

Page: 2/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	4
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10



1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 25/22 EPG0375
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.197 MΩ Dipole 2: R2=0.230 MΩ Dipole 3: R3=0.208 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Probe

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

Page: 4/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/(\delta/2)})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect SAR uncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).



4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Expanded uncertainty 95 % confidence level k = 2					14 %

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 SENSITIVITY IN AIR

Normx dipole 1 (μV/(V/m) ²)	Normy dipole 2 (μV/(V/m) ²)	Normz dipole 3 (μV/(V/m) ²)
0.64	0.53	0.44

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
106	108	109

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain E-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$



COMOSAR E-FIELD PROBE CALIBRATION REPORT


Ref: ACR.180.7.22.BES.B

Calibration curves

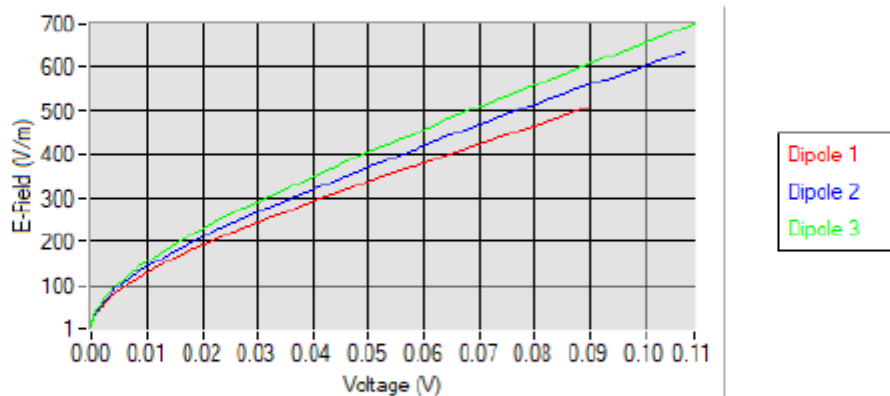

5.2 LINEARITY

Linearity

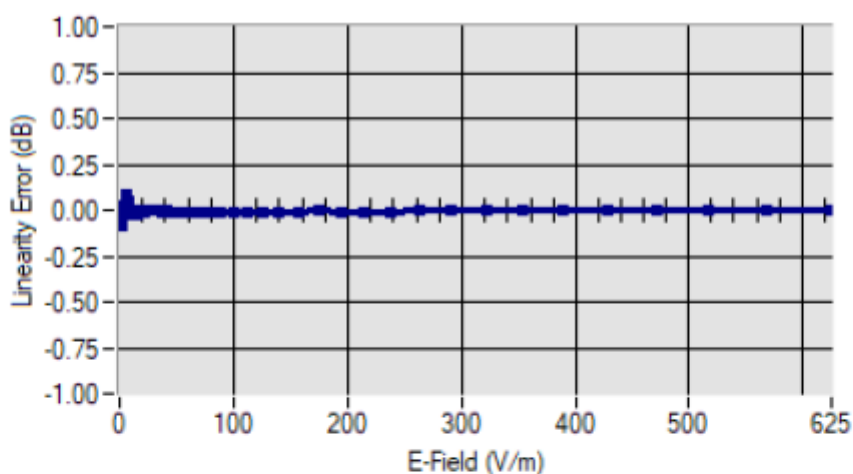

Linearity: $\pm 1.94\%$ ($\pm 0.09\text{dB}$)



5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	ConvF
HL750	750	1.71
BL750	750	1.78
HL900	900	1.91
BL900	900	1.96
HL1800	1800	2.08
BL1800	1800	2.16
HL2000	2000	2.03
BL2000	2000	2.10
HL2450	2450	2.31
BL2450	2450	2.37
HL2600	2600	2.16
BL2600	2600	2.23
HL3500	3500	2.21
BL3500	3500	2.28
HL3700	3700	3.45
BL3700	3700	3.15
HL4600	4600	3.30
BL4600	4600	3.70
HL5200	5200	2.01
BL5200	5200	2.08
HL5600	5600	2.07
BL5600	5600	2.12
HL5800	5800	2.06
BL5800	5800	2.13

LOWER DETECTION LIMIT: 7mW/kg




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

5.4 ISOTROPY

HL1800 MHz

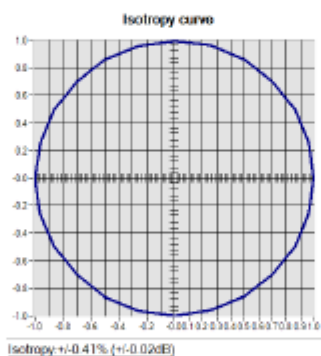



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
CALIPROBE Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2024	08/2027
Network Analyzer	Agilent 8753ES	MY40003210	10/2023	10/2026
Network Analyzer – Calibration kit	HP 85033D	3423A08186	06/2021	06/2027
Multimeter	Keithley 2000	1160271	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2024	06/2027
Power Meter	Rohde & Schwarz NRVD	832839-056	11/2023	11/2026
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	MVG	SN 32/16 WG4_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G900_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG6_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG8_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800B_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800H_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG10_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_3G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG12_1	Validated. No cal required.	Validated. No cal required.

Page: 10/11

Template ACR.DDD.N.YY.MVGB.ISSUE COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22 BES B

Liquid transition	MVG	SN 32/16 WGLIQ_5G000_1	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2024	06/2027

Page: 11/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



Dielectric Probe Calibration Report

Ref : ACR.138.4.33.SATU.A

SHENZHEN TONGCE TESTING LAB
2101&2201, ZHENCHANG FACTORY, RENSHAN
INDUSTRIAL ZONE, FUHAI SUBDISTRICT, BAOAN
DISTRICT, SHENZHEN, GUANGDONG, 518103,
PEOPLES REPUBLIC OF CHINA

MVG COMOSAR DOSIMETRIC E-FIELD PROBE

FREQUENCY: 0.3-6 GHZ

SERIAL NO.: SN 19/15 OCPG 71

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/05/2024

Summary:

This document presents the method and results from an accredited Dielectric Probe calibration performed in MVG USA using the LIMESAR test bench. All calibration results are traceable to national metrology institutions.



SAR DIELECTRIC PROBE CALIBRATION REPORT

Ref: ACR.138.4.33..SATUA

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2024	<i>JS</i>
Checked by :	Jérôme LUC	Product Manager	06/05/2024	<i>JS</i>
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2024	<i>Kim Rutkowski</i>

	Customer Name
Distribution :	SHENZHEN TONGCE TESTING LAB

Issue	Date	Modifications
A	06/05/2024	Initial release



SAR DIELECTRIC PROBE CALIBRATION REPORT

Ref: ACR.138.4.33..SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Liquid Permittivity Measurements	5
5	Measurement Uncertainty	5
5.1	Dielectric Permittivity Measurement	5
6	Calibration Measurement Results	6
6.1	Liquid Permittivity Measurement	6
7	List of Equipment	7

Page: 3/7

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR DIELECTRIC PROBE CALIBRATION REPORT

Ref: ACR.138.4.33..SATU.A

1 INTRODUCTION

This document contains a summary of the suggested methods and requirements set forth by the IEEE 1528 and CEI/IEC 62209 standards for liquid permittivity measurements and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	LIMESAR DIELECTRIC PROBE
Manufacturer	MVG
Model	SCLMP
Serial Number	SN 19/15 OCPG 71
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's Dielectric Probes are built in accordance to the IEEE 1528 and CEI/IEC 62209 standards. The product is designed for use with the LIMESAR test bench only.



Figure 1 – MVG LIMESAR Dielectric Probe

Page: 4/7

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209-1 & 2 standards outline techniques for dielectric property measurements. The LIMESAR test bench employs one of the methods outlined in the standards, using a contact probe or open-ended coaxial transmission-line probe and vector network analyzer. The standards recommend the measurement of two reference materials that have well established and stable dielectric properties to validate the system, one for the calibration and one for checking the calibration. The LIMESAR test bench uses De-ionized water as the reference for the calibration and either DMS or Methanol as the reference for checking the calibration. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 LIQUID PERMITTIVITY MEASUREMENTS

The permittivity of a liquid with well established dielectric properties was measured and the measurement results compared to the values provided in the fore mentioned standards.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 DIELECTRIC PERMITTIVITY MEASUREMENT

The following uncertainties apply to the Dielectric Permittivity measurement:

Uncertainty analysis of Permittivity Measurement					
ERROR SOURCES	Uncertainty value (+/-%)	Probability Distribution	Divisor	ci	Standard Uncertainty (+/-%)
Repeatability (n repeats, mid-band)	4.00%	N	1	1	4.000%
Deviation from reference liquid	5.00%	R	$\sqrt{3}$	1	2.887%
Network analyser-drift, linearity	2.00%	R	$\sqrt{3}$	1	1.155%
Test-port cable variations	0.00%	U	$\sqrt{2}$	1	0.000%
Combined standard uncertainty					5.066%
Expanded uncertainty (confidence level of 95%, $k=2$)					10.0%

Uncertainty analysis of Conductivity Measurement					
ERROR SOURCES	Uncertainty value (+/-%)	Probability Distribution	Divisor	ci	Standard Uncertainty (+/-%)
Repeatability (n repeats, mid-band)	3.50%	N	1	1	3.500%
Deviation from reference liquid	3.00%	R	$\sqrt{3}$	1	1.732%
Network analyser-drift, linearity	2.00%	R	$\sqrt{3}$	1	1.155%
Test-port cable variations	0.00%	U	$\sqrt{2}$	1	0.000%
Combined standard uncertainty					4.072%
Expanded uncertainty (confidence level of 95%, $k=2$)					8.1%

Page: 5/7

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR DIELECTRIC PROBE CALIBRATION REPORT

Ref: ACR.138.4.33..SATU.A


6 CALIBRATION MEASUREMENT RESULTS

Measurement Condition

Software	LIMESAR
Liquid Temperature	21°C
Lab Temperature	21°C
Lab Humidity	44%

6.1 LIQUID PERMITTIVITY MEASUREMENT

A liquid of known characteristics (methanol at 20°C) is measured with the probe and the results (complex permittivity $\epsilon' + j\epsilon''$) are compared with the well-known theoretical values for this liquid.

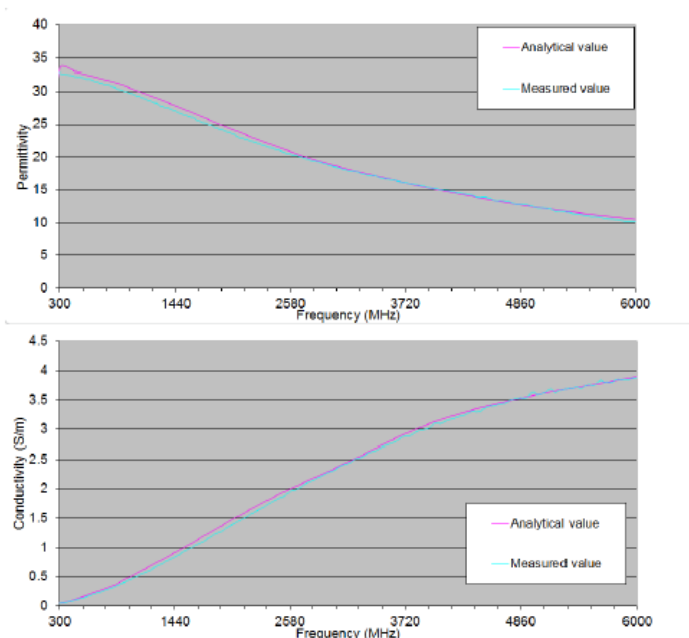

Page: 6/7

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR DIELECTRIC PROBE CALIBRATION REPORT

Ref: ACR.138.4.33..SATU.A

7 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
LIMESAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2024	02/2027
Methanol CAS 67-56-1	Alpha Aesar	Lot D13W011	Validated. No cal required.	Validated. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	09/2024	09/2025

Page: 7/7

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

Appendix D: Dipole Calibration Report

SID 750



SAR Reference Dipole Calibration Report

Ref : ACR.156.3.15.SATU.A

SHENZHEN TONGCE TESTING LAB
2101&2201, ZHENCHANG FACTORY, RENSHAN
INDUSTRIAL ZONE, FUHAI SUBDISTRICT, BAOAN
DISTRICT, SHENZHEN, GUANGDONG, 518103,
PEOPLES REPUBLIC OF CHINA

COMOSAR REFERENCE DIPOLE
FREQUENCY: 750 MHZ
SERIAL NO.: SN 16/15 DIP 0G750-368

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/05/2024

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2024	
Checked by :	Jérôme LUC	Product Manager	06/05/2024	
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2024	

	Customer Name
Distribution :	SHENZHEN TONGCE TESTING LAB

Issue	Date	Modifications
A	06/05/2024	Initial release

Page: 2/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 750 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID750
Serial Number	SN 16/15 DIP 0G750-368
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

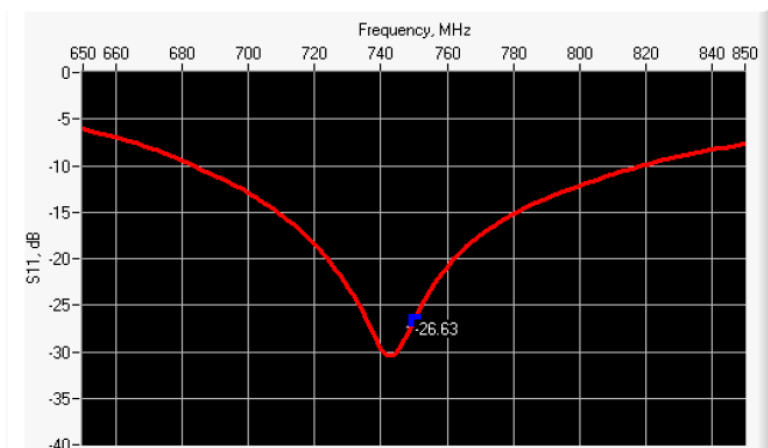

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-26.63	-20	$54.1 \Omega + 1.4 j\Omega$

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

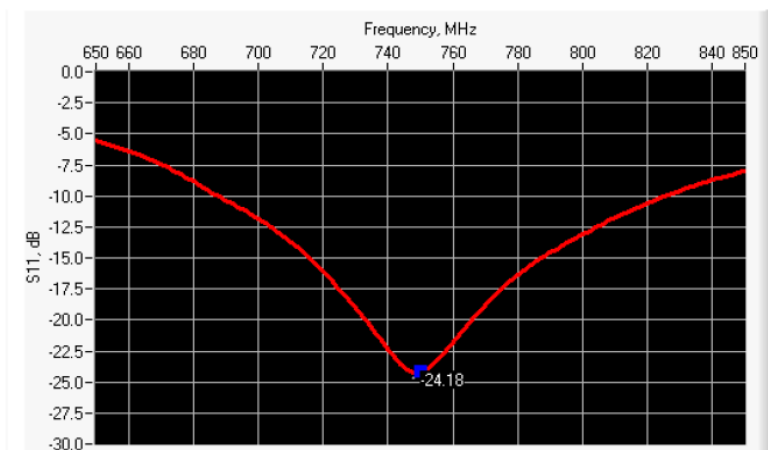

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-24.18	-20	$52.4 \Omega + 5.8 j\Omega$

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 ±1 %.		250.0 ±1 %.		6.35 ±1 %.	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.