



Test Report

Product Name : Prestige 964 Cable Router with 11g AP

Model No.: Prestige 964AP Router

FCC ID.: I88-P964APR

Applicant : ZyXEL Communications Corporation

Address : No. 6, Innovation Rd II, Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C.

Date of Receipt : Apr. 21, 2004

Date of Test : May 14, 2004

Report No. : 044H052FI

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : May 14, 2004

Report No. : 044H052FI



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200347-0

Product Name : Prestige 964 Cable Router with 11g AP

Applicant : ZyXEL Communications Corporation

Address : No. 6, Innovation Rd II, Science-Based Industrial
Park, Hsin-Chu, Taiwan, R.O.C.

Manufacturer : ZyGATE Communications Inc.

Model No. : Prestige 964AP Router

FCC ID. : I88-P964APR

Rated Voltage : AC 120V/60Hz

Trade Name : ZyXEL

Measurement Standard : FCC CFR Title 47 Part 15 Subpart C: 2003

Measurement Procedure : ANSI C63.4: 2001

Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuietTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Carol Tsai
(Carol Tsai)

Tested By : Dampier Chang
(Dampier Chang)

Approved By : Kevin Wang
(Kevin Wang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Operational Description	5
1.3. Tested System Details.....	6
1.4. Configuration of tested System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. Conducted Emission.....	9
2.1. Test Equipment.....	9
2.2. Test Setup	9
2.3. Limits	9
2.4. Test Procedure	10
2.5. Test Result of Conducted Emission.....	11
3. Peak Power Output	23
3.1. Test Equipment.....	23
3.2. Test Setup	23
3.3. Limits	23
3.4. Test Result of Peak Power Output.....	24
4. Radiated Emission.....	26
4.1. Test Equipment.....	26
4.2. Test Setup	26
4.3. Limits	27
4.4. Test Procedure	27
4.5. Test Result of Radiated Emission.....	28
5. Band Edge	40
5.1. Test Equipment.....	40
5.2. Test Setup	40
5.3. Limits	42
5.4. Test Procedure	42
5.5. Test Result of Band Edge	43
6. Occupied Bandwidth.....	49
6.1. Test Equipment.....	49
6.2. Test Setup	49
6.3. Limits	49
6.4. Test Result of Occupied Bandwidth	50
7. Power Density	52
7.1. Test Equipment.....	52
7.2. Test Setup	52
7.3. Limits	52
7.4. Test Result of Power Density	53
8. EMI Reduction Method During Compliance Testing	55
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1.2. Operational Description

EUT is a Prestige 964 Cable Router with 11g AP with 11 channels. This device provided four kinds of transmitting speed 1, 2, 5.5 and 11Mbps for IEEE 802.11b and eight kinds of transmitting speed 6, 9, 12, 18, 24, 36, 48 and 54Mbps for IEEE 802.11g. The device of RF carrier is DQPSK, DBPSK and CCK.

The device adapts Digitally Modulation Spread Spectrum modulation. The Connector antenna was provides diversity function to improve the receiving function.

This Prestige 964 Cable Router with 11g AP, compliant with IEEE 802.11b and IEEE 802.11g, is a high-efficiency Wireless LAN adapter. It allows your computer to connect to a wireless network and to share resources, such as files or printers without being bound to the network wires. Operation in 2.4GHz Direct Sequence Spread Spectrum (DSSS) radio transmission for IEEE 802.11b and Orthogonal Frequency Division Multiplexing (OFDM) for IEEE 802.11g, the Prestige 964 Cable Router with 11g AP Wired Equivalent Protection (WEP) algorithm is used. In addition, its standard compliance ensures that it can communicate with any IEEE 802.11b and IEEE 802.11g network.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1) Notebook PC	DELL	Latitude 610	N/A	DoC	Non-shielded, 1.7m, a ferrite core bonded
(2) Keyboard	HP	SK-1688	C0305135803	DoC	--
(3) Microphone & Earphone	TOKTO	SX-MI	N/A	DoC	--
(4) Printer	HP	C2642A	MY75N1D2BC	DoC	Non-shielded, 0.7m
(5) Network	NORTEL	DES801E02	N/A	DoC	Non-shielded, 1.8m
(6) Notebook PC	Twinhead	N34058	N/A	DoC	-
(7) Ethernet Switch	D-Link	DES-33263	N/A	DoC	Non-shielded, 1.8m
(8) Notebook PC	DELL	Latitude 600	N/A	DoC	Non-shielded, 1.7m, a ferrite core bonded
(9) Wireless LAN Card	ZyGATE	WL5021	H3F00241	DoC	--

Signal Cable Type	Signal cable Description
A. LAN Cable	Shielded, 1.8m
B. USB Cable	Shielded, 1.8m
C. RS232 Cable	Shielded, 2m
D. Microphone & Earphone Cable	Shielded, 1.2m
E. Keyboard Cable	Shielded, 1.8m
F. Printer Cable	Shielded, 1.2m
G. Coaxial Cable	Shielded, 10m
H. LAN Cable	Shielded, 3m
I. LAN Cable	Non-Shielded, 10m, 3 Pcs

1.4. Configuration of tested System

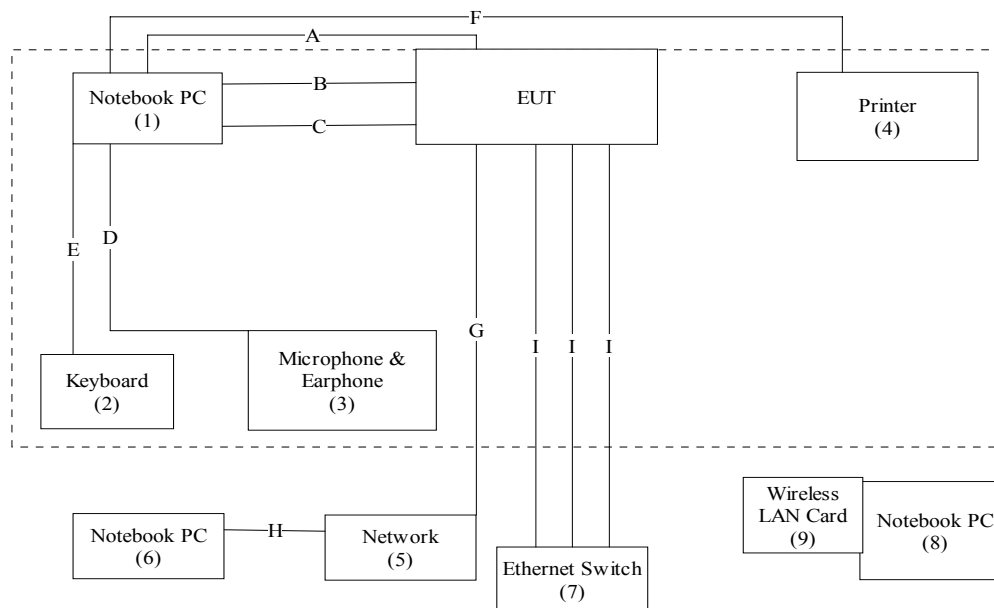

1.5. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.4
- (2) Turn on the power of all equipment.
- (3) Notebook PC reads data from disk.
- (4) Data will be transmitting through EUT.
- (5) The transmitted status will be shown on the monitor.
- (6) Repeat the above procedure 1.5.3 to 1.5.5

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



September 30, 2003 Accreditation on NVLAP
NVLAP Lab Code: 200347-0



Site Name: Quietek Corporation

Site Address: No.75-1, Wang-Yeh Valley, Yung-Hsing,
Chiung-Lin, Hsin-Chu County,
Taiwan, R.O.C.
TEL : 886-3-592-8858 / FAX : 886-3-592-8859
E-Mail: service@quietek.com

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2003	
2	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2004	Peripherals
3	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2004	EUT
4	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2004	
5	No.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2. Test Setup

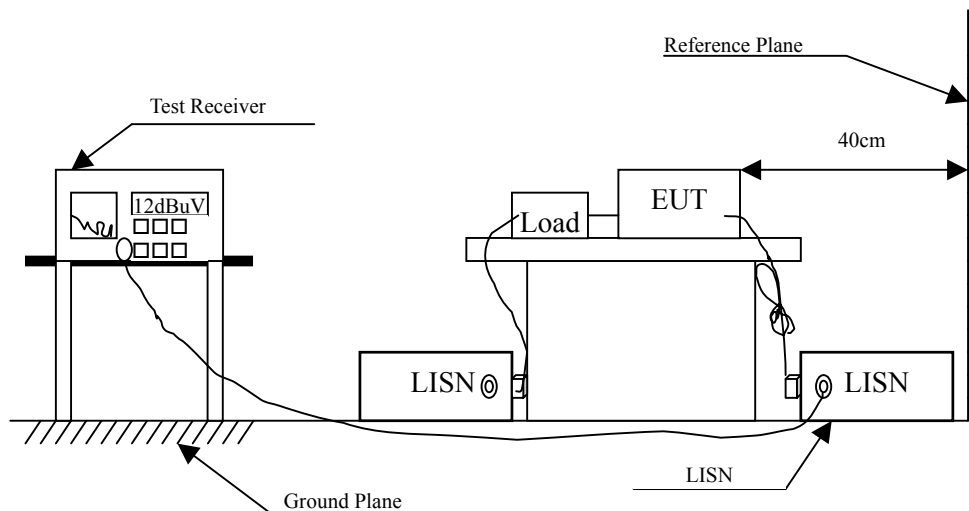

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2001 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Test Result of Conducted Emission

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 1 (IEEE 802.11b)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.183	0.10	0.12	33.48	33.70	64.37
0.281	0.10	0.16	36.55	36.81	60.79
1.327	0.12	0.31	38.40	38.82	56.00
* 2.400	0.13	0.36	42.29	42.78	56.00
3.696	0.15	0.40	40.84	41.39	56.00
4.935	0.16	0.43	40.48	41.07	56.00
Average					
0.183	0.10	0.12	26.50	26.72	54.35
0.281	0.10	0.16	30.40	30.66	50.79
1.327	0.12	0.31	27.40	27.82	46.00
2.400	0.13	0.36	24.90	25.39	46.00
3.696	0.15	0.40	27.70	28.25	46.00
* 4.635	0.16	0.42	29.20	29.78	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 1 (IEEE 802.11b)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.198	0.10	0.13	33.17	33.40	63.69
0.302	0.10	0.17	35.45	35.72	60.19
0.701	0.11	0.25	34.69	35.04	56.00
1.248	0.11	0.30	36.49	36.90	56.00
* 2.440	0.13	0.36	40.94	41.43	56.00
4.794	0.16	0.43	35.11	35.70	56.00
Average					
0.198	0.10	0.13	28.90	29.13	53.69
* 0.302	0.10	0.17	33.20	33.47	50.19
0.701	0.11	0.25	21.30	21.65	46.00
1.248	0.11	0.30	23.90	24.31	46.00
2.440	0.13	0.36	26.50	26.99	46.00
4.794	0.16	0.43	25.70	26.29	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 6 (IEEE 802.11b)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.209	0.10	0.13	32.10	32.33	63.24
0.303	0.10	0.17	33.87	34.14	60.16
0.940	0.11	0.27	34.45	34.83	56.00
* 2.268	0.13	0.36	39.95	40.43	56.00
3.878	0.15	0.41	35.23	35.79	56.00
4.720	0.16	0.43	33.73	34.32	56.00
Average					
0.209	0.10	0.13	22.30	22.53	53.24
0.303	0.10	0.17	26.60	26.87	50.16
0.940	0.11	0.27	20.10	20.48	46.00
* 2.268	0.13	0.36	27.00	27.48	46.00
3.878	0.15	0.41	24.50	25.06	46.00
4.720	0.16	0.43	24.30	24.89	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
Test Item : Conducted Emission
Power Line : Line 2
Test Mode : Channel 6 (IEEE 802.11b)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.199	0.10	0.13	32.76	32.99	63.65
0.301	0.10	0.17	36.08	36.35	60.22
0.713	0.11	0.25	34.35	34.70	56.00
* 2.291	0.13	0.36	40.78	41.27	56.00
3.683	0.15	0.40	37.32	37.87	56.00
4.863	0.16	0.43	36.15	36.74	56.00
Average					
0.199	0.10	0.13	27.00	27.23	53.65
0.301	0.10	0.17	29.60	29.87	50.22
0.713	0.11	0.25	21.90	22.25	46.00
* 2.291	0.13	0.36	27.20	27.69	46.00
3.683	0.15	0.40	25.80	26.35	46.00
4.863	0.16	0.43	26.90	27.49	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 11 (IEEE 802.11b)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.197	0.10	0.13	32.36	32.59	63.74
0.305	0.10	0.17	34.50	34.77	60.11
0.931	0.11	0.27	34.91	35.29	56.00
* 2.264	0.13	0.36	40.83	41.31	56.00
3.667	0.15	0.40	36.13	36.68	56.00
4.823	0.16	0.43	34.69	35.28	56.00
Average					
0.197	0.10	0.13	21.00	21.23	53.74
0.305	0.10	0.17	27.10	27.37	50.11
0.931	0.11	0.27	21.00	21.38	46.00
* 2.264	0.13	0.36	27.20	27.68	46.00
3.667	0.15	0.40	25.30	25.85	46.00
4.823	0.16	0.43	25.20	25.79	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 11 (IEEE 802.11b)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.207	0.10	0.13	32.20	32.43	63.32
0.305	0.10	0.17	33.97	34.24	60.11
0.938	0.11	0.27	34.55	34.93	56.00
* 2.270	0.13	0.36	40.05	40.53	56.00
3.876	0.15	0.41	35.33	35.89	56.00
4.722	0.16	0.43	33.83	34.42	56.00
Average					
0.207	0.10	0.13	22.30	22.53	53.32
0.305	0.10	0.17	26.60	26.87	50.11
0.938	0.11	0.27	20.10	20.48	46.00
* 2.270	0.13	0.36	27.00	27.48	46.00
3.876	0.15	0.41	24.50	25.06	46.00
4.722	0.16	0.43	24.30	24.89	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 1 (IEEE 802.11g)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
0.199	0.10	0.13	33.17	33.40	63.65
0.303	0.10	0.17	35.45	35.72	60.15
0.702	0.11	0.25	34.69	35.04	56.00
1.249	0.11	0.30	36.49	36.90	56.00
* 2.441	0.13	0.36	40.94	41.43	56.00
4.795	0.16	0.43	35.11	35.70	56.00
Average					
0.199	0.10	0.13	28.90	29.13	53.65
* 0.303	0.10	0.17	33.20	33.47	50.16
0.702	0.11	0.25	21.30	21.65	46.00
1.249	0.11	0.30	23.90	24.31	46.00
2.441	0.13	0.36	26.50	26.99	46.00
4.795	0.16	0.43	25.70	26.29	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 1 (IEEE 802.11g)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
0.207	0.10	0.13	32.20	32.43	63.32
0.305	0.10	0.17	33.97	34.24	60.11
0.938	0.11	0.27	34.55	34.93	56.00
* 2.270	0.13	0.36	40.05	40.53	56.00
3.876	0.15	0.41	35.33	35.89	56.00
4.722	0.16	0.43	33.83	34.42	56.00
Average					
0.207	0.10	0.13	22.30	22.53	53.32
0.305	0.10	0.17	26.60	26.87	50.11
0.938	0.11	0.27	20.10	20.48	46.00
* 2.270	0.13	0.36	27.00	27.48	46.00
3.876	0.15	0.41	24.50	25.06	46.00
4.722	0.16	0.43	24.30	24.89	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 6 (IEEE 802.11g)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.200	0.10	0.13	32.76	32.99	63.60
0.302	0.10	0.17	36.08	36.35	60.18
0.714	0.11	0.25	34.35	34.70	56.00
* 2.292	0.13	0.36	40.78	41.27	56.00
3.684	0.15	0.40	37.32	37.87	56.00
4.864	0.16	0.43	36.15	36.74	56.00
Average					
0.200	0.10	0.13	27.00	27.23	53.61
0.302	0.10	0.17	29.60	29.87	50.19
0.714	0.11	0.25	21.90	22.25	46.00
* 2.292	0.13	0.36	27.20	27.69	46.00
3.684	0.15	0.40	25.80	26.35	46.00
4.864	0.16	0.43	26.90	27.49	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 6 (IEEE 802.11g)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.197	0.10	0.13	32.36	32.59	63.74
0.305	0.10	0.17	34.50	34.77	60.09
0.931	0.11	0.27	34.91	35.29	56.00
* 2.264	0.13	0.36	40.83	41.31	56.00
3.667	0.15	0.40	36.13	36.68	56.00
4.823	0.16	0.43	34.69	35.28	56.00
Average					
0.197	0.10	0.13	21.00	21.23	53.74
0.305	0.10	0.17	27.10	27.37	50.11
0.931	0.11	0.27	21.00	21.38	46.00
* 2.264	0.13	0.36	27.20	27.68	46.00
3.667	0.15	0.40	25.30	25.85	46.00
4.823	0.16	0.43	25.20	25.79	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 1
 Test Mode : Channel 11 (IEEE 802.11g)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
Quasi-Peak					
0.198	0.10	0.13	32.36	32.59	63.68
0.296	0.10	0.16	36.73	37.00	60.37
1.444	0.12	0.31	37.34	37.77	56.00
* 2.466	0.13	0.36	41.59	42.08	56.00
3.858	0.15	0.41	38.53	39.09	56.00
4.794	0.16	0.43	36.27	36.86	56.00
Average					
0.198	0.10	0.13	26.40	26.63	53.69
0.296	0.10	0.16	29.50	29.77	50.35
1.444	0.12	0.31	26.90	27.33	46.00
* 2.466	0.13	0.36	27.50	27.99	46.00
3.858	0.15	0.41	26.00	26.56	46.00
4.794	0.16	0.43	27.20	27.79	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Conducted Emission
 Power Line : Line 2
 Test Mode : Channel 11 (IEEE 802.11g)

Frequency	Cable	Probe	Reading	Emission	Limits
	Loss	Factor	Level	Level	
MHz	dB	dB	dBuV	dBuV	dBuV
=====					
Quasi-Peak					
0.204	0.10	0.13	31.78	32.01	63.45
0.303	0.10	0.17	34.34	34.61	60.16
1.246	0.11	0.30	36.82	37.23	56.00
* 2.244	0.13	0.36	40.67	41.15	56.00
3.804	0.15	0.41	35.97	36.52	56.00
4.722	0.16	0.43	34.58	35.17	56.00
Average					
0.204	0.10	0.13	22.20	22.43	53.45
0.303	0.10	0.17	27.20	27.47	50.16
1.246	0.11	0.30	23.80	24.21	46.00
* 2.244	0.13	0.36	27.20	27.68	46.00
3.804	0.15	0.41	25.40	25.95	46.00
4.722	0.16	0.43	24.50	25.09	46.00

Note:

1. All Reading Levels are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + LISN Factor + Cable Loss.

3. Peak Power Output

3.1. Test Equipment


The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2004	
2	No.1 OATS			Sep., 2003	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

3.2. Test Setup

Conduction Power Measurement

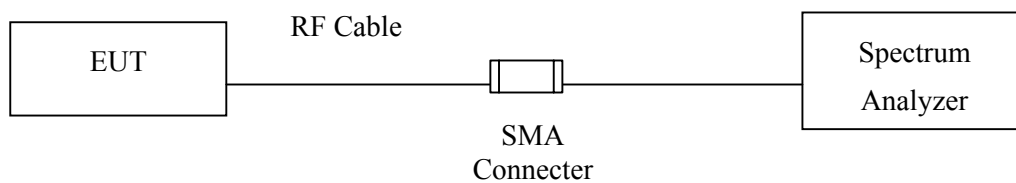

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Result of Peak Power Output

Product : Prestige 964 Cable Router with 11g AP
Test Item : Peak Power Output
Test Site : No.1 OATS
Test Mode : Normal Operation (IEEE 802.11b)

Channel No.	Frequency(MHz)	Measurement	Required Limit	Result
1	2412.0	12.5dBm	1 Watt= 30 dBm	Pass
6	2437.0	11.9dBm	1 Watt= 30 dBm	Pass
11	2462.0	12.86dBm	1 Watt= 30 dBm	Pass

Product : Prestige 964 Cable Router with 11g AP
Test Item : Peak Power Output
Test Site : No.1 OATS
Test Mode : Normal Operation (IEEE 802.11g)

Channel No.	Frequency(MHz)	Measurement	Required Limit	Result
1	2412.0	19.47dBm	1 Watt= 30 dBm	Pass
6	2437.0	19.28dBm	1 Watt= 30 dBm	Pass
11	2462.0	17.71dBm	1 Watt= 30 dBm	Pass

4. Radiated Emission

4.1. Test Equipment


The following test equipment are used during the test:

Item		Equipment	Manufacturer	Model No. / Serial No.	Last Cal.
1	X	Test Receiver	R & S	ESCS 30 / 825442/017	Jan., 2004
2	X	Spectrum Analyzer	Advantest	R3261C / 81720266	N/A
3	X	Pre-Amplifier	HP	8447D / 2944A09276	N/A
4	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2003
5	X	Spectrum Analyzer	R & S	FSP40 / 100005	Aug., 2003
6	X	Pre-Amplifier	HP	8449B / 3008A01123	Feb., 2004
7	X	Horn Antenna	Schwarzbeck	BBHA 9120D / BBHA9120D312	Jul., 2003
8		No.1 OATS			Sep., 2003

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.

2. Mark "X" test instruments are used to measure the final test results.

4.2. Test Setup

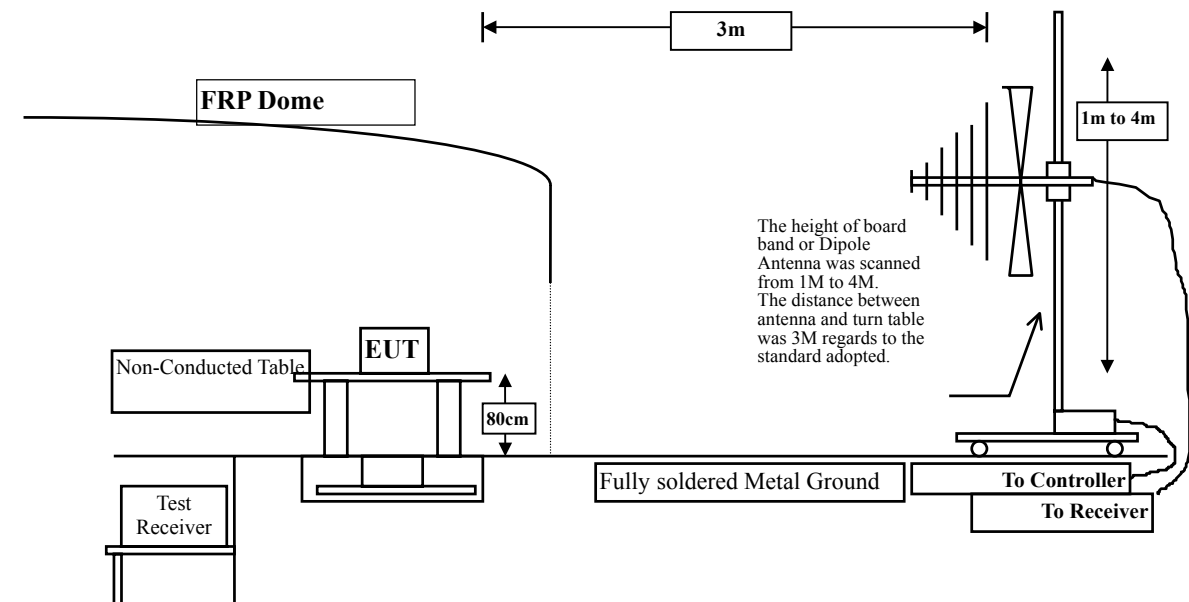

4.3. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks :

1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2001 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Test Result of Radiated Emission

Product : Prestige 964 Cable Router with 11g AP
Test Item : Harmonic Radiated Emission
Test Site : No.1 OATS
Test Mode : Channel 1 (IEEE 802.11b)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

1171.430	2.15	24.28	31.90	48.94	43.46	30.54	74.00
4824.000	4.24	31.31	31.95	35.94	39.54	34.46	74.00
7235.700	5.63	36.54	32.67	35.60	45.10	28.90	74.00
9648.500	7.01	37.98	31.88	33.71	46.83	27.17	74.00
12059.30	8.40	38.59	31.32	33.46	49.13	24.87	74.00

Vertical

Peak Detector:

1171.380	2.15	24.28	31.90	53.34	47.86	26.14	74.00
4823.700	4.24	31.31	31.95	38.47	42.07	31.93	74.00
7235.700	5.63	36.54	32.67	35.42	44.92	29.08	74.00
9647.600	7.01	37.98	31.88	34.14	47.26	26.74	74.00
12060.50	8.40	38.59	31.32	32.17	47.84	26.16	74.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6 (IEEE 802.11b)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

1171.440	2.15	24.28	31.90	49.13	43.65	30.35	74.00
4874.040	4.27	31.37	31.95	35.64	39.33	34.67	74.00
7311.020	5.67	36.56	32.60	35.46	45.09	28.91	74.00
9747.980	7.07	38.13	31.66	33.23	46.77	27.23	74.00
12185.04	8.47	38.51	31.21	32.48	48.24	25.76	74.00

Vertical

Peak Detector:

1171.530	2.15	24.28	31.90	52.95	47.47	26.53	74.00
4873.820	4.27	31.37	31.95	39.67	43.36	30.64	74.00
7311.080	5.67	36.56	32.60	35.42	45.05	28.95	74.00
9748.030	7.07	38.13	31.66	33.58	47.12	26.88	74.00
12185.02	8.47	38.51	31.21	32.89	48.65	25.35	74.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11b)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

1171.540	2.15	24.28	31.90	48.74	43.26	30.74	74.00
4924.120	4.30	31.43	31.96	33.55	37.33	36.67	74.00
7386.240	5.72	36.58	32.51	36.03	45.82	28.18	74.00
9848.120	7.12	38.18	31.48	36.13	49.95	24.05	74.00
12309.88	8.53	38.43	31.10	33.52	49.38	24.62	74.00

Vertical

Peak Detector:

1171.510	2.15	24.28	31.90	52.97	47.49	26.51	74.00
4924.240	4.30	31.43	31.96	37.97	41.75	32.25	74.00
7385.920	5.72	36.58	32.51	35.59	45.38	28.62	74.00
9847.960	7.12	38.18	31.48	36.16	49.98	24.02	74.00
12309.84	8.53	38.43	31.10	33.57	49.43	24.57	74.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 1 (IEEE 802.11g)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

1171.420	2.15	24.28	31.90	48.67	43.19	30.81	74.00
4824.040	4.24	31.31	31.95	36.18	39.78	34.22	74.00
7236.080	5.63	36.54	32.67	35.70	45.20	28.80	74.00
9648.040	7.01	37.98	31.88	33.56	46.68	27.32	74.00
12059.94	8.40	38.59	31.32	33.01	48.68	25.32	74.00

Vertical

Peak Detector:

1171.480	2.15	24.28	31.90	52.28	46.80	27.20	74.00
4823.120	4.24	31.31	31.95	37.74	41.34	32.66	74.00
7235.980	5.63	36.54	32.67	35.25	44.75	29.25	74.00
9647.920	7.01	37.98	31.88	34.83	47.95	26.05	74.00
12059.94	8.40	38.59	31.32	32.88	48.55	25.45	74.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6 (IEEE 802.11g)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

1171.580	2.15	24.28	31.90	48.60	43.12	30.88	74.00
4873.880	4.27	31.37	31.95	35.63	39.32	34.68	74.00
7310.920	5.67	36.56	32.60	35.26	44.89	29.11	74.00
9747.940	7.07	38.13	31.66	33.13	46.67	27.33	74.00
12185.02	8.47	38.51	31.21	32.65	48.41	25.59	74.00

Vertical

Peak Detector:

1171.400	2.15	24.28	31.90	52.17	46.69	27.31	74.00
4874.040	4.27	31.37	31.95	38.96	42.65	31.35	74.00
7310.980	5.67	36.56	32.60	35.70	45.33	28.67	74.00
9747.960	7.07	38.13	31.66	33.80	47.34	26.66	74.00
12185.06	8.47	38.51	31.21	32.78	48.54	25.46	74.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Harmonic Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11g)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

1171.480	2.15	24.28	31.90	48.23	42.75	31.25	74.00
4924.120	4.30	31.43	31.96	35.89	39.67	34.33	74.00
7385.900	5.72	36.58	32.51	34.56	44.35	29.65	74.00
9847.960	7.12	38.18	31.48	33.38	47.20	26.80	74.00
12309.94	8.53	38.43	31.10	33.51	49.37	24.63	74.00

Vertical

Peak Detector:

1171.400	2.15	24.28	31.90	52.16	46.68	27.32	74.00
4923.680	4.30	31.43	31.96	39.22	43.00	31.00	74.00
7385.960	5.72	36.58	32.51	34.60	44.39	29.61	74.00
9847.940	7.12	38.18	31.48	33.40	47.22	26.78	74.00
12309.88	8.53	38.43	31.10	32.83	48.69	25.31	74.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz °
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
Test Item : General Radiated Emission
Test Site : No.1 OATS
Test Mode : Channel 1 (IEEE 802.11b)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

299.660	2.12	13.53	22.60	43.00	36.05	9.95	46.00
395.690	2.52	16.18	22.60	41.60	37.70	8.30	46.00
* 498.510	2.94	17.80	22.60	40.20	38.34	7.66	46.00
621.700	3.45	19.09	22.60	38.20	38.14	7.86	46.00
796.300	4.16	22.52	22.60	34.20	38.28	7.72	46.00
993.210	4.97	24.55	22.60	31.40	38.32	15.68	54.00

Vertical

* 62.010	1.15	9.82	22.60	48.40	36.77	3.23	40.00
299.660	2.12	17.53	22.60	37.60	34.65	11.35	46.00
496.570	2.93	16.83	22.60	40.20	37.36	8.64	46.00
623.640	3.46	18.26	22.60	34.00	33.12	12.88	46.00
746.830	3.96	20.41	22.60	31.60	33.37	12.63	46.00
796.300	4.16	23.74	22.60	32.00	37.31	8.69	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6 (IEEE 802.11b)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

152.220	1.52	9.41	22.60	46.00	34.33	9.17	43.50
297.720	2.12	13.51	22.60	43.00	36.02	9.98	46.00
* 396.660	2.52	16.14	22.60	44.00	40.06	5.94	46.00
497.540	2.94	17.80	22.60	40.60	38.74	7.26	46.00
621.700	3.45	19.09	22.60	38.00	37.94	8.06	46.00
796.300	4.16	22.52	22.60	33.20	37.28	8.72	46.00

Vertical

* 132.820	1.44	13.16	22.60	44.80	36.80	6.70	43.50
298.690	2.12	17.42	22.60	37.00	33.94	12.06	46.00
395.690	2.52	14.05	22.60	40.60	34.57	11.43	46.00
497.540	2.94	16.88	22.60	39.60	36.82	9.18	46.00
622.670	3.45	18.25	22.60	33.80	32.90	13.10	46.00
796.300	4.16	23.74	22.60	31.60	36.91	9.09	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11b)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

134.760	1.45	7.84	22.60	46.40	33.08	10.42	43.50
297.720	2.12	13.51	22.60	43.80	36.82	9.18	46.00
* 396.660	2.52	16.14	22.60	44.40	40.46	5.54	46.00
497.540	2.94	17.80	22.60	40.80	38.94	7.06	46.00
621.700	3.45	19.09	22.60	38.60	38.54	7.46	46.00
796.300	4.16	22.52	22.60	34.20	38.28	7.72	46.00

Vertical

* 133.790	1.44	13.30	22.60	45.00	37.14	6.36	43.50
298.690	2.12	17.42	22.60	37.00	33.94	12.06	46.00
395.690	2.52	14.05	22.60	38.60	32.57	13.43	46.00
497.540	2.94	16.88	22.60	40.20	37.42	8.58	46.00
661.470	3.61	18.12	22.60	33.60	32.73	13.27	46.00
796.300	4.16	23.74	22.60	32.20	37.51	8.49	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 1 (IEEE 802.11g)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

133.790	1.44	7.75	22.60	48.40	34.99	8.51	43.50
281.230	2.05	13.30	22.60	42.60	35.35	10.65	46.00
* 497.540	2.94	17.80	22.60	44.20	42.34	3.66	46.00
622.670	3.45	19.01	22.60	40.40	40.26	5.74	46.00
796.300	4.16	22.52	22.60	34.40	38.48	7.52	46.00
925.310	4.69	25.16	22.60	29.00	36.26	9.74	46.00

Vertical

* 152.220	1.52	17.20	22.60	44.80	40.92	2.58	43.50
299.660	2.12	17.53	22.60	39.00	36.05	9.95	46.00
497.540	2.94	16.88	22.60	38.60	35.82	10.18	46.00
622.670	3.45	18.25	22.60	37.20	36.30	9.70	46.00
745.860	3.96	20.35	22.60	32.40	34.10	11.90	46.00
795.330	4.16	23.68	22.60	30.80	36.04	9.96	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 6 (IEEE 802.11g)

Frequency MHz	Cable Loss dB	Probe Factor dB/m	PreAMP dB	Reading Level dBuV	Emission Level dBuV/m	Margin dB	Limit dBuV/m
------------------	---------------------	-------------------------	--------------	--------------------------	-----------------------------	--------------	-----------------

Horizontal

133.790	1.44	7.75	22.60	48.00	34.59	8.91	43.50
277.350	2.03	12.86	22.60	44.00	36.30	9.70	46.00
396.660	2.52	16.14	22.60	41.00	37.06	8.94	46.00
* 497.540	2.94	17.80	22.60	43.20	41.34	4.66	46.00
621.700	3.45	19.09	22.60	39.00	38.94	7.06	46.00
796.300	4.16	22.52	22.60	33.60	37.68	8.32	46.00

Vertical

* 151.250	1.52	16.91	22.60	44.20	40.03	3.47	43.50
299.660	2.12	17.53	22.60	38.20	35.25	10.75	46.00
395.690	2.52	14.05	22.60	40.80	34.77	11.23	46.00
498.510	2.94	16.94	22.60	38.80	36.08	9.92	46.00
623.640	3.46	18.26	22.60	35.00	34.12	11.88	46.00
796.300	4.16	23.74	22.60	30.80	36.11	9.89	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : General Radiated Emission
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11g)

Frequency	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor		Level	Level		
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

151.250	1.52	9.32	22.60	47.40	35.64	7.86	43.50
396.660	2.52	16.14	22.60	40.80	36.86	9.14	46.00
* 497.540	2.94	17.80	22.60	44.00	42.14	3.86	46.00
547.980	3.14	21.95	22.60	37.40	39.89	6.11	46.00
622.670	3.45	19.01	22.60	39.00	38.86	7.14	46.00
796.300	4.16	22.52	22.60	34.60	38.68	7.32	46.00

Vertical

* 151.250	1.52	16.91	22.60	45.60	41.43	2.07	43.50
321.970	2.22	16.30	22.60	40.60	36.52	9.48	46.00
498.510	2.94	16.94	22.60	39.00	36.28	9.72	46.00
623.640	3.46	18.26	22.60	34.40	33.52	12.48	46.00
745.860	3.96	20.35	22.60	32.80	34.50	11.50	46.00
796.300	4.16	23.74	22.60	32.60	37.91	8.09	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss - PreAMP.

5. Band Edge

5.1. Test Equipment

The following test equipment are used during the test:

RF Conducted Measurement:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2004	
2	No.1 OATS			Sep., 2003	


RF Radiated Measurement:

Item		Equipment	Manufacturer	Model No. / Serial No.	Last Cal.
1	X	Spectrum Analyzer	R & S	FSP40 / 100005	Aug., 2003
2		Pre-Amplifier	HP	8449B / 3008A01123	Feb., 2004
3		Pre-Amplifier	HP	8447D / 2944A09276	N/A
4		Loop Antenna	R & S	HFH2-Z2 / 833799/004	Sep., 2003
5		BiconiLog Antenna	Schwarzbeck	VULB 9166 / 1061	Sep., 2003
6		Bilog Antenna	Chase	CBL6112B / 2455	Sep., 2003
7	X	Horn Antenna	Schwarzbeck	BBHA 9120D / BBHA9120D312	Jul., 2003
8		No.1 OATS			Sep., 2003


- Note:
1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

5.2. Test Setup

RF Conducted Measurement:

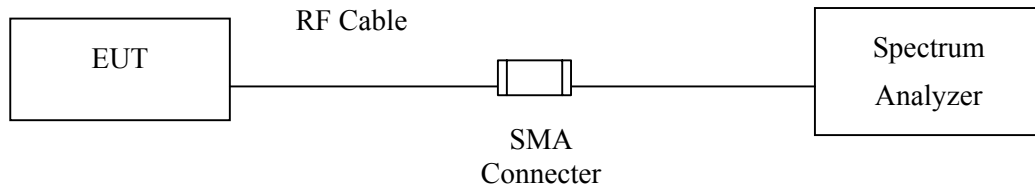

RF Radiated Measurement:

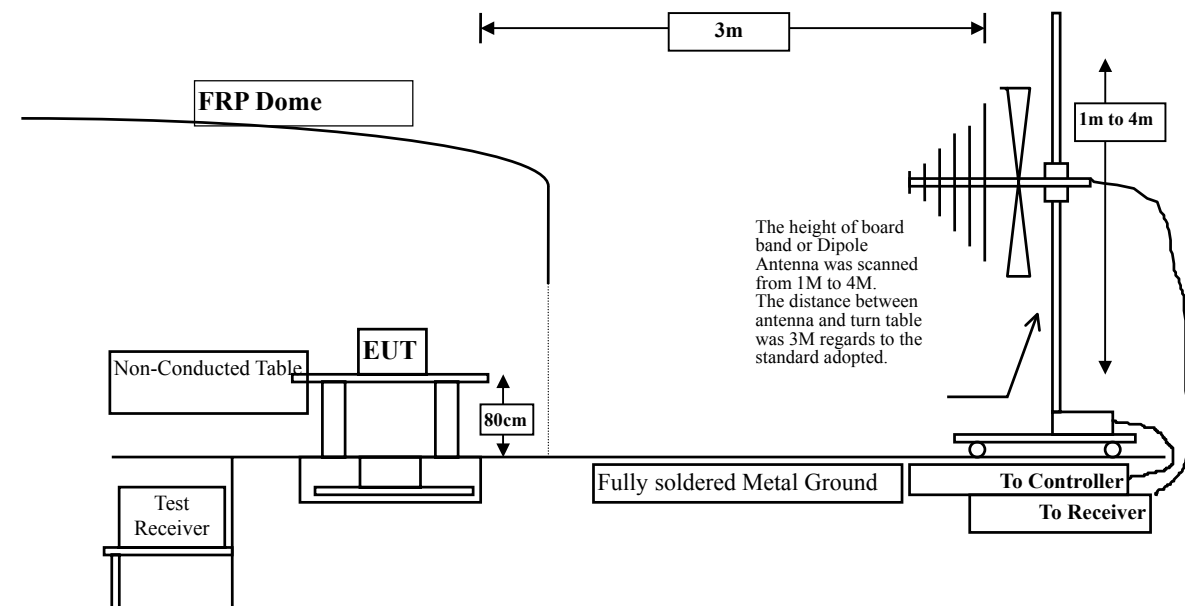

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.


The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2001 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

Product	:	Prestige 964 Cable Router with 11g AP
Test Item	:	Band Edge
Test Site	:	No.1 OATS
Test Mode	:	Channel 1 (IEEE 802.11b)

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1	<2400	>20	Pass

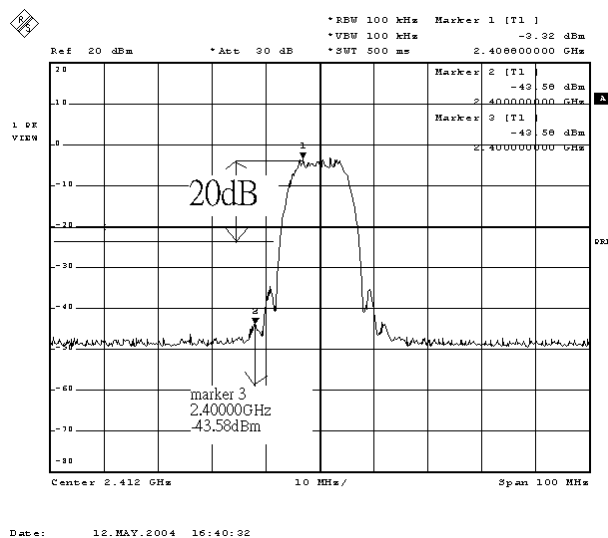

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11b)

RF Radiated Measurement: (Peak Detector)

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	PreAMP (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2493.400	24.44	27.58	2.91	0.00	54.93	74	Pass
11 (Vertical)	2490.600	24.87	27.58	2.91	0.00	55.36	74	Pass

Figure Channel 11:

(Horizontal)


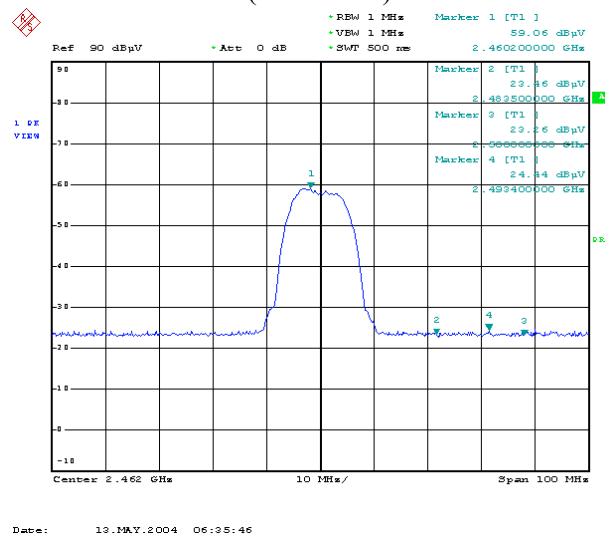


Figure Channel 11:

(Vertical)

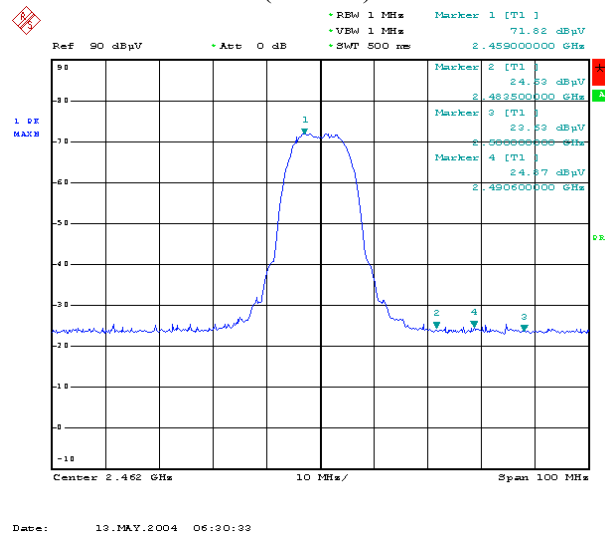

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11b)

RF Radiated Measurement: (Average Detector)

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	PreAMP (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2493.400	11.06	27.58	2.91	0.00	41.55	54	Pass
11 (Vertical)	2487.600	11.55	27.58	2.91	0.00	42.04	54	Pass

Figure Channel 11:

(Horizontal)


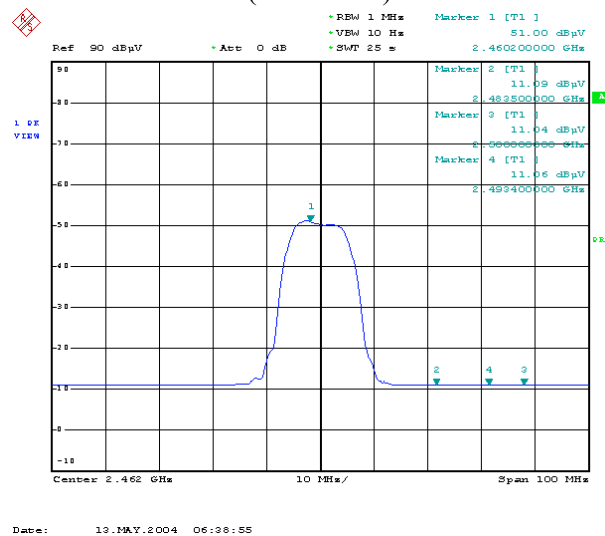


Figure Channel 11:

(Vertical)

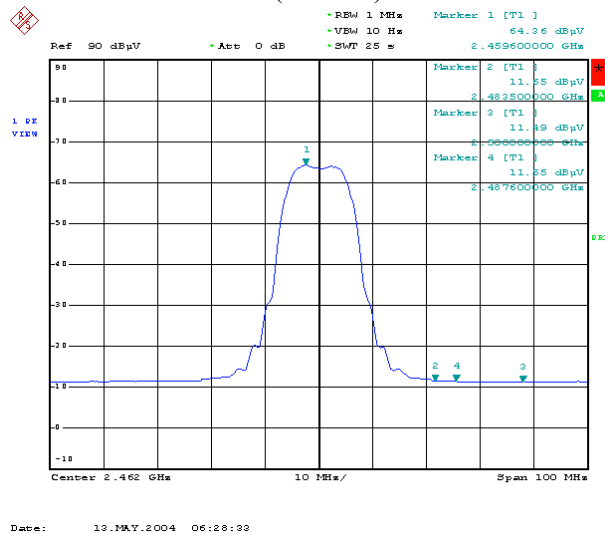


Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 1 (IEEE 802.11g)

RF Conducted Measurement:

Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
1	<2400	>20	Pass

Figure Channel 1:

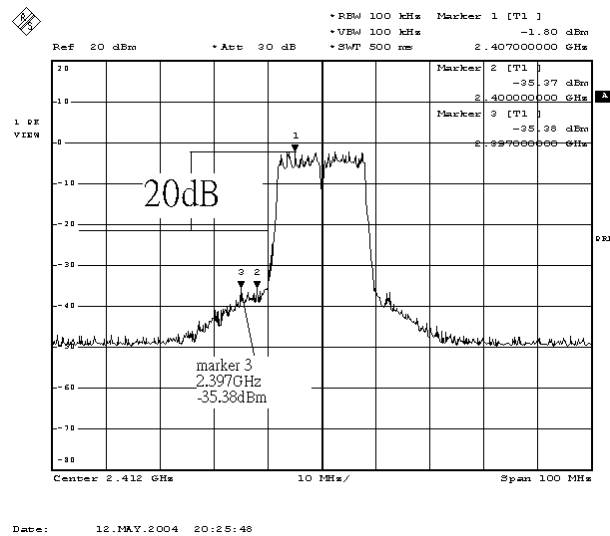

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11g)

RF Radiated Measurement: (Peak Detector)

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	PreAMP (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2491.000	25.09	27.58	2.91	0.00	55.58	74	Pass
11 (Vertical)	2484.600	30.52	27.58	2.90	0.00	61.00	74	Pass

Figure Channel 11:

(Horizontal)


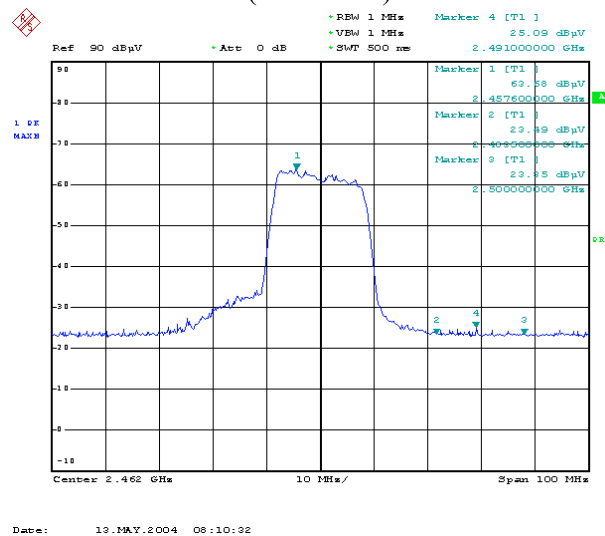


Figure Channel 11:

(Vertical)

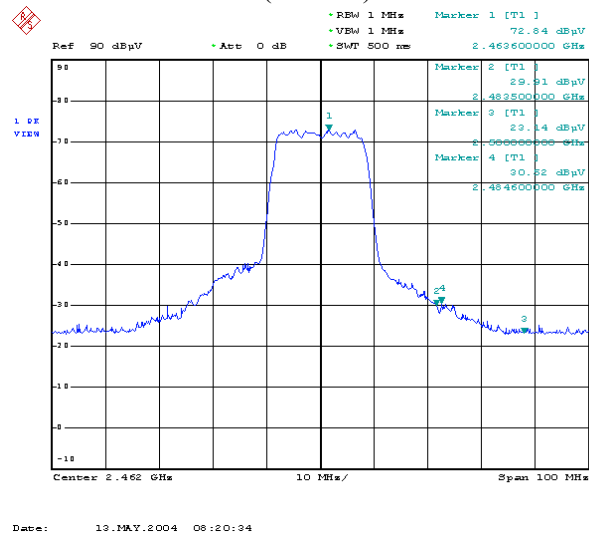

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Band Edge
 Test Site : No.1 OATS
 Test Mode : Channel 11 (IEEE 802.11g)

RF Radiated Measurement: (Average Detector)

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Probe Factor (dB/m)	Cable Loss (dB)	PreAMP (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Result
11(Horizontal)	2497.800	11.01	27.58	2.91	0.00	41.50	54	Pass
11 (Vertical)	2483.600	12.81	27.58	2.90	0.00	43.29	54	Pass

Figure Channel 11:


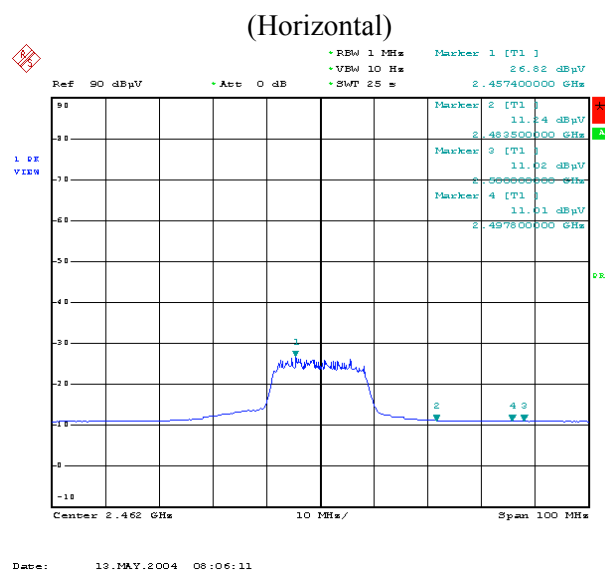


Figure Channel 11:

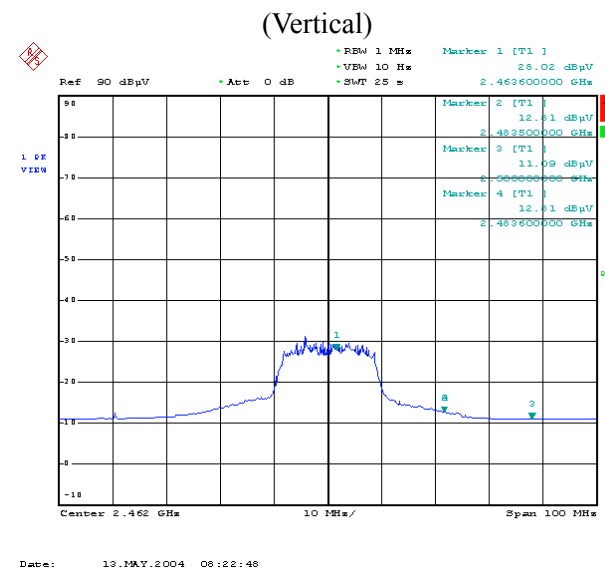

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

6. Occupied Bandwidth


6.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2004	
2	No.1 OATS			Sep., 2003	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

6.2. Test Setup

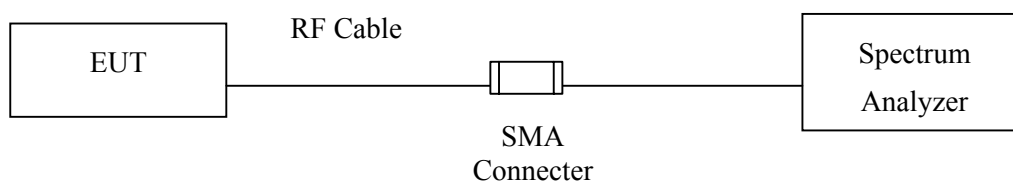

6.3. Limits


The minimum 6dB bandwidth shall be at least 500kHz.

6.4. Test Result of Occupied Bandwidth

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Occupied Bandwidth
 Test Site : No.1 OATS
 Test Mode : Normal Operation (IEEE 802.11b)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412	11600	>500	Pass
6	2437	11400	>500	Pass
11	2462	11400	>500	Pass

Channel 1:

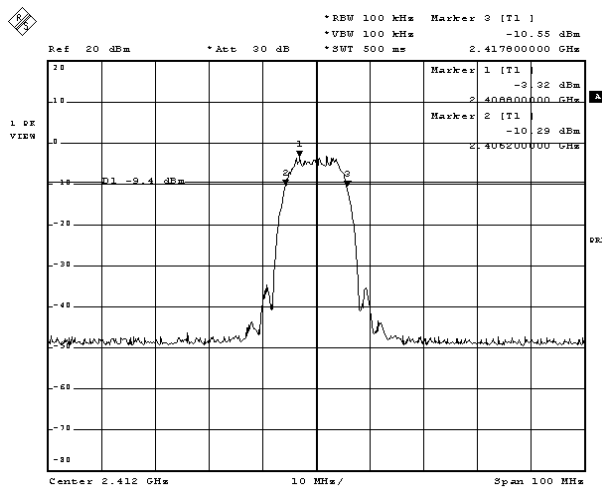


Date: 12.MAY.2004 16:41:47

Channel 6

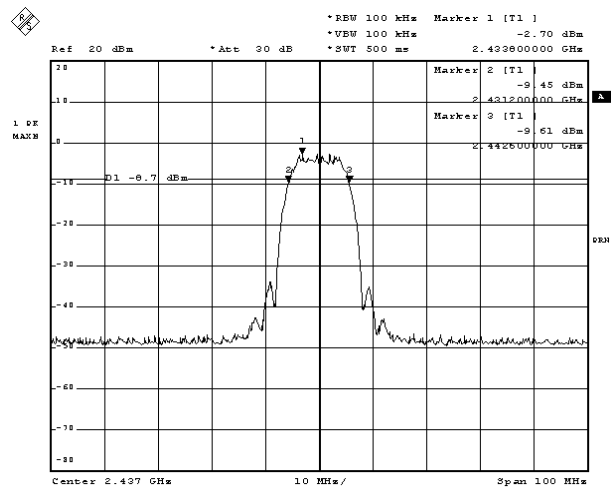

Date: 12.MAY.2004 16:45:42

Channel 11:

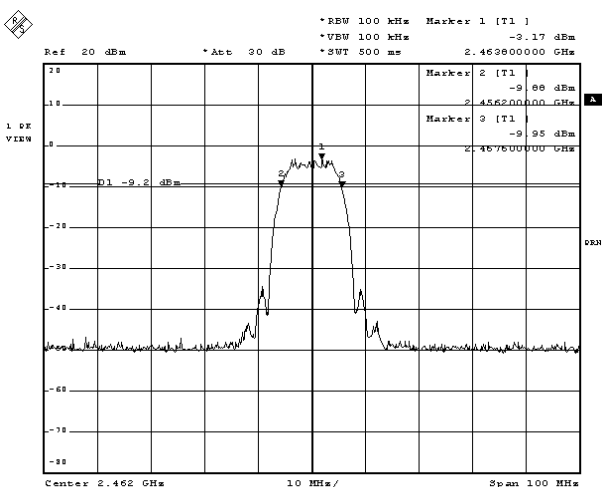


Date: 12.MAY.2004 16:44:34

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Occupied Bandwidth
 Test Site : No.1 OATS
 Test Mode : Normal Operation (IEEE 802.11g)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412	16800	>500	Pass
6	2437	16800	>500	Pass
11	2462	16800	>500	Pass

Channel 1:

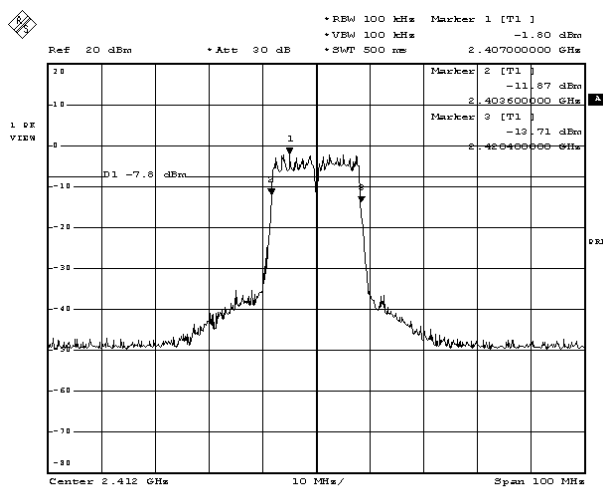


Date: 12.MAY.2004 20:29:19

Channel 6

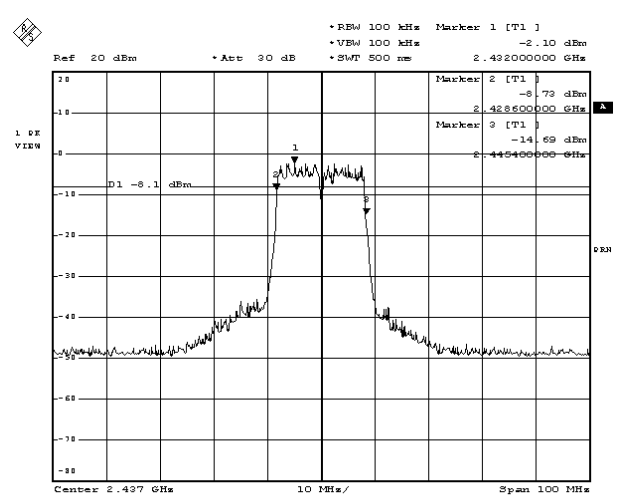

Date: 12.MAY.2004 20:29:02

Channel 11:

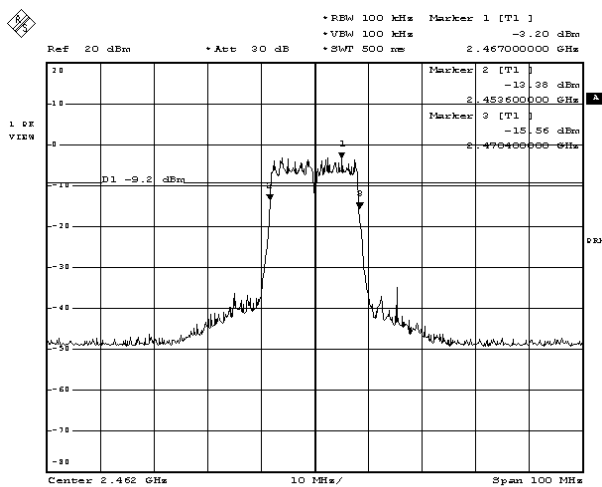

Date: 12.MAY.2004 20:36:23

7. Power Density


7.1. Test Equipment

The following test equipment are used during the test:

Item	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
1	Spectrum Analyzer	R & S	FSP / 100561	Mar., 2004	
2	No.1 OATS			Sep., 2003	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

7.2. Test Setup

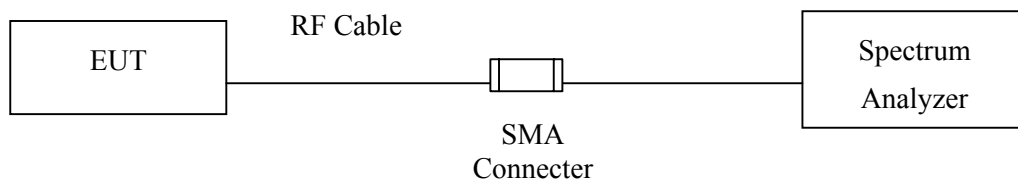

7.3. Limits


The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

7.4. Test Result of Power Density

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Power Density
 Test Site : No.1 OATS
 Test Mode : Normal Operation (IEEE 802.11b)


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
1	2413.404	-15.43	< 8dBm	Pass
6	2436.970	-15.49	< 8dBm	Pass
11	2463.404	-15.71	< 8dBm	Pass

Channel 1:

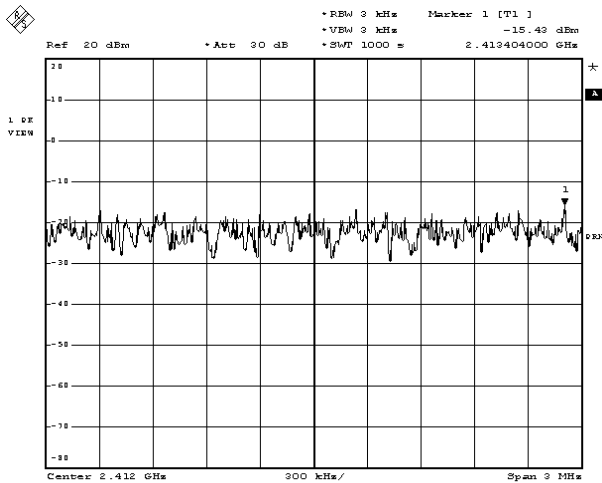


Date: 12.MAY.2004 17:05:42

Channel 6

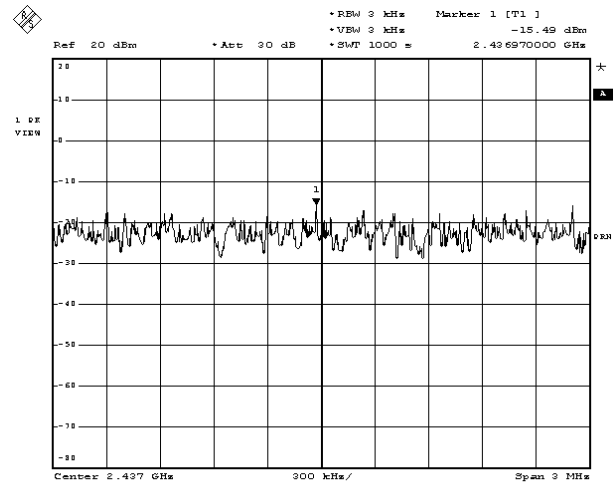

Date: 12.MAY.2004 17:25:02

Channel 11:

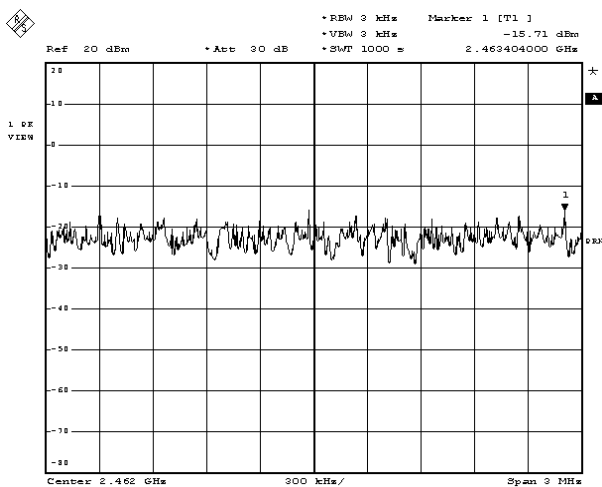


Date: 12.MAY.2004 17:49:03

Product : Prestige 964 Cable Router with 11g AP
 Test Item : Power Density
 Test Site : No.1 OATS
 Test Mode : Normal Operation (IEEE 802.11g)


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
1	2412.564	-15.46	< 8dBm	Pass
6	2437.61	-16.58	< 8dBm	Pass
11	2461.196	-18.51	< 8dBm	Pass

Channel 1:

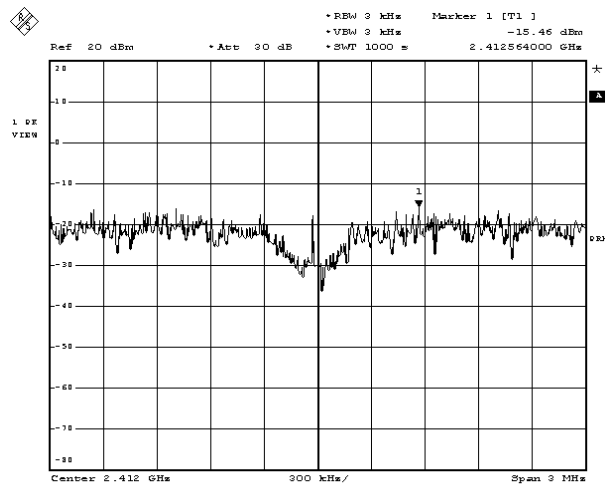


Date: 12.MAY.2004 21:07:11

Channel 6

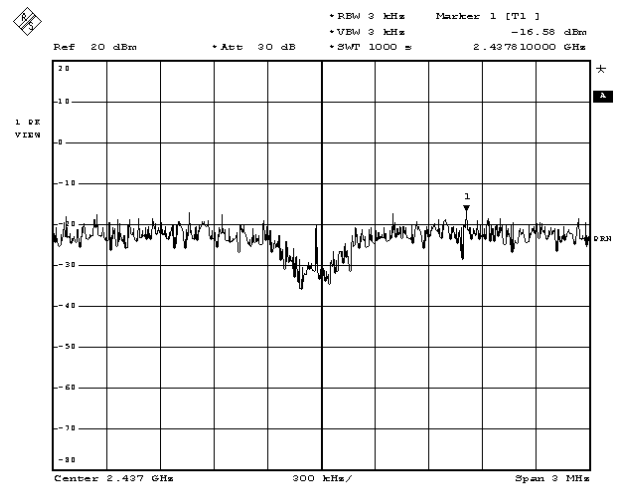

Date: 12.MAY.2004 21:02:50

Channel 11:

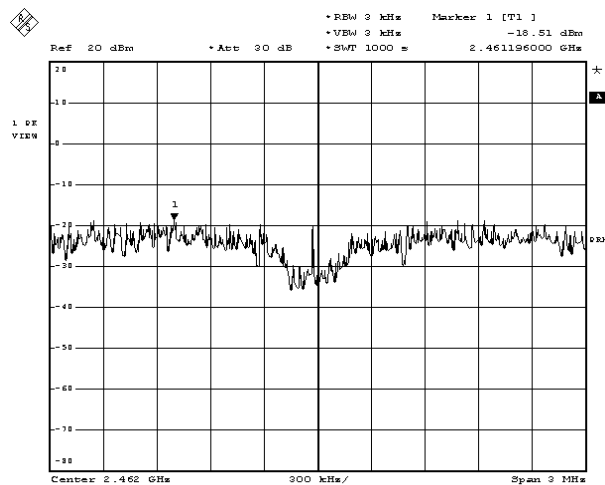

Date: 12.MAY.2004 20:57:37

8. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs