

ASAP Technology(Jiangxi) Co., Ltd.

# TEST REPORT

**SCOPE OF WORK**

FCC TESTING—ONB18WI701, LACA090

**REPORT NUMBER**

180604014SZN-001

**ISSUE DATE**

11 June 2018

**[REVISED DATE]**

[-----]

**PAGES**

35

**DOCUMENT CONTROL NUMBER**

FCC ID 209\_b

© 2017 INTERTEK



**ASAP Technology(Jiangxi) Co., Ltd.**Application  
For  
Certification**FCC ID: 2APXNLACA090****Wireless Charger****Model: ONB18WI701, LACA090****Transmitter**

Report No.: 180604014SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-17]

**Prepared and Checked by:****Approved by:**

---

**Surel Guo**  
**Engineer**

---

**Kidd Yang**  
**Technical Supervisor**  
**Date: 11 June 2018**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Service Shenzhen Ltd. Longhua Branch**

1F/2F, Building B, QiaoAn Scientific Technology Park, Shangheng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Miscellaneous Information
<i>EXHIBIT 11:</i>	Test Equipment List

## MEASUREMENT/TECHNICAL REPORT

### Wireless Charger

**Model: ONB18WI701**

**FCC ID: 2APXNLACA090**

This report concerns (check one) Original Grant ☒ Class II Change ☐

Equipment Type: DCD - Part 15 Low Power Transmitter Below 1705 kHz

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until :                       
date

Company Name agrees to notify the Commission by:                       
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-17] Edition] provision.

Report prepared by:

**Surel Guo**  
**Intertek Testing Services Shenzhen Ltd.**  
**Longhua Branch**  
1F/2F, Building B, QiaoAn Scientific Technology  
Park, Shangheng Community, Guanhu Subdistrict,  
Longhua District, Shenzhen, P.R. China  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

## Table of Contents

<b>1.0</b>	<b><u>Summary of Test results</u></b>	<b>7</b>
<b>2.0</b>	<b><u>General Description</u></b>	<b>9</b>
2.1	Product Description	9
2.2	Related Submittal(s) Grants	9
2.3	Test Methodology	9
2.4	Test Facility	9
<b>3.0</b>	<b><u>System Test Configuration</u></b>	<b>11</b>
3.1	Justification	11
3.2	EUT Exercising Software	11
3.3	Special Accessories	11
3.4	Measurement Uncertainty	11
3.5	Equipment Modification	12
3.6	Support Equipment List and Description	12
<b>4.0</b>	<b><u>Measurement Results</u></b>	<b>13</b>
4.1	Field Strength Calculation	14
4.2	Radiated Emission Configuration Photograph	15
4.3	Radiated Spurious Emission	15
4.4	Conducted Emission Configuration Photograph	18
4.5	Conducted Emission	18
<b>5.0</b>	<b><u>Equipment Photographs</u></b>	<b>22</b>
<b>6.0</b>	<b><u>Product Labelling</u></b>	<b>24</b>
<b>7.0</b>	<b><u>Technical Specifications</u></b>	<b>26</b>
<b>8.0</b>	<b><u>Instruction Manual</u></b>	<b>28</b>
<b>9.0</b>	<b><u>Miscellaneous Information</u></b>	<b>30</b>
9.1	Emissions Test Procedures	30
9.2	Emissions Test Procedures (cont'd)	31
<b>10.0</b>	<b><u>Confidentiality Request</u></b>	<b>33</b>
<b>11.0</b>	<b><u>Test Equipment List</u></b>	<b>35</b>

### List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

## EXHIBIT 1

### SUMMARY OF TEST RESULTS

## 1.0 Summary of Test results

### Wireless Charger

**Model: ONB18WI701**

**FCC ID: 2APXNLACA090**

TEST ITEM	REFERENCE	RESULTS
Power Line Conducted Emissions	15.207	Pass
Transmitter Radiated Emissions	15.209	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: 1. The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.



## EXHIBIT 2

### GENERAL DESCRIPTION

## 2.0 General Description

### 2.1 Product Description

The Equipment Under Test (EUT) is a Wireless Charger operating at 110-205 kHz. The EUT is powered by adaptor (Input: AC100-240V, 50/60Hz, 0.5A; Output: DC5V, 2A). For more detailed features description, please refer to the user's manual.

Antenna Type: Integral Antenna (embedded coil antenna)

The Model: LACA090 is the same as the Model: ONB18WI701 in hardware and electrical aspect. The difference in model number serves as marketing strategy.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 2.2 Related Submittal(s) Grants

This is an application for certification of the Wireless Charger portion.

### 2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

### 2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are Intertek **Testing Services Shenzhen Ltd. Longhua Branch** and located at 1F/2F, Building B, QiaoAn Scientific Technology Park, Shangheng Community, Guanhu Subdistrict, Longhua District, Shenzhen, P.R. China. This test facility and site measurement data have been fully placed on file with File Number: CN1188.

## EXHIBIT 3

### SYSTEM TEST CONFIGURATION

### 3.0 System Test Configuration

#### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by an adaptor with 120V/60Hz input during the test. The test system was pre-scanning tested based on the consideration of following EUT operation mode. Only the worst case data is shown in the report.

Pertest mode	Description
Mode 1	Standby mode
Mode 2	Mobile phone is charging at 0% battery power
Mode 3	Mobile phone is charging at 50% battery power
Mode 4	Mobile phone is charging at 100% battery power

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 4.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the styrene turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

#### 3.3 Special Accessories

There is no special accessories necessary for compliance of this product.

#### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.5 Equipment Modification

Any modifications installed previous to testing by ASAP Technology(Jiangxi) Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

### 3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Detail
Adapter	AOHAI	Model: MDY-08-EO Input: AC100-240V, 50/60Hz, 0.5A Output: DC 5V, 2A
Mobile Phone	Samsung	S7
USB Cable	N/A	Unshielded, Length 3 feet

## EXHIBIT 4

## MEASUREMENT RESULTS

## 4.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

### Example

Assume a receiver reading of 62.0dB $\mu$ V is obtained. The antenna factor of 7.4dB and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is 32dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0\text{dB}\mu\text{V}$$

$$AF = 7.4\text{dB}$$

$$CF = 1.6\text{dB}$$

$$AG = 29.0\text{dB}$$

$$PD = 0\text{dB}$$

$$AV = -10\text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8\mu\text{V/m}$$

#### 4.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

#### 4.3 Radiated Spurious Emission

Worst Case Radiated Spurious Emission  
at  
60.070MHz

Judgement: Passed by 12.2dB margin

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.



Applicant: ASAP Technology(Jiangxi) Co., Ltd.

Date of Test: June 7, 2018

Model: ONB18WI701

Worst Case Operating Mode: Mode 2

### Radiated Emissions (30MHz – 1000MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	60.070	31.4	20.0	8.0	19.4	40.0	-20.6
Horizontal	120.210	31.0	20.0	9.4	20.4	43.5	-23.1
Horizontal	296.265	34.3	20.0	15.4	29.7	46.0	-16.3
Vertical	60.070	39.8	20.0	8.0	27.8	40.0	-12.2
Vertical	117.300	41.3	20.0	9.5	30.8	43.5	-12.7
Vertical	298.205	30.5	20.0	15.4	25.9	46.0	-20.1

- NOTES:
1. Quasi-Peak detector is used for frequency below 1GHz.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. All emissions are below the QP limit.

Applicant: ASAP Technology(Jiangxi) Co., Ltd.

Date of Test: June 7, 2018

Model: ONB18WI701

Worst Case Operating Mode: Mode 2

### Fundamental & Spurious Emission Below 30MHz

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Distance Factor (-dB)	Calculated at 300m (dBμV/m)	Limit at 300m (dBμV/m)	Margin (dB)
Horizontal	0.115	62.1	0.0	16.4	78.5	80	-1.5	26.4	-27.9
Horizontal	0.230	36.7	0.0	16.2	52.9	80	-27.1	20.3	-47.4
Horizontal	0.345	36.8	0.0	16.0	52.8	80	-27.2	16.8	-44.0

- Notes:
1. The specified limits of frequency band 9~90 KHz, 110~490 KHz are in average and measurements are made with peak detectors. Quasi-Peak detector is used for other frequency band.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Loop antenna is used for the emission under 30MHz.
  5. Horizontal and Vertical polarization were tested and Only the worst Case data is shown.

#### 4.4 Conducted Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: conducted photos.pdf.

#### 4.5 Conducted Emission

Worst Case Conducted Configuration  
at  
18.954MHz

Judgement: Passed by 4.4dB margin

Applicant: ASAP Technology(Jiangxi) Co., Ltd.

Date of Test: June 8, 2018


Model: ONB18WI701

Worst Case Operating Mode: Mode 2

Phase: Live

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

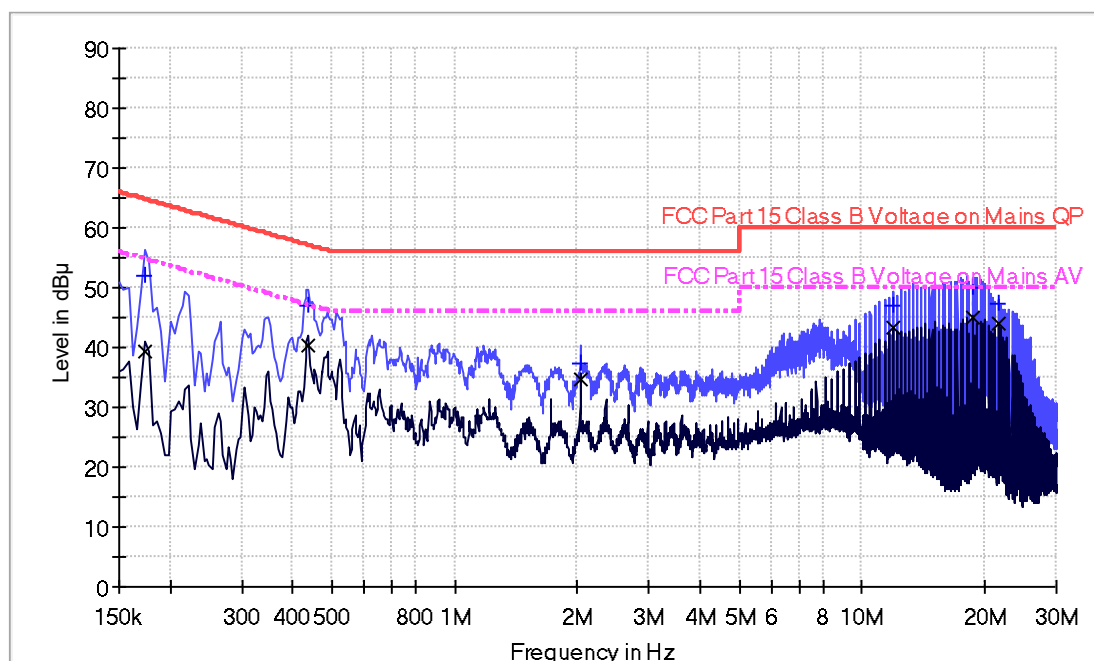

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	52.0	9.000	L1	9.7	12.8	64.8
0.438000	47.1	9.000	L1	9.7	10.0	57.1
2.034000	37.2	9.000	L1	9.7	18.8	56.0
11.938000	46.9	9.000	L1	10.0	13.1	60.0
18.648000	50.1	9.000	L1	10.3	9.9	60.0
21.554000	47.3	9.000	L1	10.5	12.7	60.0

### Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	39.2	9.000	L1	9.7	15.6	54.8
0.438000	40.4	9.000	L1	9.7	6.7	47.1
2.034000	34.6	9.000	L1	9.7	11.4	46.0
11.938000	43.5	9.000	L1	10.0	6.5	50.0
18.648000	44.9	9.000	L1	10.3	5.1	50.0
21.554000	44.0	9.000	L1	10.5	6.0	50.0

Applicant: ASAP Technology(Jiangxi) Co., Ltd.

Date of Test: June 8, 2018


Model: ONB18WI701

Worst Case Operating Mode: Mode 2

Phase: Neutral

## Graphic / Data Table

### Conducted Emissions Pursuant to FCC 15.107: Emissions Requirement

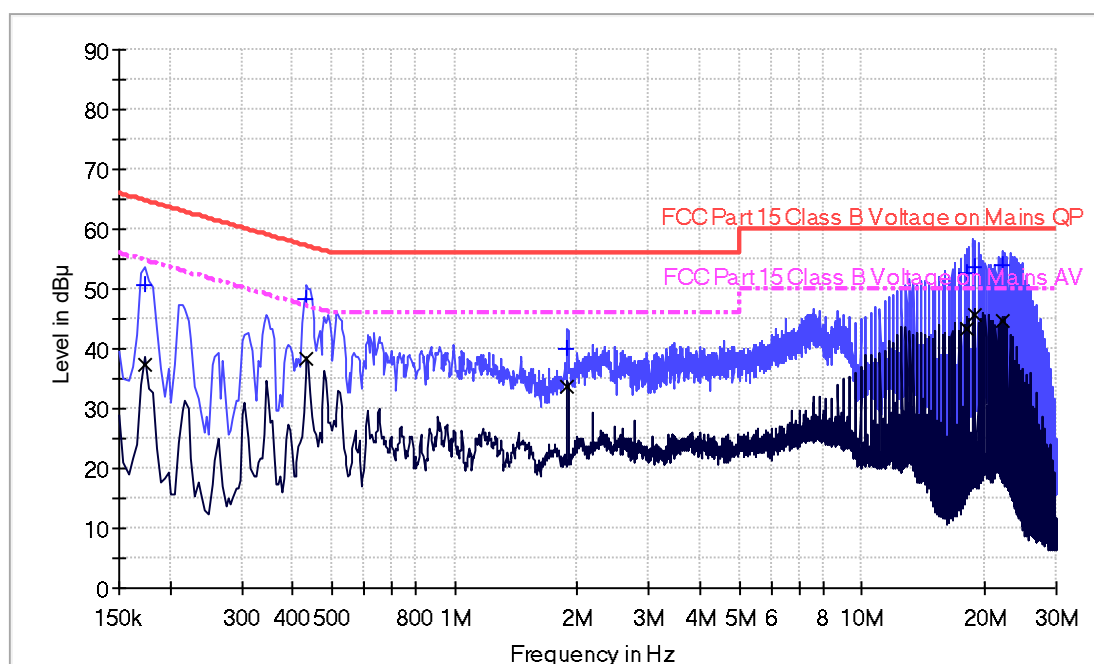

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.174000	50.6	9.000	N	9.7	14.2	64.8
0.434000	48.3	9.000	N	9.7	8.9	57.2
1.894000	39.9	9.000	N	9.7	16.1	56.0
18.078000	52.8	9.000	N	10.2	7.2	60.0
18.954000	53.8	9.000	N	10.2	6.2	60.0
22.162000	53.9	9.000	N	10.4	6.1	60.0

### Limit and Margin AV

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.174000	37.4	9.000	N	9.7	17.4	54.8
0.434000	38.2	9.000	N	9.7	9.0	47.2
1.894000	33.6	9.000	N	9.7	12.4	46.0
18.078000	43.5	9.000	N	10.2	6.5	50.0
18.954000	45.6	9.000	N	10.2	4.4	50.0
22.162000	44.7	9.000	N	10.4	5.3	50.0

## EXHIBIT 5

### EQUIPMENT PHOTOGRAPHS

## 5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

## EXHIBIT 6

## PRODUCT LABELLING



## 6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

## EXHIBIT 7

### TECHNICAL SPECIFICATIONS

## 7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

## EXHIBIT 8

## INSTRUCTION MANUAL

## 8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## EXHIBIT 9

### MISCELLANEOUS INFORMATION

## 9.0 Miscellaneous Information

This miscellaneous information includes emission measuring procedure

### 9.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Average detector is used for 9–90 KHz, 110–490 KHz and Quasi-Peak detector is used for other frequency band. The IF bandwidth used for measurement of radiated signal strength was 10 KHz for emission below 30 MHz and 120 KHz for emission from 30 MHz to 1000 MHz.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz up to the 1GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

## 9.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 9.1).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.



## EXHIBIT 10

### CONFIDENTIALITY REQUEST

## 10.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

## EXHIBIT 11

### TEST EQUIPMENT LIST

## 11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	20-Sep-2017	20-Sep-2018
SZ185-01	EMI Receiver	R&S	ESCI	100547	24-Jan-2018	24-Jan-2019
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	11-May-2018	11-May-2019
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	5-Jun-2018	5-Jun-2019
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	7-Jul-2017	7-Jul-2018
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	24-Jan-2018	24-Jan-2019
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Jan-2017	16-Jan-2019
SZ062-02	RF Cable	RADIAL	RG 213U	--	8-Jan-2018	8-Jul-2018
SZ062-05	RF Cable	RADIAL	0.04-26.5GHz	--	16-Mar-2018	16-Sep-2018
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	16-Mar-2018	16-Sep-2018
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	30-Oct-2017	30-Oct-2018
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	12-Jul-2017	12-Jul-2018
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2019