

Rev: 01

Page: 1 of 29

## **Appendix B - DAE & Probe Calibration Certificate**

Calibration Laboratory of Schmid & Partner Engineering AG eughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

SGS-TW (Auden) Certificate No: DAE4-1665\_Mar21 **CALIBRATION CERTIFICATE** Object DAE4 - SD 000 D04 BO - SN: 1665 Calibration procedure(s) QA CAL-06.v30 Calibration procedure for the data acquisition electronics (DAE) Calibration date: March 01, 2021 This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Primary Standards ID# Cal Date (Certificate No.) Scheduled Calibration Keithley Multimeter Type 2001 SN: 0810278 07-Sep-20 (No:28647) Sep-21 Secondary Standards Check Date (in house) Scheduled Check SE UWS 053 AA 1001 07-Jan-21 (in house check) Auto DAE Calibration Unit In house check: Jan-22 Calibrator Box V2.1 SE UMS 006 AA 1002 07-Jan-21 (in house check) In house check: Jan-22 Name Function Adrian Gehring Laboratory Technician Sven Kühn Deputy Manager

Certificate No: DAE4-1665\_Mar21

Page 1 of 5

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Rev: 01

Page: 2 of 29

Calibration Laboratory of Schmid & Partner Engineering AG eughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary

data acquisition electronics

Connector angle information used in DASY system to align probe sensor X to the robot

coordinate system.

#### Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
  - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
  - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
  - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
  - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - Input resistance: Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
  - Power consumption: Typical value for information. Supply currents in various operating

Certificate No: DAE4-1665 Mar21

Page 2 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Rev: 01

Page: 3 of 29

#### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: Low Range: 1LSB = 1LSB = full range = -100...+300 mV full range = -1......+3mV 6.1µV 61nV. DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Υ	Z
High Range	404.502 ± 0.02% (k=2)	404.818 ± 0.02% (k=2)	404.763 ± 0.02% (k=2)
Low Range	3.97893 ± 1.50% (k=2)	4.00708 ± 1.50% (k=2)	3.97737 ± 1.50% (k=2)

#### Connector Angle

A CONTRACTOR OF PARTY	
Connector Angle to be used in DASY system	68.5 ° ± 1 °

Certificate No: DAE4-1665\_Mar21

Page 3 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 4 of 29

#### Appendix (Additional assessments outside the scope of SCS0108)

### 1. DC Voltage Linearity

High Range	Reading (µV)	Difference (μV)	Error (%)
Channel X + Input	199989.64	-1.90	-0.00
Channel X + Input	20001,91	0,52	0.00
Channel X - Input	-19999.87	1.77	-0.01
Channel Y + Input	199990.64	-0.90	-0.00
Channel Y + Input	19999.85	-1.50	-0.01
Channel Y - Input	-20003.55	-1.93	0.01
Channel Z + Input	199993.26	1,72	0.00
Channel Z + Input	19998.83	-2.48	-0.01
Channel Z - Input	-20003.66	-2.00	0.01

Low Range	Reading (μV)	Difference (µV)	Error (%)
Channel X + Input	2000.58	-0.17	-0.01
Channel X + Input	201.86	0.70	0.35
Channel X - Input	-198.61	0,13	-0.07
Channel Y + Input	2000.35	-0.48	-0.02
Channel Y + Input	200.34	-0.78	-0.39
Channel Y - Input	-200.76	-2.00	1.00
Channel Z + Input	2000.19	-0.54	-0.03
Channel Z + Input	199.96	-1,10	-0.55
Channel Z - Input	-199.80	-0.91	0.46

#### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec: Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	-1.73	-3.63
	- 200	5.50	3.14
Channel Y	200	-0.28	0.20
	- 200	-2.79	-3.02
Channel Z	200	-14.37	-14.41
	- 200	13.41	13.00

#### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	- 1	0.59	-2,26
Channel Y	200	4.96		2.08
Channel Z	200	8.67	2.37	*

Certificate No: DAE4-1665 Mar21

Page 4 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 5 of 29

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16090	15445
Channel Y	16165	16597
Channel Z	16319	16701

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (µV)
Channel X	-0.30	-1.90	1.08	0.48
Channel Y	-1.12	-2.27	0.05	0.45
Channel Z	-0.69	-1.94	0.93	0.43

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9	
Supply (- Vcc)	-7.6	

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)	
Supply (+ Vcc)	+0.01	+6	+14	
Supply (- Vcc)	-0.01	-8	-9	

Certificate No: DAE4-1665\_Mar21

Page 5 of 5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報先结里僅對剛建之樣是各書,同時件樣是僅是200千。木報先去經太公司事而許可,不可執份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Rev: 01

Page: 6 of 29

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kallbrierdienst Service suisse d'étalonnage Servizio svizzero di tarature Swiss Calibration Service

Accreditation No.: SCS 0108 Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Cartificate No: EX3-7375\_Dec21

## CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:7375

Calibration procedure(s)

Auden

QA CAL-01.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7

Calibration procedure for dosimetric E-field probes

Calibration date:

December 20, 2021

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI) The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration).

Primary Standards	ID	Cal Dale (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: CC2552 (20x)	09-Apr-21 (No. 217-03343)	Apr-22
DAE4	SN: 660	23-Dec-20 (No. DAE4-660_Dec20)	Dec-21
Reference Probe ES3DV2	SN: 3013	30-Dec-20 (No. ES3-3013_Dec20)	Dec-21
Secondary Standards	ID:	Check Date (in house)	Scheduled Chesk
Power meter E4419B	SN GB41293874	06-Apr-16 (in house check Jun-20)	in hause check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	05-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	in house check: Oct-22

Signature Function Leff Klysner Laboratory Technician Calibrated by Niets Kuster Quality Manager Approved by This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Certificate No: EX3-7375\_Dec21

Page 1 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Rev: 01

Page: 7 of 29

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kallbrierdienst
C Service suisse d'étalonnage
Servizio svizzero di baratura
Swiss Célibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL lissue simulating liquid sensitivity in tree space ConvF sensitivity in TSL / NORMx.y.z diode compression point

CF crest factor (1/duty\_cycle) of the RF signal
A, B, C, D modulation dependent linearization parameters

Polarization # (profation around probe axis

Polarization # 3 rotation around an axis that is in the plane normal to probe axis (at measurement center)

i.e., 4 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices -Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 8 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
   NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E<sup>z</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z; A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for i > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMX,y,z.\* ConvF. whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

Certificate No: EX3-7375\_Dec21

Page 2 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有說明,件報先结里僅對剛建之樣是各書,同時件樣是僅是200千。木報先去經太公司事而許可,不可執份複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Rev: 01

Page: 8 of 29

December 20, 2021 EX3DV4 - SN:7375

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7375

#### **Rasic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) <sup>2</sup> ) <sup>A</sup>	0.50	0.43	0.46	± 10.1 %
DCP (mV) <sup>B</sup>	94.9	97.7	97.8	

Calibration Possilts for Modulation Resnonse

UID	Communication System Name		A dB	B dBõV	С	D dB	VR mV	Max dev.	Max Unc <sup>E</sup> (k=2)	
0	CW	X	0.00	0.00	1.00	0.00	135.9	± 3.0 %	± 4.7 %	
	1	Y	0.00	0.00	1.00		145.2			
		Z	0.00	0.00	1.00		147.0			
10352-	Pulse Waveform (200Hz, 10%)	X	20.00	88.32	18.63	10.00	60.0	± 3.0 %	± 9.6 %	
AAA	, , , , , , , , , , , , , , , , , , , ,	Y	1.65	61.79	7.39		60.0			
		Z	16.48	85.69	17.74		60.0			
10353-	Pulse Waveform (200Hz, 20%)	X	20.00	92.39	19.32	6.99	80.0	± 2.7 %	± 9.6 %	
AAA		Y	0.78	60.00	5.38		80.0			
		Z	20.00	88.77	17.41		80.0			
10354-	Pulse Waveform (200Hz, 40%)	X	2.26	160.00	63.92	3.98	95.0	± 2.4 %	± 9.6 %	
AAA		Y	8.00	70.00	7.00		95.0			
		Z	20.00	90.03	16.40		95.0	1		
10355-	Pulse Waveform (200Hz, 60%)	X	0.06	60.00	100.00	2.22	120.0	± 2.5 %	± 9.6 %	
AAA	, , , , , , , , , , , , , , , , , , , ,	Y	0.30	60.00	2.95		120.0	]		
		Z	20.00	85.35	13.00		120.0			
10387-	QPSK Waveform, 1 MHz	X	6.25	93.19	27.13	1.00	150.0	±3.7% ±	± 3.7 %	± 9.6 %
AAA		Y	1.64	68.49	15.60		150.0			
		Z	1.56	66.31	14.74		150.0			
10388-	QPSK Waveform, 10 MHz	X	6.67	89.96	25.82	0.00	150.0	± 3.4 %	± 9.6 %	
AAA		Y	2.13	68.49	16.15		150.0			
		Z	2.10	67.70	15.56		150.0	1		
10396-	64-QAM Waveform, 100 kHz	X	4.21	81.73	25.89	3.01	150.0	± 3.2 %	± 9.6 %	
AAA		Y	1.74	65.29	17.75	1	150.0			
		Z	2.79	70.91	19.23		150.0			
10399-	64-QAM Waveform, 40 MHz	X	4.25	71.84	18.94	0.00	150.0	± 3.6 %	± 9.6 %	
AAA		Y	3.42	67.17	15.96		150.0			
		Z	3.41	66.91	15.69	1	150.0			
10414-	WLAN CCDF, 64-QAM, 40MHz	X	5.20	67.54	17.21	0.00	150.0	± 4.3 %	± 9.6 %	
AAA		Y	4.68	65.70	15.71		150.0			
		Z	4.74	65.50	15.51		150.0			

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-7375\_Dec21 Page 3 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5, 6 and 7).

Numerical linearization parameter: uncertainty not required.

Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the



Rev: 01

Page: 9 of 29

EX3DV4- SN:7375

December 20, 2021

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7375

#### Sensor Model Parameters

	C1 fF	C2 fF	α V-1	T1 ms.V <sup>-2</sup>	T2 ms.V <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	Т6
X	45.2	349.61	38.68	8.25	0.18	5.10	0.00	0.40	1.02
Y	32.3	246.82	37.12	3.79	0.00	4.96	0.00	0.00	1.01
Z	40.2	304.63	36.50	5.70	0.09	5.06	1.19	0.18	1.01

#### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-160.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EX3-7375\_Dec21

Page 4 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 10 of 29

December 20, 2021 EX3DV4- SN:7375

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7375

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
750	41.9	0.89	10.11	10.11	10.11	0.58	0.89	± 12.0 %
835	41.5	0.90	9.85	9.85	9.85	0.60	0.80	± 12.0 %
900	41.5	0.97	9.72	9.72	9.72	0.56	0.80	± 12.0 %
1450	40.5	1.20	8.72	8.72	8.72	0.45	0.80	± 12.0 %
1750	40.1	1.37	8.52	8.52	8.52	0.32	0.86	± 12.0 %
1900	40.0	1.40	8.33	8.33	8.33	0.33	0.86	± 12.0 %
2000	40.0	1.40	8.23	8.23	8.23	0.38	0.86	± 12.0 %
2300	39.5	1.67	7.81	7.81	7.81	0.29	0.90	± 12.0 %
2450	39.2	1.80	7.52	7.52	7.52	0.37	0.90	± 12.0 %
2600	39.0	1.96	7.44	7.44	7.44	0.41	0.90	± 12.0 %
3300	38.2	2.71	7.02	7.02	7.02	0.35	1.30	± 13.1 %
3500	37.9	2.91	6.95	6.95	6.95	0.35	1.30	± 13.1 %
3700	37.7	3.12	6.90	6.90	6.90	0.35	1.30	± 13.1 %
3900	37.5	3.32	6.56	6.56	6.56	0.40	1.60	± 13.1 9
4100	37.2	3.53	6.23	6.23	6.23	0.40	1.60	± 13.1 %
4200	37.1	3.63	6.20	6.20	6.20	0.40	1.60	± 13.1 9
4400	36.9	3.84	6.10	6.10	6.10	0.40	1.70	± 13.1 9
4600	36.7	4.04	6.09	6.09	6.09	0.40	1.70	± 13.1 9
4800	36.4	4.25	6.05	6.05	6.05	0.40	1.70	± 13.1 9
4950	36.3	4.40	5.75	5.75	5.75	0.40	1.80	± 13.1 %
5250	35.9	4.71	5.25	5.25	5.25	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.56	4.56	4.56	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.75	4.75	4.75	0.40	1.80	± 13.1 9

Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

\*At frequencies below 3 GHz, the validity of tissue parameters (c and c) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (c and c) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

\*Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-7375\_Dec21

Page 5 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Rev: 01

Page: 11 of 29

December 20, 2021 EX3DV4- SN:7375

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7375

#### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
750	55.5	0.96	10.41	10.41	10.41	0.51	0.80	± 12.0 %
835	55.2	0.97	10.03	10.03	10.03	0.29	1.09	± 12.0 %
900	55.0	1.05	9.95	9.95	9.95	0.36	0.98	± 12.0 %
1450	54.0	1.30	8.82	8.82	8.82	0.41	0.80	± 12.0 %
1750	53.4	1.49	8.54	8.54	8.54	0.44	0.86	± 12.0 %
1900	53.3	1.52	8.35	8.35	8.35	0.36	0.86	± 12.0 %
2000	53.3	1.52	8.00	8.00	8.00	0.35	0.86	± 12.0 %
2300	52.9	1.81	7.77	7.77	7.77	0.51	0.90	± 12.0 %
2450	52.7	1.95	7.61	7.61	7.61	0.51	0.90	± 12.0 %
2600	52.5	2.16	7.44	7.44	7.44	0.46	0.90	± 12.0 %
3300	51.6	3.08	6.97	6.97	6.97	0.40	1.30	± 13.1 %
3500	51.3	3.31	6.90	6.90	6.90	0.40	1.30	± 13.1 %
3700	51.0	3.55	6.60	6.60	6.60	0.40	1.30	± 13.1 %
3900	50.8	3.78	6.40	6.40	6.40	0.40	1.70	± 13.1 9
4100	50.5	4.01	6.15	6.15	6.15	0.40	1.70	± 13.1 9
4200	50.4	4.13	6.00	6.00	6.00	0.40	1.80	± 13.1 9
4400	50.1	4.37	5.94	5.94	5.94	0.40	1.80	± 13.1 9
4600	49.8	4.60	5.88	5.88	5.88	0.50	1.90	± 13.1 9
4800	49.6	4.83	5.60	5.60	5.60	0.50	1.90	± 13.1 9
4950	49.4	5.01	5.07	5.07	5.07	0.50	1.90	± 13.1 9
5250	48.9	5.36	4.65	4.65	4.65	0.50	1.90	± 13.1 °
5600	48.5	5.77	4.03	4.03	4.03	0.50	1.90	± 13.1 °
5750	48.3	5.94	4.19	4.19	4.19	0.50	1.90	± 13.1

<sup>&</sup>lt;sup>©</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10.5, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

\*\*At frequencies below 3 GHz, the validity of tissue parameters (a and a) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (a and a) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

\*\*AphsinDepth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-8 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-7375\_Dec21

Page 6 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 12 of 29

December 20, 2021 EX3DV4- SN:7375

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7375

## Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
6500	34.5	6.07	5.50	5.50	5.50	0.20	2.50	± 18.6 %
7000	33.9	6.65	5.45	5.45	5.45	0.25	2.50	± 18.6 %
8000	32.7	7.84	5.40	5.40	5.40	0.50	1.80	± 18.6 %
9000	31.5	9.08	5.35	5.35	5.35	0.50	1.80	± 18.6 %

Certificate No: EX3-7375\_Dec21

Page 7 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<sup>&</sup>lt;sup>C</sup> Frequency validity above 6GHz is ± 700 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
<sup>5</sup> At frequencies 6-10 GHz, the validity of tissue parameters (e and e) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.
<sup>6</sup> Alphal Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz; below ± 2% for frequencies between 3-6 GHz; and below ± 4% for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary.




Rev: 01

Page: 13 of 29

December 20, 2021 EX3DV4- SN:7375

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

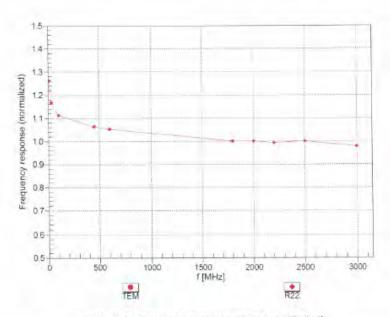

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Certificate No: EX3-7375\_Dec21

Page 8 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

f (886-2) 2298-0488



Rev: 01

Page: 14 of 29

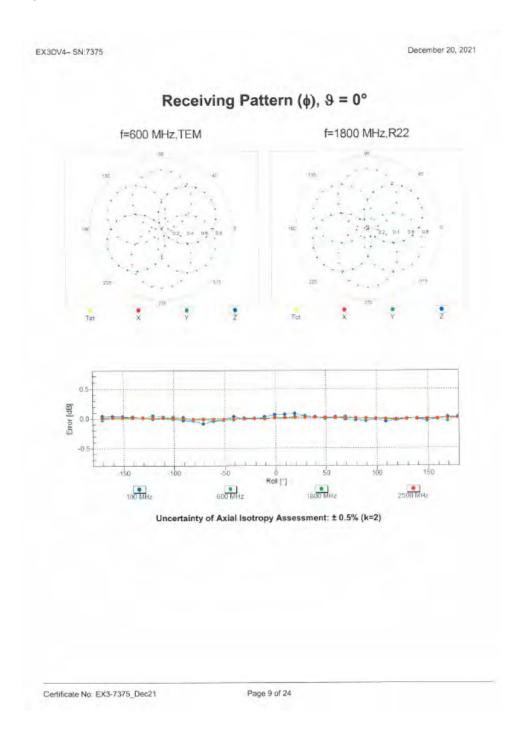

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law





Rev: 01

Page: 15 of 29

December 20, 2021 EX3DV4-SN:7375

# Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f<sub>eval</sub>= 1900 MHz)

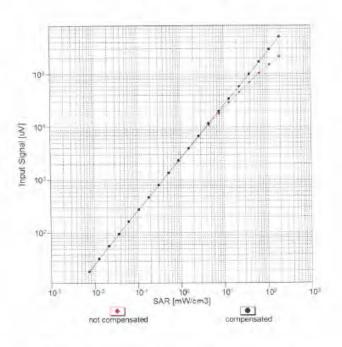

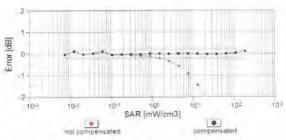

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: EX3-7375\_Dec21

Page 10 of 24


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Rev: 01

Page: 16 of 29

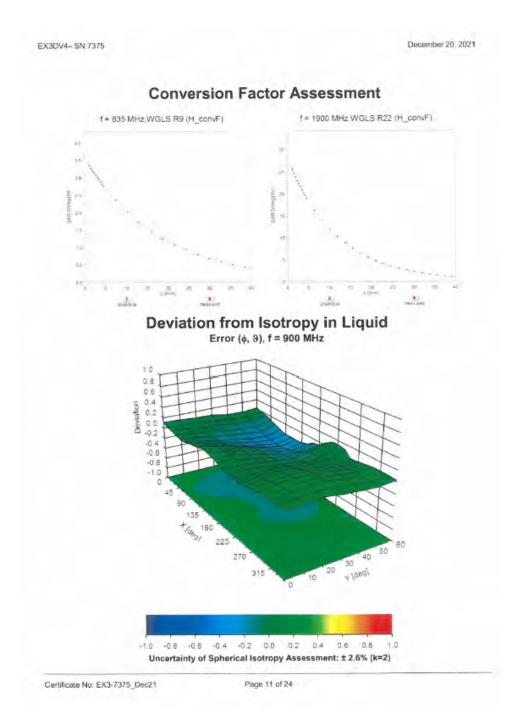

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

www.sqs.com.tw



Rev: 01

Page: 17 of 29

December 20, 2021 EX3DV4-SN:7375

ID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>c</sup> (k=2)
0	-	CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 9
10049	_	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056		UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	-	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	_	IEEE 802,11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	_	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 9
10061	_	IEEE 802.11b WIFI 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 9
10062		IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 °
10063		IEEE 802.11a/h WIFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 9
10064	_	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 9
10065		IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 9
10066		IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 9
10067	_	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 °
10068		IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 °
10069		IEEE 802.11a/n WIFI 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 °
10071		IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 °
10072	_	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 °
10073	_	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6
10074	_	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6
10075	-	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6
10076		IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6
10077		IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6
10081	_	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6
10082	_	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6
10090	_	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6
10097		UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6
10098		UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6
10099	_	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6

Page 12 of 24 Certificate No: EX3-7375 Dec21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 18 of 29

10100	CAE	LTE-FDD (SC-FDMA, 100% RB. 20 MHz, QPSK)	LTE-FDD	5.67	±96%
10101	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	19.6%
10102	CAE	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 84-QAM)	LTE-FDD	6.60	19.6%
10103	CAG	LTE TDD (SC FDMA, 100% RB, 20 MHz. QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAG	LTE TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.6%
10105	CAG	LTE-TOD (SC-FDMA, 100% RB, 20 MHz, 64-DAM)	LTE-TDO	10.01	196%
10108	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±0.6%
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±96%
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FOO	5.75	19.6 %
10111	CAG	LTE-FD0 (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FD0	6,59	±9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FD0	6.62	198%
10114	CAD	IEEE 802 11n (HT Greenfield, 13.5 Maps, BPSK)	WLAN	8.10	±9.6 %
10115	GAD	IEEE 802.11n (HT Greenfield, 91 Mbos. 16-OAM)	WLAN	8.46	±9.6%
10116	Action to the last of the last	IEEE 802.1 in (HT Greenfield, 135 Mbgs, 64-QAM)	WLAN	8.15	±9.6 %
10117	CAD	IEEE 802,11n (HT Mixed, 13.5 Minps, SPSK)	WLAN	B.07	± 9.6 %
10118	CAD	IEEE 802 11n (HT Mixed, B1 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAD	IEEE 802 11ri (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9,6 %
10140	CAE	LTE-FDD (SC-FDMA: 100% RB: 15 Minz: 16-QAM)	LTE-FOD	6.49	+96%
10141	CAE	LTE-FDD (SC-FDMA 100% RB. 15 MHz 64-QAM)	LTE-FDD	6.53	±96 %
10142	CAE	LTE-FDD (SG-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	£9.6 %
10143	CAE	LTE-FDD (SQ-FDMA, 100% RB, 3 MHz, 18-QAM)	LTE-FOD	6.35	± 9.6.%
10144	CAE	LTE-FDD (SC-FDMA, 100% RB. 3 MHz, 64-QAM).	LTE-FDD	6.65	± 9.6 %
10145	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, CPSK)	LTE-FDD	5.76.	±9.6 %
10146	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±96%
10147	CAF	LTE-FDD (SC-FDMA, 100%) RB, 1.4 MHz, 64-QAM)	1.TE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	5.42	±9,6,9
10150	CAE	LTE FDD (SC-FDMA, 50% RB, 20 MHz, 84-QAM)	LTE-FDD	6.60	±9.6%
10151	CAG	LTE-TOD (SC-FDMA, 50% RB, 20 MHz, GPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAG	LTE-TOD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TOD	9.92	±969
10153	CAG	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	1.10.05	1.9.69
10154	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9,6.9
10155	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6,43	±989
10156	CAG	LTE-PDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5,79	1959
10157	CAG	LTE-PDD (SC-PDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.63
10158	CAG	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	1963
10159	-	LTE-FDD (SC-FDMA 50% RB, 5 MHz, 54/QAM)	I.TE-FDD	6.56	#9.65
10160	CAE	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.63
10161	CAE	LTE-FDD (SC-FDMA, 50% RB. 15 MHz, 16-QAM)	LTE-FDD	6.43	1969
10162	CAE	LTE-FDD (SC-FDMA, 50% RB. 15 MHz. 54-DAM)	LTE-FDD	6.58	±9.6%
10166	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, GPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAF	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 °
10168	CAF	LTE-FDD (SC-FDMA, 50% RB, 1,4 MHz, 64-QAM)	LTE-FDD	6.79	±9.65
10169	CAE	LTE FDD (SC-FDMA, 1 RB 20 MHz, QPSK)	LTE-FOD	5.73	±.9,6.5
10170	CAE	LTE-FOD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9,6 °
10171	AAE	LTE-FDD ISC-FDMA, 1 RB, 20 MHz, 64-QAM).	LTE-FDD	6.49	±96
10172	CAG	LTE-TOD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAG	LTE-TOD (SC-FDMA 1 RB. 20 MHz, 16-QAM)	LTE-TOD	9.48	± 9.63
10174	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±96
10175	CAG	LTE-FDD (SC-FDMA, 1 RB: 10 MHz, OPSK)	LTE-FDD	5.72	±96
10176	CAG	LTE FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±95
10177	CAI	LTE-FDD (SC-FDMA, 1 RB, 6 MHz, QPSK)	LIEFDD	5.73	±9.6
10178	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz. 16-QAM)	LTE-FDD	6.52	±9.6
10179		LTE-FDD (SC-FDMA, 1 RB, 10 MHz; 64-QAM)	LTE-FDD	6.50	± 9.6
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 84-QAM)	LTE-FDD	6.50	± 9.6
10181	CAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.73	±96

Confidence No EX3-7375 Dec21

Page 13 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Rev: 01

Page: 19 of 29

10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6 %
10183		LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6:50:	=9.6%
10184		LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±96%
10185	And in column 2 is not a local division in the local division in t	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 18-QAM)	LTE-FDD	6.51	±9.6%
	AAE	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-DAM)	LTE-FOD	6.50	±965
10187	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±969
10188	CAF	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FOD	6.52	±96°
10189	AAF	LTE-FDD (SC-FDMA, 1 RB, 1 4 MHz. 64-QAM)	LTE-FOD	6.50	±9.69
10193	CAD	IEEE 802:11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	= 965
10194	CAD	IEEE 802 I In (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9,69
10195	CAD	IEEE 802 11n (HT Greenfield, 85 Mbps, 64-QAM)	WLAN	8.21	±9.6.9
10196	CAD	(EEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8,10	±9.6 9
10197	CAD	IEEE 802:11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	B.13	+964
10198	CAD	IEEE 802.11tv (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.69
10219	CAD	1EEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	± 9.6 %
10220	CAD	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.65
10221	CAD	IEEE 802.51n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.6 %
	CAD	IEEE 802 11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	± 9.6
10223		IEEE 802 11n (HT Mixed 90 Mbps 16-QAM)	WLAN	8.48	± 9.6
10224	CAD	(EEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.6
10225	CAB	UMTS-FDD (HSPA+)	WCDMA	5.97	±96
10226	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 84-QAM)	LTE-TDD	10.26	± 9.6 3
10228	CAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	± 9.6
10229	CAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230		LTE-TOD (SC-FDMA: 1 RB, 3 MHz. 64-QAM)	LTE-TOD	10.25	± 9.6
10231	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TOD	9.19	±9.6
10232	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6
10234	CAG	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, OPSK)	LTE-TDD	9.21	±9.6
10235	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TOD	9.48	±9.6
10236	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-DAM)	LTE-TDD	10.25	± 9.6
10237	CAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	± 9.6
10238	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TOD	9.48	± 9.6
10239	CAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz. 64-QAM)	LTE-TOO	10.25	±9.6
10239	CAF	LTE-TOD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10240	CAB	LTE-TDD (SC-FDMA, 50% RB, 1,4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAB	LTE-TDD (SC-FDMA, 50% RB 1.4 MHz 84-QAM)	LTE-TOD	9.86	r96
10243		LTE-TDD (SC-FDMA, 50% RB, 14 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244		LTE-TDD (SC-FOMA, 50% RB, 3 MHz, 18-QAM)	LTE-TDD	10.06	± 9.6
10245	-	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	1 2 9.6
10246	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TOD	9.30	± 9.6
10247		LTE-TDD (SC-FDMA, 50% RB, 5 MHz; 16-QAM)	LTE-TOD	9.91	± 9,6
10248	the same of the same of	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDO	10.09	±96
10249	-	LTF-TDD (SC-FDMA 50% RB 5 MHz. OPSK)	1.7E-TDD	9.29	±9.6
10250		LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TOD	9.81	±9.6
10251	-	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TOD	10.17	±9.6
10252		LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TOD	9.24	± 9.6
10253	-	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TOD	9.90	± 9.8
10254	-	LTE-TOD (SC-FDMA, 50% RB, 15 MHz, 54-QAM)	LTE-TOD	10.14	± 9.6
10255	100	LTE-TDD (SC-FDMA, 50% RB, 15 MH≥, QPSK)	LTE-TDD	9.20	±9.6
10256	Chicago Company	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	± 9.6
10257		LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TOD	10.08	±9.6
10258	Charleston Company	LTE-TOD (SC-FDMA, 100% RB, 1,4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259		LTE-TOD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TOD	9.98	195
10250	and the same of	LTE-TDD (SC-FOMA 100% RB. 3 MHz. 64-QAM)	LTE-TOD	9.97	±96

Certificate No. Exs-7375\_Ded21

Page 14 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Rev: 01

Page: 20 of 29

EX3DV4-SN:7375	December 20, 2021
EX3DV4- SN:7375	December 20, 2021

10261	CAD	LTE-TOD (SC-FDMA, 100% RB 3 MHz, QPSR)	LTE-TDD	9.24	±9.6.%
10262	CAG	LTE-TOD (SC FDMA, 100% RB, 5 MHz, 18-DAM)	LTE-TOD	9.83	±96%
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±96%
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6%
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 18-QAM)	LTE-TOD	9.92	±96%
10266	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±96%
10267	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz. QPSK)	LTE-TOD	9.30	196%
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6 %
10269	CAF	LTE-TOD (SC-FDMA, 100% RB, 15 MHz. 84-QAM)	LTE-TOD	10.13	±96%
10270	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TOD	9.58	196%
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	±96%
10275	CAB	IJMTS-FDD (HSUPA, Subtest 5, 3GPP Rei8.4)	WCDMA	3.96	±9.6%
10277	CAA	PHS (QPSK)	PHS	11.81	±9.6%
10278	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	±9.6 %
10279	CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	±9.6 %
10290	AAB	CDMAZ000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10290	AAB	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
				_	± 9.6 %
10292		CDMA2000 RC3 SO32 Full Rate	CDMA2000	3.39	19.6%
10293	AAB	CDMA2000 RC3 SO3 Full Rate	CDMA2000	12.49	±9.6%
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000		
10297	AAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6 %
10298	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6%
10299	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE FOO	6.39	± 9,6 %
10300	AAD	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9,6 %
10301	AAA	IEEE 802.18e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WIMAX	12.03	±9.69
10302	AAA	IEEE 802,16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3GTRL)	WIMAX	12.57	±95%
10303	AAA	IEEE 802 16e WIMAX (31:15, 5ms. 10MHz, 84QAM, PUSC)	WIMAX	12.52	±9.6 %
10304	AAA	IEEE 802 16e WIMAX (29 18, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	11.86	±967
10305	AAA	IEEE 802.16e WIMAX (31:15, 10ms, 10MHz, 64QAM, PUSC)	WIMAX	15.24	1967
10306	AAA	IEEE 802 18e WIMAX (29:18, 10ms, 10Mmz, 64QAM, PUSC)	WIMAX	14.67	±9.69
10307	AAA	(EEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, PUSC)	WIMAX	14.49	±9.69
10308	AAA	IEEE 802 15e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WIMAX	14.46	±9.69
10309	AAA	IEEE 802,16e WiMAX (29:18, 10ms, 10MHz, 16QAM,AMC 2x3)	WIMAX	14:58	£9.6 %
10310	AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3	WIMAX	14.57	1954
10311	AAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6%
10313		IDEN 1:3	IDEN	10,51	±9.69
10314		(DEN 1:6	IDEN	13.48	±96°
10315	AAB	IEEE 802 11b WiF. 2 4 GHz (DSSS, 1 Mpps, 96pc dc)	WEAN	1.71	±9.6
10316	AAB	IEEE 802 11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	1965
10317	AAD	(EEE 802.11a WiFl 5 GHz (OFDM, 6 Mbps. 96pc.dc)	WLAN	8.36	≥ 9.6 %
10352		Pulse Waveform (200Hz, 10%)	Generic	10.00	±9.6 €
10353	-	Pulse Waveform (200Hz, 20%)	Generic	6.99	±9.6.9
10354	-	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
10355	4	Poise-Waveform (200Hz, 60%)	Generic	2:22	196
10356	-	Pulse Wavelorm (200Hz. 80%)	Generic	0.97	±9.6
10387		QPSk Waveform 1 MHz	Genenc	5.10	±9.63
		QPSK Waveform: 10 MHz	Generic	5.22	±9.6°
10388		64-QAM Waveform, 10 MHz		6.27	± 9.6
10396	100000000000000000000000000000000000000	The state of the s	Generic		and the second
10399	-	64-QAM Wavelorm, 40 MHz	Generio	6.27	±9.6
10400		IEEE 802 11ac WiFi (20MHz, 64-QAM; 99pc dc)	WLAN	8,37	± 9.6
10401	-	IEEE 802,11ac WiFr (40MHz), 64-QAM, 99pc dc)	WLAN	8.60	E 9.6
10402	100	IEEE 802 Hac WiFi (BOMHz: 64-OAM, 99pc dc)	WLAN	8.53	±96
10403	-	CDMA2000 (1xEV-DO, Rev. 8)	CDMA2000	3.76	±9.6
10404	-	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6
10406	-	CDMA2000, RC3, SQ32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAG	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,6,9)	LTE-TOD	7.82	± 9 6

Certificate No: EX3 7375 Dec21

Page 15 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report reter only to the sample(s) tested and sucn sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be reproduced to the fullest extent of the law prosecuted to the fullest extent of the law.



Rev: 01

Page: 21 of 29

10414	AAA	WLAN CCDF, 64-QAM: 40MHz	Generic	8.54	±96%
10415	AAA	(EEE 802.116 WiFi 2.4 GHz (DSSS, 1 Mbps, 98pc dc)	WLAN	1.54	±96%
10416	AAA	IEEE 802 11g WiFi 2.4 GHz (ERP-OFDM, 5 Mpos. 99pc do)	WLAN	8.23	±96"
10417	AAC	IEEE 802 11ah WiFi 5 GRz (GFDM, 8 Mbps, 39pc dc)	WLAN	B.23	±9.65
10418	AAA	IEEE 802 11g WiFi 2 4 GHz (DSSS-OFDM 8 Mbps, 99pc, Long)	WLAN	8.14	±9.6%
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	1965
10422	AAC	IEEE 802 1 In (HT Greenfield, 7.2 Mbgs, BPSK)	WLAN.	8.32	± 9,6*
10423	AAC	IEEE 802,11n (HT Greenfield, 43,3 Mbps, 16-CIAM)	WLAN	8.47	± 9.6.9
10424	AAC	IEEE B02 11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	# 57 5 5
10425	AAC	IEEE 802 11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	B.41	±9.6
10426	AAC	(EEE 802 11n (HT Greenfield, 96 Mbps, 16-QAM)	WLAN	B.45	±969
10427	AAC	IEEE 802 11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8,41	1969
10430	AAD	LTE-FDD (OFDMA, 5 MHz; E-TM 3.1)	LTE-FDD	8.26	±9.61
10431	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	± 9.61
10432	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	196
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 f
10434	AAA	W-CDMA (BS Test Model 1, 6) DPCH)	WCDMA	8.60	± 9.61
10435	AAF	LTE-TOD (SC-FDMA * RB. 20 MHz. QPSK, UL Sub)	LTE-TOD	7.82	±9.6
10447	AAD	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAD	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Cirppin 441li)	LTE-FDD	7.53	±9.61
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	LTE-FDD	7.51	±9.6
10450	AAC	LTE-FDD (QFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	1 ± 9.6
10453	AAD	Validation (Square 10ms 1ms)	Test	10.00	+96
10456	AAC	IEEE 802-1 tac WiFi (160MHz, 64-QAM, 98pc dc)	WLAN	8.63	±96
10457	AAA	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	±9.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B. 2 carriers)	CDMA2000	6.55	19.6
10459	AAA	CDMA2000 (1xEV-DO, Rev. B. 3 carriers)	CDMA2000	8.25	±9.6
10460	AAA	UMTS-FDD (WCDNA, AMR)	WCDMA	2.39	± 9.6
_		LTE-TOD (SG-FDMA, 1 RB, 1 4 MHz, QPSK, UL Sub)	LTE TOD	7.82	+ 9.6
10461	AAB	LTE-TOD (SC-FDMA, 1 RB, 1.4 MHz, QFSK, QE SUB)	LTE-TOD	8,30	± 9.6
10462	AAB	Professional Control of the Control	LTE-TDD	8.56	± 9.6
10463	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, (A. Sub) LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDO	7.82	+96
10464		The contract of the contract o	LTE-TDD	8.32	±9.6
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)		8.57	±96
10466	AAC	LTE-TDD (SC-FDMA, T RB, 3 MHz, 64 QAM; UL Sub)	LTE-TOD	7.82	± 9.6
10467	AAF	LTE-TOD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TOD	_	296
10468	AAF	LTE TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TOD	8.32	= 9.6
10459	-	LTE-TOD (SC-FDMA, 1 RB, 5 MHz, 64 QAM, UL Sub)	LTE-TOD	7.82	±9.6
10470	-	LTE-TOD (SC-FDMA TRB. 10 MHz, GPSK, UL Sub)	LTE-TDD	8.32	±9.6
10471	_	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.57	196
10472	1.0	LTE-TDD (SC-FOMA, 1 RB, 10 MHz; 84-QAM, UL Sub)	LTE-TOO		±9.6
10473	-	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, DPSK, UL Sub)	LTE-TOD	7.82 8.32	-
10474	-	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TOD	-0,-76	±96
10475	STATE OF THE PERSON.	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	1.TE-TDD	5,57	-
10477	_	LTE TDD (BG FDMA, 1 RB, 20 MHz, 16 QAM, UL Sub)	LTE TOD	B.32	±9.5
10478		LTE-TOD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TOD	9.57	±9.6
10479	-	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TOD	7.74	± 9.6
10480	-	LTE-TDD (SC-FDMA, 60% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TOD	8.18	196
10481	177.00	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TOD	8.45	19.6
10482	-	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTETED	7.71	± 9.6
10483	c by carried and the	LTE-TOD (SC-FDMA, 50% RB, 3 MHz; 16-QAM, Sub)	LTE-TDD	8,39	±96
10484		LTE-TDD (SC-FDMA, 50% RB 3 MHz, 64-QAM, VL Sub)	LTE-TOD	8.47	±9,6
10485		LTE-TOD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDO	7.59	±9.6
10486	-	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-GAM, UL Sub)	LIE-TOD	8.38	±9.5
10487	1177	LTE-TOD (SC-FDMA: 50% RB: 5 MHz: 64-QAM, UL Sub)	LTE-TOD	8 60	± 9,6
10488	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TOD	7.70	± 9,6

Certificate No. EX3-7375 Dec21

Page 16 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.



Rev: 01

Page: 22 of 29

			TV and and a	1000	1 1 4 4 6
0489	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	±96%
0490	AAF	LTE-TDD (SC-FDMA, 50% RB. 10 MHz, 64-QAM, UL Sub)	LTE-TOD	8,54	± 9.6 /W
10491	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	= 9.6 %
10492	AAE	LTE-TDD (SC-FDMA, 50% RB, 16 MHz, 16-QAM, UL Sub)	LTE-TOD	8.41	±96%
0493	AAE	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL, Sub)	LTE-TOD	8.55	±9.6%
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±06%
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	±9.6%
10496	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8:54	±9.6%
10497	AAB	LTE-TOD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9,6 %
10498	AAH	LTE-TDD (SC-FDMA, 100% RB. 1,4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	€ 9.6 %
10499	AAB	LTE-TDD (SC-FDMA, 100% RB; 1,4 MHz; 64-QAM, UL Sub)	LTE-TOD	8.68	± 9.6 %
10500	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10501	AAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, LIL Sub)	LTE-TDD	3.44	±96%
10502	AAC	LTE-TOD (SC-FDMA, 100% RB, 3 MHz, 54-QAM, UL Sub).	LTE-TOD.	8,52	±96%
10503	AAF	LTE-TOD (SC-FDMA, 100% RB, 5 MHz. QPSK, UL Sub)	LTE-TDD	7.72	± 9.6 %
10504	AAF	LTE-TOD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TOD	8.31	£9.6 %
10505	AAF	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TOD	8,54	± 9.6 %
10506	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UI, Sub)	LTE-TOD	7.74	±9,6 %
10507	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TOD	B 36	±9.6 %
10508	AAF	LTE-TDD (SC-FDMA: 100% RB: 10 MHz; 6#-QAM; UL Sub)	LTE-TOD	8.55	± 9.6 %
10509	AAE	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TOD	7.99	± 9,6 %
10510	AAE	LTE-TOD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TOD	8.49	±9.6%
10511	AAE	LTE-TDD (SC-FDMA, 100%, RB, 15 MHz, 64-QAM, UL Sub)	LTE-TOD	8.51	±9.5 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDO	7.74	± 9,6 %
10513	AAF	LTE-TDD (SC-FDMA, 100%) RB, 20 MHz, 16-OAM, UL Sub)	LTE-TDD	8.42	# 9.6 %
10514	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TOO	8 45	± 9.6 %
10515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc do)	WLAN	1.5B	±9.6%
10516	AAA	IEEE 802.116 WIFI 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	196%
10517	AAA	(EEE 802.110 WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc do)	WLAN	1,58	±95%
1051B	AAC	IEEE 802 11a/h W/FLS GHz (OFDM, 9 Mbps, 99pc do)	WLAN	8.23	± 9.6 %
10519	AAC	IEEE 802 11a/h WIFI 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	±9.6 %
10520	AAC	IEEE 802.11ah) WIFI 5 GHz (OFDM: 18 Mbps, 99pc dc)	WLAN	B.12	± 9.6 %
10521	AAG	IEEE 802.11a/h WIFI 5 GHz (OFDM: 24 Mbps, 99pc dc)	WLAN	7.97	± 9.6 %
10522	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mops, 99pc do)	WLAN	8.45	± 9.6 %
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mpps, 99pc dc)	WLAN	8.08	± 9.6%
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbus, 99pc.dc)	WLAN	8.27	±9.6%
10525	AAC	IEEE 802.11ac WiFi (20MHz, MCSD, 99pc dc)	WEAN	8:36	±96%
10526	AAC	IEEE 802 11ac WIF) (20MHz, MCS1, 99pc dc)	WLAN	8.42	±9,67
10527	-	IEEE 882 I fac WiFi (20MHz, MCS2, 99pc dc)	WLAN	8.21	±9.63
10528	- Burner ou - Trim	IEEE 802.11ag WiFi (20MHz, MCS3, 99pc do)	WLAN	8,36	± 9.6 9
10529	-	IEEE 802 11ac WiFi (20MHz, MCSA, 99pc do)	WLAN	8.36	± 9,6 9
10531	-	IEEE 802 11ac WiFi (20MHz, MCS6, 99pc dc)	WLAN	8.43	± 9.6 %
10532	-	(EEE 802 11ac W/FI (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6 %
10533	_	IEEE 802 11ac WiFi (20MHz, MCS8, 99pc dc)	VVLAN	8.38	± 9.6.9
10534	AAC	IEEE 802 Har WIEL(40MHz, MCSD, 99pc rlc)	WI AN	H 45	± 9.6.9
10535	-	IEEE 802 11ac WiFi (40MHz, MCS1, 99pc do)	WILAN	8.45	1969
10536	77.74	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc)	WLAN	8.32	±969
10537	-	IEEE 802 11ac WIFI (40MHz, MCS3, 98pc do)	WLAN	8.44	± 9.6 %
10538		IEEE 802 11ac WiFi (40MHz; MCS4, 99pc dc)	WLAN	8.54	±9.69
10540		IEEE 802 11ac WIFI (40MHz: MCS6, 99pc.dc)	WLAN	8.39	± 9.61
10541	-	IEEE 802 11ac WiFi (40MHz, MCS7, 99pc qc)	WLAN	8.46	E965
10542		IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc)	WLAN	8.65	±9.61
10543	-	(EEE 807,11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.65	= 9.6
10544	-	IEEE 802,11ac WiFi (80MHz, MCS0, 99pc dc)	WLAN	8.47	± 9.6 %
10545	-	IEEE 802,11ac WiFi (80MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 9
10546		IEEE 802.11ac WIFI (80MHz, MCS2, 99pc dc)	WLAN	8.35	196"

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Certificate No: EX3-7375 Dec21

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

Page 17 of 24



Rev: 01

Page: 23 of 29

EX3DVA- SN 7375	December 20, 2021

10547	AAC	(EEE 80), 11sc W/FI (80MHz, MCS3, 99pc dc)	WLAN	8.49	±96%
10548	AAC	JEEE 802 11sc W/F (80MHz, MCS4, 99pc do)	WLAN	8.37	196%
10550	AAC	IEEE 802 11gc WIFI (80MHz, MCS6, 99pc do)	WLAN	8.39	± 9,6 %
10551	AAC	IEEE 802 11sc WiFi (80MHz, MCS7, 99pc dd)	WLAN	8.50	±96%
10552	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc de)	WLAN.	8.42	196%
10553	AAC	IEEE 802.11ac WIFI (80MHz, MCS9, 99pc dc)	WLAN	8.45	± 9.6.1%
10554	AAD	IEEE 802,11ac WIFI (1600/Hz, MCS0, 99pc ac)	WLAN	8.48	±9.6 %
10555	AAD	IEEE 802.11ac WiFi (160MHz: MGS1, 99pc dc)	WLAN	8.47	196%
10556	AAD	IEEE 802.11ac WiFi (160MHz: MCS2, 99pc do)	WLAN	B.50	±9.6%
10557	AAD	IEEE 802 11ac WIFI (160MHz, MCS3, 99pc dc)	WLAN	8,52	±9.5%
1055B	AAD	IEEE 802 11ac WiFi (160MHz; MCS4, 99pc dc)	WLAN	8,61	1967
10560	AAD	IEEE 802.11ac WIFI (160MHz, MCS6, 99pc de)	WLAN	6.73	±9.6.%
10561	AAD	IEEE 802,11ac WiFi (160MHz, MCS7, 89pc.cs)	WLAN	8.56	±9.6%
10562	AAD	(EEE 802.11ac WiFi (160MHz. MCS8, 99oc dc)	WEAN	8.69	±9.6 %
10563	AAD	IEEE 502 11sc WiFi (160MHz, MGS9, 99pc dp)	WLAN	8.77	± 9.6 %
10564	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dd)	WLAN	8.25	± 9.6 %
10565	AAA	IEEE 802 11g WiFi 2.4 GHz (DSSS-OFDM 12 Mbps, 99pc dg)	WLAN	8.45	196%
10566	AAA	IEEE 802 11g WiFl 2.4 GHz (DSSS-OFDM: 18 Mbps, 90pc dc)	WLAN	8.13	±9.6 %
10567	AAA	(EEE 802 11g W/F) 2,4 GHz (DSSS-OFDM, 24 Mbps 99pc dc)	WLAN	8.00	± 9.6 %
10568	AAA	IEEE 802 11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc do)	WLAN	8.37	± 9,6 %
10569	AAA	IEEE 802, 11g W/Fi 2,4 GHz (DSSS-OFDM, 46 Mpps. 99pc dc)	WLAN	8.10	± 9.6 %
10570	AAA.	IEEE 802,11g WIFI 2.4 GHz (DSSS-OFDM, 54 Mbps, 99oc do)	WLAN	8.30	±9.6 %
10571	AAA	IEEE 802 11b WIFI 2.4 GHz (DSSS, 1 Mbps, 90pc do)	WLAN	11.99	±9.6%
10572	AAA	(EEE 802 115 W/Fi 2 4 GHz (DSSS, 2 Mbps. 90pc do)	WLAN	7.99	±96%
10573	AAA	IEEE 802 116 WIFI 2.4 GHz (DSSS, 5.5 Mbps, 90pc dd)	WLAN	1.98	±9.6%
10574	AAA	IEEE 802 11h WiFr 2.4 GHz (DSSS, 11 Mbps, 90pc do)	WLAN	1.98	±9.6%
10575		IEEE 802.11c WiFi 2.4 GHz (DSSS-OFDM, 6 Nbps. 90pc dc)	WLAN	8.59	± 9.6 %
10576	AAA	IEEE B02 11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	± 9.6 W
10577	AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	± 9.6 %
10578	AAA	IEEE 802 11g WIF: 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pg db)	WLAN.	8.49	± 9.6.%
10579	AAA	IEEE 802, 11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mpps, 90pg dg)	WLAN	8.36	± 9.6 %
105B0	AAA	IEEE 802 11g WiFi 2 4 GHz (DSSS/OFDM 36 Mbps, 90pc db)	WLAN	8.76	19.5%
10581	AAA	IEEE 802 11g WiFi 2 4 GHz (DSSS-OFDM: 48 Mbps, 90pc do)	WLAN	8.35	± 9.6 %
10582	AAA	IEEE 802 11d WIFI 2 4 GHz (DSSS-QFDM: 84 Mbps; 90pc do)	WLAN	8.67	± 9.6 9
10583	AAC	IEEE 802 11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc bc)	WLAN	8.59	± 9.6 %
10584	AAC	IEEE 802,11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc do)	WLAN	8.60	± 9.6 9
10585	AAC	IEEE 802 11alh WiFi 5 GHz (OFDM, 12 Mbps, 90oc dc)	WLAN	8.70	± 9.6 %
10586	AAC	IEEE 802 11a/n WIFI 5 GHz (OFDM 18 Mbps: 90pc do)	WLAN	8.49	±95"
10587	AAC	IEEE 802 11a/h WIFI 5 GHz (OFDM, 24 Mbps 90pc dc)	WLAN	8.36	±969
10588	AAC	IEEE BOS 11a/h WIFI 5 GHz (OFDM, 36 Mbps, 90ec dc)	WLAN	8.76	+96
10589	1000	IEEE 802 11ah WiFi 5 GHz (OFDM, 48 Mbps, 90pc do)	WLAN	6.35	±9.63
10590	-	IEEE 802 1 tam WIFLS GHz (OFDM, 54 Mbps, 90pc do)	WLAN	8.67	±9.63
10591	AAC	IEEE 802.11n (HT Mixee, 20MHz, MCSO, 90pc dc)	WLAN	8.63	19.63
10592	-	IEEE 802.116 (HT Mixed, 20MHz, MCS1, 90pc.do)	WLAN	8.79	±9.69
10593	AAC	IFFF 802 116 (HT Mixed 20MHz MCS2 90pc do)	MI AN	8.64	± 9.6 %
10594	AAC	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc dc)	WLAN	8.74	±9.6%
10595	100.00	JEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc dq)	WLAN	8.74	± 9.6 °
10596	-	IEEE 502.11n (HT Mixed, 20MHz. MCS5, 90pc do)	WLAN	8.71	±96"
10597	AAC	(EEE 802 11n (HT Mixed, 20MHz, MCS6, 90pc-do)	WLAN	8.72	±969
10598	AAC	IEEE 802 11ti (HT Mixed, 20MHz, MCS7, 90oc 0c)	WEAN	8.50	±9.5
10599	100.140	IEEE 802 I tri (HT Mixed, 40MHz, MCS0, 90gc de)	WLAN	8.79	±961
10600		IEEE 802 5 in (HT Mixed, 40MHz, MCS1, 90pc dc)	WLAN	8.88	±965
10601	AAC	IEEE 802,11n (HT Mixed, 40MHz, MCS2, 90pc dc)	WLAN	8.82	±96"
10602	-	IEEE 802 11n (HT Mixed, 49MHz, MCS3, 90pc dc)	WLAN	8:94	± 9.6 5
10603		IEEE 802 11n (HT Mixed, 40MHz, MGS4, 90pc dc)	WLAN	9.03	= 9.6
10604	-	IEEE 802,110 (HT Mixed, 40MHz, MCS5, 90pc dc)	WLAN	8.76	±9.65

Certificate No. EX3-7375 Dec21

Page 19 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Rev: 01

Page: 24 of 29

0605	ANC	IEEE 802.1 In (HT Mixed: 40MHz, MCS6, N0pc do)	WLAN	8.97	±9.6 %
0606	AAC	IEEE 802 11n (HT Mixed, 40MHz, MCS7, 90pc dc)	WLAN	8.82	±965
10607	AAC	IEEE 802 11ac WiFi (20MHz, MCS0, 90pc dc)	WLAN	8.64	±9.6%
0608	AAC	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc dc)	WLAN	8.77	±96%
0609	AAC	IEEE 802.11ac WiFi (20MHz, MCS2.90pc dc)	WLAN:	8.57	±9.6.%
10610	AAC	IEEE 802 11ac WiFi (20MHz, MCS3, 90pc dc)	WLAN	8.78	19.6%
10611	AAC	IEEE 802 11ac WiFi (20MHz, MCS4, 90pc dc)	WLAN	8.70	±9.6 %
10612	AAC	IEEE 802.11ac WiFi (20MHz, MCS5, 90pi; do)	WLAN	8.77	±96%
10613	AAC	IEEE 802.11ac WIF) (20MHz, MCS6, 90pc dc)	WLAN	8.94	±96%
10614	AAC	IEEE 802 11ac WiFi (20MHz, MCS7, 90pc dc)	WLAN	8,59	±96%
10615	AAC	IEEE 802,11ac WiF1 (20MHz, MCS8, 90pc dc)	WLAN.	8.82	±959
10616	AAC	IEEE 802 11ac WIFI (40MHz: MCS0, 90pc dc)	WLAN	8.82	£9.5%
10617	AAG	TEEE 802 11ac WIFI (40MHz, MCS1, 90pc dc)	WLAN	8.81	196%
10618	AAC	IEEE 802 11ac WIFI (40MHz, MCS2, 80pc dd)	WLAN	8.58	± 9.6 %
10619	AAC	IEEE 802 11ac WiFi (40MHz, MCS3, 90pc dc)	WLAN	8.86	≥ 9.6 %
10620	AAC	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc do)	WLAN	8.87	± 9.6 %
10621	AAC	IEEE 802,11ac WiFi (40MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 %
10622	AAC	IEEE 802 11ac WiFi (40MHz MCS6, 90ac dc)	WLAN	8.68	± 9.5%
10623	AAC	IEEE 802 11ac WiFi (40MHz, MCS7, 90pc dc)	WLAN	8.82	± 9.6 %
10624	AAC	IEEE 802 11ac WiFi (40MHz, MCS8, 90pc dc)	WLAN	8.96	± 9,6 %
10625	AAC	IEEE 802 11ac WIFI (40MHz, MCS9, 90pc dc)	WLAN	8.96	± 9.6 %
10626	AAC	IEEE 802, I fac WiFi (80MHz, MCS0, 90pc dc)	WLAN	B.83	± 9.6 %
10627	AAC	IEEE B02.11ac WiFi (B0MHz, MCS1, 90pc dc)	WLAN	8.88	±9.63
10628	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc dg)	WLAN	8.71	±9.69
10629	AAC	IEEE 802.11ac WIFI (80MHz, MCS3, 90pc dc)	WLAN	8.85	+9.6%
10630	AAC	IEEE 802.11ac WIFI (80MHz, MCS4, 90pc ric)	WLAN	8.72	±9.69
10631	AAG	IEEE 802.11ac WIFI (80MHz, MCS5, 90pc dc)	WLAN	8.61	±9.63
10832		IEEE 802 11ac WIFI (80MHz, MCS6, 90pc dc)	WLAN	8.74	±9.63
10633		IEEE 802 11ac WiFi (80MHz, MCS7, 90pc dc)	WLAN	8.83	± 9.6 7
10634	AAC	IEEE 802 11sc WIFI (80MHz, MCSB, 90pc dc)	WAW	8.80	+9.89
10635	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc dc)	WLAN	8.81	±969
10636	AAD	[EEE 802.11ac W/Fi (160MHz, MCS0, 90pc do)	WLAN	8.83	±9.69
10637	AAD	IEEE 802 11ac WiFi (160MHz, MCS1; 90pc dc)	WLAN	8.79	1959
1D638	AAD	IEEE 802 11ac WIFI (160MHz, MCSZ, 90pc do)	WLAN	8.86	± 9,6 %
10639	AAD	(EEE 802 11ac WIFI (160MHz, MCS3, 90pc dc)	WLAN	8.85	±9.6%
10640	AAD	IEEE 802,11ac WiFi (160MHz, MCS4, 90pc dc)	WLAN	8.98	1.9.6
10641	AAD	IEEE 802.11ac WIFI (180MHz, MCS5, 90pc dc)	WLAN	9.06	±9.63
10642	AAD	IEEE 802 11ac WIEI (160MHz, MCS6, 90pc dc)	WLAN	9.06	1969
10643	AAD	IEEE 802.11ac WiF (160MHz: MCS7, 90pc dc)	WLAN	8.89	±9.63
10644	-	IEEE 802.11ac WIFI (160MHz, MCS8, 90pc dc)	WLAN	9.05	±965
10645		IEEE 802 1 lac WiFi (160MHz, MCS9, 90pc dc)	WLAN	9.11	±9.63
10646		LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2.7)	LTE-TOD	11.96	± 9.6 9
10647		LTE-TOD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub (2.7)	LTE-TDD	11.96	± 9.6
10648	-	CDMA2000 (1x Advanced)	CDMA2000	3.45	± 9.6 5
10652	_	1 TE-TRID (CIEDMA, 5 MHz E-TM 2.1, Clipping 44%)	TTF-TDD	6.91	± 9.6
10653	-	LTE-TOD (OFDMA, 10 MHz. E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±96
10654	-	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.95	±96
10655		LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Glipping 44%)	LTE-TDD	7.21	± 9.6
10658	-	Pulse Waveform (200Hz, 10%)	Test	10.00	±9.6
10659	-	Pulse Waveform (200Hz, 20%)	Test	6.99	±96
10000		Pulsa Waveform (200kg, 40%)	Test	3.98	±96
10661	and the latest and th	Puse Waveform (200Hz, 60%)	Test	2.22	±98
10662		Pulsa Waveform (200Hz, 80%)	Test	0.97	196
10670	A SALE PROPERTY.	Bluetooth Low Energy	Bluetooth	2.19	± 9.6
10671	_	IEEE 802,11ax (20MHz, MCS0, 90pc do)	WLAN	9.09	± 9.6
10672	-	IEEE 802.11ax (20MHz, MCS1, 90pc dc)	WLAN	6.57	±96

Curtificate No. EX3-7375 Dec21

Page 19 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Rev: 01

Page: 25 of 29

December 20, 2021 EX3DV4-SN:7375

			T	0.70	. 0.00
10673	AAC	IEEE 802.11ax (20MHz, MCS2, 90pc dc)	WLAN	8.78	± 9.6 %
10674	AAC	IEEE 802.11ax (20MHz, MCS3, 90pc dc)	WLAN	8.74	± 9.6 %
10675	AAC	IEEE 802.11ax (20MHz, MCS4, 90pc dc)	WLAN	8.90	± 9.6 %
10676	AAC	IEEE 802.11ax (20MHz, MCS5, 90pc dc)	WLAN	8.77	± 9.6 %
10677	AAC	IEEE 802.11ax (20MHz, MCS6, 90pc dc)	WLAN	8.73	± 9.6 %
10678	AAC	IEEE 802.11ax (20MHz, MCS7, 90pc dc)	WLAN	8.78	± 9.6 %
10679	AAC	IEEE 802.11ax (20MHz, MCS8, 90pc dc)	WLAN	8.89	± 9.6 %
10680	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc dc)	WLAN	8.80	± 9.6 %
10681	AAC	IEEE 802.11ax (20MHz, MCS10, 90pc dc)	WLAN	8.62	± 9.6 %
10682	AAC	IEEE 802.11ax (20MHz, MCS11, 90pc dc)	WLAN	8.83	± 9.6 %
10683	AAC	IEEE 802.11ax (20MHz, MCS0, 99pc dc)	WLAN	8.42	± 9.6 %
10684	AAC	IEEE 802.11ax (20MHz, MCS1, 99pc dc)	WLAN	8.26	± 9.6 %
10685	AAC	IEEE 802.11ax (20MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6 %
10686	AAC	IEEE 802.11ax (20MHz, MCS3, 99pc dc)	WLAN	8.28	± 9.6 %
10687	AAC	IEEE 802.11ax (20MHz, MCS4, 99pc dc)	WLAN	8.45	± 9.6 %
10688	AAC	IEEE 802.11ax (20MHz, MCS5, 99pc dc)	WLAN	8.29	± 9.6 %
10689	AAC	IEEE 802.11ax (20MHz, MCS6, 99pc dc)	WLAN	8.55	± 9.6 %
10690	AAC	IEEE 802.11ax (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6 %
10691	AAC	IEEE 802.11ax (20MHz, MCS8, 99pc dc)	WLAN	8.25	± 9.6 %
10692	AAC	IEEE 802.11ax (20MHz, MCS9, 99pc dc)	WLAN	8.29	± 9.6 %
	AAC	IEEE 802.11ax (20MHz, MCS10, 99pc dc)	WLAN	8.25	± 9.6 %
10693		IEEE 802.11ax (20MHz, MCS10, 99pc dc)	WLAN	8.57	± 9.6 %
10694	AAC			8.78	± 9.6 %
10695	AAC	IEEE 802.11ax (40MHz, MCS0, 90pc dc)	WLAN		± 9.6 %
10696	AAC	IEEE 802.11ax (40MHz, MCS1, 90pc dc)	WLAN	8.91	± 9.6 %
10697	AAC	IEEE 802.11ax (40MHz, MCS2, 90pc dc)	WLAN	8.61	
10698	AAC	IEEE 802.11ax (40MHz, MCS3, 90pc dc)	WLAN	8.89	± 9.6 %
10699	AAC	IEEE 802.11ax (40MHz, MCS4, 90pc dc)	WLAN	8.82	± 9.6 %
10700	AAC	IEEE 802.11ax (40MHz, MCS5, 90pc dc)	WLAN	8.73	± 9.6 %
10701	AAC	IEEE 802.11ax (40MHz, MCS6, 90pc dc)	WLAN	8.86	± 9.6 %
10702	AAC	IEEE 802.11ax (40MHz, MCS7, 90pc dc)	WLAN	8.70	± 9.6 %
10703	AAC	IEEE 802.11ax (40MHz, MCS8, 90pc dc)	WLAN	8.82	± 9.6 %
10704	AAC	IEEE 802.11ax (40MHz, MCS9, 90pc dc)	WLAN	8.56	± 9.6 %
10705	AAC	IEEE 802.11ax (40MHz, MCS10, 90pc dc)	WLAN	8.69	± 9.6 %
10706	AAC	IEEE 802.11ax (40MHz, MCS11, 90pc dc)	WLAN	8.66	± 9.6 %
10707	AAC	IEEE 802.11ax (40MHz, MCS0, 99pc dc)	WLAN	8.32	± 9.6 %
10708	AAC	IEEE 802.11ax (40MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %
10709	AAC	IEEE 802.11ax (40MHz, MCS2, 99pc dc)	WLAN	8.33	± 9.6 %
10710	AAC	IEEE 802.11ax (40MHz, MCS3, 99pc dc)	WLAN	8.29	± 9.6 %
10711	AAC	IEEE 802.11ax (40MHz, MCS4, 99pc dc)	WLAN	8.39	± 9.6 %
10712	AAC	IEEE 802.11ax (40MHz, MCS5, 99pc dc)	WLAN	8.67	± 9.6 %
10713	AAC	IEEE 802.11ax (40MHz, MCS6, 99pc dc)	WLAN	8.33	± 9.6 %
10714	AAC	IEEE 802.11ax (40MHz, MCS7, 99pc dc)	WLAN	8.26	± 9.6 %
10715	AAC	IEEE 802.11ax (40MHz, MCS8, 99pc dc)	WLAN	8.45	± 9.6 %
10716		IEEE 802.11ax (40MHz, MCS9, 99pc dc)	WLAN	8.30	± 9.6 %
10717	_	IEEE 802.11ax (40MHz, MCS10, 99pc dc)	WLAN	8.48	± 9.6 %
10718	_	IEEE 802.11ax (40MHz, MCS11, 99pc dc)	WLAN	8.24	± 9.6 %
10719	-	IEEE 802.11ax (80MHz, MCS0, 90pc dc)	WLAN	8.81	± 9.6 %
10720	-	IEEE 802.11ax (80MHz, MCS1, 90pc dc)	WLAN	8.87	± 9.6 %
10721	_	IEEE 802.11ax (80MHz, MCS2, 90pc dc)	WLAN	8.76	± 9.6 %
10721	_	IEEE 802.11ax (80MHz, MCS3, 90pc dc)	WLAN	8.55	± 9.6 %
10722	_	IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WLAN	8.70	± 9.6 %
		IEEE 802.11ax (80MHz, MCS4, 90pc dc)	WLAN	8.90	± 9.6 %
10724	_		WLAN	8.74	± 9.6 %
10725		IEEE 802.11ax (80MHz, MCS6, 90pc dc)		8.74	± 9.6 %
1072€		IEEE 802.11ax (80MHz, MCS7, 90pc dc) IEEE 802.11ax (80MHz, MCS8, 90pc dc)	WLAN WLAN	8.66	± 9.6 5
10727					

Certificate No: EX3-7375 Dec21 Page 20 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Rev: 01

Page: 26 of 29

0729	AAC	(SEE 802 11as (80MHz, MCS10, 90pc de)	WLAN	8.64	9.6 %
0730	AAC	(EEE 802 11EX (80MHz, MCS11, 90gc dc)	WLAN	8.67	1959
0731	AAC	IEEE 802 11ax (80MHz, MCS0, 99pc dc)	WLAN	8.42	± 9,5 %
0732	AAC	IEEE B02 11ax (80MHz. MCS1, 99ps dc)	WLAN	8.46	+9.69
0733	AAC	IEEE B02 11ax (B0MHz, MCS2, 99pc, dc)	WLAN	8 40	1969
0734	AAC	IEEE B02.11ax (B0MHz, MCS3, 99pc dc)	WLAN	8.25	± 9.6 %
0735	AAG	IEEE 802 118x (80MHz, MCS4, 99nc do)	WLAN	8.33	± 9.6 °
0736	AAC	IEEE 802.11ax (80MHz, MCSS, 99pc dq)	WLAN	8.27	± 9.6 %
10737	AAC	IEEE 802.11ax (80MHz, MCS6, 99pc dc)	WLAN	8.36	±9.69
10738	AAC	(EEE 802.11ax (80MHz, MCS7, 99pc dc)	WLAN	8.42	49.61
0739	AAC	IEEE 802.11ax (80MHz, MCS8, 99pc do)	WEAN.	8.29	±9.6 %
0740	AAC	IEEE 802.11ax (80MHz, MCS9, 99pc dc)	WLAN	8 48	±9.69
10741	AAC	IEEE 802.11ax (80MHz, MCS10, 99pc dc)	WLAN	8.40	±9.65
10742	AAC	IEEE 802.11ax (80MHz, MCS11, 99pc dc)	WLAN	8.43	±9.65
10743	AAC	IEEE 802.11ax (160MHz. MCS0, 90pc dc)	WLAN	8.94	± 9.6.9
10744	AAC	(EEE 802 11ax (160MHz MCS1, 90pc dc)	WLAN	9.16	± 9.6 9
10745	AAC	IEEE 802 11ax (160MHz, MCS2, 90pc dg)	WLAN	8.93	1969
10746	AAC	IEEE 802.1 (ax (160MHz, MCS3 90pc dc)	WLAN	9.11	±9.69
10747	AAC	IEEE 802 11ax (160MHz, MCS4, 90pc do)	WLAN	9.04	±9.63
10748	AAC	IEEE 802 11ax (160MHz, MCS5, 90pc dc)	WLAN	8,93	±965
10749	AAC	IEEE 802.11ax (160MHz, MGS8. 90pc dc)	WLAN	8.90	±9.65
10750	AAC	IEEE 802.11ax.(160MHz. MC57, 90pc.dc/	WLAN	8.79	± 9:6 °
10751	AAC	1EEE 802 11ax (160MHz; MCS8, 90pc.dc)	WLAN	8.82	±9.6
10752	AAC	(EEE 802 11 ax (160MHz, MCS9, 90pc-qc)	WLAN	8.81	±9.6
10753	AAC	IEEE 802.11ax (160MHz, MCS10, 90pc ds)	WLAN	9.00	±961
10754	AAC	IEEE 802 11ax (160MHz, MCS11, 90pc dc)	WLAN	8.94	+96
10755	AAC	IEEE 802 1 tax (160MHz, MCSD, 99pc dc)	WLAN	8.64	± 9.6
10756	AAC	(EEE 802 11ax (160MHz, MCS1, 99pc dc)	WLAN	8.77	± 9.6
10757	AAC	(EEE 802.11ax (160MHz, MCS2, 99pc dc)	WLAN	8.77	± 9,6
	-	IEEE 802 11ax (160MHz, MCS3, 99pt do)	WLAN	B 69	± 9.6
10758	AAC	IEEE 802.118x (160MHz, MCS4, 99pc dc)	WLAN	8.58	±9.6
10759	AAC	EEE 802.11ax (160MHz, MCS4, 98pc 6c)	WLAN	8.49	196
10760	AAC	100000000000000000000000000000000000000	WLAN	8.58	±9.6
10761	AAC	IEEE 802.11nx (160MHz, MCS6, 99pc ou)		8.49	±9.6
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 99pc dc)	WLAN	8.53	±9.6
10763	AAC	IEEE 802.11ax (180MHz, MCS8, 99pc do)	WLAN	B.54	±9.6
10764	AAC	IEEE 802 11ax (180MHz, MCS9, 99pc do)	WLAN	8.54	196
10765	AAC	IEEE 802 11ax (180MHz, MCS10, 99pc dc)	WLAN	8.51	+ 9.6
10766	AAC	IEEE 802 11ax (160MHz, MCS11, 99pc dc)	WLAN	7.99	± 9.6
10767	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10768	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	± 9.6
10769	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	19.6
10770		5G NR (GP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)		8.02	19.6
10771	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, OPSK, 15 KHz)	5G NR FR1 TDD	1000	
10772	-	5G NR (CP-OFDM 1 RB, 30 MHz, OPSK, 15 kHz)	5G NR FR1 TDD	8.23	± 9,6
10773	+	SOME (CP-DEDM 1 RR 40 MHz OPSK 15 kHz)	5G NR FR1 TOD	8.03	±9.6
10774	+	SG NR (CP-OFDM, 1 RB, 50 MHz, OPSK, 15 KHz)		8.31	196
10775	-	SG NR (CP-OFDM, 50% RB: 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	-	196
10776	-	5G NR (CP-OFDM, 50% RB. 10 MHz, QPSK, 15 ×Hz)	5G NR FR1 TDD	8.30	196
10777	-	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9.6
1,0778		SG NR (CP-OFDM, 50%-RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	± 9.6
10779		5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	-	-
10780	-	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	₹9.6
10781		5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	B.38	19.6
10782	-	5G NR (CP-DFDM, 50% RB, 50 MHz, CPSK, 15 KHz)	5G NR FR1 TDD	8.43	196
10783	AAE	5G NR (CP-DFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8:31	£9.6

Certificate No: EX3-7375\_Dec21

Page 21 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.



Rev: 01

Page: 27 of 29

EX3DV4- SN:7375	Denember 20, 2021

					T
10785	AAD	5G NR (CP-OFDM, 100% RE 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6.W
10786	AAD	5G NR ICP-OFDM, 100% RB 20 WHZ QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±96%
10787	AAD	5G NR (CP-DFDM 100% RB: 25 MHz: QPSK, 15 kHz)	5G NR FR1 TDD	8.44	196%
10788	AAD	SG NR (CP-OFDM 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	<b>主96%</b>
10780	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TOD	8.37	≥ 9.6 %
10790	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FRI TDD	8.39	± 9.6 %
10791	AAE	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	主9.5.%
10792	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR! TDD	7.92	±9.6%
10793	AAD	5G NR (CP-DFDM, 1 RB, 15 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	7.95	±96%
10794	AAD	5G NR (CP-QFDM, 1 RB, 20 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	7.82	±9.5 %
10795	AAD:	5G NR (CP-OFDM: 1 PB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	196%
10796	AAD	5G NR (CP-OFDM 1 RB. 30 MHz, QPSK, 30 kHz)	5G.NR FR1 TDD	7.62	±9.6%
10797	AAD.	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 4Hz)	5G NR FR1 TDD	8.01	±96%
10798	AAD	5G NR ICP-OFDM, 1 RB, 50 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	7.89	£96%
10799	AAD	SG NR (CP-OFDM, 1 RB, 60 MHz, CPSK, 30 kHz)	5G NR FR1 TDD	7.93	± 9.6 %
10801	AAD	5G NR (CP-0FDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FRI TOD	7.89	±9.6 %
10802	AAD	5G NR (CP-OFDM 1 RB. 90 MHz, QPSX, 30 kHz)	5G NR FR1 TDD	7.87	±9.6%
T0803	AAD	5G NR (CP-OFDM, 1 RB: 100 MHz, OPSK, 30 KHz)	5G NR FRE TOD	7.93	1 2 9 6 %
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	8.34	± 9.6 %
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	B.37	±96%
10809	AAD	5G NR (CP-OFOM 50% RB, 30 MHz, CPSK, 30 kHz)	5G NR FR1 TDD	B.34	+96%
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	8.34	±8.63
10812	AAD	5G NR (CP-GFDM, 50%, R6, 60 MHz, GPSK, 30 kHz)	5G NR FR1 TOD	8.35	= 9.63
10817	AAE	5G NR (GP-OFDM 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	1.96.7
10818	AAD	5G NR (GP-OFDM 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±969
10819	-	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	8.33	±969
The state of the last	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	19.6%
10820	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	8.41	±9,63
10821	-	5G NR (CP-0FDM, 100% RB, 30 MHz, QPSk, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 %
10822	AAD		5G NR FR1 TDD	8.36	₹ 9.6
10823	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 VHz)	164.36.36.36.36.36.3	8.39	± 9.6 8
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, CPSK, 30 kHz)	5G NR FR1 TDD	8.41	± 9.6 9
10825	AAD	5G NR (CP OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	A GO-MAN	1969
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8,42	±9.63
11,000	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TOD	5,43	_
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK: 30 kHz)	5G NR FR1 TDD	8.40	± 9.6
10830	AAD	SG NR (CP-OFDM: 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	±96°
10837	AAD	5G NR (CP-OFDM: 1 RB: 15 MHz; OPSK, 60 kHz)	5G NR FR1 TDD	7.73	± 9.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±96
10833	AAD	5G NR (CP-OFDM: 1 RB: 25 MHz, QPSK; 80 kHz)	5G NR FR1 TDD	7.70	± 9.6 °
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	± 9.6 !
10835	-	5G NR (CP-OFDM, 1 RB. 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	196
10836	-	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9.6
10837	-	5G NR (GP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±96'
10839	-	5G NR (CP-DFDM 1 RB, 80 MHz, QPSK, 80 kHz)	5G NR FR1 TDD	7.70	±26
10840	and the same	SG MR (CP-OFDM 1 RB, 90 MHz, OPSK, 80 kHz)	5G NR FR1 TDD	7.67	±9.6
10841		5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9,6
10843	A COLUMN TO SERVICE	5G NR (CP OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±96
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK: RD kHz)	5G NR FR1 TDD	8.34	196
10846	AAD	5G NR. (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	± 9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±96
10855	AAD	5G NR (CP-OFDM 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10856	AAD	5G NR (CP-OFDM, 100%, RB, 20 MHz, OPSK, 80 kHz)	5G NR FR1 TOD	8.37	± 9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	± 9.6
10858	AAD	5G NR (CP-OFDM: 100% RB. 30 MHz, GPSK, 60 kHz)	5G NR FR1 TDD	8.36	± 9.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TOD	8.34	± 9.8
10860	AAD	5G NR ICP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	6.41	±9.6

Gerificate No. EX3-7375\_Dec21

Page 22 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Rev: 01

Page: 28 of 29

EX3DV4- SN:7375 December 20, 2021

10861	AAD	5G NR (CP-OFDM 100% RB, 60 MHz, QPSK, 60 kHz)	50 NR FR1 TOD	8.40	1965
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, OPSK, 60 KHz)	5G NR FR1 TDD	B.41	±9.6 %
10864	AAD	5G NR (CP-QEDM_100%) RB, 90 MHz, QPSK_60 kHz)	5G NR FR1 TDD	8.37	±9.6%
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 80 kHz)	5G NR FR1 TOD	8.41	±9.8 %
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 %
10868	AAD	5G NR (DFT-5-OFDM 100% RB, 100 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	5.89	± 9.6 %
10869	AAD	5G NR (DFT 5-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TOD	5.75	± 9.6 %
10870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	± 9.6 %
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	±9.6 %
10872	AAD	5G NR (DFT & OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	±96%
10873	AAD	5G NR (DFT-s-OFDM 1 RB, 100 MHz, 64QAM, 120 KHz)	5G NR FR2 TDD	6.61	±9.6 %
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 54QAM, 120 HHz)	5G NR FR2 TOD	6.65	±9.6%
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	1.9.6 %
10876	AAD	5G NR (CP-0FDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	B.39	± 9.6 %
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	± 9.6 %
10878	AAD	5G NR (CP-OFDM, 108% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9,5%
10879	AAD	5G NR (CP-OFDM, 1 RB: 100 MHz, 84QAM, 120 kHz)	5G NR FR2 TDD	8.12	± 9.6 %
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TOD	8.38	±9.6%
10881	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6 %
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	± 9.6 %
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	± 9.6 %
10884	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±96%
10885	AAD	5G NR (DFT)-s-OFUM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	£9.6%
10886	AAD	5G NR (DFT-s-OFDM 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	± 9.6 %
10887	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	± 9.6 %
10888	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	± 9.6 %
10889	AAD	5G NR (CP-OFOM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	±9.6%
10890	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	1969
10891	AAD	5G NR (CP-OFDM 1 RB 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	± 9.6.%
10892	AAD	5G NR (CP-QFDM 100% RB, 50 MHz, 84QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6%
10897	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.6%
10898	AAB	5G NR (DFT-s-QFDM: 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	19.6 %
10899	AAB	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.69
10900	AAB	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	± 9.6 9
10901	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±969
10902	AAB	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	5.68	±9.69
10903	1.00	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 80 kHz)	SG NR FRI TDD	5.68	1959
10904	AAB	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±969
10905	-	5G NR (DFT-s-OFDM, 1 RB, 60 MHz; QPSK, 30 kHz)	5G NR FR1 TDD	5.68	196
10906	AAB	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.68	±9.63
10907	AAG	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FRI TDD	5.78	±9.63
10908	AAE	5G NR (DFT-s-DFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.65
10909	-	5G NR (DFT-s-OFDM 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.61
10910	The state of the s	SG NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	± 9.6 %
10910	AAB	5G NR (DFT-s-DFDM 50% RR 25 MHz, DPSK 30 kHz)	5G NR FR1 TDD	5.93	±9.6 %
10912	-	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	5.84	E96
10913	-	5G NR (DFT & OFDM: 50% RB: 40 MHz; QPSK; 30 kHz)	5G NR FR1 TDD	5.84	±96
10914	-	5G NR (DFT & OFDM 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
10915	1	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QRSK, 30 kHz)	5G NR FR1 TDD	5.83	19.6
10916	-	SG NR (DFT-s-OFDM, 50% RB, B0 MH2, QPSK, 30 KH2)	5G NR FR1 TDD	5.87	±96°
10917	-	5G NR (DFT-s-DFDM, 50% RB, 100 MHz, CPSK, 30 kHz)	5G NR FR1 TDD	5.94	±95
10918	17.7	5G NR (DFT s-OFDM 100% RB, 5 MHz OPSK 30 kHz)	5G NR FR1 TDD	5.86	±96
10919	the latest section in which the latest section is not a section in the latest section in	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	± 9,6
10920		5G NR (DFT-s-OFDM: 100% RB, 15 MHz, QPSK; 30 KHz)	SG NR FR1 TDD	5.87	± 9.6
10921	THE STANSON PROPERTY.	5G NR (DFT-s-OFDM 100% RB. 20 MHz QPSK, 30 NHz)	5G NR FR1 TDD	5.84	±96
10921	AAB	5G NR (DFT-s-OFDM: 100% RB: 25 MHz, QPSK: 30 kHz)	SG NR FR1 TDD	5.82	19.6

Certificate No. EX3-7375 Dec21

Page 23 of 24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非早有论时,此報生结里僅對測試之樣是負責,同時世樣是僅是図の主。大報生主經太公司書面許可,不可與公詢制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留%天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com.tw/Terms-and-Conditions">http://www.sgs.com.tw/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be

prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488



Rev: 01

Page: 29 of 29

0923	AAB	5G NR (DFT & OFDM 100% RB, 30 MHz, OPSK, 30 kHz)	5G NR FR1 TDD	5.B4	±9.6%
10924	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	SG NR FR1 TDD	5.84	± 9.8 %
10925	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 KHz)	5G NR FR1 TDD	5.95	E96%
10926	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6%
10927	AAB	5G NR (DFT-s-OFDM: 100% RB; 80 MHz; QPSK: 30 kHz)	5G NR FR1 TDD	5.94	± 9.6 %
10928	AAC	5G NR (DFT-s-OFOM, 1 RB, 5 MHz, OPSK, 15 kHz)	5G NR FR1 FDD	5.52	196%
10929	AAC	SG NR (DFT & OFDM, 1 RB, 10 MHz, GPSK, 15 kHz)	5G NR FR1 FDD	5.52	± 9.6 %
10930	AAC	5G NR (DFT-9-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6%
10931	AAC	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5,51	±96%
10932	AAC	5G NR (DFT 6-OFDM, 1 RB. 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9,6 %
10933	AAC	5G NR (DFT-s-OFDM, 1 RB, 3D MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5,51	±9.5 %
10934	AAC	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	19.6%
10935	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.5 %
10936	AAC	5G NR (DFT is OFDM: 50% RB, 5 MHz, QPSK: 15 kHz)	5G NR FR1 FDD	5.90	±9.6%
10937	AAC	5G NR (DFT-s-DFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6 %
10938	AAC	50 NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	± 9.6 %
10939	AAC	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, GPSK, 15 kHz)	5G NR FR1 FDD	5.82	± 9.6 %
10940	AAC	5G NR (DFT-9-OFDM, 50% RB, 25 MHz, CPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6 %
10941	AAC	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.5 %
10942	AAG	5G NR (DFT-s-DFDM: 50% RB, 40 MHz, OPSK, 15 kHz)	5G NR FRI FDD	5.85	±96%
10943	AAD	5G NR (DFT-s-OFDM 50% RB, 50 MHz, QPSK, 15 MHz)	5G NR FR1 FDD	5.95	±9.6%
10944	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.64
10945	AAC	5G NR (DFT s-OFDM 100% RB, 10 MHz, QPSR, 15 KHz)	5G NR FR1 FDD	5.85	±9.67
10946	AAC	5G NR (DFT & OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6.9
10947	AAC	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK; 15 kHz)	5G NR FR1 FDD	5.87	±969
10948	AAC	5G NR (DET-5-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±969
10949	AAC	5G NR (DFT-s-OFDM: 100% RB; 30 MHz; QPSK; 15 kHz)	5G NR FR1 FDD	5.87	±9.6 7
10950	AAG	5G NR (DFT-s-OFDM: 100% RB, 40 MHz; QPSK, 15 kmz)	5G NR FR1 FDD	5.94	1961
10951	AAD	5G NR (DFT-s-OFDM: 100% RB, 50 MHz. QPSK, 15 KHz)	5G NR FR1 FDD	5.92	±9.63
10952	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	± 9.6 %
10953	AAA	5G NR DL (CP-OFDM TM 3.1, 10 MHz 84-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.8%
10954	AAA	5G NR DL (CP-OFDM TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD.	8.23	±963
10955	AAA	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 68-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.8 %
10956	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	19.6
10957	AAA	5G NR DL (CP-OFDM, TM 3:1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	± 9,6
10958	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	± 9.6
10959	AAA	5G NR DL (CP-OFDM: TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	± 9.6 5
10960	AAC	5G NR DL (CP-OFDM TM 3.1, 5 MHz, 84-QAM, 15 kHz)	5G NR FR1 TDD	9.32	± 9.6
10961	AAB	5G NR DL (CP-DFDM, TM 3.1, 10 MHz, 64-DAM, 15 kHz)	5G NR FR1 TOD	9.36	±95°
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 84-QAM, 16 kHz)	5G NR FR1 TDD	9.40	±9.65
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAC	5G NR DL (CP-OFOM, TM 3, 1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TOD	9.29	19.6
	AAB	5G NR DL (CP-OFDM: TM 3.1. 10 MHz; 64-QAM: 30 kHz).	4G NR FR1 TDD	9.37	± 9.6
10966	_	5G NR DL (CP-0FDM, TM 3 1 15 MHz, 64-QAM, 30 MHz)	5G NR FR1 TDD	9.55	1.9.61
10067	AAB	3G NR DI (CP-OFDM TM 3 1 00 MHz 64-OAM, 30 KHz)	5G NR FR1 TDD	9.42	± 9.6 °
10968	-	5G NR DL (CP-OFDM TM 3 1, 100 NHz 84-QAM, 30 MHz)	5G NR FR1 TDD	9.40	± 9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11,59	± 9.6
10973	-	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 36 kHz)	5G NR FR1 TDD	9:06	±96
10974		5G NR (CP-OFDM 100% RB, 100 MHz, 256-QAM, 30 KHz)	5G NR FR1 TDD	10.28	±9.6
10978		ULLA BDR	OCLA	2.23	±96
10979	-	ULLA HDRA	CILLY	7.02	19,6
10980	-	ULLA HDRS	ULL'A.	11.82	± 0.6
10981	_	ULLA HORp4	ULLA	₹.50	±96
10982	AAA	ULLA HDRø8	ULLA.	7,44	196

Uncertainty is determined using the mas, deviation from linear response applying rectangular distribution one is expressed for the square of the

Certificate No: EX3-7375\_Dec21

Page 24 of 24

## - End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless ounerwise stated une results snown in this test report reter only to the sample(s) tested and such as ample(s) are retained for 90 days only. We #shaft #sh prosecuted to the fullest extent of the law.