

FCC RF Exposure report
for
Articulating TPMS Sensor Trigger Device
Model No.: TPMSWAND
FCC ID: 2ANR7-TPMSWAND

of

Applicant: ATEQ INSTRUMENTS (ASIA)PTE LTD.
TAIWAN BRANCH (SINGAPORE)
Address: NO.3, LANE 223, SAN JIA DONG STREET, 40642,
TAICHUNG, TAIWAN

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1072, TW1140, TW1146, TW1477, TW0037

Industry Canada filed test laboratory Reg. No.: 20037, 31634



Report No.: W6M22503-24247-EE





TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.3	APPLICATION DETAILS	3
1.4	GENERAL INFORMATION OF TEST ITEM	4
1.5	DUTY CYCLE AND FACTOR	5
1.6	TEST STANDARDS	7
2	TEST CONFIGURATION	8
2.1	TEST ENVIRONMENT	8
2.2	MEASUREMENT UNCERTAINTY	8
2.3	TEST EQUIPMENT LIST	8
3	EQUIVALENT ISOTROPIC RADIATED POWER (EIRP).....	9
3.1	EXEMPTION LIMITS FOR ROUTINE EVALUATION	9



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22503-24247-EE

FCC ID: 2ANR7-TPMSWAND

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Tester:

May 05, 2025

Rick Chen

Rick Chen.

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

May 05, 2025

Kevin Wang


Kevin Wang

Date

WTS

Name

Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22503-24247-EE

FCC ID: 2ANR7-TPMSWAND

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber/Conducted Emission

No. 99, Sec. 1, Balian Rd., Xizhi Dist.,
New Taipei City 221032, Taiwan (R.O.C.)

Worldwide Testing Services (Taiwan) Co., Ltd.
6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1072, TW1140, TW1146, TW1477, TW0037

Industry Canada filed test laboratory Reg. No.: 20037, 31634

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.
Accredited no.: ./.
Street: ./.
Town: ./.
Country: ./.

1.3 Application details

Approval holder

Name: ATEQ INSTRUMENTS (ASIA)PTE LTD.
TAIWAN BRANCH (SINGAPORE)
Street: NO.3, LANE 223, SAN JIA DONG STREET, 40642,
Town: TAICHUNG,
Country: TAIWAN

Manufacturer: (if applicable)

Name: Might Electronic Co., Ltd.
Street: No. 41-1, Lin 2, Yuan-Shan Tsuen, Hsin-Feng Hsiang,
Town: Hsin-Chu Hsien 304,
Country: Taiwan (R.O.C.)



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22503-24247-EE

FCC ID: 2ANR7-TPMSWAND

Date of receipt of test item: March 26, 2025

Date of test: from March 27, 2025 to April 23, 2025

1.4 General information of Test item

Type of test item: Articulating TPMS Sensor Trigger Device

Model no.: TPMSWAND

Multi-listing model no.: TPMS WAND

Brand name: **Snap-on**

Power supply: USB 5Vd.c.
Battery 3.6Vd.c. 2550mAh 9.18Wh

Technical data

Mode	Channel	Conducted Power (dBm)
BLE 1M	Ch 0 : 2402 MHz	0.91
	Ch 19 : 2440 MHz	2.18
	Ch 39 : 2480 MHz	1.91
BLE 2M	Ch 0 : 2402 MHz	1.47
	Ch 19 : 2440 MHz	2.61
	Ch 39 : 2480 MHz	1.86
125kHz		77.73dBuV/m

Type of antenna: PCB antenna

Antenna gain: -2.6dBi

Operation modes: Duplex

Modulation type: GFSK

Sample no.: #01

Classification:

Fixed Device	☐
Mobile Device (Human Body distance > 20cm)	☐
Portable Device (Human Body distance < 20cm)	☒
Modular Radio Device	☐

Registration number: W6M22503-24247-EE

FCC ID: 2ANR7-TPMSWAND

1.5 Duty cycle and factor


The duty factor is computed as $[10 \log (1 / D)]$, where D is the duty cycle.

Mode	T _{on} (ms)	T _{on} +T _{off} (ms)	Duty cycle (%)	1/T – VBW (kHz)
BLE 1M	2.14	2.51	85.26%	0.47
BLE 2M	1.08	1.88	57.45%	0.93


Duty cycle plot

BLE


1M

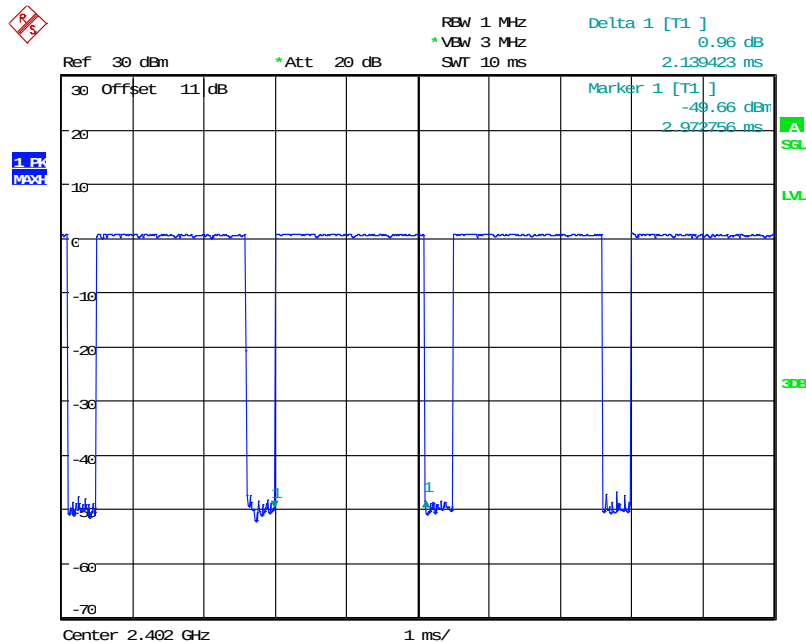

Date: 16.APR.2025 13:37:20




Registration number: W6M22503-24247-EE
FCC ID: 2ANR7-TPMSWAND

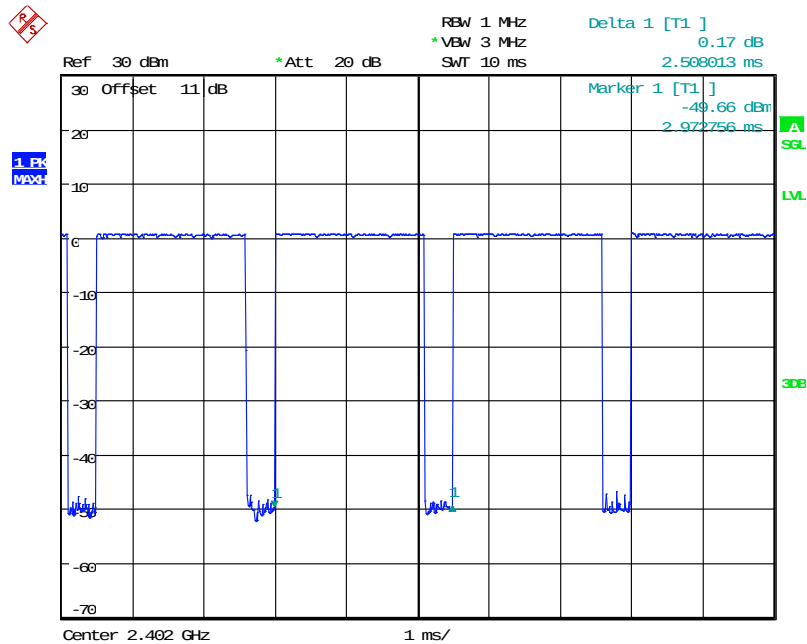


Date: 16.APR.2025 13:37:36


2M

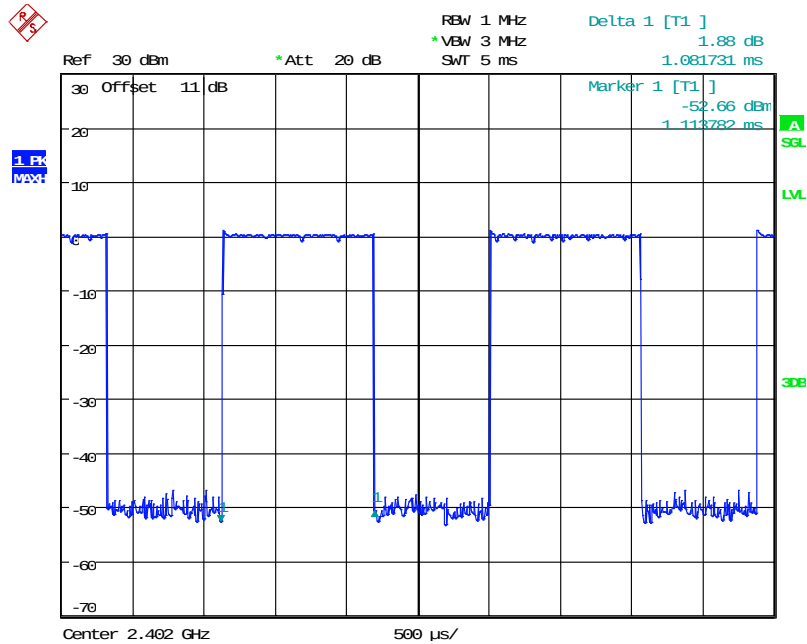

Date: 16.APR.2025 13:35:02



Registration number: W6M22503-24247-EE
FCC ID: 2ANR7-TPMSWAND

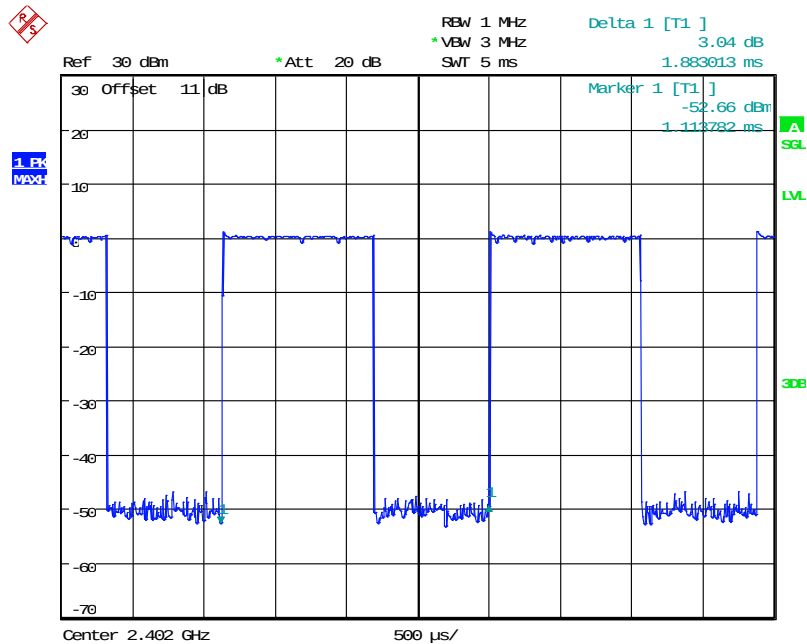


Date: 16.APR.2025 13:36:40

1.7 Test standards

FCC KDB Publication

447498 D01 General RF Exposure Guidance v06



Registration number: W6M22503-24247-EE

FCC ID: 2ANR7-TPMSWAND

2 Test configuration

2.1 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Extreme conditions parameters: ./.

2.2 Measurement uncertainty


Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 1.63 dB

The decision rule is: Measurement uncertainty is not included in the calculation of test results.

2.3 Test Equipment List

Max Output Power

Code No.	Test equipment	Mode No.	Serial No.	Brand	Cal. Date	Next Cal. Date
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2025/2/14	2026/2/13
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2025/3/5	2026/3/4
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2025/2/14	2026/2/13
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2025/2/14	2026/2/13



Registration number: W6M22503-24247-EE

FCC ID: 2ANR7-TPMSWAND

3 Equivalent Isotropic Radiated Power (EIRP)

FCC Rule: 15.247

Bluetooth

EIRP = max. conducted output power + antenna gain

EIRP = 2.61 dBm+ (-2.6dBi [antenna gain claimed by manufacturer]) = 0.01dBm = 1.0023mW

125kHz

EIRP = max. conducted output power + antenna gain

EIRP = -17.49 dBm+ (7dBi [antenna gain claimed by manufacturer]) = -10.49dBm = 0.0893mW

3.1 Exemption Limits for Routine Evaluation

according to 47 CFR FCC Part 2 Subpart J, section 2.1091

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table .

Table: SAR evaluation — Exemption limits for routine evaluation based on frequency and separation distance

Bluetooth

MHz	5	10	15	20	25	mm
2440	10.02	19.05	29.07	38.11	48.11	SAR Test Exclusion Threshold (mW)

MHz	30	35	40	45	50	mm
2440	57.15	67.16	77.18	86.22	96.24	SAR Test Exclusion Threshold (mW)

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power.

Established separation distance is 5 mm.

Operating frequency band : 2402-2480 MHz

Max. output power level at 5 mm separation distance at 2440 MHz
according to table is: 10.02 mW

The product is exempt from SAR Evaluation/Testing because the output power of 1.0023 mW is below the exemption limit of 10.02 mW.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22503-24247-EE

FCC ID: 2ANR7-TPMSWAND

125kHz

MHz	5	10	15	20	25	mm
0.125	941.42	941.42	941.42	941.42	941.42	SAR Test Exclusion Threshold (mW)

MHz	30	35	40	45	50	mm
0.125	941.42	941.42	941.42	941.42	941.42	SAR Test Exclusion Threshold (mW)

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power.

Established separation distance is 5 mm.

Operating frequency band : 0.125 MHz

Max. output power level at 5 mm separation distance at 0.125 MHz
according to table is: 941.42 mW

The product is exempt from SAR Evaluation/Testing because the output power of 0.0893 mW is below the exemption limit of 941.42 mW.