



## SAR EVALUATION REPORT

**Applicant Name:**  
LG Electronics U.S.A., Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
04/12/20 - 05/06/20  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Document Serial No.:**  
1M2003310054-01-R1.ZNF

**FCC ID:** **ZNFQ730VM**


**APPLICANT:** **LG ELECTRONICS U.S.A., INC.**

**DUT Type:** Portable Handset  
**Application Type:** Certification  
**FCC Rule Part(s):** CFR §2.1093  
**Model:** LM-Q730VM  
**Additional Model(s):** LM-Q730QM, LM-Q730QM5, LM-Q730QM6, LM-Q730QN, LM-Q730UM, LMQ730VM, LMQ730QM, LMQ730QM5, LMQ730QM6, LMQ730QN, LMQ730UM, Q730VM, Q730QM, Q730QM5, Q730QM6, Q730QN, Q730UM

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.29	0.60	0.64	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.36	0.55	N/A
PCE	UMTS 850	826.40 - 846.60 MHz	0.20	0.41	0.44	N/A
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.10	0.67	0.85	2.70
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.13	0.63	0.71	2.36
PCE	CDMA/EVDO BC0 (§22H)	824.70 - 848.31 MHz	0.23	0.47	0.35	N/A
PCE	CDMA/EVDO BC10 (§90S)	817.90 - 823.10 MHz	0.25	0.44	0.38	N/A
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.16	0.71	0.74	2.23
PCE	LTE Band 71	665.5 - 695.5 MHz	0.15	0.27	0.52	N/A
PCE	LTE Band 12	699.7 - 715.3 MHz	0.18	0.28	0.37	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.15	0.27	0.32	N/A
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.17	0.38	0.42	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.13	0.76	0.97	2.70
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.13	0.56	0.78	2.49
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 41	2498.5 - 2687.5 MHz	0.13	0.53	0.40	2.63
DTS	2.4 GHz WLAN	2412 - 2462 MHz	1.00	0.48	0.78	N/A
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A	0.50	N/A
NII	U-NII-2A	5260 - 5320 MHz	0.39	0.36	N/A	1.56
NII	U-NII-2C	5500 - 5720 MHz	0.75	0.55	N/A	1.88
NII	U-NII-3	5745 - 5825 MHz	0.91	0.42	0.80	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.10	< 0.1	< 0.1	N/A
Simultaneous SAR per KDB 690783 D01v01r03:			1.29	1.34	1.59	3.79



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
Randy Ortañez  
President





The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID ZNFQ730VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 1 of 116

# T A B L E   O F   C O N T E N T S

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	11
3	INTRODUCTION .....	12
4	DOSIMETRIC ASSESSMENT .....	13
5	DEFINITION OF REFERENCE POINTS .....	14
6	TEST CONFIGURATION POSITIONS .....	15
7	RF EXPOSURE LIMITS .....	19
8	FCC MEASUREMENT PROCEDURES.....	20
9	RF CONDUCTED POWERS .....	27
10	SYSTEM VERIFICATION.....	66
11	SAR DATA SUMMARY .....	71
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	95
13	SAR MEASUREMENT VARIABILITY .....	106
14	ADDITIONAL TESTING PER FCC GUIDANCE .....	108
15	EQUIPMENT LIST .....	112
16	MEASUREMENT UNCERTAINTIES.....	113
17	CONCLUSION.....	114
18	REFERENCES .....	115
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: SAR TISSUE SPECIFICATIONS		
APPENDIX D: SAR SYSTEM VALIDATION		
APPENDIX E: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: PROBE AND DIPOLE CALIBRATION CERTIFICATES		

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 2 of 116

# 1 DEVICE UNDER TEST




## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
LTE Band 71	Voice/Data	665.5 - 695.5 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

## 1.2 Power Reduction for SAR

This device utilizes a power reduction mechanism for some wireless modes and bands for SAR compliance under portable hotspot conditions, and under some conditions when the device is being used in close proximity to the user's hand. All hotspot SAR evaluations for this device were performed at the maximum allowed output power when hotspot is enabled. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 3 of 116	

## 1.3 Nominal and Maximum Output Power Specifications



This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

### 1.3.1 2G/3G/4G Output Power

GSM/GPRS/EDGE 850										
Power Level		Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
Max	Max allowed power	33.7	33.7	32.7	30.7	28.7	26.2	25.7	25.2	24.7
	Nominal	33.2	33.2	32.2	30.2	28.2	25.7	25.2	24.7	24.2
GSM/GPRS/EDGE 1900										
Power Level		Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
Max	Max allowed power	30.7	30.7	29.7	27.7	25.7	25.7	25.2	25.2	24.7
	Nominal	30.2	30.2	29.2	27.2	25.2	25.2	24.7	24.7	24.2




Band/Mode		Modulated Average Output Power (in dBm)	
UMTS Band 5 (850 MHz)		Max	
		Nominal	Max allowed power
3GPP WCDMA Rel 99		24.7	25.2
3GPP HSDPA Rel 5	Subtest 1	24.7	25.2
	Subtest 2	24.7	25.2
	Subtest 3	24.2	24.7
	Subtest 4	24.2	24.7
3GPP HSUPA Rel 6	Subtest 1	22.7	23.2
	Subtest 2	22.7	23.2
	Subtest 3	23.7	24.2
	Subtest 4	22.2	22.7
	Subtest 5	23.7	24.2

Band/Mode		Modulated Average Output Power (in dBm)				Band/Mode		Modulated Average Output Power (in dBm)			
UMTS Band 4 (1750 MHz)		Max		Hotspot Mode or Grip Sensor Active		UMTS Band 2 (1900 MHz)		Max		Hotspot Mode or Grip Sensor Active	
		Nominal	Max allowed power	Nominal	Max allowed power			Nominal	Max allowed power	Nominal	Max allowed power
3GPP WCDMA		24.2	24.7	22.7	23.2	3GPP WCDMA		24.2	24.7	22.7	23.2
3GPP HSDPA Rel 5	Subtest 1	24.2	24.7	22.7	23.2	3GPP HSDPA Rel 5	Subtest 1	24.2	24.7	22.7	23.2
	Subtest 2	24.2	24.7	22.7	23.2		Subtest 2	24.2	24.7	22.7	23.2
	Subtest 3	23.7	24.2	22.2	22.7		Subtest 3	23.7	24.2	22.2	22.7
	Subtest 4	23.7	24.2	22.2	22.7		Subtest 4	23.7	24.2	22.2	22.7
3GPP HSUPA Rel 6	Subtest 1	22.2	22.7	20.7	21.2	3GPP HSUPA Rel 6	Subtest 1	22.2	22.7	20.7	21.2
	Subtest 2	22.2	22.7	20.7	21.2		Subtest 2	22.2	22.7	20.7	21.2
	Subtest 3	23.2	23.7	21.7	22.2		Subtest 3	23.2	23.7	21.7	22.2
	Subtest 4	21.7	22.2	20.2	20.7		Subtest 4	21.7	22.2	20.2	20.7
	Subtest 5	23.2	23.7	21.7	22.2		Subtest 5	23.2	23.7	21.7	22.2

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 4 of 116

CDMA BC10 (815 MHz)				
Power Level		Modulated Average Output Power (in dBm)		
		1x-RTT	EVDO Rev 0	EVDO Rev A
Max	Max allowed power	25.2	25.2	25.2
	Nominal	24.7	24.7	24.7
CDMA BC0 (835 MHz)				
Power Level		Modulated Average Output Power (in dBm)		
		1x-RTT	EVDO Rev 0	EVDO Rev A
Max	Max allowed power	25.2	25.2	25.2
	Nominal	24.7	24.7	24.7
CDMA BC1 (1900 MHz)				
Power Level		Modulated Average Output Power (in dBm)		
		1x-RTT	EVDO Rev 0	EVDO Rev A
Max	Max allowed power	24.7	24.7	24.7
	Nominal	24.2	24.2	24.2
Hotspot Mode or Grip Sensor Active	Max allowed power	23.2	23.2	23.2
	Nominal	22.7	22.7	22.7

Mode / Band		Modulated Average Output Power (in dBm)	
		Max	Hotspot Mode or Grip Sensor Active
LTE FDD Band 71	Max allowed power	25.2	25.2
	Nominal	24.7	24.7
LTE FDD Band 12	Max allowed power	25.2	25.2
	Nominal	24.7	24.7
LTE FDD Band 13	Max allowed power	25.2	25.2
	Nominal	24.7	24.7
LTE FDD Band 5	Max allowed power	25.2	25.2
	Nominal	24.7	24.7
LTE FDD Band 26	Max allowed power	25.2	25.2
	Nominal	24.7	24.7
LTE FDD Band 4	Max allowed power	24.7	23.2
	Nominal	24.2	22.7
LTE FDD Band 66	Max allowed power	24.7	23.2
	Nominal	24.2	22.7
LTE FDD Band 2	Max allowed power	24.7	23.2
	Nominal	24.2	22.7
LTE FDD Band 25	Max allowed power	24.7	23.2
	Nominal	24.2	22.7
LTE TDD Band 41 (PC3)	Max allowed power	25.2	23.7
	Nominal	24.7	23.2
LTE TDD Band 41 (PC2)	Max allowed power	27.2	25.7
	Nominal	26.7	25.2

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 5 of 116	

### 1.3.2 Maximum WLAN and Bluetooth Output Power




Mode / Band		Modulated Average (dBm)		
Channel		1	2 - 10	11
IEEE 802.11b (2.4 GHz)	Maximum	21.5	21.5	21.5
	Nominal	20.5	20.5	20.5
IEEE 802.11g (2.4 GHz)	Maximum	17.5	19.5	17.5
	Nominal	16.5	18.5	16.5
IEEE 802.11n (2.4 GHz)	Maximum	16.5	18.5	16.5
	Nominal	15.5	17.5	15.5

Mode / Band		Modulated Average (dBm)																											
		20 MHz Bandwidth															40 MHz Bandwidth												80 MHz Bandwidth
	Channel	36	40	44-48	52	56	60	64	100	104-140	144	149-153	157	161	165	38	46	54	62	102	110	118	126	134	142	151	159	42-155	
IEEE 802.11a (5 GHz)	Maximum	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0														
	Nominal	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0	18.0														
IEEE 802.11n (5 GHz)	Maximum	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	16.5	18.5	18.5	16.5	16.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5		
	Nominal	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	15.5	17.5	17.5	15.5	15.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5		
IEEE 802.11ac (5 GHz)	Maximum	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	16.5	18.5	18.5	16.5	16.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	15.5	
	Nominal	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	15.5	17.5	17.5	15.5	15.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	14.5	

Mode / Band		Modulated Average (dBm)
Bluetooth	Maximum	8.5
	Nominal	7.5
Bluetooth LE	Maximum	4.5
	Nominal	3.5

### 1.3.3 Reduced WLAN Output Power

Mode / Band		Modulated Average (dBm)		
Channel		1	2 - 10	11
IEEE 802.11b (2.4 GHz)	Maximum	18.0	18.0	18.0
	Nominal	17.0	17.0	17.0
IEEE 802.11g (2.4 GHz)	Maximum	17.5	18.0	17.5
	Nominal	16.5	17.0	16.5
IEEE 802.11n (2.4 GHz)	Maximum	16.5	18.0	16.5
	Nominal	15.5	17.0	15.5

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 6 of 116





## 1.6 Simultaneous Transmission Capabilities




According to FCC KDB Publication 447498 D01v06, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2**  
**Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes <sup>a</sup>	Yes	N/A	Yes	<sup>a</sup> Bluetooth Tethering is considered
4	1x CDMA voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes <sup>a</sup>	Yes	N/A	Yes	<sup>a</sup> Bluetooth Tethering is considered
5	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
6	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz Bluetooth	Yes <sup>a</sup>	Yes	N/A	Yes	<sup>a</sup> Bluetooth Tethering is considered
8	GSM voice + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes <sup>a</sup>	Yes	N/A	Yes	<sup>a</sup> Bluetooth Tethering is considered
9	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
10	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
11	UMTS + 2.4 GHz Bluetooth	Yes <sup>a</sup>	Yes	Yes <sup>a</sup>	Yes	<sup>a</sup> Bluetooth Tethering is considered
12	UMTS + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes <sup>a</sup>	Yes	Yes <sup>a</sup>	Yes	<sup>a</sup> Bluetooth Tethering is considered
13	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
14	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
15	LTE + 2.4 GHz Bluetooth	Yes <sup>a</sup>	Yes	Yes <sup>a</sup>	Yes	<sup>a</sup> Bluetooth Tethering is considered
16	LTE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes <sup>a</sup>	Yes	Yes <sup>a</sup>	Yes	<sup>a</sup> Bluetooth Tethering is considered
17	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
18	CDMA/EVDO data + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
19	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes <sup>a</sup> *	Yes*	Yes <sup>a</sup>	Yes	* Pre-installed VOIP applications are considered <sup>a</sup> Bluetooth Tethering is considered
20	CDMA/EVDO data + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes <sup>a</sup> *	Yes*	Yes <sup>a</sup>	Yes	* Pre-installed VOIP applications are considered <sup>a</sup> Bluetooth Tethering is considered
21	GPRS/EDGE + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
22	GPRS/EDGE + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
23	GPRS/EDGE + 2.4 GHz Bluetooth	Yes <sup>a</sup> *	Yes*	Yes <sup>a</sup>	Yes	* Pre-installed VOIP applications are considered <sup>a</sup> Bluetooth Tethering is considered
24	GPRS/EDGE + 2.4 GHz Bluetooth + 5 GHz Wi-Fi	Yes <sup>a</sup> *	Yes*	Yes <sup>a</sup>	Yes	* Pre-installed VOIP applications are considered <sup>a</sup> Bluetooth Tethering is considered

- 2.4 GHz WLAN and 2.4 GHz Bluetooth share the same antenna path and cannot transmit simultaneously.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
- 5 GHz Wireless Router is supported for UNII-1 and UNII-3 by S/W, therefore UNII-2A and UNII-2C were not evaluated for wireless router conditions.
- This device supports VOLTE.
- This device supports VOWIFI.
- This device supports Bluetooth Tethering.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 8 of 116



## 1.7 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

When U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band for applicable exposure condition(s) according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz, U-NII-1 and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz, U-NII-1 WLAN, U-NII-3 WLAN and 2.4 BT operations since wireless router 1g SAR was < 1.2 W/kg.

### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.



This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. LTE Downlink Carrier Aggregation exclusion analysis can be found in Appendix F.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 9 of 116

range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports 64QAM on the uplink for LTE Operations. Conducted powers for 64QAM uplink configurations were measured per Section 5.1 of FCC KDB Publication 941225D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64QAM is  $\leq \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$ W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.



This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class 2 condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.1).

## 1.8 Guidance Applied



- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE Band 41 Power Class 2/3)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

## 1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 10 of 116	

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 71 (665.5 - 695.5 MHz)				
	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)		695.5 (133447)
LTE Band 71: 10 MHz	668 (133172)		680.5 (133297)		693 (133422)
LTE Band 71: 15 MHz	670.5 (133197)		680.5 (133297)		690.5 (133397)
LTE Band 71: 20 MHz	673 (133222)		680.5 (133297)		688 (133372)
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 6, UL UE Cat 5				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 11. It supports carrier aggregation features as shown in Appendix F. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WiFi Offloading, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID ZNFQ730VM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 11 of 116

### 3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 12 of 116

## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.






**Figure 4-1**  
**Sample SAR Area**  
**Scan**

**Table 4-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\***

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤2 GHz	≤15	≤8	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
2-3 GHz	≤12	≤5	≤5	≤4	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30
3-4 GHz	≤12	≤5	≤4	≤3	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28
4-5 GHz	≤10	≤4	≤3	≤2.5	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25
5-6 GHz	≤10	≤4	≤2	≤2	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22

\*Also compliant to IEEE 1528-2013 Table 6


FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>			<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 13 of 116	

## 5

## DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT


Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view of ERP

### 5.2 HANDSET REFERENCE POINTS

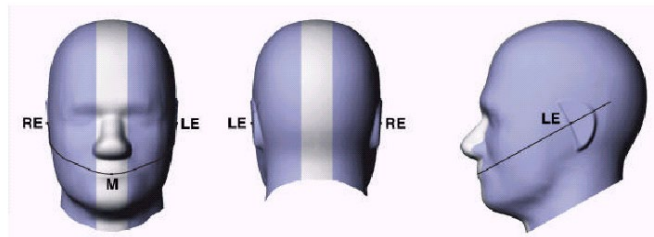

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

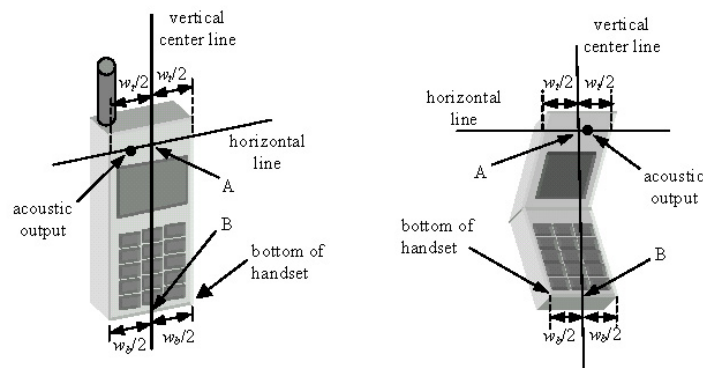

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 14 of 116



## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

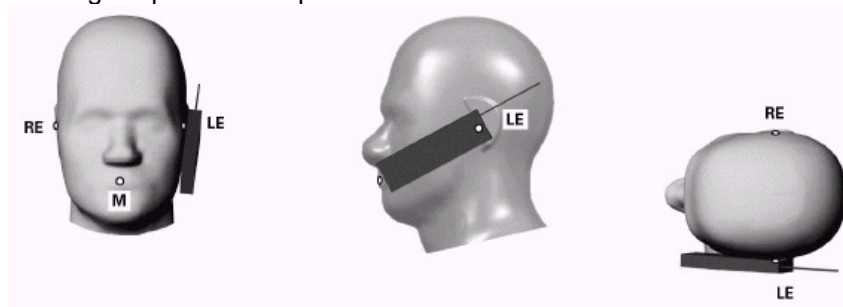





Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 15 of 116





contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.



## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 17 of 116	



support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR  $> 1.2$  W/kg.

## 6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 18 of 116	

## 7 RF EXPOSURE LIMITS

### 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



### 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 19 of 116	

## 8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”



The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

#### 8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 20 of 116

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH<sub>0</sub> and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH<sub>0</sub> data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

**Table 8-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

**Table 8-2**  
**Parameters for Max. Power for RC3**

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

## 8.4.3 Body-worn SAR Measurements




SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH<sub>n</sub>), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH<sub>n</sub>), with FCH at full rate and SCH<sub>0</sub> enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

## 8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 21 of 116



When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

#### 8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

### 8.5 SAR Measurement Conditions for UMTS

#### 8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCH<sub>n</sub> and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

#### 8.5.2 Head SAR Measurements




SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

#### 8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

#### 8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 22 of 116	



12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

### 8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.6 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.



### 8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 23 of 116

- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to ½ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is <1.45 W/kg.

### 8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

### 8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.



## 8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 24 of 116	

### 8.7.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.5 2.4 GHz SAR Test Requirements



SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 25 of 116	

bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.



### 8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 26 of 116	

## 9 RF CONDUCTED POWERS

### 9.1 CDMA Conducted Powers


**Table 9-1**  
**Maximum Conducted Power**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	24.52	24.59	24.54	24.55	24.45	24.44
Cellular	1013	22H	824.7	24.47	24.53	24.45	24.47	24.64	24.63
	384	22H	836.52	24.42	24.47	24.46	24.44	24.64	24.64
	777	22H	848.31	24.35	24.41	24.37	24.36	24.47	24.48
PCS	25	24E	1851.25	23.84	23.89	23.84	23.84	23.91	24.17
	600	24E	1880	23.85	23.91	23.85	23.87	23.67	23.92
	1175	24E	1908.75	24.12	24.18	24.10	24.12	24.24	24.26



**Table 9-2**  
**Reduced Conducted Power**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	FCH+SCH	FCH	(RTAP)	(RETAP)
PCS	25	24E	1851.25	22.35	22.41	22.34	22.37	22.46	22.45
	600	24E	1880	22.14	22.22	22.18	22.15	22.17	22.18
	1175	24E	1908.75	22.68	22.74	22.68	22.70	22.77	22.72

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.



**Figure 9-1**  
**Power Measurement Setup**

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 27 of 116

## 9.2 GSM Conducted Powers

**Table 9-3**  
**Maximum Conducted Power**




Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
<b>GSM 850</b>	128	33.48	33.47	32.35	<b>30.33</b>	28.39	25.91	25.61	25.14	24.25
	190	33.54	33.54	32.38	<b>30.39</b>	28.40	26.01	25.69	25.20	24.18
	251	33.50	33.49	32.37	<b>30.37</b>	28.34	26.08	25.67	25.19	24.24
<b>GSM 1900</b>	512	30.28	30.27	29.30	<b>27.27</b>	25.26	25.17	25.01	24.67	24.44
	661	30.35	30.35	29.34	<b>27.22</b>	25.22	25.22	25.02	24.74	24.61
	810	30.36	30.36	29.32	<b>27.40</b>	25.30	25.23	25.10	24.88	24.51

Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
<b>GSM 850</b>	128	24.28	24.27	26.16	<b>25.90</b>	25.21	16.71	19.42	20.71	21.07
	190	24.34	24.34	26.19	<b>25.96</b>	25.22	16.81	19.50	20.77	21.00
	251	24.30	24.29	26.18	<b>25.94</b>	25.16	16.88	19.48	20.76	21.06
<b>GSM 1900</b>	512	21.08	21.07	23.11	<b>22.84</b>	22.08	15.97	18.82	20.24	21.26
	661	21.15	21.15	23.15	<b>22.79</b>	22.04	16.02	18.83	20.31	21.43
	810	21.16	21.16	23.13	<b>22.97</b>	22.12	16.03	18.91	20.45	21.33

<b>GSM 850</b>	<b>Frame</b>	24.00	24.00	26.01	<b>25.77</b>	25.02	16.50	19.01	20.27	21.02
<b>GSM 1900</b>	<b>Avg.Targets:</b>	21.00	21.00	23.01	<b>22.77</b>	22.02	16.00	18.51	20.27	21.02

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset	Page 28 of 116	

- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8-PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 12** (Max 4 Tx uplink slots)  
**EDGE Multislot class: 12** (Max 4 Tx uplink slots)  
**DTM Multislot Class: N/A**





**Figure 9-2**  
**Power Measurement Setup**

### 9.3 UMTS Conducted Powers

**Table 9-4**  
**Maximum Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]		
			4132	4183	4233	1312	1412	1513	9262	9400	9538
99	WCDMA	12.2 kbps RMC	25.18	25.16	25.12	24.64	24.70	24.65	24.67	24.68	24.70
99		12.2 kbps AMR	25.15	25.15	25.10	24.58	24.55	24.56	24.66	24.69	24.70
6	HSDPA	Subtest 1	25.16	25.20	25.15	24.67	24.61	24.64	24.65	24.57	24.62
6		Subtest 2	25.20	25.20	25.15	24.61	24.65	24.68	24.64	24.64	24.68
6		Subtest 3	24.70	24.65	24.69	24.18	24.18	24.17	24.18	24.01	24.19
6		Subtest 4	24.65	24.68	24.66	24.14	24.15	24.09	24.12	24.13	24.17
6	HSUPA	Subtest 1	23.18	23.20	23.16	22.67	22.56	22.66	22.68	22.59	22.57
6		Subtest 2	23.16	23.10	23.14	22.65	22.57	22.62	22.63	22.56	22.61
6		Subtest 3	24.17	24.16	24.15	23.66	23.58	23.66	23.65	23.65	23.69
6		Subtest 4	22.67	22.57	22.56	22.17	22.18	22.20	22.19	22.13	22.18
6		Subtest 5	24.13	24.14	24.13	23.60	23.56	23.64	23.61	23.57	23.70

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 29 of 116






**Table 9-5**  
**Reduced Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]		
			1312	1412	1513	9262	9400	9538
99	WCDMA	12.2 kbps RMC	23.19	23.12	23.20	23.20	23.10	23.09
99		12.2 kbps AMR	23.18	23.19	23.20	23.18	23.09	23.08
6	HSDPA	Subtest 1	23.12	23.20	23.16	23.19	23.14	23.07
6		Subtest 2	23.15	23.19	23.20	23.11	23.02	23.04
6		Subtest 3	22.65	22.70	22.68	22.61	22.56	22.60
6		Subtest 4	22.67	22.70	22.69	22.63	22.54	22.53
6	HSUPA	Subtest 1	21.82	21.85	21.94	21.65	21.58	21.56
6		Subtest 2	21.31	21.33	21.42	21.14	21.08	21.10
6		Subtest 3	22.19	22.20	22.17	22.08	22.08	22.20
6		Subtest 4	20.70	20.68	20.69	20.63	20.54	20.60
6		Subtest 5	22.20	22.18	22.15	22.13	22.16	22.17

This device does not support DC-HSDPA.



**Figure 9-3**  
**Power Measurement Setup**

FCC ID ZNFQ730VM	 <small>Proud to be part of</small> 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 30 of 116	

## 9.4 LTE Conducted Powers




### 9.4.1

### LTE Band 71

Table 9-6  
LTE Band 71 Maximum Conducted Powers - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.83	0	0
	1	50	<b>25.10</b>		0
	1	99	24.77		0
	50	0	23.91	0-1	1
	50	25	<b>23.98</b>		1
	50	50	23.95		1
	100	0	23.95		1
16QAM	1	0	24.18	0-1	1
	1	50	24.20		1
	1	99	24.11		1
	50	0	23.00	0-2	2
	50	25	23.06		2
	50	50	23.02		2
	100	0	22.99		2
64QAM	1	0	23.15	0-2	2
	1	50	23.20		2
	1	99	23.11		2
	50	0	22.10	0-3	3
	50	25	22.06		3
	50	50	22.11		3
	100	0	22.07		3



Note: LTE Band 71 at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 31 of 116

**Table 9-7**  
**LTE Band 71 Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 71 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.91	0	0
	1	36	25.05		0
	1	74	24.89		0
	36	0	23.86	0-1	1
	36	18	23.97		1
	36	37	23.91		1
	75	0	23.92		1
16QAM	1	0	24.03	0-1	1
	1	36	24.13		1
	1	74	23.92		1
	36	0	22.82	0-2	2
	36	18	22.95		2
	36	37	22.89		2
	75	0	22.89		2
64QAM	1	0	22.86	0-2	2
	1	36	23.04		2
	1	74	22.84		2
	36	0	21.84	0-3	3
	36	18	21.96		3
	36	37	21.90		3
	75	0	21.93		3

Note: LTE Band 71 at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 32 of 116	

**Table 9-8**  
**LTE Band 71 Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 71 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133172 (668.0 MHz)	133297 (680.5 MHz)	133422 (693.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.91	24.69	24.90	0	0
	1	25	24.98	24.81	25.07		0
	1	49	24.91	24.67	24.94		0
	25	0	23.72	23.84	23.88	0-1	1
	25	12	23.80	23.90	23.82		1
	25	25	23.90	23.83	23.78		1
16QAM	50	0	23.82	23.86	23.82		1
	1	0	24.14	24.16	24.15	0-1	1
	1	25	24.17	24.20	24.20		1
	1	49	24.16	24.19	24.16		1
	25	0	22.79	22.83	22.85	0-2	2
	25	12	22.86	22.85	22.83		2
25	25	22.93	22.77	22.76	2		
64QAM	50	0	22.83	22.81	22.87		2
	1	0	23.12	23.10	22.87	0-2	2
	1	25	23.12	23.13	23.04		2
	1	49	23.01	23.03	22.95		2
	25	0	21.79	21.84	21.95	0-3	3
	25	12	21.89	21.84	21.92		3
25	25	21.94	21.81	21.88	3		
	50	0	21.87	21.85	21.90		3

**Table 9-9**  
**LTE Band 71 Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 71 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133147 (665.5 MHz)	133297 (680.5 MHz)	133447 (695.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.71	24.62	24.56	0	0
	1	12	24.80	24.82	24.71		0
	1	24	24.71	24.58	24.55		0
	12	0	23.57	23.76	23.72	0-1	1
	12	6	23.67	23.81	23.79		1
	12	13	23.71	23.84	23.76		1
16QAM	25	0	23.67	23.78	23.77		1
	1	0	23.88	23.77	23.51	0-1	1
	1	12	24.02	24.16	23.87		1
	1	24	23.89	23.75	23.53		1
	12	0	22.72	22.85	22.80	0-2	2
	12	6	22.83	22.92	22.80		2
12	13	22.80	22.86	22.81	2		
64QAM	25	0	22.57	22.83	22.81		2
	1	0	23.14	23.12	22.92	0-2	2
	1	12	23.20	23.15	23.18		2
	1	24	23.19	23.07	22.95		2
	12	0	21.64	21.73	21.77	0-3	3
	12	6	21.79	21.79	21.90		3
12	13	21.75	21.75	21.89	3		
	25	0	21.65	21.81	21.77		3

FCC ID ZNFQ730VM	 Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 33 of 116	




## 9.4.2

## LTE Band 12

**Table 9-10**  
**LTE Band 12 Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.88	0	0
	1	25	<b>25.11</b>		0
	1	49	24.87		0
	25	0	23.87	0-1	1
	25	12	<b>23.92</b>		1
	25	25	23.89		1
	50	0	23.90		1
16QAM	1	0	23.75	0-1	1
	1	25	23.92		1
	1	49	23.76		1
	25	0	22.87	0-2	2
	25	12	22.97		2
	25	25	22.93		2
	50	0	22.90		2
64QAM	1	0	23.12	0-2	2
	1	25	23.20		2
	1	49	23.19		2
	25	0	21.94	0-3	3
	25	12	22.06		3
	25	25	22.01		3
	50	0	21.95		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 34 of 116	

**Table 9-11**  
**LTE Band 12 Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.79	24.94	24.85	0	0
	1	12	24.98	25.20	25.04		0
	1	24	24.76	25.06	24.89		0
	12	0	24.05	24.02	24.09	0-1	1
	12	6	24.09	24.11	24.15		1
	12	13	24.07	24.10	24.09		1
	25	0	24.03	24.08	24.13		1
16QAM	1	0	24.11	24.06	23.82	0-1	1
	1	12	24.20	24.20	24.05		1
	1	24	24.15	24.13	23.85		1
	12	0	23.13	23.10	23.15	0-2	2
	12	6	23.19	23.15	23.18		2
	12	13	23.15	23.13	23.13		2
	25	0	22.98	23.12	23.11		2
64QAM	1	0	23.10	23.11	23.01	0-2	2
	1	12	23.20	23.20	23.19		2
	1	24	23.12	23.11	23.17		2
	12	0	22.13	22.02	22.02	0-3	3
	12	6	22.19	22.03	22.05		3
	12	13	22.12	22.09	22.20		3
	25	0	22.03	22.07	22.13		3



**Table 9-12**  
**LTE Band 12 Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.20	24.93	25.19	0	0
	1	7	25.20	25.15	25.12		0
	1	14	25.12	24.98	25.17		0
	8	0	24.05	24.10	24.15	0-1	1
	8	4	24.12	24.17	24.11		1
	8	7	24.08	24.12	24.10		1
	15	0	24.00	24.05	24.07		1
16QAM	1	0	24.11	24.01	24.07	0-1	1
	1	7	24.19	24.20	24.20		1
	1	14	24.19	24.03	24.03		1
	8	0	23.19	22.91	23.20	0-2	2
	8	4	23.12	23.01	23.18		2
	8	7	23.15	22.93	23.12		2
	15	0	22.96	23.03	23.15		2
64QAM	1	0	22.79	22.71	23.20	0-2	2
	1	7	22.95	23.04	23.20		2
	1	14	22.94	22.87	23.03		2
	8	0	22.15	21.99	22.13	0-3	3
	8	4	22.18	22.03	22.18		3
	8	7	22.20	21.99	22.19		3
	15	0	22.09	22.04	22.18		3

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 35 of 116	

**Table 9-13**  
**LTE Band 12 Maximum Conducted Powers - 1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.96	25.15	25.07	0	0
	1	2	25.09	25.20	25.14		0
	1	5	24.95	25.08	25.05		0
	3	0	25.00	24.97	25.09		0
	3	2	25.06	24.99	25.15		0
	3	3	25.14	25.00	25.09		0
	6	0	24.05	24.10	24.13	0-1	1
16QAM	1	0	24.12	24.00	24.15	0-1	1
	1	2	24.20	24.10	24.20		1
	1	5	24.16	24.16	24.16		1
	3	0	24.05	23.96	24.18		1
	3	2	24.14	24.03	24.15		1
	3	3	24.11	24.05	24.20		1
	6	0	22.97	23.00	22.98	0-2	2
64QAM	1	0	23.16	23.04	23.11	0-2	2
	1	2	23.20	23.18	23.20		2
	1	5	23.17	23.00	23.15		2
	3	0	23.17	22.99	23.17		2
	3	2	23.20	23.06	23.12		2
	3	3	23.19	23.10	23.12		2
	6	0	22.12	22.19	21.98	0-3	3

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b>
Document S/N:	Test Dates:	DUT Type:		Quality Manager
1M2003310054-01-R1.ZNF	04/12/20 - 05/06/20	Portable Handset		Page 36 of 116





### 9.4.3

### LTE Band 13

**Table 9-14**  
**LTE Band 13 Maximum Conducted Powers - 10 MHz Bandwidth**



LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.78	0	0
	1	25	<b>24.87</b>		0
	1	49	24.74		0
	25	0	23.79	0-1	1
	25	12	<b>23.90</b>		1
	25	25	23.85		1
	50	0	23.81		1
16QAM	1	0	23.71	0-1	1
	1	25	23.88		1
	1	49	23.62		1
	25	0	22.84	0-2	2
	25	12	22.94		2
	25	25	22.89		2
	50	0	22.79		2
64QAM	1	0	22.91	0-2	2
	1	25	23.07		2
	1	49	22.82		2
	25	0	21.82	0-3	3
	25	12	21.91		3
	25	25	21.90		3
	50	0	21.80		3

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 37 of 116

**Table 9-15**  
**LTE Band 13 Maximum Conducted Powers - 5 MHz Bandwidth**  
**LTE Band 13**  
**5 MHz Bandwidth**

Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.75	0	0
	1	12	24.90		0
	1	24	24.71		0
	12	0	23.98	0-1	1
	12	6	23.99		1
	12	13	23.97		1
	25	0	23.96		1
16QAM	1	0	23.81	0-1	1
	1	12	24.05		1
	1	24	23.75		1
	12	0	23.02	0-2	2
	12	6	23.02		2
	12	13	23.03		2
	25	0	22.96		2
64QAM	1	0	23.09	0-2	2
	1	12	23.20		2
	1	24	23.04		2
	12	0	22.03	0-3	3
	12	6	22.04		3
	12	13	22.04		3
	25	0	21.93		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 38 of 116	



#### 9.4.4

#### LTE Band 26 (Cell)

**Table 9-16**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.81	0	0
	1	36	<b>24.94</b>		0
	1	74	24.82		0
	36	0	23.82	0-1	1
	36	18	<b>23.92</b>		1
	36	37	23.91		1
	75	0	23.90		1
16QAM	1	0	24.10	0-1	1
	1	36	24.17		1
	1	74	24.02		1
	36	0	22.81	0-2	2
	36	18	22.88		2
	36	37	22.82		2
	75	0	22.86		2
64QAM	1	0	23.10	0-2	2
	1	36	23.12		2
	1	74	23.08		2
	36	0	21.81	0-3	3
	36	18	21.84		3
	36	37	21.84		3
	75	0	21.88		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 39 of 116	

**Table 9-17**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.08	24.86	24.99	0	0
	1	25	25.16	25.05	25.11		0
	1	49	25.00	24.88	24.97		0
	25	0	24.02	24.07	24.00	0-1	1
	25	12	24.03	24.04	23.95		1
	25	25	24.03	24.01	23.84		1
	50	0	24.04	24.06	23.92		1
16QAM	1	0	24.10	24.06	24.18	0-1	1
	1	25	24.07	24.16	24.20		1
	1	49	24.03	24.04	24.10		1
	25	0	23.07	23.03	23.04	0-2	2
	25	12	23.07	22.99	23.01		2
	25	25	23.07	22.98	22.84		2
	50	0	23.08	23.03	23.02		2
64QAM	1	0	23.10	23.17	23.15	0-2	2
	1	25	23.16	23.20	23.20		2
	1	49	23.04	23.17	23.12		2
	25	0	22.05	22.04	22.12	0-3	3
	25	12	22.08	22.00	22.06		3
	25	25	22.05	21.97	21.91		3
	50	0	22.03	22.03	22.03		3

**Table 9-18**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.79	24.92	24.75	0	0
	1	12	24.89	25.01	24.86		0
	1	24	24.73	24.91	24.71		0
	12	0	24.00	24.00	23.93	0-1	1
	12	6	24.09	24.08	23.96		1
	12	13	23.99	24.05	23.82		1
	25	0	23.98	24.05	23.89		1
16QAM	1	0	24.02	24.11	23.80	0-1	1
	1	12	24.20	24.20	24.06		1
	1	24	24.20	24.07	23.74		1
	12	0	23.05	23.02	23.00	0-2	2
	12	6	23.13	23.13	23.03		2
	12	13	23.07	23.07	22.90		2
	25	0	22.93	23.07	22.97		2
64QAM	1	0	23.15	23.07	23.08	0-2	2
	1	12	23.20	23.20	23.13		2
	1	24	23.10	23.20	23.08		2
	12	0	22.00	21.98	22.01	0-3	3
	12	6	22.08	22.02	22.03		3
	12	13	22.02	22.00	21.91		3
	25	0	21.95	21.98	21.88		3



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 40 of 116	

**Table 9-19**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.12	24.94	24.94	0	0
	1	7	25.20	25.18	25.20		0
	1	14	24.99	24.91	24.99		0
	8	0	24.03	24.06	23.95	0-1	1
	8	4	24.05	24.11	23.94		1
	8	7	24.01	24.07	23.91		1
	15	0	24.01	24.05	23.88		1
16QAM	1	0	24.20	24.00	24.16	0-1	1
	1	7	24.04	24.20	24.20		1
	1	14	24.18	24.17	24.12		1
	8	0	23.10	22.91	23.04	0-2	2
	8	4	23.05	22.97	22.99		2
	8	7	23.13	22.90	22.94		2
	15	0	22.92	22.99	22.98		2
64QAM	1	0	23.01	23.12	23.12	0-2	2
	1	7	23.20	23.19	23.20		2
	1	14	23.03	23.09	23.12		2
	8	0	22.08	21.95	21.99	0-3	3
	8	4	22.07	21.96	22.01		3
	8	7	22.12	21.95	22.01		3
	15	0	22.00	21.95	22.04		3

**Table 9-20**  
**LTE Band 26 (Cell) Maximum Conducted Powers - 1.4 MHz Bandwidth**

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.08	24.90	24.99	0	0
	1	2	25.20	25.06	25.10		0
	1	5	24.99	24.88	24.95		0
	3	0	25.06	24.96	24.89		0
	3	2	25.09	25.03	24.93		0
	3	3	25.01	25.06	24.86		0
	6	0	24.04	24.04	23.95	0-1	1
16QAM	1	0	24.07	24.15	24.03	0-1	1
	1	2	24.19	24.19	24.14		1
	1	5	24.00	24.13	24.05		1
	3	0	24.10	24.04	23.94		1
	3	2	24.09	24.13	23.97		1
	3	3	24.20	24.05	24.03	1	
64QAM	6	0	22.95	22.99	22.84	0-2	2
	1	0	23.16	23.06	23.03	0-2	2
	1	2	23.20	23.10	23.11		2
	1	5	23.17	23.05	22.95		2
	3	0	23.00	23.11	23.16		2
	3	2	23.19	23.13	23.13		2
3	3	22.94	23.11	23.14	2		
64QAM	6	0	21.97	22.08	21.88	0-3	3

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 41 of 116	

## 9.4.5



## LTE Band 66 (AWS)

**Table 9-21**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.55	24.43	24.45	0	0
	1	50	24.68	24.70	24.62		0
	1	99	24.43	24.34	24.33		0
	50	0	23.52	23.69	23.68	0-1	1
	50	25	23.58	23.70	23.67		1
	50	50	23.51	23.69	23.59		1
	100	0	23.54	23.68	23.64		1
16QAM	1	0	23.31	23.54	23.60	0-1	1
	1	50	23.48	23.69	23.64		1
	1	99	23.26	23.44	23.39		1
	50	0	22.34	22.57	22.67	0-2	2
	50	25	22.41	22.63	22.61		2
	50	50	22.34	22.58	22.54		2
	100	0	22.38	22.61	22.55		2
64QAM	1	0	22.35	22.64	22.59	0-2	2
	1	50	22.60	22.70	22.70		2
	1	99	22.38	22.66	22.58		2
	50	0	21.29	21.53	21.56	0-3	3
	50	25	21.38	21.58	21.55		3
	50	50	21.33	21.52	21.48		3
	100	0	21.32	21.49	21.44		3

**Table 9-22**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.69	24.51	24.46	0	0
	1	36	24.67	24.69	24.49		0
	1	74	24.61	24.53	24.46		0
	36	0	23.66	23.60	23.63	0-1	1
	36	18	23.70	23.64	23.66		1
	36	37	23.63	23.62	23.62		1
	75	0	23.62	23.62	23.62		1
16QAM	1	0	23.23	23.70	23.61	0-1	1
	1	36	23.39	23.70	23.70		1
	1	74	23.21	23.54	23.65		1
	36	0	22.56	22.43	22.68	0-2	2
	36	18	22.59	22.66	22.68		2
	36	37	22.51	22.66	22.63		2
	75	0	22.47	22.66	22.66		2
64QAM	1	0	22.34	22.54	22.53	0-2	2
	1	36	22.51	22.70	22.64		2
	1	74	22.30	22.65	22.56		2
	36	0	21.37	21.38	21.51	0-3	3
	36	18	21.42	21.41	21.54		3
	36	37	21.36	21.43	21.50		3
	75	0	21.33	21.54	21.52		3



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 42 of 116

**Table 9-23**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.51	24.61	24.51	0	0
	1	25	24.62	24.60	24.70		0
	1	49	24.46	24.63	24.55		0
	25	0	23.60	23.66	23.54	0-1	1
	25	12	23.60	23.68	23.53		1
	25	25	23.62	23.68	23.52		1
16QAM	50	0	23.54	23.63	23.49	0-1	1
	1	0	23.46	23.69	23.57		1
	1	25	23.52	23.70	23.67		1
	1	49	23.43	23.64	23.68	0-2	1
	25	0	22.49	22.57	22.68		2
	25	12	22.50	22.58	22.69		2
64QAM	25	25	22.47	22.61	22.65	0-2	2
	50	0	22.45	22.61	22.70		2
	1	0	22.64	22.63	22.56	0-2	2
	1	25	22.70	22.70	22.68		2
	1	49	22.59	22.64	22.67	0-3	2
	25	0	21.36	21.45	21.60		3
	25	12	21.42	21.47	21.62		3
	25	25	21.35	21.43	21.58		3
	50	0	21.34	21.47	21.56		3

**Table 9-24**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.35	24.65	24.53	0	0
	1	12	24.54	24.70	24.63		0
	1	24	24.33	24.64	24.59		0
	12	0	23.54	23.55	23.70	0-1	1
	12	6	23.62	23.65	23.68		1
	12	13	23.61	23.60	23.70		1
	25	0	23.56	23.56	23.66		1
16QAM	1	0	23.36	23.27	23.02	0-1	1
	1	12	23.54	23.66	23.33		1
	1	24	23.31	23.25	23.06		1
	12	0	22.49	22.68	22.66	0-2	2
	12	6	22.59	22.70	22.64		2
	12	13	22.56	22.69	22.65		2
	25	0	22.39	22.70	22.61		2
64QAM	1	0	22.52	22.67	22.68	0-2	2
	1	12	22.70	22.70	22.70		2
	1	24	22.47	22.69	22.65		2
	12	0	21.35	21.49	21.57	0-3	3
	12	6	21.40	21.52	21.62		3
	12	13	21.38	21.51	21.64		3
	25	0	21.27	21.50	21.49		3

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 43 of 116	





**Table 9-25**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.44	24.66	24.50	0	0
	1	7	24.70	24.69	24.69		0
	1	14	24.37	24.65	24.50		0
	8	0	23.65	23.63	23.45	0-1	1
	8	4	23.69	23.70	23.55		1
	8	7	23.59	23.65	23.49		1
16QAM	15	0	23.55	23.57	23.44	0-1	1
	1	0	23.45	23.62	23.62		1
	1	7	23.43	23.70	23.70		1
	1	14	23.47	23.50	23.56	0-2	1
	8	0	22.60	22.53	22.64		2
	8	4	22.63	22.58	22.63		2
64QAM	8	7	22.60	22.54	22.68	0-2	2
	15	0	22.33	22.62	22.69		2
	1	0	22.68	22.48	22.59		0-2
	1	7	22.70	22.68	22.63	2	
	1	14	22.59	22.47	22.67	2	
	64QAM	8	0	21.43	21.44	21.49	0-3
8		4	21.47	21.44	21.55	3	
8		7	21.47	21.37	21.56	3	
15		0	21.34	21.44	21.54		3

**Table 9-26**  
**LTE Band 66 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.68	24.62	24.46	0	0
	1	2	24.65	24.67	24.55		0
	1	5	24.69	24.61	24.47		0
	3	0	24.58	24.66	24.62		0
	3	2	24.58	24.63	24.64		0
	3	3	24.55	24.66	24.63		0
	6	0	23.63	23.64	23.66	0-1	1
16QAM	1	0	23.42	23.64	23.62	0-1	1
	1	2	23.54	23.70	23.69		1
	1	5	23.46	23.63	23.58		1
	3	0	23.14	23.23	23.21		1
	3	2	23.16	23.35	23.25		1
	3	3	23.22	23.28	23.26		1
	6	0	22.35	22.54	22.55	0-2	2
64QAM	1	0	22.62	22.61	22.64	0-2	2
	1	2	22.70	22.66	22.68		2
	1	5	22.68	22.60	22.55		2
	3	0	22.58	22.67	22.42		2
	3	2	22.64	22.70	22.53		2
	3	3	22.60	22.70	22.55		2
	6	0	21.24	21.52	21.59	0-3	3



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 44 of 116	

**Table 9-27**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.97	22.95	23.03	0	0
	1	50	23.02	23.19	23.02		0
	1	99	22.74	22.88	22.85		0
	50	0	22.98	23.10	23.12	0-1	0
	50	25	23.16	23.18	22.98		0
	50	50	22.94	23.13	23.07		0
	100	0	22.94	23.17	23.05		0
16QAM	1	0	22.89	23.06	23.20	0-1	0
	1	50	23.09	23.17	22.96		0
	1	99	22.90	23.20	22.84		0
	50	0	22.39	22.51	22.53	0-2	0.5
	50	25	22.53	22.55	22.57		0.5
	50	50	22.32	22.55	22.48		0.5
	100	0	22.34	22.48	22.45		0.5
64QAM	1	0	22.47	22.43	22.40	0-2	0.5
	1	50	22.53	22.70	22.47		0.5
	1	99	22.58	22.53	22.57		0.5
	50	0	21.58	21.58	21.49	0-3	1.5
	50	25	21.40	21.57	21.55		1.5
	50	50	21.37	21.50	21.59		1.5
	100	0	21.42	21.48	21.57		1.5

**Table 9-28**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.62	22.79	22.72	0	0
	1	36	22.74	22.88	22.74		0
	1	74	22.64	22.79	22.70		0
	36	0	22.77	22.92	22.84	0-1	0
	36	18	22.79	22.94	22.80		0
	36	37	22.75	23.01	22.84		0
	75	0	22.76	22.95	22.79		0
16QAM	1	0	22.84	22.99	22.92	0-1	0
	1	36	22.89	23.05	22.92		0
	1	74	22.80	23.03	22.88		0
	36	0	22.05	22.25	22.15	0-2	0.5
	36	18	22.08	22.28	22.20		0.5
	36	37	22.09	22.30	22.15		0.5
	75	0	22.10	22.28	22.17		0.5
64QAM	1	0	22.05	22.18	22.12	0-2	0.5
	1	36	22.15	22.30	22.00		0.5
	1	74	22.05	22.20	22.10		0.5
	36	0	20.97	21.17	21.06	0-3	1.5
	36	18	21.05	21.20	21.09		1.5
	36	37	20.98	21.22	21.05		1.5
	75	0	20.96	21.16	21.02		1.5



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 45 of 116	

**Table 9-29**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	22.68	22.79	22.65	0	0	
	1	25	22.70	22.93	22.80		0	
	1	49	22.67	22.78	22.71		0	
	25	0	22.73	22.87	22.74	0-1	0	
	25	12	22.80	22.90	22.78		0	
	25	25	22.87	22.91	22.80		0	
16QAM	50	0	22.76	22.91	22.82	0-1	0	
	1	0	22.76	22.99	22.81		0	
	1	25	22.86	23.02	22.99		0	
	1	49	22.69	22.91	22.84	0-2	0	
	25	0	22.03	22.18	22.22		0.5	
	25	12	22.08	22.21	22.07		0.5	
64QAM	25	25	22.06	22.22	22.14	0-2	0.5	
	50	0	22.04	22.23	22.17		0.5	
	64QAM	1	0	22.08	22.15	22.10	0-2	0.5
		1	25	22.14	22.32	22.24		0.5
		1	49	22.00	22.20	22.07		0.5
		25	0	20.91	21.16	21.06	0-3	1.5
25		12	21.00	21.12	21.04	1.5		
25		25	21.00	21.10	21.06	1.5		
	50	0	20.96	21.12	21.06		1.5	

**Table 9-30**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.91	22.67	22.57	0	0
	1	12	22.98	22.96	22.91		0
	1	24	22.84	22.68	22.57		0
	12	0	22.71	22.81	22.77	0-1	0
	12	6	22.88	22.86	22.76		0
	12	13	22.78	22.80	22.75		0
16QAM	25	0	22.70	22.82	22.74	0-1	0
	1	0	22.57	22.70	22.81		0
	1	12	22.57	22.86	22.78		0
	1	24	22.66	22.78	22.73	0-2	0
	12	0	22.03	22.15	22.08		0.5
	12	6	22.09	22.21	22.23		0.5
64QAM	12	13	22.07	22.15	22.15	0-2	0.5
	25	0	22.05	22.17	22.15		0.5
	1	0	21.93	22.07	22.03	0-2	0.5
	1	12	22.18	22.39	22.29		0.5
	1	24	21.95	22.08	21.99		0.5
	64QAM	12	0	20.92	21.07	21.01	0-3
12		6	20.99	21.13	21.04	1.5	
12		13	20.97	21.06	21.04	1.5	
25		0	20.93	21.08	21.02	1.5	



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 46 of 116	

**Table 9-31**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.72	22.68	22.74	0	0
	1	7	22.85	22.86	22.87		0
	1	14	22.68	22.70	22.91		0
	8	0	22.74	22.69	22.81	0-1	0
	8	4	22.76	22.74	22.85		0
	8	7	22.77	22.70	22.74		0
	15	0	22.76	22.73	22.75		0
16QAM	1	0	22.84	22.81	22.87	0-1	0
	1	7	23.11	23.00	23.08		0
	1	14	22.53	22.96	22.96		0
	8	0	22.09	22.14	22.14	0-2	0.5
	8	4	22.11	22.17	22.17		0.5
	8	7	22.07	22.14	22.17		0.5
	15	0	22.03	22.01	22.07		0.5
64QAM	1	0	22.03	22.04	22.11	0-2	0.5
	1	7	22.19	22.25	22.23		0.5
	1	14	21.98	22.09	22.14		0.5
	8	0	21.00	21.03	21.08	0-3	1.5
	8	4	21.14	21.04	21.08		1.5
	8	7	20.95	21.05	21.05		1.5
	15	0	20.93	21.02	20.98		1.5

**Table 9-32**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.65	22.77	22.66	0	0
	1	2	22.65	22.76	22.65		0
	1	5	22.64	22.90	22.71		0
	3	0	22.83	22.82	22.74		0
	3	2	22.81	22.83	22.83		0
	3	3	22.89	22.76	22.76		0
	6	0	22.77	22.85	22.74	0-1	0
16QAM	1	0	22.84	22.86	22.77	0-1	0
	1	2	22.77	22.83	22.76		0
	1	5	22.75	22.71	22.78		0
	3	0	22.73	22.84	22.71		0
	3	2	22.72	22.88	22.72		0
	3	3	22.80	22.89	22.83		0
	6	0	22.16	22.25	22.03	0-2	0.5
64QAM	1	0	22.00	22.14	21.96	0-2	0.5
	1	2	22.13	22.12	22.05		0.5
	1	5	22.11	22.11	22.08		0.5
	3	0	22.01	22.16	22.11		0.5
	3	2	22.00	22.06	22.05		0.5
	3	3	22.13	22.12	22.03		0.5
	6	0	20.99	21.07	21.00	0-3	1.5

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 47 of 116	

## 9.4.6



## LTE Band 25 (PCS)

**Table 9-33**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.52	24.62	24.70	0	0
	1	50	24.61	24.68	24.63		0
	1	99	24.41	24.64	24.35		0
	50	0	23.65	23.69	23.69	0-1	1
	50	25	23.69	23.68	23.70		1
	50	50	23.60	23.69	23.54		1
	100	0	23.64	23.67	23.51	1	
16QAM	1	0	23.69	23.69	23.68	0-1	1
	1	50	23.70	23.68	23.70		1
	1	99	23.57	23.65	23.56		1
	50	0	22.68	22.69	22.56	0-2	2
	50	25	22.68	22.70	22.70		2
	50	50	22.60	22.68	22.70		2
	100	0	22.59	22.70	22.57	2	
64QAM	1	0	22.50	22.57	22.69	0-2	2
	1	50	22.48	22.59	22.66		2
	1	99	22.37	22.58	22.62		2
	50	0	21.70	21.65	21.70	0-3	3
	50	25	21.68	21.68	21.64		3
	50	50	21.60	21.70	21.60		3
	100	0	21.59	21.61	21.70	3	

**Table 9-34**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.55	24.41	24.47	0	0
	1	36	24.56	24.57	24.53		0
	1	74	24.42	24.45	24.40		0
	36	0	23.70	23.58	23.65	0-1	1
	36	18	23.68	23.61	23.68		1
	36	37	23.63	23.69	23.59		1
	75	0	23.66	23.60	23.65		1
16QAM	1	0	23.70	23.61	23.66	0-1	1
	1	36	23.65	23.70	23.70		1
	1	74	23.57	23.62	23.58		1
	36	0	22.60	22.56	22.66	0-2	2
	36	18	22.56	22.59	22.61		2
	36	37	22.52	22.64	22.54		2
	75	0	22.54	22.60	22.62		2
64QAM	1	0	22.68	22.59	22.62	0-2	2
	1	36	22.63	22.70	22.70		2
	1	74	22.51	22.60	22.56		2
	36	0	21.63	21.58	21.67	0-3	3
	36	18	21.59	21.62	21.65		3
	36	37	21.54	21.67	21.60		3
	75	0	21.56	21.59	21.61		3



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 48 of 116

**Table 9-35**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.35	24.51	24.23	0	0
	1	25	24.24	24.67	24.41		0
	1	49	24.06	24.58	24.33		0
	25	0	23.36	23.67	23.54	0-1	1
	25	12	23.39	23.70	23.64		1
	25	25	23.41	23.67	23.60		1
	50	0	23.27	23.70	23.54		1
16QAM	1	0	23.45	23.63	23.68	0-1	1
	1	25	23.52	23.70	23.70		1
	1	49	23.24	23.66	23.46		1
	25	0	22.52	22.63	22.58	0-2	2
	25	12	22.59	22.69	22.61		2
	25	25	22.56	22.68	22.51		2
	50	0	22.61	22.68	22.55		2
64QAM	1	0	22.69	22.69	22.70	0-2	2
	1	25	22.70	22.69	22.66		2
	1	49	22.57	22.65	22.58		2
	25	0	21.66	21.62	21.57	0-3	3
	25	12	21.62	21.69	21.60		3
	25	25	21.58	21.67	21.55		3
	50	0	21.62	21.66	21.55		3

**Table 9-36**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.50	24.44	24.37	0	0
	1	12	24.70	24.66	24.51		0
	1	24	24.41	24.22	24.02		0
	12	0	23.68	23.65	23.57	0-1	1
	12	6	23.70	23.70	23.62		1
	12	13	23.67	23.68	23.49		1
	25	0	23.70	23.67	23.55		1
16QAM	1	0	23.69	23.51	23.43	0-1	1
	1	12	23.70	23.70	23.50		1
	1	24	23.61	23.43	23.18		1
	12	0	22.59	22.44	22.42	0-2	2
	12	6	22.66	22.64	22.59		2
	12	13	22.57	22.60	22.45		2
	25	0	22.64	22.64	22.55		2
64QAM	1	0	22.65	22.60	22.57	0-2	2
	1	12	22.69	22.70	22.70		2
	1	24	22.53	22.62	22.53		2
	12	0	21.62	21.61	21.63	0-3	3
	12	6	21.62	21.70	21.68		3
	12	13	21.62	21.64	21.53		3
	25	0	21.64	21.63	21.60		3



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 49 of 116	

**Table 9-37**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.57	24.59	24.45	0	0
	1	7	24.69	24.70	24.39		0
	1	14	24.57	24.60	24.45		0
	8	0	23.64	23.68	23.30	0-1	1
	8	4	23.69	23.70	23.57		1
	8	7	23.68	23.69	23.50		1
	15	0	23.69	23.62	23.68		1
16QAM	1	0	23.69	23.65	23.69	0-1	1
	1	7	23.70	23.70	23.70		1
	1	14	23.66	23.69	23.32		1
	8	0	22.64	22.68	22.60	0-2	2
	8	4	22.69	22.64	22.59		2
	8	7	22.69	22.62	22.56		2
	15	0	22.67	22.68	22.53		2
64QAM	1	0	22.64	22.63	22.62	0-2	2
	1	7	22.69	22.70	22.69		2
	1	14	22.65	22.65	22.63		2
	8	0	21.70	21.70	21.64	0-3	3
	8	4	21.69	21.69	21.63		3
	8	7	21.67	21.68	21.60		3
	15	0	21.64	21.66	21.55		3

**Table 9-38**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.15	24.13	23.96	0	0
	1	2	24.31	24.30	24.13		0
	1	5	24.12	24.13	23.95		0
	3	0	24.27	24.30	24.06		0
	3	2	24.30	24.29	24.11		0
	3	3	24.27	24.24	24.07		0
	6	0	23.31	23.29	23.13	0-1	1
16QAM	1	0	23.34	23.30	23.17	0-1	1
	1	2	23.46	23.51	23.34		1
	1	5	23.29	23.33	23.20		1
	3	0	23.18	23.25	23.13		1
	3	2	23.23	23.35	23.08		1
	3	3	23.19	23.35	23.04		1
	6	0	22.38	22.54	22.46	0-2	2
64QAM	1	0	22.66	22.65	22.40	0-2	2
	1	2	22.70	22.70	22.65		2
	1	5	22.65	22.64	22.60		2
	3	0	22.70	22.70	22.45		2
	3	2	22.68	22.69	22.35		2
	3	3	22.68	22.68	22.31		2
	6	0	21.50	21.69	21.34	0-3	3

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 50 of 116	





**Table 9-39**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.93	23.02	22.89	0	0
	1	50	22.99	23.16	23.08		0
	1	99	22.91	22.96	22.82		0
	50	0	23.08	23.09	23.07	0-1	0
	50	25	23.09	23.10	23.06		0
	50	50	23.01	22.98	23.04		0
	100	0	23.04	23.05	22.99		0
16QAM	1	0	23.06	23.17	23.03	0-1	0
	1	50	22.94	23.20	23.14		0
	1	99	22.84	23.08	23.07		0
	50	0	22.55	22.62	22.68	0-2	0.5
	50	25	22.51	22.54	22.54		0.5
	50	50	22.37	22.53	22.46		0.5
	100	0	22.37	22.59	22.53		0.5
64QAM	1	0	22.57	22.64	22.70	0-2	0.5
	1	50	22.69	22.70	22.51		0.5
	1	99	22.27	22.20	22.43		0.5
	50	0	21.62	21.43	21.64	0-3	1.5
	50	25	21.43	21.59	21.55		1.5
	50	50	21.42	21.48	21.49		1.5
	100	0	21.47	21.56	21.53		1.5

**Table 9-40**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.04	22.99	23.00	0	0
	1	36	23.00	23.15	23.07		0
	1	74	22.92	22.94	22.91		0
	36	0	23.16	23.08	23.18	0-1	0
	36	18	23.12	23.17	23.07		0
	36	37	23.07	23.20	23.04		0
	75	0	23.10	23.14	23.10		0
16QAM	1	0	23.00	22.34	23.19	0-1	0
	1	36	23.12	23.19	23.17		0
	1	74	23.07	23.18	23.19		0
	36	0	22.58	22.54	22.62	0-2	0.5
	36	18	22.53	22.59	22.58		0.5
	36	37	22.49	22.63	22.51		0.5
	75	0	22.52	22.60	22.58		0.5
64QAM	1	0	22.48	22.58	22.62	0-2	0.5
	1	36	22.59	22.63	22.66		0.5
	1	74	22.48	22.61	22.47		0.5
	36	0	21.60	21.52	21.65	0-3	1.5
	36	18	21.55	21.63	21.61		1.5
	36	37	21.52	21.67	21.55		1.5
	75	0	21.52	21.67	21.50		1.5



FCC ID ZNFQ730VM	 PCTEST <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 51 of 116	

**Table 9-41**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.05	23.05	23.01	0	0
	1	25	23.12	23.20	23.08		0
	1	49	22.95	23.10	22.93		0
	25	0	23.16	23.14	23.04	0-1	0
	25	12	23.13	23.20	23.07		0
	25	25	23.07	23.15	22.97		0
	50	0	23.13	23.16	23.09		0
16QAM	1	0	23.18	23.15	23.18	0-1	0
	1	25	23.18	23.14	23.18		0
	1	49	23.12	23.11	23.11		0
	25	0	22.64	22.60	22.48	0-2	0.5
	25	12	22.59	22.66	22.56		0.5
	25	25	22.60	22.49	22.46		0.5
	50	0	22.61	22.63	22.51		0.5
64QAM	1	0	22.65	22.61	22.60	0-2	0.5
	1	25	22.62	22.64	22.56		0.5
	1	49	22.55	22.62	22.53		0.5
	25	0	21.63	21.61	21.54	0-3	1.5
	25	12	21.58	21.66	21.55		1.5
	25	25	21.53	21.65	21.49		1.5
	50	0	21.59	21.61	21.45		1.5

**Table 9-42**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.99	23.00	22.88	0	0
	1	12	23.01	23.18	23.19		0
	1	24	22.90	22.98	22.81		0
	12	0	23.13	23.12	23.01	0-1	0
	12	6	23.19	23.20	23.07		0
	12	13	23.10	23.15	22.95		0
	25	0	23.12	23.15	23.01		0
16QAM	1	0	23.14	22.71	23.05	0-1	0
	1	12	23.01	23.14	23.19		0
	1	24	23.18	23.17	23.00		0
	12	0	22.46	22.56	22.47	0-2	0.5
	12	6	22.58	22.64	22.52		0.5
	12	13	22.53	22.57	22.40		0.5
	25	0	22.58	22.60	22.48		0.5
64QAM	1	0	22.61	22.59	22.54	0-2	0.5
	1	12	22.54	22.60	22.48		0.5
	1	24	22.39	22.53	22.46		0.5
	12	0	21.62	21.62	21.56	0-3	1.5
	12	6	21.64	21.60	21.60		1.5
	12	13	21.54	21.59	21.48		1.5
	25	0	21.58	21.50	21.52		1.5



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 52 of 116	

**Table 9-43**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.10	23.09	22.95	0	0
	1	7	23.20	23.19	23.16		0
	1	14	23.06	23.12	22.95		0
	8	0	23.16	23.13	23.04	0-1	0
	8	4	23.16	23.18	23.03		0
	8	7	23.14	23.14	22.98		0
	15	0	23.16	23.14	23.01		0
16QAM	1	0	23.19	23.20	23.19	0-1	0
	1	7	23.19	23.19	23.20		0
	1	14	23.17	23.17	23.18		0
	8	0	22.60	22.65	22.56	0-2	0.5
	8	4	22.59	22.69	22.64		0.5
	8	7	22.68	22.52	22.51		0.5
	15	0	22.59	22.61	22.48		0.5
64QAM	1	0	22.67	22.69	22.58	0-2	0.5
	1	7	22.70	22.64	22.64		0.5
	1	14	22.64	22.68	22.62		0.5
	8	0	21.65	21.64	21.57	0-3	1.5
	8	4	21.64	21.60	21.50		1.5
	8	7	21.60	21.58	21.49		1.5
	15	0	21.58	21.49	21.37		1.5

**Table 9-44**  
**LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.98	23.07	23.01	0	0
	1	2	23.18	23.14	23.18		0
	1	5	22.94	23.10	22.97		0
	3	0	23.08	23.10	22.90		0
	3	2	23.06	23.20	22.97		0
	3	3	23.07	23.04	22.99		0
	6	0	23.17	23.04	23.16	0-1	0
16QAM	1	0	23.17	23.10	23.18	0-1	0
	1	2	23.20	23.09	23.04		0
	1	5	23.16	23.07	23.08		0
	3	0	22.91	22.98	23.01		0
	3	2	23.09	22.95	23.02		0
	3	3	23.00	22.90	23.10	0	
6	0	22.42	22.67	22.52	0-2	0.5	
64QAM	1	0	22.57	22.69	22.67	0-2	0.5
	1	2	22.69	22.54	22.67		0.5
	1	5	22.58	22.58	22.68		0.5
	3	0	22.65	22.62	22.66		0.5
	3	2	22.65	22.60	22.57		0.5
	3	3	22.57	22.49	22.57		0.5
	6	0	21.59	21.68	21.60	0-3	1.5

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 53 of 116	

## 9.4.7




## LTE Band 41

**Table 9-45**  
**LTE Band 41 PC3 Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.87	24.95	25.02	24.86	24.72	0	0
	1	50	25.10	25.19	25.20	25.14	24.97		0
	1	99	24.88	24.86	25.02	24.77	24.74		0
	50	0	24.01	24.08	24.14	24.04	23.90	0-1	1
	50	25	24.07	24.13	24.19	24.05	23.92		1
	50	50	24.00	23.97	24.16	23.98	23.78		1
	100	0	23.90	24.00	23.94	24.02	23.80		1
16QAM	1	0	23.37	23.56	23.32	23.36	23.30	0-1	1
	1	50	23.62	23.76	23.73	23.64	23.59		1
	1	99	23.43	23.48	23.40	23.30	23.31		1
	50	0	22.97	23.09	22.99	23.12	22.86	0-2	2
	50	25	23.06	23.15	23.04	23.16	22.89		2
	50	50	23.00	23.00	22.94	23.05	22.81		2
	100	0	23.01	23.07	22.98	23.06	22.87		2
64QAM	1	0	22.72	22.48	22.46	22.86	22.28	0-2	2
	1	50	23.01	22.72	22.65	23.08	22.57		2
	1	99	22.75	22.42	22.40	22.79	22.24		2
	50	0	22.03	22.17	22.02	22.05	21.91	0-3	3
	50	25	22.10	22.20	22.04	22.15	21.94		3
	50	50	22.04	22.08	22.00	22.11	21.87		3
	100	0	22.02	22.11	21.99	22.12	21.91		3

**Table 9-46**  
**LTE Band 41 PC3 Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.08	25.17	25.02	25.15	24.99	0	0
	1	36	25.20	25.18	25.20	25.17	25.16		0
	1	74	25.12	25.17	25.03	25.04	24.91		0
	36	0	24.19	24.16	24.14	24.20	24.10	0-1	1
	36	18	24.15	24.19	24.20	24.16	24.13		1
	36	37	24.19	24.15	24.13	24.17	24.07		1
	75	0	24.17	24.19	24.10	24.20	24.08		1
16QAM	1	0	23.62	23.89	23.60	23.66	23.56	0-1	1
	1	36	23.81	24.14	23.87	23.72	23.51		1
	1	74	23.75	23.88	23.63	23.61	23.50		1
	36	0	23.13	23.14	23.14	23.15	23.06	0-2	2
	36	18	23.19	23.16	23.18	23.18	23.12		2
	36	37	23.17	23.19	23.12	23.12	23.01		2
	75	0	23.11	23.20	23.07	23.11	23.05		2
64QAM	1	0	22.60	23.12	22.57	22.79	22.44	0-2	2
	1	36	22.59	23.20	22.80	22.89	22.53		2
	1	74	22.47	23.14	22.60	22.69	22.34		2
	36	0	22.14	22.13	22.11	22.11	22.15	0-3	3
	36	18	22.20	22.13	22.12	22.19	22.16		3
	36	37	22.18	22.12	22.19	22.20	22.09		3
	75	0	22.12	22.20	22.20	22.12	22.06		3



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 54 of 116	

**Table 9-47**  
**LTE Band 41 PC3 Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	25.12	25.12	25.12	25.14	25.11	0	0	
	1	25	25.20	25.17	25.20	25.10	25.11		0-1	0
	1	49	25.15	25.11	25.13	25.06	25.10			0
	25	0	24.20	24.17	24.18	24.13	24.16	1		
	25	12	24.13	24.17	24.11	24.10	24.11	1		
	25	25	24.18	24.15	24.17	24.18	24.12	1		
	50	0	24.15	24.20	24.16	24.11	24.11	1		
16QAM	1	0	23.69	23.77	23.71	23.88	23.44	0-1	1	
	1	25	23.89	23.94	23.92	23.99	23.62		1	
	1	49	23.73	23.79	23.74	23.90	23.43		1	
	25	0	23.19	23.17	23.12	23.12	23.17	0-2	2	
	25	12	23.14	23.18	23.18	23.03	23.14		2	
	25	25	23.14	23.15	23.13	23.06	23.10		2	
	50	0	23.17	23.18	23.13	23.17	23.16		2	
64QAM	1	0	22.78	22.54	22.79	23.11	22.51	0-2	2	
	1	25	22.97	22.72	22.97	23.19	22.66		2	
	1	49	22.75	22.55	22.82	23.01	22.45		2	
	25	0	22.14	22.15	22.15	22.06	22.12	0-3	3	
	25	12	22.16	22.16	22.14	22.09	22.13		3	
	25	25	22.13	22.20	22.18	22.09	22.08		3	
	50	0	22.14	22.15	22.19	22.03	22.13		3	

**Table 9-48**  
**LTE Band 41 PC3 Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.09	25.18	25.12	25.02	25.03	0	0
	1	12	25.14	25.13	25.19	25.13	25.07		0
	1	24	25.10	25.07	25.13	24.98	24.99		0
	12	0	24.15	24.14	24.17	24.03	24.08	0-1	1
	12	6	24.20	24.20	24.20	24.14	24.19		1
	12	13	24.18	24.08	24.12	24.14	24.08		1
	25	0	24.16	24.18	24.14	24.11	24.11		1
16QAM	1	0	23.70	23.76	23.76	23.33	23.47	0-1	1
	1	12	23.81	23.93	23.85	23.50	23.48		1
	1	24	23.71	23.79	23.79	23.31	23.43		1
	12	0	23.18	23.10	23.09	23.05	23.05	0-2	2
	12	6	23.20	23.20	23.13	23.15	23.17		2
	12	13	23.11	23.14	23.11	23.02	23.01		2
	25	0	23.11	23.10	23.15	23.15	23.11		2
64QAM	1	0	23.00	22.63	23.03	23.08	22.76	0-2	2
	1	12	23.05	22.74	23.10	23.20	22.85		2
	1	24	23.04	22.69	23.08	23.08	22.74		2
	12	0	22.13	22.17	22.09	22.03	22.20	0-3	3
	12	6	22.20	22.17	22.16	22.15	22.10		3
	12	13	22.13	22.07	22.03	22.05	22.20		3
	25	0	22.11	22.09	22.08	22.12	22.04		3



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 55 of 116	

**Table 9-49**  
**LTE Band 41 PC2 Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	26.81	26.83	26.95	26.80	26.60	0	0
	1	50	27.19	27.14	27.20	27.18	26.97		0
	1	99	26.85	26.73	26.93	26.76	26.56		0
	50	0	25.90	25.95	26.00	25.94	25.74	0-1	1
	50	25	25.93	26.00	26.03	25.93	25.75		1
	50	50	25.90	25.94	25.97	25.89	25.70		1
	100	0	25.90	25.92	26.02	25.87	25.73		1
16QAM	1	0	25.62	25.64	25.52	25.74	25.42	0-1	1
	1	50	26.04	25.98	25.91	26.10	25.79		1
	1	99	25.66	25.56	25.52	25.67	25.39		1
	50	0	24.94	24.98	25.07	25.02	24.75	0-2	2
	50	25	24.98	24.50	25.07	25.06	24.75		2
	50	50	24.97	24.99	25.06	24.98	24.73		2
	100	0	24.93	25.03	25.04	24.96	24.76		2
64QAM	1	0	24.64	24.92	24.49	24.74	24.61	0-2	2
	1	50	25.05	25.20	24.90	25.18	25.02		2
	1	99	24.69	24.86	24.51	24.64	24.62		2
	50	0	23.96	24.06	24.08	24.04	23.79	0-3	3
	50	25	24.00	24.11	24.08	24.06	23.81		3
	50	50	24.00	24.03	24.05	24.02	23.76		3
	100	0	24.00	24.02	24.07	24.02	23.77		3

**Table 9-50**  
**LTE Band 41 PC2 Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.03	27.02	27.03	27.11	27.08	0	0
	1	36	27.20	27.20	27.19	27.18	27.13		0
	1	74	27.06	27.03	27.01	27.02	26.99		0
	36	0	26.16	26.16	26.11	26.13	26.16	0-1	1
	36	18	26.19	26.17	26.18	26.17	26.20		1
	36	37	26.17	26.17	26.11	26.18	26.12		1
	75	0	26.17	26.19	26.11	26.11	26.17		1
16QAM	1	0	25.95	25.79	25.94	25.97	25.73	0-1	1
	1	36	26.12	25.95	26.12	26.08	25.88		1
	1	74	25.97	25.76	25.96	25.96	25.66		1
	36	0	25.15	25.19	25.16	25.03	25.19	0-2	2
	36	18	25.20	25.20	25.19	25.11	25.20		2
	36	37	25.15	25.18	25.17	25.16	25.16		2
	75	0	25.12	25.20	25.13	25.19	25.15		2
64QAM	1	0	25.04	24.66	25.01	25.20	24.75	0-2	2
	1	36	25.20	24.81	25.20	25.13	24.87		2
	1	74	25.07	24.65	25.01	25.12	24.71		2
	36	0	24.15	24.15	24.11	24.16	24.16	0-3	3
	36	18	24.18	24.13	24.16	24.10	24.19		3
	36	37	24.13	24.20	24.11	24.20	24.13		3
	75	0	24.15	24.16	24.12	24.16	24.17		3



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 56 of 116	

**Table 9-51**  
**LTE Band 41 PC2 Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.09	26.89	27.01	27.10	27.02	0	0
	1	25	27.19	27.20	27.20	27.17	27.11		0
	1	49	27.02	26.96	27.03	27.05	27.01		0
	25	0	26.14	26.06	26.06	26.18	26.05	0-1	1
	25	12	26.18	26.08	26.06	26.20	26.02		1
	25	25	26.15	26.06	26.05	26.19	26.02		1
	50	0	26.13	26.03	26.05	26.20	26.02		1
16QAM	1	0	25.94	25.88	25.73	25.96	25.59	0-1	1
	1	25	26.20	26.19	25.81	26.19	25.87		1
	1	49	25.94	25.92	25.74	25.89	25.58		1
	25	0	25.15	25.20	25.13	24.92	25.07	0-2	2
	25	12	25.17	25.18	25.14	24.92	25.07		2
	25	25	25.16	25.14	25.09	24.91	25.05		2
	50	0	25.17	25.17	25.13	24.93	25.07		2
64QAM	1	0	24.95	24.75	24.72	25.05	24.54	0-2	2
	1	25	25.20	25.07	24.83	25.20	24.82		2
	1	49	24.95	24.76	24.73	24.98	24.50		2
	25	0	24.20	24.11	24.10	23.83	24.00	0-3	3
	25	12	24.15	24.19	24.07	23.85	24.03		3
	25	25	24.15	24.13	24.06	23.86	24.02		3
	50	0	24.17	24.14	24.11	23.92	24.07		3

**Table 9-52**  
**LTE Band 41 PC2 Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.03	27.02	27.04	26.66	27.05	0	0
	1	12	27.20	27.14	27.13	27.00	27.04		0
	1	24	27.05	27.04	27.04	26.65	26.99		0
	12	0	25.99	26.07	26.04	25.82	25.98	0-1	1
	12	6	26.06	26.12	26.08	25.87	26.02		1
	12	13	26.11	26.04	26.06	25.82	25.96		1
	25	0	26.04	26.08	26.03	25.84	25.98		1
16QAM	1	0	25.77	25.70	25.59	25.14	25.60	0-1	1
	1	12	25.86	26.05	25.88	25.45	25.91		1
	1	24	25.78	25.72	25.59	25.14	25.58		1
	12	0	25.05	25.13	25.10	24.89	25.02	0-2	2
	12	6	25.08	25.17	25.15	24.95	25.06		2
	12	13	25.05	25.14	25.13	24.91	25.02		2
	25	0	25.00	25.17	25.09	25.03	24.99		2
64QAM	1	0	24.80	24.69	24.81	24.91	24.80	0-2	2
	1	12	25.12	24.97	25.12	25.13	25.08		2
	1	24	24.83	24.69	24.84	24.92	24.78		2
	12	0	24.15	24.17	24.19	23.92	24.08	0-3	3
	12	6	24.20	24.16	24.20	23.96	24.13		3
	12	13	24.15	24.17	24.14	23.93	24.09		3
	25	0	23.99	24.20	24.06	23.93	23.94		3

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 57 of 116	






**Table 9-53**  
**LTE Band 41 PC3 Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.14	23.36	23.39	23.34	23.18	0	0
	1	50	23.38	23.63	23.66	23.54	23.36		0
	1	99	23.19	23.12	23.25	23.09	23.00		0
	50	0	23.34	23.53	23.57	23.61	23.27	0-1	0
	50	25	23.35	23.57	23.62	23.45	23.30		0
	50	50	23.33	23.52	23.58	23.43	23.21		0
	100	0	23.32	23.30	23.33	23.29	23.22		0
16QAM	1	0	23.30	23.49	23.57	23.49	23.29	0-1	0
	1	50	23.54	23.65	23.70	23.69	23.46		0
	1	99	23.28	23.42	23.50	23.35	23.16		0
	50	0	22.86	23.20	23.16	23.20	22.85	0-2	0.5
	50	25	22.91	23.14	23.19	23.09	22.87		0.5
	50	50	22.86	23.04	23.11	23.09	22.79		0.5
	100	0	22.92	23.09	23.11	23.05	22.75		0.5
64QAM	1	0	22.33	22.56	22.67	22.59	22.28	0-2	0.5
	1	50	22.57	22.78	22.90	22.76	22.54		0.5
	1	99	22.34	22.42	22.58	22.35	22.23		0.5
	50	0	21.91	22.17	22.20	22.20	21.89	0-3	1.5
	50	25	21.89	22.15	22.18	22.12	21.92		1.5
	50	50	21.95	22.16	22.13	22.05	21.83		1.5
	100	0	21.90	22.08	22.09	22.00	22.11		1.5

**Table 9-54**  
**LTE Band 41 PC3 Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	23.49	23.39	23.49	23.49	23.28	0	0	
	1	36	23.57	23.39	23.50	23.36	23.24		0-1	0
	1	74	23.58	23.41	23.55	23.37	23.24			0
	36	0	23.53	23.48	23.49	23.31	23.28	0		
	36	18	23.51	23.48	23.46	23.33	23.30	0		
	36	37	23.53	23.48	23.46	23.33	23.28	0		
	75	0	23.53	23.49	23.47	23.30	23.31	0		
16QAM	1	0	23.27	23.46	23.47	23.05	23.51	0-1	0	
	1	36	23.27	23.51	23.48	23.00	23.49		0-2	0
	1	74	23.25	23.49	23.47	23.00	23.49			0
	36	0	23.02	22.90	22.97	22.79	22.76	0.5		
	36	18	22.99	22.88	22.98	22.83	22.78	0.5		
	36	37	23.02	22.92	23.00	22.82	22.78	0.5		
	75	0	23.01	22.88	22.97	22.83	22.78	0.5		
64QAM	1	0	22.91	22.58	22.87	22.45	22.45	0-2	0.5	
	1	36	22.88	22.59	22.78	22.42	22.42		0-3	0.5
	1	74	22.89	22.60	22.78	22.44	22.44			0.5
	36	0	21.92	21.85	21.98	21.74	21.71	1.5		
	36	18	21.93	21.86	22.00	21.75	21.74	1.5		
	36	37	21.93	21.86	21.97	21.75	21.73	1.5		
	75	0	21.91	21.87	21.97	21.74	21.74	1.5		



FCC ID ZNFQ730VM	 Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 58 of 116	

**Table 9-55**  
**LTE Band 41 PC3 Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.23	23.49	23.35	23.29	23.08	0	0
	1	25	23.34	23.53	23.52	23.34	23.24		0
	1	49	23.26	23.46	23.35	23.20	23.09		0
	25	0	23.43	23.40	23.49	23.24	23.28	0-1	0
	25	12	23.37	23.41	23.46	23.25	23.24		0
	25	25	23.40	23.40	23.42	23.25	23.21		0
	50	0	23.38	23.41	23.39	23.21	23.17		0
16QAM	1	0	23.57	23.11	23.61	23.48	23.34	0-1	0
	1	25	23.63	23.38	23.64	23.40	23.43		0
	1	49	23.56	23.14	23.56	23.35	23.36		0
	25	0	22.83	22.96	22.87	22.77	22.68	0-2	0.5
	25	12	22.82	22.98	22.96	22.79	22.67		0.5
	25	25	22.81	23.01	22.87	22.82	22.65		0.5
	50	0	22.79	22.93	22.85	22.76	22.61		0.5
64QAM	1	0	22.22	22.50	22.69	22.50	22.69	0-2	0.5
	1	25	22.43	22.59	22.90	22.59	22.90		0.5
	1	49	22.24	22.40	22.65	22.40	22.65		0.5
	25	0	21.79	22.00	21.87	21.80	21.69	0-3	1.5
	25	12	21.82	21.92	21.86	21.81	21.62		1.5
	25	25	21.83	22.00	21.86	21.81	21.67		1.5
	50	0	21.85	21.92	21.89	21.77	21.67		1.5

**Table 9-56**  
**LTE Band 41 PC3 Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.36	23.33	23.41	23.06	23.26	0	0
	1	12	23.64	23.67	23.62	23.36	23.52		0
	1	24	23.35	23.39	23.41	23.01	23.19		0
	12	0	23.39	23.46	23.45	23.23	23.30	0-1	0
	12	6	23.46	23.52	23.50	23.26	23.36		0
	12	13	23.38	23.48	23.43	23.24	23.26		0
	25	0	23.45	23.46	23.48	23.29	23.25		0
16QAM	1	0	23.34	23.09	23.40	22.88	23.21	0-1	0
	1	12	23.60	23.66	23.69	23.18	23.65		0
	1	24	23.37	23.09	23.42	22.86	23.18		0
	12	0	22.99	23.00	23.07	22.89	22.86	0-2	0.5
	12	6	23.02	23.03	23.13	22.94	22.89		0.5
	12	13	23.00	23.02	23.08	22.89	22.80		0.5
	25	0	22.89	22.97	22.97	22.86	22.69		0.5
64QAM	1	0	22.64	22.20	22.69	22.16	22.54	0-2	0.5
	1	12	22.81	22.66	22.90	22.51	22.72		0.5
	1	24	22.65	22.22	22.69	22.14	22.51		0.5
	12	0	21.93	22.08	22.00	21.78	21.79	0-3	1.5
	12	6	21.98	22.09	22.02	21.84	21.81		1.5
	12	13	21.97	22.07	21.98	21.76	21.77		1.5
	25	0	21.78	21.97	21.84	21.69	21.67		1.5



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 59 of 116	

**Table 9-57**  
**LTE Band 41 PC2 Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.16	25.34	25.45	25.30	25.10	0	0
	1	50	25.31	25.48	25.60	25.44	25.33		0
	1	99	25.08	25.22	25.24	25.08	24.99		0
	50	0	25.26	25.44	25.52	25.18	25.19	0-1	0
	50	25	25.24	25.44	25.47	25.38	25.22		0
	50	50	25.21	25.34	25.39	25.23	25.05		0
16QAM	100	0	25.32	25.41	25.45	25.50	25.22	0-1	0
	1	0	25.23	25.45	25.63	25.52	25.14		0
	1	50	25.49	25.70	25.70	25.61	25.40		0
	1	99	25.50	25.40	25.48	25.23	25.11	0-2	0
	50	0	24.77	24.93	25.07	25.13	24.78		0.5
	50	25	24.67	24.99	24.99	24.97	24.74		0.5
	50	50	24.78	24.98	24.99	24.91	24.64		0.5
	100	0	24.51	25.02	25.03	24.92	24.73		0.5
64QAM	1	0	24.53	24.77	24.74	24.84	24.48	0-2	0.5
	1	50	24.77	24.93	25.03	24.99	24.71		0.5
	1	99	24.50	24.68	24.73	24.66	24.43		0.5
	50	0	23.78	23.92	24.13	24.02	23.71	0-3	1.5
	50	25	23.80	24.05	24.06	23.91	23.75		1.5
	50	50	23.71	23.96	23.97	23.90	23.60		1.5
	100	0	23.80	24.02	24.02	23.97	23.75		1.5

**Table 9-58**  
**LTE Band 41 Reduced PC2 Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	25.31	25.31	25.35	25.17	25.21	0	0	
	1	36	25.53	25.45	25.47	25.28	25.35		0-1	0
	1	74	25.34	25.29	25.30	25.10	25.13			0
	36	0	25.37	25.43	25.38	25.22	25.26	0		
	36	18	25.42	25.47	25.45	25.27	25.28	0		0
	36	37	25.41	25.41	25.38	25.19	25.22		0	
	75	0	25.39	25.44	25.38	25.21	25.26		0	
16QAM	1	0	25.44	25.47	25.44	25.55	25.29	0-1	0	
	1	36	25.61	25.41	25.61	25.61	25.44		0-2	0
	1	74	25.45	25.44	25.41	25.49	25.22			0
	36	0	24.83	24.83	24.84	24.48	24.70	0.5		
	36	18	24.87	24.87	24.88	24.60	24.73	0.5		
	36	37	24.84	24.86	24.82	24.53	24.66	0.5		
	75	0	24.78	24.86	24.77	24.58	24.64	0.5		
64QAM	1	0	24.32	24.42	24.79	24.52	24.41	0-2	0.5	
	1	36	24.50	24.54	24.79	24.49	24.33		0-3	0.5
	1	74	24.34	24.46	24.78	24.58	24.41			0.5
	36	0	23.82	23.78	23.79	23.51	23.63	1.5		
	36	18	23.85	23.81	23.84	23.53	23.68	1.5		
	36	37	23.81	23.78	23.77	23.48	23.60	1.5		
	75	0	23.81	23.80	23.77	23.61	23.65	1.5		



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 60 of 116	

**Table 9-59**  
**LTE Band 41 Reduced PC2 Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.29	25.43	25.39	25.30	25.24	0	0
	1	25	25.44	25.47	25.46	25.31	25.26		0
	1	49	25.30	25.42	25.32	25.27	25.18		0
	25	0	25.34	25.46	25.49	25.29	25.24	0-1	0
	25	12	25.36	25.47	25.49	25.29	25.27		0
	25	25	25.39	25.52	25.46	25.27	25.25		0
	50	0	25.34	25.46	25.45	25.28	25.25		0
16QAM	1	0	25.35	25.66	25.53	25.43	25.32	0-1	0
	1	25	25.46	25.54	25.59	25.38	25.35		0
	1	49	25.38	25.51	25.47	25.36	25.27		0
	25	0	24.73	24.77	24.84	24.55	24.62	0-2	0.5
	25	12	24.72	24.79	24.84	24.56	24.62		0.5
	25	25	24.72	24.78	24.82	24.52	24.58		0.5
	50	0	24.69	24.80	24.78	24.57	24.60		0.5
64QAM	1	0	24.68	24.91	24.97	25.14	24.78	0-2	0.5
	1	25	24.61	25.07	24.88	25.03	24.90		0.5
	1	49	24.69	24.93	24.94	25.07	24.77		0.5
	25	0	23.85	24.01	23.92	23.62	23.70	0-3	1.5
	25	12	23.85	23.94	23.93	23.65	23.69		1.5
	25	25	23.88	23.89	23.88	23.63	23.71		1.5
	50	0	23.79	23.90	23.83	23.67	23.65		1.5

**Table 9-60**  
**LTE Band 41 Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.26	25.27	25.31	25.06	25.15	0	0
	1	12	25.41	25.41	25.54	25.42	25.39		0
	1	24	25.23	25.29	25.34	25.05	25.09		0
	12	0	25.31	25.41	25.43	25.20	25.21	0-1	0
	12	6	25.37	25.46	25.48	25.27	25.27		0
	12	13	25.32	25.42	25.42	25.21	25.20		0
	25	0	25.38	25.45	25.47	25.24	25.22		0
16QAM	1	0	25.49	25.30	25.60	25.24	25.42	0-1	0
	1	12	25.44	25.60	25.61	25.50	25.47		0
	1	24	25.30	25.31	25.61	25.23	25.41		0
	12	0	24.97	25.03	25.11	24.88	24.83	0-2	0.5
	12	6	25.04	25.11	25.18	24.94	24.91		0.5
	12	13	24.98	25.05	25.11	24.86	24.86		0.5
	25	0	24.91	25.01	25.03	24.89	24.77		0.5
64QAM	1	0	25.00	24.69	25.09	24.85	24.91	0-2	0.5
	1	12	25.08	24.82	25.09	25.10	24.82		0.5
	1	24	24.93	24.73	25.04	24.83	24.90		0.5
	12	0	23.99	24.00	24.03	23.82	23.81	0-3	1.5
	12	6	24.03	24.09	24.10	23.87	23.87		1.5
	12	13	24.01	24.04	24.05	23.82	23.83		1.5
	25	0	23.90	24.04	23.95	23.79	23.72		1.5

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 61 of 116	

## 9.5 WLAN Conducted Powers

**Table 9-61**  
**2.4 GHz WLAN Maximum Average RF Power**



2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	20.68	17.25	16.28
2417	2	N/A	18.89	17.93
2437	6	20.96	18.98	17.94
2457	10	N/A	18.98	17.89
2462	11	20.93	17.41	16.22

**Table 9-62**  
**5 GHz WLAN Maximum Average RF Power**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
		Average	Average	Average
5180	36	18.24	17.59	17.53
5200	40	18.28	17.64	17.62
5220	44	18.41	17.78	17.67
5240	48	18.43	17.80	17.73
5260	52	18.46	17.85	17.82
5280	56	18.50	17.84	17.78
5300	60	18.49	17.87	17.75
5320	64	18.47	17.81	17.81
5500	100	18.26	17.62	17.56
5600	120	18.07	17.29	17.24
5620	124	18.02	17.17	17.19
5720	144	18.01	17.08	17.11
5745	149	18.09	17.52	17.52
5785	157	18.10	17.28	17.20
5825	165	18.06	17.26	17.23

**Table 9-63**  
**2.4 GHz WLAN Reduced Average RF Power**

2.4GHz Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11b	802.11g	802.11n
		Average	Average	Average
2412	1	17.68	17.25	16.28
2417	2	N/A	17.90	17.89
2437	6	17.90	17.99	17.96
2457	10	N/A	17.95	17.86
2462	11	17.87	17.41	16.22


FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 62 of 116

**Table 9-64**  
**5 GHz WLAN Reduced Average RF Power**



5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	15.29	15.16
5230	46	15.44	15.34
5270	54	15.44	15.47
5310	62	15.51	15.50
5510	102	15.18	15.13
5590	118	15.01	15.02
5630	126	15.01	15.01
5710	142	15.05	15.01
5755	151	15.70	15.86
5795	159	15.67	15.63

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

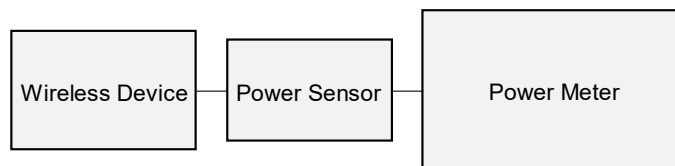- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.



**Figure 9-4**  
**Power Measurement Setup**

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 63 of 116	

## 9.6 Bluetooth Conducted Powers

Table 9-65  
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	5.95	3.940
2441	1.0	39	7.10	5.130
2480	1.0	78	7.85	6.092
2402	2.0	0	5.97	3.954
2441	2.0	39	6.91	4.907
2480	2.0	78	7.29	5.354
2402	3.0	0	6.03	4.008
2441	3.0	39	7.16	5.199
2480	3.0	78	7.34	5.424

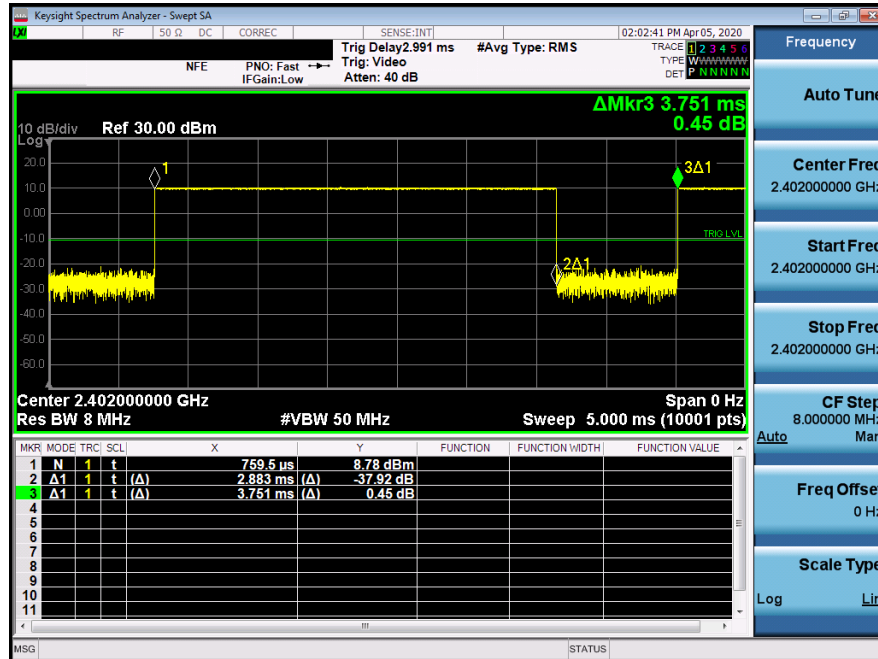





Figure 9-5  
Bluetooth Transmission Plot

FCC ID ZNFQ730VM	 PCTEST Proud to be part of element	SAR EVALUATION REPORT	 LG	Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 64 of 116





**Equation 9-1**  
**Bluetooth Duty Cycle Calculation**
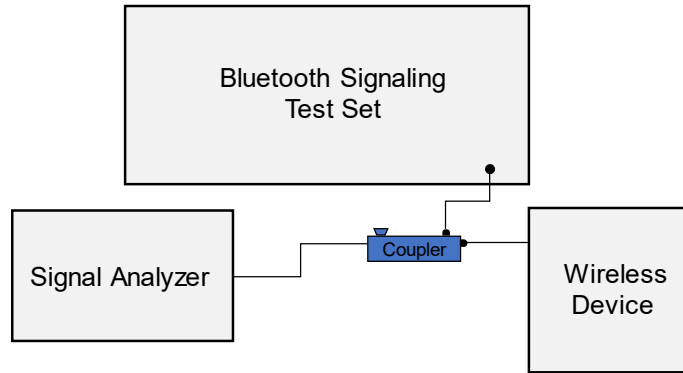
$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.883\ ms}{3.751\ ms} * 100\% = 76.9\%$$



**Figure 9-6**  
**Power Measurement Setup**




FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 65 of 116	

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification



**Table 10-1**  
**Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
4/30/2020	750 Head	22.4	680	0.864	43.967	0.888	42.305	-2.70%	3.93%
			695	0.869	43.929	0.889	42.227	-2.25%	4.03%
			700	0.871	43.917	0.889	42.201	-2.02%	4.07%
			710	0.874	43.891	0.890	42.149	-1.80%	4.13%
			725	0.879	43.849	0.891	42.071	-1.35%	4.23%
			750	0.888	43.758	0.894	41.942	-0.67%	4.33%
			770	0.894	43.698	0.895	41.838	-0.11%	4.45%
			785	0.899	43.663	0.896	41.760	0.33%	4.56%
4/30/2020	835 Head	21.1	800	0.905	43.630	0.897	41.682	0.89%	4.67%
			820	0.884	41.486	0.899	41.578	-1.67%	-0.22%
			835	0.899	41.278	0.900	41.500	-0.11%	-0.53%
5/2/2020	835 Head	21.5	850	0.914	41.071	0.916	41.500	-0.22%	-1.03%
			820	0.929	43.045	0.899	41.578	3.34%	3.53%
			835	0.935	42.993	0.900	41.500	3.89%	3.60%
5/4/2020	835 Head	22.3	850	0.941	42.948	0.916	41.500	2.73%	3.49%
			820	0.930	42.873	0.899	41.578	3.45%	3.11%
			835	0.936	42.833	0.900	41.500	4.00%	3.21%
4/13/2020	1750 Head	20.4	850	0.942	42.793	0.916	41.500	2.84%	3.12%
			1710	1.365	41.142	1.348	40.142	1.26%	2.49%
			1720	1.372	41.132	1.354	40.126	1.33%	2.51%
			1745	1.388	41.099	1.368	40.087	1.46%	2.52%
			1750	1.391	41.092	1.371	40.079	1.46%	2.53%
			1770	1.404	41.053	1.383	40.047	1.52%	2.51%
4/27/2020	1900 Head	21.5	1790	1.417	41.008	1.394	40.016	1.65%	2.48%
			1850	1.392	38.812	1.400	40.000	-0.57%	-2.97%
			1860	1.403	38.768	1.400	40.000	0.21%	-3.08%
			1880	1.423	38.688	1.400	40.000	1.64%	-3.28%
			1900	1.444	38.615	1.400	40.000	3.14%	-3.46%
			1905	1.449	38.596	1.400	40.000	3.50%	-3.51%
4/30/2020	1900 Head	22.3	1910	1.455	38.577	1.400	40.000	3.93%	-3.56%
			1850	1.352	38.660	1.400	40.000	-3.43%	-3.35%
			1860	1.362	38.617	1.400	40.000	-2.71%	-3.46%
			1880	1.383	38.534	1.400	40.000	-1.21%	-3.67%
			1900	1.404	38.450	1.400	40.000	0.29%	-3.87%
			1905	1.409	38.430	1.400	40.000	0.64%	-3.93%
4/12/2020	2450 Head	24.4	1910	1.414	38.410	1.400	40.000	1.00%	-3.98%
			2400	1.762	37.641	1.756	39.289	0.34%	-4.19%
			2450	1.798	37.577	1.800	39.200	-0.11%	-4.14%
4/19/2020	2450 Head	23.0	2480	1.817	37.533	1.833	39.162	-0.87%	-4.16%
			2400	1.747	38.390	1.756	39.289	-0.51%	-2.29%
			2450	1.785	38.324	1.800	39.200	-0.83%	-2.23%
			2480	1.806	38.277	1.833	39.162	-1.47%	-2.26%
			2500	1.821	38.239	1.855	39.136	-1.83%	-2.29%
			2510	1.830	38.221	1.866	39.123	-1.93%	-2.31%
			2535	1.851	38.186	1.893	39.092	-2.22%	-2.32%
			2550	1.863	38.168	1.909	39.073	-2.41%	-2.32%
4/26/2020	2450 Head	23.7	2560	1.871	38.155	1.920	39.060	-2.55%	-2.32%
			2600	1.899	38.094	1.964	39.009	-3.31%	-2.35%
			2400	1.767	39.151	1.756	39.289	0.63%	-0.35%
4/29/2020	2450 Head	23.3	2450	1.804	39.074	1.800	39.200	0.22%	-0.32%
			2480	1.825	39.030	1.833	39.162	-0.44%	-0.34%
			2400	1.752	39.856	1.756	39.289	-0.23%	1.44%
4/21/2020	5200-5800 Head	20.5	2450	1.787	39.796	1.800	39.200	-0.72%	1.52%
			2480	1.809	39.754	1.833	39.162	-1.31%	1.51%
			5250	4.600	35.190	4.706	35.929	-2.25%	-2.06%
			5310	4.674	35.078	4.768	35.860	-1.97%	-2.18%
			5510	4.901	34.713	4.973	35.632	-1.45%	-2.58%
			5600	5.005	34.569	5.065	35.529	-1.18%	-2.70%
			5750	5.183	34.293	5.219	35.357	-0.69%	-3.01%
			5755	5.187	34.284	5.224	35.351	-0.71%	-3.02%
			5795	5.233	34.221	5.265	35.305	-0.61%	-3.07%

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 66 of 116

**Table 10-2**  
**Measured Body Tissue Properties**




Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
4/20/2020	750 Body	20.3	680	0.923	53.892	0.958	55.804	-3.65%	-3.43%
			695	0.928	53.871	0.959	55.745	-3.23%	-3.36%
			700	0.930	53.863	0.959	55.726	-3.02%	-3.34%
			710	0.933	53.848	0.960	55.687	-2.81%	-3.30%
			725	0.939	53.817	0.961	55.629	-2.29%	-3.26%
			750	0.949	53.751	0.964	55.531	-1.56%	-3.21%
			770	0.957	53.708	0.965	55.453	-0.83%	-3.15%
			785	0.963	53.678	0.966	55.395	-0.31%	-3.10%
			800	0.969	53.647	0.967	55.336	0.21%	-3.05%
4/20/2020	835 Body	20.6	820	0.941	54.752	0.969	55.258	-2.89%	-0.92%
			835	0.956	54.584	0.970	55.200	-1.44%	-1.12%
			850	0.973	54.431	0.988	55.154	-1.52%	-1.31%
4/23/2020	835 Body	20.8	820	0.944	54.298	0.969	55.258	-2.58%	-1.74%
			835	0.961	54.135	0.970	55.200	-0.93%	-1.93%
			850	0.977	53.976	0.988	55.154	-1.11%	-2.14%
5/2/2020	835 Body	21.5	820	0.943	54.201	0.969	55.258	-2.68%	-1.91%
			835	0.958	54.037	0.970	55.200	-1.24%	-2.11%
			850	0.975	53.883	0.988	55.154	-1.32%	-2.30%
5/6/2020	835 Body	21.8	820	0.940	53.778	0.969	55.258	-2.99%	-2.68%
			835	0.956	53.635	0.970	55.200	-1.44%	-2.84%
			850	0.971	53.488	0.988	55.154	-1.72%	-3.02%
4/13/2020	1750 Body	21.5	1710	1.448	55.137	1.463	53.537	-1.03%	2.99%
			1720	1.461	55.101	1.469	53.511	-0.54%	2.97%
			1745	1.491	55.008	1.485	53.445	0.40%	2.92%
			1750	1.496	54.991	1.488	53.432	0.54%	2.92%
			1770	1.518	54.914	1.501	53.379	1.13%	2.88%
			1790	1.539	54.831	1.514	53.326	1.65%	2.82%
4/15/2020	1750 Body	21.7	1710	1.433	54.078	1.463	53.537	-2.05%	1.01%
			1720	1.445	54.043	1.469	53.511	-1.63%	0.99%
			1745	1.475	53.947	1.485	53.445	-0.67%	0.94%
			1750	1.481	53.929	1.488	53.432	-0.47%	0.93%
			1770	1.503	53.858	1.501	53.379	0.13%	0.90%
			1790	1.524	53.774	1.514	53.326	0.66%	0.84%
4/27/2020	1750 Body	20.5	1710	1.470	53.045	1.463	53.537	0.48%	-0.92%
			1720	1.482	53.007	1.469	53.511	0.88%	-0.94%
			1745	1.510	52.910	1.485	53.445	1.68%	-1.00%
			1750	1.516	52.892	1.488	53.432	1.88%	-1.01%
			1770	1.537	52.811	1.501	53.379	2.40%	-1.06%
			1790	1.557	52.734	1.514	53.326	2.84%	-1.11%
4/27/2020	1900 Body	23.7	1850	1.524	55.469	1.520	53.300	0.26%	4.07%
			1860	1.536	55.446	1.520	53.300	1.05%	4.03%
			1880	1.559	55.388	1.520	53.300	2.57%	3.92%
			1900	1.583	55.309	1.520	53.300	4.14%	3.77%
			1905	1.589	55.290	1.520	53.300	4.54%	3.73%
			1910	1.595	55.270	1.520	53.300	4.93%	3.70%
4/28/2020	1900 Body	22.0	1850	1.519	52.839	1.520	53.300	-0.07%	-0.86%
			1860	1.530	52.800	1.520	53.300	0.66%	-0.94%
			1880	1.552	52.734	1.520	53.300	2.11%	-1.06%
			1900	1.574	52.664	1.520	53.300	3.55%	-1.19%
			1905	1.580	52.648	1.520	53.300	3.95%	-1.22%
			1910	1.585	52.632	1.520	53.300	4.28%	-1.25%
4/30/2020	1900 Body	22.3	1850	1.507	53.372	1.520	53.300	-0.86%	0.14%
			1860	1.518	53.341	1.520	53.300	-0.13%	0.08%
			1880	1.539	53.284	1.520	53.300	1.25%	-0.03%
			1900	1.562	53.223	1.520	53.300	2.76%	-0.14%
			1905	1.568	53.208	1.520	53.300	3.16%	-0.17%
			1910	1.574	53.192	1.520	53.300	3.55%	-0.20%
4/30/2020	1900 Body	24.4	1850	1.446	55.342	1.520	53.300	-4.87%	3.83%
			1860	1.457	55.313	1.520	53.300	-4.14%	3.78%
			1880	1.479	55.257	1.520	53.300	-2.70%	3.67%
			1900	1.501	55.204	1.520	53.300	-1.25%	3.57%
			1905	1.507	55.191	1.520	53.300	-0.86%	3.55%
			1910	1.512	55.178	1.520	53.300	-0.53%	3.52%

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset			Page 67 of 116

**Table 10-3**  
**Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
4/20/2020	2450 Body	22.2	2300	1.873	51.655	1.809	52.900	3.54%	-2.35%
			2310	1.885	51.628	1.816	52.887	3.80%	-2.38%
			2320	1.896	51.604	1.826	52.873	3.83%	-2.40%
			2400	1.987	51.385	1.902	52.767	4.47%	-2.62%
			2450	2.046	51.245	1.950	52.700	4.92%	-2.76%
			2480	2.080	51.163	1.993	52.662	4.37%	-2.85%
			2500	2.104	51.100	2.021	52.636	4.11%	-2.92%
			2510	2.117	51.070	2.035	52.623	4.03%	-2.95%
			2535	2.148	50.996	2.071	52.592	3.72%	-3.03%
			2550	2.167	50.959	2.092	52.573	3.59%	-3.07%
			2560	2.180	50.936	2.106	52.560	3.51%	-3.09%
			2600	2.227	50.808	2.163	52.509	2.96%	-3.24%
			2650	2.290	50.632	2.234	52.445	2.51%	-3.46%
			2680	2.328	50.547	2.277	52.407	2.24%	-3.55%
			2700	2.352	50.489	2.305	52.382	2.04%	-3.61%
4/27/2020	2450 Body	23.3	2300	1.842	51.720	1.809	52.900	1.82%	-2.23%
			2310	1.853	51.693	1.816	52.887	2.04%	-2.26%
			2320	1.864	51.672	1.826	52.873	2.08%	-2.27%
			2400	1.956	51.462	1.902	52.767	2.84%	-2.47%
			2450	2.014	51.319	1.950	52.700	3.28%	-2.62%
			2480	2.048	51.229	1.993	52.662	2.76%	-2.72%
			2500	2.071	51.162	2.021	52.636	2.47%	-2.80%
			2510	2.084	51.132	2.035	52.623	2.41%	-2.83%
			2535	2.114	51.059	2.071	52.592	2.08%	-2.91%
			2550	2.132	51.022	2.092	52.573	1.91%	-2.95%
			2560	2.143	50.994	2.106	52.560	1.76%	-2.98%
			2600	2.189	50.865	2.163	52.509	1.20%	-3.13%
			2650	2.249	50.713	2.234	52.445	0.67%	-3.30%
			2680	2.285	50.628	2.277	52.407	0.35%	-3.39%
			2700	2.308	50.566	2.305	52.382	0.13%	-3.47%
4/13/2020	5200–5800 Body	22.1	5240	5.516	47.504	5.346	48.960	3.18%	-2.97%
			5250	5.529	47.480	5.358	48.947	3.19%	-3.00%
			5280	5.569	47.432	5.393	48.906	3.26%	-3.01%
			5500	5.867	47.023	5.650	48.607	3.84%	-3.26%
			5600	6.004	46.880	5.766	48.471	4.13%	-3.28%
			5720	6.169	46.680	5.907	48.309	4.44%	-3.37%
			5745	6.196	46.634	5.936	48.275	4.38%	-3.40%
			5750	6.202	46.625	5.942	48.268	4.38%	-3.40%
			5785	6.257	46.574	5.982	48.220	4.60%	-3.41%
			5825	6.312	46.488	6.029	48.166	4.69%	-3.48%
4/20/2020	5200–5800 Body	22.5	5250	5.507	47.089	5.358	48.947	2.78%	-3.80%
			5280	5.547	47.060	5.393	48.906	2.86%	-3.77%
			5550	5.895	46.629	5.708	48.539	3.28%	-3.93%
			5600	5.973	46.513	5.766	48.471	3.59%	-4.04%
			5720	6.133	46.295	5.907	48.309	3.83%	-4.17%
			5750	6.179	46.276	5.942	48.268	3.99%	-4.13%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.



FCC ID ZNFQ730VM	 Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 68 of 116	

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix D.


**Table 10-4**  
**System Verification Results – 1g**

System Verification												
TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
L	750	HEAD	04/30/2020	24.0	22.4	0.200	1161	7410	1.680	8.030	8.400	4.61%
M	835	HEAD	04/30/2020	22.2	21.1	0.200	4d132	7570	1.930	9.650	9.650	0.00%
P	835	HEAD	05/02/2020	20.8	21.5	0.200	4d133	7551	1.930	9.430	9.650	2.33%
P	835	HEAD	05/04/2020	23.3	22.3	0.200	4d133	7551	1.960	9.430	9.800	3.92%
P	1750	HEAD	04/13/2020	21.7	20.4	0.100	1148	7551	3.750	37.000	37.500	1.35%
H	1900	HEAD	04/27/2020	22.3	20.3	0.100	5d149	7406	4.060	39.300	40.600	3.31%
H	1900	HEAD	04/30/2020	21.2	20.8	0.100	5d080	7406	4.130	39.800	41.300	3.77%
E	2450	HEAD	04/12/2020	23.7	22.9	0.100	719	3589	5.180	53.100	51.800	-2.45%
E	2450	HEAD	04/26/2020	22.1	22.3	0.100	797	3589	5.360	52.700	53.600	1.71%
E	2450	HEAD	04/29/2020	22.5	21.8	0.100	719	3589	5.270	53.100	52.700	-0.75%
E	2600	HEAD	04/19/2020	22.5	22.1	0.100	1064	3589	5.740	58.100	57.400	-1.20%
H	5250	HEAD	04/21/2020	22.5	20.5	0.050	1191	7406	3.840	80.800	76.800	-4.95%
H	5600	HEAD	04/21/2020	22.5	20.5	0.050	1191	7406	3.830	82.700	76.600	-7.38%
H	5750	HEAD	04/21/2020	22.5	20.5	0.050	1191	7406	3.740	80.200	74.800	-6.73%
L	750	BODY	04/20/2020	21.0	20.3	0.200	1161	7410	1.720	8.430	8.600	2.02%
M	835	BODY	04/20/2020	22.0	20.4	0.200	4d132	7570	1.970	9.960	9.850	-1.10%
M	835	BODY	04/23/2020	21.8	20.8	0.200	4d132	7570	1.980	9.960	9.900	-0.60%
M	835	BODY	05/02/2020	21.8	21.5	0.200	4d132	7570	2.010	9.960	10.050	0.90%
D	835	BODY	05/06/2020	22.3	21.8	0.200	4d133	7488	1.920	9.750	9.600	-1.54%
I	1750	BODY	04/13/2020	22.0	21.4	0.100	1150	7527	3.570	36.600	35.700	-2.46%
I	1750	BODY	04/15/2020	23.0	21.7	0.100	1150	7527	3.590	36.600	35.900	-1.91%
J	1900	BODY	04/27/2020	22.3	21.7	0.100	5d149	7571	4.220	39.400	42.200	7.11%
O	1900	BODY	04/28/2020	21.1	21.0	0.100	5d149	7552	4.210	39.400	42.100	6.85%
O	1900	BODY	04/30/2020	23.0	21.7	0.100	5d149	7552	4.220	39.400	42.200	7.11%
K	2450	BODY	04/20/2020	22.4	22.0	0.100	797	7547	5.170	51.100	51.700	1.17%
K	2600	BODY	04/20/2020	22.4	22.0	0.100	1064	7547	5.560	55.600	55.600	0.00%
K	2450	BODY	04/27/2020	23.2	22.3	0.100	719	7547	5.280	50.800	52.800	3.94%
G	5250	BODY	04/13/2020	23.4	23.6	0.050	1057	7409	3.750	75.900	75.000	-1.19%
G	5600	BODY	04/13/2020	23.4	23.6	0.050	1057	7409	4.210	79.900	84.200	5.38%
G	5750	BODY	04/13/2020	23.4	23.6	0.050	1057	7409	3.910	76.700	78.200	1.96%

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 69 of 116	

**Table 10-5**  
**System Verification Results – 10g**

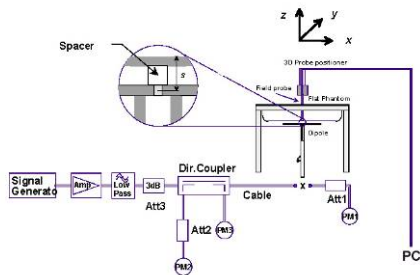

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
I	1750	BODY	04/13/2020	22.0	21.4	0.100	1150	7527	1.900	19.400	19.000	-2.06%
I	1750	BODY	04/27/2020	21.5	20.5	0.100	1150	7527	2.030	19.400	20.300	4.64%
O	1900	BODY	04/28/2020	21.1	21.0	0.100	5d149	7552	2.180	20.700	21.800	5.31%
O	1900	BODY	04/30/2020	23.0	21.7	0.100	5d149	7552	2.180	20.700	21.800	5.31%
J	1900	BODY	04/30/2020	22.3	24.4	0.100	5d148	7571	2.060	20.500	20.600	0.49%
K	2450	BODY	04/27/2020	23.2	22.3	0.100	719	7547	2.440	24.000	24.400	1.67%
K	2600	BODY	04/27/2020	23.2	22.3	0.100	1064	7547	2.430	25.000	24.300	-2.80%
G	5250	BODY	04/20/2020	22.8	22.5	0.050	1057	7409	1.030	21.100	20.600	-2.37%
G	5600	BODY	04/20/2020	22.8	22.5	0.050	1057	7409	1.120	22.300	22.400	0.45%
G	5750	BODY	04/20/2020	22.8	22.5	0.050	1057	7409	1.020	21.200	20.400	-3.77%



**Figure 10-1**  
**System Verification Setup Diagram**



**Figure 10-2**  
**System Verification Setup Photo**

FCC ID ZNFQ730VM	 Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 70 of 116	

# 11 SAR DATA SUMMARY




## 11.1 Standalone Head SAR Data

**Table 11-1**  
**GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.54	-0.05	Right	Cheek	01847	1	1:8.3	0.163	1.038	0.169	
836.60	190	GSM 850	GSM	33.7	33.54	-0.01	Right	Tilt	01847	1	1:8.3	0.078	1.038	0.081	
836.60	190	GSM 850	GSM	33.7	33.54	0.16	Left	Cheek	01847	1	1:8.3	0.183	1.038	0.190	
836.60	190	GSM 850	GSM	33.7	33.54	0.17	Left	Tilt	01847	1	1:8.3	0.091	1.038	0.094	
836.60	190	GSM 850	GPRS	30.7	30.39	-0.04	Right	Cheek	01847	3	1:2.76	0.253	1.074	0.272	
836.60	190	GSM 850	GPRS	30.7	30.39	-0.03	Right	Tilt	01847	3	1:2.76	0.125	1.074	0.134	
836.60	190	GSM 850	GPRS	30.7	30.39	-0.03	Left	Cheek	01847	3	1:2.76	0.265	1.074	0.285	A1
836.60	190	GSM 850	GPRS	30.7	30.39	0.12	Left	Tilt	01847	3	1:2.76	0.135	1.074	0.145	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2**  
**GSM 1900 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.7	30.35	0.16	Right	Cheek	01854	1	1:8.3	0.045	1.084	0.049	
1880.00	661	GSM 1900	GSM	30.7	30.35	-0.03	Right	Tilt	01854	1	1:8.3	0.019	1.084	0.021	
1880.00	661	GSM 1900	GSM	30.7	30.35	0.21	Left	Cheek	01854	1	1:8.3	0.042	1.084	0.046	
1880.00	661	GSM 1900	GSM	30.7	30.35	0.15	Left	Tilt	01854	1	1:8.3	0.026	1.084	0.028	
1880.00	661	GSM 1900	GPRS	27.7	27.22	-0.05	Right	Cheek	01854	3	1:2.76	0.060	1.117	0.067	A2
1880.00	661	GSM 1900	GPRS	27.7	27.22	-0.02	Right	Tilt	01854	3	1:2.76	0.024	1.117	0.027	
1880.00	661	GSM 1900	GPRS	27.7	27.22	0.13	Left	Cheek	01854	3	1:2.76	0.049	1.117	0.055	
1880.00	661	GSM 1900	GPRS	27.7	27.22	0.04	Left	Tilt	01854	3	1:2.76	0.033	1.117	0.037	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 71 of 116



**Table 11-3**  
**UMTS 850 Head SAR**




MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.2	25.16	-0.02	Right	Cheek	01847	1:1	0.200	1.009	0.202	A3
836.60	4183	UMTS 850	RMC	25.2	25.16	-0.06	Right	Tilt	01847	1:1	0.099	1.009	0.100	
836.60	4183	UMTS 850	RMC	25.2	25.16	0.14	Left	Cheek	01847	1:1	0.184	1.009	0.186	
836.60	4183	UMTS 850	RMC	25.2	25.16	-0.17	Left	Tilt	01847	1:1	0.098	1.009	0.099	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-4**  
**UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	-0.01	Right	Cheek	01821	1:1	0.097	1.000	0.097	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	-0.05	Right	Tilt	01821	1:1	0.070	1.000	0.070	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	0.05	Left	Cheek	01821	1:1	0.102	1.000	0.102	A4
1732.40	1412	UMTS 1750	RMC	24.7	24.70	0.09	Left	Tilt	01821	1:1	0.060	1.000	0.060	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5**  
**UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.7	24.68	0.15	Right	Cheek	01854	1:1	0.124	1.005	0.125	A5
1880.00	9400	UMTS 1900	RMC	24.7	24.68	-0.04	Right	Tilt	01854	1:1	0.049	1.005	0.049	
1880.00	9400	UMTS 1900	RMC	24.7	24.68	0.08	Left	Cheek	01854	1:1	0.091	1.005	0.091	
1880.00	9400	UMTS 1900	RMC	24.7	24.68	-0.12	Left	Tilt	01854	1:1	0.067	1.005	0.067	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID ZNFQ730VM	 Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 72 of 116

**Table 11-6**  
**CDMA BC0 (§22H) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.47	-0.02	Right	Cheek	01847	1:1	0.181	1.183	0.214	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.47	0.01	Right	Tilt	01847	1:1	0.099	1.183	0.117	
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.47	0.02	Left	Cheek	01847	1:1	0.192	1.183	0.227	A6
836.52	384	CDMA BC0 (§22H)	RC3 / SO55	25.2	24.47	0.07	Left	Tilt	01847	1:1	0.102	1.183	0.121	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.64	-0.20	Right	Cheek	01847	1:1	0.152	1.138	0.173	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.64	-0.08	Right	Tilt	01847	1:1	0.080	1.138	0.091	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.64	-0.08	Left	Cheek	01847	1:1	0.147	1.138	0.167	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. A	25.2	24.64	0.00	Left	Tilt	01847	1:1	0.075	1.138	0.085	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-7**  
**CDMA BC10 (§90S) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.59	0.06	Right	Cheek	01847	1:1	0.160	1.151	0.184	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.59	-0.09	Right	Tilt	01847	1:1	0.094	1.151	0.108	
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.59	0.13	Left	Cheek	01847	1:1	0.219	1.151	0.252	A7
820.10	564	CDMA BC10 (§90S)	RC3 / SO55	25.2	24.59	-0.02	Left	Tilt	01847	1:1	0.123	1.151	0.142	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	24.44	-0.08	Right	Cheek	01847	1:1	0.130	1.191	0.155	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	24.44	0.11	Right	Tilt	01847	1:1	0.071	1.191	0.085	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	24.44	-0.07	Left	Cheek	01847	1:1	0.173	1.191	0.206	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. A	25.2	24.44	-0.02	Left	Tilt	01847	1:1	0.103	1.191	0.123	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b>
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Quality Manager
				Page 73 of 116

**Table 11-8**  
**PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	23.91	0.09	Right	Cheek	01854	1:1	0.130	1.199	0.156	A8
1880.00	600	PCS CDMA	RC3 / SO55	24.7	23.91	0.12	Right	Tilt	01854	1:1	0.054	1.199	0.065	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	23.91	0.08	Left	Cheek	01854	1:1	0.089	1.199	0.107	
1880.00	600	PCS CDMA	RC3 / SO55	24.7	23.91	-0.05	Left	Tilt	01854	1:1	0.068	1.199	0.082	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	23.92	0.08	Right	Cheek	01854	1:1	0.103	1.197	0.123	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	23.92	0.04	Right	Tilt	01854	1:1	0.041	1.197	0.049	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	23.92	0.01	Left	Cheek	01854	1:1	0.068	1.197	0.081	
1880.00	600	PCS CDMA	EVDO Rev. A	24.7	23.92	0.09	Left	Tilt	01854	1:1	0.053	1.197	0.063	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram						

**Table 11-9**  
**LTE Band 71 Head SAR**

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)
MHz	Ch.														(W/kg)		(W/kg)
680.50	133297	Mid	LTE Band 71	25.2	25.10	-0.03	0	Right	Cheek	QPSK	1	50	01854	1:1	0.145	1.023	0.148
680.50	133297	Mid	LTE Band 71	24.2	23.98	0.13	1	Right	Cheek	QPSK	50	25	01854	1:1	0.110	1.052	0.116
680.50	133297	Mid	LTE Band 71	25.2	25.10	-0.20	0	Right	Tilt	QPSK	1	50	01854	1:1	0.061	1.023	0.062
680.50	133297	Mid	LTE Band 71	24.2	23.98	0.02	1	Right	Tilt	QPSK	50	25	01854	1:1	0.051	1.052	0.054
680.50	133297	Mid	LTE Band 71	25.2	25.10	0.02	0	Left	Cheek	QPSK	1	50	01854	1:1	0.145	1.023	0.148
680.50	133297	Mid	LTE Band 71	24.2	23.98	0.03	1	Left	Cheek	QPSK	50	25	01854	1:1	0.127	1.052	0.134
680.50	133297	Mid	LTE Band 71	25.2	25.10	0.19	0	Left	Tilt	QPSK	1	50	01854	1:1	0.075	1.023	0.077
680.50	133297	Mid	LTE Band 71	24.2	23.98	0.11	1	Left	Tilt	QPSK	50	25	01854	1:1	0.059	1.052	0.062
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID ZNFQ730VM	 <small>Proud to be part of element</small>	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 74 of 116

**Table 11-10**  
**LTE Band 12 Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	-0.04	0	Right	Cheek	QPSK	1	25	01854	1:1	0.133	1.021	0.136	
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	0.09	1	Right	Cheek	QPSK	25	12	01854	1:1	0.104	1.067	0.111	
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	-0.18	0	Right	Tilt	QPSK	1	25	01854	1:1	0.070	1.021	0.071	
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	0.03	1	Right	Tilt	QPSK	25	12	01854	1:1	0.056	1.067	0.060	
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	0.12	0	Left	Cheek	QPSK	1	25	01854	1:1	0.173	1.021	0.177	A10
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	0.02	1	Left	Cheek	QPSK	25	12	01854	1:1	0.141	1.067	0.150	
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	0.03	0	Left	Tilt	QPSK	1	25	01854	1:1	0.094	1.021	0.096	
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	0.10	1	Left	Tilt	QPSK	25	12	01854	1:1	0.072	1.067	0.077	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-11**  
**LTE Band 13 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	0.08	0	Right	Cheek	QPSK	1	25	01854	1:1	0.096	1.079	0.104	
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	0.00	1	Right	Cheek	QPSK	25	12	01854	1:1	0.078	1.072	0.084	
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	-0.08	0	Right	Tilt	QPSK	1	25	01854	1:1	0.049	1.079	0.053	
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	-0.04	1	Right	Tilt	QPSK	25	12	01854	1:1	0.039	1.072	0.042	
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	0.01	0	Left	Cheek	QPSK	1	25	01854	1:1	0.135	1.079	0.146	A11
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	0.08	1	Left	Cheek	QPSK	25	12	01854	1:1	0.110	1.072	0.118	
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	0.07	0	Left	Tilt	QPSK	1	25	01854	1:1	0.063	1.079	0.068	
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	0.08	1	Left	Tilt	QPSK	25	12	01854	1:1	0.053	1.072	0.057	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12**  
**LTE Band 26 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	-0.18	0	Right	Cheek	QPSK	1	36	01839	1:1	0.144	1.062	0.153	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	-0.03	1	Right	Cheek	QPSK	36	18	01839	1:1	0.122	1.067	0.130	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	0.07	0	Right	Tilt	QPSK	1	36	01839	1:1	0.069	1.062	0.073	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	0.03	1	Right	Tilt	QPSK	36	18	01839	1:1	0.060	1.067	0.064	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	-0.01	0	Left	Cheek	QPSK	1	36	01839	1:1	0.158	1.062	0.168	A12
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	-0.02	1	Left	Cheek	QPSK	36	18	01839	1:1	0.133	1.067	0.142	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	0.06	0	Left	Tilt	QPSK	1	36	01839	1:1	0.083	1.062	0.088	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	0.01	1	Left	Tilt	QPSK	36	18	01839	1:1	0.072	1.067	0.077	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 75 of 116	

**Table 11-13**  
**LTE Band 66 (AWS) Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	0.07	0	Right	Cheek	QPSK	1	50	01821	1:1	0.129	1.000	0.129	A13
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	-0.06	1	Right	Cheek	QPSK	50	25	01821	1:1	0.100	1.000	0.100	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	-0.08	0	Right	Tilt	QPSK	1	50	01821	1:1	0.085	1.000	0.085	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	0.07	1	Right	Tilt	QPSK	50	25	01821	1:1	0.062	1.000	0.062	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	0.11	0	Left	Cheek	QPSK	1	50	01821	1:1	0.120	1.000	0.120	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	0.13	1	Left	Cheek	QPSK	50	25	01821	1:1	0.096	1.000	0.096	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	0.12	0	Left	Tilt	QPSK	1	50	01821	1:1	0.067	1.000	0.067	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	0.21	1	Left	Tilt	QPSK	50	25	01821	1:1	0.058	1.000	0.058	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-14**  
**LTE Band 25 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
																(W/kg)		(W/kg)	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.05	0	Right	Cheek	QPSK	1	0	01854	1:1	0.133	1.000	0.133	A14
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	0.01	1	Right	Cheek	QPSK	50	25	01854	1:1	0.106	1.000	0.106	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.05	0	Right	Tilt	QPSK	1	0	01854	1:1	0.051	1.000	0.051	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	-0.03	1	Right	Tilt	QPSK	50	25	01854	1:1	0.035	1.000	0.035	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.04	0	Left	Cheek	QPSK	1	0	01854	1:1	0.100	1.000	0.100	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	0.13	1	Left	Cheek	QPSK	50	25	01854	1:1	0.076	1.000	0.076	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.01	0	Left	Tilt	QPSK	1	0	01854	1:1	0.066	1.000	0.066	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	0.13	1	Left	Tilt	QPSK	50	25	01854	1:1	0.061	1.000	0.061	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-15**  
**LTE Band 41 Head SAR**

MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.														(W/kg)		(W/kg)		
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	0.02	0	Right	Cheek	QPSK	1	50	01821	1:1.58	0.111	1.000	0.111	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	0.08	1	Right	Cheek	QPSK	50	25	01821	1:1.58	0.088	1.002	0.088	
Power Class 2	2593.00	40620	Mid	LTE Band 41	20	27.2	27.20	-0.09	0	Right	Cheek	QPSK	1	50	01821	1:2.31	0.128	1.000	0.128	A15
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	0.05	0	Right	Tilt	QPSK	1	50	01821	1:1.58	0.036	1.000	0.036	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	0.03	1	Right	Tilt	QPSK	50	25	01821	1:1.58	0.026	1.002	0.026	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	0.05	0	Left	Cheek	QPSK	1	50	01821	1:1.58	0.075	1.000	0.075	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	0.03	1	Left	Cheek	QPSK	50	25	01821	1:1.58	0.060	1.002	0.060	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	0.02	0	Left	Tilt	QPSK	1	50	01821	1:1.58	0.059	1.000	0.059	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	0.03	1	Left	Tilt	QPSK	50	25	01821	1:1.58	0.049	1.002	0.049	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 76 of 116	



**Table 11-16  
DTS Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	18.0	17.90	-0.05	Right	Cheek	01953	1	99.1	0.463	-	1.023	1.009	-	
2437	6	802.11b	DSSS	22	18.0	17.90	0.07	Right	Tilt	01953	1	99.1	0.245	-	1.023	1.009	-	
2412	1	802.11b	DSSS	22	18.0	17.68	0.08	Left	Cheek	01953	1	99.1	1.256	0.920	1.076	1.009	0.999	
2437	6	802.11b	DSSS	22	18.0	17.90	0.10	Left	Cheek	01953	1	99.1	1.459	0.939	1.023	1.009	0.969	A16
2462	11	802.11b	DSSS	22	18.0	17.87	0.09	Left	Cheek	01953	1	99.1	1.021	0.812	1.030	1.009	0.844	
2437	6	802.11b	DSSS	22	18.0	17.90	0.07	Left	Tilt	01953	1	99.1	0.535	0.365	1.023	1.009	0.377	
2437	6	802.11b	DSSS	22	18.0	17.90	-0.04	Left	Cheek	01953	1	99.1	1.235	0.923	1.023	1.009	0.953	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entries represent variability measurements.

**Table 11-17  
NII Head SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5310	62	802.11n	OFDM	40	16.0	15.51	0.10	Right	Cheek	01953	13.5	86.7	0.102	-	1.119	1.153	-	
5310	62	802.11n	OFDM	40	16.0	15.51	0.10	Right	Tilt	01953	13.5	86.7	0.094	-	1.119	1.153	-	
5310	62	802.11n	OFDM	40	16.0	15.51	0.10	Left	Cheek	01953	13.5	86.7	0.616	0.303	1.119	1.153	0.391	
5310	62	802.11n	OFDM	40	16.0	15.51	0.10	Left	Tilt	01953	13.5	86.7	0.281	-	1.119	1.153	-	
5510	102	802.11n	OFDM	40	16.0	15.18	0.09	Right	Cheek	01953	13.5	86.7	0.170	-	1.208	1.153	-	
5510	102	802.11n	OFDM	40	16.0	15.18	0.06	Right	Tilt	01953	13.5	86.7	0.162	-	1.208	1.153	-	
5510	102	802.11n	OFDM	40	16.0	15.18	0.06	Left	Cheek	01953	13.5	86.7	1.289	0.539	1.208	1.153	0.751	
5510	102	802.11n	OFDM	40	16.0	15.18	0.20	Left	Tilt	01953	13.5	86.7	0.354	0.186	1.208	1.153	0.259	
5755	151	802.11n	OFDM	40	16.0	15.70	0.06	Right	Cheek	01953	13.5	86.7	0.263	-	1.072	1.153	-	
5755	151	802.11n	OFDM	40	16.0	15.70	0.10	Right	Tilt	01953	13.5	86.7	0.206	-	1.072	1.153	-	
5755	151	802.11n	OFDM	40	16.0	15.70	0.08	Left	Cheek	01953	13.5	86.7	1.824	0.730	1.072	1.153	0.902	A17
5795	159	802.11n	OFDM	40	16.0	15.67	0.03	Left	Cheek	01953	13.5	86.7	1.771	0.729	1.079	1.153	0.907	
5755	151	802.11n	OFDM	40	16.0	15.70	0.02	Left	Tilt	01953	13.5	86.7	0.368	0.178	1.072	1.153	0.220	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																		
Spatial Peak									Head									
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b>
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Quality Manager
				Page 77 of 116



**Table 11-18  
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2480.00	78	Bluetooth	FHSS	8.5	7.85	0.02	Right	Cheek	01946	1	76.9	0.023	1.161	1.300	0.035	
2480.00	78	Bluetooth	FHSS	8.5	7.85	0.08	Right	Tilt	01946	1	76.9	0.015	1.161	1.300	0.023	
2480.00	78	Bluetooth	FHSS	8.5	7.85	-0.08	Left	Cheek	01946	1	76.9	0.066	1.161	1.300	0.100	A18
2480.00	78	Bluetooth	FHSS	8.5	7.85	0.03	Left	Tilt	01946	1	76.9	0.031	1.161	1.300	0.047	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram									

## 11.2 Standalone Body-Worn SAR Data

**Table 11-19  
GSM/UMTS/CDMA Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.54	0.06	10 mm	01847	1	1:8.3	back	0.342	1.038	0.355	
824.20	128	GSM 850	GPRS	30.7	30.33	0.06	10 mm	01847	3	1:2.76	back	0.514	1.089	0.560	
836.60	190	GSM 850	GPRS	30.7	30.39	0.05	10 mm	01847	3	1:2.76	back	0.562	1.074	0.604	A19
848.80	251	GSM 850	GPRS	30.7	30.37	-0.04	10 mm	01847	3	1:2.76	back	0.527	1.079	0.569	
1880.00	661	GSM 1900	GSM	30.7	30.35	0.07	10 mm	01821	1	1:8.3	back	0.246	1.084	0.267	
1880.00	661	GSM 1900	GPRS	27.7	27.22	0.06	10 mm	01821	3	1:2.76	back	0.324	1.117	0.362	A21
836.60	4183	UMTS 850	RMC	25.2	25.16	0.00	10 mm	01847	N/A	1:1	back	0.404	1.009	0.408	A23
1712.40	1312	UMTS 1750	RMC	24.7	24.64	-0.15	10 mm	01854	N/A	1:1	back	0.634	1.014	0.643	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	0.08	10 mm	01854	N/A	1:1	back	0.670	1.000	0.670	A25
1752.60	1513	UMTS 1750	RMC	24.7	24.65	0.03	10 mm	01854	N/A	1:1	back	0.650	1.012	0.658	
1852.40	9262	UMTS 1900	RMC	24.7	24.67	0.02	10 mm	01821	N/A	1:1	back	0.623	1.007	0.627	A27
1880.00	9400	UMTS 1900	RMC	24.7	24.68	0.00	10 mm	01821	N/A	1:1	back	0.599	1.005	0.602	
1907.60	9538	UMTS 1900	RMC	24.7	24.70	-0.15	10 mm	01821	N/A	1:1	back	0.598	1.000	0.598	
836.52	384	CDMA BC0 (\$22H)	TDSO / SO32	25.2	24.44	0.03	10 mm	01854	N/A	1:1	back	0.392	1.191	0.467	A29
820.10	564	CDMA BC10 (\$90S)	TDSO / SO32	25.2	24.55	0.02	10 mm	01854	N/A	1:1	back	0.382	1.161	0.444	A31
1851.25	25	PCS CDMA	TDSO / SO32	24.7	23.84	0.03	10 mm	01847	N/A	1:1	back	0.582	1.219	0.709	A33
1880.00	600	PCS CDMA	TDSO / SO32	24.7	23.87	0.10	10 mm	01847	N/A	1:1	back	0.536	1.211	0.649	
1908.75	1175	PCS CDMA	TDSO / SO32	24.7	24.12	0.09	10 mm	01847	N/A	1:1	back	0.527	1.143	0.602	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID ZNFQ730VM	 Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 78 of 116	

**Table 11-20**  
**LTE Body-Worn SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
680.50	133297	Mid	LTE Band 71	20	25.2	25.10	0.00	0	01854	QPSK	1	50	10 mm	back	1:1	0.261	1.023	0.267	A35
680.50	133297	Mid	LTE Band 71	20	24.2	23.98	0.01	1	01854	QPSK	50	25	10 mm	back	1:1	0.205	1.052	0.216	
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	0.03	0	01854	QPSK	1	25	10 mm	back	1:1	0.275	1.021	0.281	A37
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	0.02	1	01854	QPSK	25	12	10 mm	back	1:1	0.228	1.067	0.243	
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	-0.03	0	01854	QPSK	1	25	10 mm	back	1:1	0.253	1.079	0.273	A39
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	0.01	1	01854	QPSK	25	12	10 mm	back	1:1	0.206	1.072	0.221	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	0.01	0	01821	QPSK	1	36	10 mm	back	1:1	0.360	1.062	0.382	A41
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	0.03	1	01821	QPSK	36	18	10 mm	back	1:1	0.293	1.067	0.313	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.7	24.68	0.00	0	01854	QPSK	1	50	10 mm	back	1:1	0.737	1.005	0.741	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	0.00	0	01854	QPSK	1	50	10 mm	back	1:1	0.756	1.000	0.756	A43
1770.00	132572	High	LTE Band 66 (AWS)	20	24.7	24.62	-0.12	0	01854	QPSK	1	50	10 mm	back	1:1	0.741	1.019	0.755	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	0.01	1	01854	QPSK	50	25	10 mm	back	1:1	0.586	1.000	0.586	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.00	0	01821	QPSK	1	0	10 mm	back	1:1	0.558	1.000	0.558	A45
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	-0.01	1	01821	QPSK	50	25	10 mm	back	1:1	0.454	1.000	0.454	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak									Body										
Uncontrolled Exposure/General Population									1.6 W/kg (mW/g)										
									averaged over 1 gram										

**Table 11-21**  
**LTE 41 Body-Worn SAR**

MEASUREMENT RESULTS																			
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
	MHz	Ch.														(W/kg)		(W/kg)	
Power Class 3	2593.00	40620	Md	LTE Band 41	20	25.2	-0.20	0	01839	QPSK	1	50	10 mm	back	1:1.58	0.497	1.000	0.497	
Power Class 3	2593.00	40620	Md	LTE Band 41	20	24.2	-0.03	1	01839	QPSK	50	25	10 mm	back	1:1.58	0.430	1.002	0.431	
Power Class 2	2593.00	40620	Md	LTE Band 41	20	27.2	0.01	0	01839	QPSK	1	50	10 mm	back	1:2.31	0.531	1.000	0.531	A47
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-22**  
**DTS Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	21.5	20.96	0.14	10 mm	01953	1	back	99.1	0.640	0.424	1.132	1.009	0.484	A49
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID ZNFQ730VM	 Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 79 of 116





**Table 11-23**  
**NII Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	19.0	18.50	-0.12	10 mm	01946	6	back	96.9	0.597	0.309	1.122	1.032	0.358	
5500	100	802.11a	OFDM	20	19.0	18.26	-0.09	10 mm	01946	6	back	96.9	0.996	0.447	1.186	1.032	0.547	A51
5785	157	802.11a	OFDM	20	19.0	18.10	-0.02	10 mm	01946	6	back	96.9	0.768	0.332	1.230	1.032	0.421	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										

**Table 11-24**  
**DSS Body-Worn SAR**




MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2480	78	Bluetooth	FHSS	8.5	7.85	0.03	10 mm	01953	1	back	76.9	0.024	1.161	1.300	0.036	A53
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID ZNFQ730VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 80 of 116

## 11.3 Standalone Hotspot SAR Data

**Table 11-25**  
**GPRS/UMTS/CDMA Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GSM 850	GPRS	30.7	30.33	0.06	10 mm	01847	3	1:2.76	back	0.514	1.089	0.560	
836.60	190	GSM 850	GPRS	30.7	30.39	0.05	10 mm	01847	3	1:2.76	back	0.562	1.074	0.604	
848.80	251	GSM 850	GPRS	30.7	30.37	-0.04	10 mm	01847	3	1:2.76	back	0.527	1.079	0.569	
836.60	190	GSM 850	GPRS	30.7	30.39	0.09	10 mm	01847	3	1:2.76	front	0.469	1.074	0.504	
824.20	128	GSM 850	GPRS	30.7	30.33	-0.03	10 mm	01847	3	1:2.76	bottom	0.500	1.089	0.545	
836.60	190	GSM 850	GPRS	30.7	30.39	-0.03	10 mm	01847	3	1:2.76	bottom	0.589	1.074	0.633	
848.80	251	GSM 850	GPRS	30.7	30.37	-0.03	10 mm	01847	3	1:2.76	bottom	0.591	1.079	0.638	A20
836.60	190	GSM 850	GPRS	30.7	30.39	0.04	10 mm	01847	3	1:2.76	left	0.394	1.074	0.423	
1880.00	661	GSM 1900	GPRS	27.7	27.22	0.06	10 mm	01821	3	1:2.76	back	0.324	1.117	0.362	
1880.00	661	GSM 1900	GPRS	27.7	27.22	-0.03	10 mm	01821	3	1:2.76	front	0.264	1.117	0.295	
1880.00	661	GSM 1900	GPRS	27.7	27.22	-0.01	10 mm	01821	3	1:2.76	bottom	0.489	1.117	0.546	A22
1880.00	661	GSM 1900	GPRS	27.7	27.22	0.13	10 mm	01821	3	1:2.76	right	0.095	1.117	0.106	
836.60	4183	UMTS 850	RMC	25.2	25.16	0.00	10 mm	01847	N/A	1:1	back	0.404	1.009	0.408	
836.60	4183	UMTS 850	RMC	25.2	25.16	0.00	10 mm	01847	N/A	1:1	front	0.342	1.009	0.345	
836.60	4183	UMTS 850	RMC	25.2	25.16	0.00	10 mm	01847	N/A	1:1	bottom	0.434	1.009	0.438	A24
836.60	4183	UMTS 850	RMC	25.2	25.16	-0.03	10 mm	01847	N/A	1:1	left	0.203	1.009	0.205	
1732.40	1412	UMTS 1750	RMC	23.2	23.12	0.11	10 mm	01854	N/A	1:1	back	0.514	1.019	0.524	
1732.40	1412	UMTS 1750	RMC	23.2	23.12	0.05	10 mm	01854	N/A	1:1	front	0.430	1.019	0.438	
1712.40	1312	UMTS 1750	RMC	23.2	23.19	-0.01	10 mm	01854	N/A	1:1	bottom	0.763	1.002	0.765	
1732.40	1412	UMTS 1750	RMC	23.2	23.12	0.01	10 mm	01854	N/A	1:1	bottom	0.829	1.019	0.845	
1752.60	1513	UMTS 1750	RMC	23.2	23.20	-0.01	10 mm	01854	N/A	1:1	bottom	0.849	1.000	0.849	A26
1732.40	1412	UMTS 1750	RMC	23.2	23.12	-0.01	10 mm	01854	N/A	1:1	right	0.131	1.019	0.133	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	0.01	10 mm	01821	N/A	1:1	back	0.464	1.023	0.475	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.02	10 mm	01821	N/A	1:1	front	0.345	1.023	0.353	
1852.40	9262	UMTS 1900	RMC	23.2	23.20	-0.10	10 mm	01821	N/A	1:1	bottom	0.708	1.000	0.708	A28
1880.00	9400	UMTS 1900	RMC	23.2	23.10	0.00	10 mm	01821	N/A	1:1	bottom	0.679	1.023	0.695	
1907.60	9538	UMTS 1900	RMC	23.2	23.09	-0.02	10 mm	01821	N/A	1:1	bottom	0.605	1.026	0.621	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	0.01	10 mm	01821	N/A	1:1	right	0.128	1.023	0.131	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.64	0.01	10 mm	01854	N/A	1:1	back	0.305	1.138	0.347	A30
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.64	0.00	10 mm	01854	N/A	1:1	front	0.245	1.138	0.279	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.64	0.00	10 mm	01854	N/A	1:1	bottom	0.297	1.138	0.338	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. 0	25.2	24.64	-0.04	10 mm	01854	N/A	1:1	left	0.182	1.138	0.207	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	24.45	0.01	10 mm	01854	N/A	1:1	back	0.316	1.189	0.376	A32
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	24.45	0.01	10 mm	01854	N/A	1:1	front	0.259	1.189	0.308	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	24.45	-0.01	10 mm	01854	N/A	1:1	bottom	0.304	1.189	0.361	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. 0	25.2	24.45	0.01	10 mm	01854	N/A	1:1	left	0.222	1.189	0.264	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.2	22.77	0.09	10 mm	01847	N/A	1:1	back	0.304	1.104	0.336	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.2	22.77	-0.09	10 mm	01847	N/A	1:1	front	0.300	1.104	0.331	
1851.25	25	PCS CDMA	EVDO Rev. 0	23.2	22.46	-0.10	10 mm	01847	N/A	1:1	bottom	0.572	1.186	0.678	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.2	22.17	-0.10	10 mm	01847	N/A	1:1	bottom	0.587	1.268	0.744	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.2	22.77	-0.09	10 mm	01847	N/A	1:1	bottom	0.604	1.104	0.667	A34
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.2	22.77	0.03	10 mm	01847	N/A	1:1	right	0.103	1.104	0.114	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 81 of 116

**Table 11-26**  
**LTE Band 71 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR	Plot #	
MHz	Ch.														(W/kg)		(1g)		
680.50	133297	Mid	LTE Band 71	20	25.2	25.10	0.00	0	01854	QPSK	1	50	10 mm	back	1:1	0.261	1.023	0.267	
680.50	133297	Mid	LTE Band 71	20	24.2	23.98	0.01	1	01854	QPSK	50	25	10 mm	back	1:1	0.205	1.052	0.216	
680.50	133297	Mid	LTE Band 71	20	25.2	25.10	0.01	0	01854	QPSK	1	50	10 mm	front	1:1	0.237	1.023	0.242	
680.50	133297	Mid	LTE Band 71	20	24.2	23.98	-0.01	1	01854	QPSK	50	25	10 mm	front	1:1	0.189	1.052	0.199	
680.50	133297	Mid	LTE Band 71	20	25.2	25.10	-0.04	0	01854	QPSK	1	50	10 mm	bottom	1:1	0.289	1.023	0.296	
680.50	133297	Mid	LTE Band 71	20	24.2	23.98	-0.03	1	01854	QPSK	50	25	10 mm	bottom	1:1	0.229	1.052	0.241	
680.50	133297	Mid	LTE Band 71	20	25.2	25.10	0.15	0	01854	QPSK	1	50	10 mm	left	1:1	0.504	1.023	0.516	A34
680.50	133297	Mid	LTE Band 71	20	24.2	23.98	0.00	1	01854	QPSK	50	25	10 mm	left	1:1	0.366	1.052	0.385	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-27**  
**LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	0.03	0	01854	QPSK	1	25	10 mm	back	1:1	0.275	1.021	0.281	
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	0.02	1	01854	QPSK	25	12	10 mm	back	1:1	0.228	1.067	0.243	
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	-0.04	0	01854	QPSK	1	25	10 mm	front	1:1	0.254	1.021	0.259	
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	-0.01	1	01854	QPSK	25	12	10 mm	front	1:1	0.206	1.067	0.220	
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	-0.07	0	01854	QPSK	1	25	10 mm	bottom	1:1	0.305	1.021	0.311	
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	0.02	1	01854	QPSK	25	12	10 mm	bottom	1:1	0.255	1.067	0.272	
707.50	23095	Mid	LTE Band 12	10	25.2	25.11	-0.03	0	01854	QPSK	1	25	10 mm	left	1:1	0.366	1.021	0.374	A38
707.50	23095	Mid	LTE Band 12	10	24.2	23.92	-0.02	1	01854	QPSK	25	12	10 mm	left	1:1	0.293	1.067	0.313	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b>
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Quality Manager
				Page 82 of 116

**Table 11-28**  
**LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	-0.03	0	01854	QPSK	1	25	10 mm	back	1:1	0.253	1.079	0.273	
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	0.01	1	01854	QPSK	25	12	10 mm	back	1:1	0.206	1.072	0.221	
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	-0.03	0	01854	QPSK	1	25	10 mm	front	1:1	0.214	1.079	0.231	
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	-0.01	1	01854	QPSK	25	12	10 mm	front	1:1	0.174	1.072	0.187	
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	-0.06	0	01854	QPSK	1	25	10 mm	bottom	1:1	0.254	1.079	0.274	
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	-0.03	1	01854	QPSK	25	12	10 mm	bottom	1:1	0.212	1.072	0.227	
782.00	23230	Mid	LTE Band 13	10	25.2	24.87	-0.20	0	01854	QPSK	1	25	10 mm	left	1:1	0.300	1.079	0.324	A40
782.00	23230	Mid	LTE Band 13	10	24.2	23.90	0.07	1	01854	QPSK	25	12	10 mm	left	1:1	0.222	1.072	0.238	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-29**  
**LTE Band 26 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	0.01	0	01821	QPSK	1	36	10 mm	back	1:1	0.360	1.062	0.382	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	0.03	1	01821	QPSK	36	18	10 mm	back	1:1	0.293	1.067	0.313	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	0.01	0	01821	QPSK	1	36	10 mm	front	1:1	0.303	1.062	0.322	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	0.02	1	01821	QPSK	36	18	10 mm	front	1:1	0.250	1.067	0.267	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	0.04	0	01821	QPSK	1	36	10 mm	bottom	1:1	0.394	1.062	0.418	A42
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	0.03	1	01821	QPSK	36	18	10 mm	bottom	1:1	0.328	1.067	0.350	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.2	24.94	-0.02	0	01821	QPSK	1	36	10 mm	left	1:1	0.183	1.062	0.194	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.2	23.92	0.03	1	01821	QPSK	36	18	10 mm	left	1:1	0.149	1.067	0.159	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset	Page 83 of 116	



**Table 11-30**  
**LTE Band 66 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.19	-0.02	0	01854	QPSK	1	50	10 mm	back	1:1	0.515	1.002	0.516	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.18	0.02	0	01854	QPSK	50	25	10 mm	back	1:1	0.509	1.005	0.512	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.19	0.03	0	01854	QPSK	1	50	10 mm	front	1:1	0.446	1.002	0.447	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.18	-0.01	0	01854	QPSK	50	25	10 mm	front	1:1	0.439	1.005	0.441	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.2	23.02	0.00	0	01854	QPSK	1	50	10 mm	bottom	1:1	0.886	1.042	0.923	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.19	-0.02	0	01854	QPSK	1	50	10 mm	bottom	1:1	0.911	1.002	0.913	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	23.03	0.00	0	01854	QPSK	1	0	10 mm	bottom	1:1	0.879	1.040	0.914	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.2	23.16	-0.02	0	01854	QPSK	50	25	10 mm	bottom	1:1	0.861	1.009	0.869	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.18	0.02	0	01854	QPSK	50	25	10 mm	bottom	1:1	0.904	1.005	0.909	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	23.12	0.00	0	01854	QPSK	50	0	10 mm	bottom	1:1	0.947	1.019	0.965	A44
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.17	0.00	0	01854	QPSK	100	0	10 mm	bottom	1:1	0.921	1.007	0.927	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.19	-0.01	0	01854	QPSK	1	50	10 mm	right	1:1	0.134	1.002	0.134	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.18	-0.03	0	01854	QPSK	50	25	10 mm	right	1:1	0.135	1.005	0.136	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	23.12	0.00	0	01854	QPSK	50	0	10 mm	bottom	1:1	0.946	1.019	0.964	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represent variability measurement.

**Table 11-31**  
**LTE Band 25 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.16	-0.02	0	01821	QPSK	1	50	10 mm	back	1:1	0.384	1.009	0.387	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.10	0.02	0	01821	QPSK	50	25	10 mm	back	1:1	0.372	1.023	0.381	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.16	-0.02	0	01821	QPSK	1	50	10 mm	front	1:1	0.375	1.009	0.378	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.10	0.00	0	01821	QPSK	50	25	10 mm	front	1:1	0.364	1.023	0.372	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.2	22.99	-0.07	0	01821	QPSK	1	50	10 mm	bottom	1:1	0.746	1.050	0.783	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.16	-0.06	0	01821	QPSK	1	50	10 mm	bottom	1:1	0.768	1.009	0.775	A46
1905.00	26590	High	LTE Band 25 (PCS)	20	23.2	23.08	-0.04	0	01821	QPSK	1	50	10 mm	bottom	1:1	0.649	1.028	0.667	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.10	0.01	0	01821	QPSK	50	25	10 mm	bottom	1:1	0.723	1.023	0.740	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.16	0.00	0	01821	QPSK	1	50	10 mm	right	1:1	0.139	1.009	0.140	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.10	-0.04	0	01821	QPSK	50	25	10 mm	right	1:1	0.133	1.023	0.136	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset	Page 84 of 116	

**Table 11-32**  
**LTE Band 41 Hotspot SAR**

MEASUREMENT RESULTS																			
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
	MHz	Ch.														(W/kg)		(W/kg)	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.66	0.01	0	01839	QPSK	1	50	10 mm	back	1:1.58	1.009	0.360	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.62	-0.02	0	01839	QPSK	50	25	10 mm	back	1:1.58	1.019	0.357	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.66	0.06	0	01839	QPSK	1	50	10 mm	front	1:1.58	1.009	0.164	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.62	0.12	0	01839	QPSK	50	25	10 mm	front	1:1.58	1.019	0.166	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.66	0.00	0	01839	QPSK	1	50	10 mm	bottom	1:1.58	1.009	0.369	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.62	0.05	0	01839	QPSK	50	25	10 mm	bottom	1:1.58	1.019	0.369	
Power Class 2	2593.00	40620	Mid	LTE Band 41	20	25.7	25.60	0.04	0	01839	QPSK	1	50	10 mm	bottom	1:2.31	1.023	0.401	A48
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.66	0.03	0	01839	QPSK	1	50	10 mm	right	1:1.58	1.009	0.054	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.62	-0.08	0	01839	QPSK	50	25	10 mm	right	1:1.58	1.019	0.055	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										



**Table 11-33**  
**WLAN Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
2437	6	802.11b	DSSS	22	21.5	20.96	0.14	10 mm	01953	1	back	99.1	0.640	0.424	1.132	1.009	0.484	
2437	6	802.11b	DSSS	22	21.5	20.96	0.19	10 mm	01953	1	front	99.1	0.543	-	1.132	1.009	-	
2437	6	802.11b	DSSS	22	21.5	20.96	0.03	10 mm	01953	1	top	99.1	0.277	-	1.132	1.009	-	
2412	1	802.11b	DSSS	22	21.5	20.68	0.07	10 mm	01953	1	right	99.1	1.026	0.641	1.208	1.009	0.781	
2437	6	802.11b	DSSS	22	21.5	20.96	0.02	10 mm	01953	1	right	99.1	0.855	0.542	1.132	1.009	0.619	
2462	11	802.11b	DSSS	22	21.5	20.93	0.04	10 mm	01953	1	right	99.1	1.038	0.668	1.140	1.009	0.768	A50
5240	48	802.11a	OFDM	20	19.0	18.43	-0.05	10 mm	01946	6	back	96.9	0.634	0.317	1.140	1.032	0.373	
5240	48	802.11a	OFDM	20	19.0	18.43	-0.10	10 mm	01946	6	front	96.9	0.255	-	1.140	1.032	-	
5240	48	802.11a	OFDM	20	19.0	18.43	0.09	10 mm	01946	6	top	96.9	0.343	-	1.140	1.032	-	
5240	48	802.11a	OFDM	20	19.0	18.43	0.10	10 mm	01946	6	right	96.9	0.957	0.422	1.140	1.032	0.496	
5785	157	802.11a	OFDM	20	19.0	18.10	-0.02	10 mm	01946	6	back	96.9	0.768	0.332	1.230	1.032	0.421	
5785	157	802.11a	OFDM	20	19.0	18.10	-0.03	10 mm	01946	6	front	96.9	0.515	-	1.230	1.032	-	
5785	157	802.11a	OFDM	20	19.0	18.10	0.04	10 mm	01946	6	top	96.9	0.320	-	1.230	1.032	-	
5745	149	802.11a	OFDM	20	19.0	18.09	0.02	10 mm	01946	6	right	96.9	1.219	0.524	1.233	1.032	0.667	
5785	157	802.11a	OFDM	20	19.0	18.10	0.02	10 mm	01946	6	right	96.9	1.489	0.632	1.230	1.032	0.802	A52
5825	165	802.11a	OFDM	20	19.0	18.06	0.02	10 mm	01946	6	right	96.9	1.064	0.471	1.242	1.032	0.604	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body										
Spatial Peak								1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population								averaged over 1 gram										

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b>
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		<b>Quality Manager</b>
				Page 85 of 116

**Table 11-34  
DSS Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2480	78	Bluetooth	FHSS	8.5	7.85	0.03	10 mm	01953	1	back	76.9	0.024	1.161	1.300	0.036	
2480	78	Bluetooth	FHSS	8.5	7.85	0.03	10 mm	01953	1	front	76.9	0.015	1.161	1.300	0.023	
2480	78	Bluetooth	FHSS	8.5	7.85	0.06	10 mm	01953	1	top	76.9	0.006	1.161	1.300	0.009	
2480	78	Bluetooth	FHSS	8.5	7.85	-0.07	10 mm	01953	1	right	76.9	0.040	1.161	1.300	0.060	A54
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram									



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 86 of 116	

## 11.4 Standalone Phablet SAR Data

**Table 11-35**  
**UMTS/CDMA Phablet SAR Data**

MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1712.40	1312	UMTS 1750	RMC	24.7	24.64	-0.01	1 mm	01854	1:1	back	2.110	1.014	2.140	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	0.00	1 mm	01854	1:1	back	2.130	1.000	2.130	
1752.60	1513	UMTS 1750	RMC	24.7	24.65	0.01	1 mm	01854	1:1	back	2.120	1.012	2.145	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	0.02	2 mm	01854	1:1	front	1.310	1.000	1.310	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	-0.01	5 mm	01854	1:1	bottom	1.590	1.000	1.590	
1732.40	1412	UMTS 1750	RMC	24.7	24.70	0.06	0 mm	01854	1:1	right	0.525	1.000	0.525	
1712.40	1312	UMTS 1750	RMC	23.2	23.19	-0.03	0 mm	01854	1:1	back	2.300	1.002	2.305	
1732.40	1412	UMTS 1750	RMC	23.2	23.12	0.01	0 mm	01854	1:1	back	2.120	1.019	2.160	
1752.60	1513	UMTS 1750	RMC	23.2	23.20	0.00	0 mm	01854	1:1	back	2.290	1.000	2.290	
1732.40	1412	UMTS 1750	RMC	23.2	23.12	0.08	0 mm	01854	1:1	front	1.880	1.019	1.916	
1712.40	1312	UMTS 1750	RMC	23.2	23.19	-0.04	0 mm	01854	1:1	bottom	2.690	1.002	2.695	A55
1732.40	1412	UMTS 1750	RMC	23.2	23.12	-0.03	0 mm	01854	1:1	bottom	2.600	1.019	2.649	
1752.60	1513	UMTS 1750	RMC	23.2	23.20	-0.03	0 mm	01854	1:1	bottom	2.560	1.000	2.560	
1712.40	1312	UMTS 1750	RMC	23.2	23.19	-0.04	0 mm	01854	1:1	bottom	2.630	1.002	2.635	
1852.40	9262	UMTS 1900	RMC	24.7	24.67	-0.03	1 mm	01847	1:1	back	2.240	1.007	2.256	
1880.00	9400	UMTS 1900	RMC	24.7	24.68	-0.03	1 mm	01847	1:1	back	2.090	1.005	2.100	
1907.60	9538	UMTS 1900	RMC	24.7	24.70	0.01	1 mm	01847	1:1	back	1.990	1.000	1.990	
1880.00	9400	UMTS 1900	RMC	24.7	24.68	-0.02	2 mm	01847	1:1	front	1.320	1.005	1.327	
1880.00	9400	UMTS 1900	RMC	24.7	24.68	-0.06	5 mm	01847	1:1	bottom	1.260	1.005	1.266	
1880.00	9400	UMTS 1900	RMC	24.7	24.68	-0.06	0 mm	01847	1:1	right	0.531	1.005	0.534	
1852.40	9262	UMTS 1900	RMC	23.2	23.20	-0.05	0 mm	01821	1:1	back	2.170	1.000	2.170	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.05	0 mm	01821	1:1	back	2.020	1.023	2.066	
1907.60	9538	UMTS 1900	RMC	23.2	23.09	-0.06	0 mm	01821	1:1	back	1.990	1.026	2.042	
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.05	0 mm	01821	1:1	front	1.670	1.023	1.708	
1852.40	9262	UMTS 1900	RMC	23.2	23.20	-0.03	0 mm	01821	1:1	bottom	2.360	1.000	2.360	A56
1880.00	9400	UMTS 1900	RMC	23.2	23.10	-0.04	0 mm	01821	1:1	bottom	2.220	1.023	2.271	
1907.60	9538	UMTS 1900	RMC	23.2	23.09	-0.04	0 mm	01821	1:1	bottom	2.200	1.026	2.257	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.7	24.24	0.14	1 mm	01847	1:1	back	1.320	1.112	1.468	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.7	24.24	-0.03	2 mm	01847	1:1	front	1.120	1.112	1.245	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.7	24.24	-0.12	5 mm	01847	1:1	bottom	0.988	1.112	1.099	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.7	24.24	0.06	0 mm	01847	1:1	right	0.394	1.112	0.438	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.2	22.77	-0.10	0 mm	01847	1:1	back	1.450	1.104	1.601	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.2	22.77	0.10	0 mm	01847	1:1	front	1.300	1.104	1.435	
1851.25	25	PCS CDMA	EVDO Rev. 0	23.2	22.46	-0.20	0 mm	01847	1:1	bottom	1.830	1.186	2.170	
1880.00	600	PCS CDMA	EVDO Rev. 0	23.2	22.17	-0.16	0 mm	01847	1:1	bottom	1.760	1.268	2.232	
1908.75	1175	PCS CDMA	EVDO Rev. 0	23.2	22.77	-0.04	0 mm	01847	1:1	bottom	1.840	1.104	2.031	A57
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							



Note: Blue entry represent variability measurement.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 87 of 116	



**Table 11-36**  
**LTE Band 66 (AWS) Phablet SAR**



MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	-0.07	0	01847	QPSK	1	50	1 mm	back	1:1	1.980	1.000	1.980	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	-0.06	1	01847	QPSK	50	25	1 mm	back	1:1	1.600	1.000	1.600	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	-0.01	0	01847	QPSK	1	50	2 mm	front	1:1	1.510	1.000	1.510	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	-0.03	1	01847	QPSK	50	25	2 mm	front	1:1	1.180	1.000	1.180	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	-0.06	0	01847	QPSK	1	50	5 mm	bottom	1:1	1.430	1.000	1.430	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	-0.03	1	01847	QPSK	50	25	5 mm	bottom	1:1	1.100	1.000	1.100	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.7	24.70	-0.05	0	01847	QPSK	1	50	0 mm	right	1:1	0.523	1.000	0.523	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.7	23.70	0.01	1	01847	QPSK	50	25	0 mm	right	1:1	0.425	1.000	0.425	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.19	-0.03	0	01847	QPSK	1	50	0 mm	back	1:1	1.900	1.002	1.904	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.18	0.04	0	01847	QPSK	50	25	0 mm	back	1:1	1.880	1.005	1.889	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.19	0.07	0	01847	QPSK	1	50	0 mm	front	1:1	1.800	1.002	1.804	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.18	0.04	0	01847	QPSK	50	25	0 mm	front	1:1	1.790	1.005	1.799	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.2	23.02	-0.05	0	01847	QPSK	1	50	0 mm	bottom	1:1	2.590	1.042	2.699	A58
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.19	-0.01	0	01847	QPSK	1	50	0 mm	bottom	1:1	2.500	1.002	2.505	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	23.03	-0.04	0	01847	QPSK	1	0	0 mm	bottom	1:1	2.400	1.040	2.496	
1720.00	132072	Low	LTE Band 66 (AWS)	20	23.2	23.16	-0.07	0	01847	QPSK	50	25	0 mm	bottom	1:1	2.570	1.009	2.593	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.18	-0.08	0	01847	QPSK	50	25	0 mm	bottom	1:1	2.460	1.005	2.472	
1770.00	132572	High	LTE Band 66 (AWS)	20	23.2	23.12	-0.06	0	01847	QPSK	50	0	0 mm	bottom	1:1	2.480	1.019	2.527	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	23.2	23.17	-0.05	0	01847	QPSK	100	0	0 mm	bottom	1:1	2.520	1.007	2.538	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 88 of 116	

**Table 11-37**  
**LTE Band 25 (PCS) Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.7	24.61	-0.10	0	01821	QPSK	1	50	1 mm	back	1:1	2.300	1.021	2.348	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.7	24.68	-0.02	0	01821	QPSK	1	50	1 mm	back	1:1	2.190	1.005	2.201	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	-0.03	0	01821	QPSK	1	0	1 mm	back	1:1	2.180	1.000	2.180	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	-0.02	1	01821	QPSK	50	25	1 mm	back	1:1	1.740	1.000	1.740	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.7	23.67	-0.01	1	01821	QPSK	100	0	1 mm	back	1:1	1.740	1.007	1.752	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	0.01	0	01821	QPSK	1	0	2 mm	front	1:1	1.250	1.000	1.250	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	-0.03	1	01821	QPSK	50	25	2 mm	front	1:1	1.010	1.000	1.010	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	-0.05	0	01821	QPSK	1	0	5 mm	bottom	1:1	1.190	1.000	1.190	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	-0.02	1	01821	QPSK	50	25	5 mm	bottom	1:1	0.952	1.000	0.952	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.7	24.70	-0.08	0	01821	QPSK	1	0	0 mm	right	1:1	0.479	1.000	0.479	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.7	23.70	-0.02	1	01821	QPSK	50	25	0 mm	right	1:1	0.402	1.000	0.402	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.2	22.99	-0.06	0	01821	QPSK	1	50	0 mm	back	1:1	2.190	1.050	2.300	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.16	-0.03	0	01821	QPSK	1	50	0 mm	back	1:1	2.110	1.009	2.129	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.2	23.08	-0.05	0	01821	QPSK	1	50	0 mm	back	1:1	2.060	1.028	2.118	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.2	23.09	-0.05	0	01821	QPSK	50	25	0 mm	back	1:1	2.140	1.026	2.196	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.10	-0.02	0	01821	QPSK	50	25	0 mm	back	1:1	2.060	1.023	2.107	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.2	23.07	-0.04	0	01821	QPSK	50	0	0 mm	back	1:1	2.050	1.030	2.112	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.05	-0.05	0	01821	QPSK	100	0	0 mm	back	1:1	1.970	1.035	2.039	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.16	-0.02	0	01821	QPSK	1	50	0 mm	front	1:1	1.780	1.009	1.796	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.10	-0.02	0	01821	QPSK	50	25	0 mm	front	1:1	1.740	1.023	1.780	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.2	22.99	0.01	0	01821	QPSK	1	50	0 mm	bottom	1:1	2.370	1.050	2.489	A59
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.16	0.03	0	01821	QPSK	1	50	0 mm	bottom	1:1	2.270	1.009	2.290	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.2	23.08	0.02	0	01821	QPSK	1	50	0 mm	bottom	1:1	2.210	1.028	2.272	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.2	23.09	-0.02	0	01821	QPSK	50	25	0 mm	bottom	1:1	2.290	1.026	2.350	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.10	-0.06	0	01821	QPSK	50	25	0 mm	bottom	1:1	2.190	1.023	2.240	
1905.00	26590	High	LTE Band 25 (PCS)	20	23.2	23.07	-0.01	0	01821	QPSK	50	0	0 mm	bottom	1:1	2.170	1.030	2.235	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	23.2	23.05	-0.01	0	01821	QPSK	100	0	0 mm	bottom	1:1	2.120	1.035	2.194	
1860.00	26140	Low	LTE Band 25 (PCS)	20	23.2	22.99	0.01	0	01821	QPSK	1	50	0 mm	bottom	1:1	2.370	1.050	2.489	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams											



Note: Blue entry represent variability measurement.

FCC ID ZNFQ730VM	<div><b>PCTEST</b> <small>Proud to be part of element</small></div> <div>SAR EVALUATION REPORT</div>		<div></div>	Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 89 of 116

**Table 11-38**  
**LTE Band 41 Phablet SAR**

MEASUREMENT RESULTS																				
Power Class	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
	MHz	Ch.																		
Power Class 3	2506.00	39750	Low	LTE Band 41	20	25.2	25.10	-0.14	0	01839	QPSK	1	50	1 mm	back	1:1.58	2.370	1.023	2.425	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.19	-0.04	0	01839	QPSK	1	50	1 mm	back	1:1.58	2.280	1.002	2.285	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	-0.07	0	01839	QPSK	1	50	1 mm	back	1:1.58	2.460	1.000	2.460	
Power Class 3	2636.50	41055	Mid-High	LTE Band 41	20	25.2	25.14	-0.07	0	01839	QPSK	1	50	1 mm	back	1:1.58	2.330	1.014	2.363	
Power Class 3	2680.00	41490	High	LTE Band 41	20	25.2	24.97	-0.09	0	01839	QPSK	1	50	1 mm	back	1:1.58	2.140	1.054	2.256	
Power Class 3	2506.00	39750	Low	LTE Band 41	20	24.2	24.07	-0.15	1	01839	QPSK	50	25	1 mm	back	1:1.58	1.870	1.030	1.926	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	24.2	24.13	-0.03	1	01839	QPSK	50	25	1 mm	back	1:1.58	1.960	1.016	1.991	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	0.06	1	01839	QPSK	50	25	1 mm	back	1:1.58	1.960	1.002	1.964	
Power Class 3	2636.50	41055	Mid-High	LTE Band 41	20	24.2	24.05	-0.07	1	01839	QPSK	50	25	1 mm	back	1:1.58	1.840	1.035	1.904	
Power Class 3	2680.00	41490	High	LTE Band 41	20	24.2	23.92	-0.08	1	01839	QPSK	50	25	1 mm	back	1:1.58	1.660	1.067	1.771	
Power Class 3	2636.50	41055	Mid-High	LTE Band 41	20	24.2	24.02	-0.08	1	01839	QPSK	100	0	1 mm	back	1:1.58	1.820	1.042	1.896	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	-0.01	0	01839	QPSK	1	50	2 mm	front	1:1.58	0.747	1.000	0.747	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	-0.02	1	01839	QPSK	50	25	2 mm	front	1:1.58	0.581	1.002	0.582	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	-0.01	0	01839	QPSK	1	50	5 mm	bottom	1:1.58	0.521	1.000	0.521	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	-0.02	1	01839	QPSK	50	25	5 mm	bottom	1:1.58	0.410	1.002	0.411	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	-0.16	0	01839	QPSK	1	50	0 mm	right	1:1.58	0.222	1.000	0.222	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	24.2	24.19	0.07	1	01839	QPSK	50	25	0 mm	right	1:1.58	0.190	1.002	0.190	
Power Class 3	2506.00	39750	Low	LTE Band 41	20	23.7	23.38	0.05	0	01839	QPSK	1	50	0 mm	back	1:1.58	2.020	1.076	2.174	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.63	-0.04	0	01839	QPSK	1	50	0 mm	back	1:1.58	2.040	1.016	2.073	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.66	-0.01	0	01839	QPSK	1	50	0 mm	back	1:1.58	1.980	1.009	1.998	
Power Class 3	2636.50	41055	Mid-High	LTE Band 41	20	23.7	23.54	-0.05	0	01839	QPSK	1	50	0 mm	back	1:1.58	1.790	1.038	1.858	
Power Class 3	2680.00	41490	High	LTE Band 41	20	23.7	23.36	0.20	0	01839	QPSK	1	50	0 mm	back	1:1.58	1.600	1.081	1.730	
Power Class 3	2506.00	39750	Low	LTE Band 41	20	23.7	23.35	0.03	0	01839	QPSK	50	25	0 mm	back	1:1.58	2.030	1.084	2.201	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.57	-0.01	0	01839	QPSK	50	25	0 mm	back	1:1.58	2.060	1.030	2.122	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.62	-0.07	0	01839	QPSK	50	25	0 mm	back	1:1.58	1.980	1.019	2.018	
Power Class 3	2636.50	41055	Mid-High	LTE Band 41	20	23.7	23.61	0.18	0	01839	QPSK	50	0	0 mm	back	1:1.58	1.780	1.021	1.817	
Power Class 3	2680.00	41490	High	LTE Band 41	20	23.7	23.30	0.20	0	01839	QPSK	50	25	0 mm	back	1:1.58	1.610	1.096	1.765	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.33	-0.02	0	01839	QPSK	100	0	0 mm	back	1:1.58	1.980	1.089	2.156	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.66	0.02	0	01839	QPSK	1	50	0 mm	front	1:1.58	1.120	1.009	1.130	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.62	0.04	0	01839	QPSK	50	25	0 mm	front	1:1.58	1.120	1.019	1.141	
Power Class 3	2506.00	39750	Low	LTE Band 41	20	23.7	23.38	-0.08	0	01839	QPSK	1	50	0 mm	bottom	1:1.58	1.790	1.076	1.926	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.63	-0.04	0	01839	QPSK	1	50	0 mm	bottom	1:1.58	2.040	1.016	2.073	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.66	-0.02	0	01839	QPSK	1	50	0 mm	bottom	1:1.58	2.200	1.009	2.220	
Power Class 3	2636.50	41055	Mid-High	LTE Band 41	20	23.7	23.54	0.01	0	01839	QPSK	1	50	0 mm	bottom	1:1.58	2.190	1.038	2.273	
Power Class 3	2680.00	41490	High	LTE Band 41	20	23.7	23.36	0.04	0	01839	QPSK	1	50	0 mm	bottom	1:1.58	2.060	1.081	2.227	
Power Class 3	2506.00	39750	Low	LTE Band 41	20	23.7	23.35	-0.06	0	01839	QPSK	50	25	0 mm	bottom	1:1.58	1.810	1.084	1.962	
Power Class 3	2549.50	40185	Low-Mid	LTE Band 41	20	23.7	23.57	0.01	0	01839	QPSK	50	25	0 mm	bottom	1:1.58	2.100	1.030	2.163	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.62	-0.06	0	01839	QPSK	50	25	0 mm	bottom	1:1.58	2.230	1.019	2.272	
Power Class 3	2636.50	41055	Mid-High	LTE Band 41	20	23.7	23.61	0.03	0	01839	QPSK	50	0	0 mm	bottom	1:1.58	2.200	1.021	2.246	
Power Class 3	2680.00	41490	High	LTE Band 41	20	23.7	23.30	0.02	0	01839	QPSK	50	25	0 mm	bottom	1:1.58	2.070	1.096	2.269	
Power Class 3	2593.00	40620	Mid	LTE Band 41	20	23.7	23.33	0.02	0	01839	QPSK	100	0	0 mm	bottom	1:1.58	2.260	1.089	2.461	
Power Class 2	2593.00	40620	Mid	LTE Band 41	20	25.7	25.45	-0.03	0	01839	QPSK	100	0	0 mm	bottom	1:2.31	2.480	1.059	2.626	A60
Power Class 2	2593.00	40620	Mid	LTE Band 41	20	25.7	25.45	-0.03	0	01839	QPSK	100	0	0 mm	bottom	1:2.31	2.480	1.059	2.626	
Power Class 3	2506.00	39750	Low	LTE Band 41	20	25.2	25.10	-0.12	0	01839	QPSK	1	50	1 mm	back	1:1.58	2.240	1.023	2.292	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

Note: Blue entries represent variability measurements.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 90 of 116	



**Table 11-39**  
**WLAN Phablet SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.												W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	19.0	18.50	0.10	0 mm	01946	6	back	96.9	23.857	1.350	1.122	1.032	1.563	
5280	56	802.11a	OFDM	20	19.0	18.50	-0.06	0 mm	01946	6	front	96.9	5.392	-	1.122	1.032	-	
5280	56	802.11a	OFDM	20	19.0	18.50	0.20	0 mm	01946	6	top	96.9	2.790	-	1.122	1.032	-	
5280	56	802.11a	OFDM	20	19.0	18.50	0.10	0 mm	01946	6	right	96.9	13.572	1.250	1.122	1.032	1.447	
5500	100	802.11a	OFDM	20	19.0	18.26	0.08	0 mm	01946	6	back	96.9	22.428	1.480	1.186	1.032	1.811	
5500	100	802.11a	OFDM	20	19.0	18.26	-0.09	0 mm	01946	6	front	96.9	10.562	-	1.186	1.032	-	
5500	100	802.11a	OFDM	20	19.0	18.26	0.10	0 mm	01946	6	top	96.9	6.067	-	1.186	1.032	-	
5500	100	802.11a	OFDM	20	19.0	18.26	0.10	0 mm	01946	6	right	96.9	19.235	1.520	1.186	1.032	1.860	A61
5600	120	802.11a	OFDM	20	19.0	18.07	0.10	0 mm	01946	6	right	96.9	16.812	1.350	1.239	1.032	1.726	
5720	144	802.11a	OFDM	20	19.0	18.01	0.10	0 mm	01946	6	right	96.9	14.183	1.120	1.256	1.032	1.452	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

## 11.5 SAR Test Notes

### General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. See Section 13 for variability analysis.
- During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
- Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is  $> 160$  mm and  $< 200$  mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $> 1.2$  W/kg.
- Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the 1g thresholds for the equivalent test cases.
- This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 91 of 116	

13. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).
14. The orange highlights throughout the report represents the highest SAR per Equipment Class.

#### GSM Test Notes:




1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
4. GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

#### CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.
2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### UMTS Notes:

1. UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.




FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 92 of 116	

#### LTE Notes:

1. LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 14 for linearity results.



#### WLAN Notes:

1. For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
4. When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 93 of 116	

## Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time domain plot and calculation for the duty factor of the device.
2. Head and Hotspot Bluetooth SAR were evaluated for BT BR tethering applications.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 94 of 116	



## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.



### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

### 12.3 Head SAR Simultaneous Transmission Analysis

**Table 12-1**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.285	0.999	<b>1.284</b>
	GSM/GPRS 1900	0.067	0.999	1.066
	UMTS 850	0.202	0.999	1.201
	UMTS 1750	0.102	0.999	1.101
	UMTS 1900	0.125	0.999	1.124
	CDMA/EVDO BC0 (§22H)	0.227	0.999	1.226
	CDMA/EVDO BC10 (§90S)	0.252	0.999	1.251
	PCS CDMA/EVDO	0.156	0.999	1.155
	LTE Band 71	0.148	0.999	1.147
	LTE Band 12	0.177	0.999	1.176
	LTE Band 13	0.146	0.999	1.145
	LTE Band 26 (Cell)	0.168	0.999	1.167
	LTE Band 66 (AWS)	0.129	0.999	1.128
	LTE Band 25 (PCS)	0.133	0.999	1.132
	LTE Band 41	0.128	0.999	1.127

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 95 of 116





**Table 12-2**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.285	0.907	<b>1.192</b>
	GSM/GPRS 1900	0.067	0.907	0.974
	UMTS 850	0.202	0.907	1.109
	UMTS 1750	0.102	0.907	1.009
	UMTS 1900	0.125	0.907	1.032
	CDMA/EVDO BC0 (§22H)	0.227	0.907	1.134
	CDMA/EVDO BC10 (§90S)	0.252	0.907	1.159
	PCS CDMA/EVDO	0.156	0.907	1.063
	LTE Band 71	0.148	0.907	1.055
	LTE Band 12	0.177	0.907	1.084
	LTE Band 13	0.146	0.907	1.053
	LTE Band 26 (Cell)	0.168	0.907	1.075
	LTE Band 66 (AWS)	0.129	0.907	1.036
	LTE Band 25 (PCS)	0.133	0.907	1.040
	LTE Band 41	0.128	0.907	1.035

**Table 12-3**  
**Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	GSM/GPRS 850	0.285	0.100	<b>0.385</b>
	GSM/GPRS 1900	0.067	0.100	0.167
	UMTS 850	0.202	0.100	0.302
	UMTS 1750	0.102	0.100	0.202
	UMTS 1900	0.125	0.100	0.225
	CDMA/EVDO BC0 (§22H)	0.227	0.100	0.327
	CDMA/EVDO BC10 (§90S)	0.252	0.100	0.352
	PCS CDMA/EVDO	0.156	0.100	0.256
	LTE Band 71	0.148	0.100	0.248
	LTE Band 12	0.177	0.100	0.277
	LTE Band 13	0.146	0.100	0.246
	LTE Band 26 (Cell)	0.168	0.100	0.268
	LTE Band 66 (AWS)	0.129	0.100	0.229
	LTE Band 25 (PCS)	0.133	0.100	0.233
	LTE Band 41	0.128	0.100	0.228

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 96 of 116	



**Table 12-4**  
**Simultaneous Transmission Scenario with 5GHz WLAN and Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	GSM/GPRS 850	0.285	0.907	0.100	<b>1.292</b>
	GSM/GPRS 1900	0.067	0.907	0.100	1.074
	UMTS 850	0.202	0.907	0.100	1.209
	UMTS 1750	0.102	0.907	0.100	1.109
	UMTS 1900	0.125	0.907	0.100	1.132
	CDMA/EVDO BC0 (§22H)	0.227	0.907	0.100	1.234
	CDMA/EVDO BC10 (§90S)	0.252	0.907	0.100	1.259
	PCS CDMA/EVDO	0.156	0.907	0.100	1.163
	LTE Band 71	0.148	0.907	0.100	1.155
	LTE Band 12	0.177	0.907	0.100	1.184
	LTE Band 13	0.146	0.907	0.100	1.153
	LTE Band 26 (Cell)	0.168	0.907	0.100	1.175
	LTE Band 66 (AWS)	0.129	0.907	0.100	1.136
	LTE Band 25 (PCS)	0.133	0.907	0.100	1.140
	LTE Band 41	0.128	0.907	0.100	1.135

## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-5**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.604	0.484	1.088
	GSM/GPRS 1900	0.362	0.484	0.846
	UMTS 850	0.408	0.484	0.892
	UMTS 1750	0.670	0.484	1.154
	UMTS 1900	0.627	0.484	1.111
	CDMA BC0 (§22H)	0.467	0.484	0.951
	CDMA BC10 (§90S)	0.444	0.484	0.928
	PCS CDMA	0.709	0.484	1.193
	LTE Band 71	0.267	0.484	0.751
	LTE Band 12	0.281	0.484	0.765
	LTE Band 13	0.273	0.484	0.757
	LTE Band 26 (Cell)	0.382	0.484	0.866
	LTE Band 66 (AWS)	0.756	0.484	<b>1.240</b>
	LTE Band 25 (PCS)	0.558	0.484	1.042
	LTE Band 41	0.531	0.484	1.015



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 97 of 116	

**Table 12-6**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.604	0.547	1.151
	GSM/GPRS 1900	0.362	0.547	0.909
	UMTS 850	0.408	0.547	0.955
	UMTS 1750	0.670	0.547	1.217
	UMTS 1900	0.627	0.547	1.174
	CDMA BC0 (§22H)	0.467	0.547	1.014
	CDMA BC10 (§90S)	0.444	0.547	0.991
	PCS CDMA	0.709	0.547	1.256
	LTE Band 71	0.267	0.547	0.814
	LTE Band 12	0.281	0.547	0.828
	LTE Band 13	0.273	0.547	0.820
	LTE Band 26 (Cell)	0.382	0.547	0.929
	LTE Band 66 (AWS)	0.756	0.547	<b>1.303</b>
	LTE Band 25 (PCS)	0.558	0.547	1.105
	LTE Band 41	0.531	0.547	1.078



**Table 12-7**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	GSM/GPRS 850	0.604	0.036	0.640
	GSM/GPRS 1900	0.362	0.036	0.398
	UMTS 850	0.408	0.036	0.444
	UMTS 1750	0.670	0.036	0.706
	UMTS 1900	0.627	0.036	0.663
	CDMA BC0 (§22H)	0.467	0.036	0.503
	CDMA BC10 (§90S)	0.444	0.036	0.480
	PCS CDMA	0.709	0.036	0.745
	LTE Band 71	0.267	0.036	0.303
	LTE Band 12	0.281	0.036	0.317
	LTE Band 13	0.273	0.036	0.309
	LTE Band 26 (Cell)	0.382	0.036	0.418
	LTE Band 66 (AWS)	0.756	0.036	<b>0.792</b>
	LTE Band 25 (PCS)	0.558	0.036	0.594
	LTE Band 41	0.531	0.036	0.567

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 98 of 116	

**Table 12-8**  
**Simultaneous Transmission Scenario with 5GHz WLAN and Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	GSM/GPRS 850	0.604	0.547	0.036	1.187
	GSM/GPRS 1900	0.362	0.547	0.036	0.945
	UMTS 850	0.408	0.547	0.036	0.991
	UMTS 1750	0.670	0.547	0.036	1.253
	UMTS 1900	0.627	0.547	0.036	1.210
	CDMA BC0 (§22H)	0.467	0.547	0.036	1.050
	CDMA BC10 (§90S)	0.444	0.547	0.036	1.027
	PCS CDMA	0.709	0.547	0.036	1.292
	LTE Band 71	0.267	0.547	0.036	0.850
	LTE Band 12	0.281	0.547	0.036	0.864
	LTE Band 13	0.273	0.547	0.036	0.856
	LTE Band 26 (Cell)	0.382	0.547	0.036	0.965
	LTE Band 66 (AWS)	0.756	0.547	0.036	<b>1.339</b>
	LTE Band 25 (PCS)	0.558	0.547	0.036	1.141
	LTE Band 41	0.531	0.547	0.036	1.114

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 99 of 116	

## 12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

**Table 12-9**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.638	0.781	1.419
	GPRS 1900	0.546	0.781	1.327
	UMTS 850	0.438	0.781	1.219
	UMTS 1750	0.849	0.781	See Table Below
	UMTS 1900	0.708	0.781	1.489
	EVDO BC0 (§22H)	0.347	0.781	1.128
	EVDO BC10 (§90S)	0.376	0.781	1.157
	PCS EVDO	0.744	0.781	1.525
	LTE Band 71	0.516	0.781	1.297
	LTE Band 12	0.374	0.781	1.155
	LTE Band 13	0.324	0.781	1.105
	LTE Band 26 (Cell)	0.418	0.781	1.199
	LTE Band 66 (AWS)	0.965	0.781	See Table Below
	LTE Band 25 (PCS)	0.783	0.781	<b>1.564</b>
	LTE Band 41	0.401	0.781	1.182

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.524	0.484	1.008
	Front	0.438	0.781*	<b>1.219</b>
	Top	-	0.781*	0.781
	Bottom	0.849	-	0.849
	Right	0.133	0.781	0.914

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	Back	0.516	0.484	1.000
	Front	0.447	0.781*	<b>1.228</b>
	Top	-	0.781*	0.781
	Bottom	0.965	-	0.965
	Right	0.136	0.781	0.917



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 100 of 116	

**Table 12-10**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.638	0.802	1.440
	GPRS 1900	0.546	0.802	1.348
	UMTS 850	0.438	0.802	1.240
	UMTS 1750	0.849	0.802	See Table Below
	UMTS 1900	0.708	0.802	1.510
	EVDO BC0 (\$22H)	0.347	0.802	1.149
	EVDO BC10 (\$90S)	0.376	0.802	1.178
	PCS EVDO	0.744	0.802	1.546
	LTE Band 71	0.516	0.802	1.318
	LTE Band 12	0.374	0.802	1.176
	LTE Band 13	0.324	0.802	1.126
	LTE Band 26 (Cell)	0.418	0.802	1.220
	LTE Band 66 (AWS)	0.965	0.802	See Table Below
	LTE Band 25 (PCS)	0.783	0.802	<b>1.585</b>
	LTE Band 41	0.401	0.802	1.203

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.524	0.421	0.945	Hotspot SAR	Back	0.516	0.421	0.937
	Front	0.438	0.802*	<b>1.240</b>		Front	0.447	0.802*	<b>1.249</b>
	Top	-	0.802*	0.802		Top	-	0.802*	0.802
	Bottom	0.849	-	0.849		Bottom	0.965	-	0.965
	Right	0.133	0.802	0.935		Right	0.136	0.802	0.938



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b>
				Quality Manager
<b>Document S/N:</b>	<b>Test Dates:</b>	<b>DUT Type:</b>		
1M2003310054-01-R1.ZNF	04/12/20 - 05/06/20	Portable Handset	Page 101 of 116	

**Table 12-11**  
**Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	GPRS 850	0.638	0.060	0.698
	GPRS 1900	0.546	0.060	0.606
	UMTS 850	0.438	0.060	0.498
	UMTS 1750	0.849	0.060	0.909
	UMTS 1900	0.708	0.060	0.768
	EVDO BC0 (\$22H)	0.347	0.060	0.407
	EVDO BC10 (\$90S)	0.376	0.060	0.436
	PCS EVDO	0.744	0.060	0.804
	LTE Band 71	0.516	0.060	0.576
	LTE Band 12	0.374	0.060	0.434
	LTE Band 13	0.324	0.060	0.384
	LTE Band 26 (Cell)	0.418	0.060	0.478
	LTE Band 66 (AWS)	0.965	0.060	<b>1.025</b>
	LTE Band 25 (PCS)	0.783	0.060	0.843
	LTE Band 41	0.401	0.060	0.461

**Table 12-12**  
**Simultaneous Transmission Scenario with 5GHz WLAN and Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	GPRS 850	0.638	0.802	0.060	1.500
	GPRS 1900	0.546	0.802	0.060	1.408
	UMTS 850	0.438	0.802	0.060	1.300
	UMTS 1750	0.849	0.802	0.060	See Table Below
	UMTS 1900	0.708	0.802	0.060	<b>1.570</b>
	EVDO BC0 (\$22H)	0.347	0.802	0.060	1.209
	EVDO BC10 (\$90S)	0.376	0.802	0.060	1.238
	PCS EVDO	0.744	0.802	0.060	See Table Below
	LTE Band 71	0.516	0.802	0.060	1.378
	LTE Band 12	0.374	0.802	0.060	1.236
	LTE Band 13	0.324	0.802	0.060	1.186
	LTE Band 26 (Cell)	0.418	0.802	0.060	1.280
	LTE Band 66 (AWS)	0.965	0.802	0.060	See Table Below
	LTE Band 25 (PCS)	0.783	0.802	0.060	See Table Below
	LTE Band 41	0.401	0.802	0.060	1.263

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 102 of 116	

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.524	0.421	0.036	0.981
	Front	0.438	0.802*	0.023	<b>1.263</b>
	Top	-	0.802*	0.009	0.811
	Bottom	0.849	-	-	0.849
	Right	0.133	0.802	0.060	0.995

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.336	0.421	0.036	0.793
	Front	0.331	0.802*	0.023	<b>1.156</b>
	Top	-	0.802*	0.009	0.811
	Bottom	0.744	-	-	0.744
	Right	0.114	0.802	0.060	0.976

Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.516	0.421	0.036	0.973
	Front	0.447	0.802*	0.023	<b>1.272</b>
	Top	-	0.802*	0.009	0.811
	Bottom	0.965	-	-	0.965
	Right	0.136	0.802	0.060	0.998

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.387	0.421	0.036	0.844
	Front	0.378	0.802*	0.023	<b>1.203</b>
	Top	-	0.802*	0.009	0.811
	Bottom	0.783	-	-	0.783
	Right	0.140	0.802	0.060	1.002




## 12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for the applicable exposure conditions was used for simultaneous transmission analysis.

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore, no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

For SAR summation, the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 103 of 116



**Table 12-13**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)**

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Phablet SAR	Back	2.305	1.811	See Note 1	0.06
	Front	1.916	1.860*	<b>3.776</b>	N/A
	Top	-	1.860*	1.860	N/A
	Bottom	2.695	-	2.695	N/A
	Right	0.525	1.860	2.385	N/A
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Phablet SAR	Back	2.256	1.811	See Note 1	0.06
	Front	1.708	1.860*	<b>3.568</b>	N/A
	Top	-	1.860*	1.860	N/A
	Bottom	2.360	-	2.360	N/A
	Right	0.534	1.860	2.394	N/A
Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Phablet SAR	Back	1.601	1.811	<b>3.412</b>	
	Front	1.435	1.860*	3.295	
	Top	-	1.860*	1.860	
	Bottom	2.232	-	2.232	
	Right	0.438	1.860	2.298	
Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	
		1	2	1+2	
Phablet SAR	Back	1.980	1.811	<b>3.791</b>	
	Front	1.804	1.860*	3.664	
	Top	-	1.860*	1.860	
	Bottom	2.699	-	2.699	
	Right	0.523	1.860	2.383	
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Phablet SAR	Back	2.348	1.811	See Note 1	0.06
	Front	1.796	1.860*	<b>3.656</b>	N/A
	Top	-	1.860*	1.860	N/A
	Bottom	2.489	-	2.489	N/A
	Right	0.479	1.860	2.339	N/A
Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Phablet SAR	Back	2.460	1.811	See Note 1	0.06
	Front	1.141	1.860*	<b>3.001</b>	N/A
	Top	-	1.860*	1.860	N/A
	Bottom	2.626	-	2.626	N/A
	Right	0.222	1.860	2.082	N/A



Note 1: No evaluation was performed to determine the aggregate 10g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.10 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

## 12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g and 4 W/kg for 10g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is  $\leq 0.04$  for 1g and  $\leq 0.10$  for 10g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2} \text{ (Phablet)}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 104 of 116	

## 12.7.1

## Phablet SPLSR Evaluation and Analysis


**Table 12-14**  
**Peak SAR Locations for Phablet Back Side**

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz Phablet WLAN	-65.00	60.00	1.811
UMTS 1750	-43.00	-84.00	2.305
UMTS 1900	-42.50	-81.50	2.256
LTE Band 25 (PCS)	-47.50	-82.50	2.348
LTE Band 41	-45.20	-76.80	2.460

**Table 12-15**  
**Phablet Back side SAR to Peak Location Separation Ratio Calculations**

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	$D_{a-b}$	$(a+b)^{1.5}/D_{a-b}$	
5 GHz Phablet WLAN	UMTS 1750	1.811	2.305	4.116	145.67	0.06	1
5 GHz Phablet WLAN	UMTS 1900	1.811	2.256	4.067	143.28	0.06	2
5 GHz Phablet WLAN	LTE Band 25 (PCS)	1.811	2.348	4.159	143.57	0.06	3
5 GHz Phablet WLAN	LTE Band 41	1.811	2.460	4.271	138.23	0.06	4

**Table 12-16**  
**Phablet SAR to Peak Location Separation Ratio Plots**

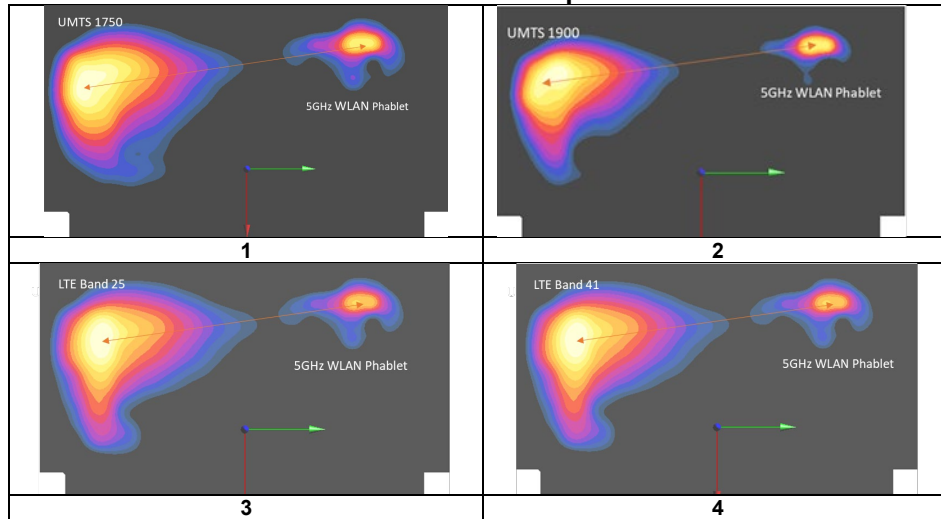

## 12.8 Simultaneous Transmission Conclusion

The above numerical SAR and SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

FCC ID ZNFQ730VM	PCTEST Proud to be part of element	SAR EVALUATION REPORT	LG	Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 105 of 116

## 13 SAR MEASUREMENT VARIABILITY

### 13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:



- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1**  
**Head SAR Measurement Variability Results**

HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2437.00	6	802.11b, 22 MHz Bandwidth	DSSS	Left	Cheek	1	0.939	0.923	1.02	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 13-2**  
**Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)		(W/kg)		(W/kg)	
1750	1770.00	132572	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 50 RB, 0 RB Offset	bottom	10 mm	0.947	0.946	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Body 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of element	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M2003310054-01-R1.ZNF	Test Dates: 04/12/20 - 05/06/20	DUT Type: Portable Handset		Page 106 of 116

**Table 13-3**  
**Phablet SAR Measurement Variability Results**

PHABLET VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1712.40	1312	UMTS 1750	RMC	bottom	0 mm	2.690	2.630	1.02	N/A	N/A	N/A	N/A
1900	1860.00	26140	LTE Band 25 (PCS), 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	bottom	0 mm	2.370	2.370	1.00	N/A	N/A	N/A	N/A
2600	2593.00	40620	LTE Band 41 PC2, 20 MHz Bandwidth	QPSK, 100 RB, 0 RB Offset	bottom	0 mm	2.480	2.480	1.00	N/A	N/A	N/A	N/A
2450	2506.00	39750	LTE Band 41 PC3, 20 MHz Bandwidth	QPSK, 1 RB, 50 RB Offset	back	1 mm	2.370	2.240	1.06	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Phablet							
Spatial Peak						4.0 W/kg (mW/g)							
Uncontrolled Exposure/General Population						averaged over 10 grams							

## 13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g and <3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 107 of 116	


## 14 ADDITIONAL TESTING PER FCC GUIDANCE

### 14.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity




This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes was < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

**Table 14-1**  
**LTE Band 41 Head Linearity Data**

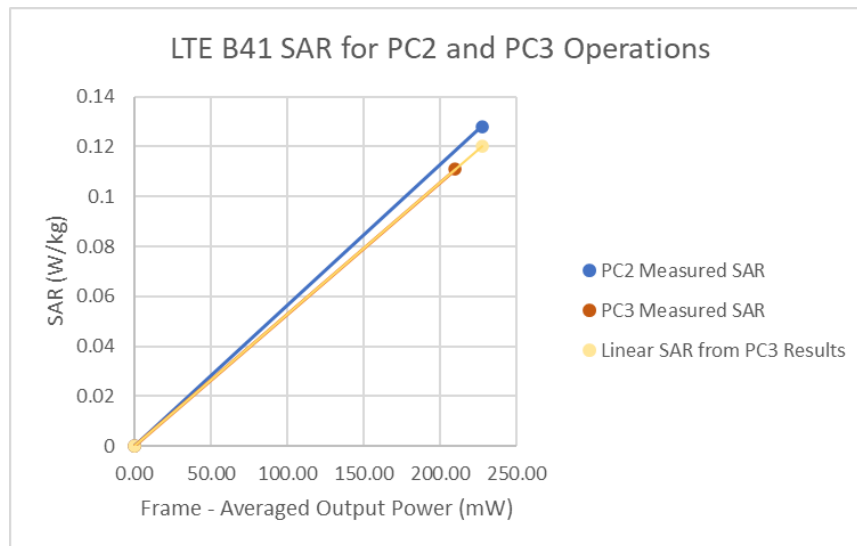	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.20	27.20
Measured Output Power (dBm)	25.20	27.20
Measured SAR (W/kg)	0.111	0.128
Measured Power (mW)	331.13	524.81
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	209.61	227.24
% deviation from expected linearity		6.37%




**Figure 14-1**  
**LTE Band 41 Head Linearity**



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 108 of 116

**Table 14-2**  
**LTE Band 41 Body-Worn Linearity Data**

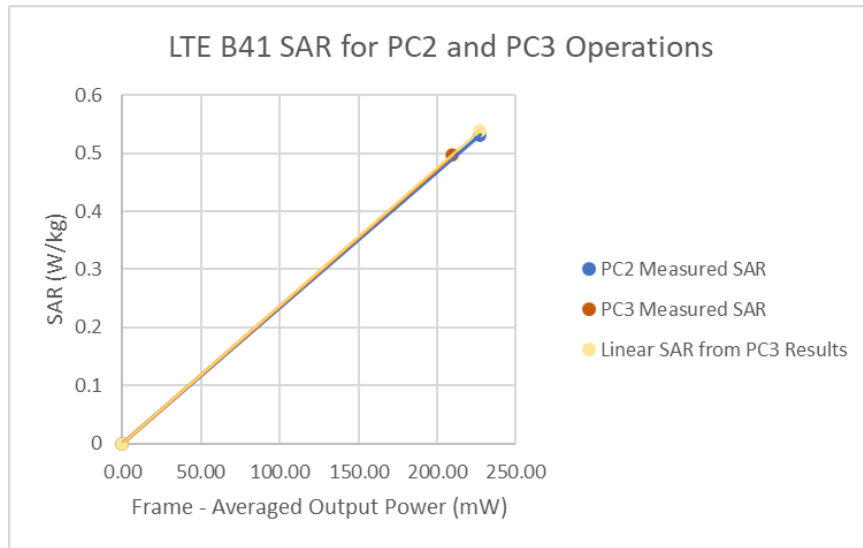	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.20	27.20
Measured Output Power (dBm)	25.20	27.20
Measured SAR (W/kg)	0.497	0.531
Measured Power (mW)	331.13	524.81
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	209.61	227.24
% deviation from expected linearity		-1.45%




**Figure 14-2**  
**LTE Band 41 Body-Worn Linearity**



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 109 of 116	

**Table 14-3**  
**LTE Band 41 Hotspot Linearity Data**

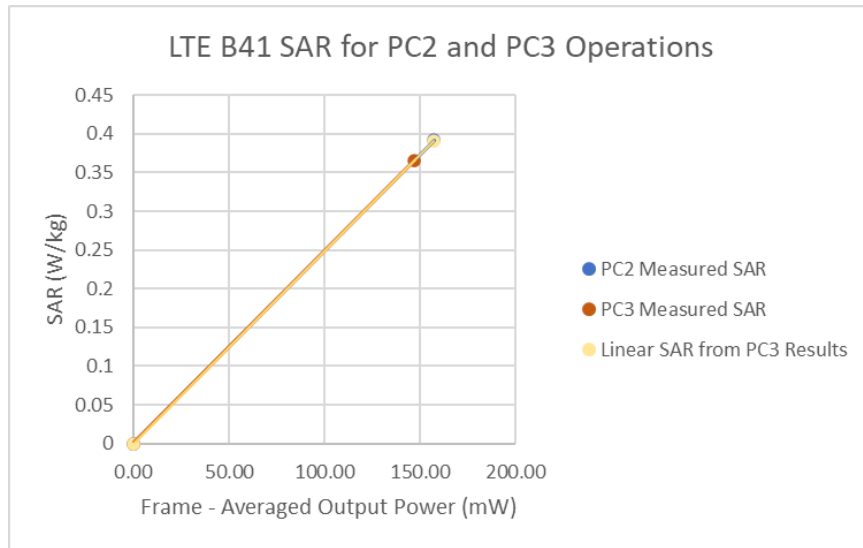	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	23.70	25.70
Measured Output Power (dBm)	23.66	25.60
Measured SAR (W/kg)	0.366	0.392
Measured Power (mW)	232.27	363.08
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	147.03	157.21
% deviation from expected linearity		0.17%




**Figure 14-3**  
**LTE Band 41 Hotspot Linearity**



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 110 of 116	

**Table 14-4**  
**LTE Band 41 Phablet Linearity Data**

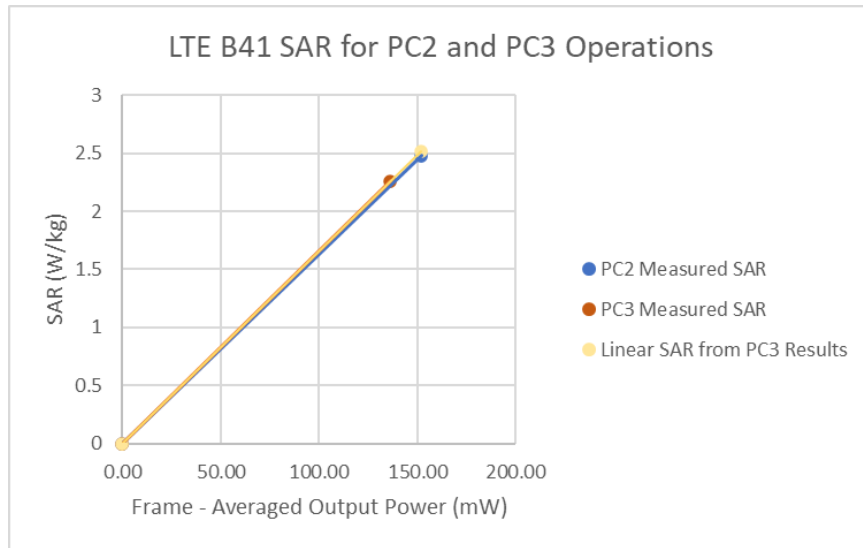	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	23.70	25.70
Measured Output Power (dBm)	23.33	25.45
Measured SAR (W/kg)	2.26	2.48
Measured Power (mW)	215.28	350.75
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	136.27	151.88
% deviation from expected linearity		-1.54%



**Figure 14-4**  
**LTE Band 41 Phablet Linearity**

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 111 of 116	






# 15 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8753ES	S-Parameter Vector Network Analyzer	9/19/2019	Annual	9/19/2020	MY4003841
Agilent	8753ES	S-Parameter Network Analyzer	8/25/2019	Annual	8/25/2020	MY4000670
Agilent	E4438C	ESG Vector Signal Generator	5/22/2019	Annual	5/22/2020	MY45091346
Agilent	E4438C	ESG Vector Signal Generator	5/23/2019	Annual	5/23/2020	MY47270002
Agilent	E4438C	ESG Vector Signal Generator	3/8/2019	Biennial	3/8/2021	MY42082385
Agilent	E4438C	ESG Vector Signal Generator	3/11/2019	Biennial	3/11/2021	MY45090700
Agilent	E5515C	Wireless Communications Test Set	6/26/2019	Annual	6/26/2020	MY50267125
Agilent	E5515C	Wireless Communications Test Set	9/25/2019	Annual	9/25/2020	GB43304278
Agilent	E5515C	Wireless Communications Test Set	2/7/2018	Triennial	2/7/2021	GB43304447
Agilent	N5182A	MXG Vector Signal Generator	7/10/2019	Annual	7/10/2020	MY47420800
Rohde & Schwarz	FS90	Signal Analyzer	9/27/2019	Annual	9/27/2020	103330
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Agilent	E5515C	Wireless Communications Test Set	9/25/2019	Annual	9/25/2020	GB43304278
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433975
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433976
Anritsu	MA24106A	USB Power Sensor	8/27/2019	Annual	8/27/2020	1827533
Anritsu	MA24106A	USB Power Sensor	7/8/2019	Annual	7/8/2020	1248658
Anritsu	MA24106A	USB Power Sensor	8/27/2019	Annual	8/27/2020	1827530
Anritsu	MA24106A	USB Power Sensor	7/15/2019	Annual	7/15/2020	1349513
Anritsu	MA2411B	Pulse Power Sensor	6/11/2019	Annual	6/11/2020	1207364
Anritsu	MA2411B	Pulse Power Sensor	8/8/2019	Annual	8/8/2020	1339008
Anritsu	MT8820C	Radio Communication Analyzer	7/25/2019	Annual	7/25/2020	6201240328
Anritsu	MT8821C	Radio Communication Analyzer	8/16/2019	Annual	8/16/2020	6201144418
Anritsu	MT8821C	Radio Communication Analyzer	11/22/2019	Annual	11/22/2020	6262044715
Anritsu	MT8821C	Radio Communication Analyzer	10/2/2019	Annual	10/2/2020	6201664756
Anritsu	MT8862A	Wireless Connectivity Test Set	8/8/2019	Annual	8/8/2020	6261782395
Anritsu	ML2406A	Power Meter	11/6/2019	Annual	11/6/2020	1485093
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291470
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291455
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291460
Control Company	4040	Therm./Clock/Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291463
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282744
Control Company	4352	Long Stem Thermometer	6/26/2019	Biennial	6/26/2021	192282753
Control Company	4352	Ultra Long Stem Thermometer	11/29/2018	Biennial	11/29/2020	181766801
Control Company	4352	Ultra Long Stem Thermometer	11/29/2018	Biennial	11/29/2020	181766777
Keysight	7720	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
Keysight Technologies	85033E	Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm)	7/2/2019	Annual	7/2/2020	MY52401181
Keysight Technologies	N6705B	DC Power Analyzer	4/27/2019	Biennial	4/27/2021	MY53004059
MCL	BW-N6WS+	6dB Attenuator	CBT	N/A	CBT	1139
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	88979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-3950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Insize	1108-150	Digital Caliper	1/17/2020	Biennial	1/17/2022	409193536
Pasternack	NC-100	Torque Wrench	5/23/2018	Biennial	5/23/2020	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMW500	Radio Communication Tester	8/26/2019	Annual	8/26/2020	100976
Rohde & Schwarz	CMW500	Radio Communication Tester	8/27/2019	Annual	8/27/2020	116743
Rohde & Schwarz	CMW500	Radio Communication Tester	10/4/2019	Annual	10/4/2020	166462
Rohde & Schwarz	ZNL46	Vector Network Analyzer	10/11/2019	Annual	10/11/2020	101307
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/12/2019	Annual	7/12/2020	145645
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/24/2019	Annual	7/24/2020	151849
Rohde & Schwarz	CMU200	Base Station Simulator	6/3/2019	Annual	6/3/2020	109892
SPEAG	DAK-12	Dielectric Assessment Kit (10MHz - 3GHz)	11/12/2019	Annual	11/12/2020	1121
SPEAG	DAK-3.5	Dielectric Assessment Kit	10/22/2019	Annual	10/22/2020	1091
SPEAG	D750V3	750 MHz SAR Dipole	10/19/2018	Biennial	10/19/2020	1161
SPEAG	D835V2	835 MHz SAR Dipole	1/13/2020	Annual	1/13/2021	40132
SPEAG	D835V2	835 MHz SAR Dipole	10/19/2018	Biennial	10/19/2020	40133
SPEAG	D1750V2	1750 MHz SAR Dipole	5/15/2019	Annual	5/15/2020	1148
SPEAG	D1750V2	1750 MHz SAR Dipole	10/23/2018	Biennial	10/23/2020	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Biennial	10/23/2020	50149
SPEAG	D1900V2	1900 MHz SAR Dipole	2/21/2019	Biennial	2/21/2021	50148
SPEAG	D1900V2	1900 MHz SAR Dipole	10/23/2018	Biennial	10/23/2020	50080
SPEAG	D2450V2	2450 MHz SAR Dipole	8/14/2019	Annual	8/14/2020	719
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Triennial	9/11/2020	797
SPEAG	D2600V2	2600 MHz SAR Dipole	6/14/2019	Annual	6/14/2020	1064
SPEAG	D5GHV2	5 GHz SAR Dipole	9/17/2019	Annual	9/17/2020	1191
SPEAG	D5GHV2	5 GHz SAR Dipole	1/16/2018	Triennial	1/16/2021	1057
SPEAG	EX3DV4	SAR Probe	7/16/2019	Annual	7/16/2020	7410
SPEAG	EX3DV4	SAR Probe	12/11/2019	Annual	12/11/2020	7570
SPEAG	EX3DV4	SAR Probe	9/19/2019	Annual	9/19/2020	7551
SPEAG	EX3DV4	SAR Probe	5/16/2019	Annual	5/16/2020	7406
SPEAG	EX3DV4	SAR Probe	1/21/2020	Annual	1/21/2021	3589
SPEAG	EX3DV4	SAR Probe	1/21/2020	Annual	1/21/2021	7488
SPEAG	EX3DV4	SAR Probe	3/17/2020	Annual	3/17/2021	7527
SPEAG	EX3DV4	SAR Probe	12/11/2019	Annual	12/11/2020	7571
SPEAG	EX3DV4	SAR Probe	9/19/2019	Annual	9/19/2020	7552
SPEAG	EX3DV4	SAR Probe	7/15/2019	Annual	7/15/2020	7547
SPEAG	EX3DV4	SAR Probe	6/19/2019	Annual	6/19/2020	7409
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/18/2019	Annual	12/18/2020	859
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/17/2019	Annual	9/17/2020	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/8/2019	Annual	5/8/2020	728
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/13/2020	Annual	1/13/2021	1558
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2019	Annual	7/11/2020	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/13/2020	Annual	1/13/2021	1530
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/12/2020	Annual	3/12/2021	1368
SPEAG	DAE4	Dasy Data Acquisition Electronics	12/5/2019	Annual	12/5/2020	1533
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/12/2019	Annual	9/12/2020	1440
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/11/2019	Annual	7/11/2020	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/20/2019	Annual	6/20/2020	1334




Note: Equipment was solely used during its calibration period

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 112 of 116

## 16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
<b>Combined Standard Uncertainty (k=1)</b>						RSS	11.5	11.3
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)						k=2	23.0	22.6



FCC ID ZNFQ730VM	 <b>PCTEST</b> Proud to be part of 	<b>SAR EVALUATION REPORT</b>			<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset			Page 113 of 116

## 17 CONCLUSION

### 17.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset		Page 114 of 116

## 18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 115 of 116	

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID ZNFQ730VM	 <b>PCTEST</b> <small>Proud to be part of element</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M2003310054-01-R1.ZNF	<b>Test Dates:</b> 04/12/20 - 05/06/20	<b>DUT Type:</b> Portable Handset	Page 116 of 116	

## APPENDIX A: SAR TEST DATA

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 41.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 04/30/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7570; ConvF(9.85, 9.85, 9.85) @ 836.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 850, Left Head, Cheek, Mid.ch, 3 Tx slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.66 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.265 W/kg**

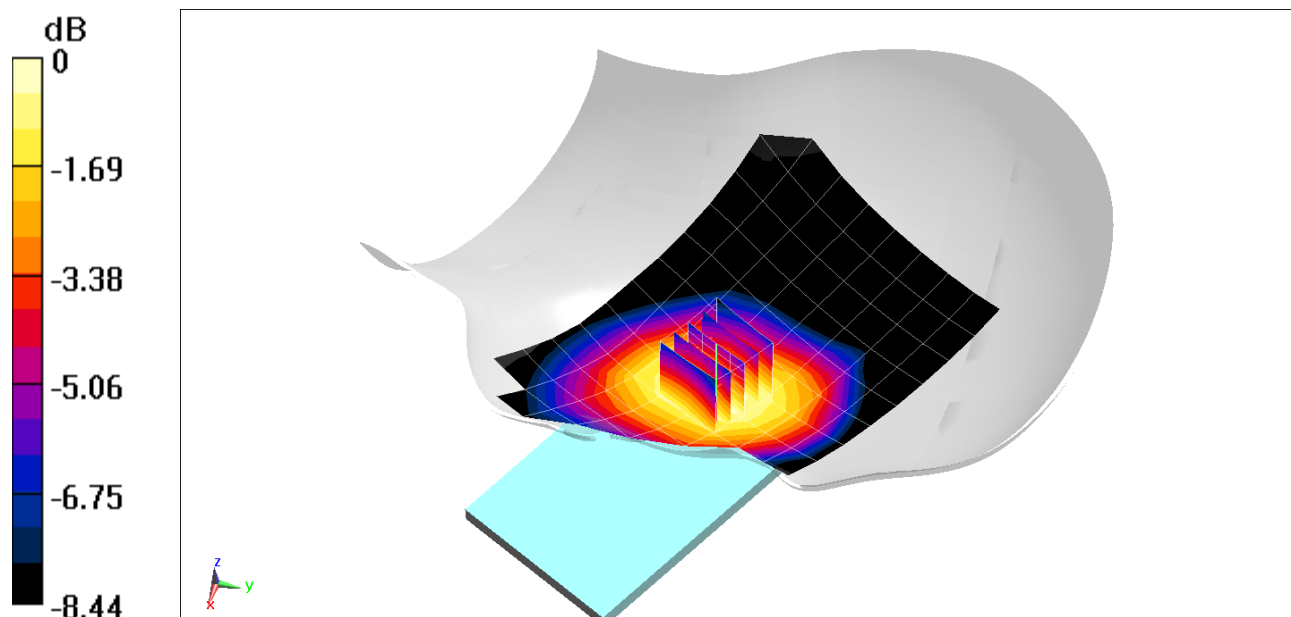

0 dB = 0.313 W/kg = -5.04 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Head; Medium parameters used:

$f = 1880$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 38.534$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Test Date: 04/30/2020; Ambient Temp: 21.2°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7406; ConvF(8.18, 8.18, 8.18) @ 1880 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 1900, Right Head, Cheek, Mid.ch, 3 Tx slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.780 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.100 W/kg

**SAR(1 g) = 0.060 W/kg**

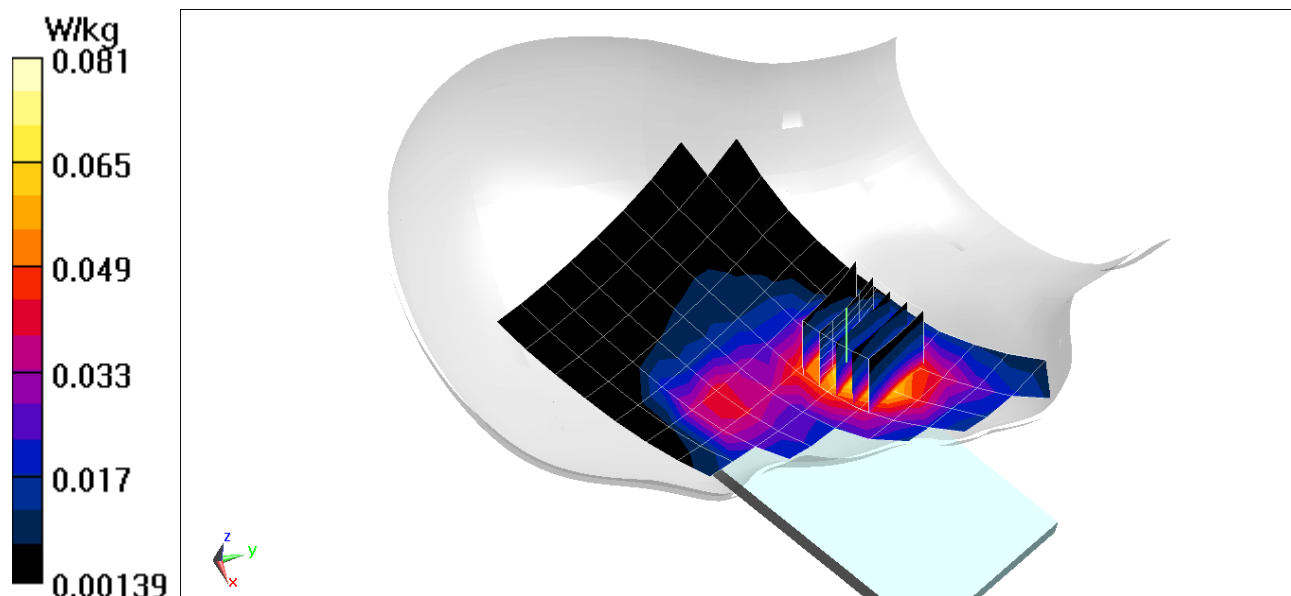



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.901 \text{ S/m}$ ;  $\epsilon_r = 41.256$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04/30/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7570; ConvF(9.85, 9.85, 9.85) @ 836.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 850, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.26 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.200 W/kg**

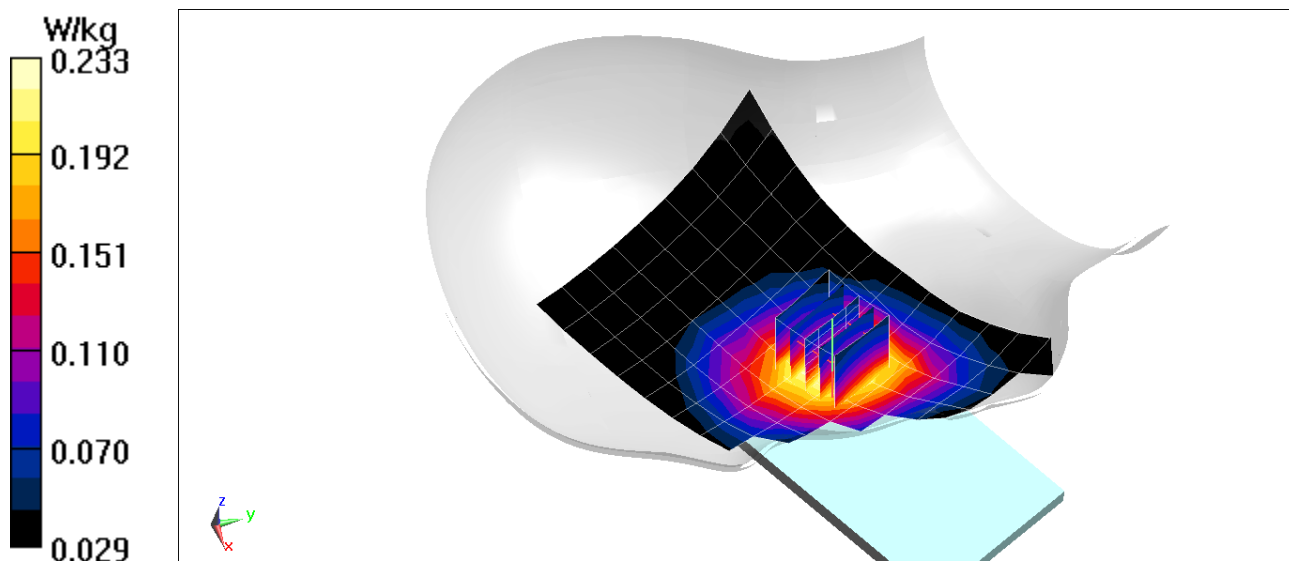

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used (interpolated):

$f = 1732.4$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 41.116$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 04/13/2020; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7551; ConvF(8.34, 8.34, 8.34) @ 1732.4 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1750, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.990 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.157 W/kg

**SAR(1 g) = 0.102 W/kg**

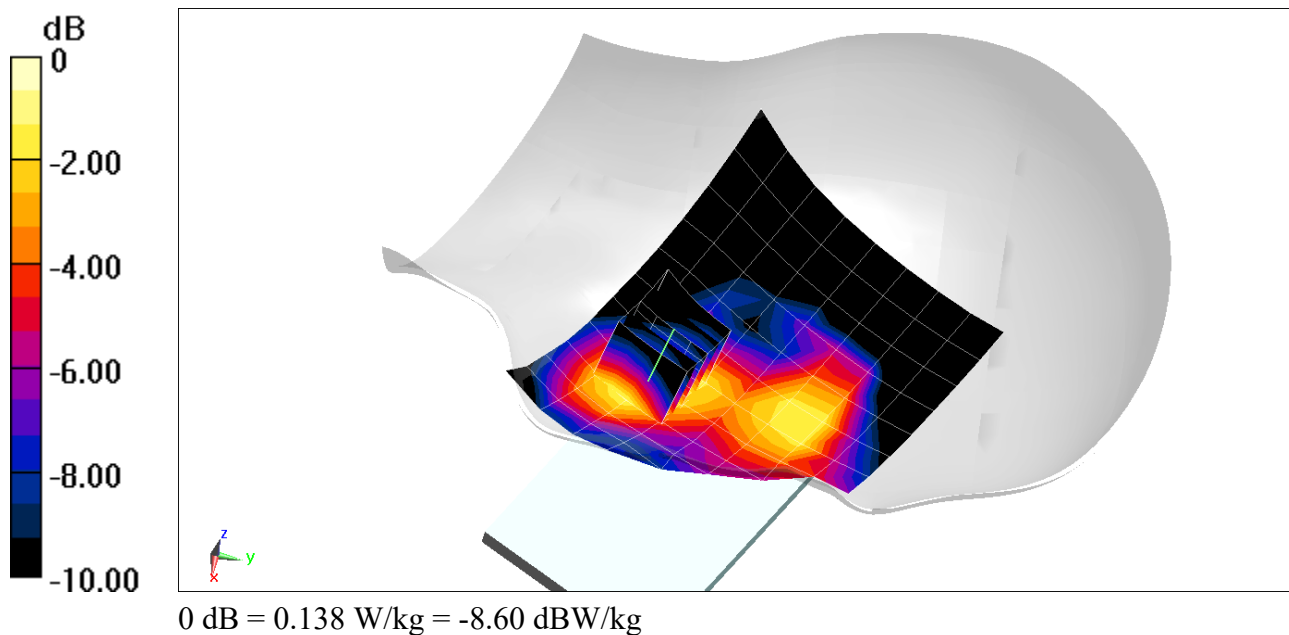

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.383 \text{ S/m}$ ;  $\epsilon_r = 38.534$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04/30/2020; Ambient Temp: 21.2°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7406; ConvF(8.18, 8.18, 8.18) @ 1880 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1900, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.584 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.202 W/kg

**SAR(1 g) = 0.124 W/kg**

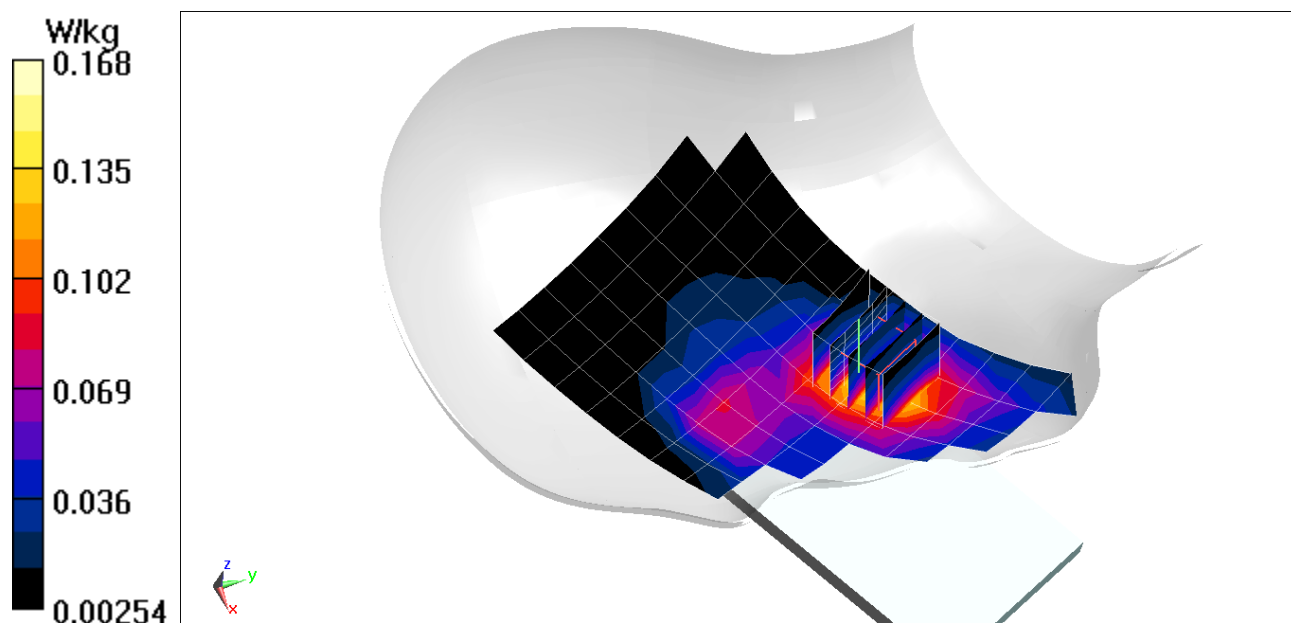

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.936 \text{ S/m}$ ;  $\epsilon_r = 42.988$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 05/02/2020; Ambient Temp: 20.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 836.52 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. CDMA, BC 0, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.25 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.249 W/kg

**SAR(1 g) = 0.192 W/kg**

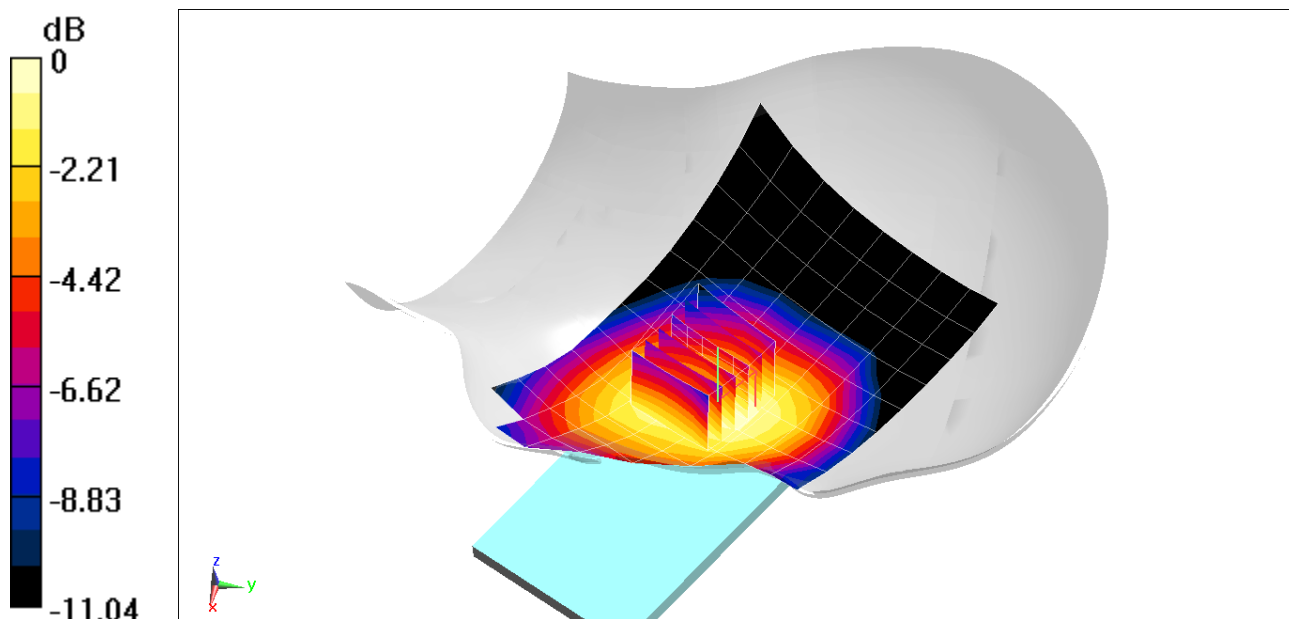

0 dB = 0.228 W/kg = -6.42 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 820.1$  MHz;  $\sigma = 0.93$  S/m;  $\epsilon_r = 42.873$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 05/04/2020; Ambient Temp: 23.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 820.1 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. CDMA, BC 10, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.31 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.219 W/kg**

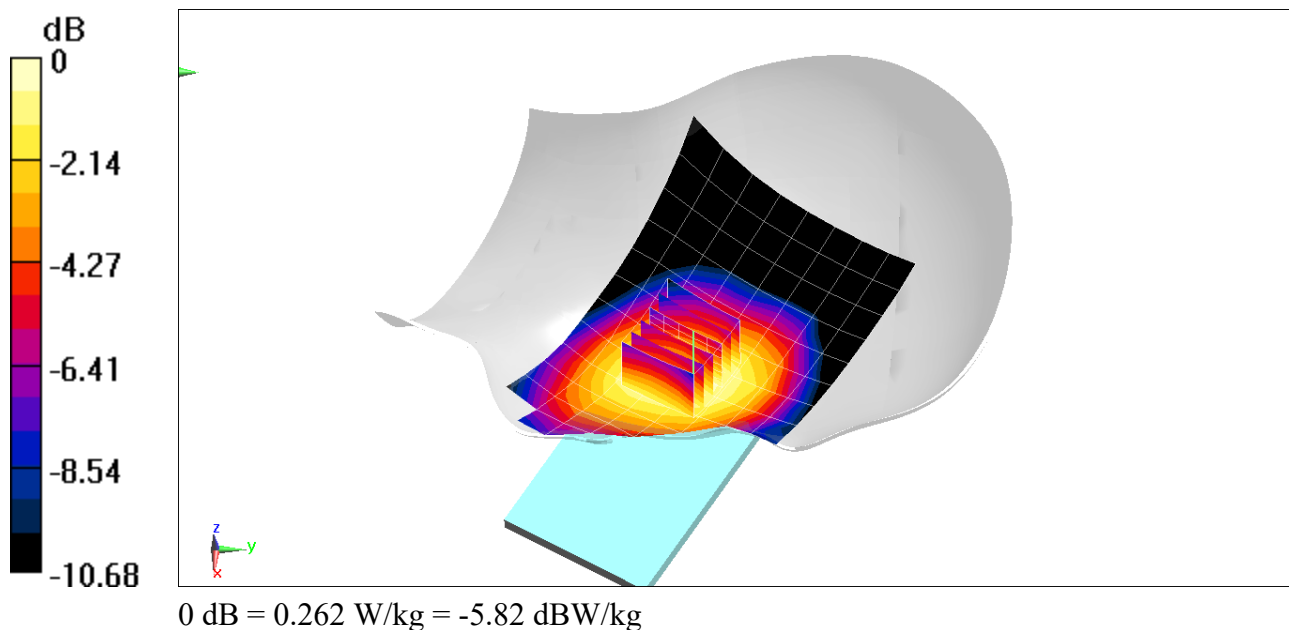

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.423 \text{ S/m}$ ;  $\epsilon_r = 38.688$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7406; ConvF(8.18, 8.18, 8.18) @ 1880 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: PCS CDMA, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.623 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.209 W/kg

**SAR(1 g) = 0.130 W/kg**

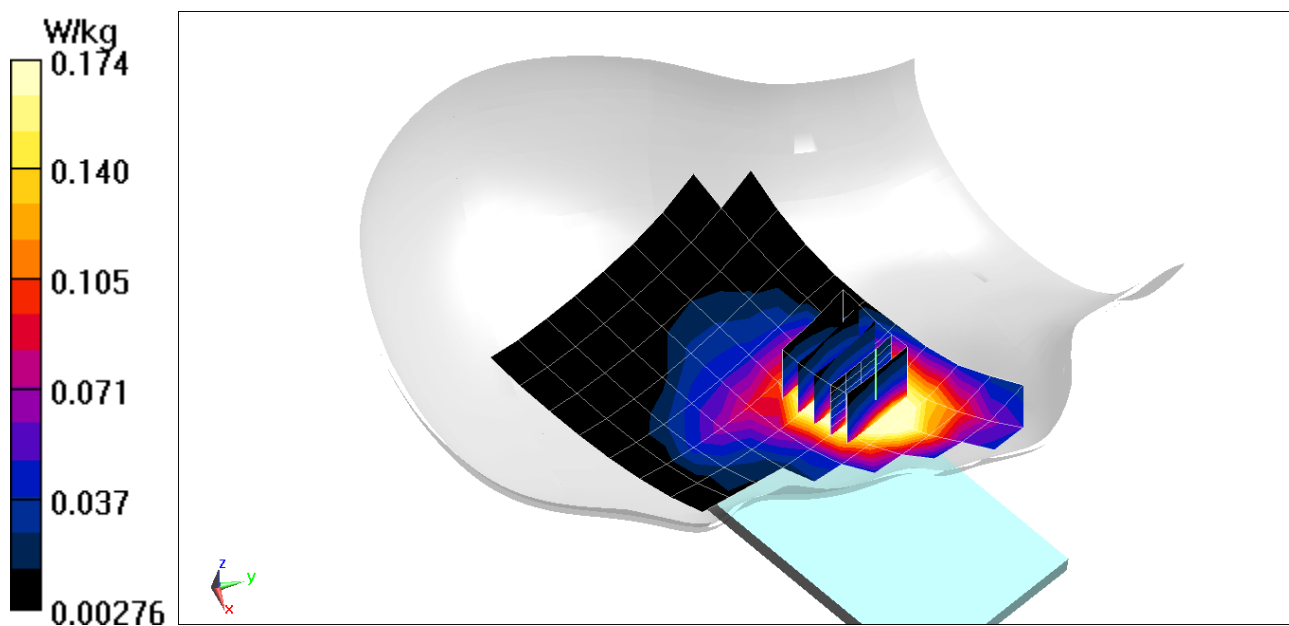

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$ ;  $\sigma = 0.864 \text{ S/m}$ ;  $\epsilon_r = 43.966$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04/30/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Left Head, Cheek, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.73 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.175 W/kg

**SAR(1 g) = 0.145 W/kg**

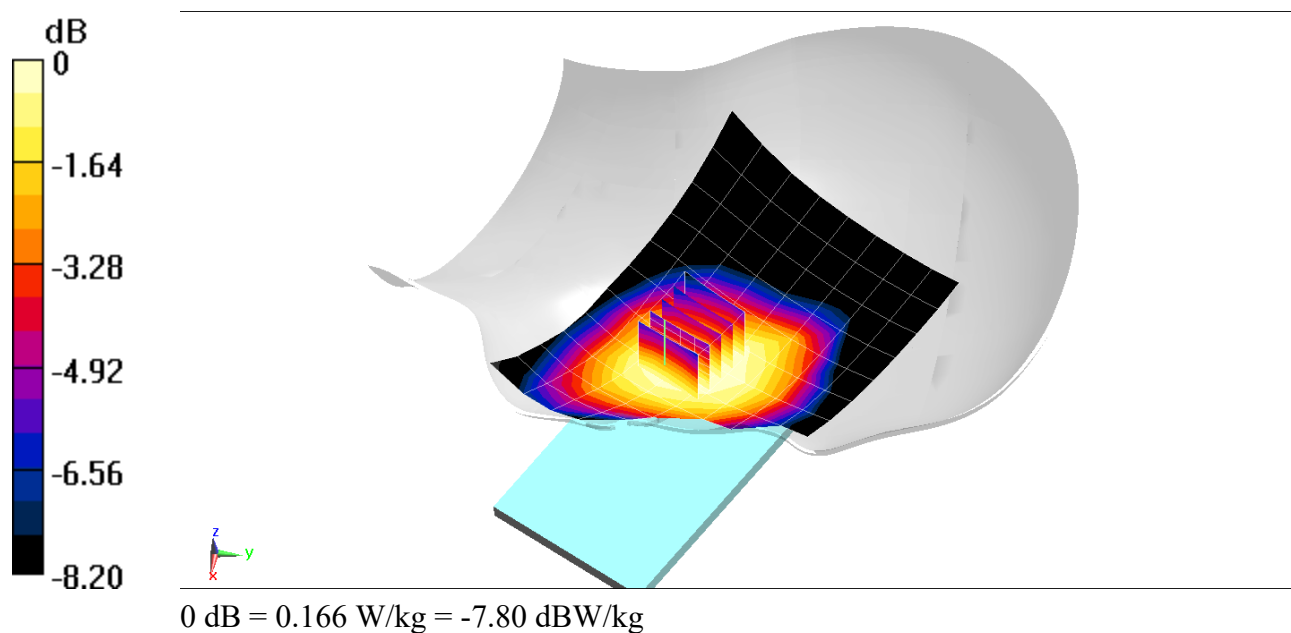

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 707.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 43.898$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 04/30/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 707.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, 10 MHz Bandwidth  
QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.65 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.204 W/kg

**SAR(1 g) = 0.173 W/kg**

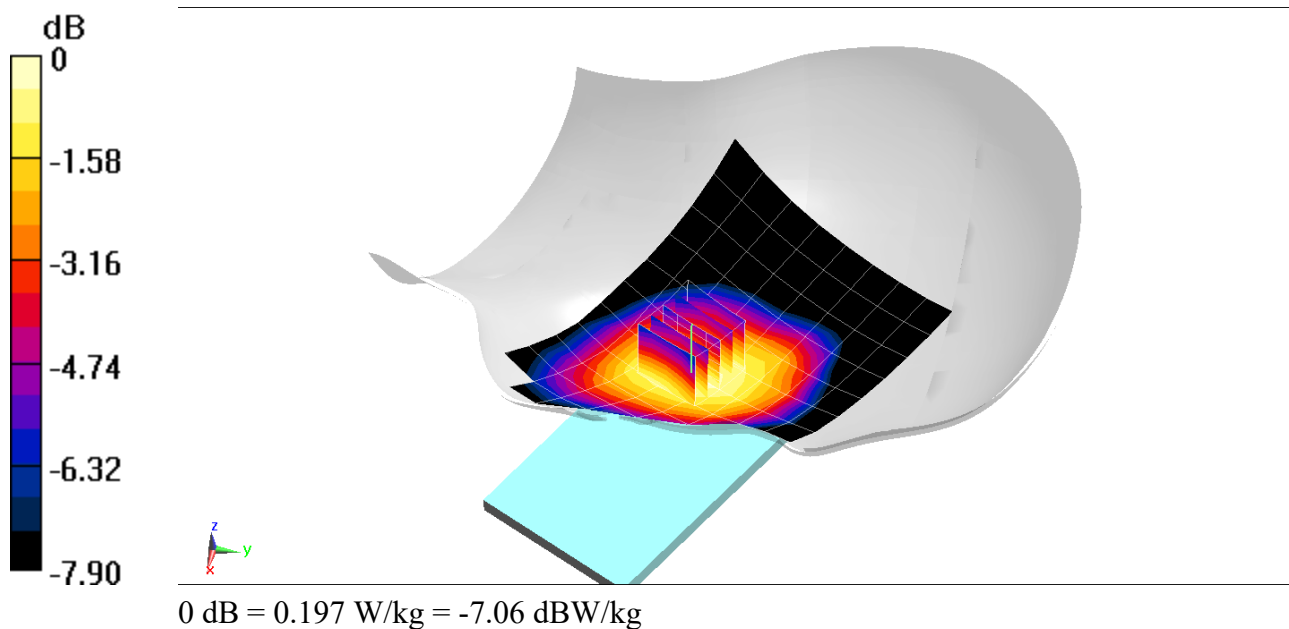



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.898 \text{ S/m}$ ;  $\epsilon_r = 43.67$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04/30/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 782 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Left Head, Cheek, Mid.ch, 10 MHz Bandwidth  
QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.94 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.160 W/kg

**SAR(1 g) = 0.135 W/kg**

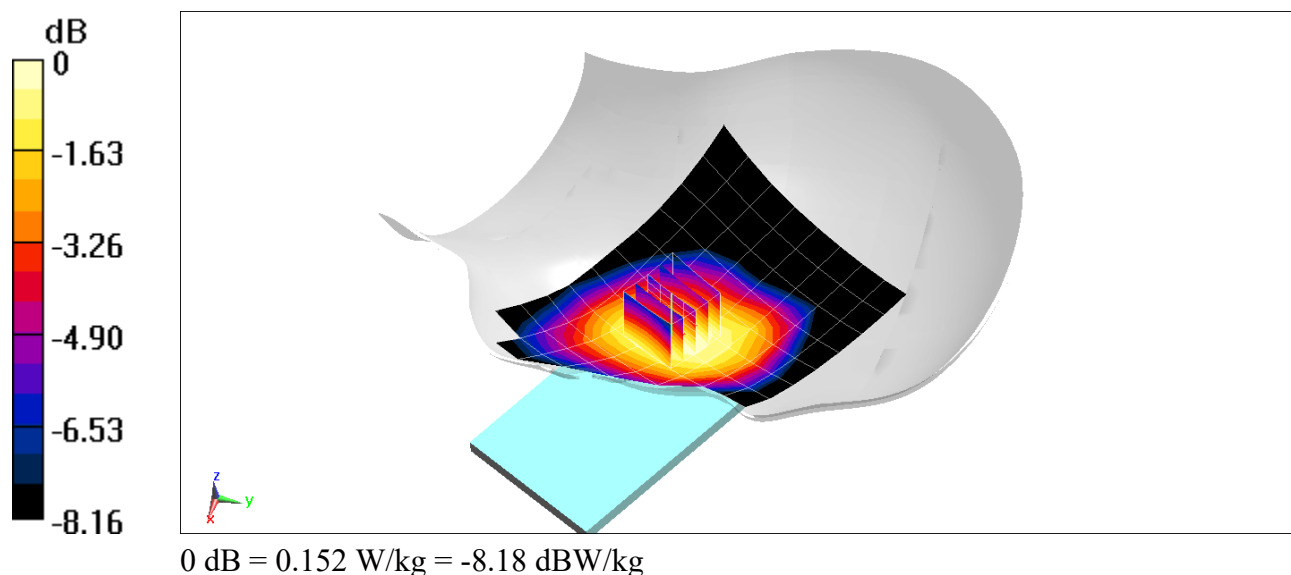

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01839**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.895 \text{ S/m}$ ;  $\epsilon_r = 41.327$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04/30/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7570; ConvF(9.85, 9.85, 9.85) @ 831.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Left Head, Cheek, Mid.ch, 15 MHz Bandwidth  
QPSK, 1 RB, 36 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.86 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.200 W/kg

**SAR(1 g) = 0.158 W/kg**

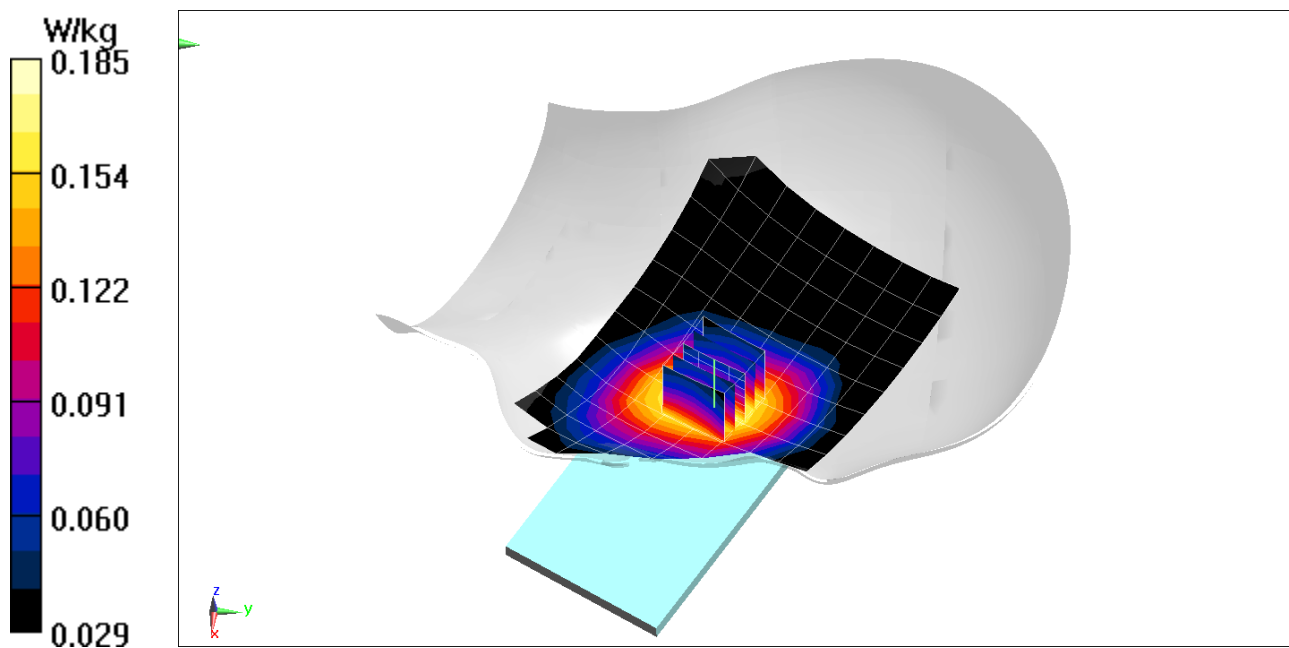

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1745 \text{ MHz}$ ;  $\sigma = 1.388 \text{ S/m}$ ;  $\epsilon_r = 41.099$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04/13/2020; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7551; ConvF(8.34, 8.34, 8.34) @ 1745 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Right Head, Cheek, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.20 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.203 W/kg

**SAR(1 g) = 0.129 W/kg**

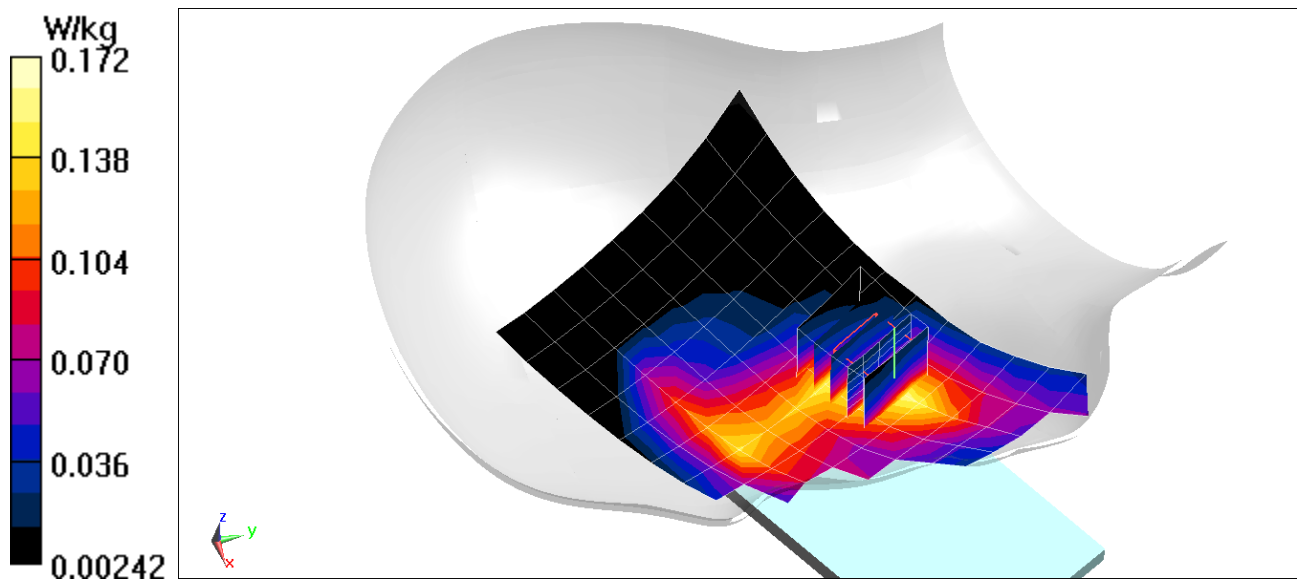

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1905 \text{ MHz}$ ;  $\sigma = 1.449 \text{ S/m}$ ;  $\epsilon_r = 38.596$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7406; ConvF(8.18, 8.18, 8.18) @ 1905 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Right Head, Cheek, High.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.22 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.133 W/kg**

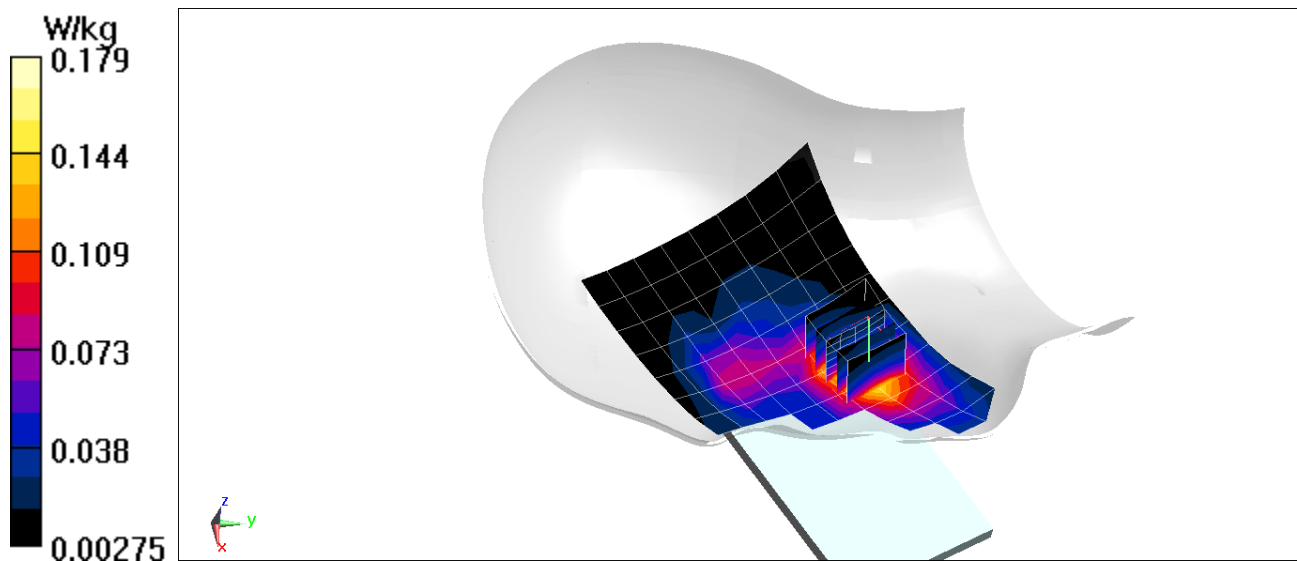

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2593 MHz; Duty Cycle: 1:2.31

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$ ;  $\sigma = 1.894 \text{ S/m}$ ;  $\epsilon_r = 38.105$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 04/19/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2593 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41, Power Class 2, Right Head, Cheek, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.209 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.260 W/kg

**SAR(1 g) = 0.128 W/kg**

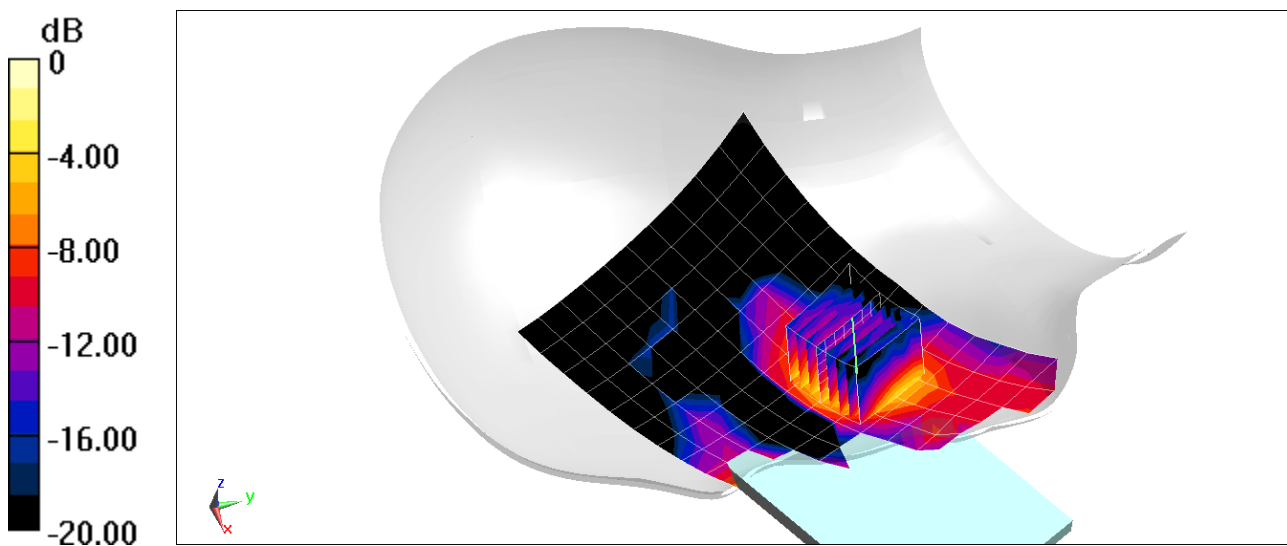

0 dB = 0.196 W/kg = -7.08 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01953**

Communication System: UID 0, 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used (interpolated):

$f = 2437$  MHz;  $\sigma = 1.794$  S/m;  $\epsilon_r = 39.094$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 04/26/2020; Ambient Temp: 22.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2437 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Left Head, Cheek, Ch 6, 1 Mbps**


**Area Scan (11x18x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.388 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.42 W/kg

**SAR(1 g) = 0.939 W/kg**

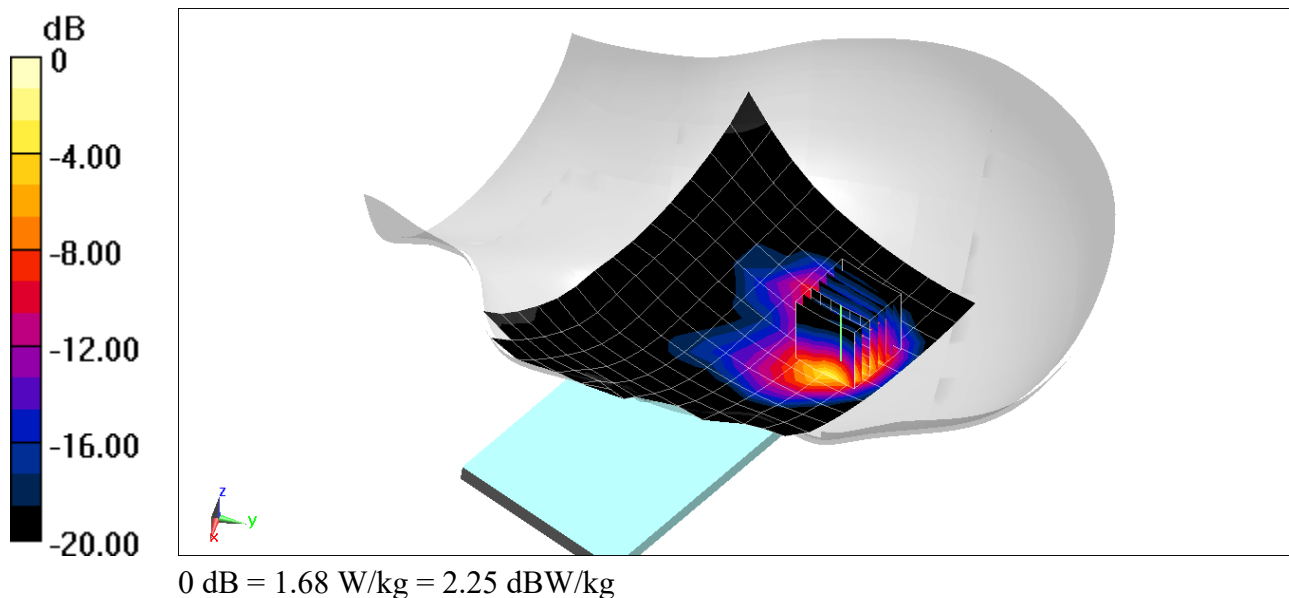

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01953**

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5755 MHz, Duty Cycle: 1:1

Medium: 5200-5800 Head; Medium parameters used:

$f = 5755$  MHz;  $\sigma = 5.187$  S/m;  $\epsilon_r = 34.284$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 04/21/2020; Ambient Temp: 22.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7406; ConvF(5.23, 5.23, 5.23) @ 5755 MHz, Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11n, U-NII-3, 40 MHz Bandwidth, Left Head, Cheek  
Ch 151, 13.5 Mbps**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (9x9x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 0.6030 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 4.28 W/kg

**SAR(1 g) = 0.730 W/kg**

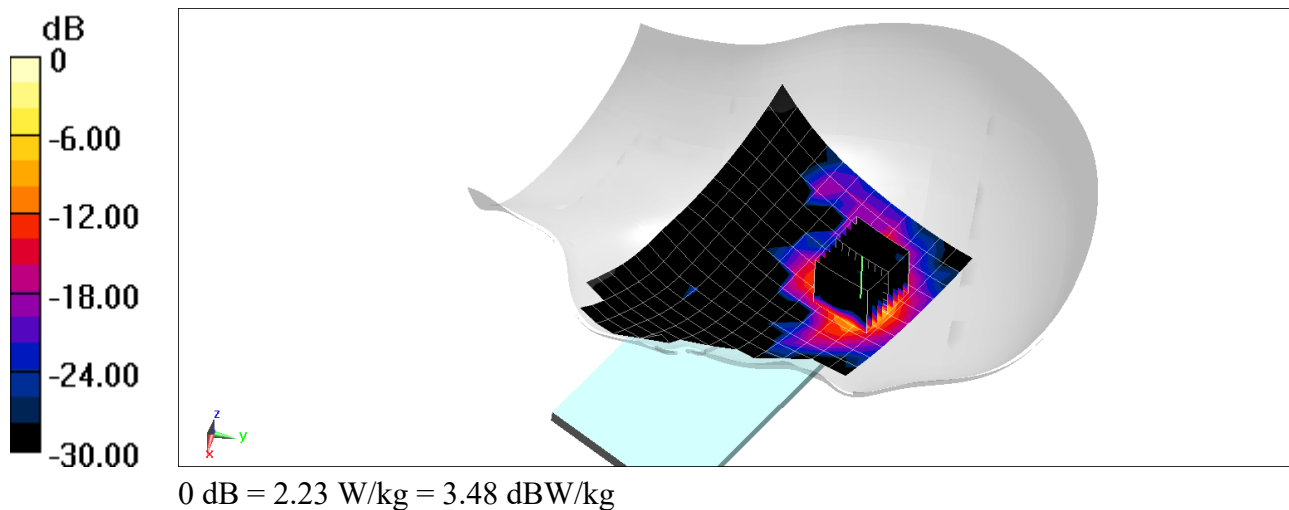

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01946**

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium: 2450 Head; Medium parameters used:

$f = 2480 \text{ MHz}$ ;  $\sigma = 1.817 \text{ S/m}$ ;  $\epsilon_r = 37.533$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 04/12/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2480 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: Bluetooth, Left Head, Cheek, Ch 78, 1 Mbps**


**Area Scan (11x19x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.483 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.183 W/kg

**SAR(1 g) = 0.066 W/kg**

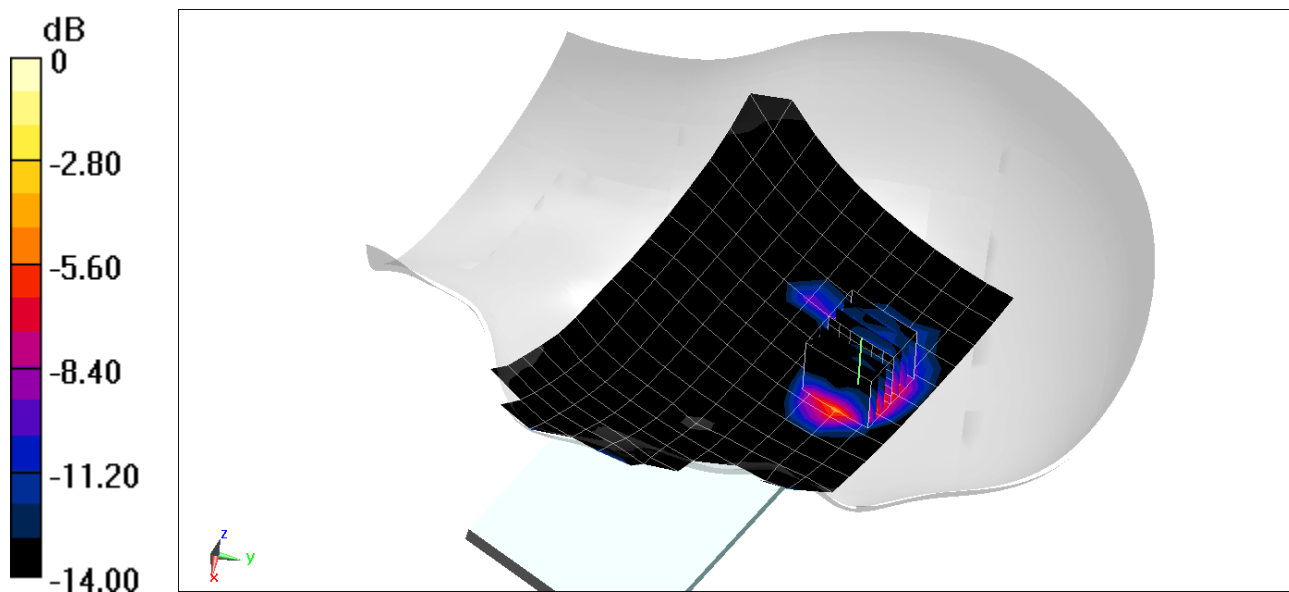

0 dB = 0.127 W/kg = -8.96 dBW/kg



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6$  MHz;  $\sigma = 0.958$  S/m;  $\epsilon_r = 54.568$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 22.0°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 850, Body SAR, Back side, Mid.ch, 3 Tx Slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.91 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.903 W/kg

**SAR(1 g) = 0.562 W/kg**

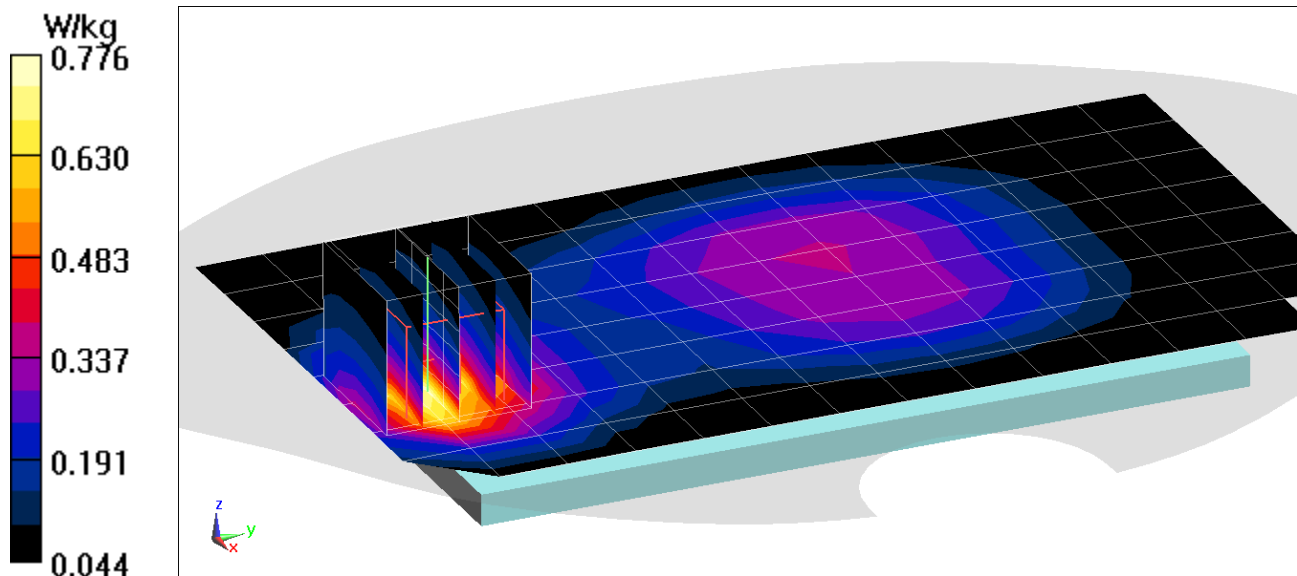

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.76

Medium: 835 Body; Medium parameters used (interpolated):

$f = 848.8$  MHz;  $\sigma = 0.972$  S/m;  $\epsilon_r = 54.443$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 22.0°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 848.8 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 850, Body SAR, Bottom Edge, High.ch, 3 Tx Slots**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.85 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.591 W/kg**

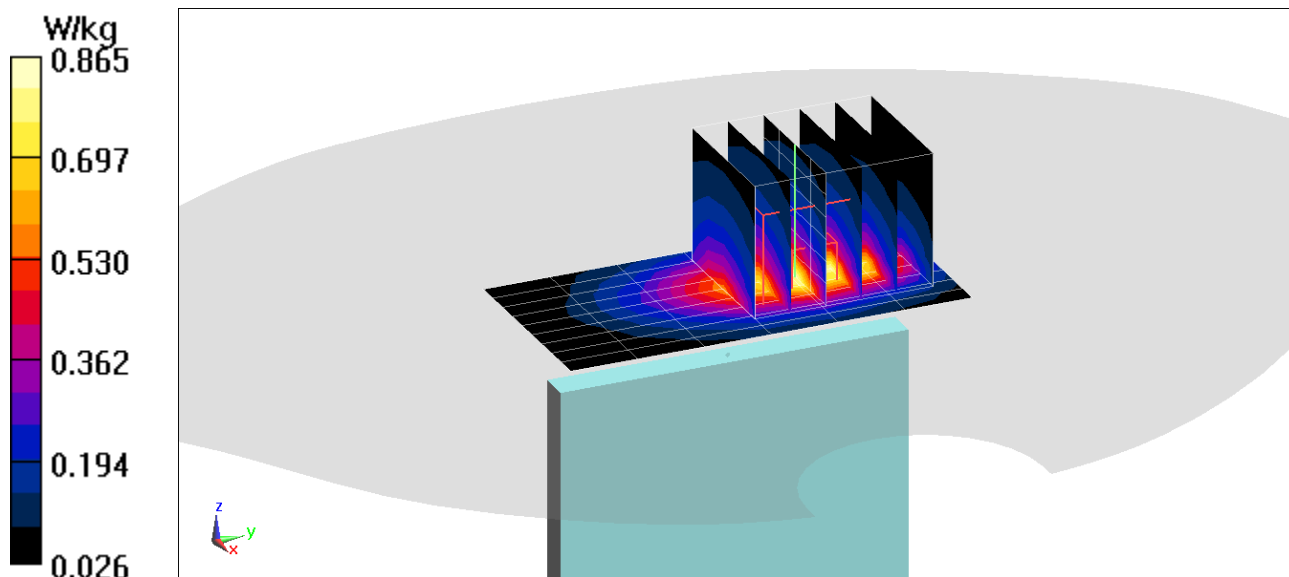

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.552 \text{ S/m}$ ;  $\epsilon_r = 52.734$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/28/2020; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1880 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 3 Tx Slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.16 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.567 W/kg

**SAR(1 g) = 0.324 W/kg**

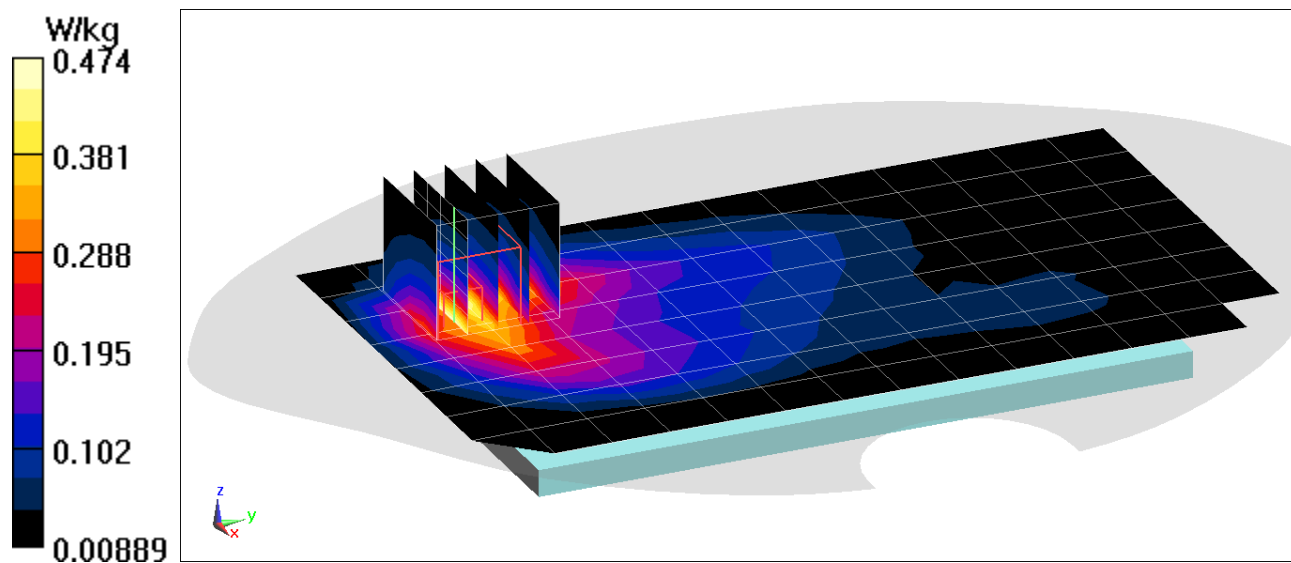

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, GSM GPRS; 3 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.76

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.552 \text{ S/m}$ ;  $\epsilon_r = 52.734$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/28/2020; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1880 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 3 Tx Slots**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.61 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.886 W/kg

**SAR(1 g) = 0.489 W/kg**

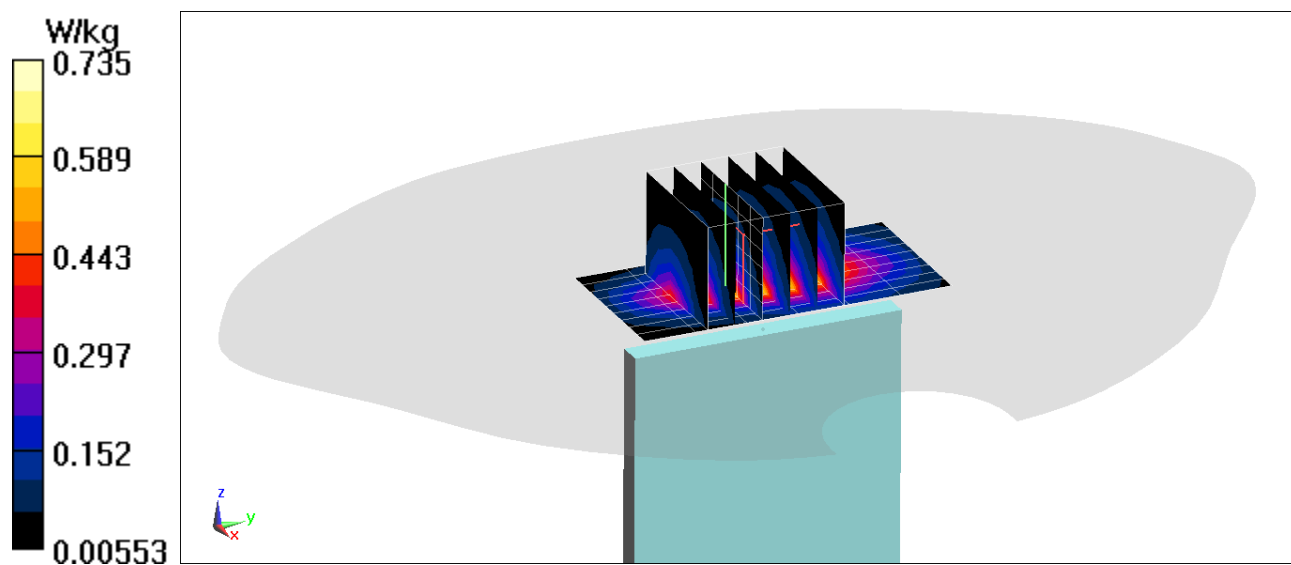

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.963 \text{ S/m}$ ;  $\epsilon_r = 54.118$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/23/2020; Ambient Temp: 21.8°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.33 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.654 W/kg

**SAR(1 g) = 0.404 W/kg**

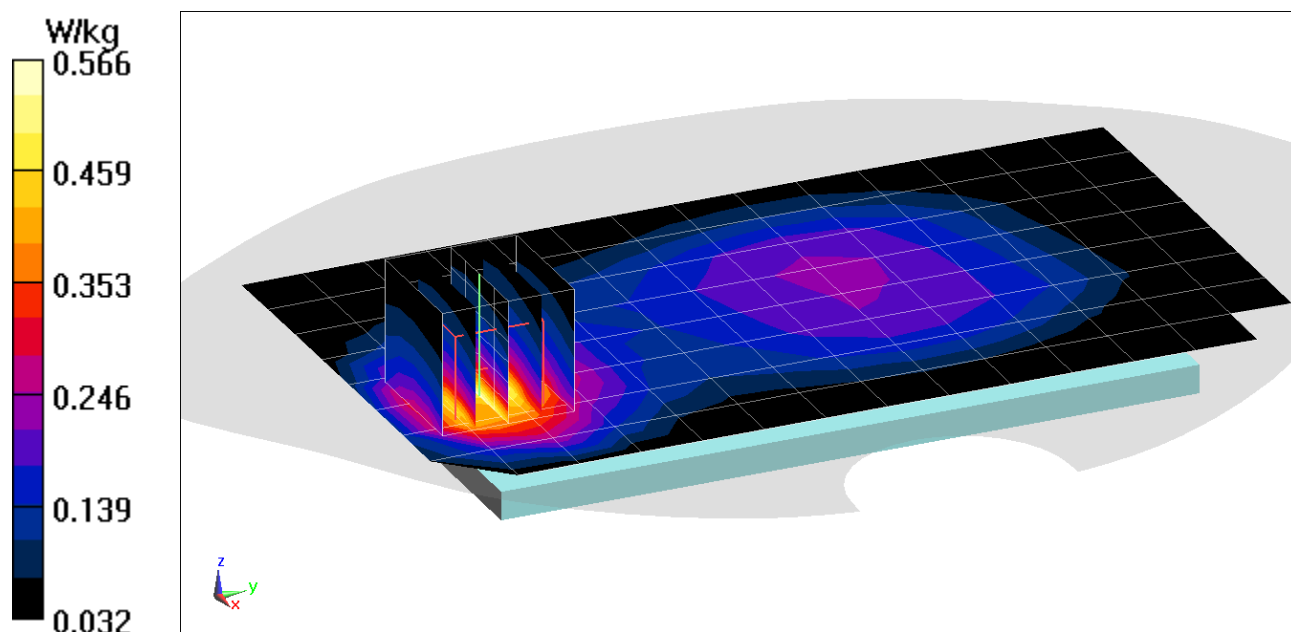

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.958 \text{ S/m}$ ;  $\epsilon_r = 54.568$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 22.0°C; Tissue Temp: 20.40°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.6 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 850, Body SAR, Bottom Edge, Mid.ch**


**Area Scan (10x7x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.58 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.786 W/kg

**SAR(1 g) = 0.434 W/kg**

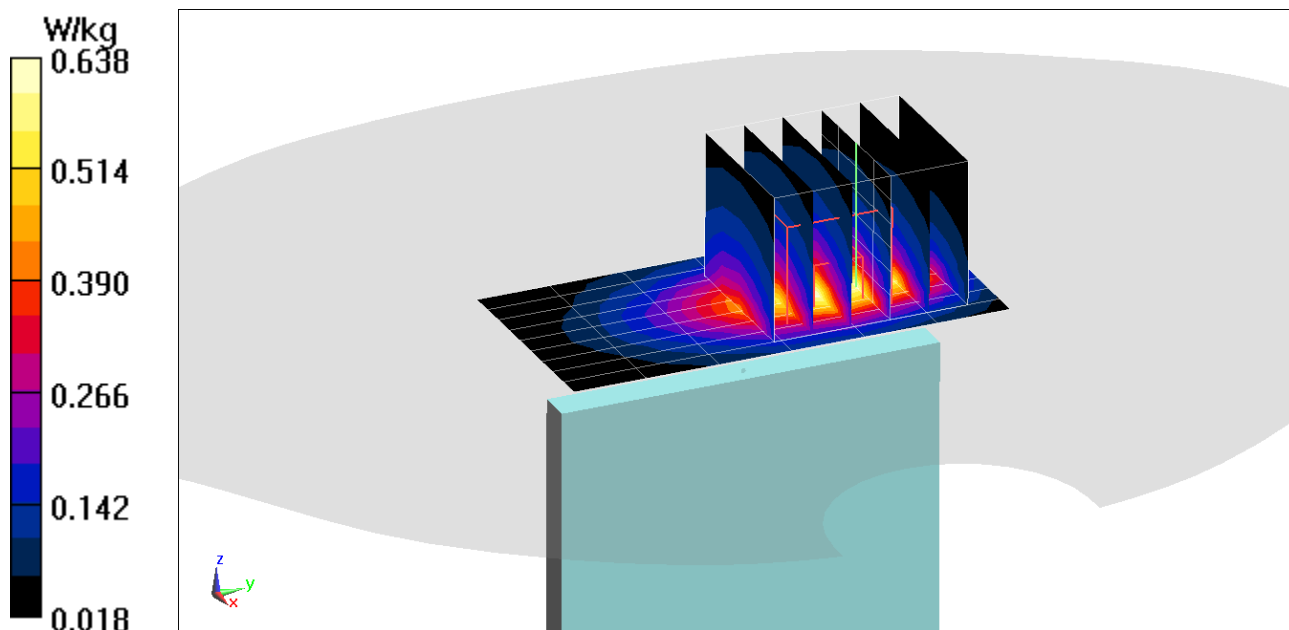

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.476 \text{ S/m}$ ;  $\epsilon_r = 55.055$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/13/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1732.4 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1750, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 22.61 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.670 W/kg**

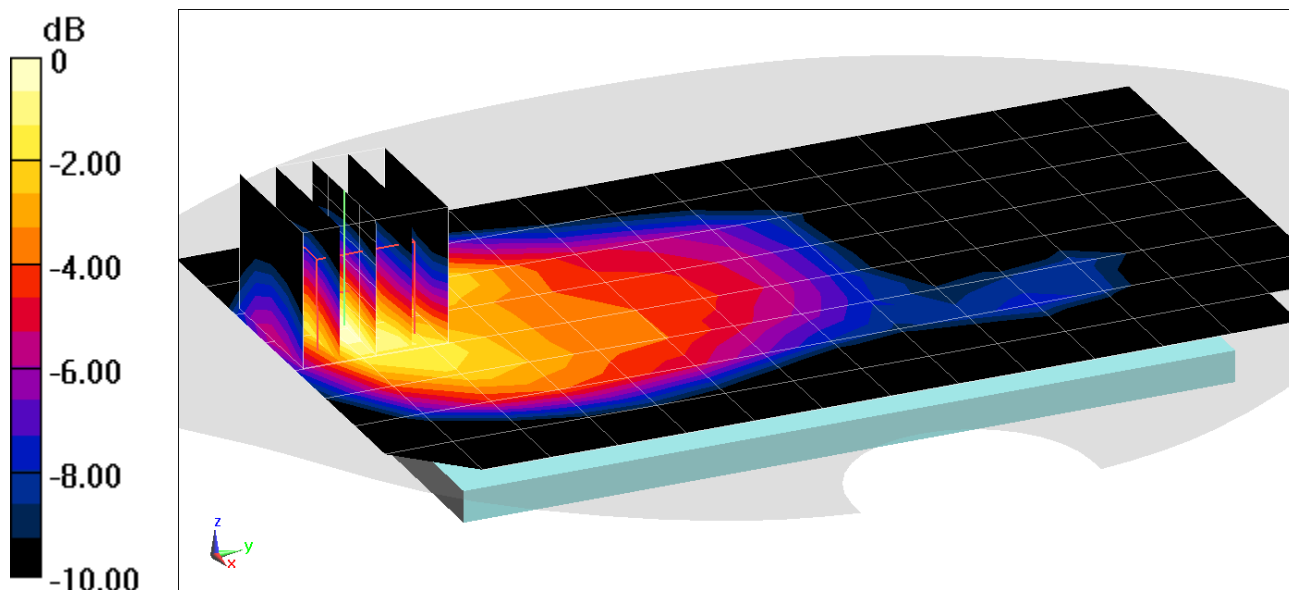

0 dB = 0.943 W/kg = -0.25 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: 1750 Body; Medium parameters used (interpolated):  
 $f = 1752.6 \text{ MHz}$ ;  $\sigma = 1.499 \text{ S/m}$ ;  $\epsilon_r = 54.981$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/13/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1752.6 MHz; Calibrated: 3/17/2020  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1368; Calibrated: 3/12/2020  
Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692  
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1750, Body SAR, Bottom Edge, High.ch**


**Area Scan (10x7x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 25.14 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.849 W/kg**

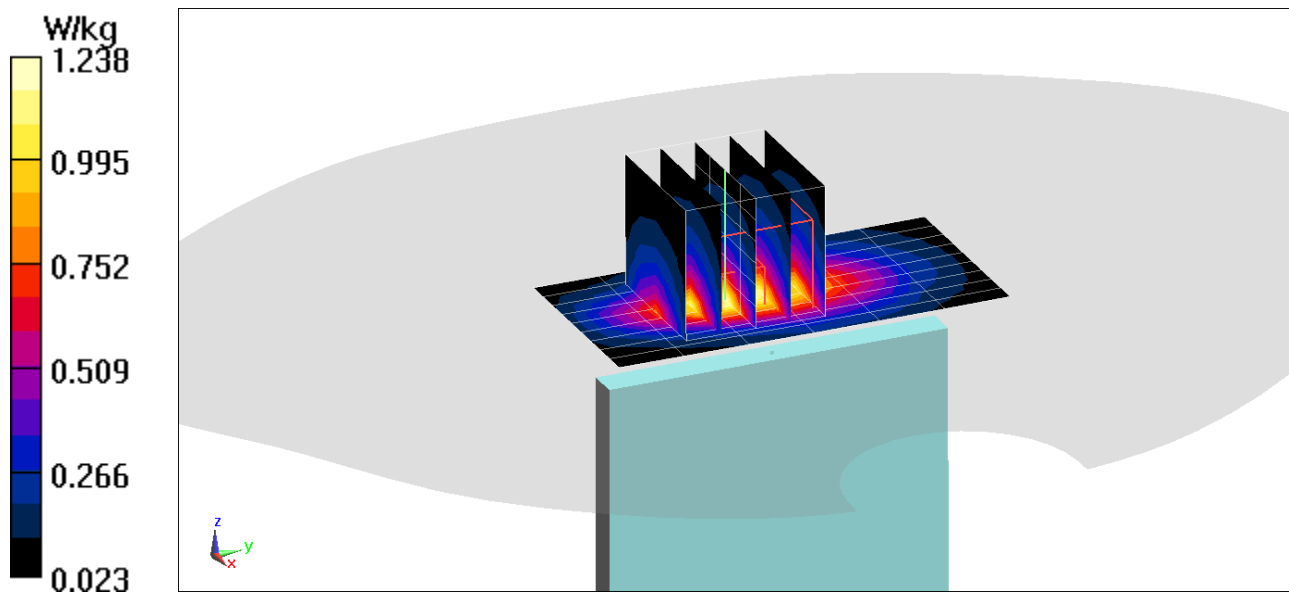



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body, Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.522 \text{ S/m}$ ;  $\epsilon_r = 52.83$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/28/2020; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1852.4 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1900, Body SAR, Back side, Low.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.70 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.623 W/kg**

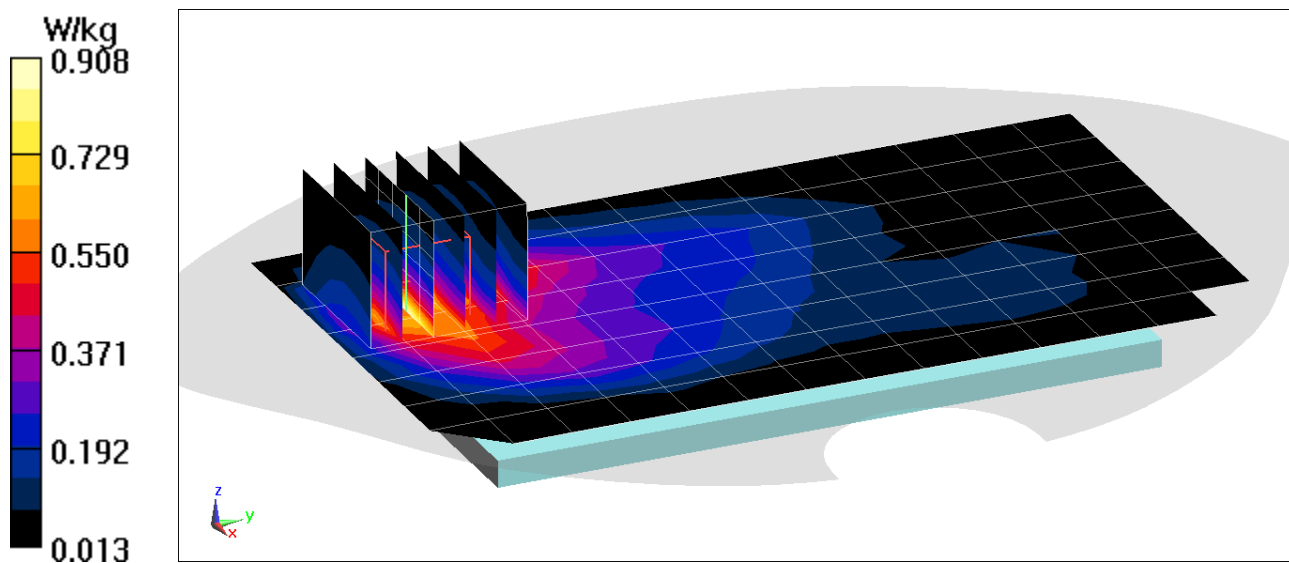

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.522 \text{ S/m}$ ;  $\epsilon_r = 52.83$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/28/2020; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1852.4 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1900, Body SAR, Bottom Edge, Low.ch**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.68 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.708 W/kg**

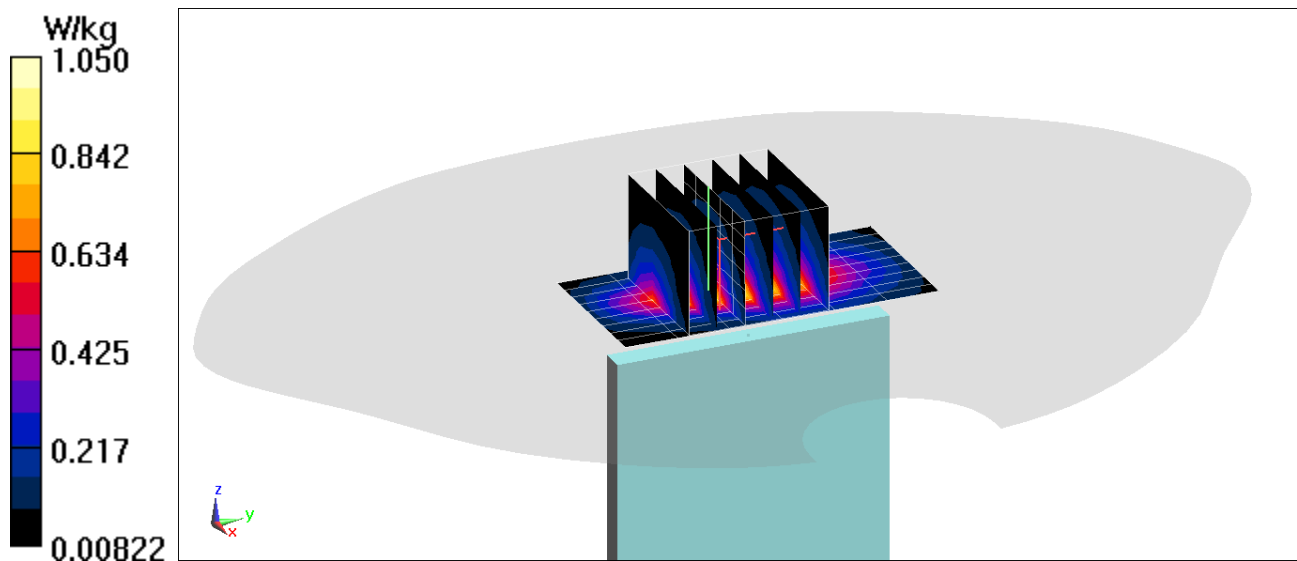

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.958 \text{ S/m}$ ;  $\epsilon_r = 53.62$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/06/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7488; ConvF(11.04, 11.04, 11.04) @ 836.52 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. CDMA, BC 0, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.99 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.653 W/kg

**SAR(1 g) = 0.392 W/kg**

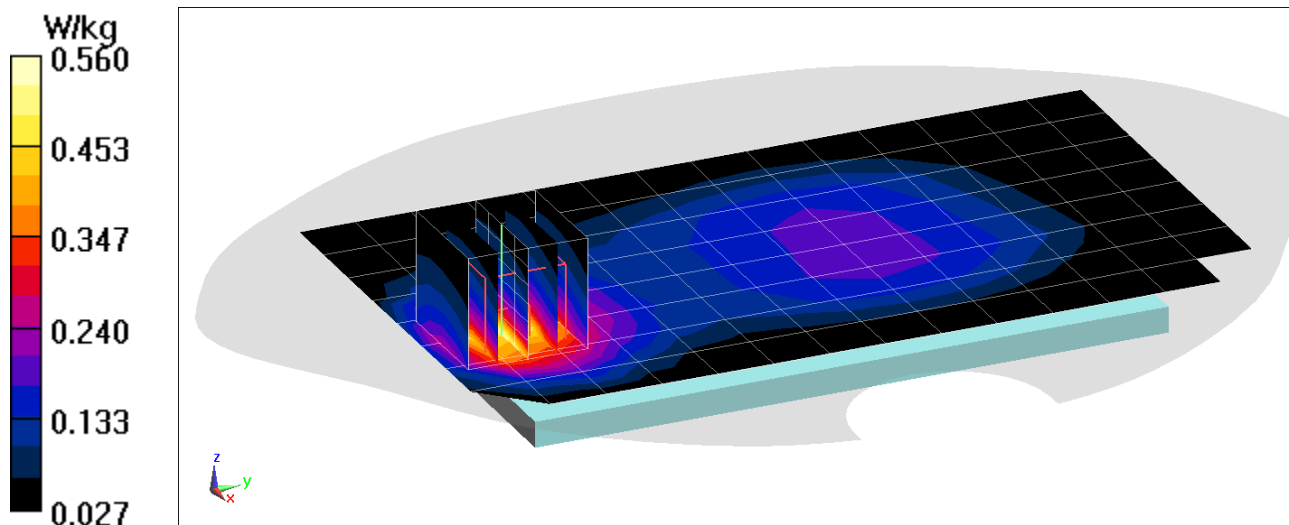

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.52$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 54.021$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/02/2020; Ambient Temp: 21.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 836.52 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. EVDO, BC 0, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.31 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.498 W/kg

**SAR(1 g) = 0.305 W/kg**

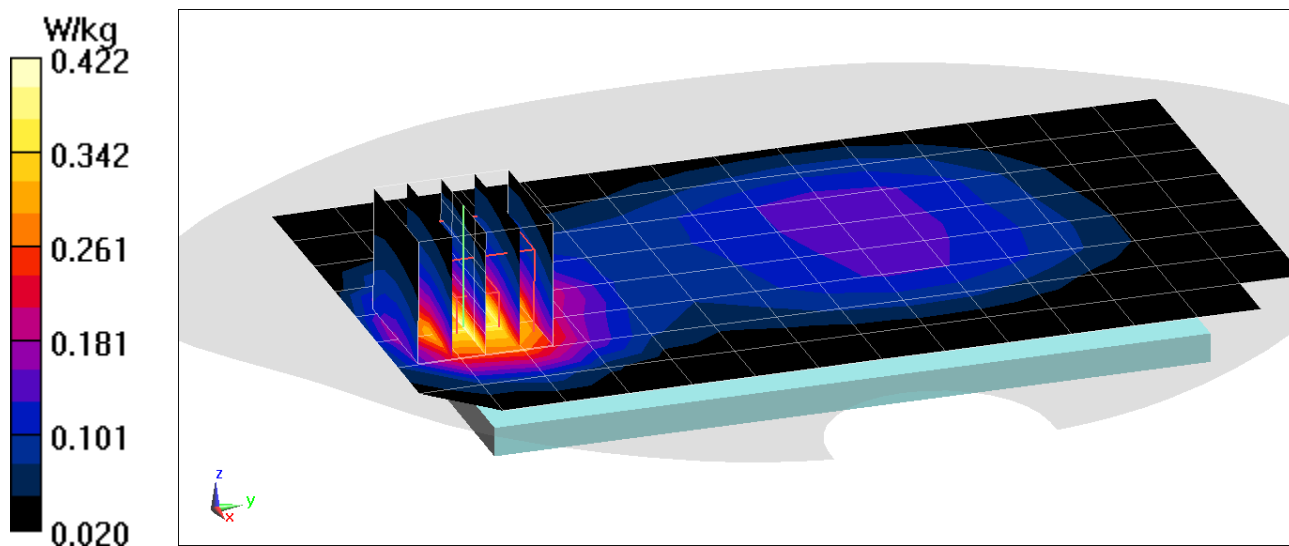

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.943 \text{ S/m}$ ;  $\epsilon_r = 54.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/02/2020; Ambient Temp: 21.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 820.1 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. CDMA BC10, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.68 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.610 W/kg

**SAR(1 g) = 0.382 W/kg**

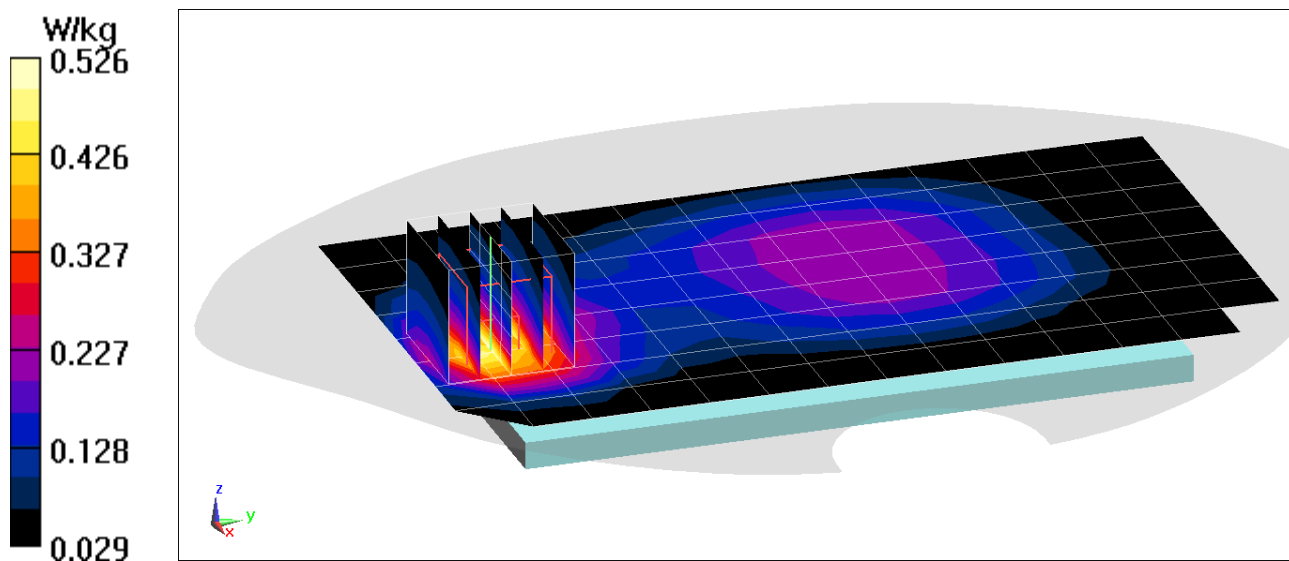

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.943 \text{ S/m}$ ;  $\epsilon_r = 54.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05/02/2020; Ambient Temp: 21.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 820.1 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Cell. EVDO BC10, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.95 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.508 W/kg

**SAR(1 g) = 0.316 W/kg**

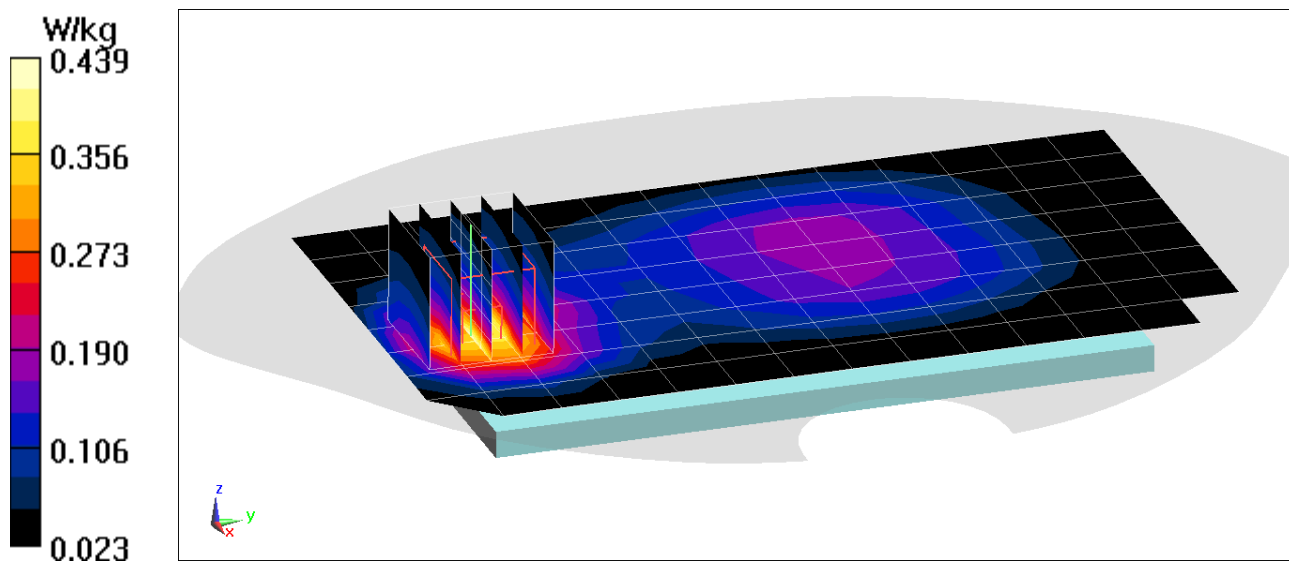

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium: 1900 Body ,Medium parameters used (interpolated):  
 $f = 1851.25 \text{ MHz}$ ;  $\sigma = 1.526 \text{ S/m}$ ;  $\epsilon_r = 55.466$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1851.25 MHz; Calibrated: 12/11/2019  
Sensor-Surface: 1.4mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1533; Calibrated: 12/5/2019  
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375  
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: PCS CDMA, Body SAR, Back side, Low.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.18 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.988 W/kg

**SAR(1 g) = 0.582 W/kg**

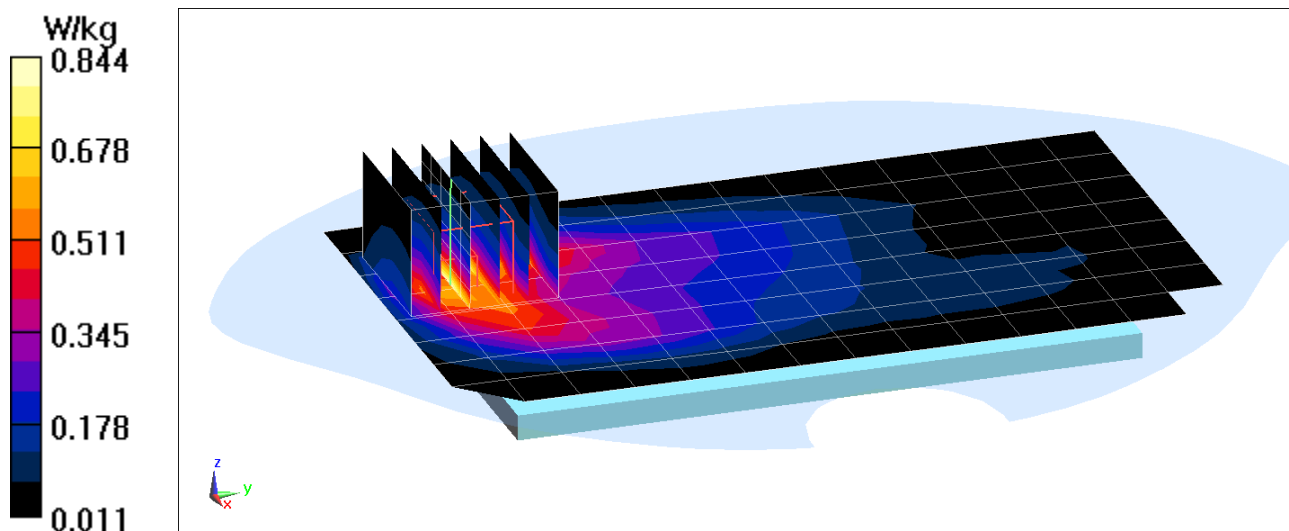

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1908.75 \text{ MHz}$ ;  $\sigma = 1.594 \text{ S/m}$ ;  $\epsilon_r = 55.275$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1908.75 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: PCS EVDO, Body SAR, Bottom Edge, High.ch**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.31 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.604 W/kg**

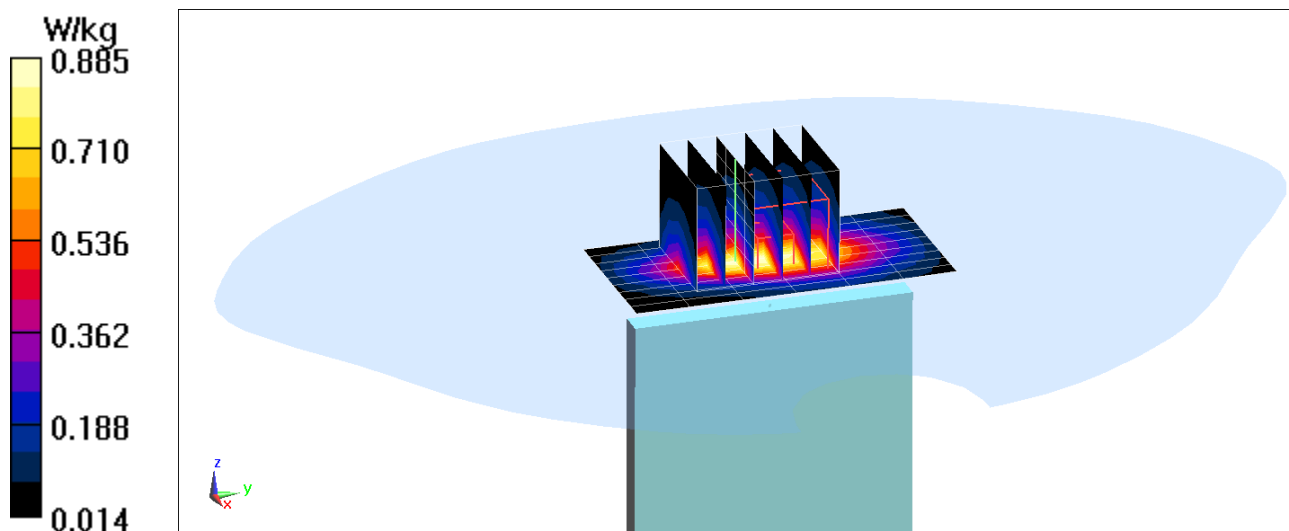



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$ ;  $\sigma = 0.923 \text{ S/m}$ ;  $\epsilon_r = 53.891$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 21.0°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.29 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.261 W/kg**

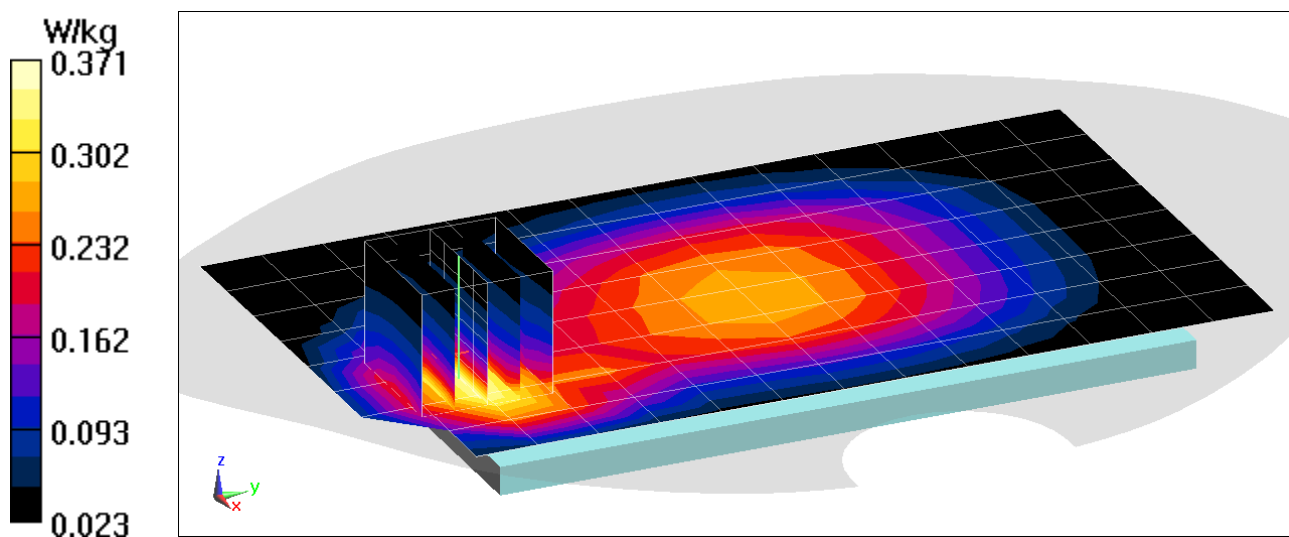

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 71; Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 680.5 \text{ MHz}$ ;  $\sigma = 0.923 \text{ S/m}$ ;  $\epsilon_r = 53.891$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 21.0°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 680.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 71, Body SAR, Left Edge, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 22.93 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.725 W/kg

**SAR(1 g) = 0.504 W/kg**

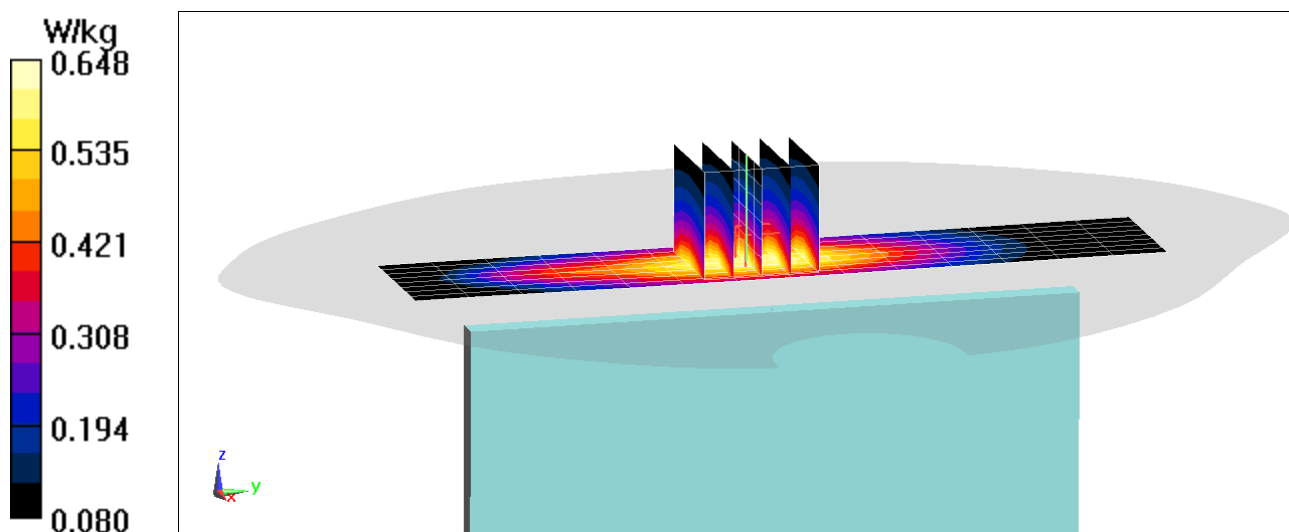

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5$  MHz;  $\sigma = 0.932$  S/m;  $\epsilon_r = 53.852$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 21.0°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 707.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth  
QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.90 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.463 W/kg

**SAR(1 g) = 0.275 W/kg**

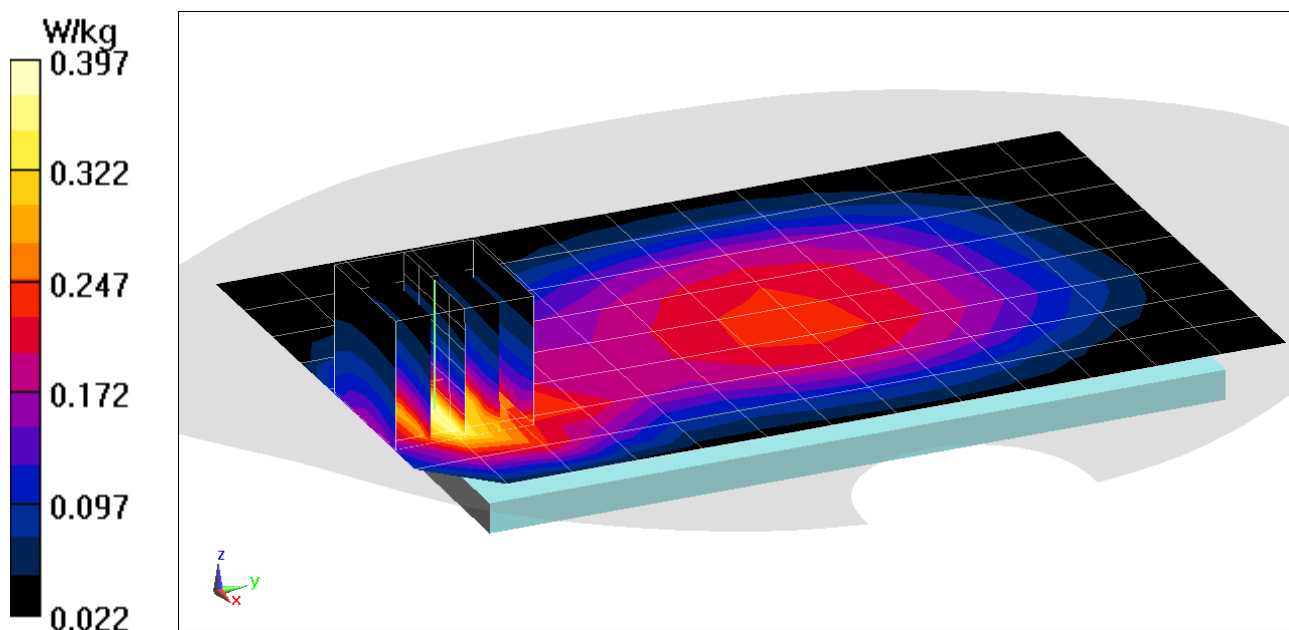

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 707.5$  MHz;  $\sigma = 0.932$  S/m;  $\epsilon_r = 53.852$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp:21.0°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 707.5 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Body SAR, Left Edge, Mid.ch, 10 MHz Bandwidth  
QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.10 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.522 W/kg

**SAR(1 g) = 0.366 W/kg**

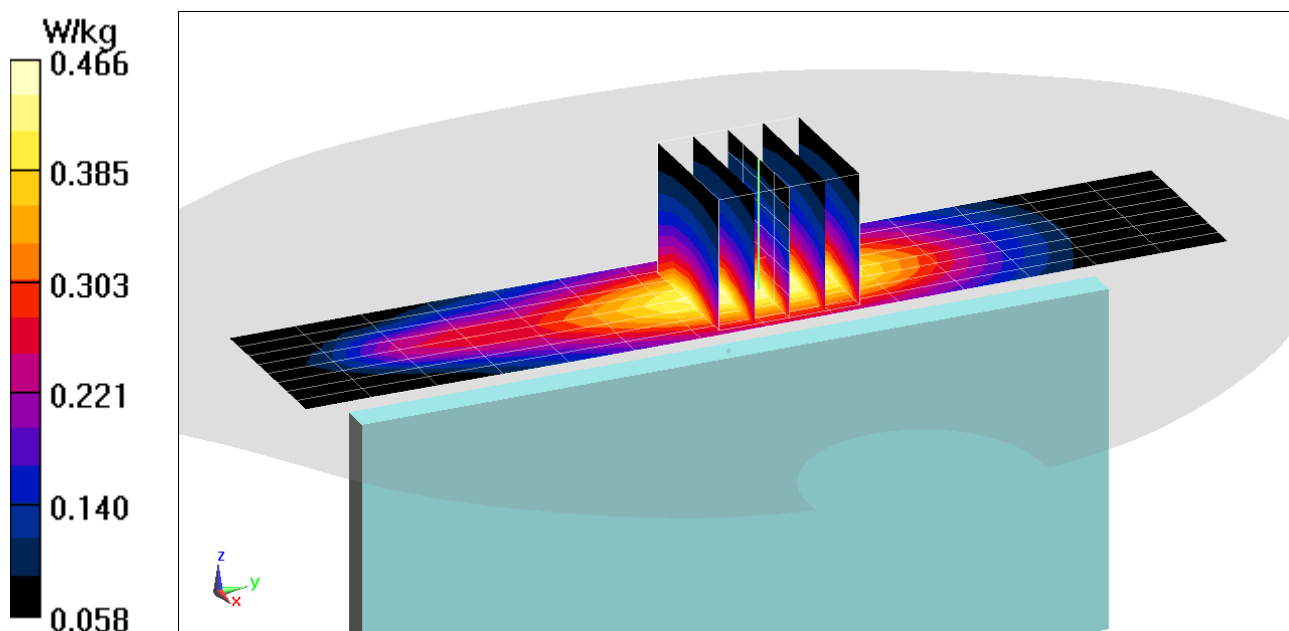

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.684$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 21.0°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 782 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth  
QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.02 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.420 W/kg

**SAR(1 g) = 0.253 W/kg**

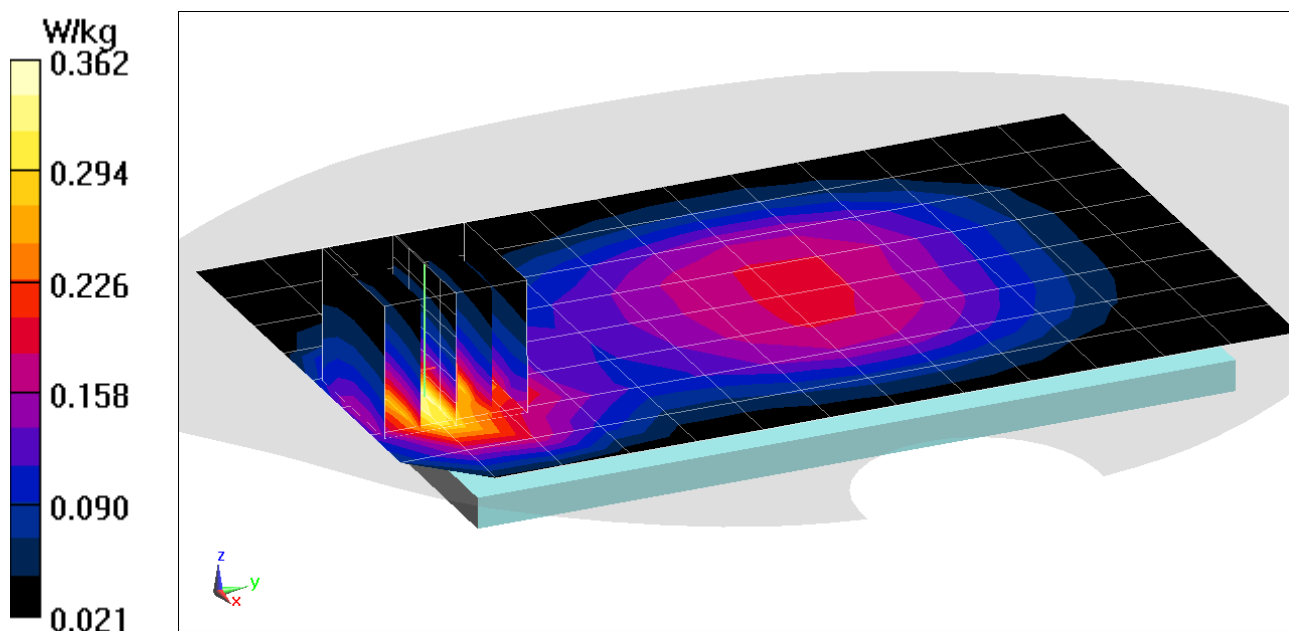

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 53.684$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 21.0°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7410; ConvF(10.01, 10.01, 10.01) @ 782 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1630

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 13, Body SAR, Left Edge, Mid.ch, 10 MHz Bandwidth  
QPSK, 1 RB, 25 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.75 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.432 W/kg

**SAR(1 g) = 0.300 W/kg**

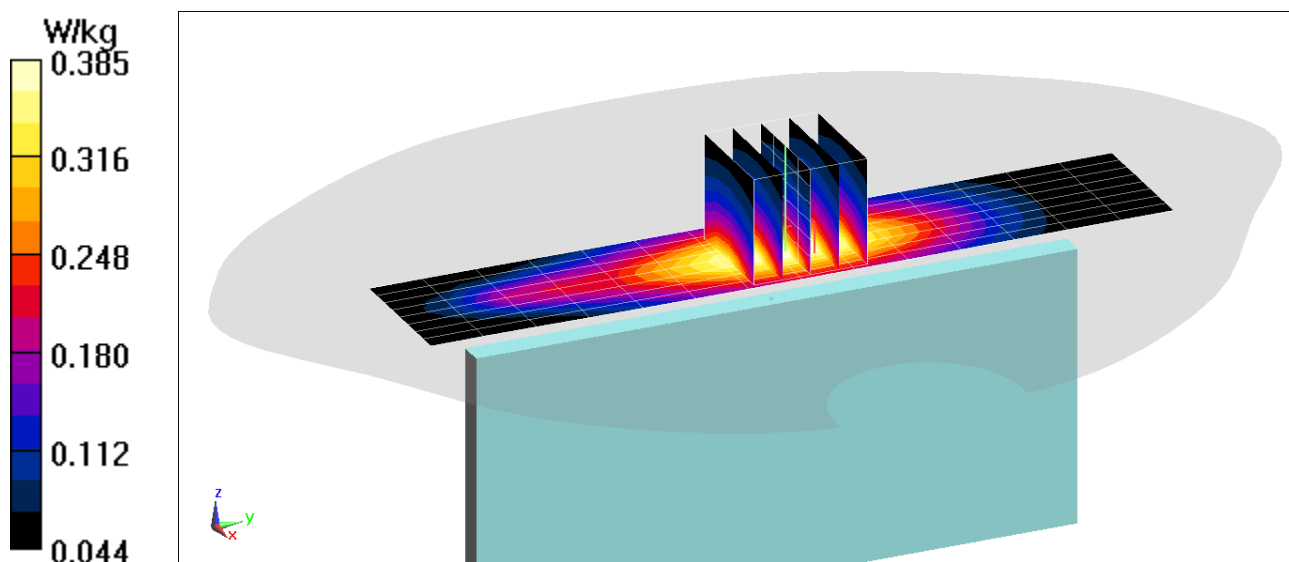

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.953 \text{ S/m}$ ;  $\epsilon_r = 54.623$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 22.0°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 831.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch, 15 MHz Bandwidth  
QPSK, 1 RB, 36 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.02 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.576 W/kg

**SAR(1 g) = 0.360 W/kg**

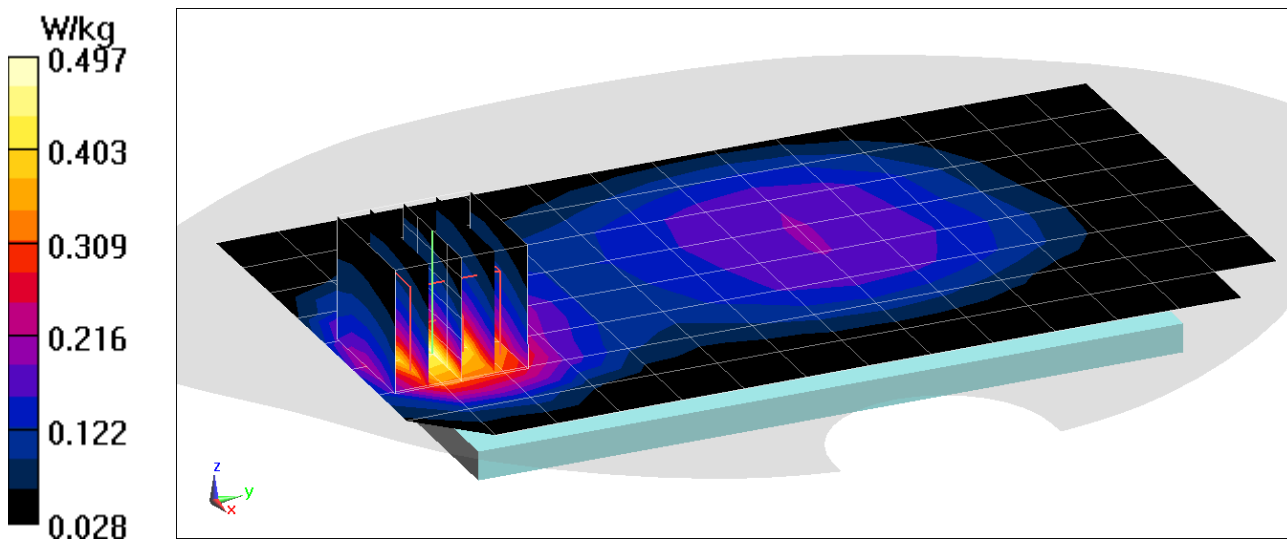

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body; Medium parameters used (interpolated):

$f = 831.5$  MHz;  $\sigma = 0.953$  S/m;  $\epsilon_r = 54.623$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 22.0°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7570; ConvF(9.83, 9.83, 9.83) @ 831.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 26 (Cell.), Body SAR, Bottom Edge, Mid.ch, 15 MHz Bandwidth  
QPSK, 1 RB, 36 RB Offset**


**Area Scan (11x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.76 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.716 W/kg

**SAR(1 g) = 0.394 W/kg**

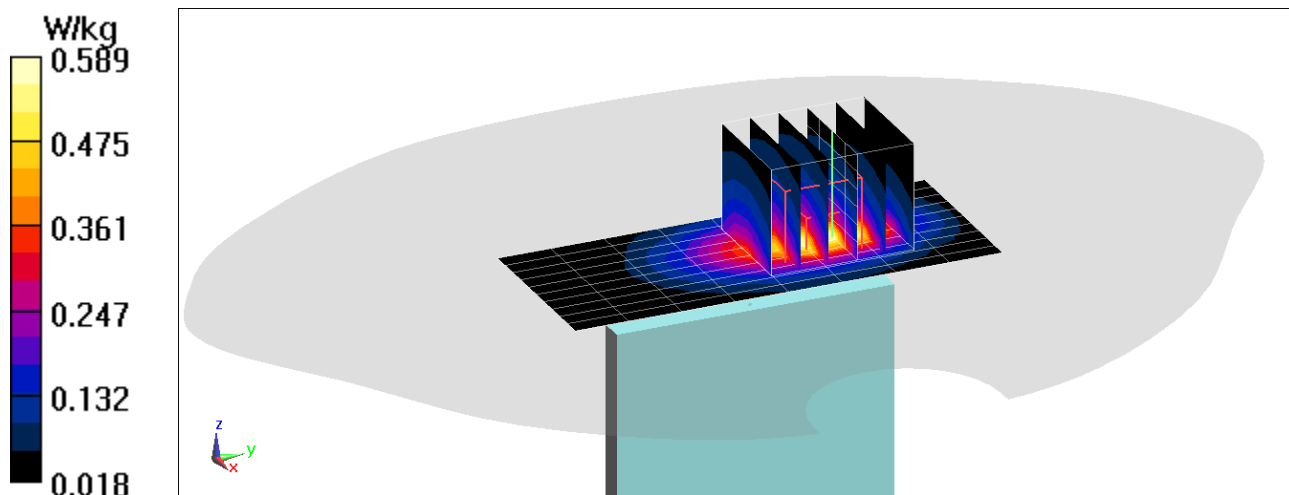



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1745 \text{ MHz}$ ;  $\sigma = 1.475 \text{ S/m}$ ;  $\epsilon_r = 53.947$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/15/2020; Ambient Temp: 23.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1745 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 24.05 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.756 W/kg**

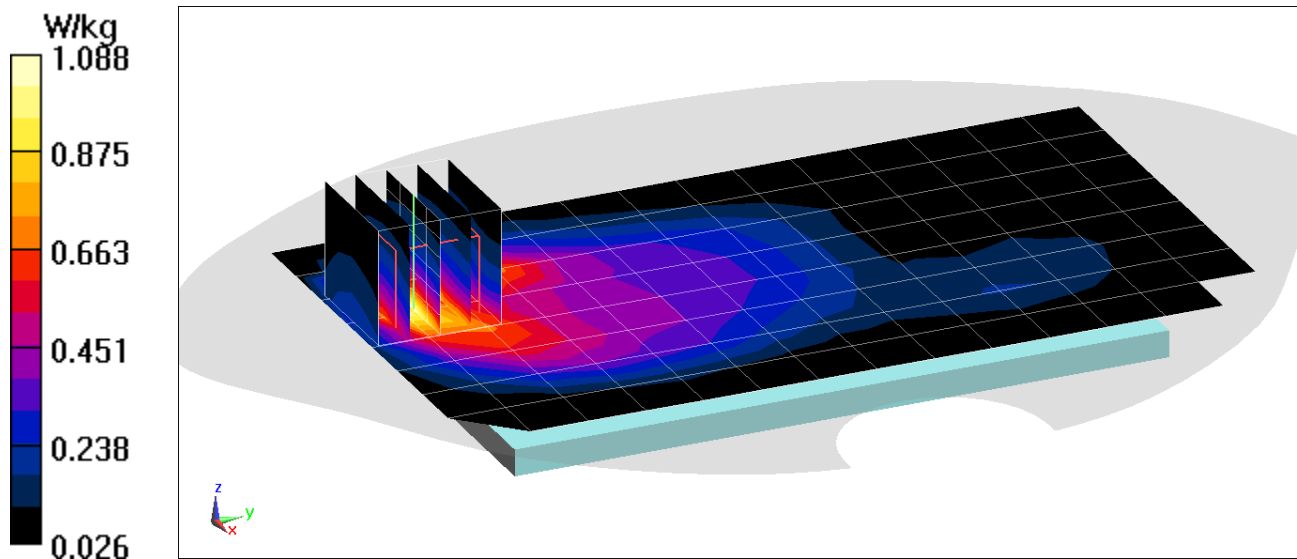

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1770 \text{ MHz}$ ;  $\sigma = 1.503 \text{ S/m}$ ;  $\epsilon_r = 53.858$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/15/2020; Ambient Temp: 23.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1770 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Body SAR, Bottom Edge, High.ch, 20 MHz Bandwidth  
QPSK, 50 RB, 0 RB Offset**


**Area Scan (11x7x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.61 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.947 W/kg**

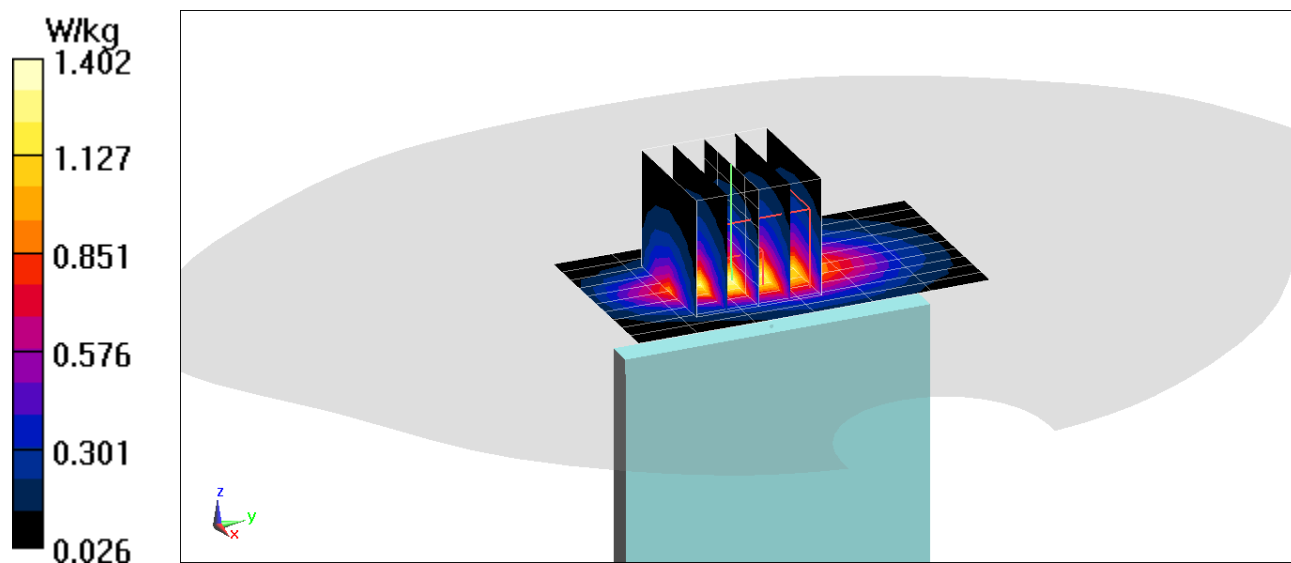

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1905 \text{ MHz}$ ;  $\sigma = 1.568 \text{ S/m}$ ;  $\epsilon_r = 53.208$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/30/2020; Ambient Temp: 23.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1905 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, High.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 18.46 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.949 W/kg

**SAR(1 g) = 0.558 W/kg**

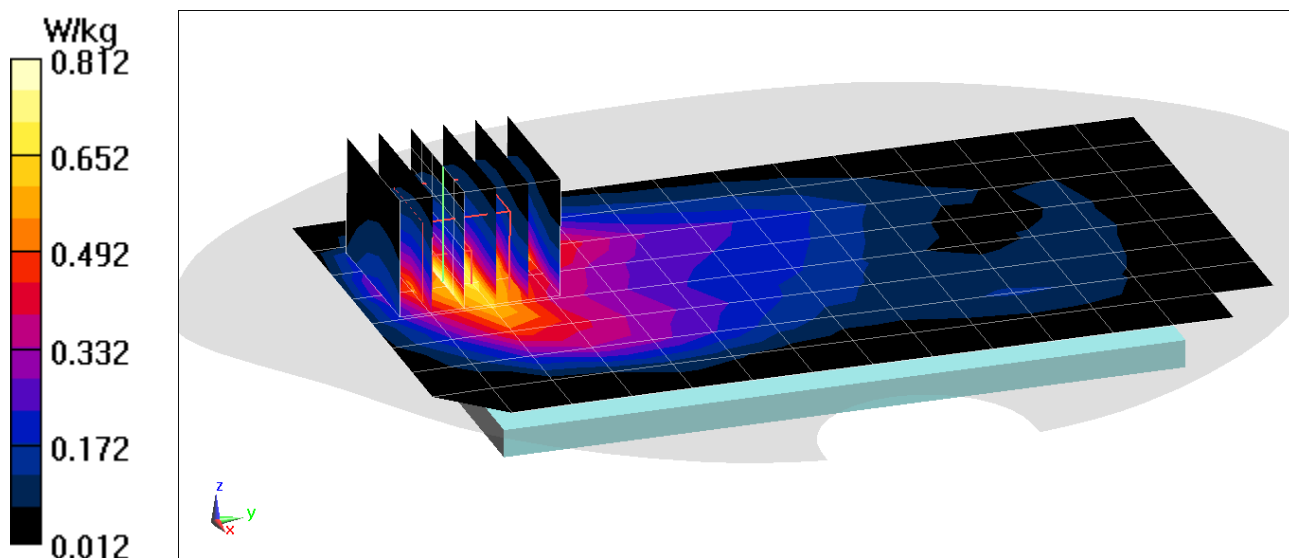

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.542 \text{ S/m}$ ;  $\epsilon_r = 53.276$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/30/2020; Ambient Temp: 23.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1882.5 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.32 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.768 W/kg**

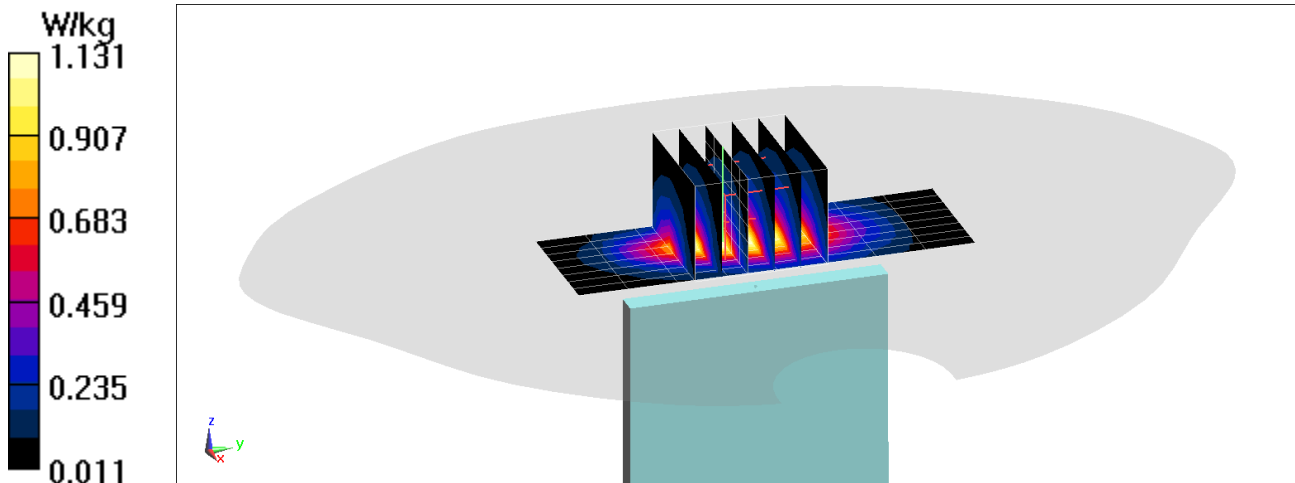

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01839**

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2593 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$ ;  $\sigma = 2.219 \text{ S/m}$ ;  $\epsilon_r = 50.83$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2593 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41, Power Class 2, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (11x16x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.63 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.531 W/kg**

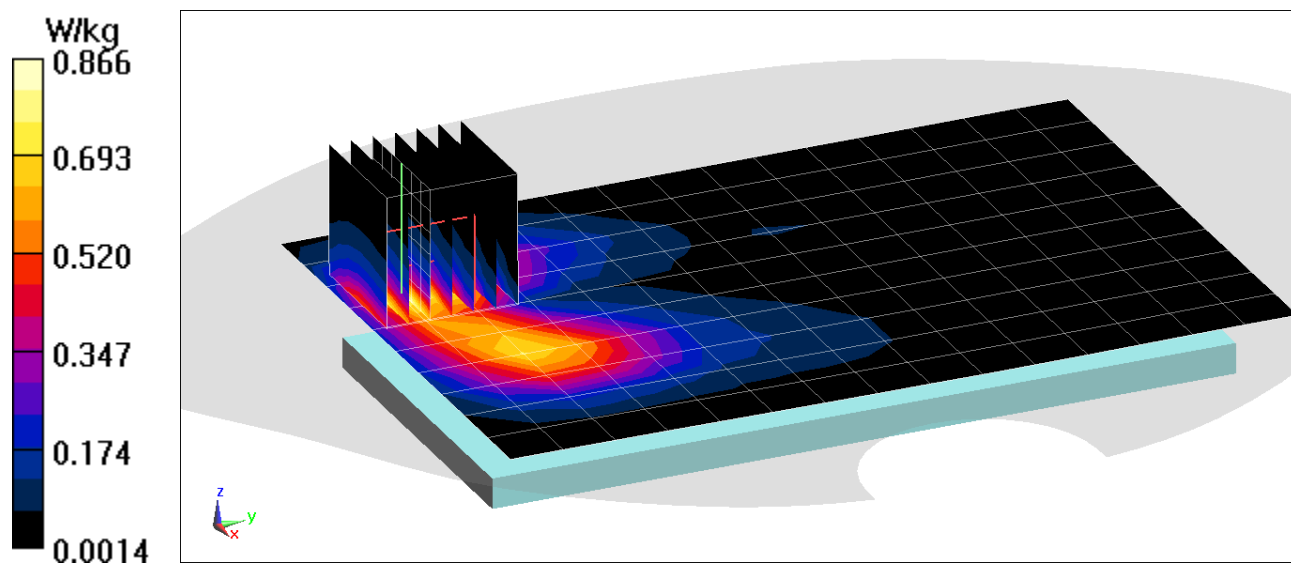

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01839**

Communication System: UID 0, \_LTE Band 41 (Class 2); Frequency: 2593 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2593$  MHz;  $\sigma = 2.219$  S/m;  $\epsilon_r = 50.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/20/2020; Ambient Temp: 22.4°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2593 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41, Power Class 2, Body SAR, Bottom Edge, Mid.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (11x10x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.10 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.843 W/kg

**SAR(1 g) = 0.392 W/kg**

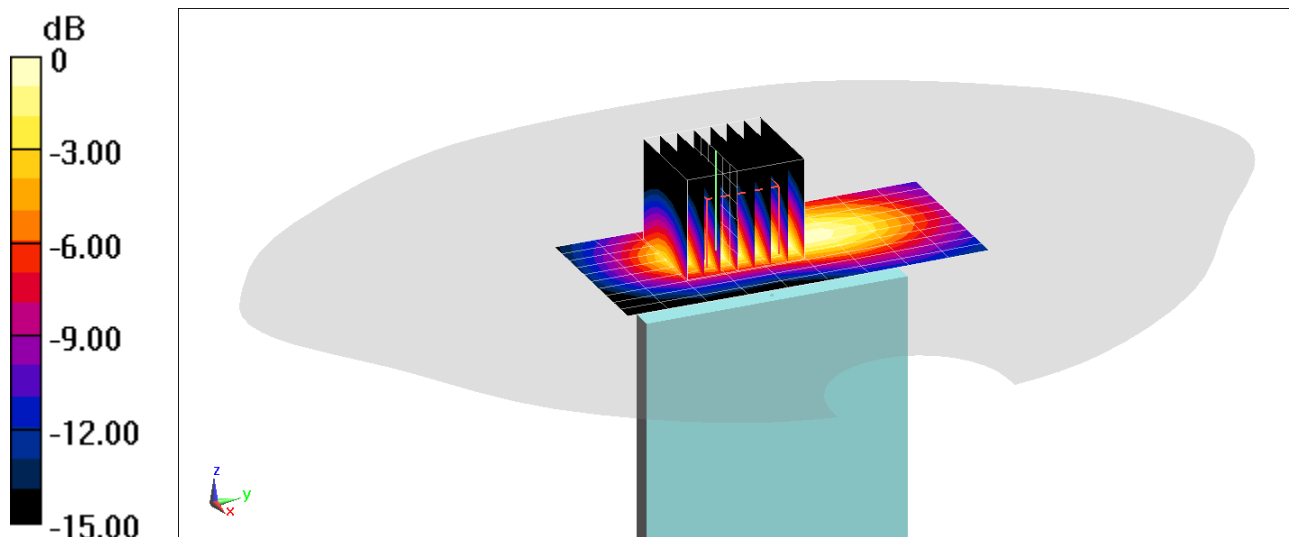

0 dB = 0.664 W/kg = -1.78 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01953**

Communication System: UID 0, 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$ ;  $\sigma = 1.999 \text{ S/m}$ ;  $\epsilon_r = 51.356$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/27/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2437 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 6, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.528 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.834 W/kg

**SAR(1 g) = 0.424 W/kg**

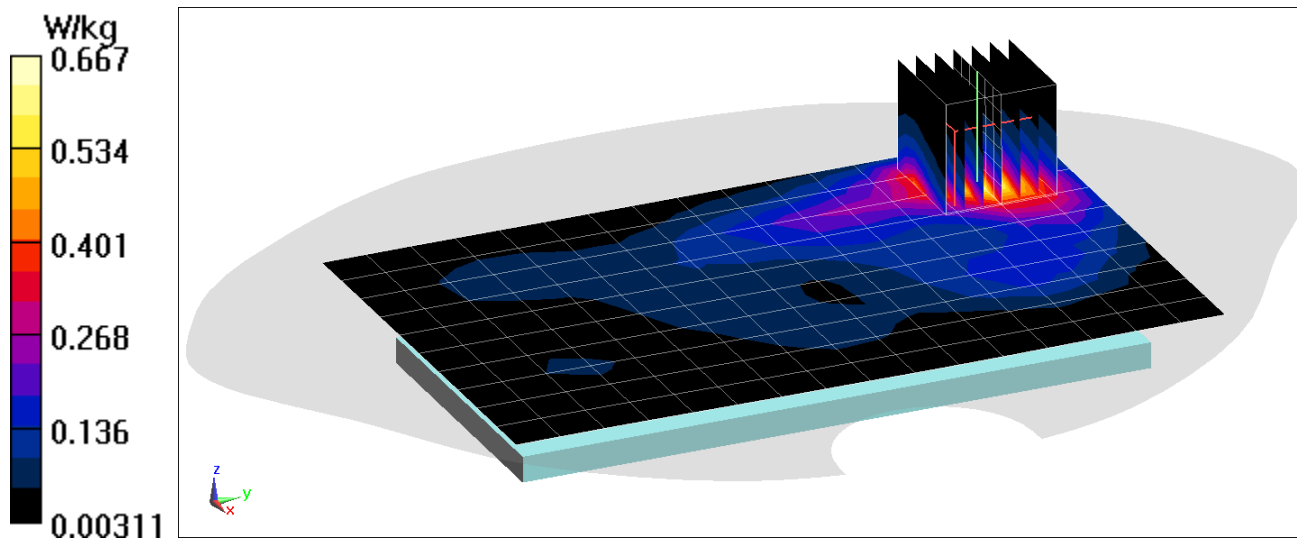

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01953**

Communication System: UID 0, 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$ ;  $\sigma = 2.028 \text{ S/m}$ ;  $\epsilon_r = 51.283$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/27/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2462 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Body SAR, Ch 11, 1 Mbps, Right Edge**


**Area Scan (10x17x1):** Measurement grid: dx=5mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.797 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.668 W/kg**

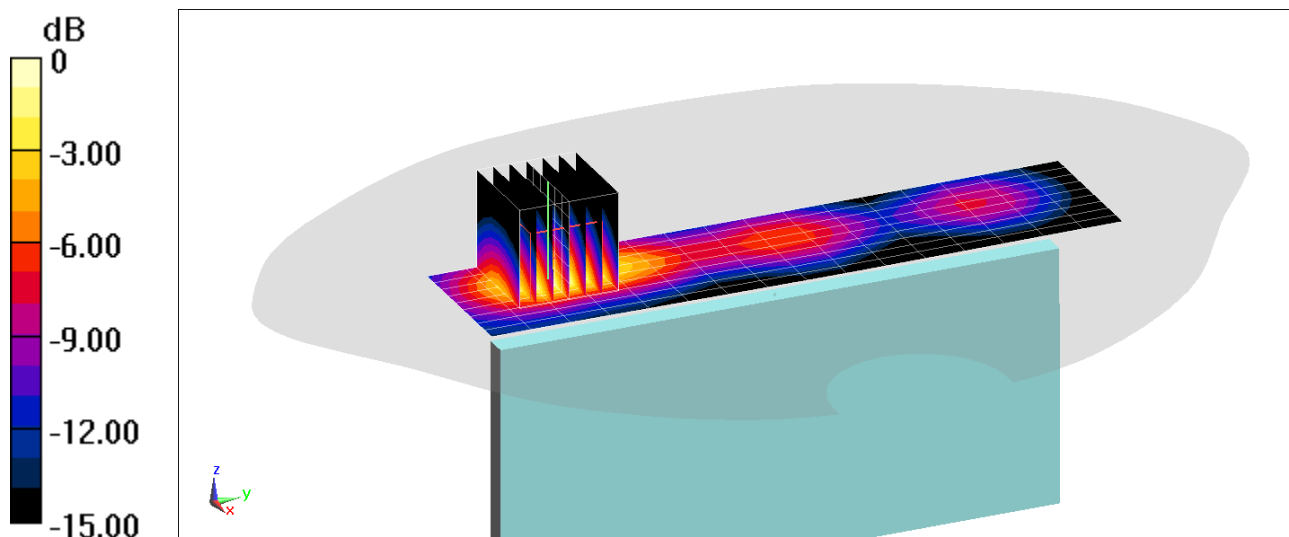

0 dB = 1.10 W/kg = 0.41 dBW/kg



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01946**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5500 \text{ MHz}$ ;  $\sigma = 5.867 \text{ S/m}$ ;  $\epsilon_r = 47.023$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/13/2020; Ambient Temp: 23.4°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7409; ConvF(4.22, 4.22, 4.22) @ 5500 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a, UNII-2C, 20 MHz Bandwidth, Body SAR, Ch 100, 6 Mbps, Back Side**


**Area Scan (13x22x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 9.262 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 0.447 W/kg**

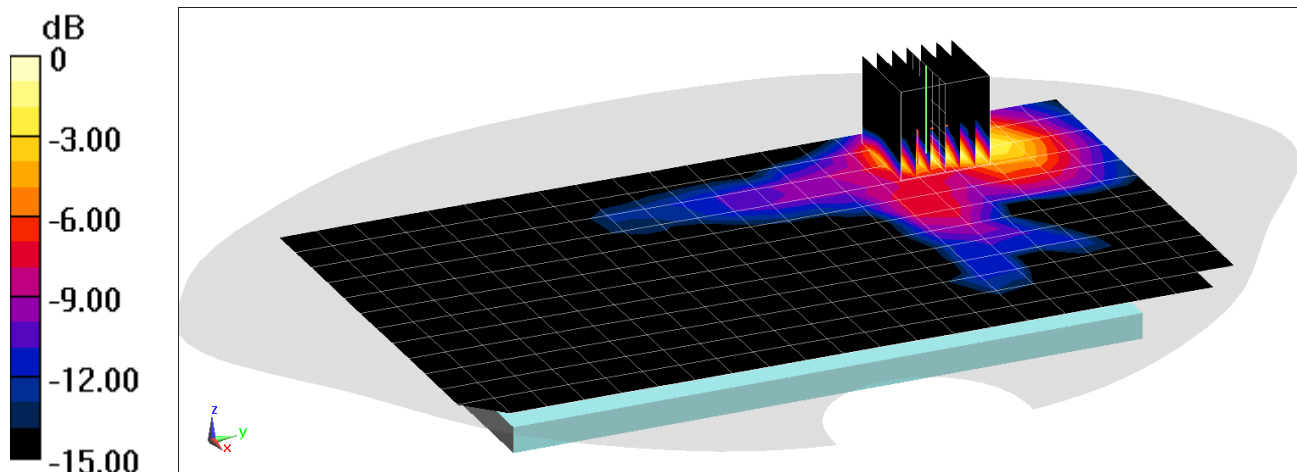

0 dB = 1.06 W/kg = 0.25 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01946**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5785 \text{ MHz}$ ;  $\sigma = 6.257 \text{ S/m}$ ;  $\epsilon_r = 46.574$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/13/2020; Ambient Temp: 23.4°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7409; ConvF(4.23, 4.23, 4.23) @ 5785 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a, U-NII-3, 20 MHz Bandwidth, Body SAR**  
**Ch 157, 6 Mbps, Right Edge**


**Area Scan (10x22x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (7x7x8)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 4.245 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.68 W/kg

**SAR(1 g) = 0.632 W/kg**

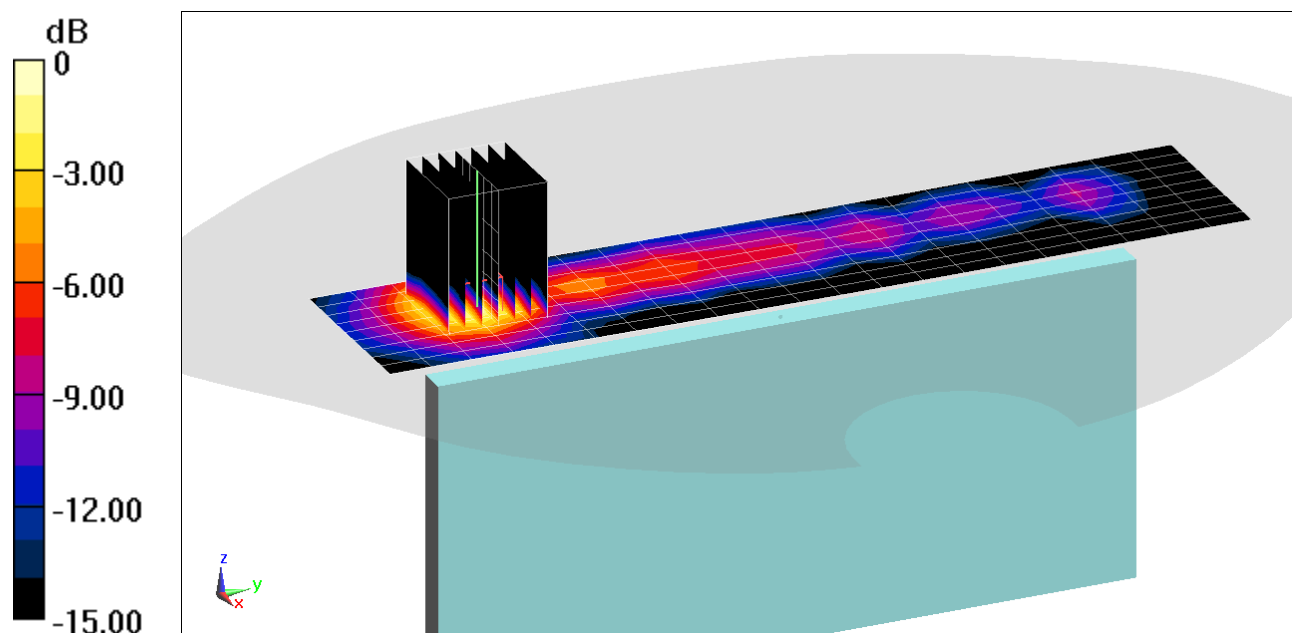

0 dB = 1.53 W/kg = 1.85 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01953**

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium: 2450 Body; Medium parameters used:

$f = 2480$  MHz;  $\sigma = 2.048$  S/m;  $\epsilon_r = 51.229$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/27/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2480 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Bluetooth, Body SAR, Ch 78, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.472 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0500 W/kg

**SAR(1 g) = 0.024 W/kg**

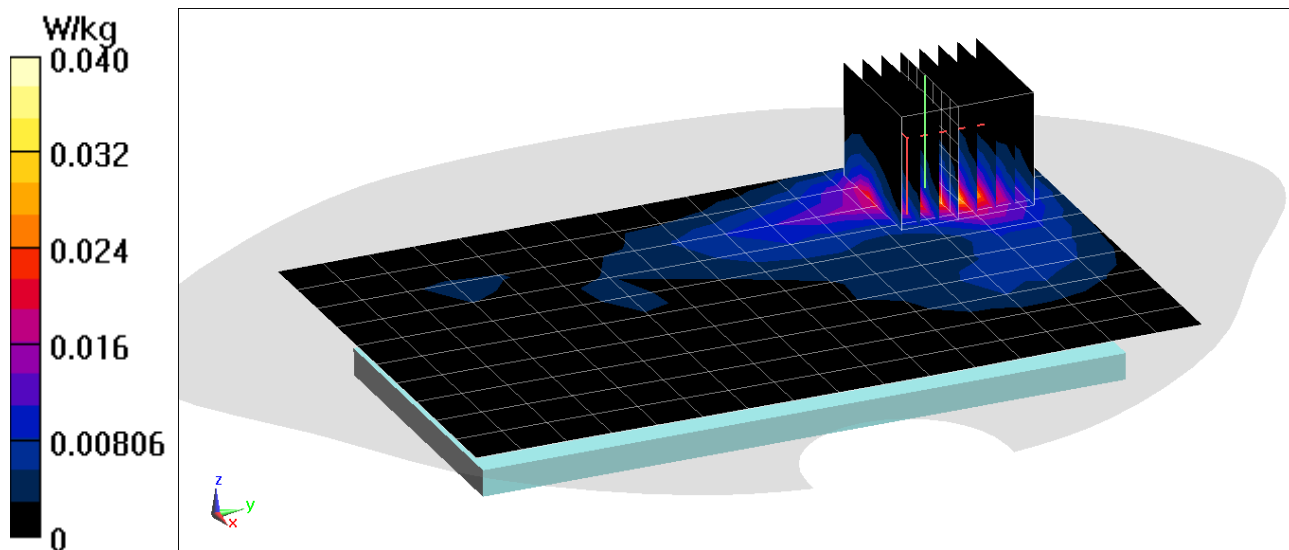

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01953**

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium: 2450 Body; Medium parameters used:

$f = 2480 \text{ MHz}$ ;  $\sigma = 2.048 \text{ S/m}$ ;  $\epsilon_r = 51.229$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/27/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7547; ConvF(7.3, 7.3, 7.3) @ 2480 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: Bluetooth, Body SAR, Ch 78, 1 Mbps, Right Edge**


**Area Scan (10x16x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.859 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0840 W/kg

**SAR(1 g) = 0.040 W/kg**

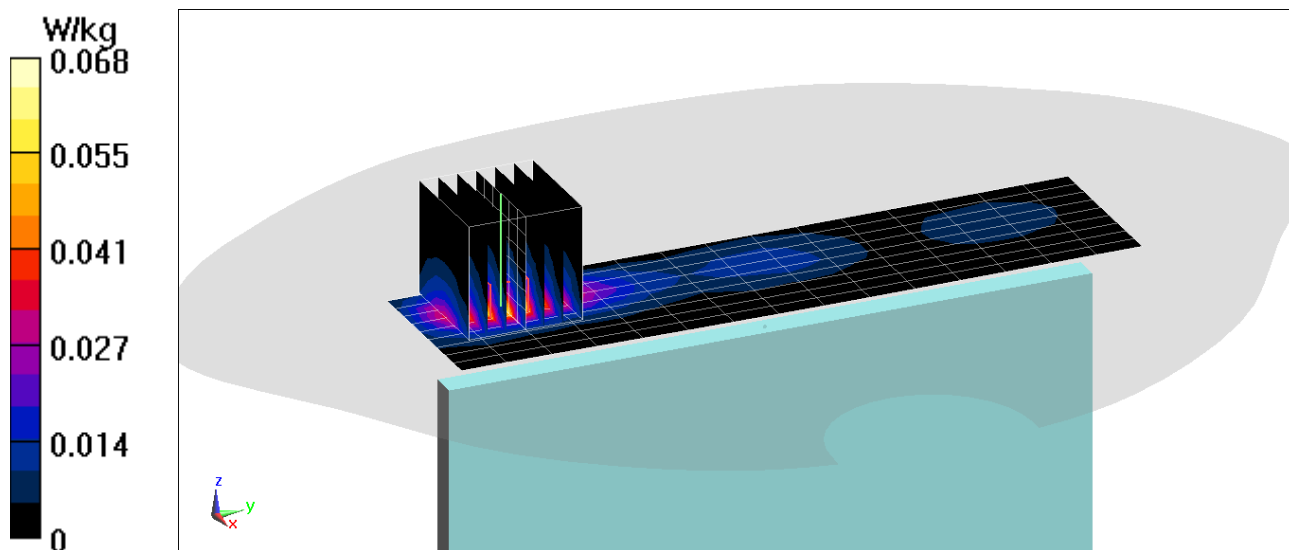

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01854**

Communication System: UID 0, UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):

$f = 1712.4$  MHz;  $\sigma = 1.451$  S/m;  $\epsilon_r = 55.128$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04/13/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1712.4 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1750, Phablet SAR, Bottom Edge, Low.ch**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (10x10x8)/Cube 0:** Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 71.98 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 21.0 W/kg

**SAR(10 g) = 2.69 W/kg**

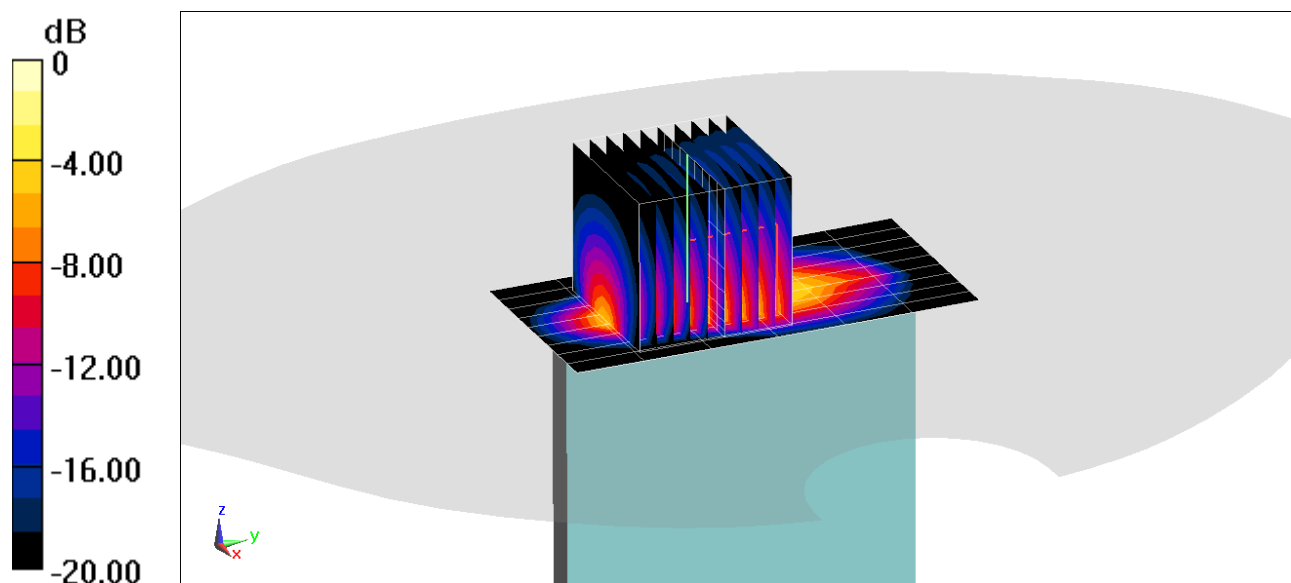

0 dB = 12.9 W/kg = 11.11 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):

$f = 1852.4$  MHz;  $\sigma = 1.522$  S/m;  $\epsilon_r = 52.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04/28/2020; Ambient Temp: 21.1°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1852.4 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: UMTS 1900, Phablet SAR, Bottom Edge, Low.ch**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (10x12x8)/Cube 0:** Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 65.80 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.3 W/kg

**SAR(10 g) = 2.36 W/kg**

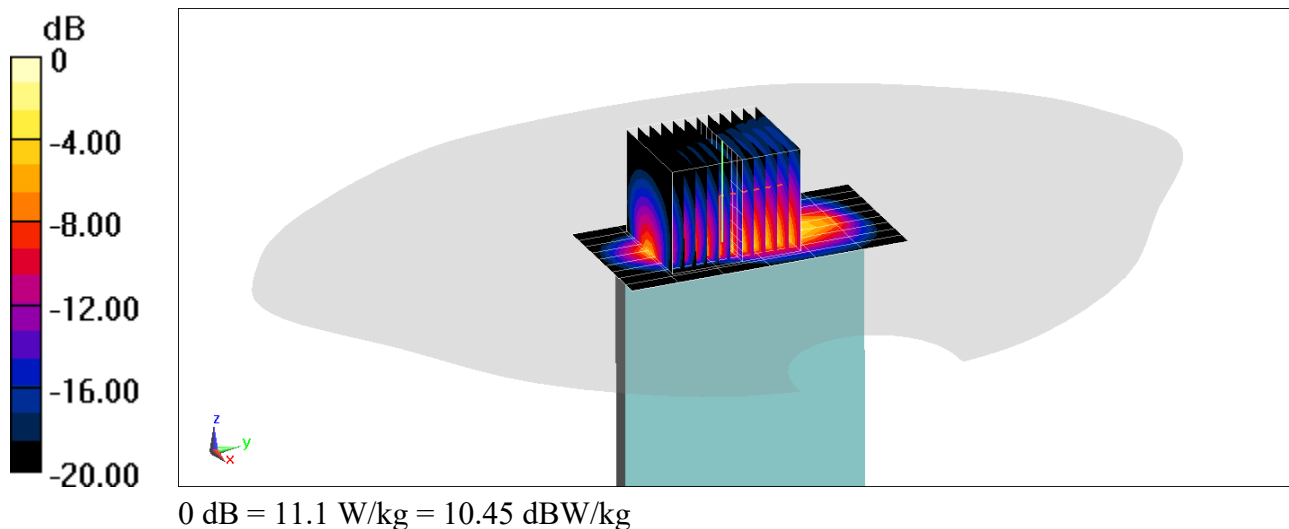

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, CDMA; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1908.75 \text{ MHz}$ ;  $\sigma = 1.511 \text{ S/m}$ ;  $\epsilon_r = 55.181$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04/30/2020; Ambient Temp: 22.3°C; Tissue Temp: 24.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1908.75 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: PCS EVDO, Phablet SAR, Bottom Edge, High.ch**


**Area Scan (10x9x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (10x15x8)/Cube 0:** Measurement grid:  $dx=3.8\text{mm}$ ,  $dy=3.8\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 56.85 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 13.6 W/kg

**SAR(10 g) = 1.84 W/kg**

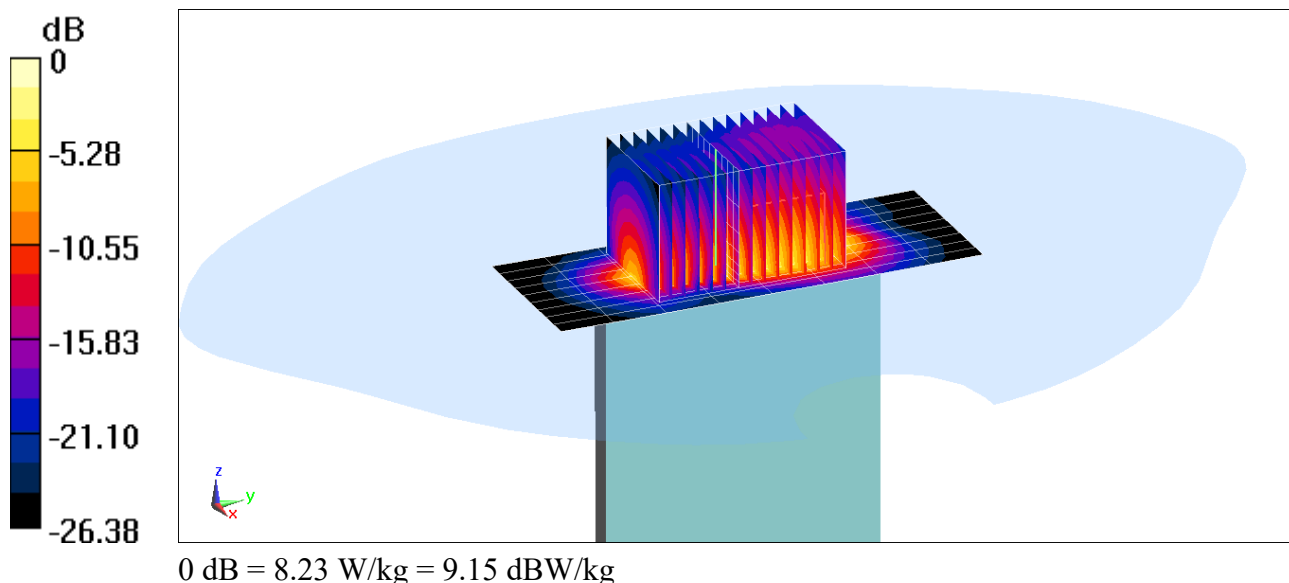

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01847**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1720 \text{ MHz}$ ;  $\sigma = 1.482 \text{ S/m}$ ;  $\epsilon_r = 53.007$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04/27/2020; Ambient Temp: 21.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7527; ConvF(8.1, 8.1, 8.1) @ 1720 MHz; Calibrated: 3/17/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 66 (AWS), Phablet SAR, Bottom Edge, Low.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (11x8x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (10x11x8)/Cube 0:** Measurement grid:  $dx=3.8\text{mm}$ ,  $dy=3.8\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 68.08 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(10 g) = 2.59 W/kg**

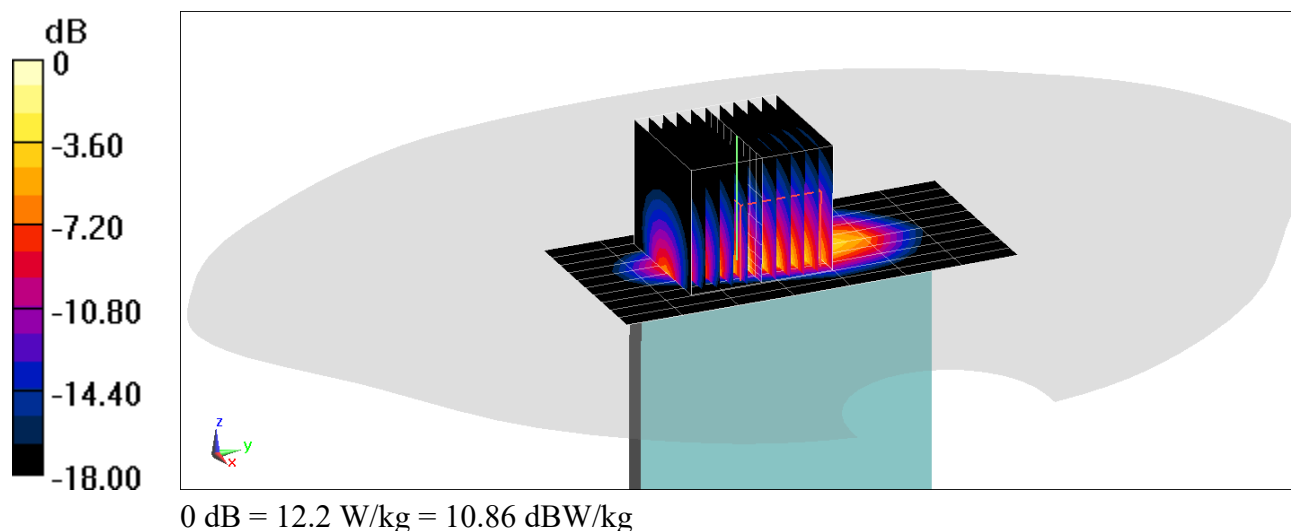



# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01821**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1860 \text{ MHz}$ ;  $\sigma = 1.518 \text{ S/m}$ ;  $\epsilon_r = 53.341$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04/30/2020; Ambient Temp: 23.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7552; ConvF(7.58, 7.58, 7.58) @ 1860 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1449; Calibrated: 9/12/2019

Phantom: Left Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 25 (PCS), Phablet SAR, Bottom Edge, Low.ch, 20 MHz Bandwidth  
QPSK, 1 RB, 50 RB Offset**


**Area Scan (9x9x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (10x11x8)/Cube 0:** Measurement grid:  $dx=3.8\text{mm}$ ,  $dy=3.8\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Reference Value = 64.72 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(10 g) = 2.37 W/kg**

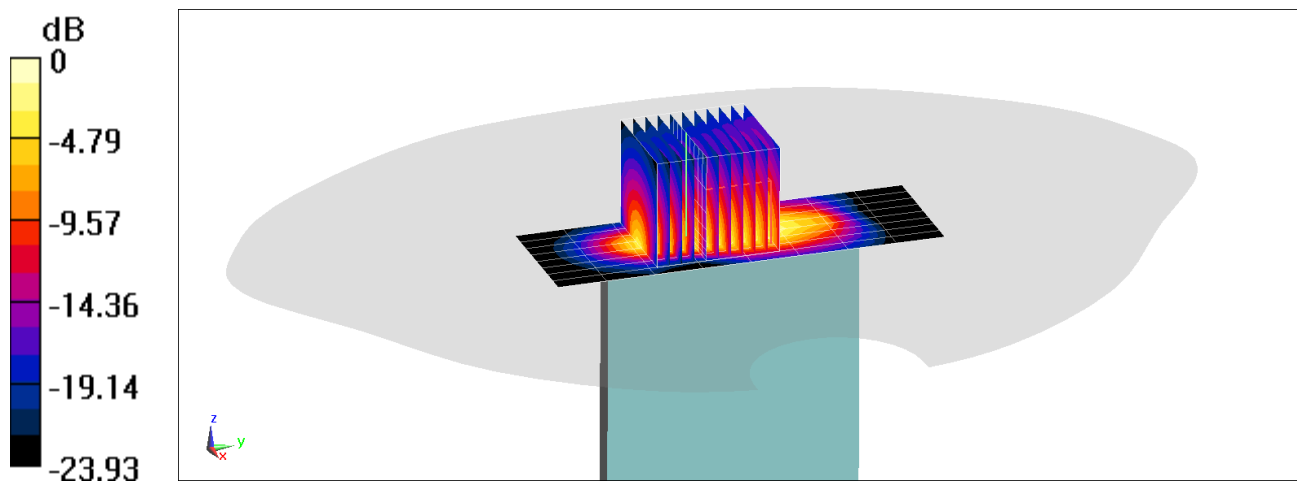

0 dB = 10.2 W/kg = 10.09 dBW/kg

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01839**

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2593 MHz; Duty Cycle: 1:2.31

Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$ ;  $\sigma = 2.181 \text{ S/m}$ ;  $\epsilon_r = 50.888$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04/27/2020; Ambient Temp: 23.2°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7547; ConvF(7.18, 7.18, 7.18) @ 2593 MHz; Calibrated: 7/15/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 7/11/2019

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41, Phablet SAR Power Class 2, Bottom Edge, Mid.ch**  
**20 MHz Bandwidth, QPSK, 100 RB, 0 RB Offset**


**Area Scan (11x10x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 64.44 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 22.6 W/kg

**SAR(10 g) = 2.48 W/kg**

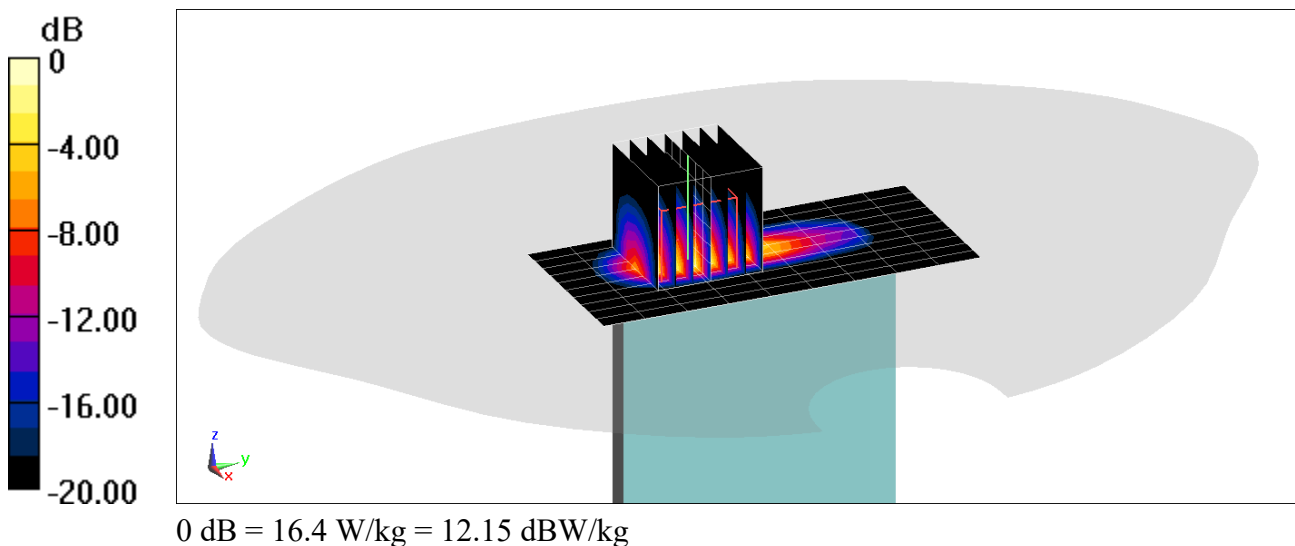

# PCTEST

**DUT: ZNFQ730VM; Type: Portable Handset; Serial: 01946**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5500$  MHz;  $\sigma = 5.831$  S/m;  $\epsilon_r = 46.673$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 04-20-2020; Ambient Temp: 22.8°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7409; ConvF(4.22, 4.22, 4.22) @ 5500 MHz; Calibrated: 6/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/20/2019

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11a, U-NII-2C, 20 MHz Bandwidth, Phablet SAR  
Ch 100, 6 Mbps, Right Edge**


**Area Scan (10x22x1):** Measurement grid: dx=5mm, dy=10mm

**Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 15.77 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 43.6 W/kg

**SAR(10 g) = 1.52 W/kg**

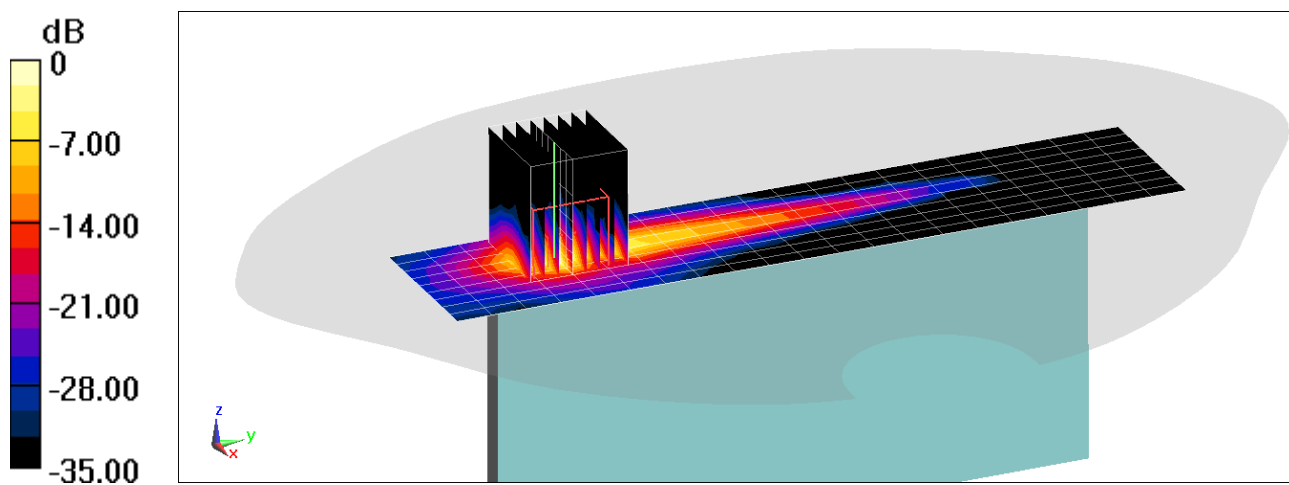

0 dB = 24.0 W/kg = 13.80 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used:

$f = 750 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.758$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04/30/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF(9.95, 9.95, 9.95) @ 750 MHz; Calibrated: 7/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/11/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.41 W/kg

**SAR(1 g) = 1.68 W/kg**

Deviation(1 g) = 4.61%

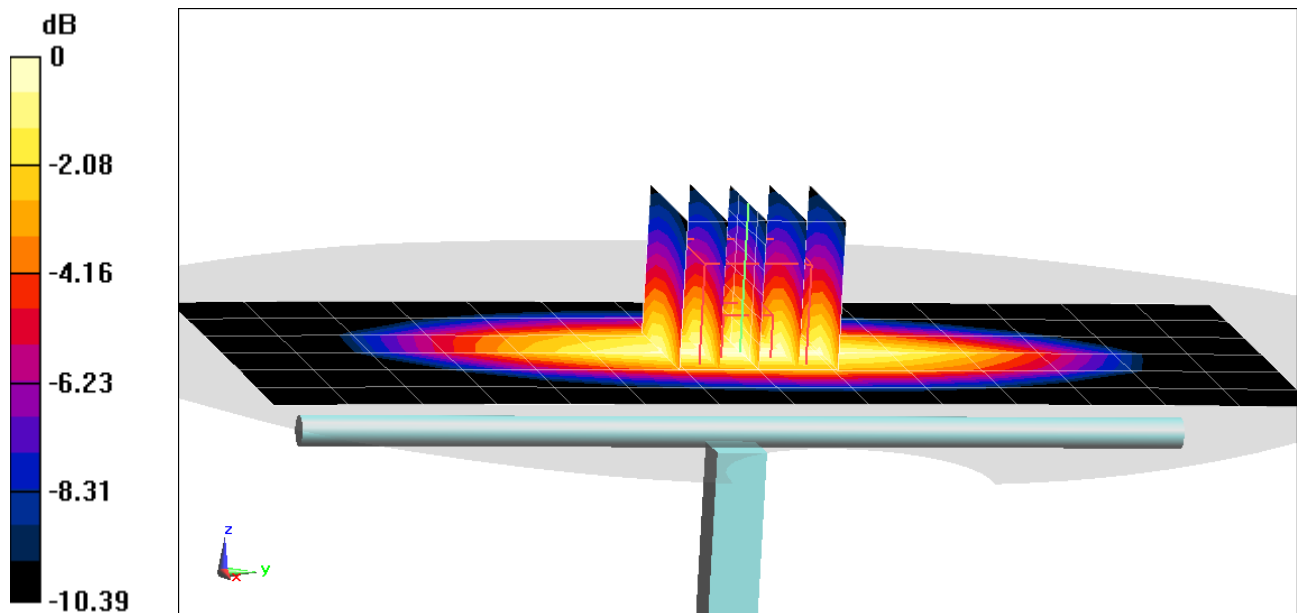

0 dB = 2.19 W/kg = 3.40 dBW/kg

# PCTEST

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.899 \text{ S/m}$ ;  $\epsilon_r = 41.278$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 04/30/2020; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7570; ConvF(9.85, 9.85, 9.85) @ 835 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn859; Calibrated: 12/18/2019

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1964

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.98 W/kg

**SAR(1 g) = 1.93 W/kg**

Deviation(1 g) = 0.00%

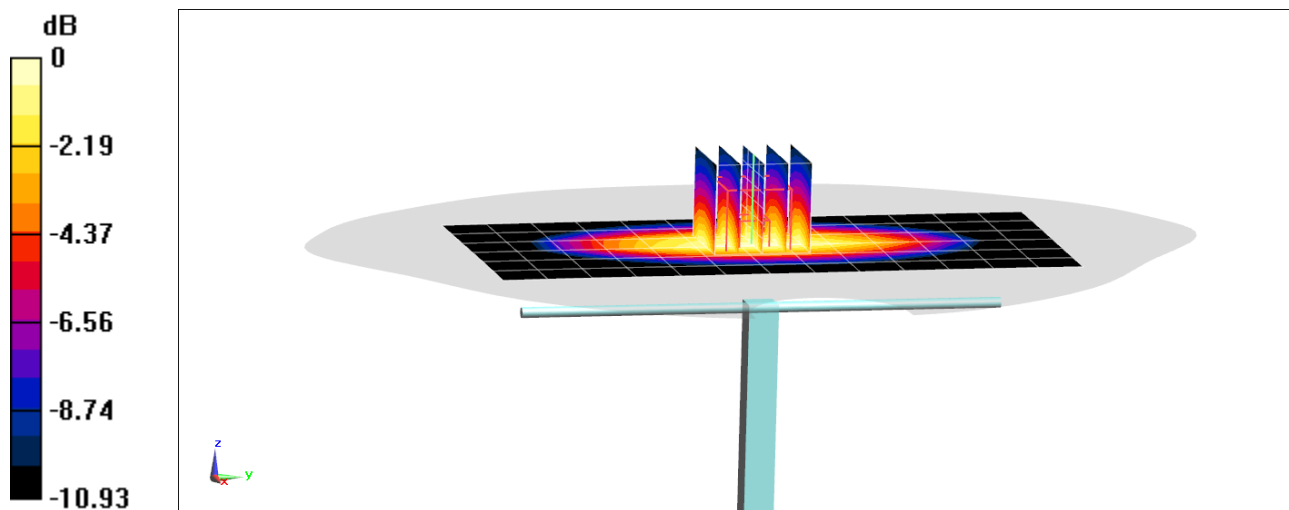

0 dB = 2.61 W/kg = 4.17 dBW/kg

# PCTEST

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.935 \text{ S/m}$ ;  $\epsilon_r = 42.993$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/02/2020; Ambient Temp: 20.8°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.96 W/kg

**SAR(1 g) = 1.93 W/kg**

Deviation(1 g) = 2.33%

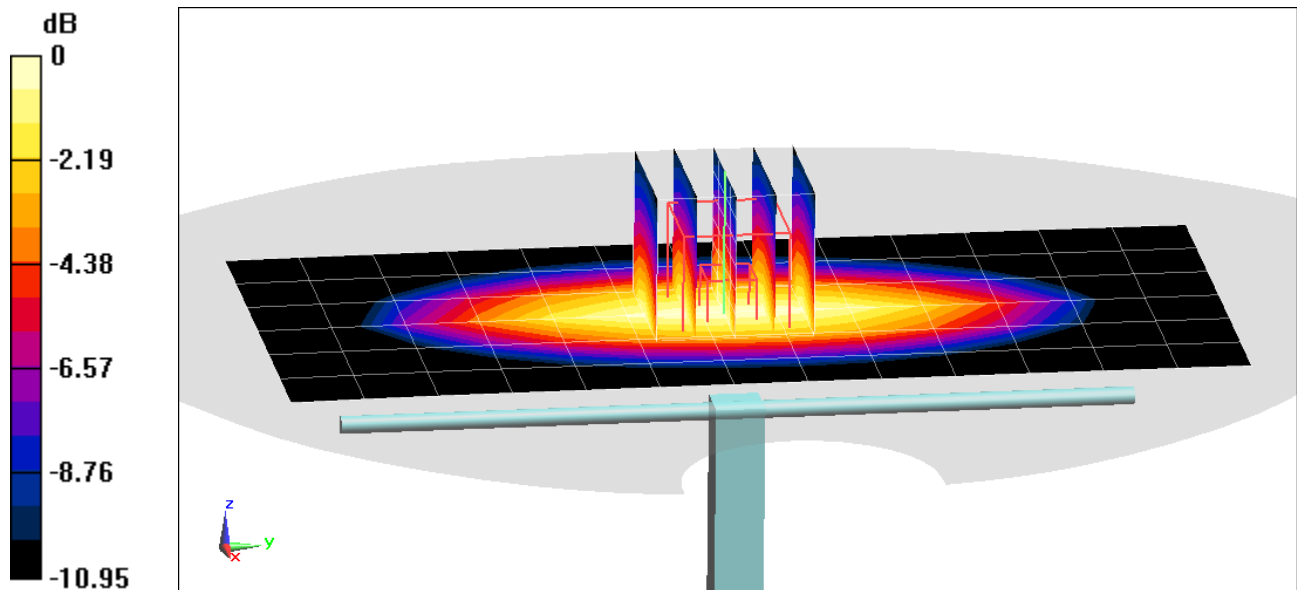

0 dB = 2.61 W/kg = 4.17 dBW/kg

# PCTEST

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head; Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.936 \text{ S/m}$ ;  $\epsilon_r = 42.833$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05/04/2020; Ambient Temp: 23.3°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7551; ConvF(9.88, 9.88, 9.88) @ 835 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.02 W/kg

**SAR(1 g) = 1.96 W/kg**

Deviation(1 g) = 3.92%

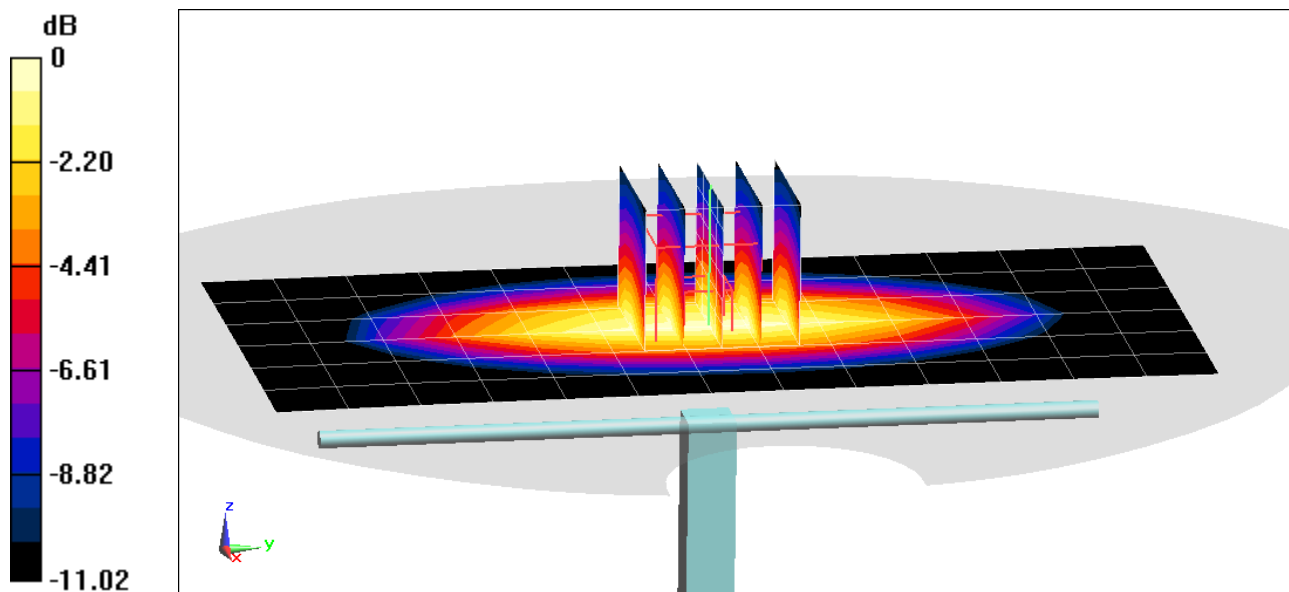

0 dB = 2.66 W/kg = 4.25 dBW/kg



# PCTEST

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.391 \text{ S/m}$ ;  $\epsilon_r = 41.092$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/13/2020; Ambient Temp: 21.7°C; Tissue Temp: 20.4°C

Probe: EX3DV4 - SN7551; ConvF(8.34, 8.34, 8.34) @ 1750 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.03 W/kg

**SAR(1 g) = 3.75 W/kg**

Deviation(1 g) = 1.35%

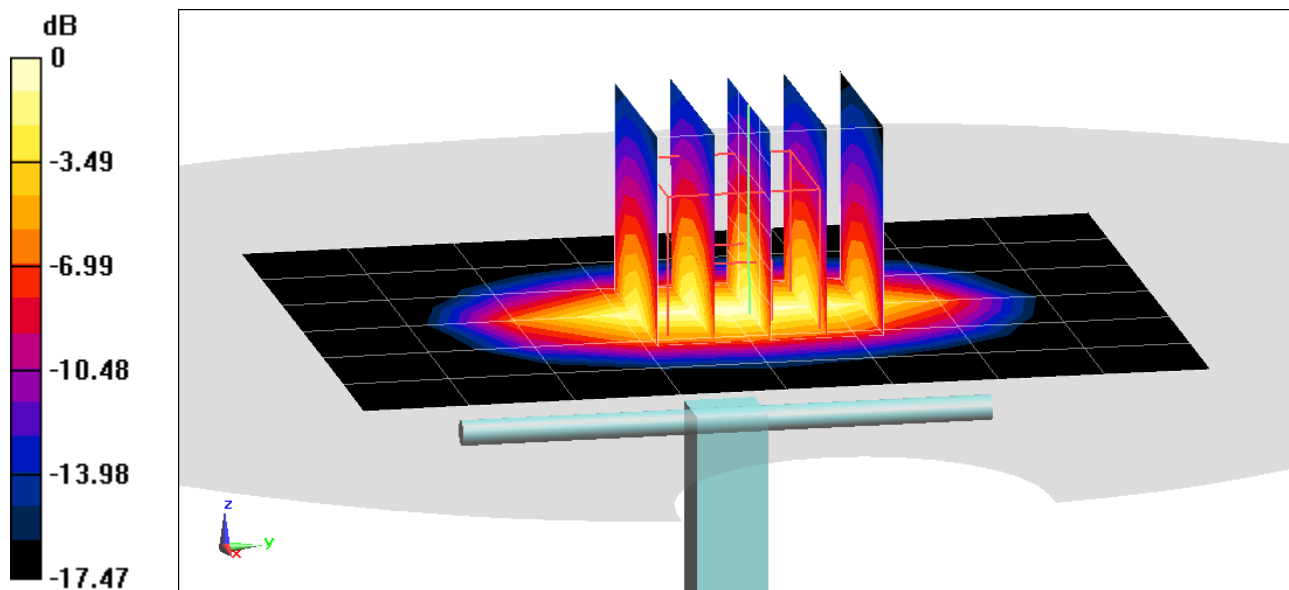

0 dB = 5.81 W/kg = 7.64 dBW/kg

# PCTEST

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d149**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.444 \text{ S/m}$ ;  $\epsilon_r = 38.615$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7406; ConvF(8.18, 8.18, 8.18) @ 1900 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.75 W/kg

**SAR(1 g) = 4.06 W/kg**

Deviation(1 g) = 3.31%

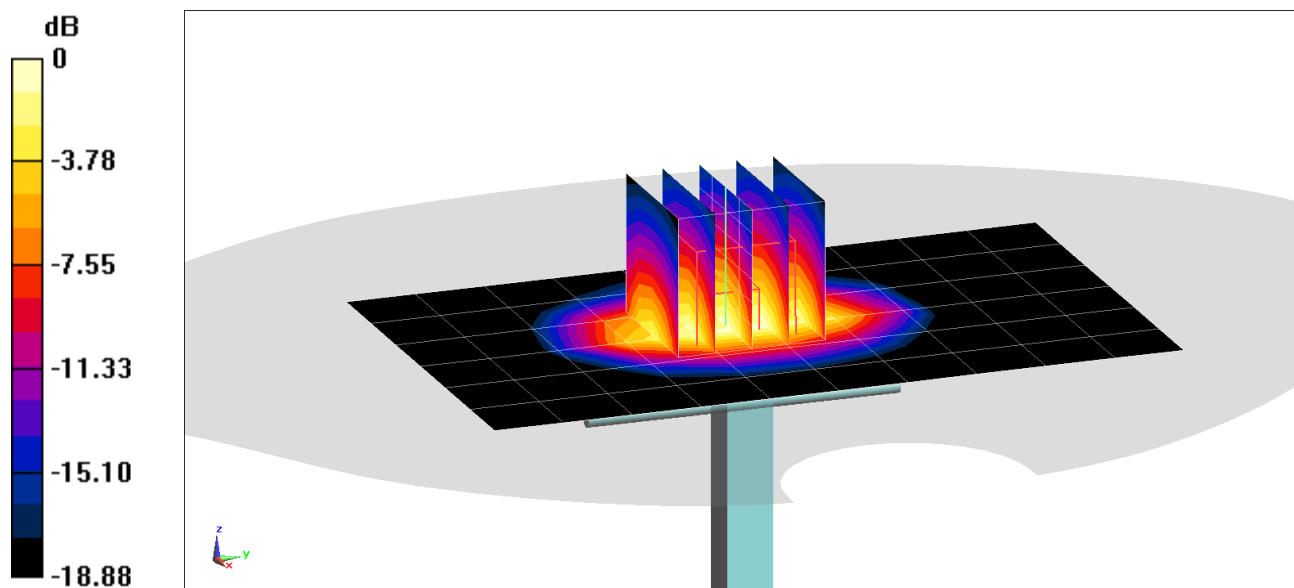

0 dB = 6.43 W/kg = 8.08 dBW/kg

# PCTEST

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.404 \text{ S/m}$ ;  $\epsilon_r = 38.45$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/30/2020; Ambient Temp: 21.2°C; Tissue Temp: 20.8°C

Probe: EX3DV4 - SN7406; ConvF(8.18, 8.18, 8.18) @ 1900 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 8.08 W/kg

**SAR(1 g) = 4.13 W/kg**

Deviation(1 g) = 3.77%

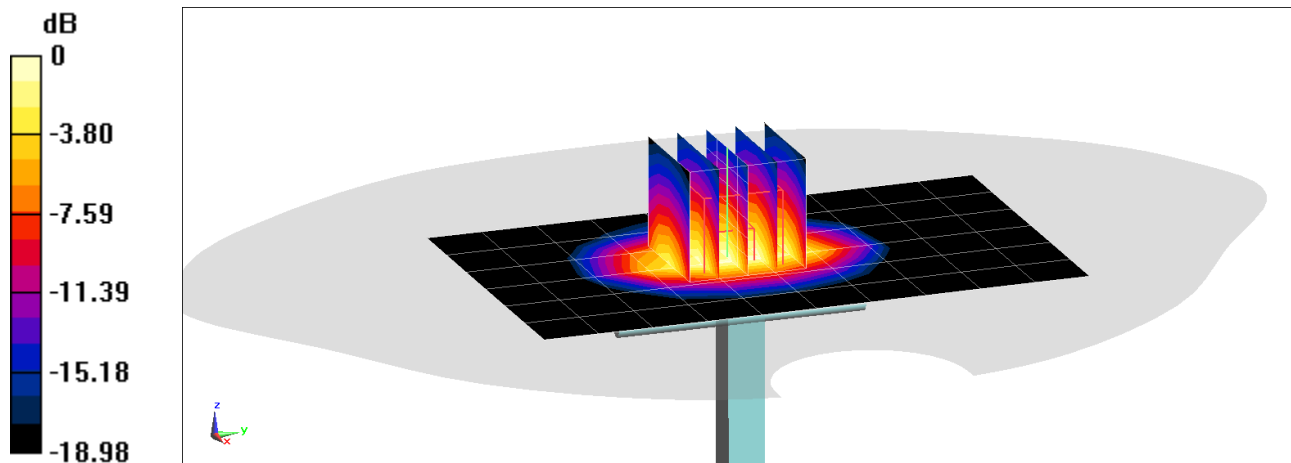

0 dB = 6.57 W/kg = 8.18 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.798 \text{ S/m}$ ;  $\epsilon_r = 37.577$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/12/2020; Ambient Temp: 23.7°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2450 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.2 W/kg

**SAR(1 g) = 5.18 W/kg**

Deviation(1 g) = -2.45%

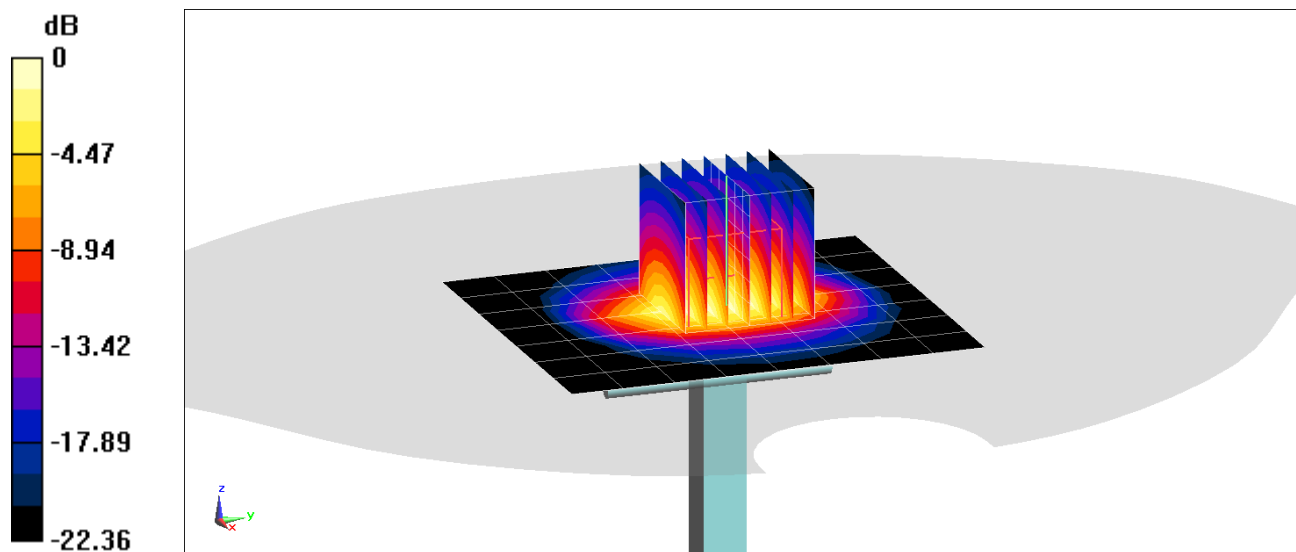

0 dB = 8.79 W/kg = 9.44 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.804 \text{ S/m}$ ;  $\epsilon_r = 39.074$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/26/2020; Ambient Temp: 22.1°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2450 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.4 W/kg

**SAR(1 g) = 5.36 W/kg**

Deviation(1 g) = 1.71%

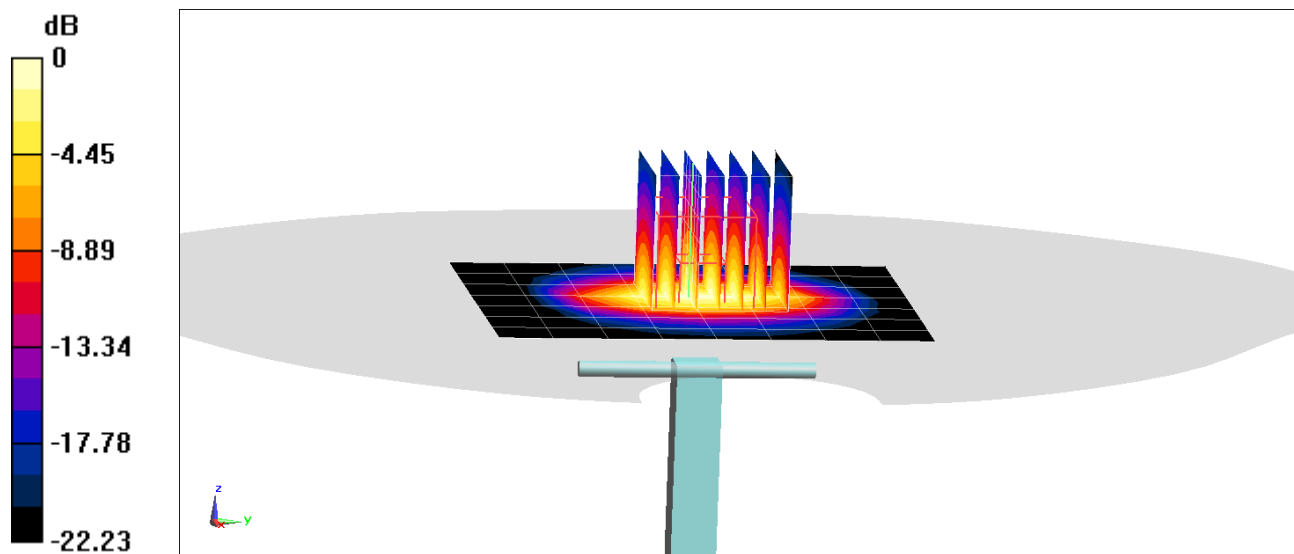

0 dB = 8.98 W/kg = 9.53 dBW/kg

# PCTEST

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.787 \text{ S/m}$ ;  $\epsilon_r = 39.796$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/29/2020; Ambient Temp: 22.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2450 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

## 2450 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 5.27 W/kg**

Deviation(1 g) = -0.75%

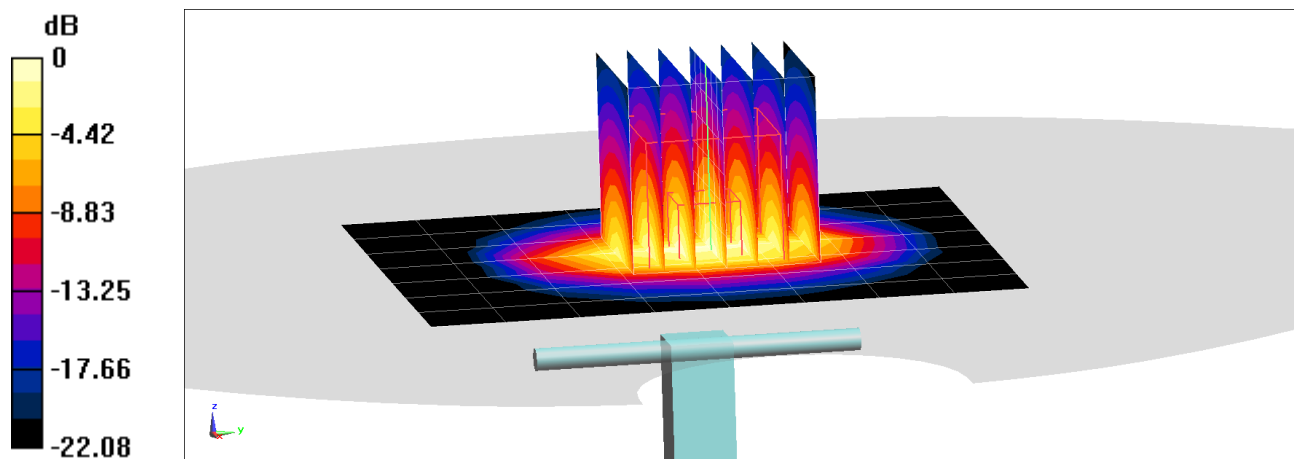

0 dB = 8.78 W/kg = 9.43 dBW/kg

# PCTEST

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1064**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600$  MHz;  $\sigma = 1.899$  S/m;  $\epsilon_r = 38.094$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/19/2020; Ambient Temp: 22.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2600 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 2600 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 12.9 W/kg

**SAR(1 g) = 5.74 W/kg**

Deviation(1 g) = -1.20%

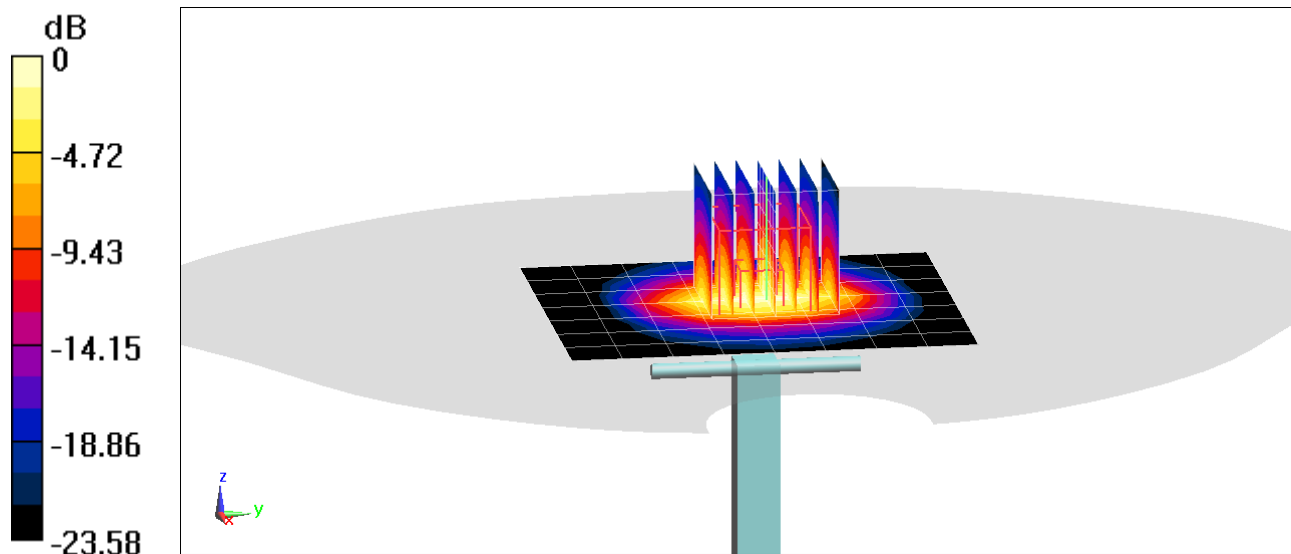

# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5250 \text{ MHz}$ ;  $\sigma = 4.6 \text{ S/m}$ ;  $\epsilon_r = 35.19$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/21/2020; Ambient Temp: 22.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7406; ConvF(5.54, 5.54, 5.54) @ 5250 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Peak SAR (extrapolated) = 15.5 W/kg

**SAR(1 g) = 3.84 W/kg**

Deviation(1 g) = -4.95%

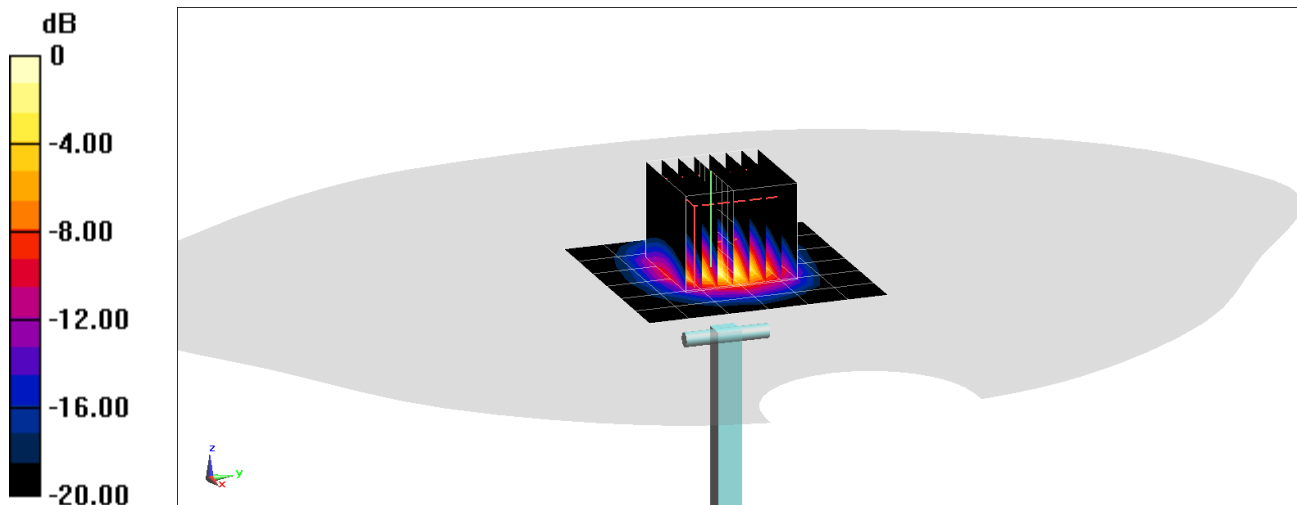

0 dB = 8.97 W/kg = 9.53 dBW/kg



# PCTEST

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Head Medium parameters used:

$f = 5600$  MHz;  $\sigma = 5.005$  S/m;  $\epsilon_r = 34.569$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 04/21/2020; Ambient Temp: 22.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7406; ConvF(4.94, 4.94, 4.94) @ 5600 MHz; Calibrated: 5/16/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn728; Calibrated: 5/8/2019

Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

## 5600 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.5 W/kg

**SAR(1 g) = 3.83 W/kg**

Deviation(1 g) = -7.38%

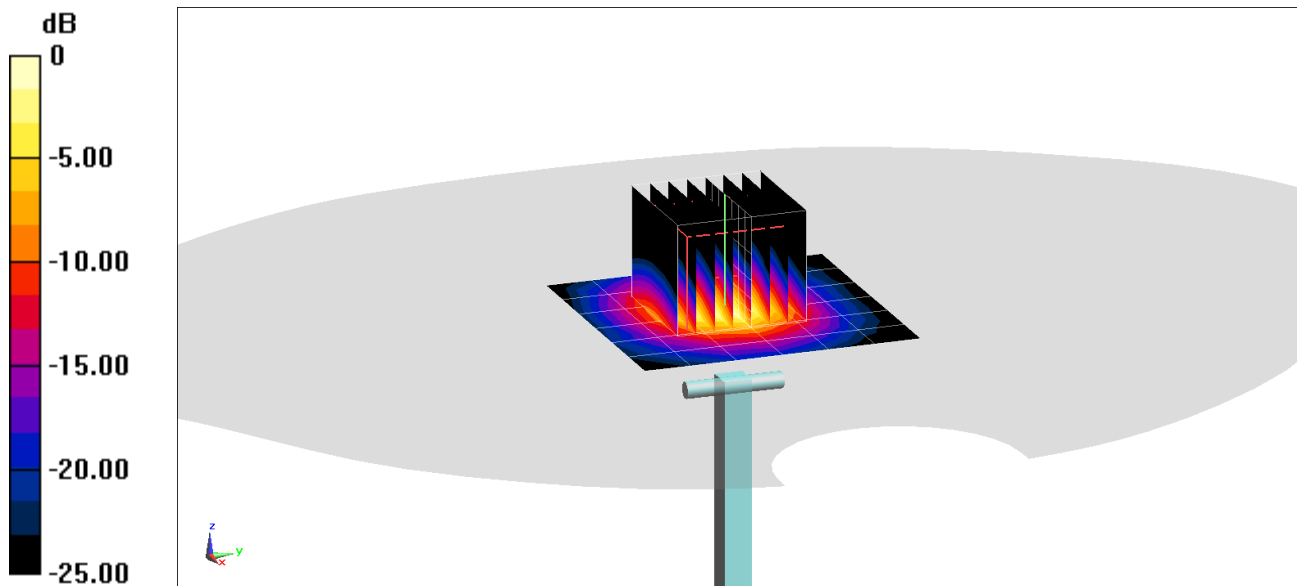

0 dB = 9.20 W/kg = 9.64 dBW/kg