

TEST REPORT

Applicant: INFINIX MOBILITY LIMITED.

Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Product Name: Mobile Phone


FCC ID: 2AIZN-YY5-X6855

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02


Report Number: 2402Y37628E-RF-00A

Report Date: 2024/12/6

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



Reviewed By: Pedro Yun
Title: Project Engineer



Approved By: Gavin Xu
Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL ▲	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 OPERATION FREQUENCY DETAIL	7
3.2 EUT OPERATION CONDITION	7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.4 SUPPORT CABLE LIST AND DETAILS	7
3.5 BLOCK DIAGRAM OF TEST SETUP	8
3.6 TEST FACILITY	10
3.7 MEASUREMENT UNCERTAINTY	10
4. REQUIREMENTS AND TEST PROCEDURES	11
4.1 AC LINE CONDUCTED EMISSIONS	11
4.1.1 Applicable Standard	11
4.1.2 EUT Setup	12
4.1.3 EMI Test Receiver Setup	12
4.1.4 Test Procedure	13
4.1.5 Corrected Result & Margin Calculation	13
4.1.6 Test Result	13
4.2 RADIATION SPURIOUS EMISSIONS	14
4.2.1 Applicable Standard	14
4.2.2 EUT Setup	14
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
4.2.4 Test Procedure	16
4.2.5 Corrected Result & Margin Calculation	17
4.2.6 Test Result	17
4.3 MINIMUM 6 DB BANDWIDTH	18
4.3.1 Applicable Standard	18
4.3.2 EUT Setup	18
4.3.3 Test Procedure	18
4.3.4 Test Result	18
4.4 MAXIMUM CONDUCTED OUTPUT POWER	19
4.4.1 Applicable Standard	19
4.4.2 EUT Setup	19
4.4.3 Test Procedure	19
4.4.4 Test Result	19
4.5 MAXIMUM POWER SPECTRAL DENSITY	20
4.5.1 Applicable Standard	20

4.5.2 EUT Setup	20
4.5.3 Test Procedure	20
4.5.4 Test Result	20
4.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	21
4.6.1 Applicable Standard	21
4.6.2 EUT Setup	21
4.6.3 Test Procedure	21
4.6.4 Test Result	21
4.7 DUTY CYCLE	22
4.7.1 EUT Setup	22
4.7.2 Test Procedure	22
4.7.3 Judgment	22
4.8 ANTENNA REQUIREMENT	23
4.8.1 Applicable Standard	23
4.8.2 Judgment	23
5. Test DATA AND RESULTS	24
5.1 AC LINE CONDUCTED EMISSIONS	24
5.2 RADIATION SPURIOUS EMISSIONS	29
5.3 6DB EMISSION BANDWIDTH	68
5.4 MAXIMUM CONDUCTED OUTPUT POWER	70
5.5 POWER SPECTRAL DENSITY	73
5.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	75
5.7 DUTY CYCLE	77
EXHIBIT A - EUT PHOTOGRAPHS	78
EXHIBIT B - TEST SETUP PHOTOGRAPHS	79
EXHIBIT C - RF EXPOSURE EVALUATION	80
MAXIMUM PERMISSIBLE EXPOSURE (MPE)	80

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402Y37628E-RF-00A	Original Report	2024/12/6

1. GENERAL INFORMATION

1.1 General Description Of Equipment under Test

EUT Name:	Mobile Phone
EUT Model:	X6855
Operation Frequency:	BLE 1Mbps:2402-2480 MHz BLE 2Mbps:2404-2478 MHz
Maximum Peak Output Power (Conducted):	-1.08 dBm
Modulation Type:	GFSK
Rated Input Voltage:	DC 3.91V from battery or DC 5.0/11/20V from adapter
Serial Number:	AC Line Conducted Emissions: 2TA3-1(Configuration 1#) Radiated Spurious Emission: 2TA3-1(Configuration 1#), 2TA3-13(Configuration 2#) RF Conducted: 2TA3-3(Configuration 1#)
EUT Received Date:	2024/10/22
EUT Received Status:	Good

Note: The difference between the multiple configurations is the memory and some smaller components, Please refer to the declaration letter for more detail, which was provided by manufacturer. Test was performed with Configuration 1# except radiated emission spot check with Configuration 2#.

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	INFINIX MOBILITY LIMITED	U900XSA	Input: 100-240Vac 50/60Hz 2.3A Output: 5.0Vdc 3A 15W or 5-11Vdc 8.2A MAX or 5-20Vdc 4.5A 90W MAX
Earphone	INFINIX MOBILITY LIMITED	Unknown	Unknown

1.3 Antenna Information Detail ▲

Antenna	Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Chain 0 (ANT 13)	Shenzhen HuiKe Mold Plastic Co., Ltd	IFA	50	2.4-2.5GHz	-2.32dBi
Chain 1 (ANT 14)		IFA	50	2.4-2.5GHz	-3.9dBi
The design of compliance with §15.203:					
<input checked="" type="checkbox"/>	Unit uses a permanently attached antenna.				
<input type="checkbox"/>	Unit uses a unique coupling to the intentional radiator.				
<input type="checkbox"/>	Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205,§15.209,§15.247(d)	Radiated Spurious Emission	Compliant
FCC §15.207(a)(2)	6dB Emission Bandwidth	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant
Note 1: For AC line conducted emissions, the maximum output power channel was tested.		
Note 2: For Radiated Spurious Emissions 9kHz~ 1GHz and 18-25GHz, the maximum output power channel was tested.		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For BLE 1Mbps:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404
...
...
...	...	38	2478
19	2440	39	2480

For BLE 2Mbps:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2404	20	2442
...
...
...	...	37	2476
19	2440	38	2478

Note: The above frequencies in bold were performed the test.

3.2 EUT Operation Condition

The device have two antennas for BLE transmission, but only one output chain from the RF chip, all RF conducted tested at the maximum antenna, except power test at the both chains.

The EUT was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration as below:

EUT Exercise Software:	engineering mode		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting Chain 0&Chain 1		
	Lowest Channel	Middle Channel	Highest Channel
BLE 1Mbps	6	6	6
BLE 2Mbps	6	6	6

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	no	no	1.0	Adapter	EUT


3.5 Block Diagram of Test Setup

AC line conducted emissions:

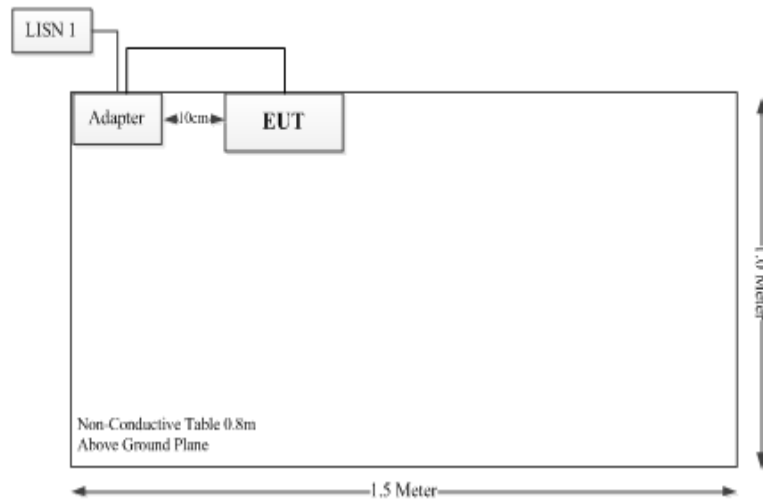


Spurious Emissions:

Below 1GHz:

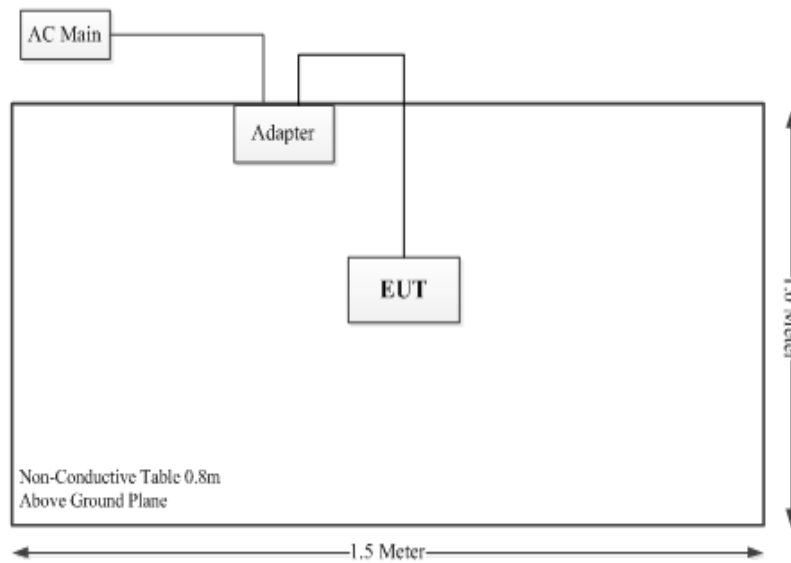

Above 1GHz:

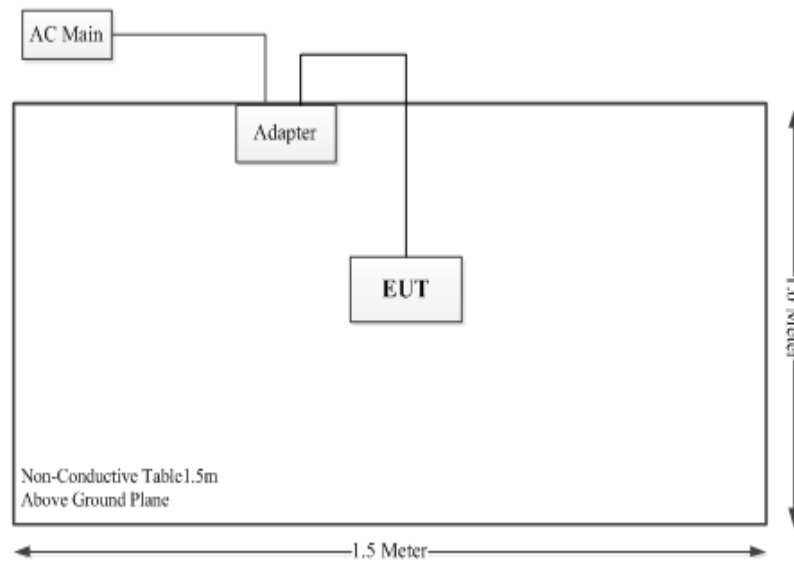

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB,200MHz~1GHz: 5.92 dB,1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

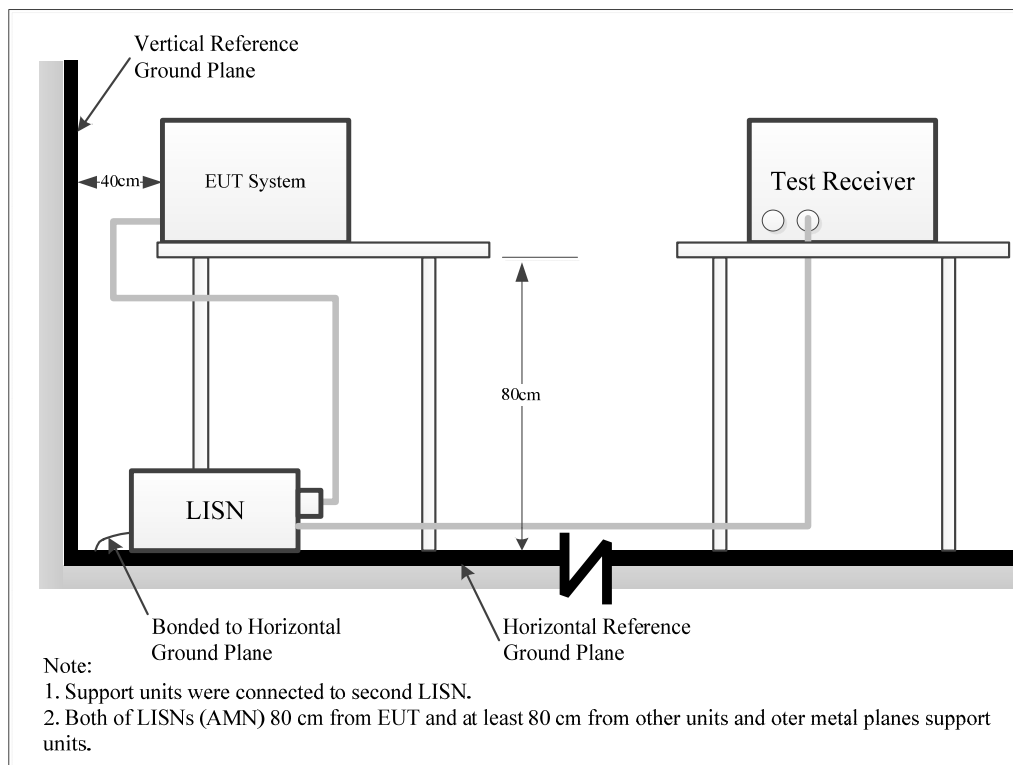

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground[protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Result& Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor=attenuation caused by cable loss + voltage division factor of AMN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions


4.2.1 Applicable Standard



FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.2.2 EUT Setup

9kHz-30MHz:

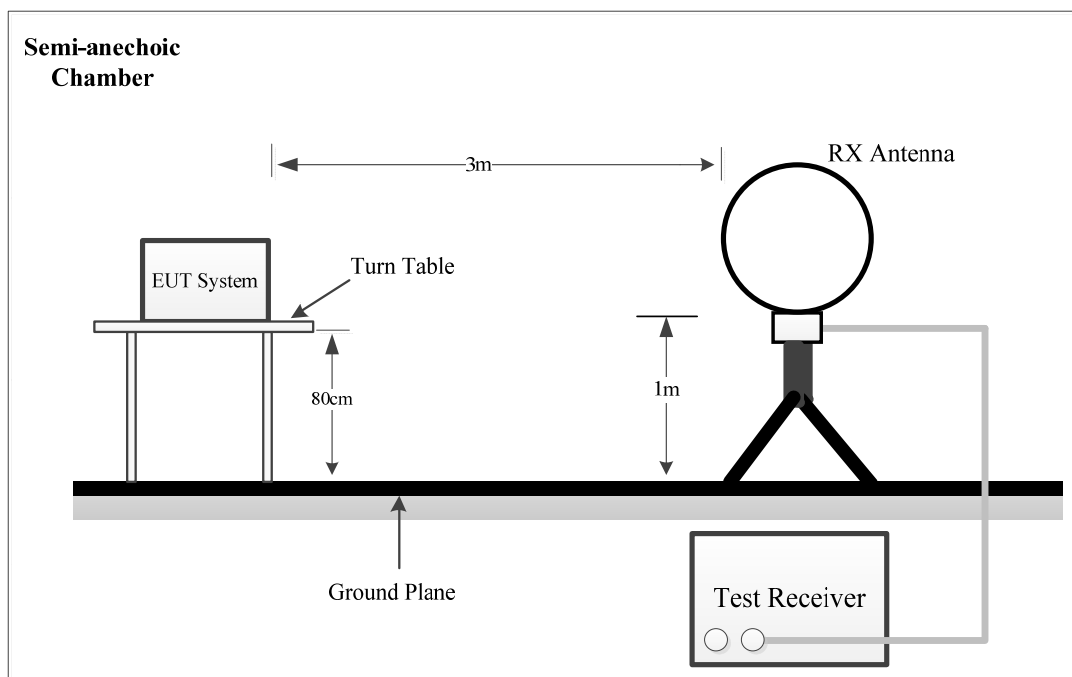

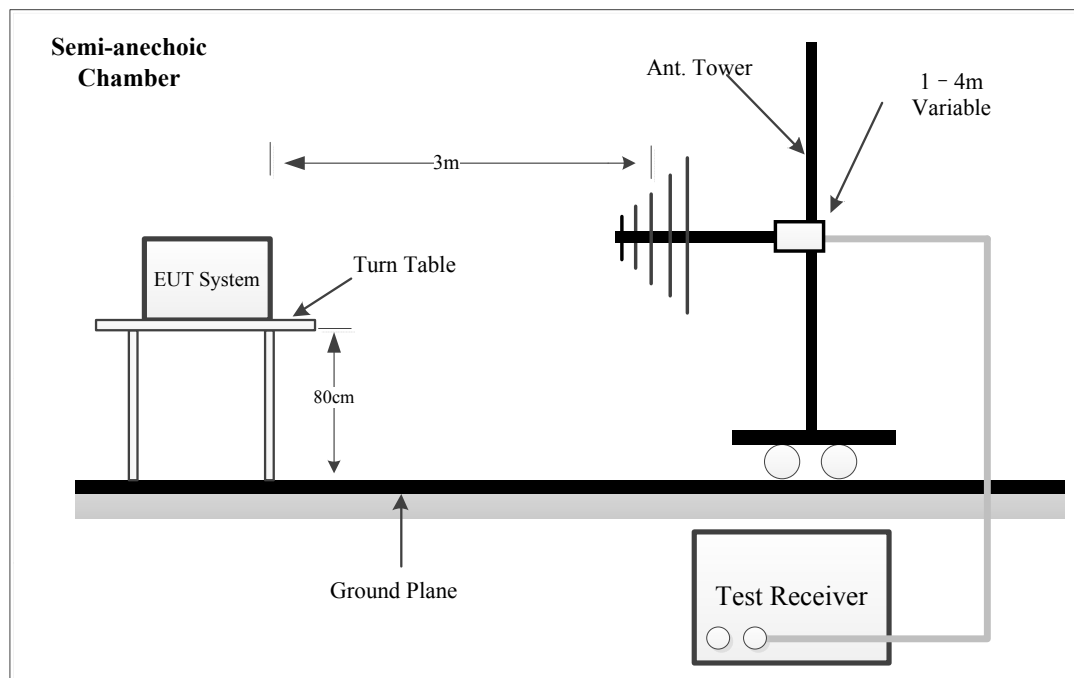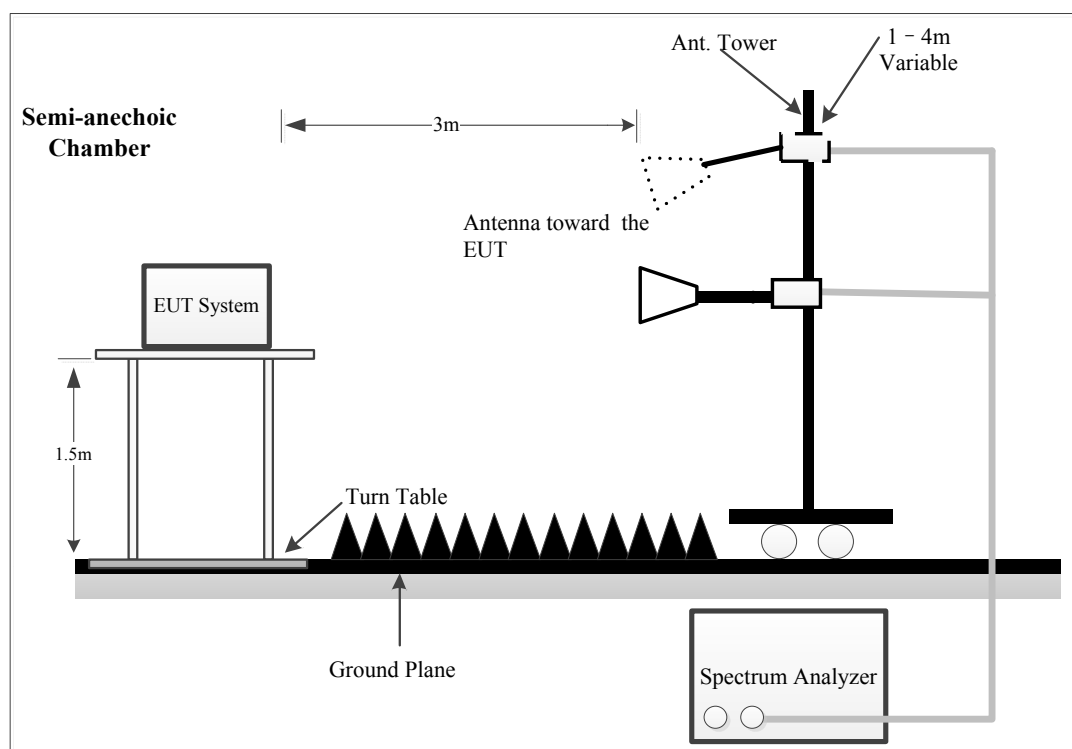30MHz~1GHz:**Above 1GHz:**

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	200Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	100 kHz	300 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 25GHz:

Pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	5kHz
		<98%	1MHz	1/T, not less than 5kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	10 Hz
		<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value is under the QP/Average limit by more than 6dB, then it is unnecessary to perform an QP/Average measurement.

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with under the Average limit, then it is unnecessary to perform an Average measurement.

All emissions under the average limit and under the noise floor have not recorded in the report.

4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor= Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.


4.3 Minimum 6 dB Bandwidth

4.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

4.3.2 EUT Setup

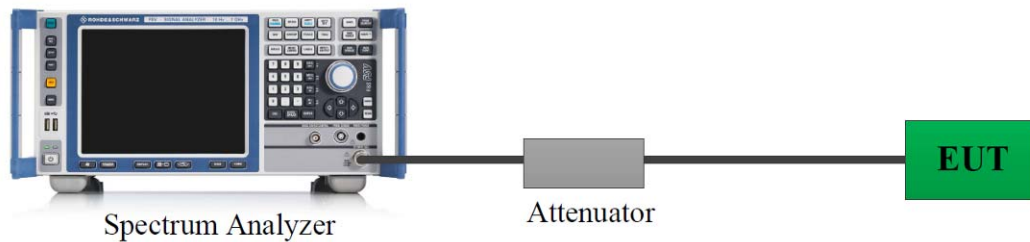

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 Test Result

Please refer to section 5.3.


4.4 Maximum Conducted Output Power

4.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

4.4.2 EUT Setup

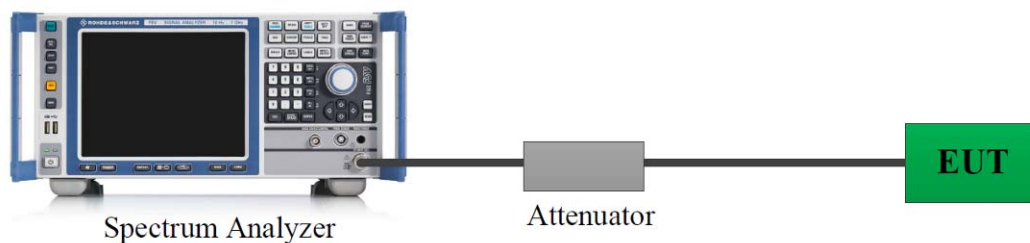

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.1

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the $RBW \geq DTS$ bandwidth.
- Set $VBW \geq [3 \times RBW]$.
- Set $span \geq [3 \times RBW]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

4.4.4 Test Result

Please refer to section 5.4.


4.5 Maximum power spectral density

4.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

4.5.2 EUT Setup

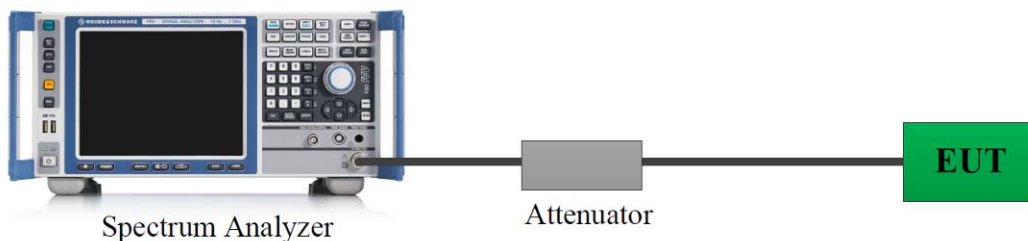

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

4.5.4 Test Result

Please refer to section 5.5.


4.6 100 kHz Bandwidth of Frequency Band Edge

4.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.6.2 EUT Setup

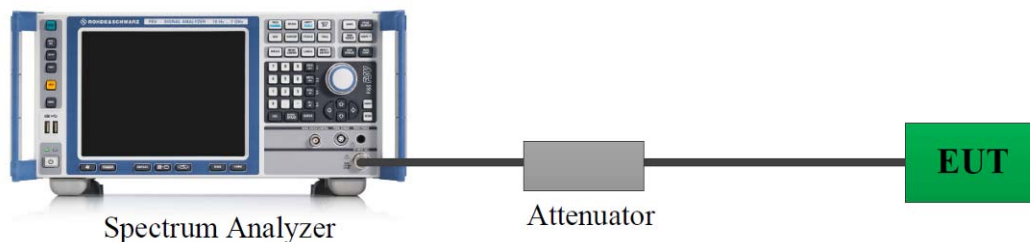

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.6.3 Test Procedure

According to ANSI C63.10-2013 Section 11.11


- Set the center frequency and span to encompass frequency range to be measured.
 - Set the RBW = 100 kHz.
 - Set the VBW $\geq [3 \times \text{RBW}]$.
 - Detector = peak.
 - Sweep time = auto couple.
 - Trace mode = max hold.
 - Allow trace to fully stabilize.
 - Use the peak marker function to determine the maximum amplitude level.
- Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

4.6.4 Test Result

Please refer to section 5.6.

4.7 Duty Cycle

4.7.1 EUT Setup

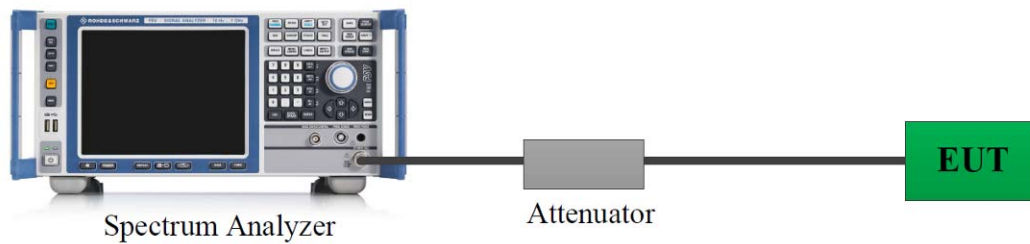

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.7.3 Judgment

Report only, please refer to section 5.7.

4.8 Antenna Requirement

4.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.8.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2TA3-1	Test Date:	2024/10/26
Test Site:	CE	Test Mode:	Transmitting
Tester:	Yolo Fan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.6	Relative Humidity: (%)	47	ATM Pressure: (kPa)	100.8
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2024/9/5	2025/9/4
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2024/9/5	2025/9/4
R&S	EMI Test Receiver	ESCI	100035	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: 2402Y37628E-RF
Port: Line
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 0

Serial No.: 2TA3-1
Tester: Yolo Fan

Date: 2024-10-26

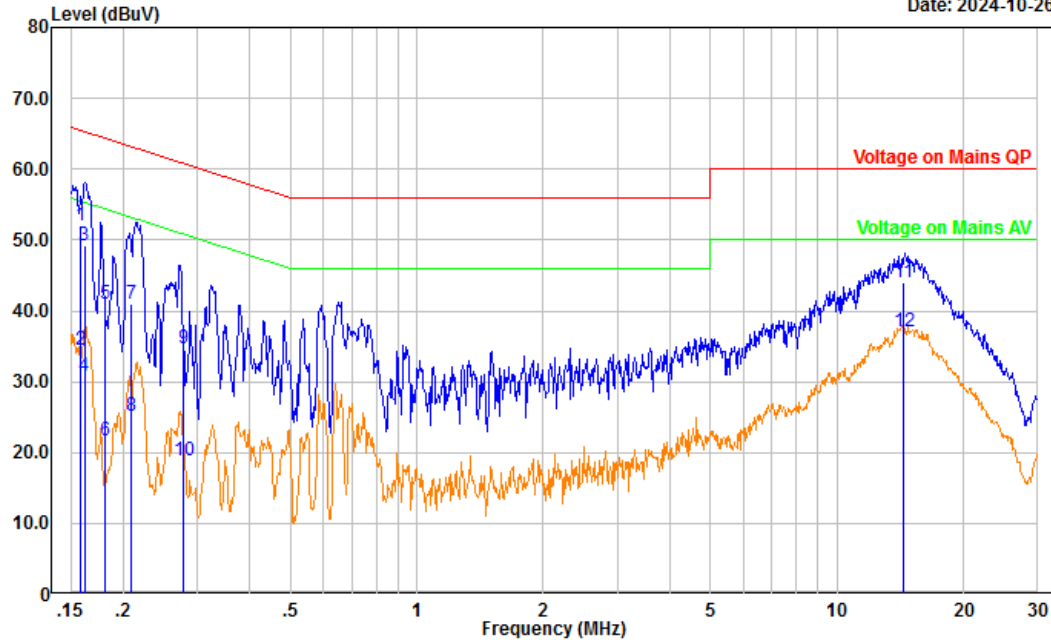


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.159	41.23	10.77	52.00	65.52	13.52	QP
2	0.159	23.79	10.77	34.56	55.52	20.96	Average
3	0.162	38.43	10.77	49.20	65.38	16.18	QP
4	0.162	19.95	10.77	30.72	55.38	24.66	Average
5	0.181	30.09	10.81	40.90	64.44	23.54	QP
6	0.181	10.88	10.81	21.69	54.44	32.75	Average
7	0.209	30.05	10.85	40.90	63.23	22.33	QP
8	0.209	14.38	10.85	25.23	53.23	28.00	Average
9	0.278	23.89	10.83	34.72	60.88	26.16	QP
10	0.278	7.99	10.83	18.82	50.88	32.06	Average
11	14.370	33.11	10.85	43.96	60.00	16.04	QP
12	14.370	26.21	10.85	37.06	50.00	12.94	Average

Project No.: 2402Y37628E-RF
Port: neutral
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 0

Serial No.: 2TA3-1
Tester: Yolo Fan

Date: 2024-10-26

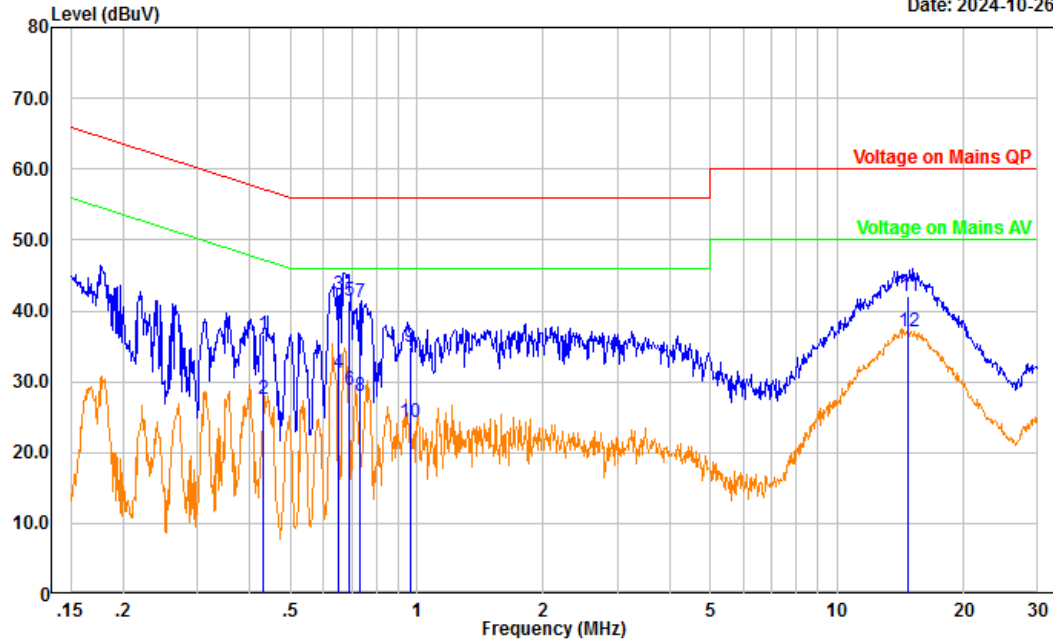


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.431	25.91	10.76	36.67	57.24	20.57	QP
2	0.431	16.78	10.76	27.54	47.24	19.70	Average
3	0.652	31.60	10.74	42.34	56.00	13.66	QP
4	0.652	20.56	10.74	31.30	46.00	14.70	Average
5	0.688	30.67	10.76	41.43	56.00	14.57	QP
6	0.688	18.04	10.76	28.80	46.00	17.20	Average
7	0.735	30.37	10.77	41.14	56.00	14.86	QP
8	0.735	17.09	10.77	27.86	46.00	18.14	Average
9	0.962	24.01	10.84	34.85	56.00	21.15	QP
10	0.962	13.43	10.84	24.27	46.00	21.73	Average
11	14.780	31.12	10.86	41.98	60.00	18.02	QP
12	14.780	26.11	10.86	36.97	50.00	13.03	Average

Project No.: 2402Y37628E-RF
Port: Line
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-1
Tester: Yolo Fan


Date: 2024-10-26

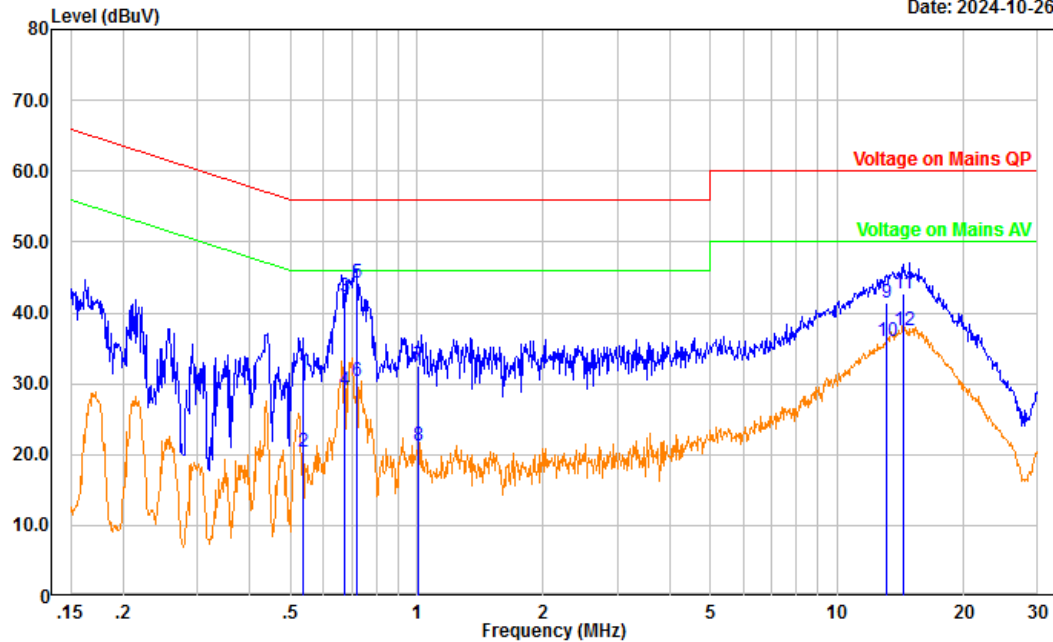

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.537	20.69	10.83	31.52	56.00	24.48	QP
2	0.537	9.65	10.83	20.48	46.00	25.52	Average
3	0.670	31.49	10.85	42.34	56.00	13.66	QP
4	0.670	18.26	10.85	29.11	46.00	16.89	Average
5	0.720	33.31	10.86	44.17	56.00	11.83	QP
6	0.720	19.40	10.86	30.26	46.00	15.74	Average
7	1.011	21.75	10.85	32.60	56.00	23.40	QP
8	1.011	10.49	10.85	21.34	46.00	24.66	Average
9	13.129	30.62	10.82	41.44	60.00	18.56	QP
10	13.129	25.28	10.82	36.10	50.00	13.90	Average
11	14.376	31.75	10.85	42.60	60.00	17.40	QP
12	14.376	26.64	10.85	37.49	50.00	12.51	Average

Project No.: 2402Y37628E-RF
Port: neutral
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-1
Tester: Yolo Fan

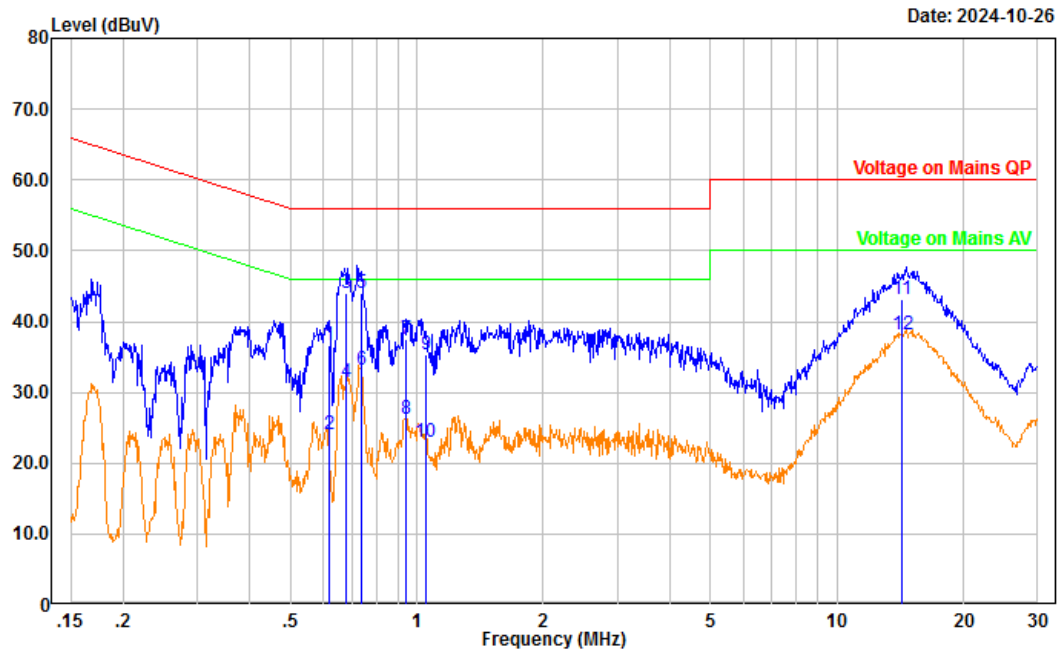

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.620	25.81	10.73	36.54	56.00	19.46	QP
2	0.620	13.44	10.73	24.17	46.00	21.83	Average
3	0.676	33.16	10.75	43.91	56.00	12.09	QP
4	0.676	20.67	10.75	31.42	46.00	14.58	Average
5	0.737	33.19	10.77	43.96	56.00	12.04	QP
6	0.737	22.39	10.77	33.16	46.00	12.84	Average
7	0.945	26.69	10.84	37.53	56.00	18.47	QP
8	0.945	15.34	10.84	26.18	46.00	19.82	Average
9	1.047	24.45	10.85	35.30	56.00	20.70	QP
10	1.047	12.17	10.85	23.02	46.00	22.98	Average
11	14.247	32.37	10.86	43.23	60.00	16.77	QP
12	14.247	27.24	10.86	38.10	50.00	11.90	Average

5.2 Radiation Spurious Emissions

1)9kHz - 1GHz

Serial Number:	2TA3-1, 2TA3-13	Test Date:	2024/11/26
Test Site:	Chamber10m	Test Mode:	Transmitting
Tester:	Leesin Xiang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.4	Relative Humidity: (%)	59	ATM Pressure: (kPa)	102.2
----------------------	------	---------------------------	----	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured,
the worst orientations was below:

Configuration 1#:

Project No.: 2402Y37628E-RF


Serial No.: 2TA3-1

Polarization: Parallel

Tester: Leesin Xiang

Test Mode: Transmitting

Note: BLE 2Mbps Middle Channel Chain 0

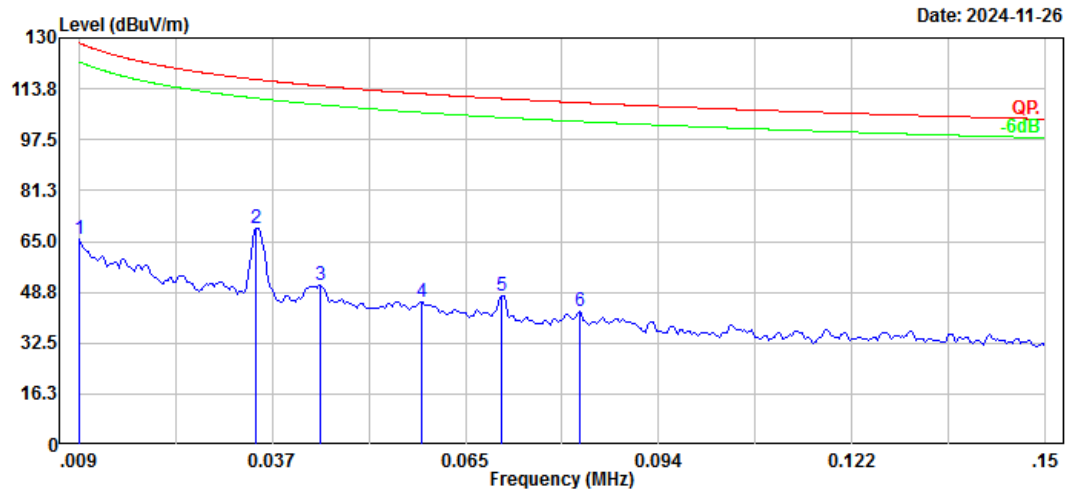

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	12.29	53.24	65.53	128.52	62.99	Peak
2	0.035	22.66	46.67	69.33	116.74	47.41	Peak
3	0.044	5.76	45.04	50.80	114.69	63.89	Peak
4	0.059	3.04	42.52	45.56	112.20	66.64	Peak
5	0.071	7.12	40.46	47.58	110.61	63.03	Peak
6	0.082	4.10	38.56	42.66	109.32	66.66	Peak

Project No.: 2402Y37628E-RF


Serial No.: 2TA3-1

Polarization: Parallel

Tester: Leeson Xiang

Test Mode: Transmitting

Note: BLE 2Mbps Middle Channel Chain 0

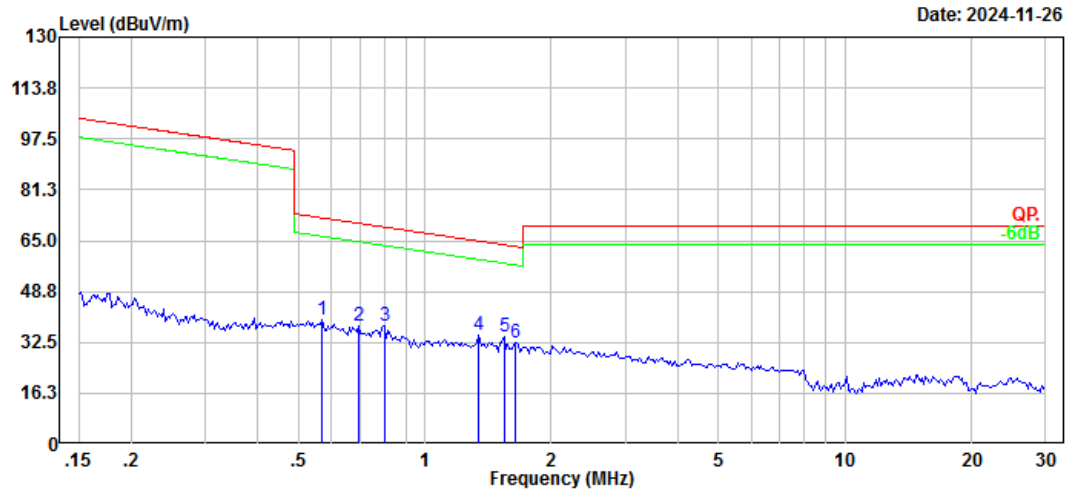


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.570	16.73	22.78	39.51	72.46	32.95	Peak
2	0.697	16.04	21.49	37.53	70.67	33.14	Peak
3	0.800	17.02	20.56	37.58	69.45	31.87	Peak
4	1.345	19.97	15.03	35.00	64.84	29.84	Peak
5	1.544	19.96	14.14	34.10	63.62	29.52	Peak
6	1.645	18.68	13.70	32.38	63.06	30.68	Peak

Project No.: 2402Y37628E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-1
Tester: Leeson Xiang


Date: 2024-11-26

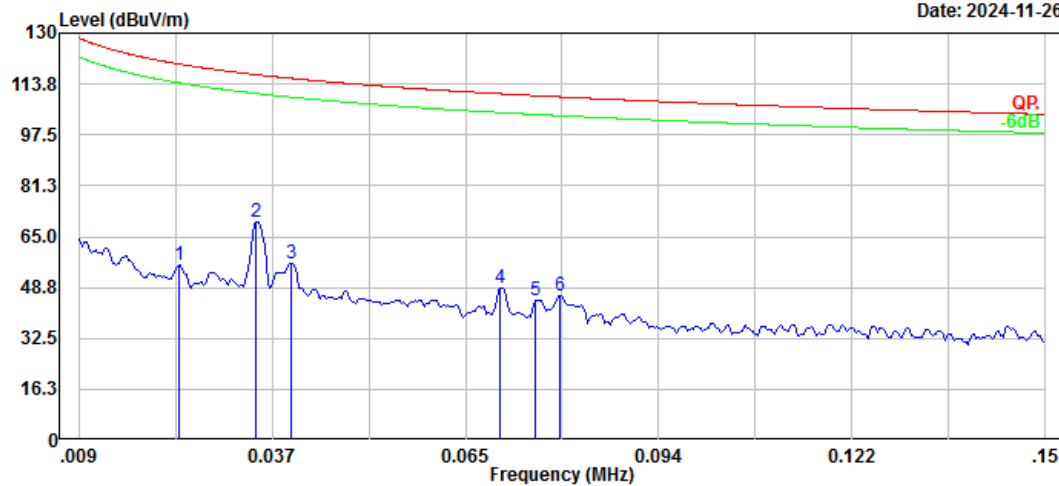

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.024	6.97	49.13	56.10	120.12	64.02	Peak
2	0.035	23.17	46.67	69.84	116.74	46.90	Peak
3	0.040	10.87	45.77	56.64	115.56	58.92	Peak
4	0.070	8.29	40.51	48.80	110.64	61.84	Peak
5	0.076	5.20	39.67	44.87	110.04	65.17	Peak
6	0.079	7.31	39.05	46.36	109.63	63.27	Peak

Project No.: 2402Y37628E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-1
Tester: Leeson Xiang

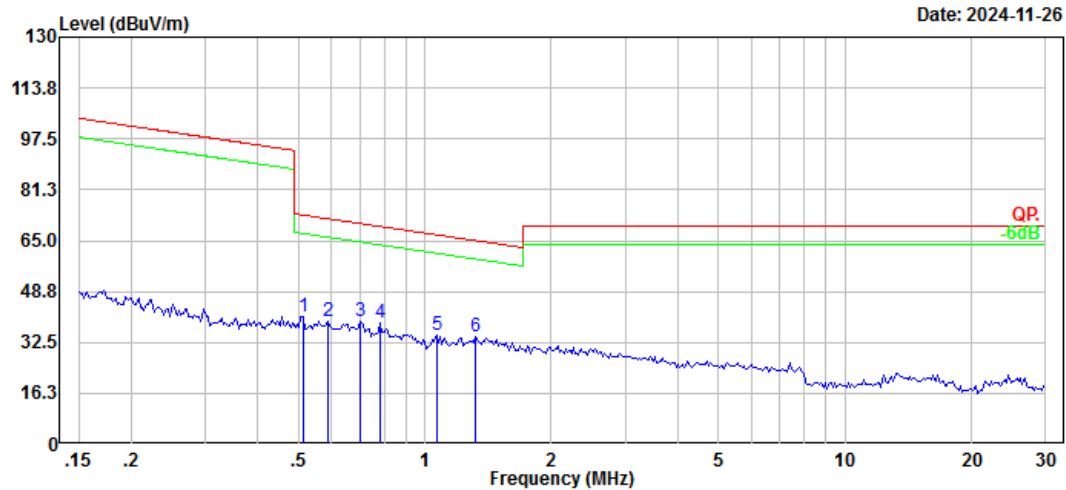


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.513	17.10	23.40	40.50	73.40	32.90	Peak
2	0.589	16.79	22.58	39.37	72.18	32.81	Peak
3	0.705	17.64	21.42	39.06	70.58	31.52	Peak
4	0.783	17.98	20.71	38.69	69.64	30.95	Peak
5	1.065	18.70	16.27	34.97	66.91	31.94	Peak
6	1.317	19.38	15.15	34.53	65.03	30.50	Peak

Configuration 2#:

Project No.: 2402Y37628E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: BLE 2Mbps Middle Channel Chain 0

Serial No.: 2TA3-13
Tester: Leesin Xiang

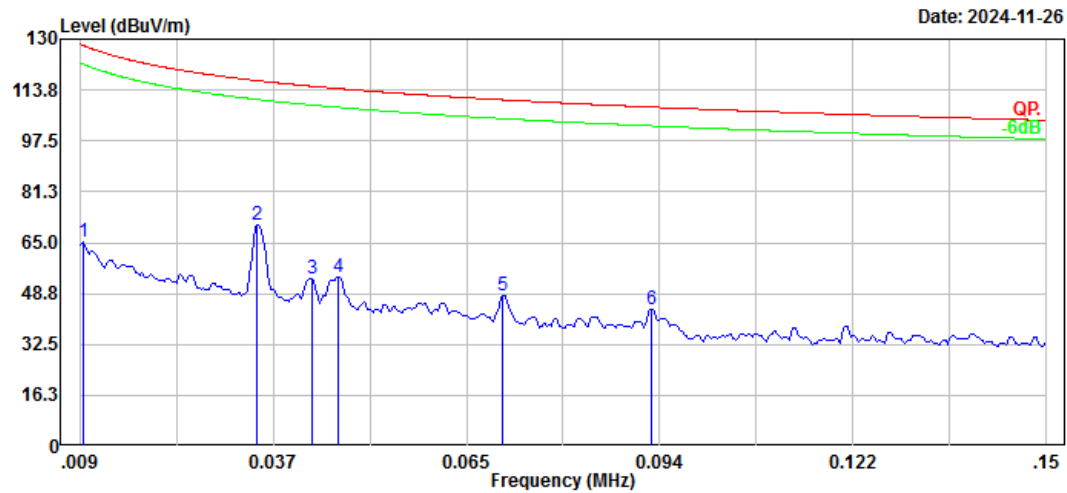

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.010	12.05	53.02	65.07	127.99	62.92	Peak
2	0.035	23.75	46.67	70.42	116.74	46.32	Peak
3	0.043	8.40	45.29	53.69	114.97	61.28	Peak
4	0.047	9.50	44.60	54.10	114.20	60.10	Peak
5	0.071	7.70	40.46	48.16	110.61	62.45	Peak
6	0.092	6.94	36.71	43.65	108.28	64.63	Peak

Project No.: 2402Y37628E-RF


Serial No.: 2TA3-13

Polarization: Parallel

Tester: Leeson Xiang

Test Mode: Transmitting


Note: BLE 2Mbps Middle Channel Chain 0

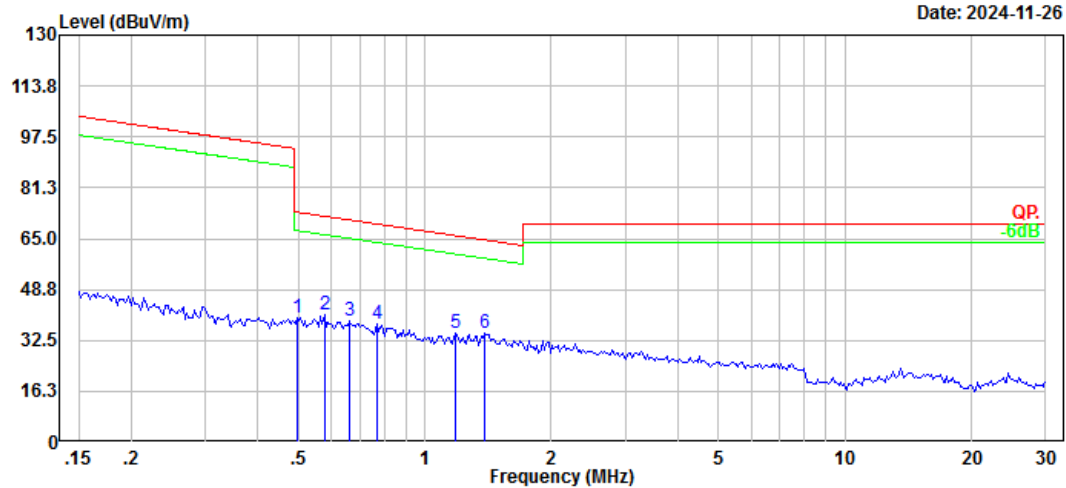

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.497	16.18	23.54	39.72	73.68	33.96	Peak
2	0.576	18.22	22.71	40.93	72.36	31.43	Peak
3	0.661	16.70	21.85	38.55	71.14	32.59	Peak
4	0.767	17.13	20.86	37.99	69.83	31.84	Peak
5	1.184	18.90	15.74	34.64	65.97	31.33	Peak
6	1.388	20.04	14.83	34.87	64.56	29.69	Peak

Project No.: 2402Y37628E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-13
Tester: Leeson Xiang

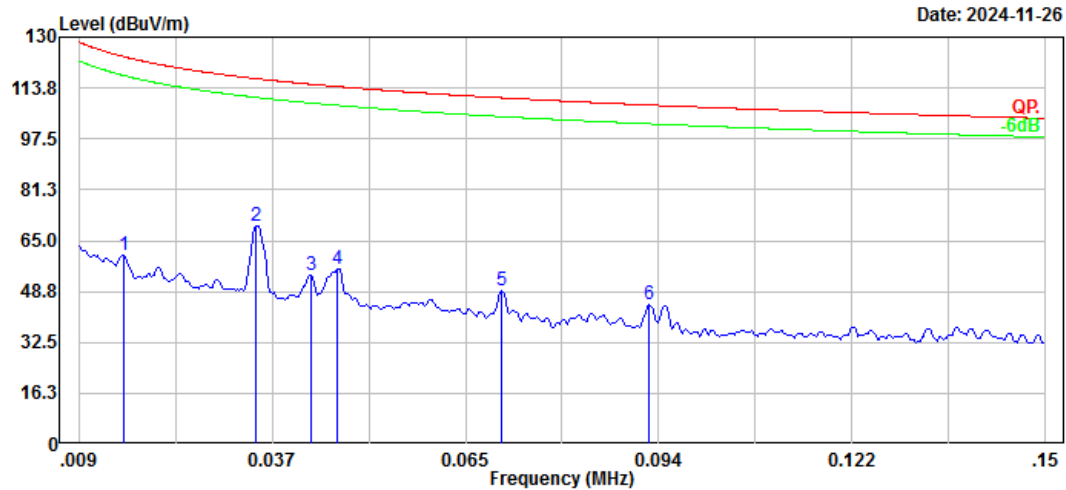


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.015	8.98	51.31	60.29	123.81	63.52	Peak
2	0.035	23.20	46.67	69.87	116.74	46.87	Peak
3	0.043	8.48	45.29	53.77	114.97	61.20	Peak
4	0.047	11.31	44.60	55.91	114.20	58.29	Peak
5	0.071	8.49	40.46	48.95	110.61	61.66	Peak
6	0.092	7.70	36.76	44.46	108.31	63.85	Peak

Project No.: 2402Y37628E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-13
Tester: Leeson Xiang

Date: 2024-11-26

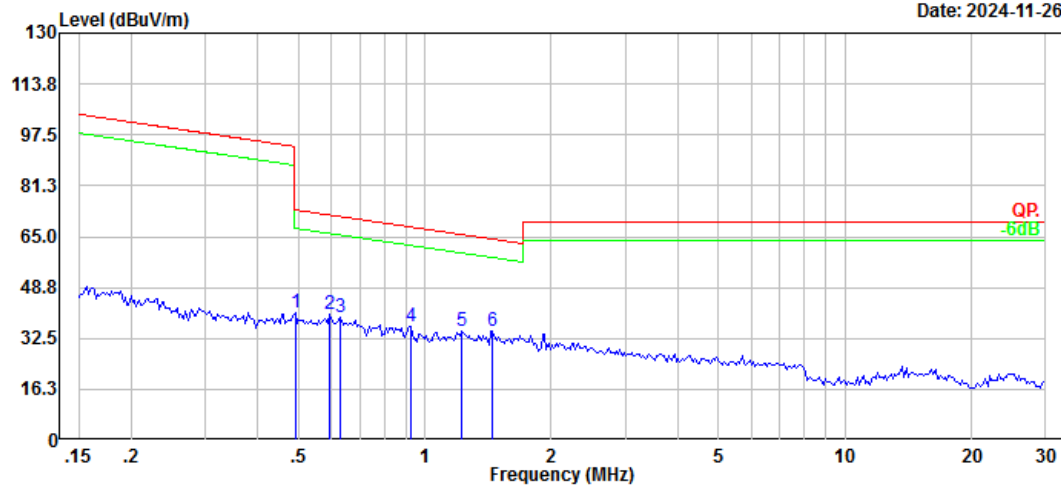


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.491	17.06	23.55	40.61	73.77	33.16	Peak
2	0.595	17.57	22.52	40.09	72.08	31.99	Peak
3	0.627	17.00	22.20	39.20	71.61	32.41	Peak
4	0.928	18.29	18.00	36.29	68.13	31.84	Peak
5	1.223	19.06	15.57	34.63	65.69	31.06	Peak
6	1.449	20.44	14.57	35.01	64.19	29.18	Peak

30MHz-1GHz
Configuration 1#:

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2Mbps Middle Channel Chain 0


Serial No.: 2TA3-1
Tester: Leesin Xiang

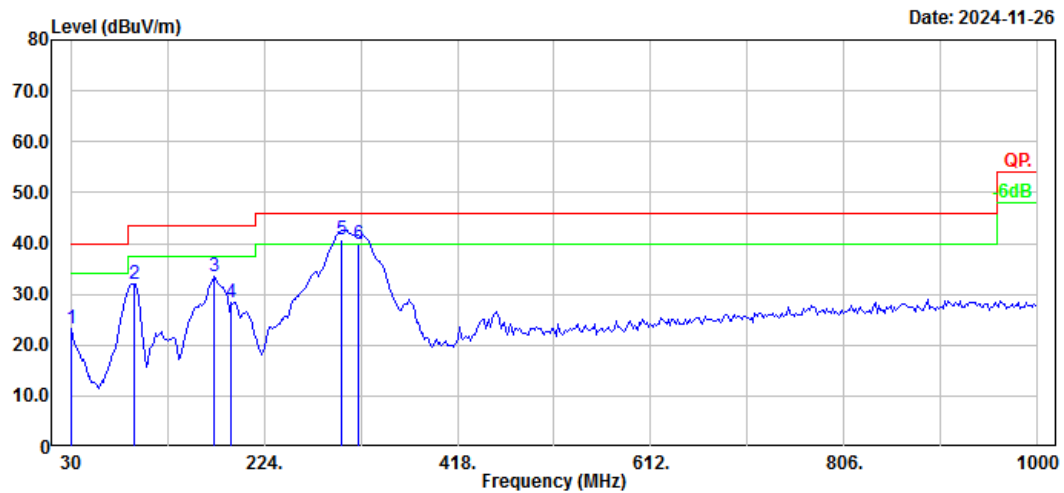

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	27.13	-3.80	23.33	40.00	16.67	Peak
2	94.02	47.79	-15.64	32.15	43.50	11.35	Peak
3	173.56	45.38	-11.98	33.40	43.50	10.10	Peak
4	191.02	40.39	-12.06	28.33	43.50	15.17	Peak
5	301.60	50.20	-9.48	40.72	46.00	5.28	QP
6	319.06	49.01	-9.10	39.91	46.00	6.09	QP

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2Mbps Middle Channel Chain 0


Serial No.: 2TA3-1
Tester: Leesin Xiang

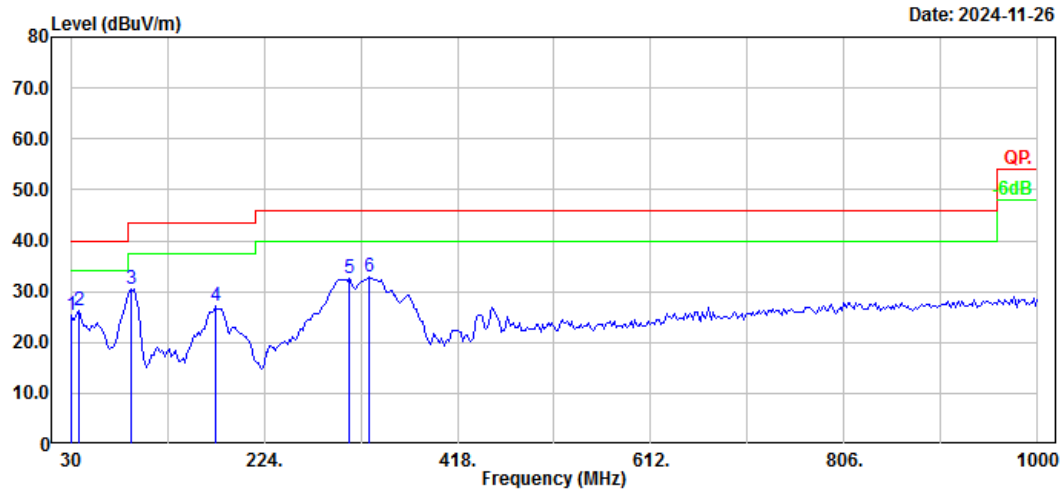

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	29.25	-3.80	25.45	40.00	14.55	Peak
2	37.76	35.61	-9.36	26.25	40.00	13.75	Peak
3	90.14	47.03	-16.52	30.51	43.50	12.99	Peak
4	175.50	39.37	-12.10	27.27	43.50	16.23	Peak
5	309.36	41.92	-9.31	32.61	46.00	13.39	Peak
6	328.76	41.67	-8.88	32.79	46.00	13.21	Peak

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1


Serial No.: 2TA3-1
Tester: Leesin Xiang

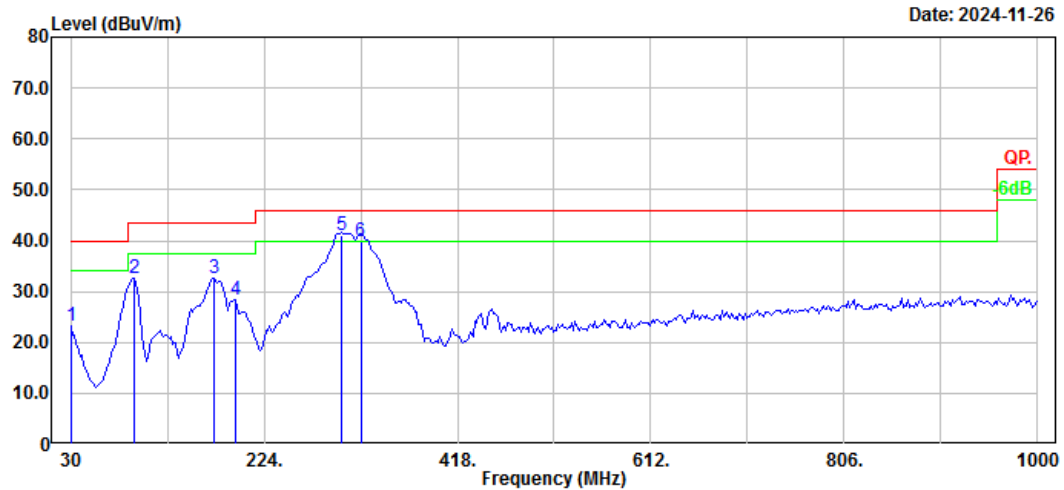

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	27.09	-3.80	23.29	40.00	16.71	Peak
2	94.02	48.34	-15.64	32.70	43.50	10.80	Peak
3	173.56	44.68	-11.98	32.70	43.50	10.80	Peak
4	194.90	40.13	-11.83	28.30	43.50	15.20	Peak
5	301.60	50.40	-9.48	40.92	46.00	5.08	QP
6	321.00	48.90	-9.05	39.85	46.00	6.15	QP

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-1
Tester: Leeson Xiang

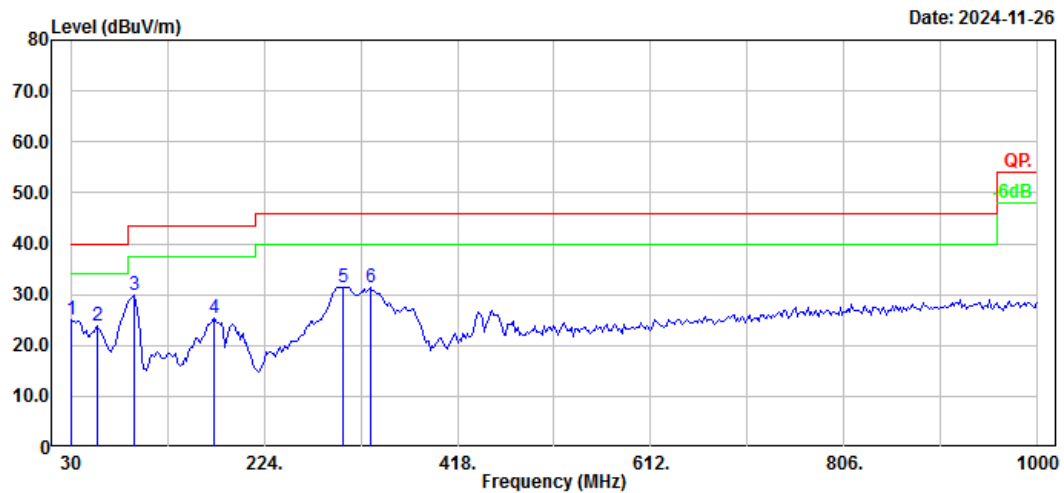


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	28.72	-3.80	24.92	40.00	15.08	Peak
2	57.16	40.30	-16.59	23.71	40.00	16.29	Peak
3	94.02	45.60	-15.64	29.96	43.50	13.54	Peak
4	173.56	37.22	-11.98	25.24	43.50	18.26	Peak
5	303.54	40.89	-9.44	31.45	46.00	14.55	Peak
6	330.70	40.14	-8.84	31.30	46.00	14.70	Peak

Configuration 2#:

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2Mbps Middle Channel Chain 0


Serial No.: 2TA3-13
Tester: Leesin Xiang

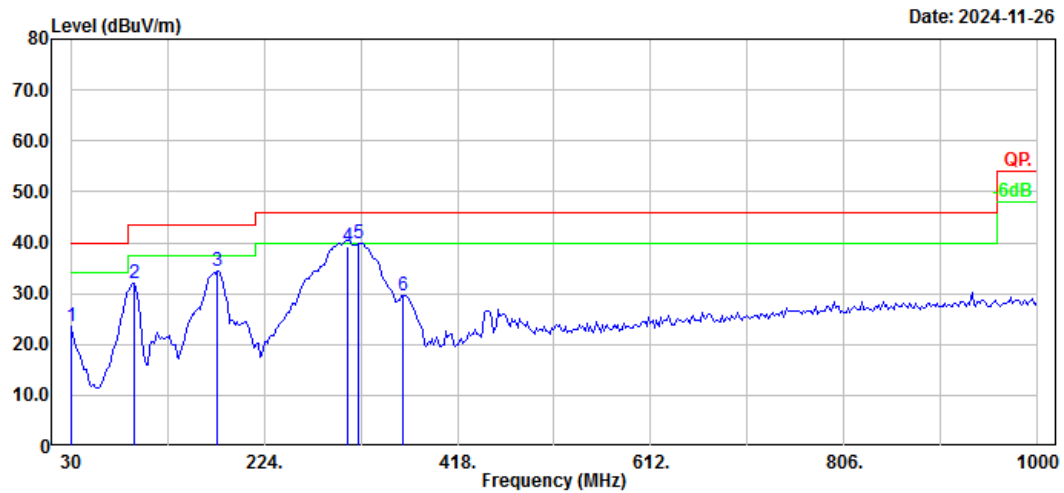

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	27.38	-3.80	23.58	40.00	16.42	Peak
2	94.02	47.71	-15.64	32.07	43.50	11.43	Peak
3	177.44	46.51	-12.21	34.30	43.50	9.20	Peak
4	307.42	48.70	-9.35	39.35	46.00	6.65	QP
5	319.06	49.04	-9.10	39.94	46.00	6.06	Peak
6	363.68	37.78	-8.23	29.55	46.00	16.45	Peak

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2Mbps Middle Channel Chain 0


Serial No.: 2TA3-13
Tester: Leesin Xiang

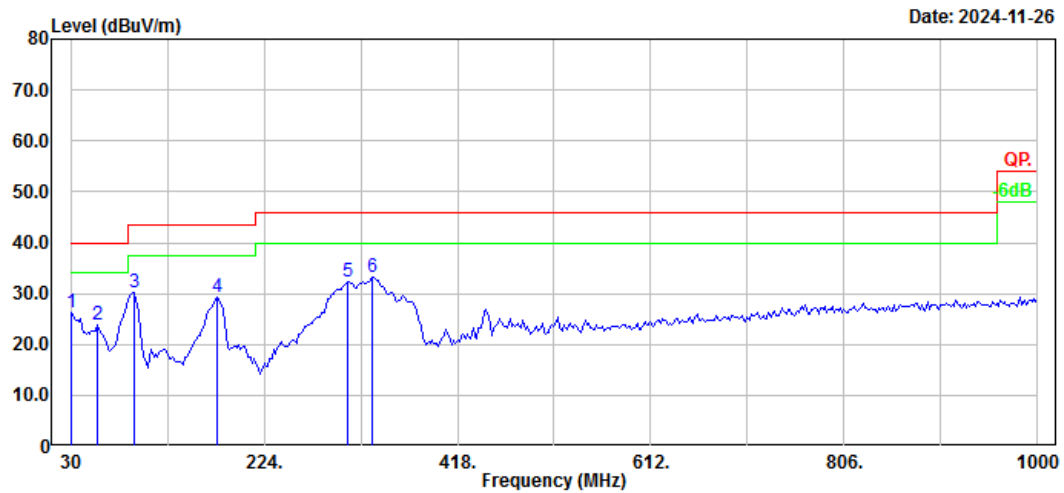

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	29.93	-3.80	26.13	40.00	13.87	Peak
2	57.16	40.33	-16.59	23.74	40.00	16.26	Peak
3	94.02	45.81	-15.64	30.17	43.50	13.33	Peak
4	177.44	41.38	-12.21	29.17	43.50	14.33	Peak
5	307.42	41.66	-9.35	32.31	46.00	13.69	Peak
6	332.64	42.09	-8.82	33.27	46.00	12.73	Peak

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1


Serial No.: 2TA3-13
Tester: Leeson Xiang

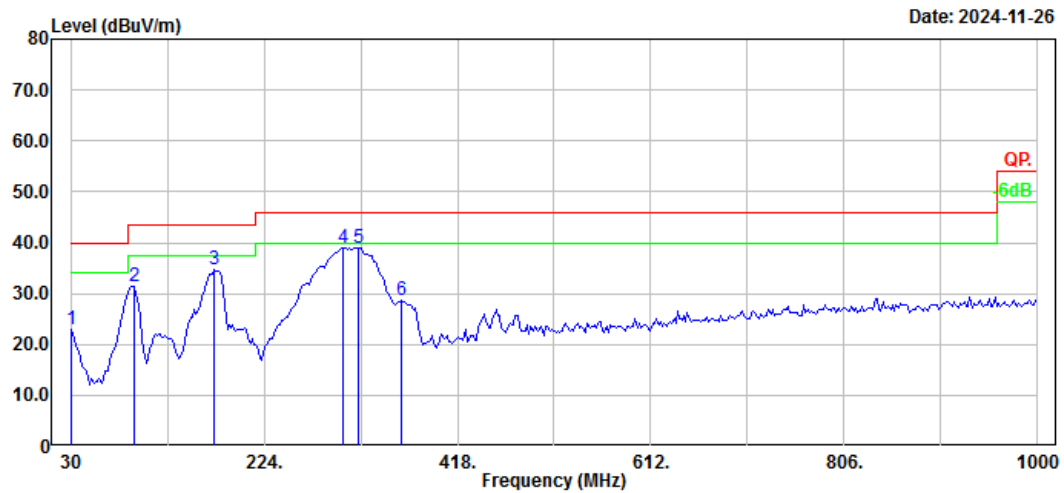

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	26.83	-3.80	23.03	40.00	16.97	Peak
2	94.02	47.00	-15.64	31.36	43.50	12.14	Peak
3	173.56	46.60	-11.98	34.62	43.50	8.88	Peak
4	303.54	48.46	-9.44	39.02	46.00	6.98	Peak
5	319.06	48.07	-9.10	38.97	46.00	7.03	Peak
6	361.74	37.12	-8.30	28.82	46.00	17.18	Peak

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2Mbps Middle channel Chain 1

Serial No.: 2TA3-13
Tester: Leeson Xiang

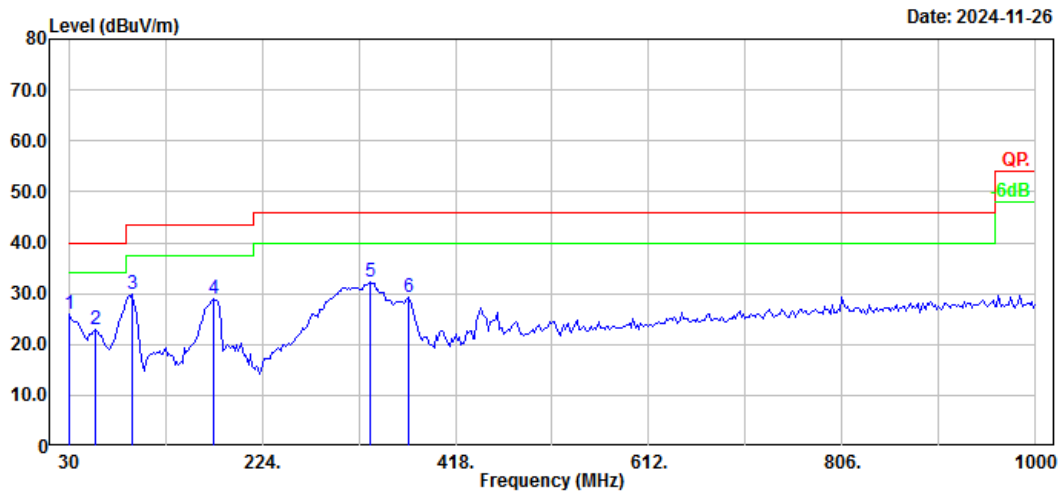

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	29.79	-3.80	25.99	40.00	14.01	Peak
2	57.16	39.56	-16.59	22.97	40.00	17.03	Peak
3	94.02	45.44	-15.64	29.80	43.50	13.70	Peak
4	175.50	41.15	-12.10	29.05	43.50	14.45	Peak
5	332.64	41.09	-8.82	32.27	46.00	13.73	Peak
6	371.44	37.15	-7.94	29.21	46.00	16.79	Peak

2) 1-25GHz:

Serial Number:	2TA3-1, 2TA3-13	Test Date:	2024/11/9~2024/11/23
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Leo Xiao, Nat Zhou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	20.1~26.9	Relative Humidity: (%)	35~42	ATM Pressure: (kPa)	101.6~102.2
----------------------	-----------	---------------------------	-------	---------------------------	-------------

Test Equipment List and Details:





Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2023/11/17	2024/11/16
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2023/12/11	2024/12/10
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Please refer to the below table and plots.




After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

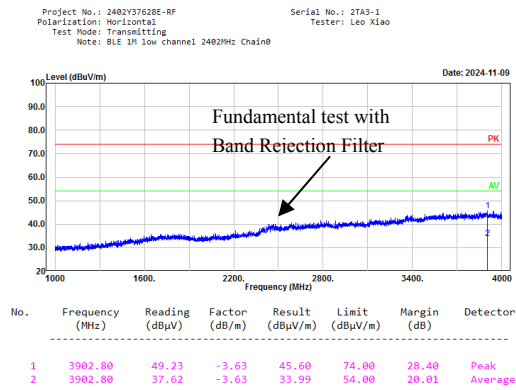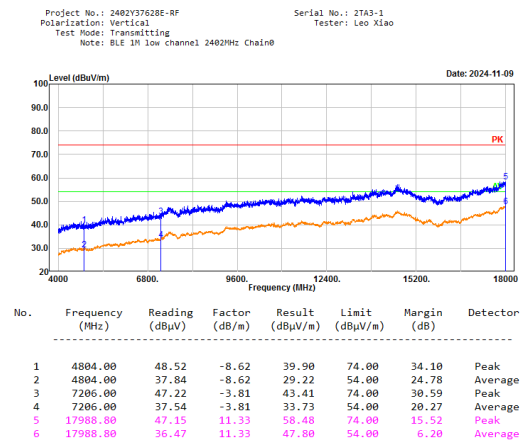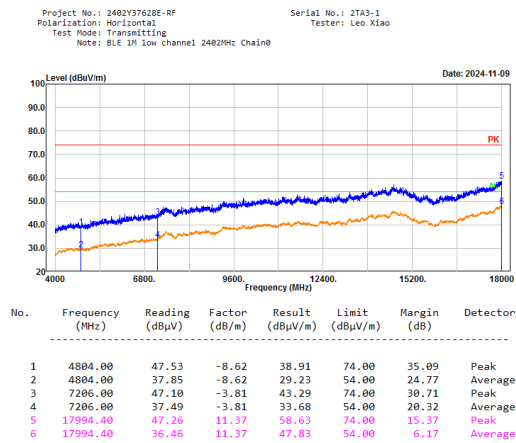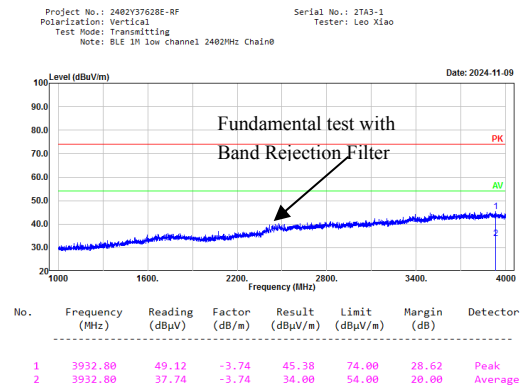**Configuration 1#:
1-18GHz:****BLE 1M, Low Channel, Chain 0, Horizontal****BLE 1M, Low Channel, Chain 0, Vertical**


BLE 1M, Middle Channel, Chain 0, Horizontal

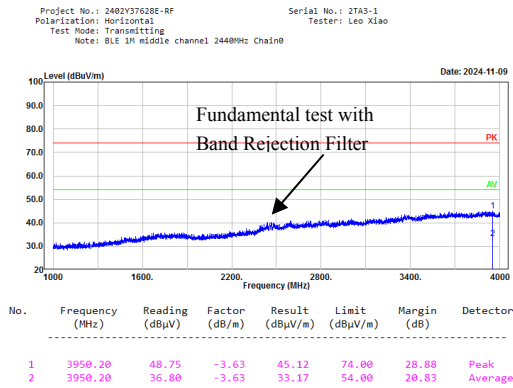




BLE 1M, Middle Channel, Chain 0, Vertical

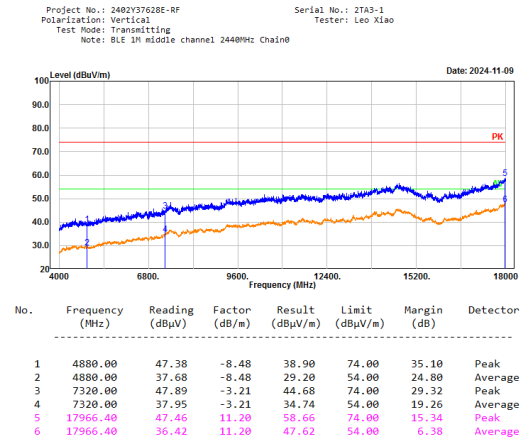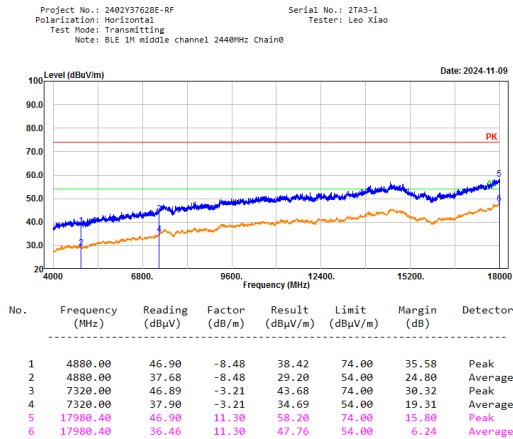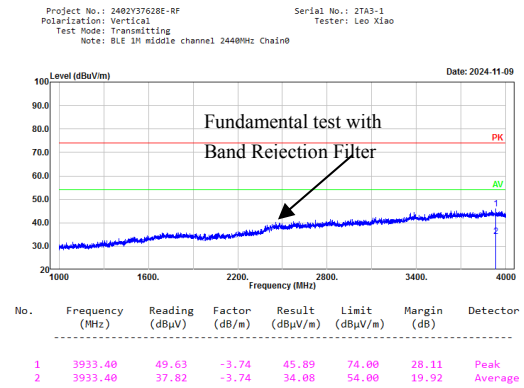

BLE 1M, High Channel, Chain 0, Horizontal

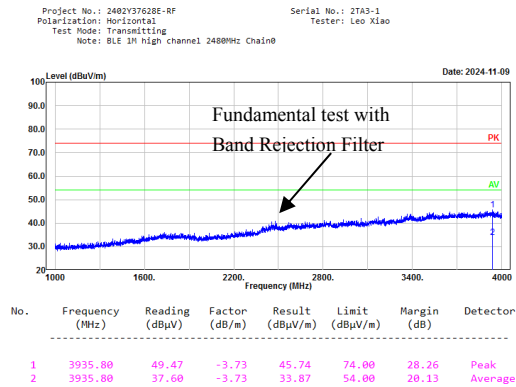


BLE 1M, High Channel, Chain 0, Vertical

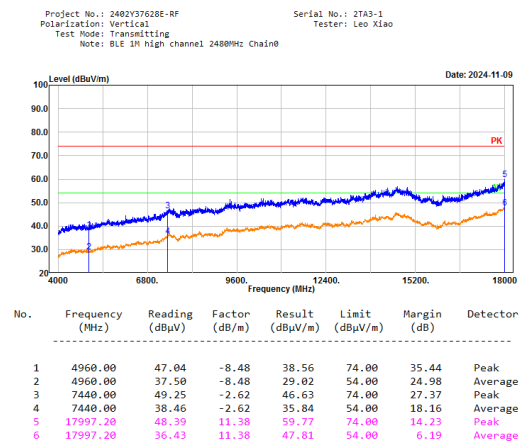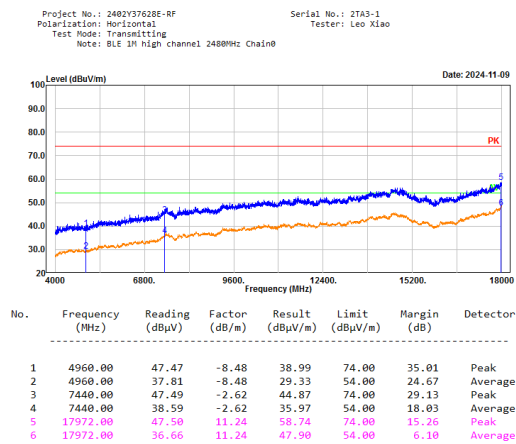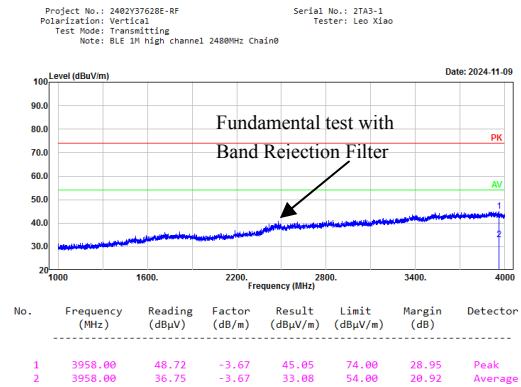

BLE 2M, Low Channel, Chain 0, Horizontal

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain0

Serial No.: 2TA3-1
Tester: Leo Xiao

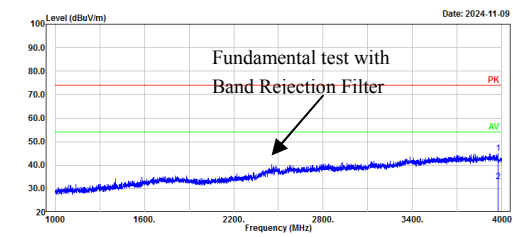


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3976.00	48.94	-3.75	45.19	74.00	28.81	Peak
2	3976.00	36.69	-3.75	32.94	54.00	21.06	Average

BLE 2M, Low Channel, Chain 0, Vertical

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain0


Serial No.: 2TA3-1
Tester: Leo Xiao

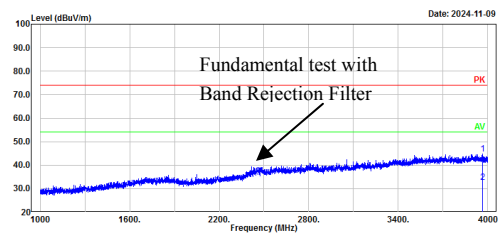

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3963.40	48.48	-3.71	44.77	74.00	29.23	Peak
2	3963.40	36.54	-3.71	32.83	54.00	21.17	Average

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain0


Serial No.: 2TA3-1
Tester: Leo Xiao

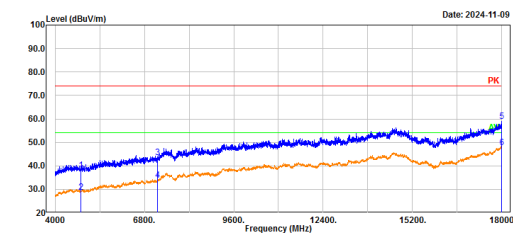

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4808.00	46.64	-8.60	38.04	74.00	35.96	Peak
2	4808.00	37.32	-8.60	28.72	54.00	25.28	Average
3	7212.00	47.31	-3.77	43.54	74.00	30.46	Peak
4	7212.00	37.61	-3.77	33.84	54.00	20.16	Average
5	17986.00	47.51	11.32	58.83	74.00	15.17	Peak
6	17986.00	36.59	11.32	47.91	54.00	6.09	Average


Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain0

Serial No.: 2TA3-1
Tester: Leo Xiao



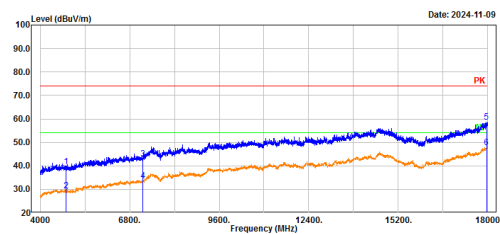


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4808.00	48.09	-8.60	39.49	74.00	34.51	Peak
2	4808.00	37.88	-8.60	29.28	54.00	24.72	Average
3	7212.00	46.73	-3.77	42.96	74.00	31.04	Peak
4	7212.00	37.24	-3.77	33.47	54.00	20.53	Average
5	17958.00	47.36	11.14	58.50	74.00	15.50	Peak
6	17958.00	36.72	11.14	47.86	54.00	6.14	Average

BLE 2M, Middle Channel, Chain 0, Horizontal

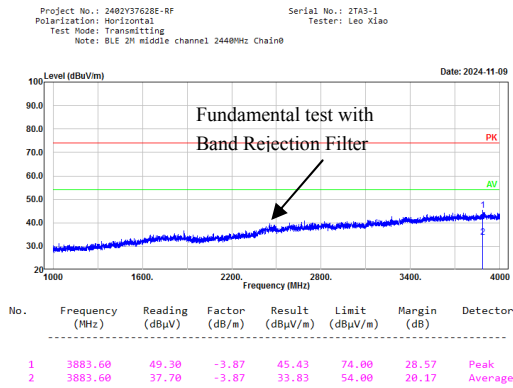

BLE 2M, Middle Channel, Chain 0, Vertical

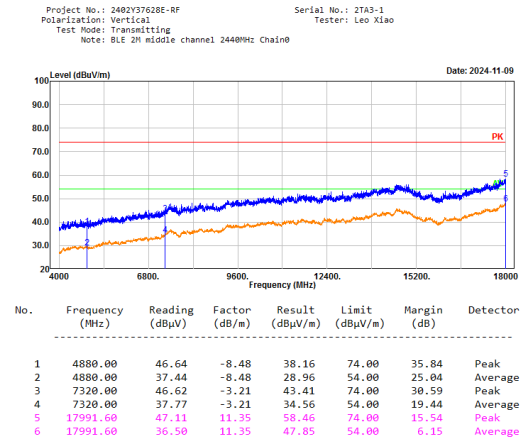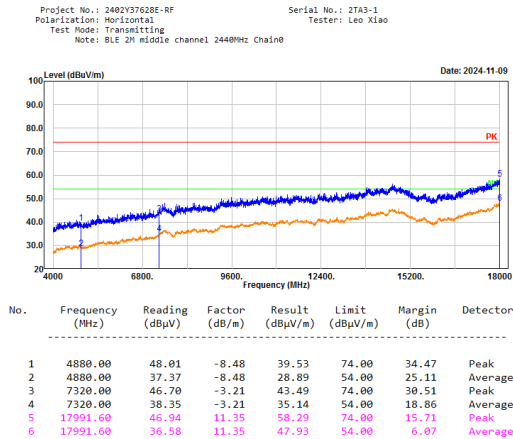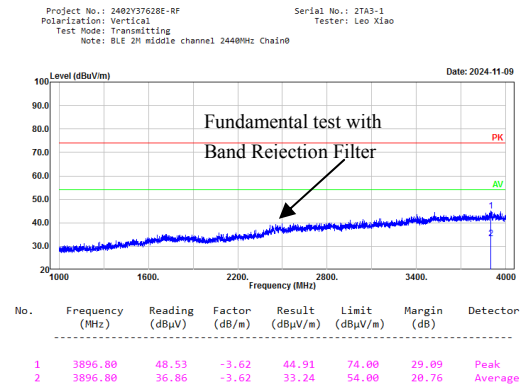


BLE 2M, High Channel, Chain 0, Horizontal

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M high channel 2478MHz Chain0

Serial No.: 2TA3-1
Tester: Leo Xiao

Date: 2024-11-09

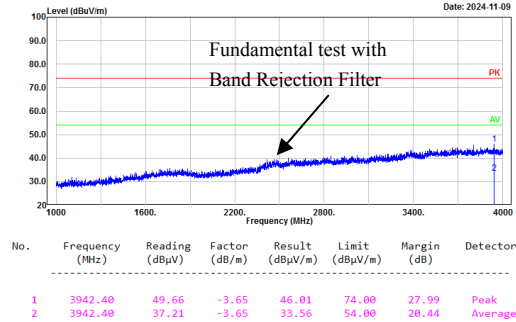


BLE 2M, High Channel, Chain 0, Vertical

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M high channel 2478MHz Chain0

Serial No.: 2TA3-1
Tester: Leo Xiao


Date: 2024-11-09

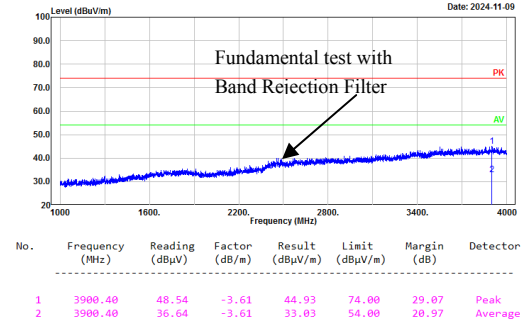

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M high channel 2478MHz Chain0

Serial No.: 2TA3-1
Tester: Leo Xiao


Date: 2024-11-09

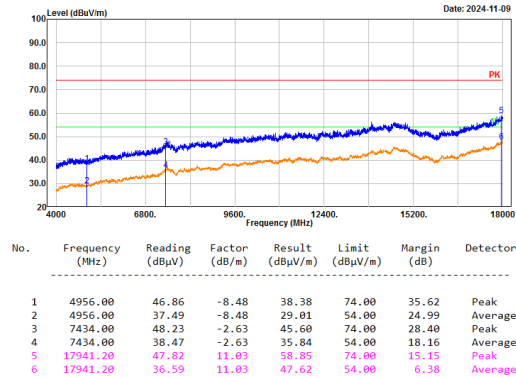


Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M high channel 2478MHz Chain0

Serial No.: 2TA3-1
Tester: Leo Xiao




Date: 2024-11-09

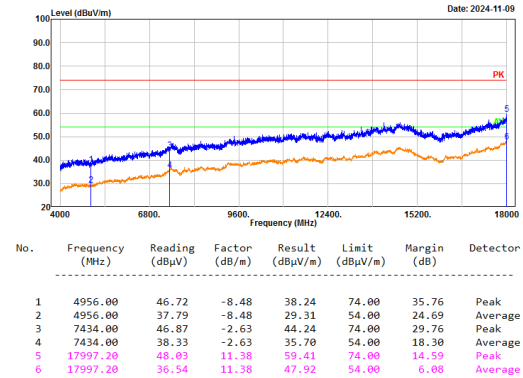


BLE 1M, Low Channel, Chain 1, Horizontal

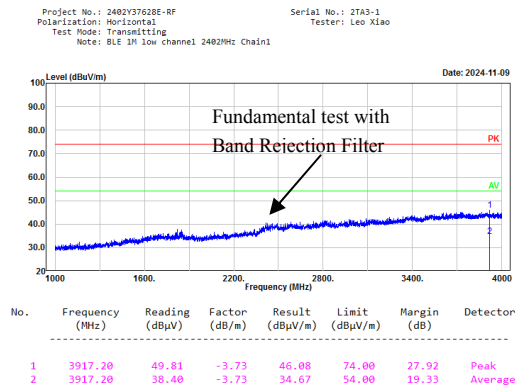




BLE 1M, Low Channel, Chain 1, Vertical

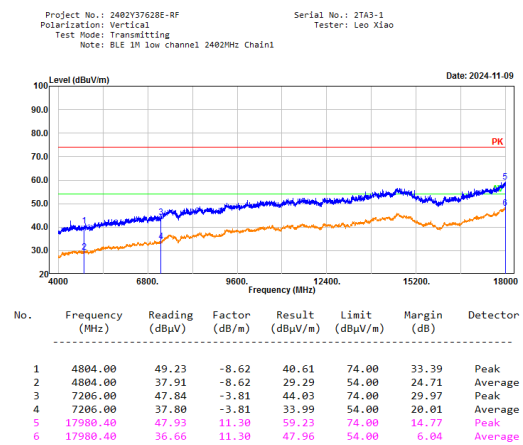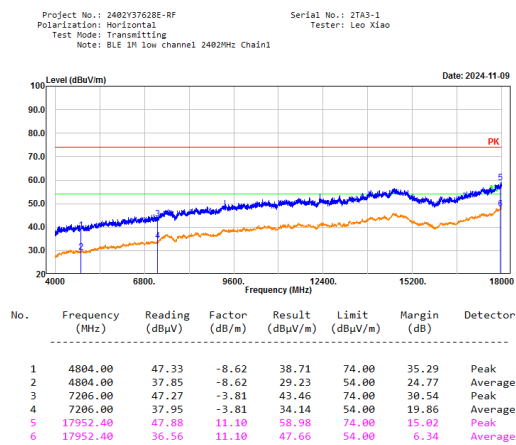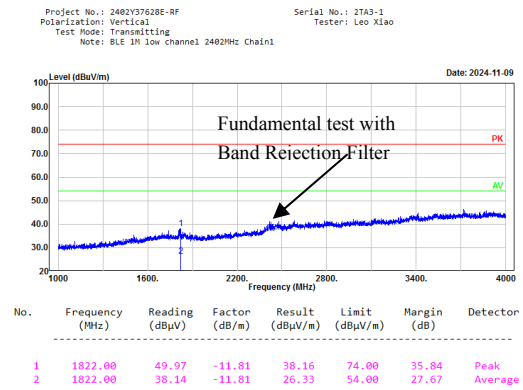


BLE 1M, Middle Channel, Chain 1, Horizontal

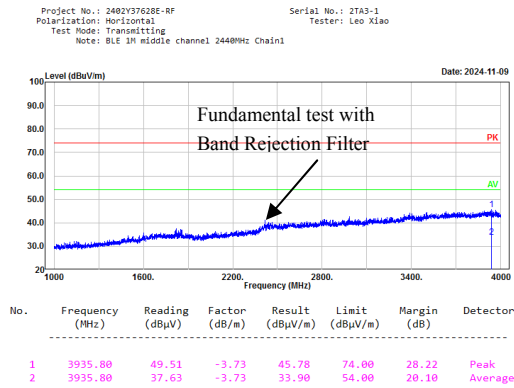




BLE 1M, Middle Channel, Chain 1, Vertical

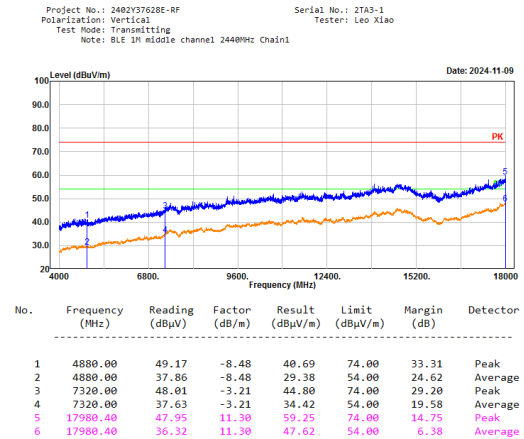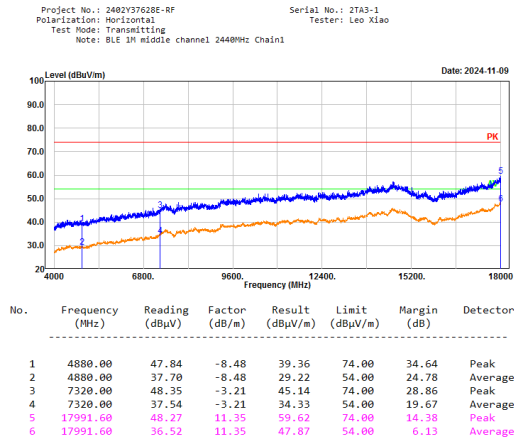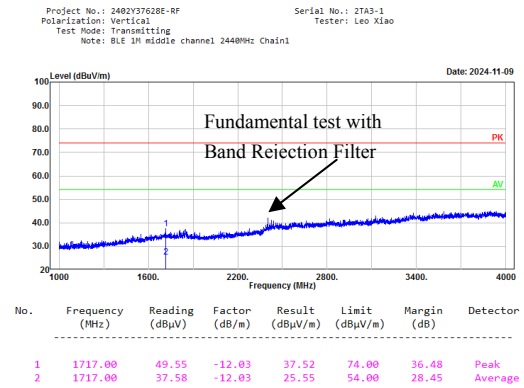

BLE 1M, High Channel, Chain 1, Horizontal

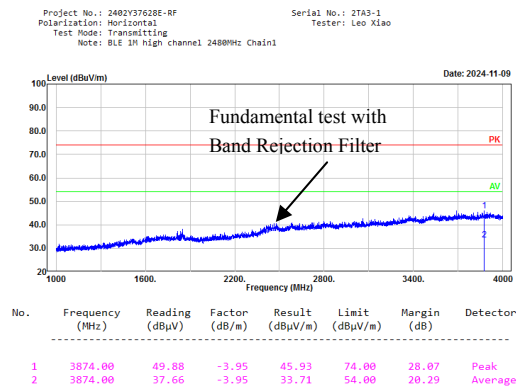

BLE 1M, High Channel, Chain 1, Vertical

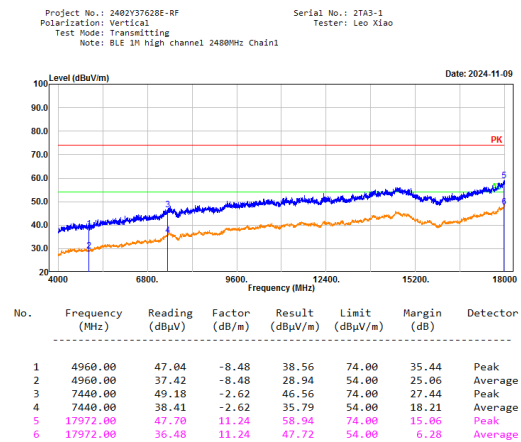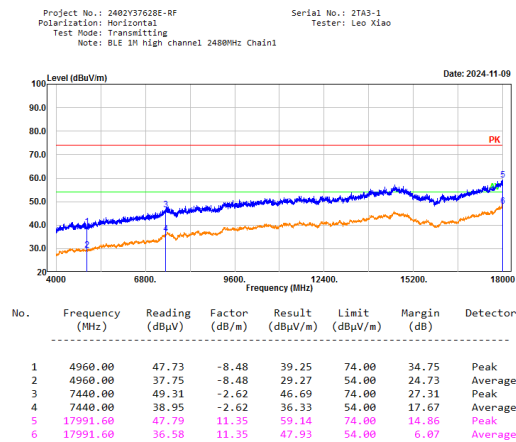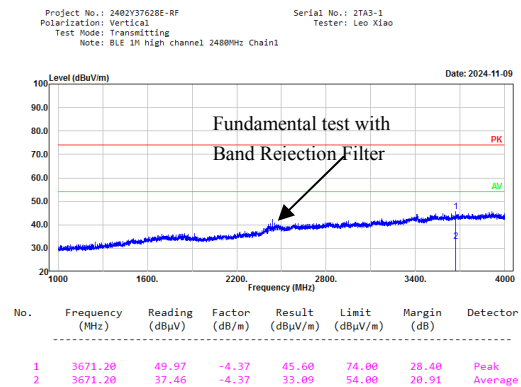


BLE 2M, Low Channel, Chain 1, Horizontal

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain1

Serial No.: 2TA3-1
Tester: Leo Xiao

Date: 2024-11-09

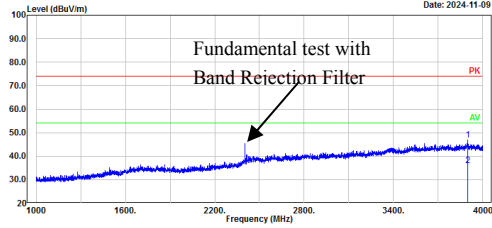


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3898.60	50.37	-3.60	46.77	74.00	27.23	Peak
2	3898.60	39.51	-3.60	35.91	54.00	18.09	Average

BLE 2M, Low Channel, Chain 1, Vertical

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain1

Serial No.: 2TA3-1
Tester: Leo Xiao

Date: 2024-11-09

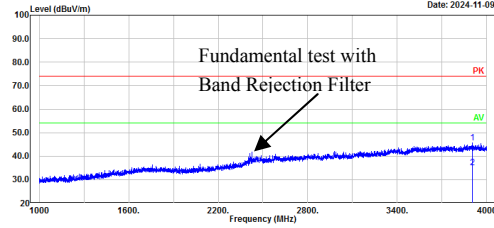


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3902.20	49.32	-3.62	45.70	74.00	28.30	Peak
2	3902.20	38.83	-3.62	35.21	54.00	18.79	Average

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain1

Serial No.: 2TA3-1
Tester: Leo Xiao

Date: 2024-11-09

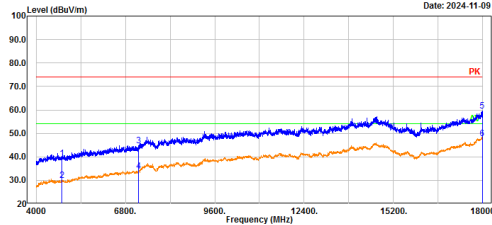


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4808.00	47.95	-8.60	39.35	74.00	34.65	Peak
2	4808.00	38.51	-8.60	29.91	54.00	24.09	Average
3	7212.00	48.43	-3.77	44.66	74.00	29.34	Peak
4	7212.00	37.64	-3.77	33.87	54.00	20.13	Average
5	17980.40	48.28	11.30	59.58	74.00	14.42	Peak
6	17980.40	36.48	11.30	47.78	54.00	6.22	Average

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain1

Serial No.: 2TA3-1
Tester: Leo Xiao


Date: 2024-11-09

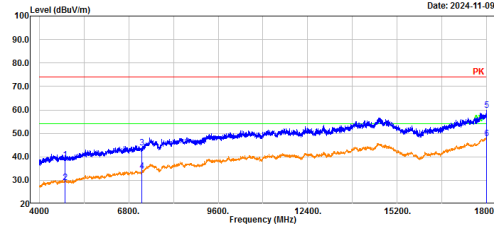

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4808.00	47.35	-8.60	38.75	74.00	35.25	Peak
2	4808.00	37.76	-8.60	29.16	54.00	24.84	Average
3	7212.00	47.58	-3.77	43.81	74.00	30.19	Peak
4	7212.00	37.51	-3.77	33.74	54.00	20.26	Average
5	17997.20	48.40	11.38	59.78	74.00	14.22	Peak
6	17997.20	36.32	11.38	47.70	54.00	6.30	Average

BLE 2M, Middle Channel, Chain 1,Horizontal


Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Serial No.: 2TA3-1
Tester: Leo Xiao
Note: BLE 2M middle channel 2440MHz Chain1

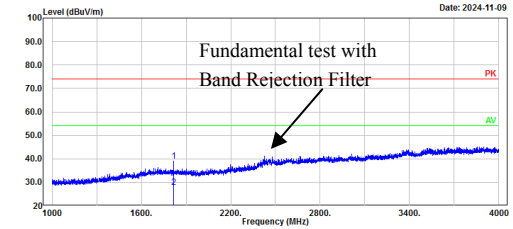

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1814.80	50.71	-11.77	38.94	74.00	35.06	Peak
2	1814.80	39.74	-11.77	27.97	54.00	26.03	Average


BLE 2M, Middle Channel, Chain 1,Vertical

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Serial No.: 2TA3-1
Tester: Leo Xiao
Note: BLE 2M middle channel 2440MHz Chain1

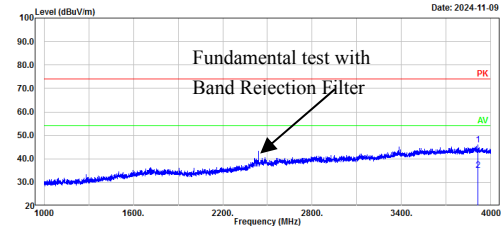


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3910.60	49.81	-3.70	46.11	74.00	27.89	Peak
2	3910.60	38.72	-3.70	35.02	54.00	18.98	Average

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Serial No.: 2TA3-1
Tester: Leo Xiao
Note: BLE 2M middle channel 2440MHz Chain1

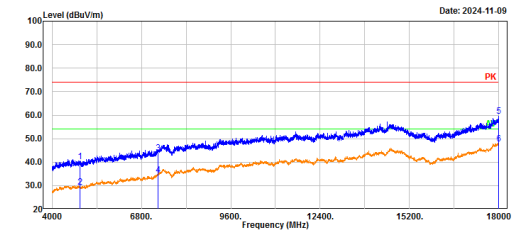


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4880.00	48.79	-8.48	40.31	74.00	33.69	Peak
2	4880.00	37.69	-8.48	29.21	54.00	24.79	Average
3	7320.00	47.01	-3.21	43.80	74.00	30.20	Peak
4	7320.00	37.65	-3.21	34.44	54.00	19.56	Average
5	17997.20	48.24	11.38	59.62	74.00	14.38	Peak
6	17997.20	36.42	11.38	47.80	54.00	6.20	Average

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Serial No.: 2TA3-1
Tester: Leo Xiao
Note: BLE 2M middle channel 2440MHz Chain1



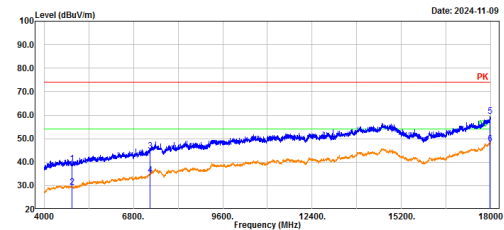


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4880.00	47.81	-8.48	39.33	74.00	34.67	Peak
2	4880.00	37.88	-8.48	29.40	54.00	24.60	Average
3	7320.00	48.04	-3.21	44.83	74.00	29.17	Peak
4	7320.00	37.73	-3.21	34.52	54.00	19.48	Average
5	17977.60	48.19	11.28	59.47	74.00	14.53	Peak
6	17977.60	36.49	11.28	47.77	54.00	6.23	Average

BLE 2M, High Channel, Chain 1,Horizontal

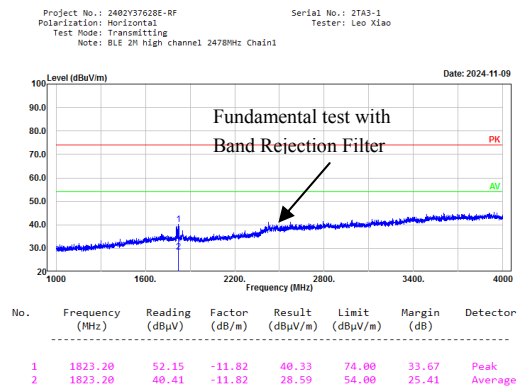





BLE 2M, High Channel, Chain 1,Vertical

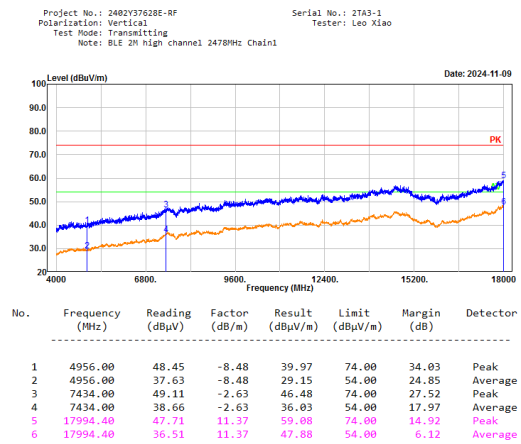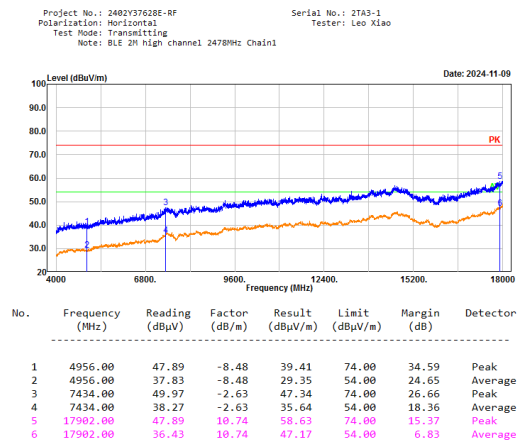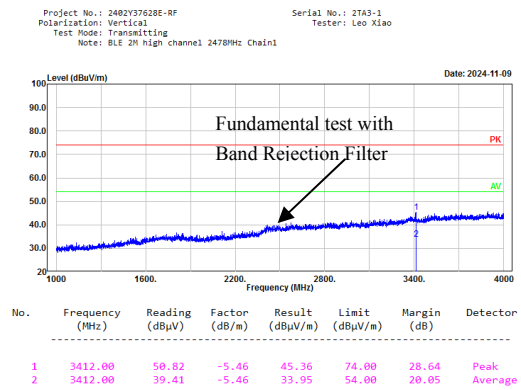


18-25GHz:

No Emission was detected in the range 18-25GHz, test was performed on the mode and channel which with the maximum power.


BLE 2M, Middle Channel, Chain 0, Horizontal				BLE 2M, Middle Channel, Chain 0, Vertical																																																			
<div><div><div>Project No.: 2402Y37628E-RF</div><div>Polarization: Horizontal</div><div>Test Mode: Transmitting</div><div>Note: BLE 2M middle channel 2441MHz Chain0</div></div><div><div>Serial No.: 2TA3-1</div><div>Tester: Leo Xiao</div></div></div> <div><div>Level (dBuV/m)</div><div>10090.080.070.060.050.040.030.020</div><div>180001940020800222002360025000</div><div>Frequency (MHz)</div><div>Date: 2024-11-09</div></div> <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>19251.20</td><td>47.08</td><td>7.69</td><td>54.77</td><td>74.00</td><td>19.23</td><td>Peak</td></tr><tr><td>2</td><td>19251.20</td><td>34.92</td><td>7.69</td><td>42.61</td><td>54.00</td><td>11.39</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	19251.20	47.08	7.69	54.77	74.00	19.23	Peak	2	19251.20	34.92	7.69	42.61	54.00	11.39	Average	<div><div><div>Project No.: 2402Y37628E-RF</div><div>Polarization: Vertical</div><div>Test Mode: Transmitting</div><div>Note: BLE 2M middle channel 2441MHz Chain0</div></div><div><div>Serial No.: 2TA3-1</div><div>Tester: Leo Xiao</div></div></div> <div><div>Level (dBuV/m)</div><div>10090.080.070.060.050.040.030.020</div><div>180001940020800222002360025000</div><div>Frequency (MHz)</div><div>Date: 2024-11-09</div></div> <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Result (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1</td><td>18748.00</td><td>46.41</td><td>7.61</td><td>54.02</td><td>74.00</td><td>19.98</td><td>Peak</td></tr><tr><td>2</td><td>18748.00</td><td>34.70</td><td>7.61</td><td>42.31</td><td>54.00</td><td>11.69</td><td>Average</td></tr></table>				No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	18748.00	46.41	7.61	54.02	74.00	19.98	Peak	2	18748.00	34.70	7.61	42.31	54.00	11.69	Average
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																
1	19251.20	47.08	7.69	54.77	74.00	19.23	Peak																																																
2	19251.20	34.92	7.69	42.61	54.00	11.39	Average																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																																																
1	18748.00	46.41	7.61	54.02	74.00	19.98	Peak																																																
2	18748.00	34.70	7.61	42.31	54.00	11.69	Average																																																

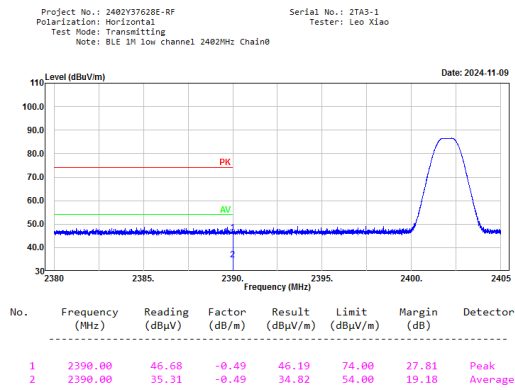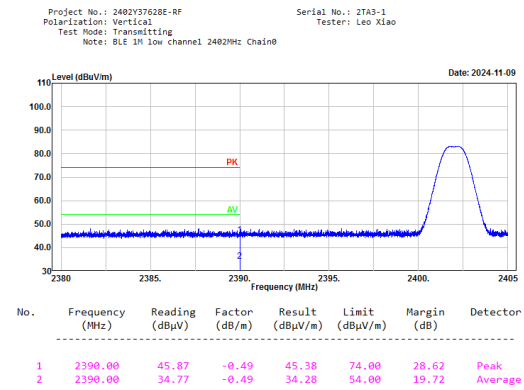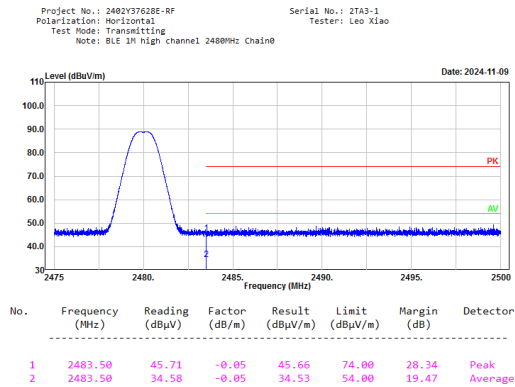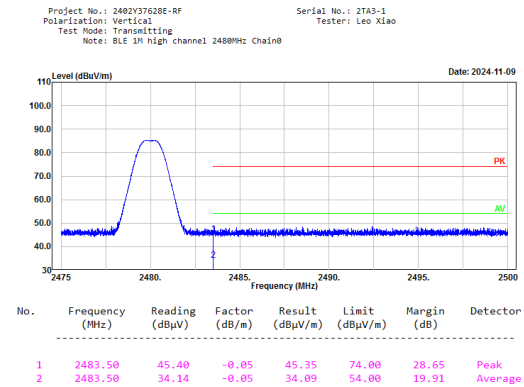Bandedge:**BLE 1M, Low Channel, Chain 0,Horizontal****BLE 1M, Low Channel, Chain 0,Vertical****BLE 1M, High Channel, Chain 0, Horizontal****BLE 1M, High Channel, Chain 0,Vertical**


BLE 2M, Low Channel, Chain 0, Horizontal

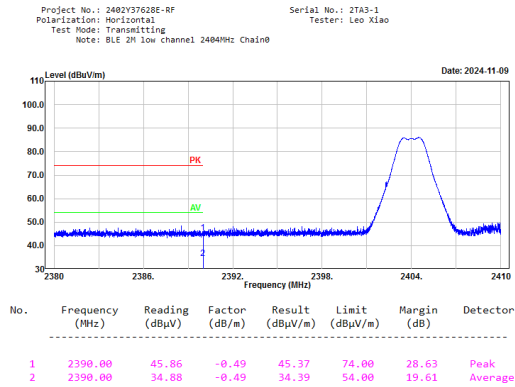


BLE 2M, Low Channel, Chain 0, Vertical

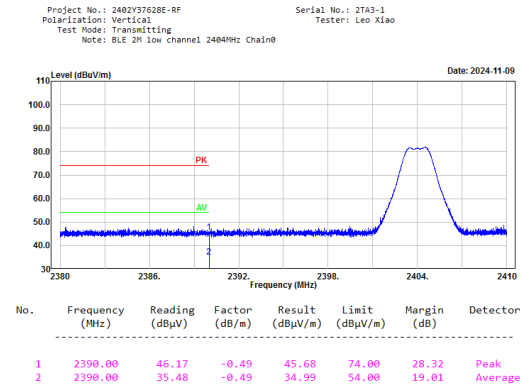


BLE 2M, High Channel, Chain 0, Horizontal

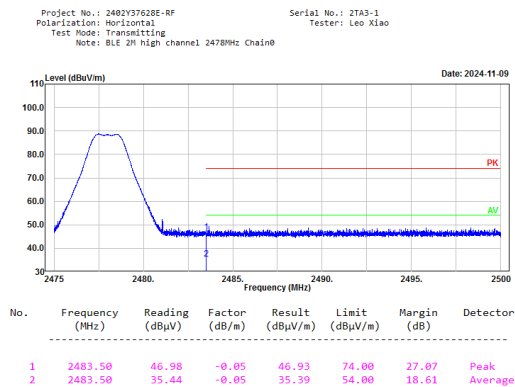


BLE 2M, High Channel, Chain 0, Vertical

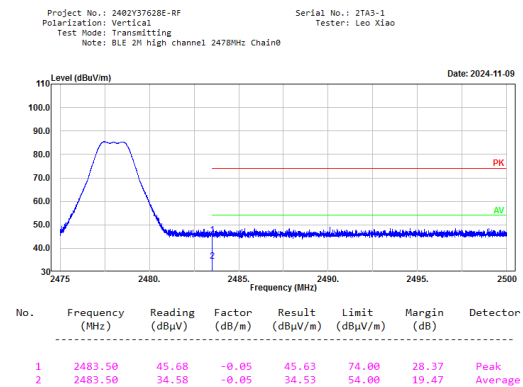


BLE 1M, Low Channel, Chain 1, Horizontal

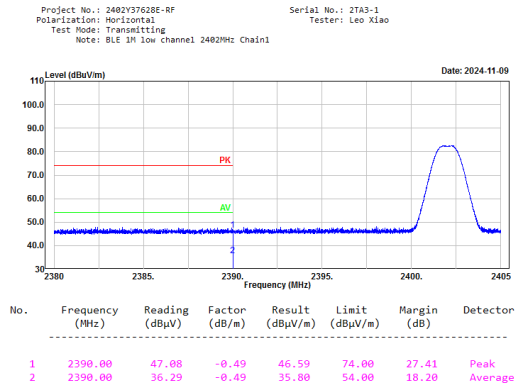


BLE 1M, Low Channel, Chain 1, Vertical

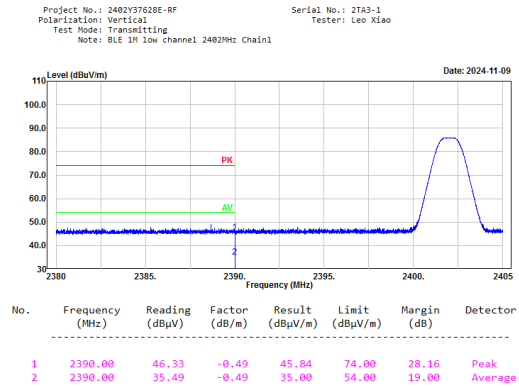

BLE 1M, High Channel, Chain 1, Horizontal

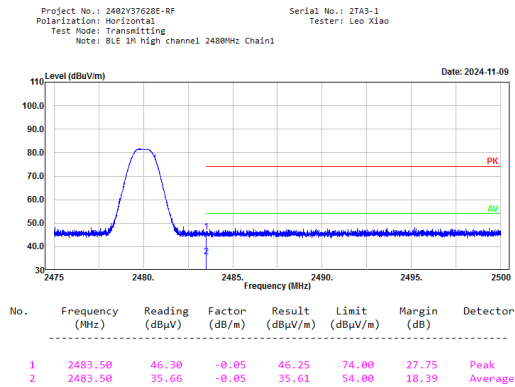


BLE 1M, High Channel, Chain 1, Vertical

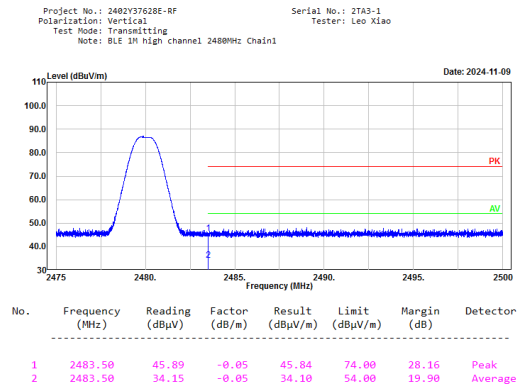

BLE 2M, Low Channel, Chain 1, Horizontal

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain1

Serial No.: 2TA3-1
Tester: Leo Xiao

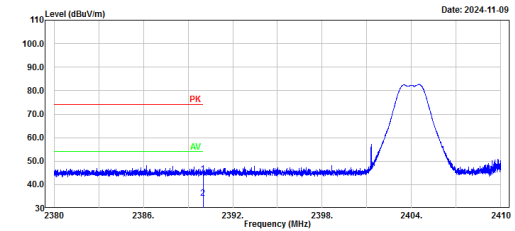


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.00	44.99	-0.49	44.50	74.00	29.50	Peak
2	2390.00	34.78	-0.49	34.29	54.00	19.71	Average

BLE 2M, Low Channel, Chain 1, Vertical

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M low channel 2404MHz Chain1

Serial No.: 2TA3-1
Tester: Leo Xiao

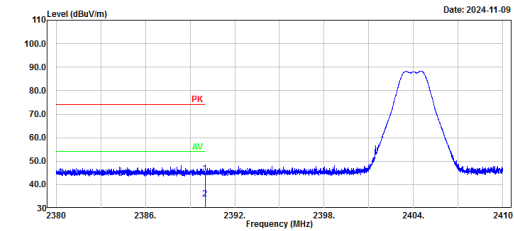


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.00	45.35	-0.49	44.86	74.00	29.14	Peak
2	2390.00	34.51	-0.49	34.02	54.00	19.98	Average

BLE 2M, High Channel, Chain 1, Horizontal

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 2M high channel 2478MHz Chain1

Serial No.: 2TA3-1
Tester: Leo Xiao

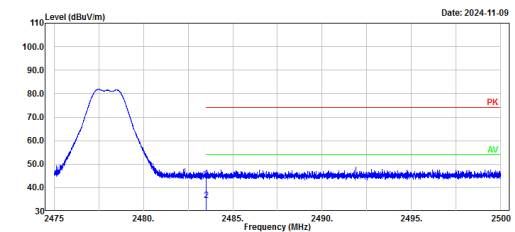


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.50	44.04	-0.05	43.99	74.00	30.01	Peak
2	2483.50	34.60	-0.05	34.55	54.00	19.45	Average

BLE 2M, High Channel, Chain 1, Vertical

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 2M high channel 2478MHz Chain1


Serial No.: 2TA3-1
Tester: Leo Xiao

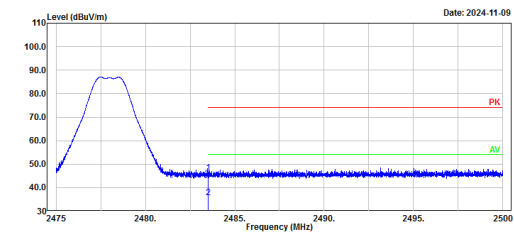




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.50	46.45	-0.05	46.40	74.00	27.60	Peak
2	2483.50	35.86	-0.05	35.81	54.00	18.19	Average

Spot Check:
Configuration 2#:
1-18GHz:

**BLE 1Mbps, Low Channel, Chain 1,
Horizontal**

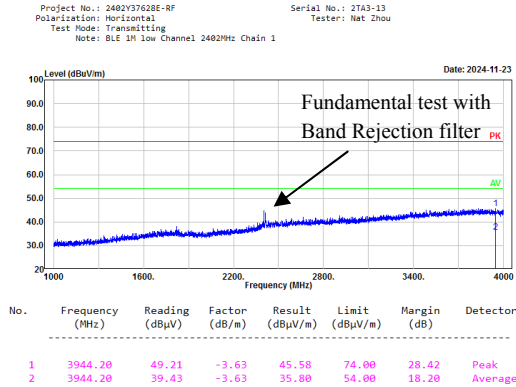


BLE 1Mbps, Low Channel, Chain 1, Vertical

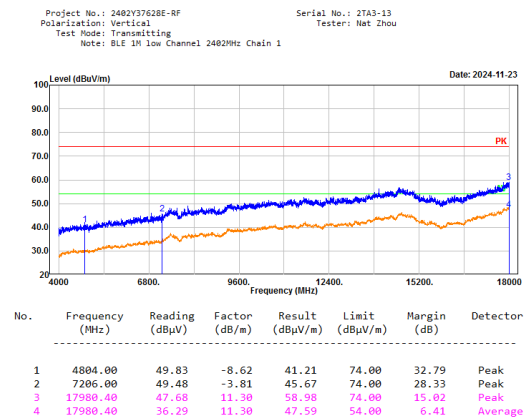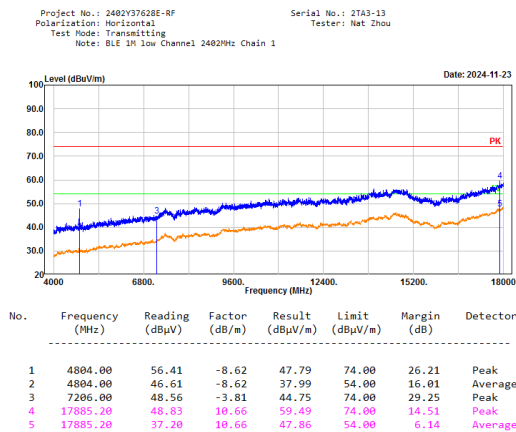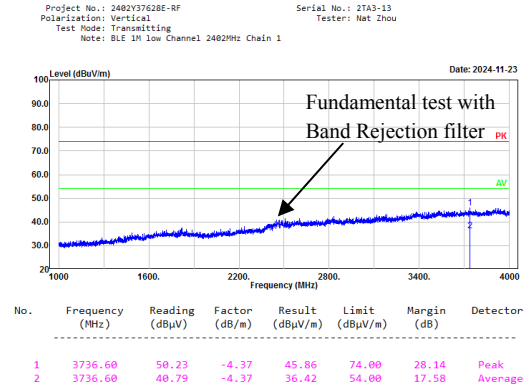

**BLE 1Mbps, Middle Channel, Chain 1,
Horizontal**


Project No.: 2402Y37628E-RF Serial No.: 2TA3-13
Polarization: Horizontal Tester: Nat Zhou
Test Mode: Transmitting
Note: BLE 1M middle Channel 2440MHz Chain 1

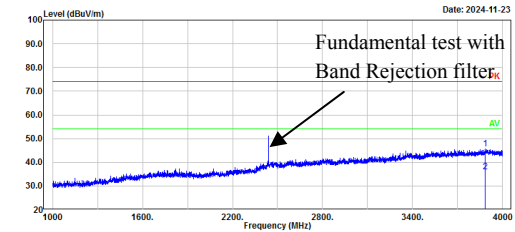

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3883.60	49.46	-3.87	45.59	74.00	28.41	Peak
2	3883.60	39.79	-3.87	35.92	54.00	18.08	Average


**BLE 1Mbps, Middle Channel, Chain 1,
Vertical**

Project No.: 2402Y37628E-RF Serial No.: 2TA3-13
Polarization: Vertical Tester: Nat Zhou
Test Mode: Transmitting
Note: BLE 1M middle Channel 2440MHz Chain 1

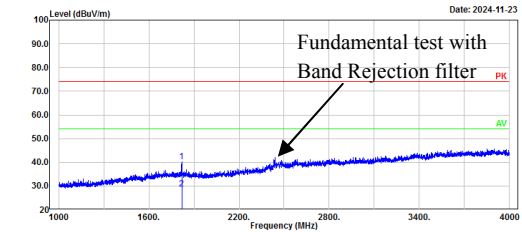


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1819.00	51.91	-11.79	40.12	74.00	33.88	Peak
2	1819.00	40.67	-11.79	28.88	54.00	25.12	Average

Project No.: 2402Y37628E-RF Serial No.: 2TA3-13
Polarization: Horizontal Tester: Nat Zhou
Test Mode: Transmitting
Note: BLE 1M middle Channel 2440MHz Chain 1

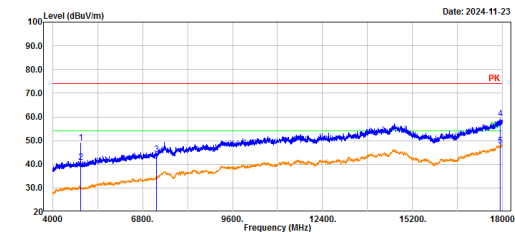

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4880.00	57.37	-8.48	48.89	74.00	25.11	Peak
2	4880.00	49.21	-8.48	40.73	54.00	13.27	Average
3	7320.00	47.97	-3.70	44.27	74.00	29.73	Peak
4	17930.00	48.40	10.95	59.35	74.00	14.65	Peak
5	17930.00	36.72	10.95	47.67	54.00	6.33	Average

Project No.: 2402Y37628E-RF Serial No.: 2TA3-13
Polarization: Vertical Tester: Nat Zhou
Test Mode: Transmitting
Note: BLE 1M middle Channel 2440MHz Chain 1

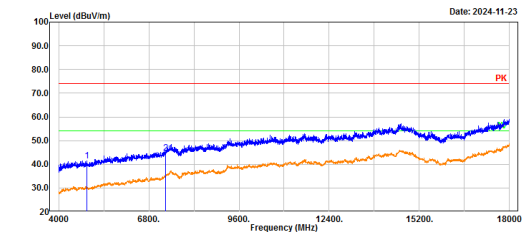


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4880.00	49.99	-8.48	41.51	74.00	32.49	Peak
2	7320.00	47.84	-3.21	44.63	74.00	29.37	Peak
3	18000.00	47.85	11.39	59.24	74.00	14.76	Peak
4	18000.00	36.38	11.39	47.77	54.00	6.23	Average

**BLE 1Mbps, High Channel, Chain 1,
Horizontal**

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 1M High Channel 2480MHz Chain 1

Serial No.: 2TA3-13
Tester: Nat Zhou

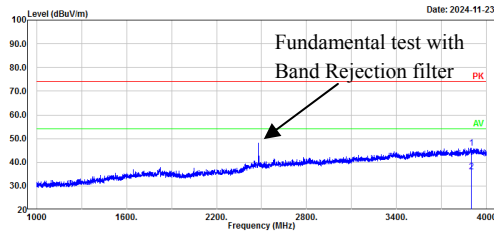


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3898.60	49.68	-3.60	46.08	74.00	27.92	Peak
2	3898.60	39.57	-3.60	35.97	54.00	18.03	Average

**BLE 1Mbps, High Channel, Chain 1,
Vertical**

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 1M High Channel 2480MHz Chain 1


Serial No.: 2TA3-13
Tester: Nat Zhou

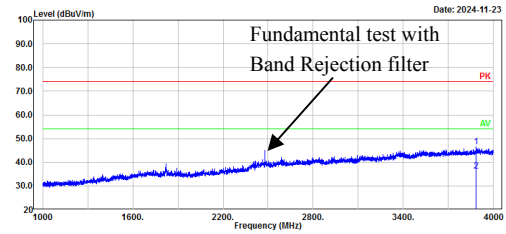

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3882.40	50.56	-3.91	46.65	74.00	27.35	Peak
2	3882.40	40.35	-3.91	36.44	54.00	17.56	Average

Project No.: 2402Y37628E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: BLE 1M High Channel 2480MHz Chain 1


Serial No.: 2TA3-13
Tester: Nat Zhou

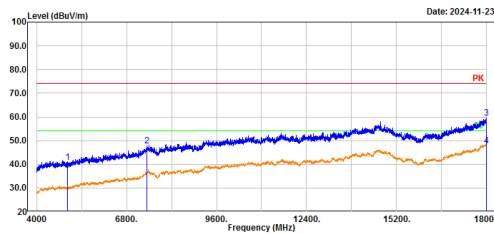

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4960.00	49.26	-8.48	40.78	74.00	33.22	Peak
2	7440.00	50.39	-2.62	47.77	74.00	26.23	Peak
3	17988.80	48.35	11.33	59.68	74.00	14.32	Peak
4	17988.80	36.48	11.33	47.81	54.00	6.19	Average

Project No.: 2402Y37628E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: BLE 1M High Channel 2480MHz Chain 1


Serial No.: 2TA3-13
Tester: Nat Zhou

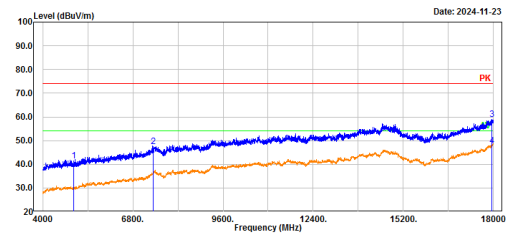

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4960.00	50.06	-8.48	41.58	74.00	32.42	Peak
2	7440.00	50.13	-2.62	47.51	74.00	26.49	Peak
3	17941.20	47.80	11.03	58.83	74.00	15.17	Peak
4	17941.20	36.66	11.03	47.69	54.00	6.31	Average

18-25GHz:**BLE 1Mbps, Middle Channel, Chain 1,
Horizontal**


Project No.: 2402Y37628E-RF Serial No.: 2TA3-13
Polarization: Horizontal Tester: Nat Zhou
Test Mode: Transmitting
Note: BLE 1M middle Channel 2448MHz Chain 1

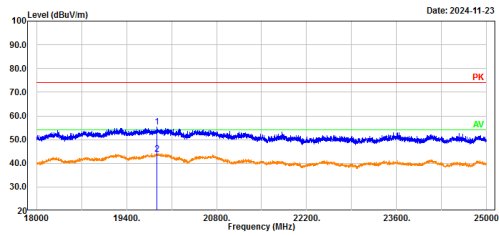

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19874.60	47.43	7.80	55.23	74.00	18.77	Peak
2	19874.60	36.08	7.80	43.88	54.00	10.12	Average

**BLE 1Mbps, Middle Channel, Chain 1,
Vertical**

Project No.: 2402Y37628E-RF Serial No.: 2TA3-13
Polarization: Vertical Tester: Nat Zhou
Test Mode: Transmitting
Note: BLE 1M middle Channel 2448MHz Chain 1

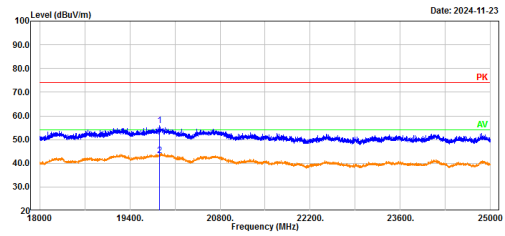

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	19857.80	48.12	7.73	55.85	74.00	18.15	Peak
2	19857.80	35.63	7.73	43.36	54.00	10.64	Average

5.3 6dB Emission Bandwidth

Test Information:

Serial No.:	2TA3-3	Test Date:	2024/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	26.1	Relative Humidity: (%)	35	ATM Pressure: (kPa)	100.9
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK- 6G-10dB	F-08-EM488	2024/06/07	2025/06/06
R&S	EMI Test Receiver	ESCI	101121	2024/09/05	2025/09/04


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note: Test only was performed at Chain 0.


Channel	Result (MHz)	Limit (MHz)	Verdict
BLE 1Mbps Low	0.672	≥0.5	Pass
BLE 1Mbps Middle	0.672	≥0.5	Pass
BLE 1Mbps High	0.676	≥0.5	Pass
BLE 2Mbps Low	1.180	≥0.5	Pass
BLE 2Mbps Middle	1.176	≥0.5	Pass
BLE 2Mbps High	1.180	≥0.5	Pass

BLE_1M_Low_Channel

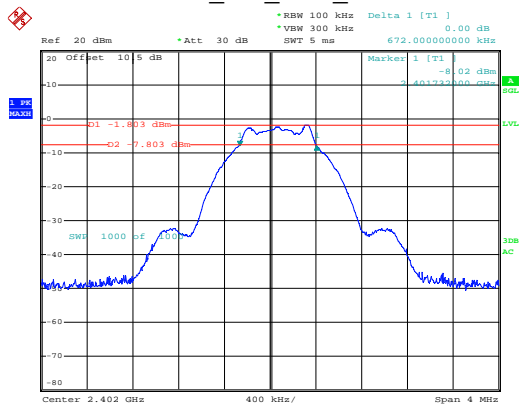


ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:14:50

BLE_1M_Middle_Channel

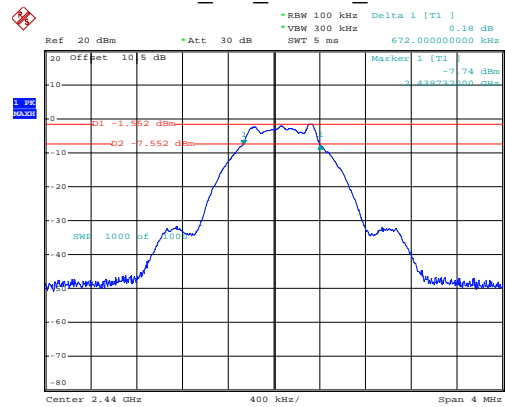


ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:16:43

BLE_1M_High_Channel

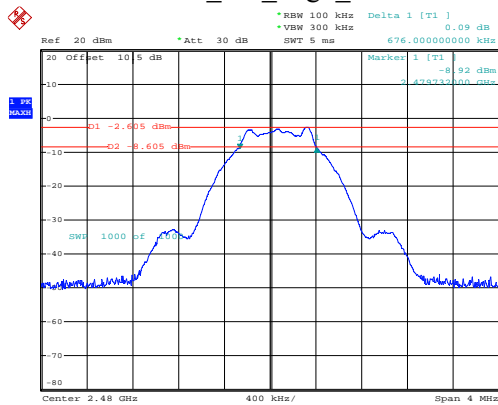


ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:17:24

BLE_2M_Low_Channel

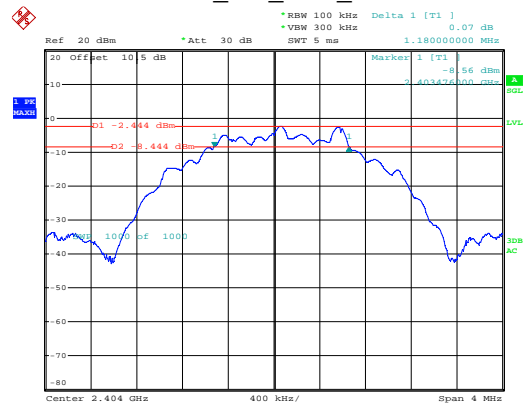


ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:18:14

BLE_2M_Middle_Channel

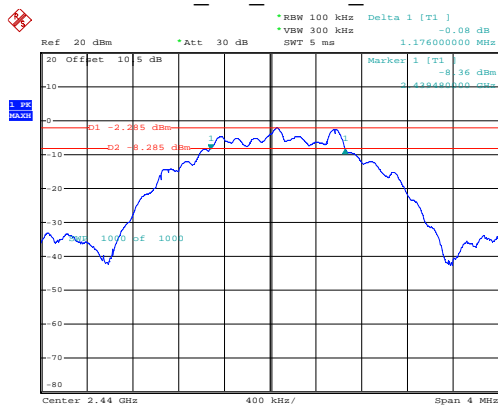

ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:18:54

BLE_2M_High_Channel

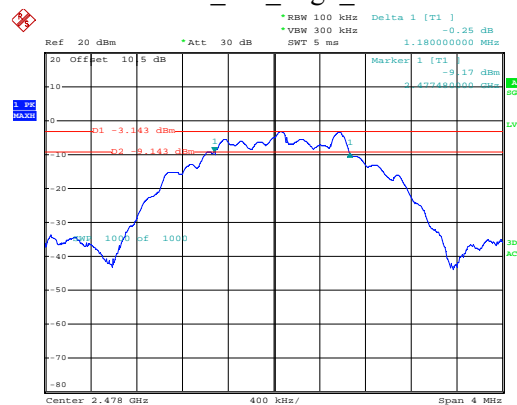

ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:19:37

5.4 Maximum Conducted Output Power

Test Information:

Serial No.:	2TA3-3	Test Date:	2024/10/25~2024/12/06
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	23.8~26.1	Relative Humidity: (%)	28~51	ATM Pressure: (kPa)	100.9~102.3
-----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM488	2024/06/07	2025/06/06
R&S	EMI Test Receiver	ESCI	101121	2024/09/05	2025/09/04
R&S	Spectrum Analyzer	FSV40	101589	2024/09/05	2025/09/04

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Chain 0


Channel	Result (dBm)	Limit (dBm)	Verdict
BLE 1Mbps Low	-1.45	30.00	Pass
BLE 1Mbps Middle	-1.11	30.00	Pass
BLE 1Mbps High	-2.18	30.00	Pass
BLE 2Mbps Low	-1.26	30.00	Pass
BLE 2Mbps Middle	-1.08	30.00	Pass
BLE 2Mbps High	-1.97	30.00	Pass

Chain 1

Channel	Result (dBm)	Limit (dBm)	Verdict
BLE 1Mbps Low	-1.70	30.00	Pass
BLE 1Mbps Middle	-1.20	30.00	Pass
BLE 1Mbps High	-3.07	30.00	Pass
BLE 2Mbps Low	-1.72	30.00	Pass
BLE 2Mbps Middle	-1.10	30.00	Pass
BLE 2Mbps High	-2.79	30.00	Pass


Chain 0

BLE_1M_Low_Channel

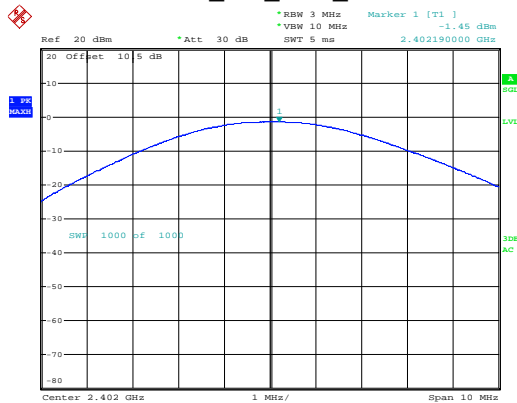


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:03:01

BLE_1M_Middle_Channel

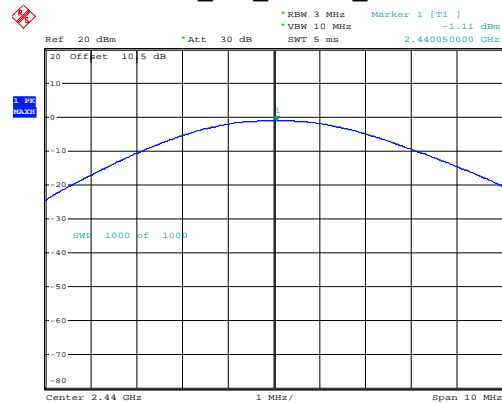


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:03:49

BLE_1M_High_Channel

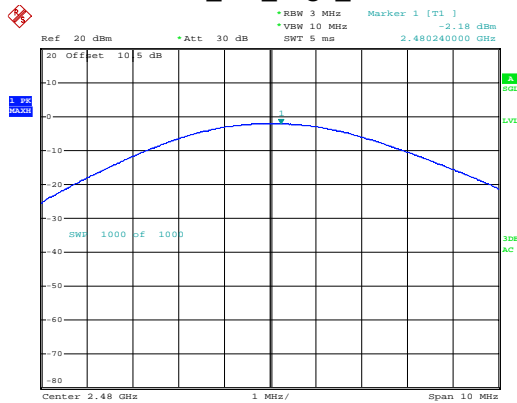


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:04:37

BLE_2M_Low_Channel

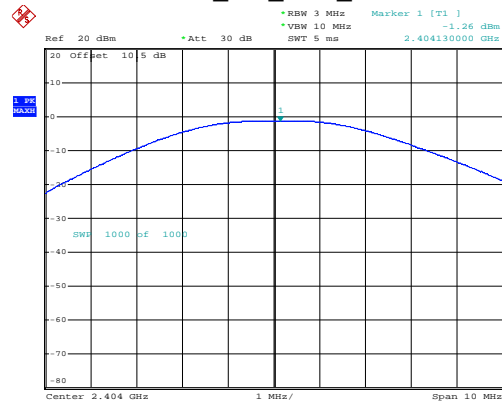


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:05:36

BLE_2M_Middle_Channel

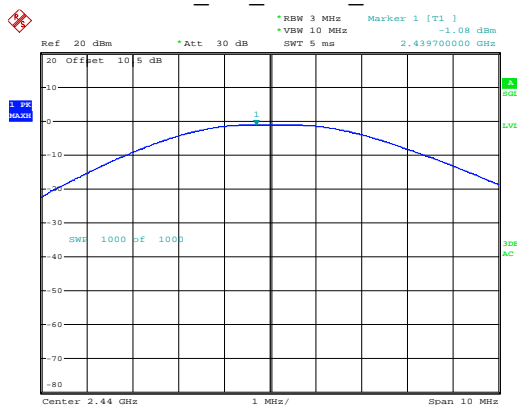

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:06:24


BLE_2M_High_Channel

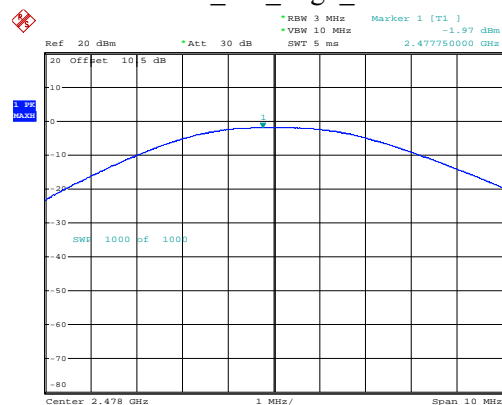

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:07:13


Chain 1

BLE_1M_Low_Channel

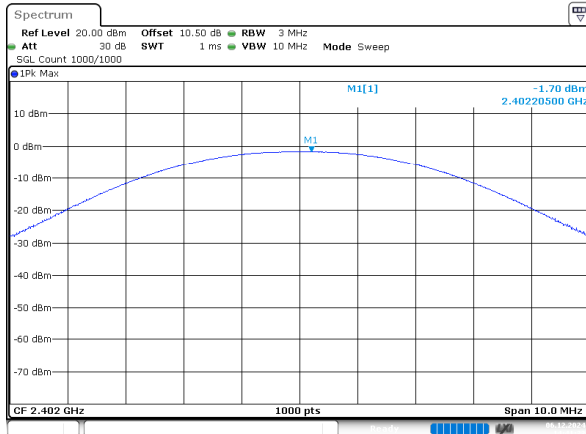


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 6.DEC.2024 14:41:33

BLE_1M_Middle_Channel

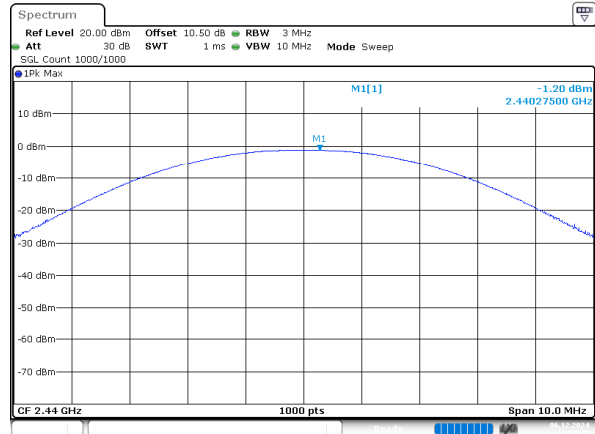


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 6.DEC.2024 14:58:57

BLE_1M_High_Channel

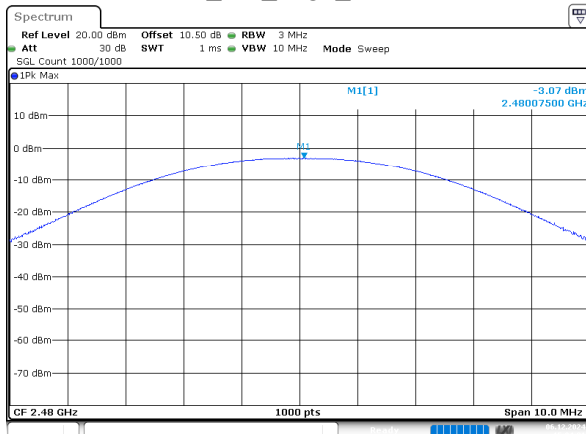


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 6.DEC.2024 15:04:01

BLE_2M_Low_Channel

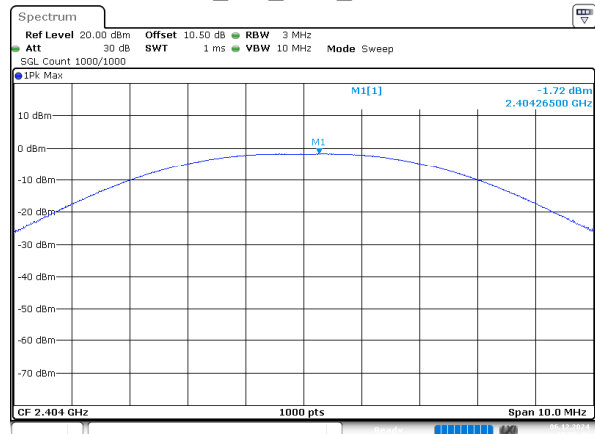


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 6.DEC.2024 15:05:24

BLE_2M_Middle_Channel

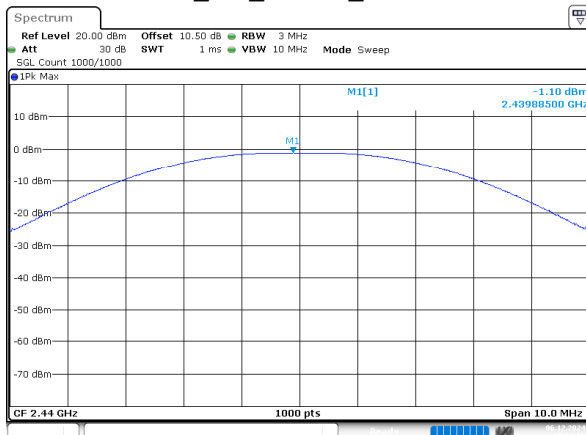

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 6.DEC.2024 15:09:00

BLE_2M_High_Channel

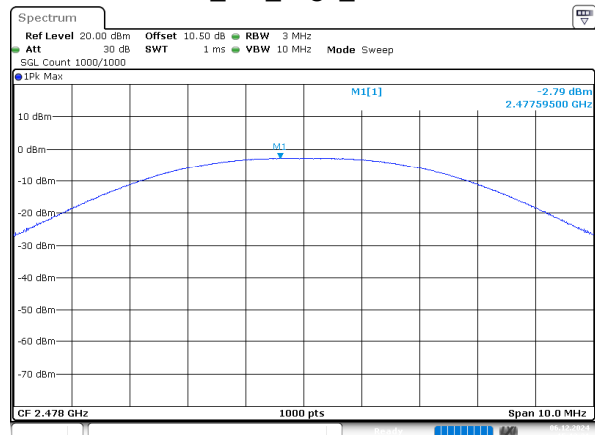

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 6.DEC.2024 15:12:31

5.5 Power Spectral Density

Test Information:

Serial No.:	2TA3-3	Test Date:	2024/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	26.1	Relative Humidity: (%)	35	ATM Pressure: (kPa)	100.9
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM488	2024/06/07	2025/06/06
R&S	EMI Test Receiver	ESCI	101121	2024/09/05	2025/09/04

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Note: Test only was performed at Chain 0.

Channel	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1Mbps Low	-18.17	8	Pass
BLE 1Mbps Middle	-17.92	8	Pass
BLE 1Mbps High	-18.96	8	Pass
BLE 2Mbps Low	-20.28	8	Pass
BLE 2Mbps Middle	-20.27	8	Pass
BLE 2Mbps High	-21.15	8	Pass

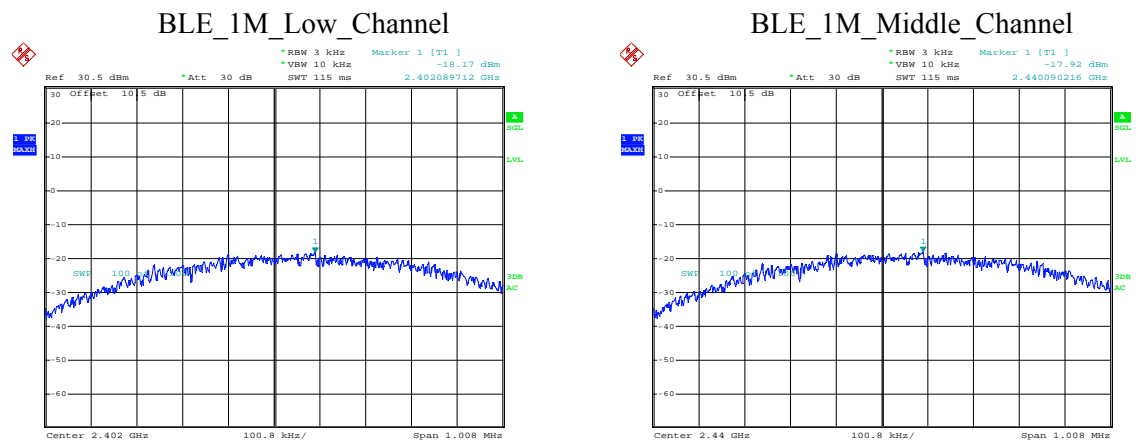


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:35:12

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:35:41

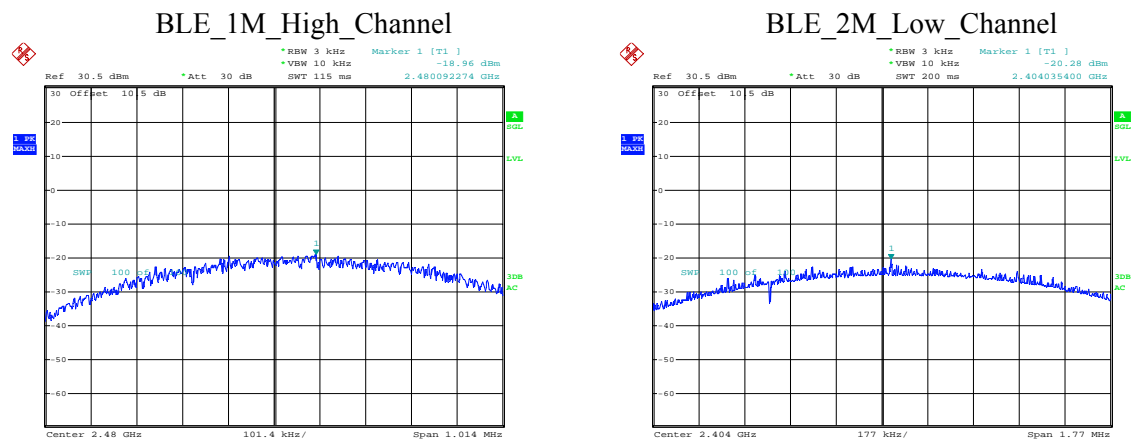

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:36:06

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:36:43

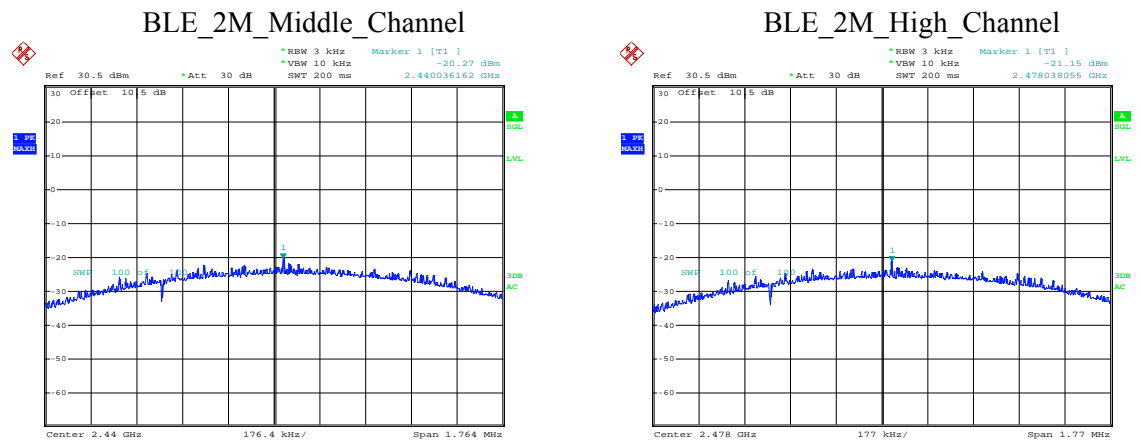

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:37:17

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 11:37:52

5.6 100 kHz Bandwidth of Frequency Band Edge**Test Information:**

Serial No.:	2TA3-3	Test Date:	2024/10/25~2024/11/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	Pass

Environmental Conditions:

Temperature: (°C):	23.8~26.1	Relative Humidity: (%)	28~35	ATM Pressure: (kPa)	100.9~102.3
-------------------------------	-----------	---------------------------------------	-------	--------------------------------	-------------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM488	2024/06/07	2025/06/06
R&S	Spectrum Analyzer	FSP 38	100478	2024/09/05	2025/09/04


** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


Note: Test only was performed at Chain 0.

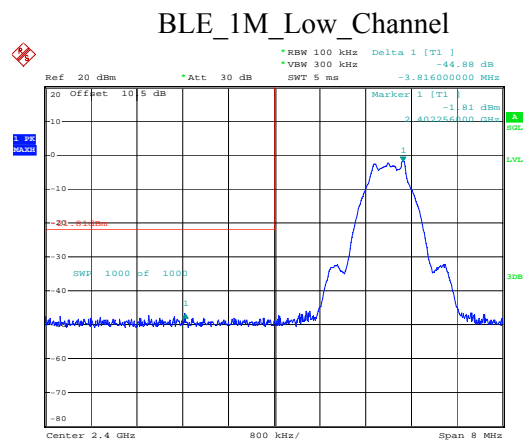


ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 13:06:51

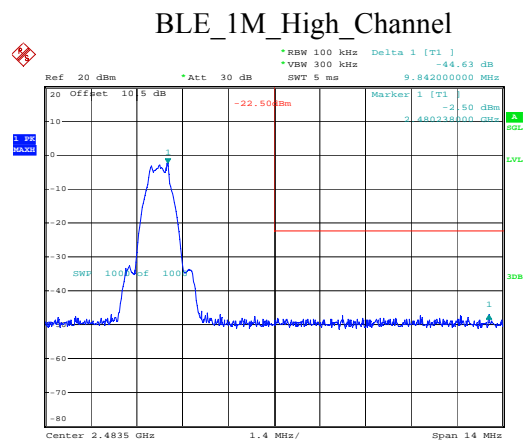

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 25.OCT.2024 13:07:41

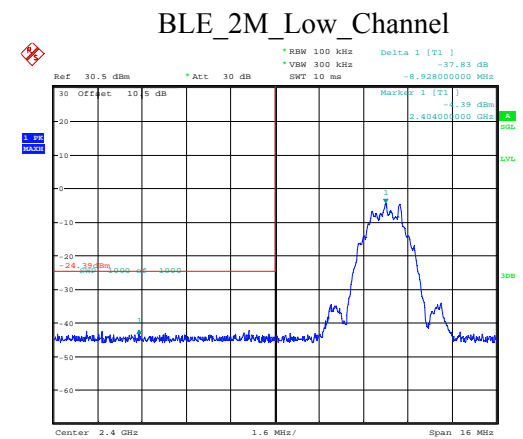

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 29.NOV.2024 19:25:58

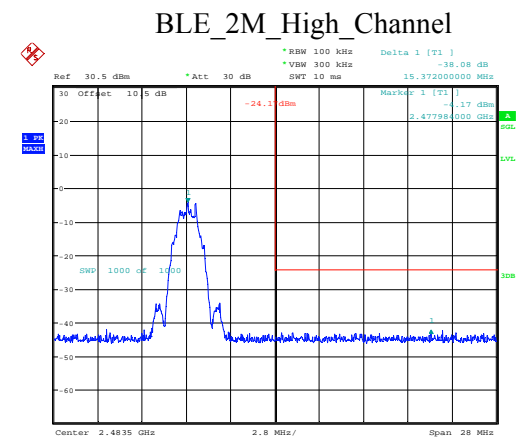

ProjectNo.:2402Y37628E-RF Tester: Tower Qing
Date: 29.NOV.2024 19:27:07

5.7 Duty Cycle

Test Information:

Serial No.:	2TA3-3	Test Date:	2024/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Tower Qing	Test Result:	/

Environmental Conditions:

Temperature: (°C):	26.1	Relative Humidity: (%)	35	ATM Pressure: (kPa)	100.9
-----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM488	2024/06/07	2025/06/06
R&S	EMI Test Receiver	ESCI	101121	2024/09/05	2025/09/04


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Channel	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	1/Ton (Hz)	VBW Setting (kHz)
BLE 1Mbps Middle	2.109	2.513	83.92	474	0.500
BLE 2Mbps Middle	1.049	1.875	55.95	953	1

Duty Cycle = Ton/(Ton+Toff)*100%

Note: Test only was performed at Chain 0.

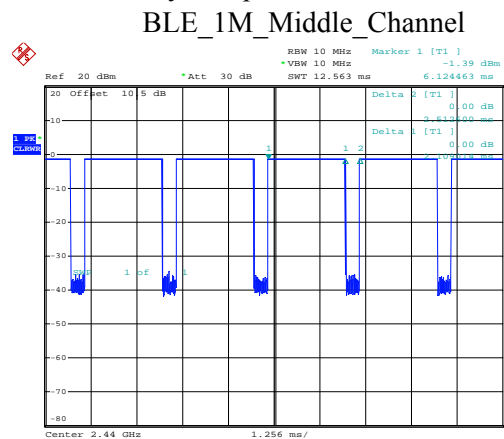

ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:09:25

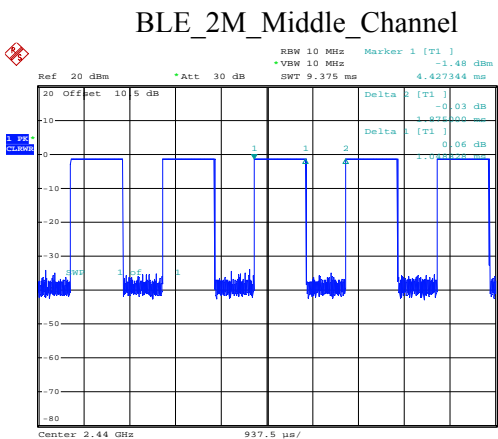

ProjectNo.:2402Y37628E-RF Tester:Tower Qing
Date: 25.OCT.2024 11:12:19

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402Y37628E-RF-EXPEUT EXTERNAL PHOTOGRAPHS and 2402Y37628E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402Y37628E-RF-00A-TSP TEST SETUP PHOTOGRAPHS.

EXHIBIT C - RF EXPOSURE EVALUATION

Maximum Permissible Exposure (MPE)

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is -1.0 dBm (0.79 mW).

$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 $= (0.79/5) \cdot (\sqrt{2.480}) = 0.3 < 3.0$

Note: the max conducted power including tune-up tolerance was declared by manufacturer.

Result: Compliant. The stand-alone SAR evaluation is not necessary.

***** END OF REPORT *****