



RF TEST REPORT

Applicant Espressif Systems (Shanghai) Co.,Ltd.
FCC ID 2AC7Z-ESP868503
Product Wi-Fi & Bluetooth Internet of Things Module
Brand ESPRESSIF
Model ESP8685-WROOM-03
Report No. R2105A0442-R1
Issue Date October 11, 2021

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2020)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test	5
2.1. Applicant and Manufacturer Information	5
2.2. General information	5
3. Applied Standards	6
4. Test Configuration	7
5. Test Case Results	8
5.1. Maximum output power	8
5.2. 99% Bandwidth and 6dB Bandwidth	11
5.3. Band Edge	25
5.4. Power Spectral Density	29
5.5. Spurious RF Conducted Emissions	38
5.6. Unwanted Emission	46
5.7. Conducted Emission	108
6. Main Test Instruments	111
ANNEX A: The EUT Appearance	112
ANNEX B: Test Setup Photos	113

Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS
Date of Testing: May 24, 2021 ~ June 26, 2021			
Date of Sample Received: May 24, 2021			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.1. Applicant and Manufacturer Information

Applicant	Espressif Systems (Shanghai) Co.,Ltd.
Applicant address	Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China
Manufacturer	Espressif Systems (Shanghai) Co.,Ltd.
Manufacturer address	Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

2.2. General information

EUT Description	
Model	ESP8685-WROOM-03
Lab internal SN	R2105A0442/S02
Hardware Version	V1.2
Software Version	V1.1.3.0
Power Supply	External power supply
Antenna Type	PCB Antenna
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain	3.96 dBi
additional beamforming gain	NA
Test Mode	802.11b, 802.11g, 802.11n(HT20/HT40) Bluetooth LE V5.0
Modulation Type	802.11b: DSSS 802.11g/n(HT20/HT40): OFDM Bluetooth LE: GFSK
Max. Conducted Power	Wi-Fi 2.4G: 19.36dBm Bluetooth LE: 8.89dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz Bluetooth LE: 2402 ~2480 MHz
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15C (2020) Radio Frequency Devices

ANSI C63.10 (2013)

Reference standard:

KDB 558074 D01 15.247 Meas Guidance v05r02

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
Bluetooth(Low Energy)	1Mbps, 2Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

5. Test Case Results

5.1. Maximum output power


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Power meter with a known loss. The EUT is max power transmission with proper modulation.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.

Test Results

Power Index					
Channel	802.11b	802.11g	802.11n HT20	Channel	802.11n HT40
CH1	0	16	16	CH3	20
CH2	-	0	4	CH4	20
CH3	-	-	0	CH5	16
CH5	-	-	-	CH6	-
CH6	0	-	-	CH7	24
CH8	-	0	-	CH8	32
CH9	-	4	0	CH9	28
CH10	-	4	4	-	-
CH11	0	26	24	-	-

Test Mode	T _{on} (ms)	T _(on+off) (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	1.00	1.00	1.00	NA
802.11g	1.00	1.00	1.00	NA
802.11n HT20	1.00	1.00	1.00	NA
802.11n HT40	1.00	1.00	1.00	NA
Bluetooth LE (1M)	2.10	2.50	0.840	0.759
Bluetooth LE (2M)	1.07	1.88	0.567	2.465
Note: when Duty cycle ≥ 0.98 , Duty cycle correction Factor not required.				

Test Mode	Carrier frequency (MHz)	Average Power Measured (dBm)	Average Power with duty factor (dBm)	Limit (dBm)	Conclusion
802.11b	2412	18.84	18.84	30	PASS
	2437	19.33	19.33	30	PASS
	2462	19.36	19.36	30	PASS
802.11g	2412	14.83	14.83	30	PASS
	2417	18.30	18.30	30	PASS
	2437	18.33	18.33	30	PASS
	2447	18.62	18.62	30	PASS
	2452	17.93	17.93	30	PASS
	2457	17.85	17.85	30	PASS
	2462	12.52	12.52	30	PASS
802.11n HT20	2412	14.14	14.14	30	PASS
	2417	16.92	16.92	30	PASS
	2422	17.77	17.77	30	PASS
	2437	17.28	17.28	30	PASS
	2452	17.81	17.81	30	PASS
	2457	17.07	17.07	30	PASS
	2462	12.13	12.13	30	PASS
802.11n HT40	2422	12.46	12.46	30	PASS
	2427	12.82	12.82	30	PASS
	2432	13.86	13.86	30	PASS
	2437	16.92	16.92	30	PASS
	2442	11.54	11.54	30	PASS
	2447	9.47	9.47	30	PASS
	2452	10.35	10.35	30	PASS
Bluetooth (Low Energy) (1M)	2402	7.55	8.31	30	PASS
	2440	7.98	8.74	30	PASS
	2480	7.87	8.63	30	PASS
Bluetooth (Low Energy) (2M)	2402	6.04	8.51	30	PASS
	2440	6.42	8.89	30	PASS
	2480	5.96	8.43	30	PASS

Note: Average Power with duty factor = Average Power Measured +Duty cycle correction factor

5.2. 99% Bandwidth and 6dB Bandwidth

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.
Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.


Test Results:

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	13.078	9.105	500	PASS
	2437	13.043	9.105	500	PASS
	2462	13.124	9.562	500	PASS
802.11g	2412	16.680	16.350	500	PASS
	2417	16.808	16.295	500	PASS
	2437	16.858	16.295	500	PASS
	2447	16.918	16.381	500	PASS
	2452	16.782	16.335	500	PASS
	2457	16.779	16.307	500	PASS
	2462	16.690	16.337	500	PASS
802.11n HT20	2412	17.847	17.609	500	PASS
	2417	17.865	17.591	500	PASS
	2422	17.856	17.632	500	PASS
	2437	17.898	17.590	500	PASS
	2452	17.892	17.612	500	PASS
	2457	17.866	17.637	500	PASS
	2462	17.818	17.617	500	PASS
802.11n HT40	2422	34.895	32.536	500	PASS
	2427	34.872	34.112	500	PASS
	2432	34.832	32.558	500	PASS
	2437	33.986	32.670	500	PASS
	2442	34.839	32.526	500	PASS
	2447	34.907	32.636	500	PASS
	2452	34.950	32.311	500	PASS
Bluetooth (Low Energy) (1M)	2402	1.029	0.638	500	PASS
	2440	1.029	0.638	500	PASS
	2480	1.030	0.639	500	PASS
Bluetooth (Low Energy) (2M)	2402	2.035	1.109	500	PASS
	2440	2.033	1.115	500	PASS
	2480	2.037	1.1172	500	PASS



99%bandwidth


802.11b, Carrier frequency (MHz): 2412

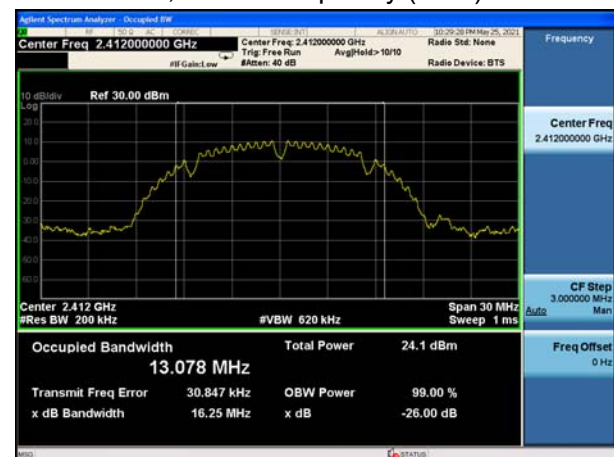

802.11b, Carrier frequency (MHz): 2437




802.11b, Carrier frequency (MHz):2462

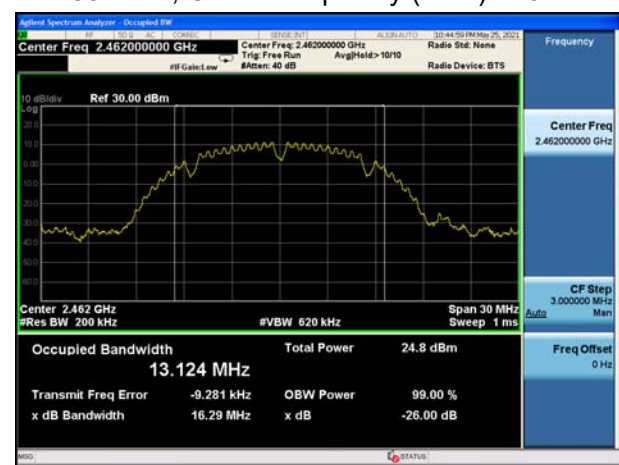





802.11g, Carrier frequency (MHz):2412

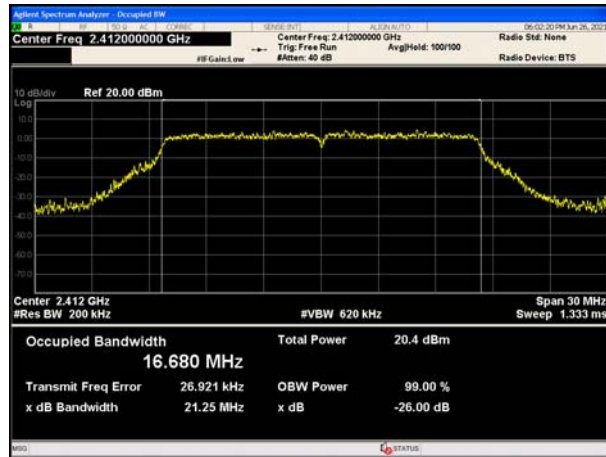


802.11n(HT20), Carrier frequency (MHz): 2412

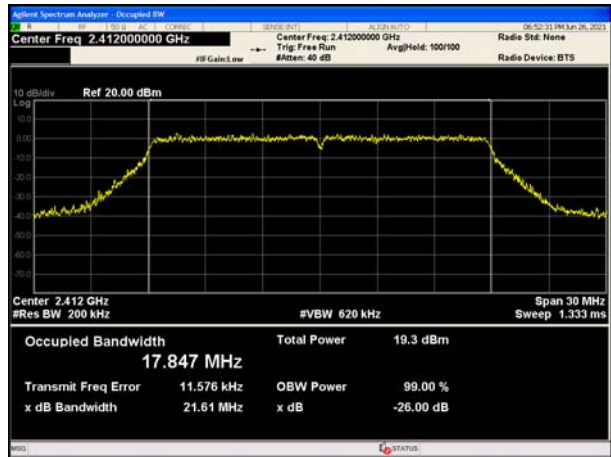


802.11g, Carrier frequency (MHz):2417

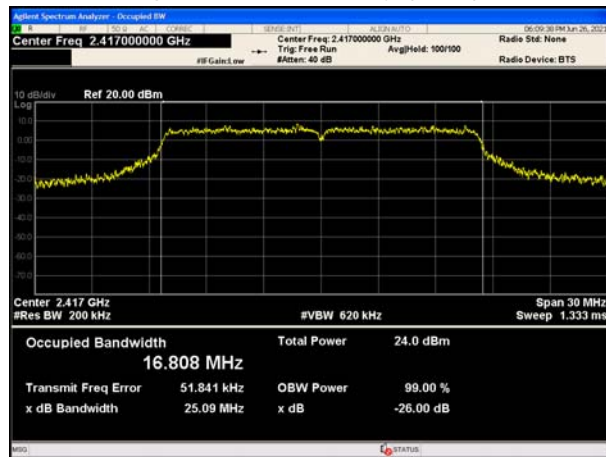


802.11n(HT20), Carrier frequency (MHz): 2417

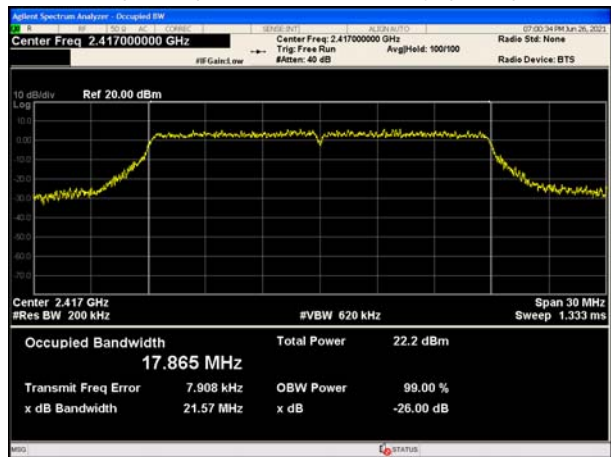

802.11g, Carrier frequency (MHz):2437

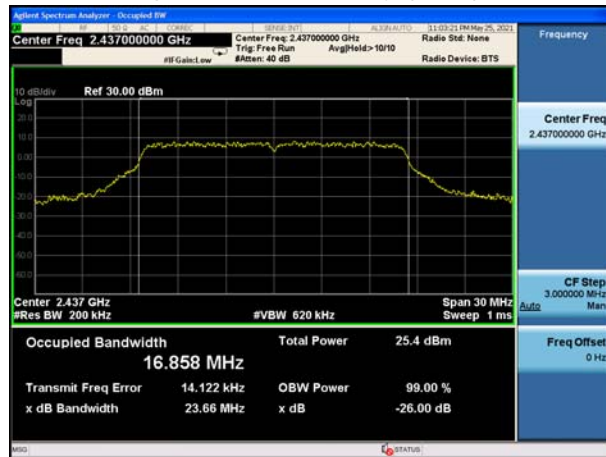


802.11n(HT20), Carrier frequency (MHz): 2422

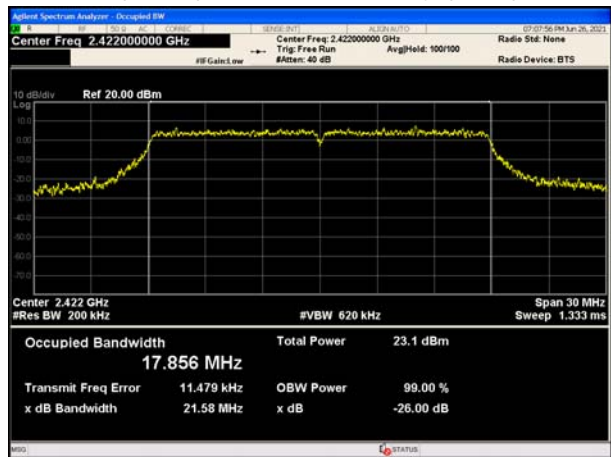





802.11g, Carrier frequency (MHz):2447

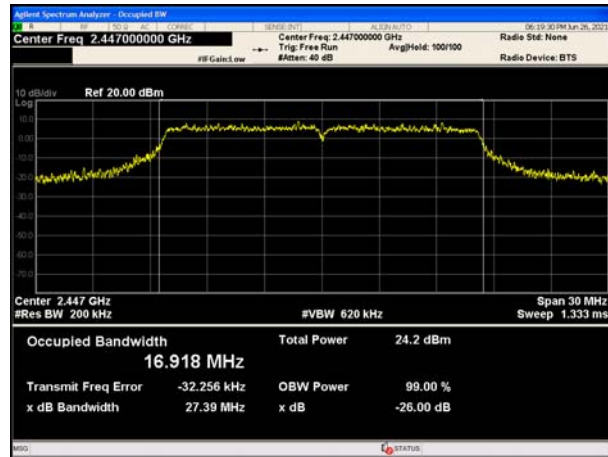


802.11n(HT20), Carrier frequency (MHz): 2437

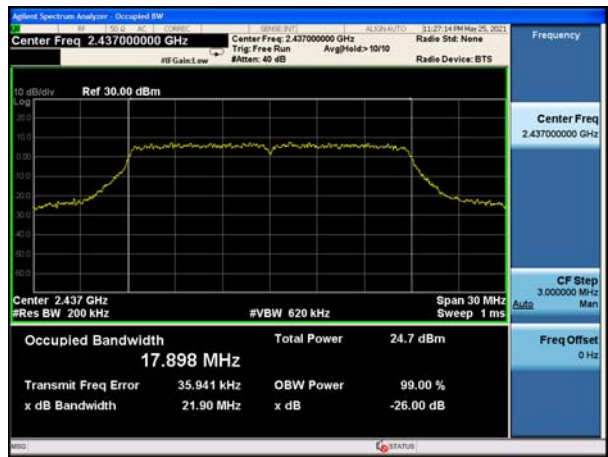


802.11g, Carrier frequency (MHz):2452

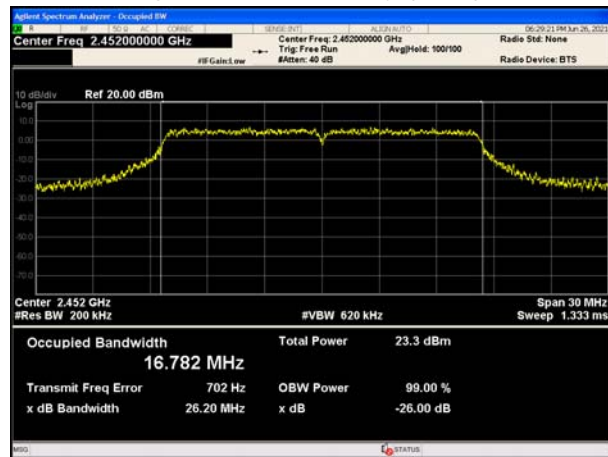


802.11n(HT20), Carrier frequency (MHz): 2452

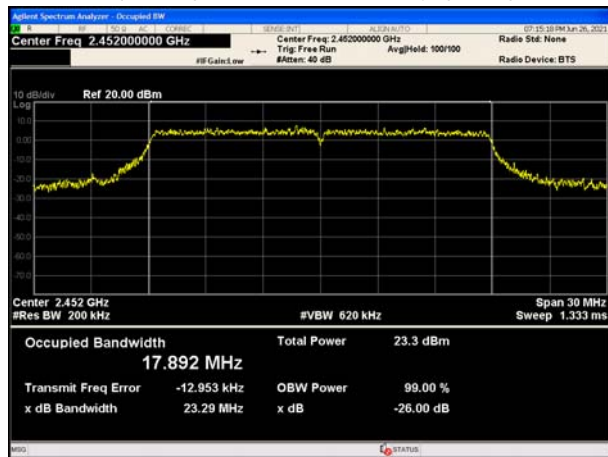

802.11g, Carrier frequency (MHz):2457

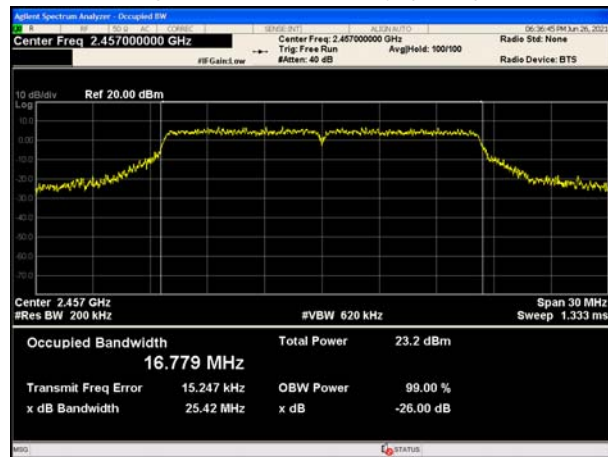


802.11n(HT20), Carrier frequency (MHz): 2457

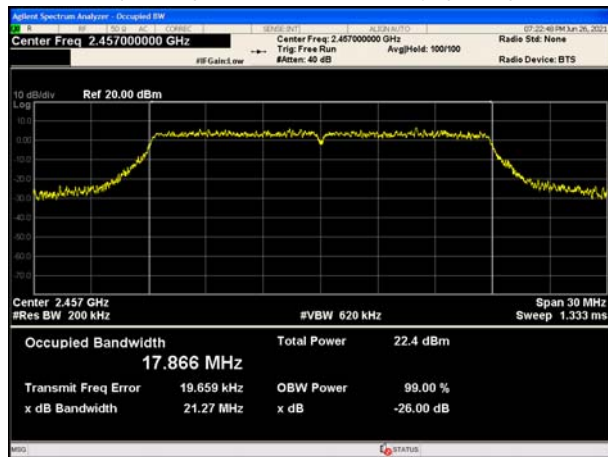





802.11g, Carrier frequency (MHz):2462

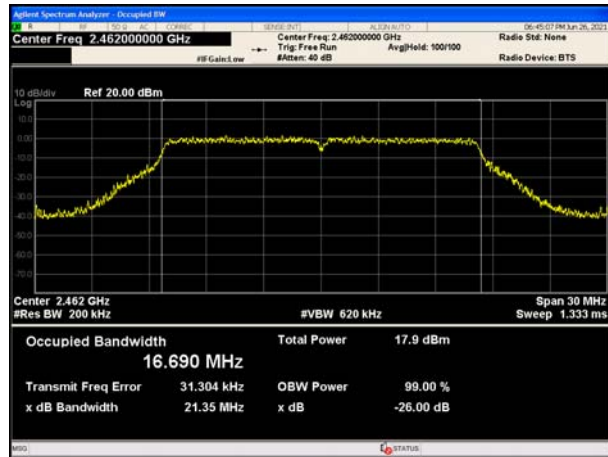


802.11n(HT20), Carrier frequency (MHz): 2462

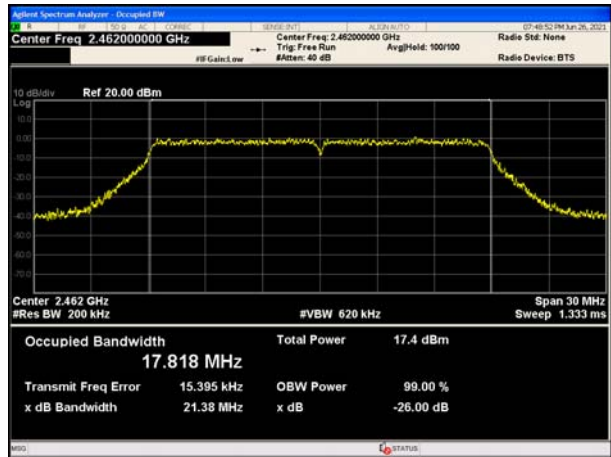


802.11n(HT40), Carrier frequency (MHz): 2422

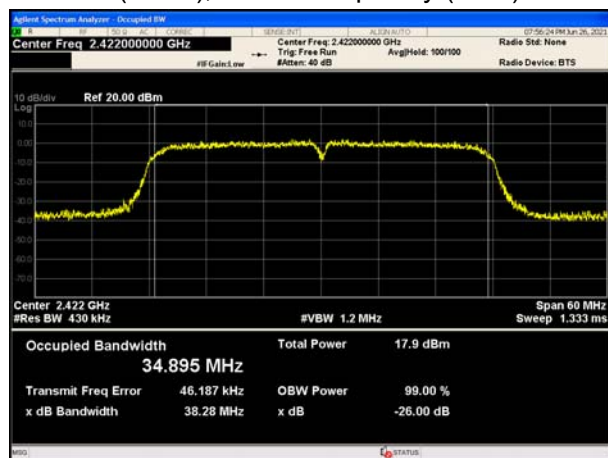

802.11n(HT40), Carrier frequency (MHz): 2427

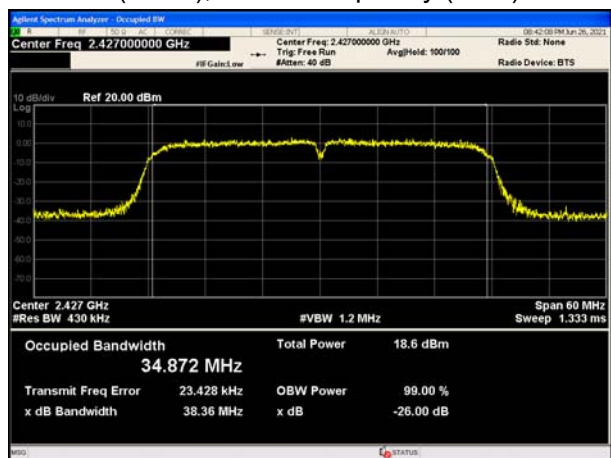

802.11n(HT40), Carrier frequency (MHz): 2432

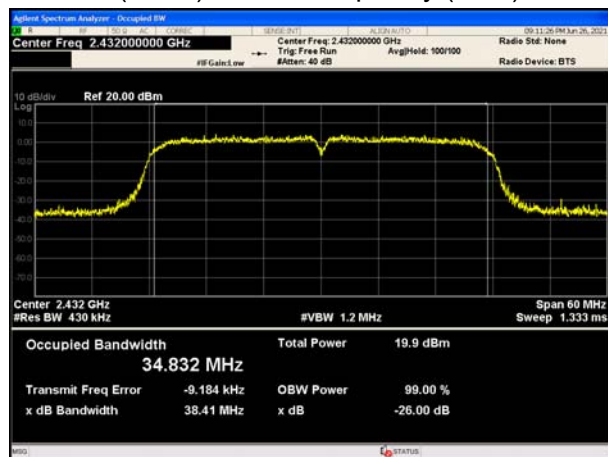


802.11n(HT40), Carrier frequency (MHz): 2437







802.11n(HT40), Carrier frequency (MHz):2442


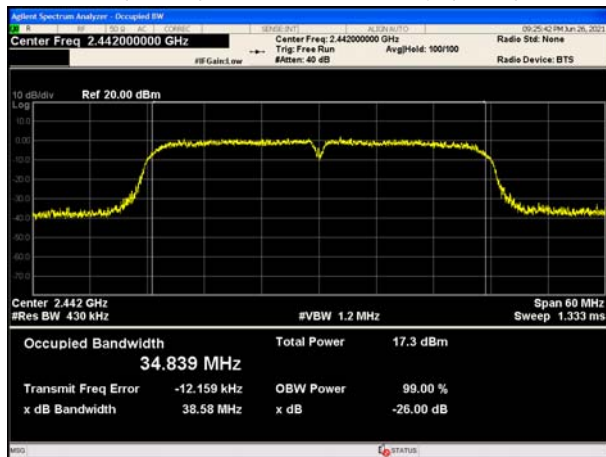


802.11n(HT40), Carrier frequency (MHz):2447

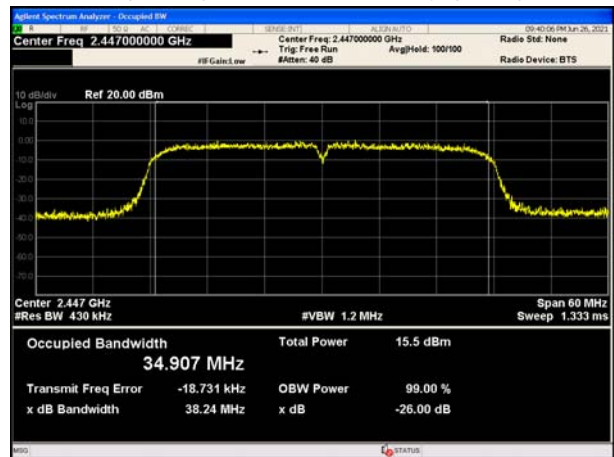

802.11n(HT40), Carrier frequency (MHz):2452

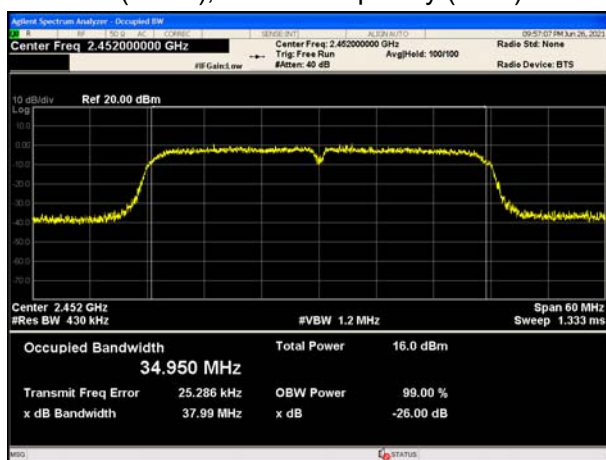


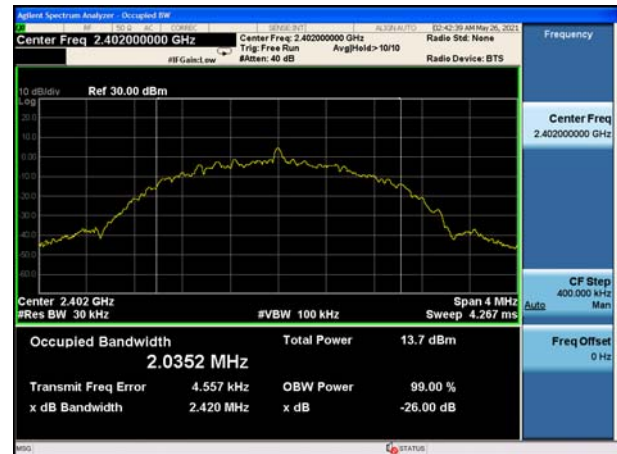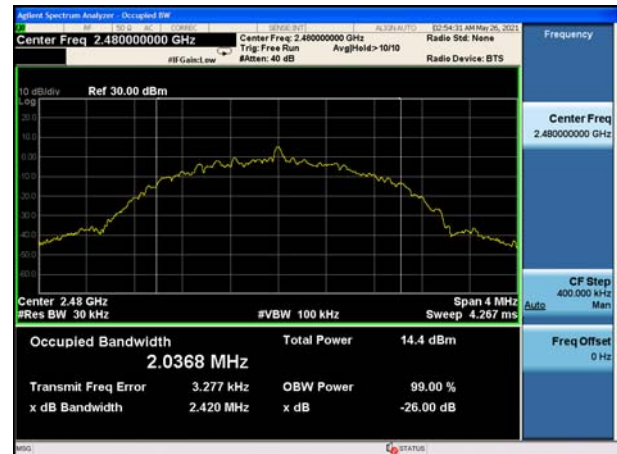Bluetooth LE (1M) Carrier frequency (MHz):
2402Bluetooth LE (2M) Carrier frequency (MHz):
2402Bluetooth LE (1M) Carrier frequency (MHz):
2440Bluetooth LE (2M) Carrier frequency (MHz):
2440Bluetooth LE (1M) Carrier frequency (MHz):
2480Bluetooth LE (2M) Carrier frequency (MHz):
2480



6 dB bandwidth


802.11b, Carrier frequency (MHz): 2412

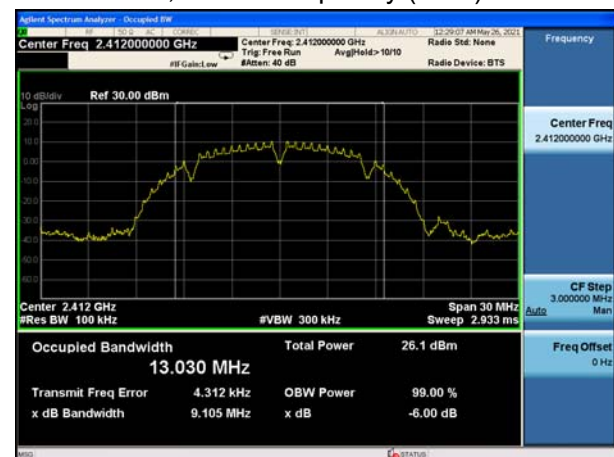

802.11b, Carrier frequency (MHz): 2437




802.11b, Carrier frequency (MHz): 2462

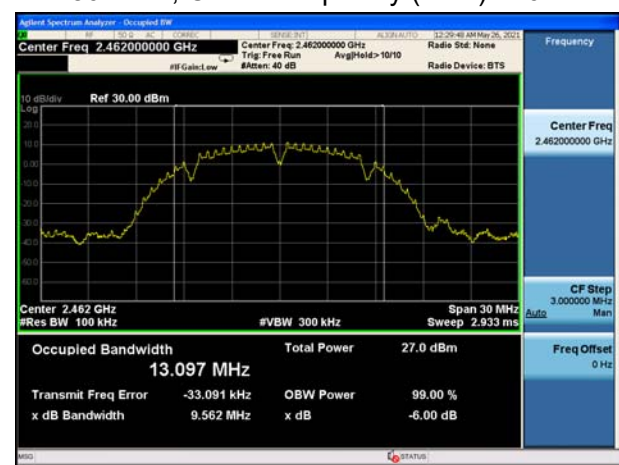





802.11g, Carrier frequency (MHz):2412

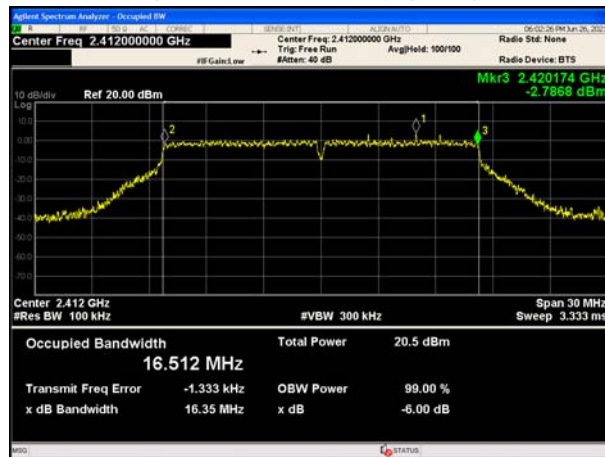


802.11n(HT20), Carrier frequency (MHz): 2412

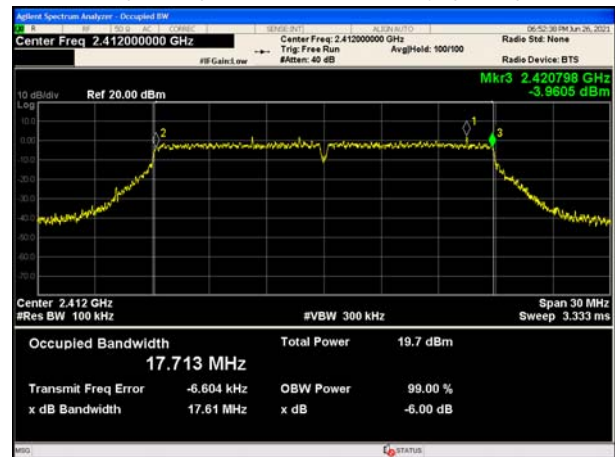


802.11g, Carrier frequency (MHz):2417

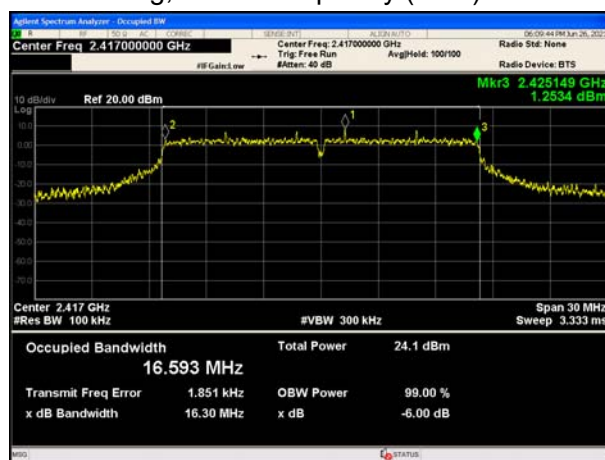


802.11n(HT20), Carrier frequency (MHz): 2417

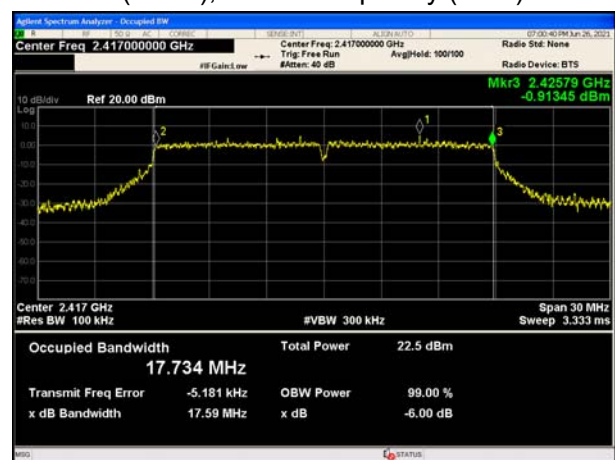

802.11g, Carrier frequency (MHz):2437

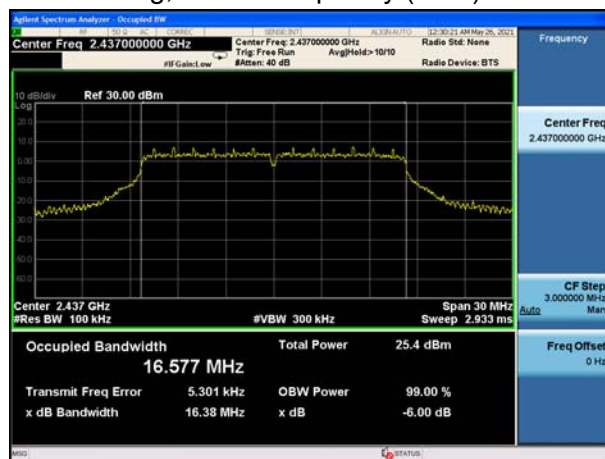


802.11n(HT20), Carrier frequency (MHz): 2422

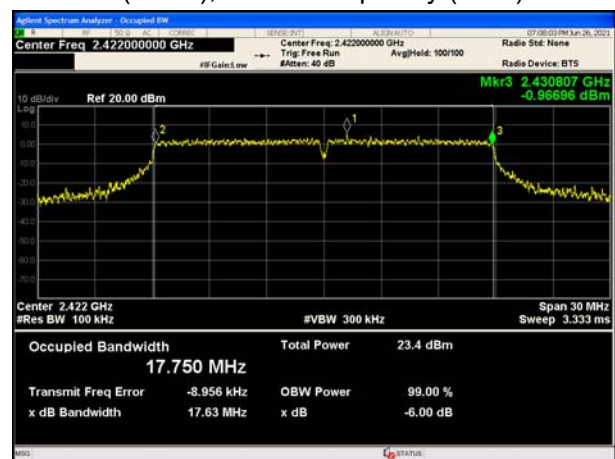





802.11g, Carrier frequency (MHz):2447

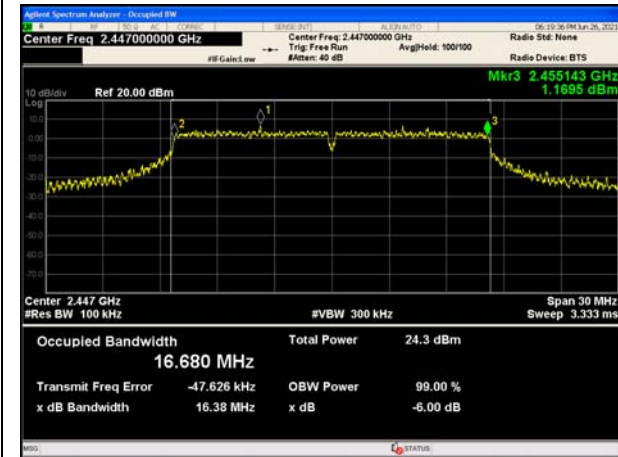


802.11n(HT20), Carrier frequency (MHz): 2437

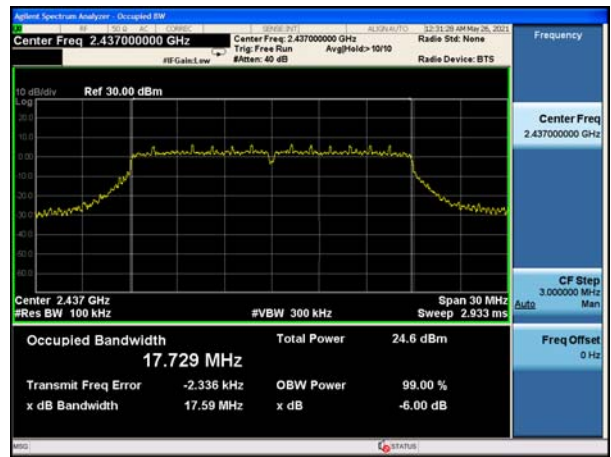


802.11g, Carrier frequency (MHz):2452

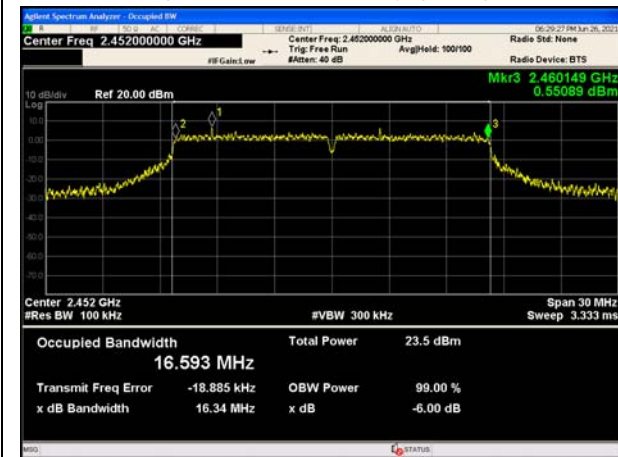


802.11n(HT20), Carrier frequency (MHz): 2452

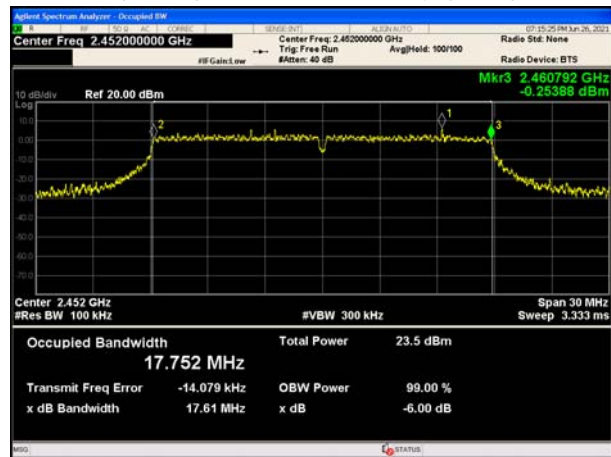

802.11g, Carrier frequency (MHz):2457

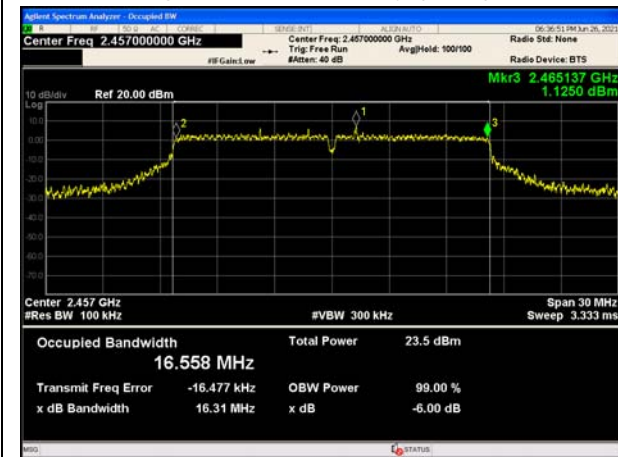


802.11n(HT20), Carrier frequency (MHz): 2457

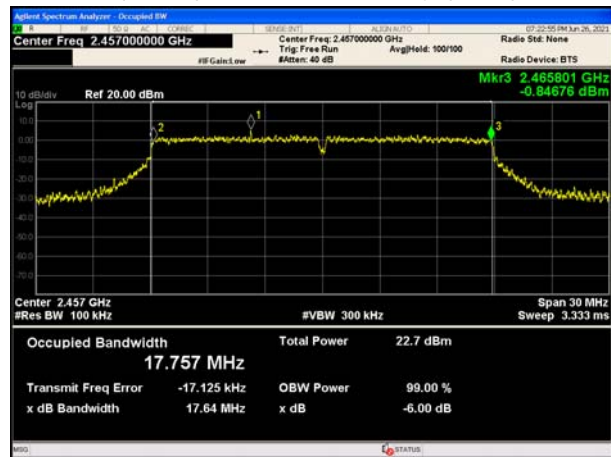





802.11g, Carrier frequency (MHz):2462

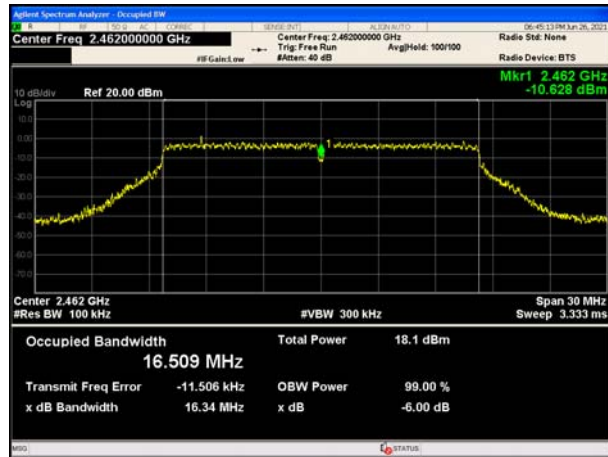


802.11n(HT20), Carrier frequency (MHz): 2462

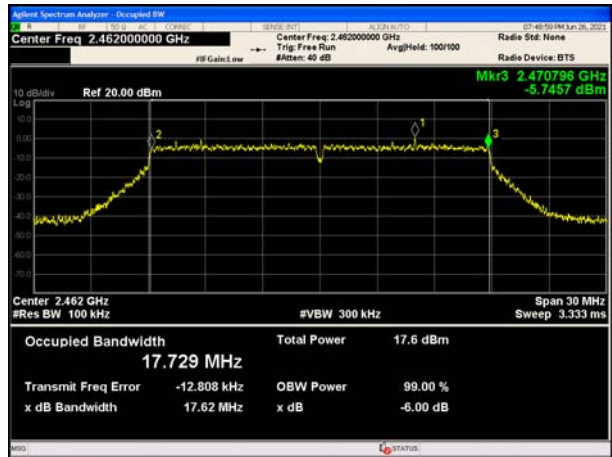


802.11n(HT40), Carrier frequency (MHz): 2422

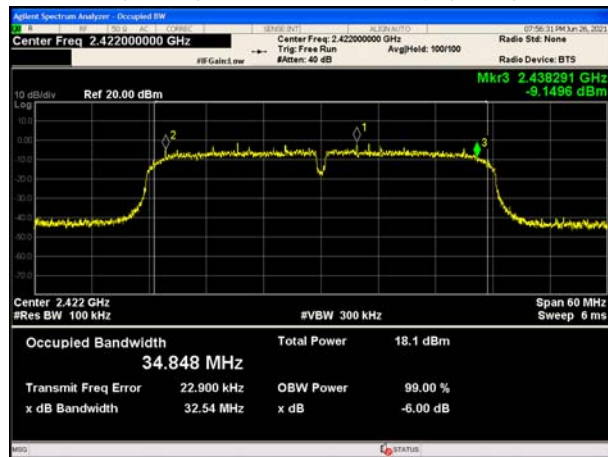


802.11n(HT40), Carrier frequency (MHz): 2427

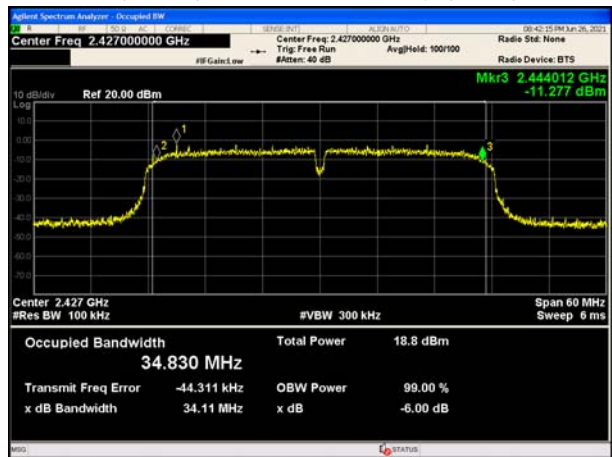

802.11n(HT40), Carrier frequency (MHz): 2432

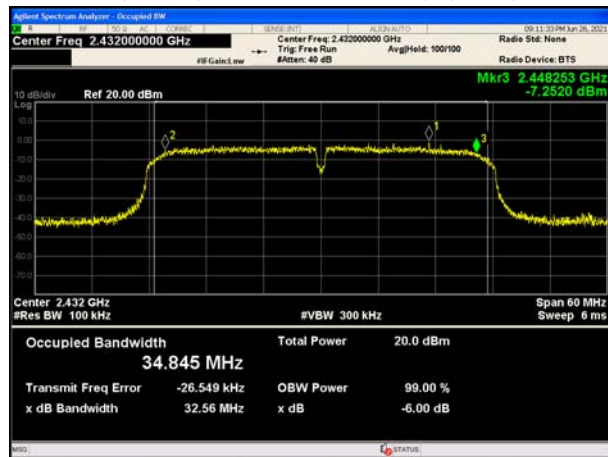


802.11n(HT40), Carrier frequency (MHz): 2437

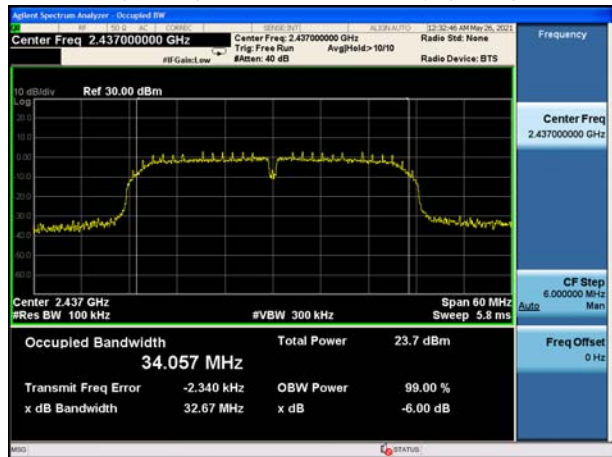





802.11n(HT40), Carrier frequency (MHz):2442

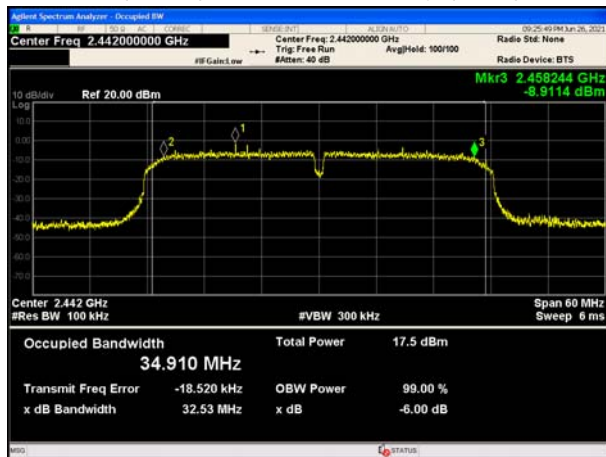

802.11n(HT40), Carrier frequency (MHz):2447

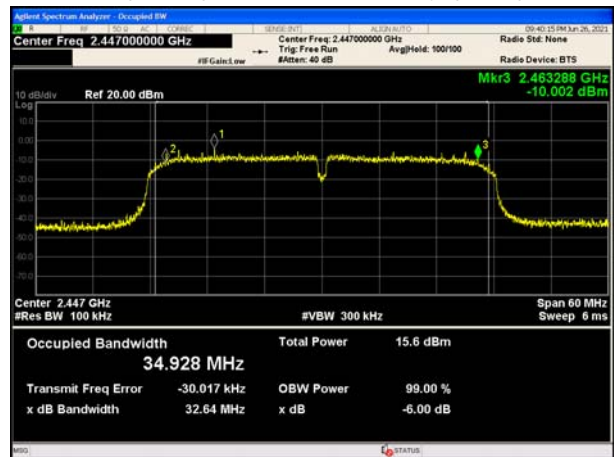

802.11n(HT40), Carrier frequency (MHz):2452

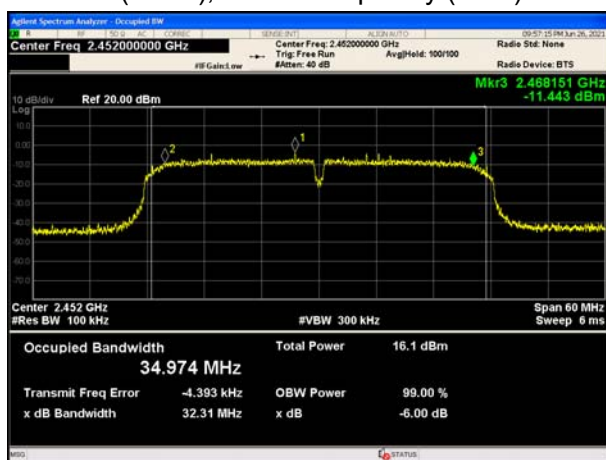

Bluetooth LE (1M) Carrier frequency (MHz):
2402Bluetooth LE (2M) Carrier frequency (MHz):
2402Bluetooth LE (1M) Carrier frequency (MHz):
2440Bluetooth LE (2M) Carrier frequency (MHz):
2440Bluetooth LE (1M) Carrier frequency (MHz):
2480Bluetooth LE (2M) Carrier frequency (MHz):
2480

5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results: PASS


802.11b, Channel No.: 1

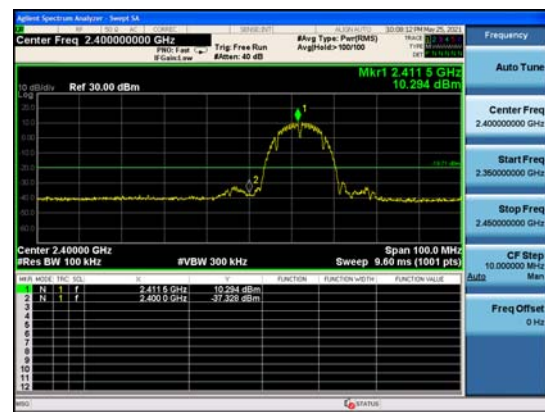

802.11b, Channel No.: 11

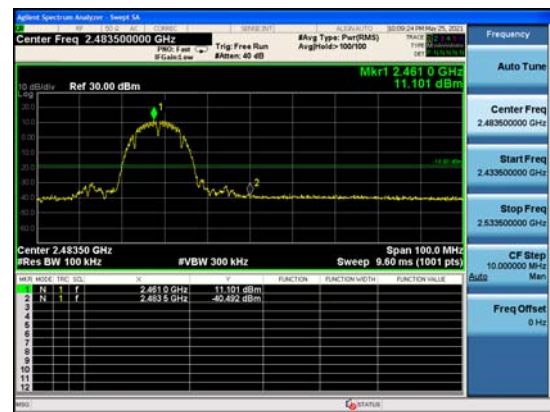


802.11g, Channel No.: 1

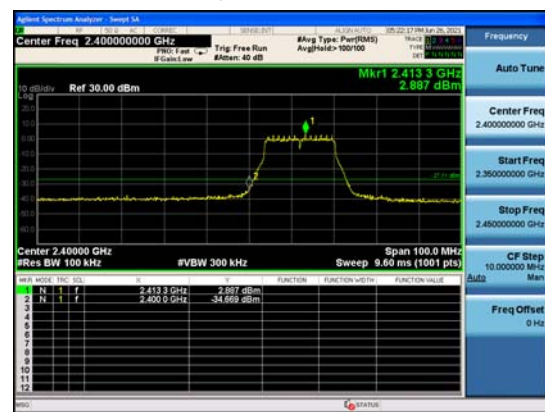

802.11g, Channel No.: 2




802.11g, Channel No.: 8

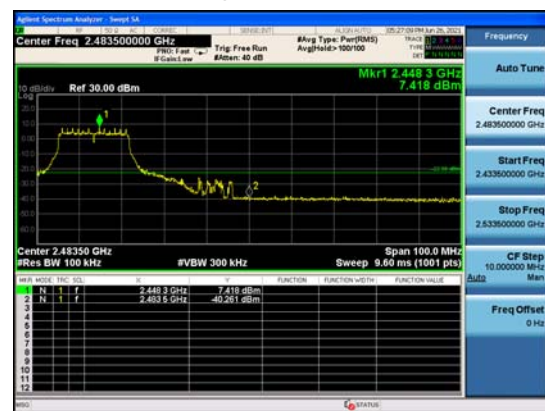


802.11g, Channel No.: 9




802.11g, Channel No.: 10

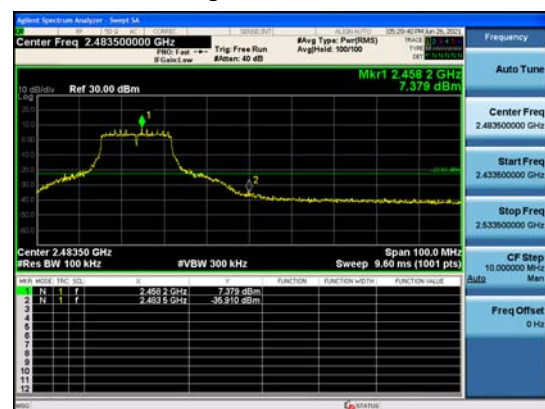


802.11g, Channel No.: 11

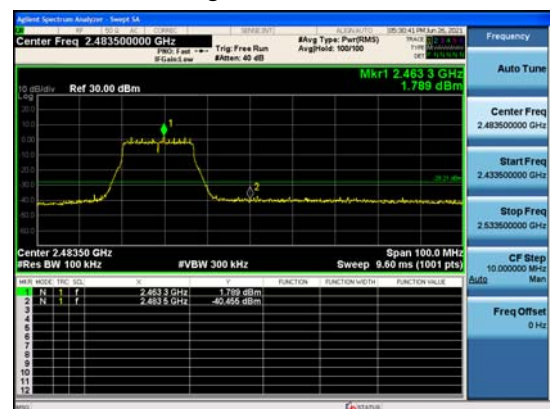

802.11n(HT20), Channel No.: 1

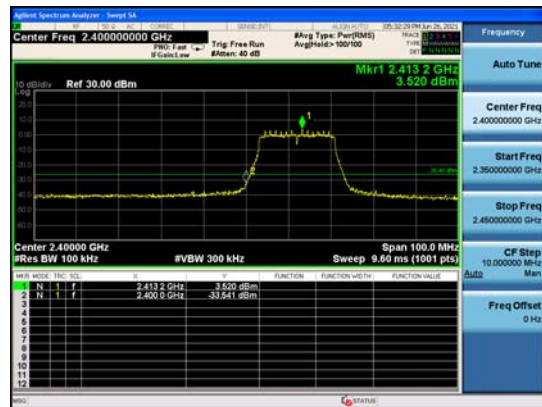

802.11n(HT20), Channel No.: 2

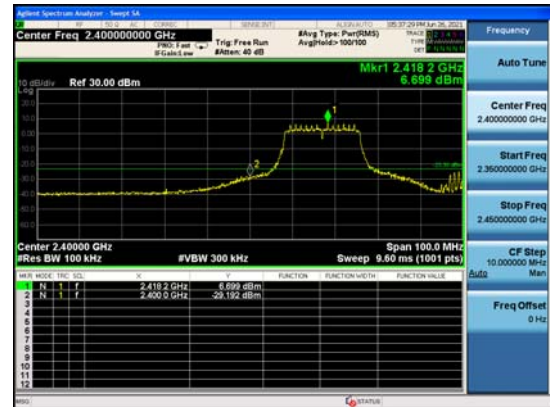

802.11n(HT20), Channel No.: 3




802.11n(HT20), Channel No.: 9




802.11n(HT20), Channel No.: 10




802.11n(HT20), Channel No.: 11

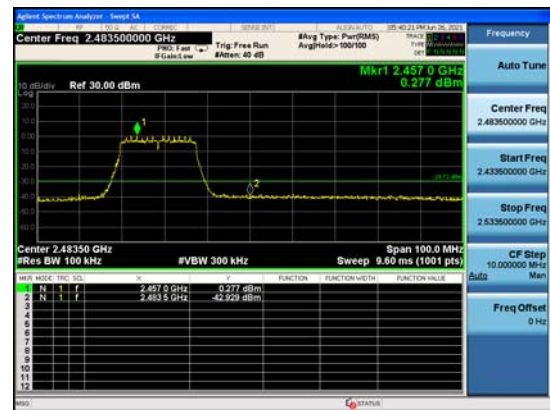


802.11n(HT40), Channel No.: 3

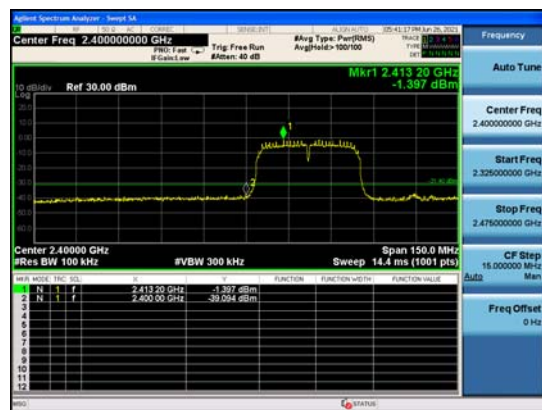


802.11n(HT40), Channel No.: 4

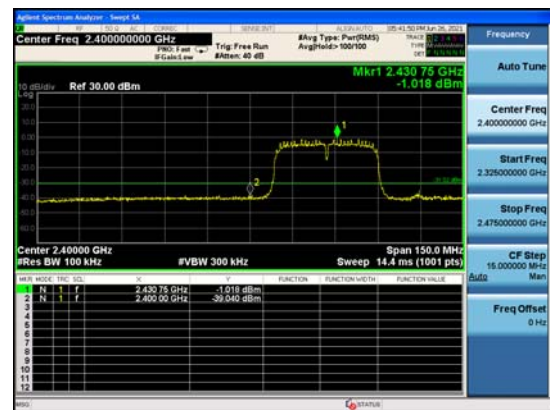


802.11n(HT40), Channel No.: 5

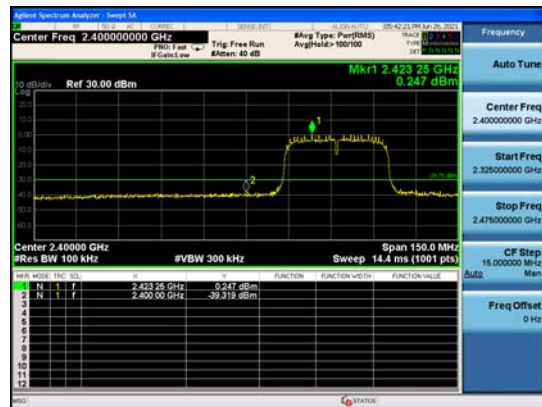


802.11n(HT40), Channel No.: 7

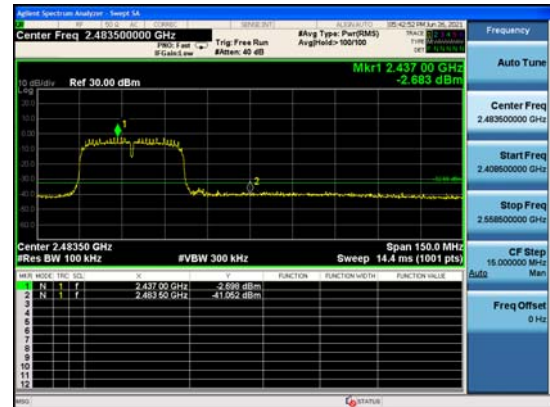


802.11n(HT40), Channel No.: 8

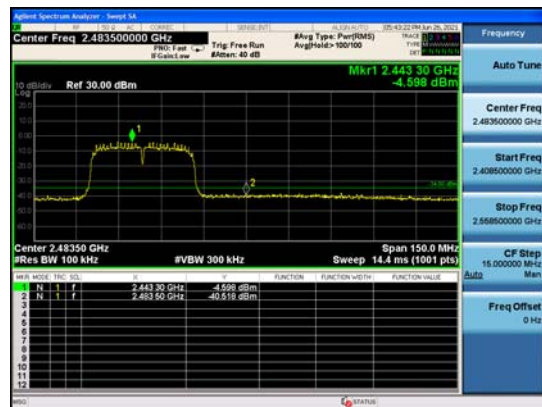


802.11n(HT40), Channel No.: 9

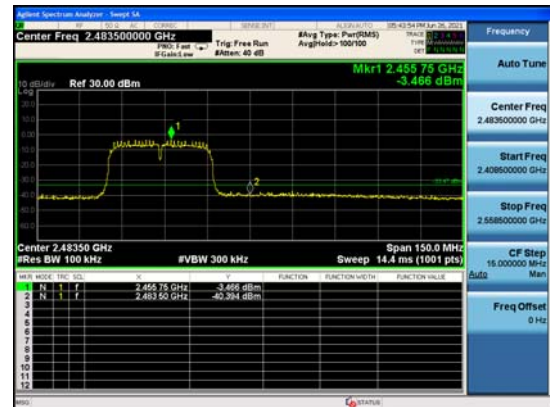


Bluetooth LE (1M), Channel No.: 0

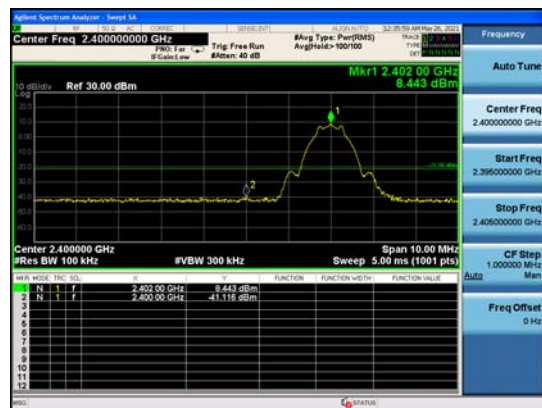


Bluetooth LE (1M), Channel No.: 39

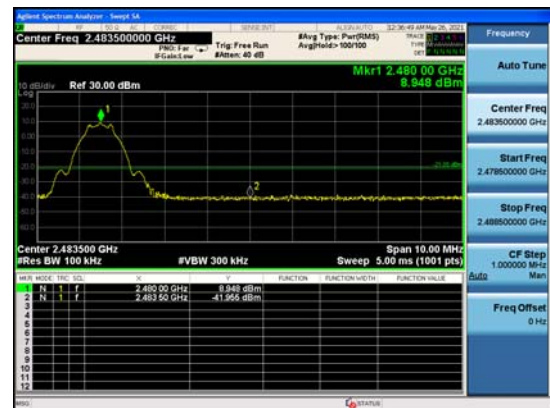

Bluetooth LE (2M), Channel No.: 0

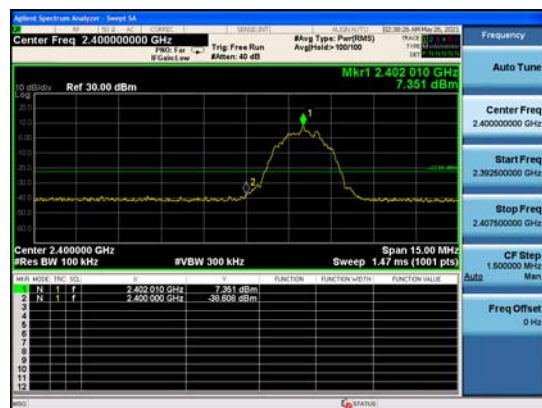

Bluetooth LE (2M), Channel No.: 39

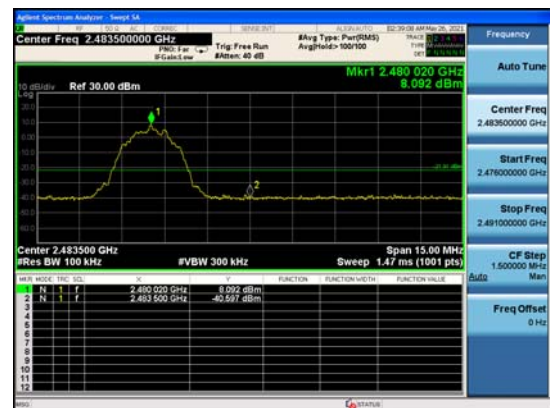

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss.

The EUT is max power transmission with proper modulation.

Method AVGPSD-1 was used for this test.

- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector=power averaging(rms) or sample detector(when rms not available)
- Ensure that the number of measurement points in the sweep $2[2 \times \text{span}/\text{RBW}]$
- Sweep time auto couple
- Employ trace averaging(rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level.
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat(note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)


Method AVGPSD-2 was used for this test.

- Measure the duty cycle(D)of the transmitter output signal as described in 11.6
- Set instrument center frequency to DTS channel center frequency
- Set span to at least 1.5 times the OBW
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{Kh}$
- Set VBW $\geq [3 \times \text{RBW}]$
- Detector= power averaging(rms) or sample detector (when rms not available)
- Ensure that the number of measurement points in the sweep $2[2 \times \text{span}/\text{RBW}]$
- Sweep time =auto couple
- Do not use sweep triggering; allow sweep to "free run"
- Employ trace averaging(rms) mode over a minimum of 100 traces
- Use the peak marker function to determine the maximum amplitude level
- Add $[10 \log(1/ D)]$, where D is the duty cycle measured in step a), to the measured PSD to

compute the average PSD during the actual transmission time

m) If measured value exceeds requirement specified by regulatory agency then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced)

Test setup



Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. "

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.

Test Results:

Test Mode	Channel Number	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-13.58	-13.58	8	PASS
	6	-13.05	-13.05	8	PASS
	11	-12.84	-12.84	8	PASS
802.11g	1	-20.13	-20.13	8	PASS
	2	-16.48	-16.48	8	PASS
	6	-16.66	-16.66	8	PASS
	8	-16.37	-16.37	8	PASS
	9	-17.21	-17.21	8	PASS
	10	-17.24	-17.24	8	PASS
	11	-22.35	-22.35	8	PASS
802.11n HT20	1	-21.00	-21.00	8	PASS
	2	-18.06	-18.06	8	PASS
	3	-17.21	-17.21	8	PASS
	6	-17.15	-17.15	8	PASS
	9	-17.20	-17.20	8	PASS
	10	-17.82	-17.82	8	PASS
	11	-22.79	-22.79	8	PASS
802.11n HT40	3	-24.30	-24.30	8	PASS
	4	-24.30	-24.30	8	PASS
	5	-23.23	-23.23	8	PASS
	6	-20.63	-20.63	8	PASS
	7	-25.63	-25.63	8	PASS
	8	-28.22	-28.22	8	PASS
	9	-27.11	-27.11	8	PASS
Bluetooth (Low Energy) (1M)	0	-13.18	-12.42	8	PASS
	19	-12.11	-11.35	8	PASS
	39	-13.07	-12.31	8	PASS
Bluetooth (Low Energy) (2M)	0	-18.32	-15.85	8	PASS
	19	-17.72	-15.26	8	PASS
	39	-17.90	-15.43	8	PASS
Note: Power Spectral Density =Read Value+Duty cycle correction factor					



802.11b, Channel No.: 1




802.11b, Channel No.: 6




802.11b, Channel No.: 11



802.11g, Channel No.: 1

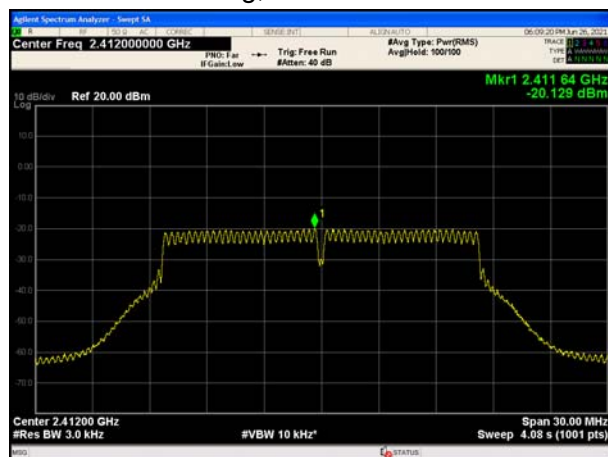


802.11g, Channel No.: 2

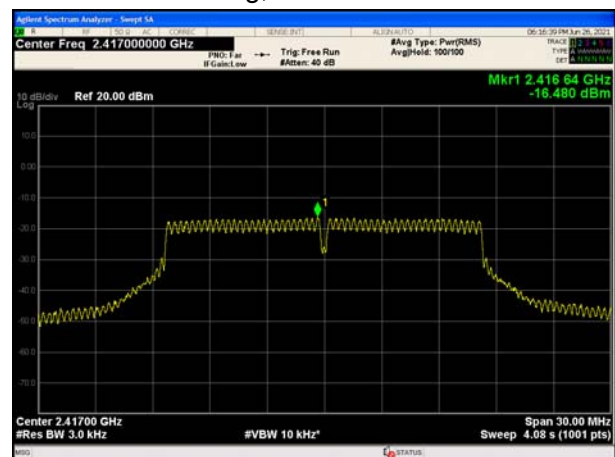





802.11g, Channel No.: 6

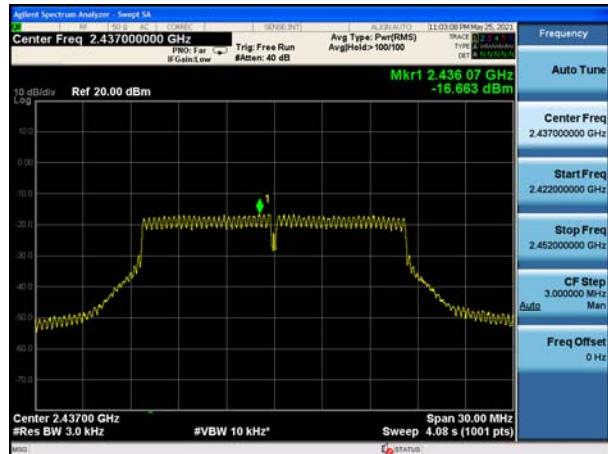


802.11g, Channel No.: 8

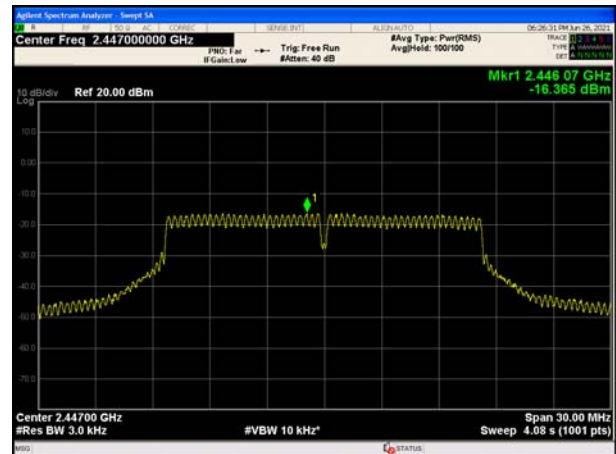


802.11g, Channel No.: 9

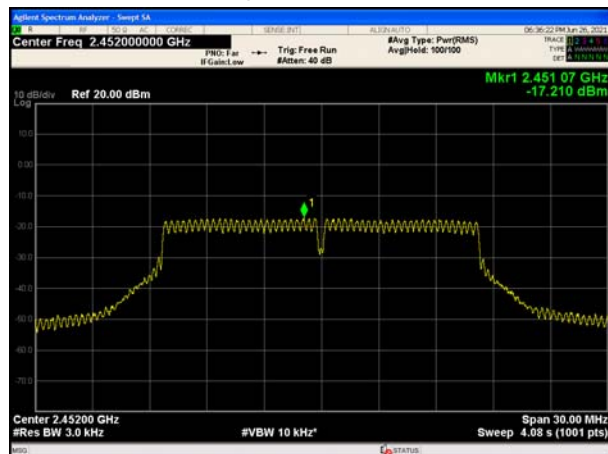

802.11g, Channel No.: 10

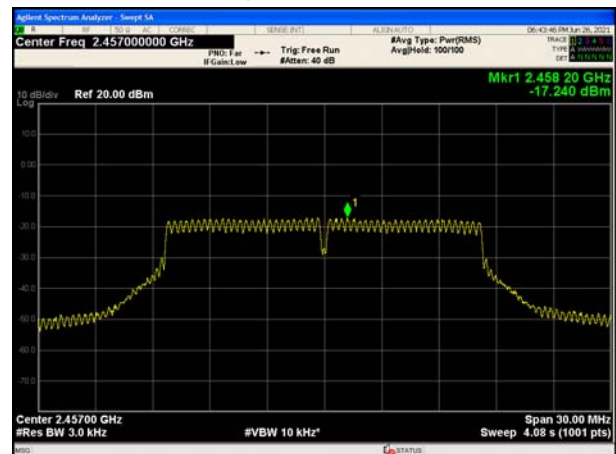


802.11g, Channel No.: 11

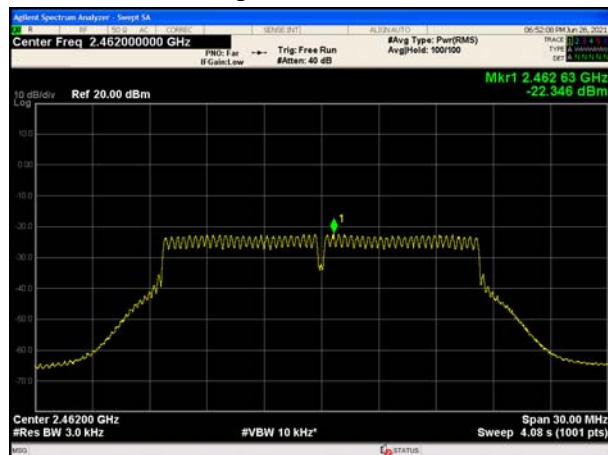





802.11n(HT20), Channel No. 1

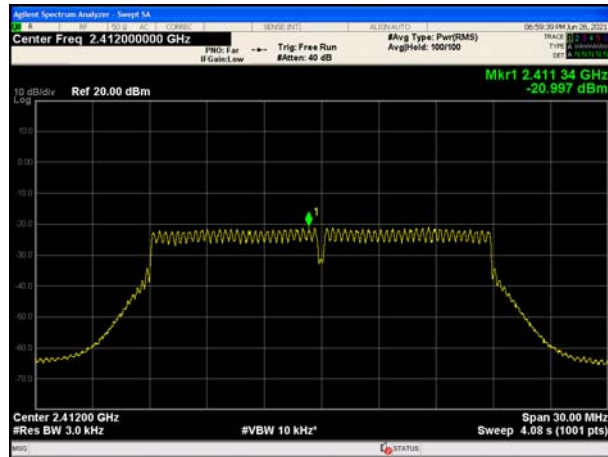


802.11n(HT20), Channel No. 2

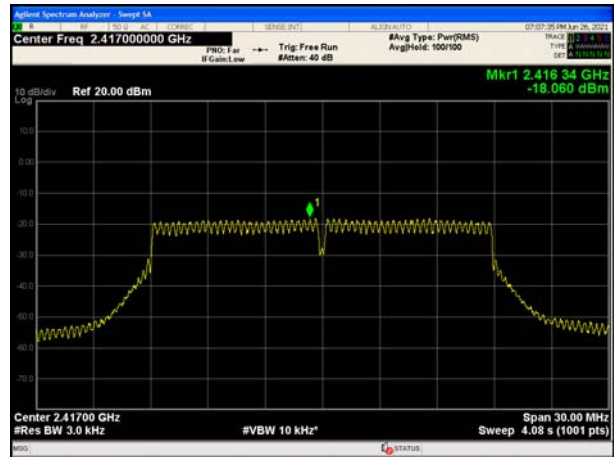


802.11n(HT20), Channel No. 3

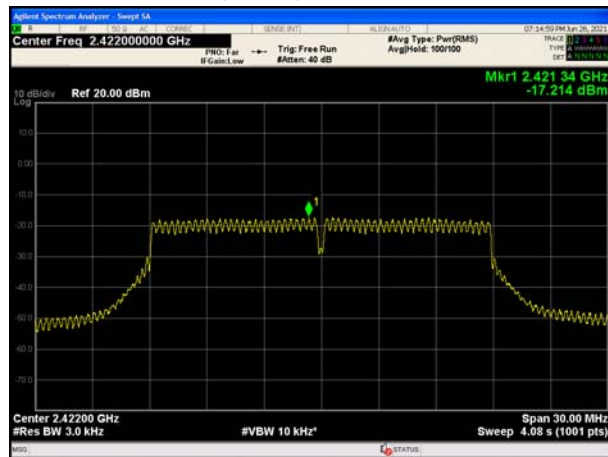


802.11n(HT20), Channel No. 6

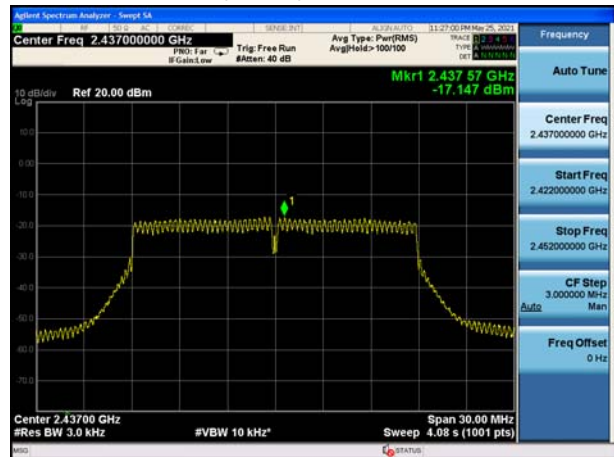

802.11n(HT20), Channel No. 9

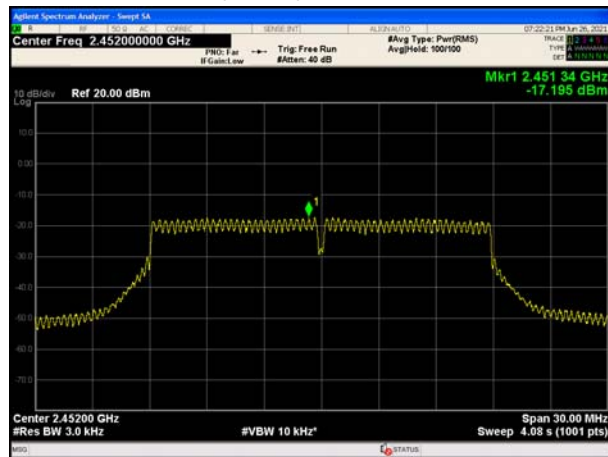


802.11n(HT20), Channel No. 10

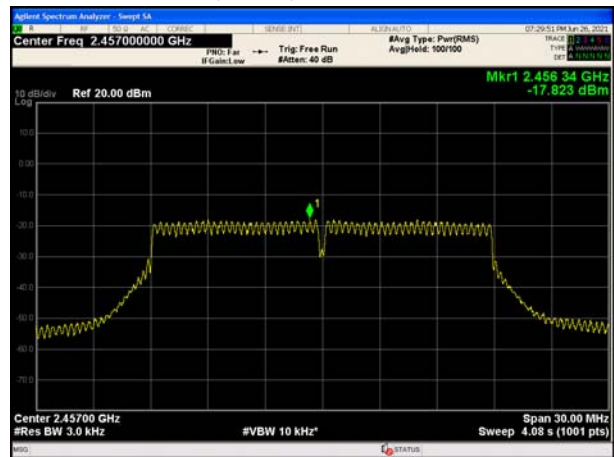





802.11n(HT20), Channel No. 11

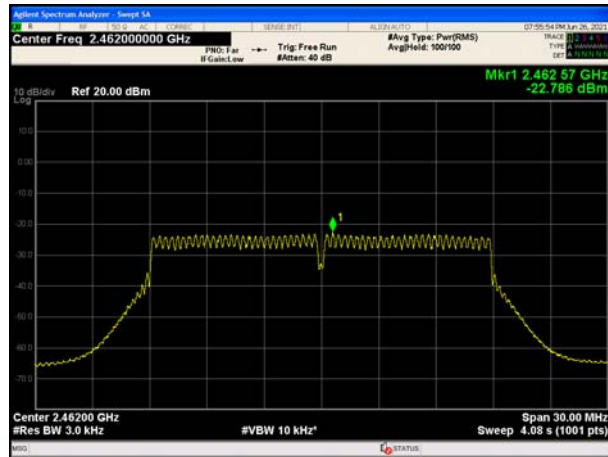


802.11n(HT40), Channel No. 3

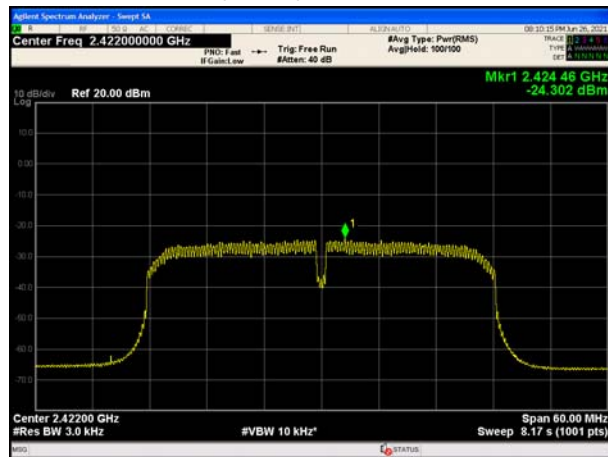


802.11n(HT40), Channel No. 4

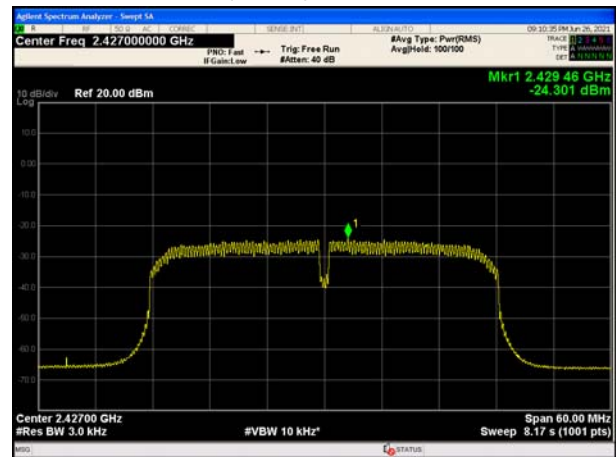

802.11n(HT40), Channel No. 5

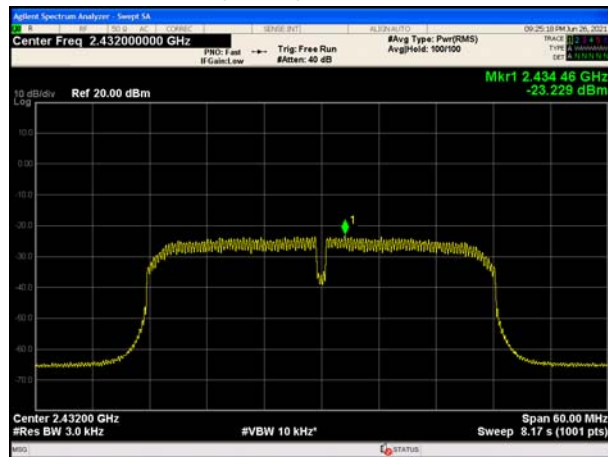


802.11n(HT40), Channel No. 6

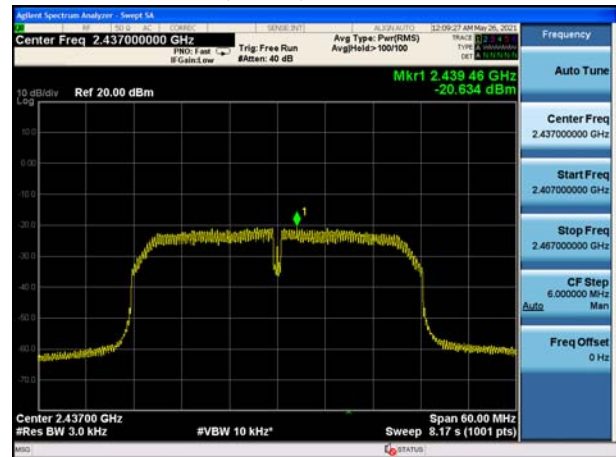





802.11n(HT40), Channel No. 7

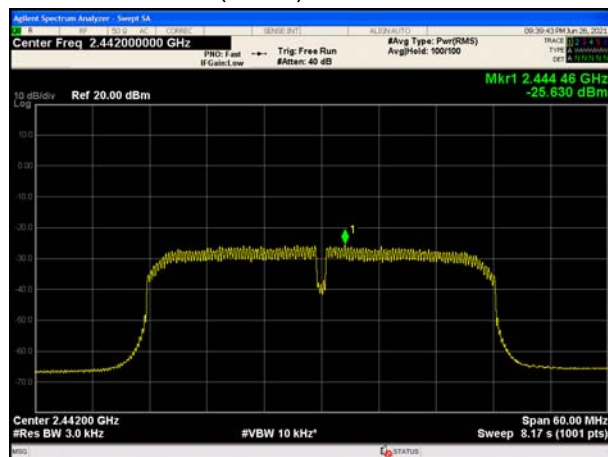

802.11n(HT40), Channel No. 8

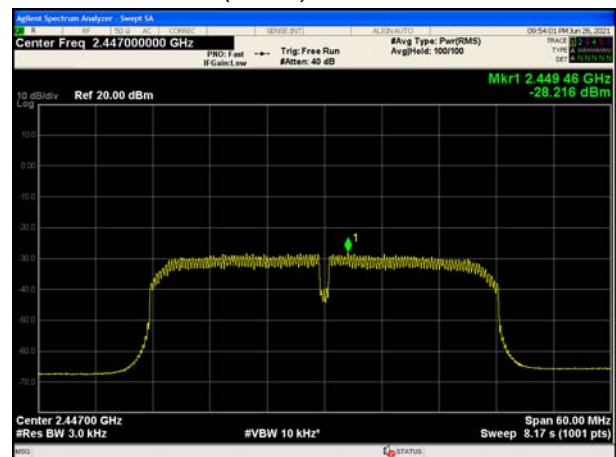

802.11n(HT40), Channel No. 9

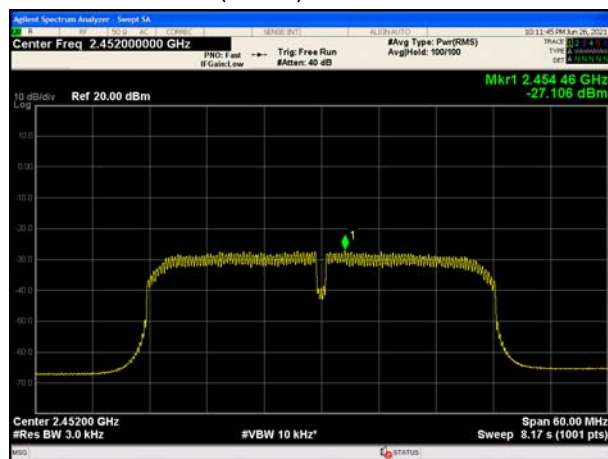



Bluetooth LE (1M), Channel No.: 0



Bluetooth LE (2M), Channel No.: 0



Bluetooth LE (1M), Channel No.: 19




Bluetooth LE (2M), Channel No.: 19



Bluetooth LE (1M), Channel No.: 39



Bluetooth LE (2M), Channel No.: 39

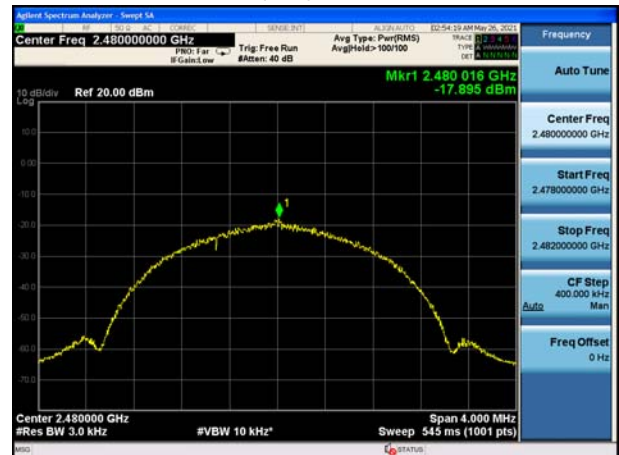

5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. ”

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	10.30	-19.70
	2437	10.24	-19.76
	2462	9.78	-20.22
802.11g	2412	1.82	-28.18
	2417	6.80	-23.21
	2437	6.25	-23.75
	2447	6.48	-23.52
	2452	6.10	-23.90
	2457	3.81	-26.19
	2462	-0.02	-30.02
802.11n HT20	2412	0.42	-29.58
	2417	4.57	-25.43

	2422	5.96	-24.04
	2437	5.00	-25.01
	2452	5.11	-24.89
	2457	3.83	-26.17
	2462	0.94	-29.06
802.11n HT40	2422	-2.33	-32.33
	2427	-1.22	-31.22
	2432	-0.82	-30.82
	2437	2.86	-27.15
	2442	-3.31	-33.31
	2447	-5.89	-35.89
	2452	-4.28	-34.28
Bluetooth (Low Energy) (1M)	2402	8.25	-21.75
	2440	9.27	-20.73
	2480	9.35	-20.65
Bluetooth (Low Energy) (2M)	2402	7.18	-22.83
	2440	9.44	-20.56
	2480	5.66	-24.34

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:


802.11b, Channel No.: 1

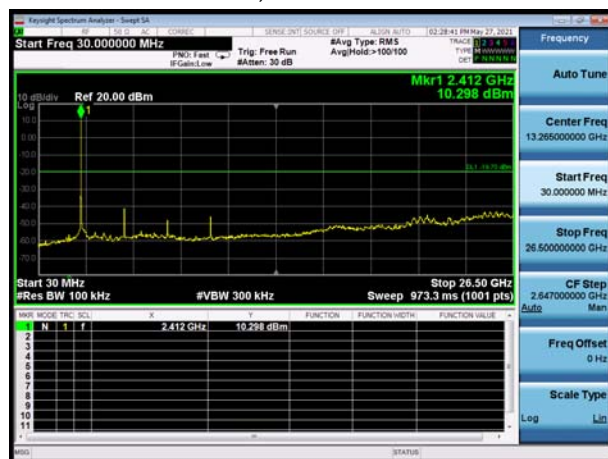


802.11b, Channel No.: 6

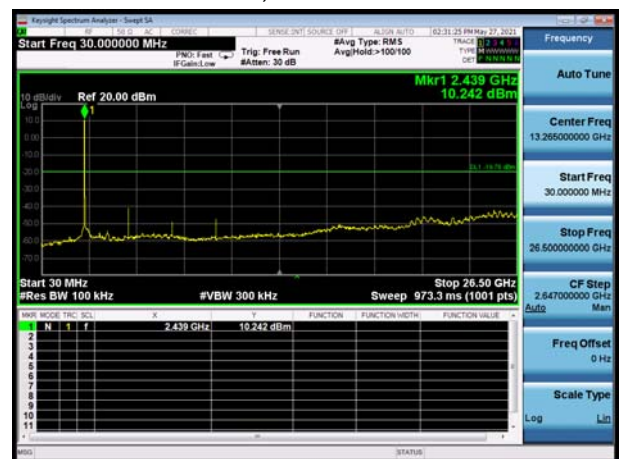


802.11b, Channel No.: 11

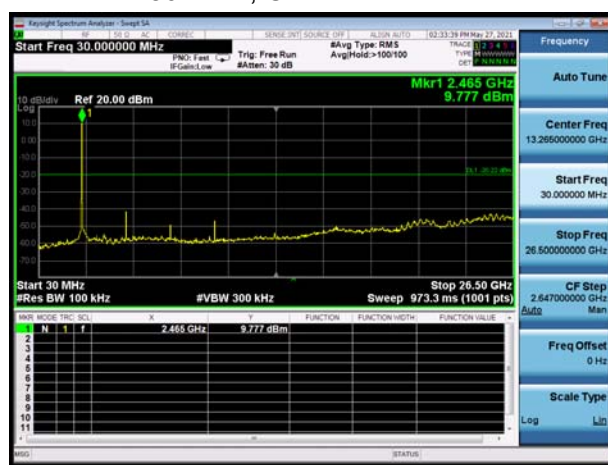


802.11g, Channel No.: 1

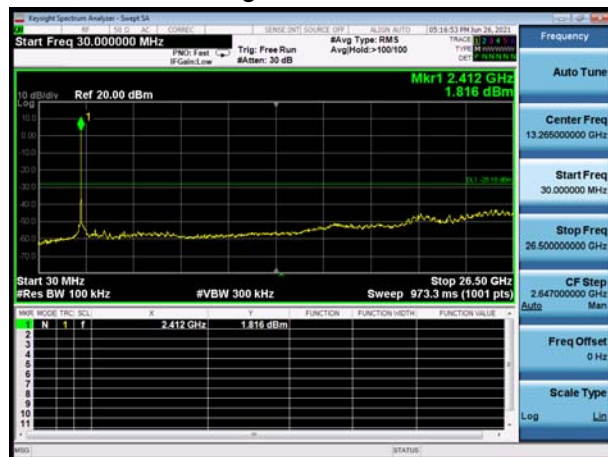


802.11n(HT20), Channel No. 1

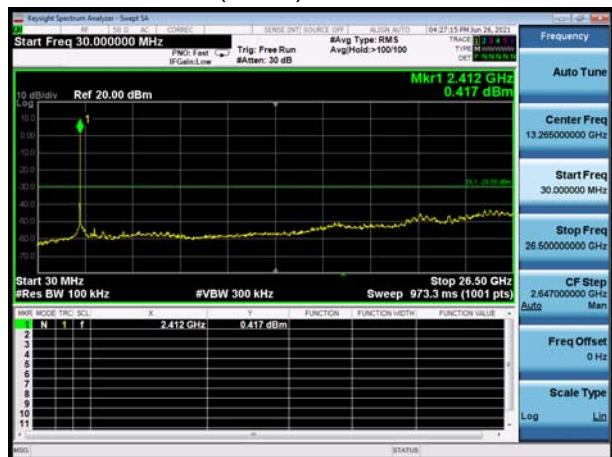


802.11g, Channel No.: 2

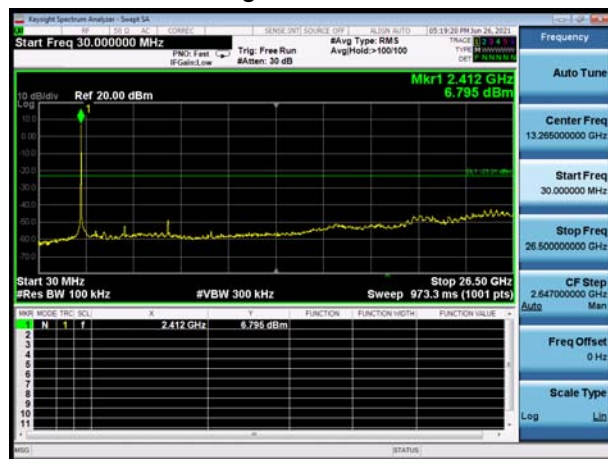


802.11n(HT20), Channel No. 2

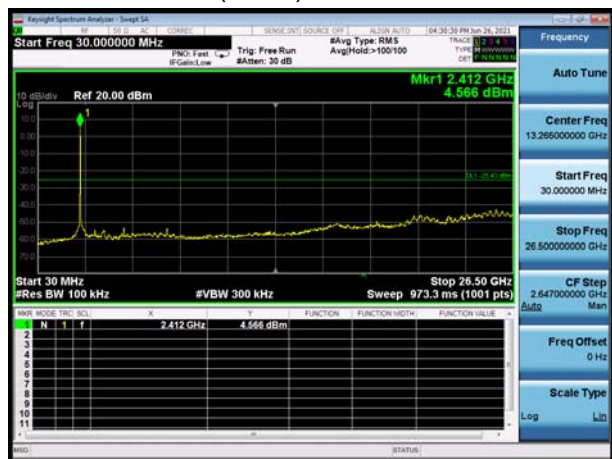

802.11g, Channel No.: 6

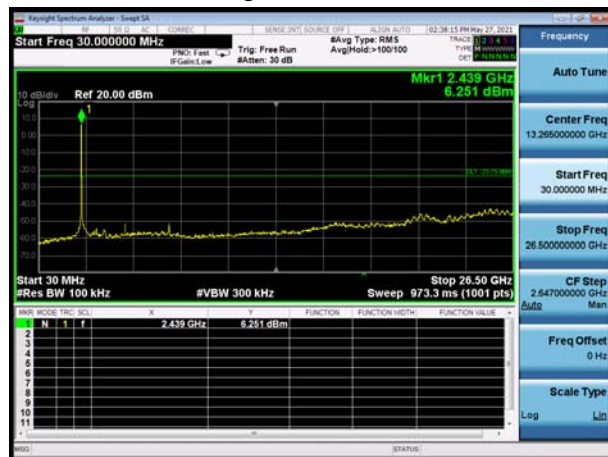


802.11n(HT20), Channel No. 3

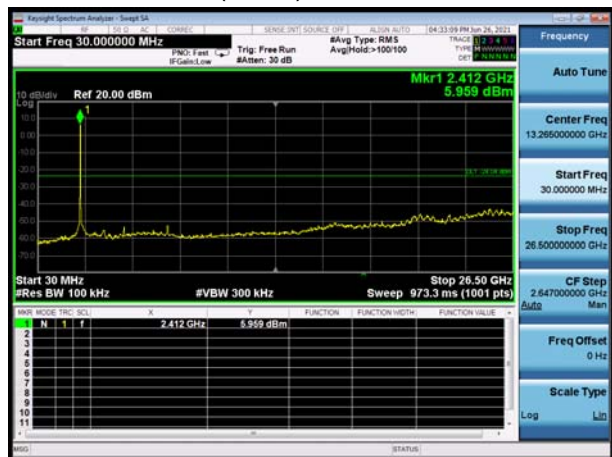





802.11g, Channel No.: 8

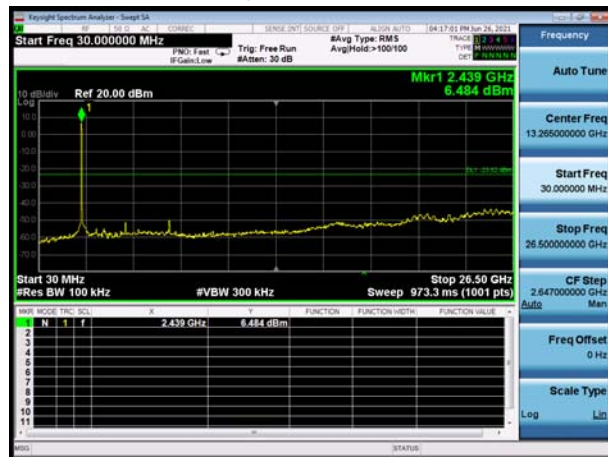


802.11n(HT20), Channel No. 6

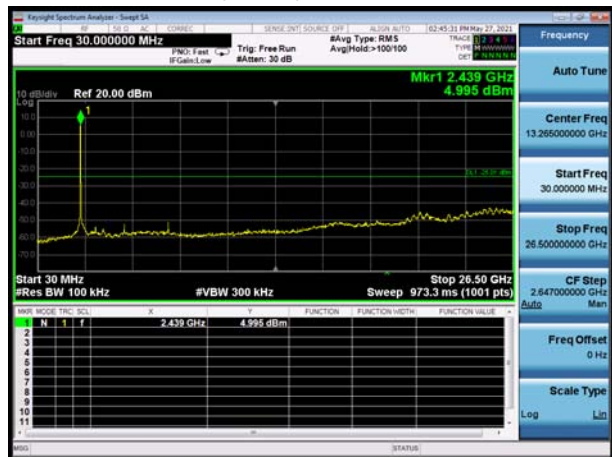


802.11g, Channel No.: 9

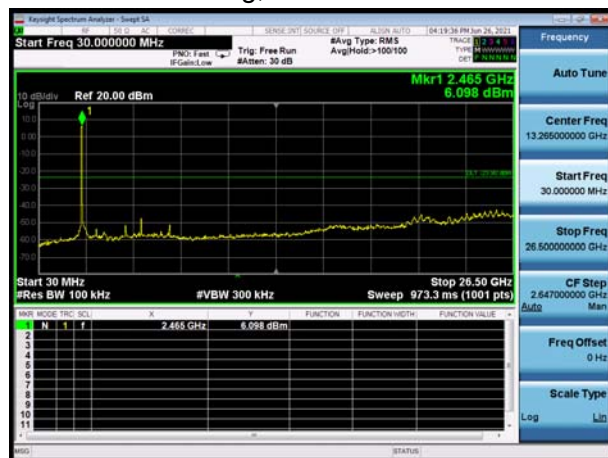


802.11n(HT20), Channel No. 9

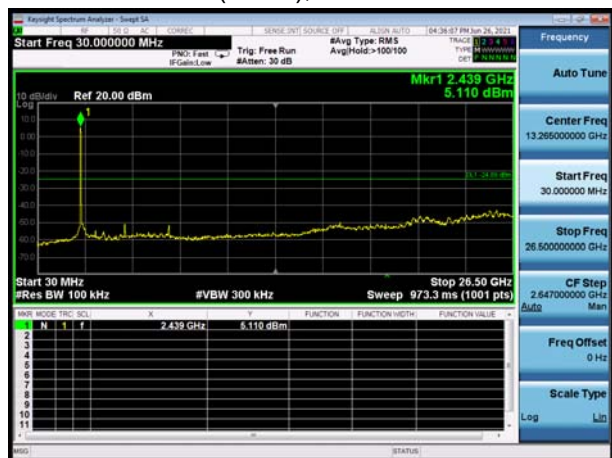


802.11g, Channel No.: 10

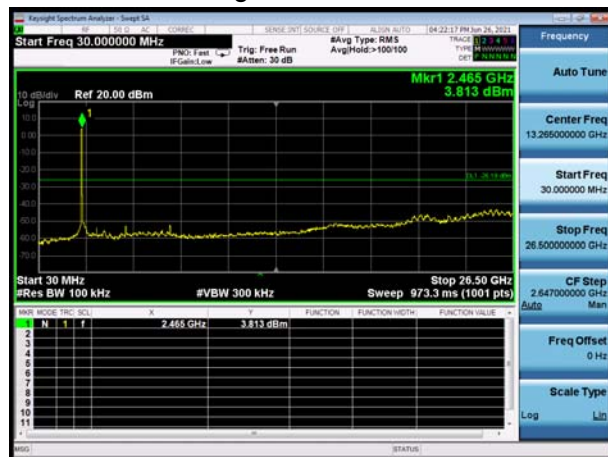


802.11n(HT20), Channel No. 10

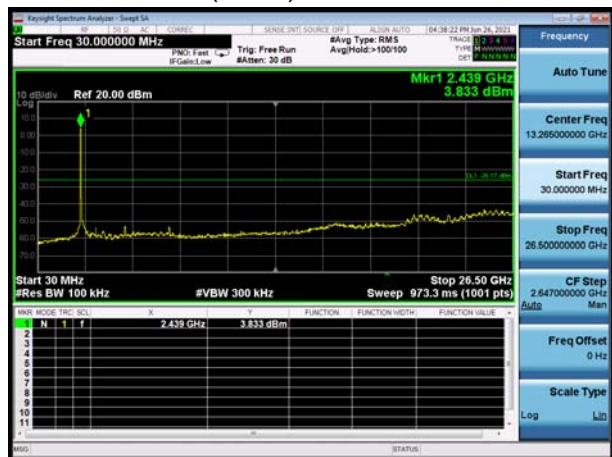


802.11g, Channel No.: 11

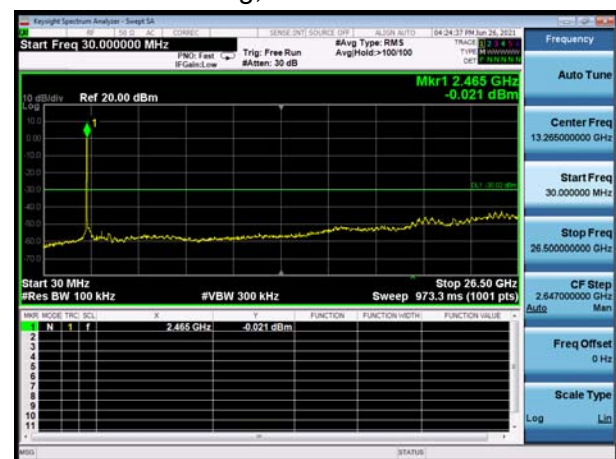


802.11n(HT20), Channel No. 11

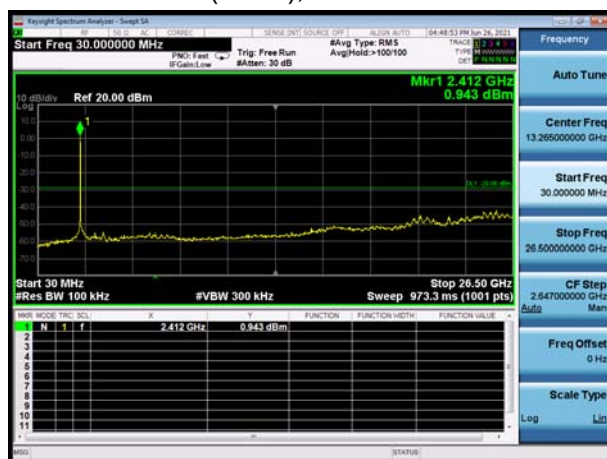


802.11n(HT40), Channel No. 3

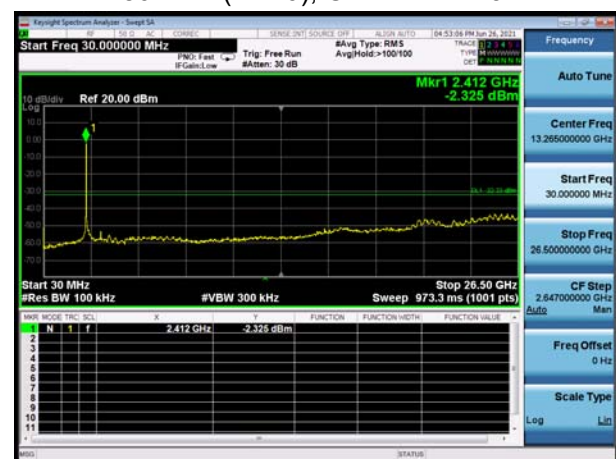


802.11n(HT40), Channel No. 4

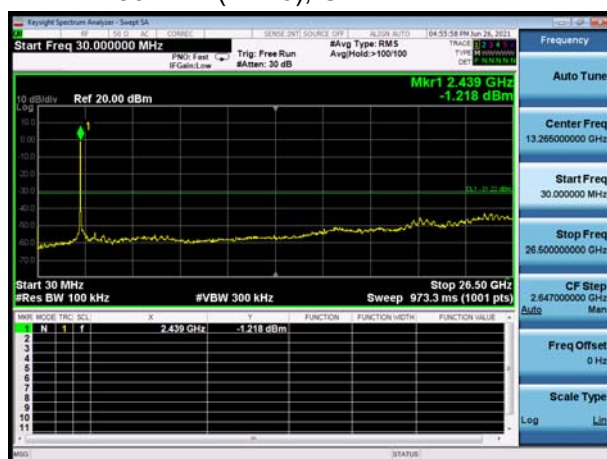

802.11n(HT40), Channel No. 5

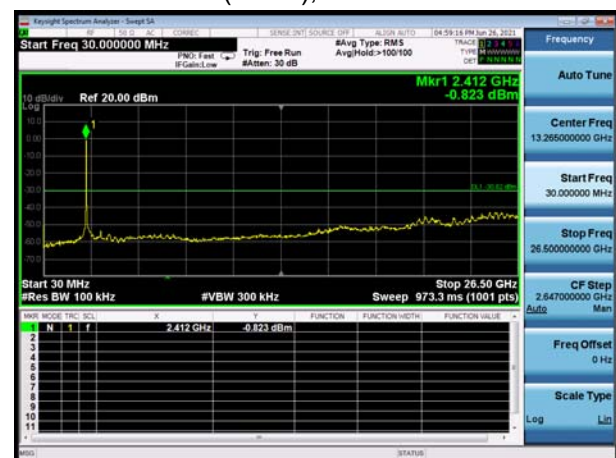

802.11n(HT40), Channel No. 6

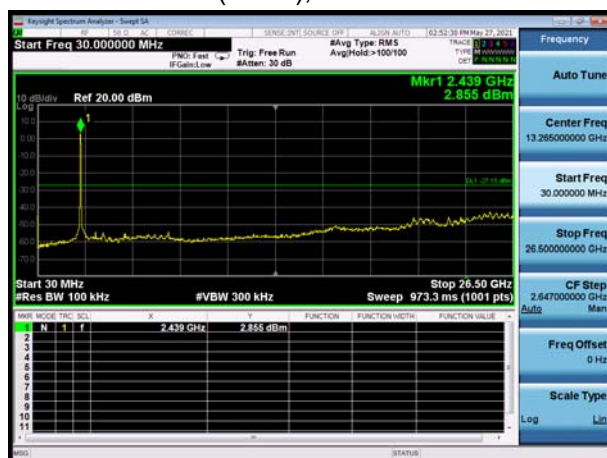



Report No.: R2105A0442-R1

[illegible]

Keysight Spectrum Analyzer - Stage 5A

Start Freq 30.000000 MHz

Ref 20.00 dBm

Mkr1 2.439 GHz
-5.888 dBm

Stop 26.50 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 973.3 ms (1001 pts)

Auto Tune

Center Freq
13.265000000 GHz

Start Freq
30.000000 MHz

Stop Freq
26.500000 GHz

CF Step
2.647000000 GHz

Scale Type
Log Lin

Keysight Spectra Analyzer - Sweep SA

Start Freq 30.000000 MHz

Frequency

Auto Tune

Center Freq 13.265000000 GHz

Start Freq 30.000000 MHz

Stop Freq 26.500000000 GHz

CF Step 2.647000000 GHz

Auto Man

Freq Offset 0 Hz

Scale Type Log Lin

10 dBm

Ref 20.00 dBm

Mkr1 2.465 GHz -4.279 dBm

Start 30 MHz

Res BW 100 kHz

#VBW 300 kHz

Sweep 973.3 ns (1001 pts)

Stop 26.50 GHz

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408


409

410


411</




Bluetooth LE (1M), Channel No.: 0

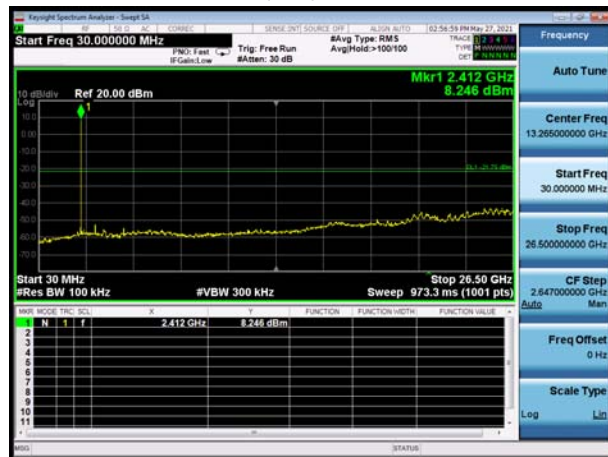


Bluetooth LE (2M), Channel No.: 0

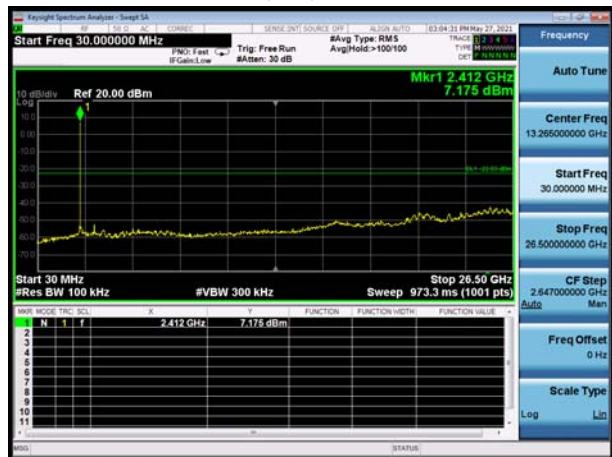


Bluetooth LE (1M), Channel No.: 19

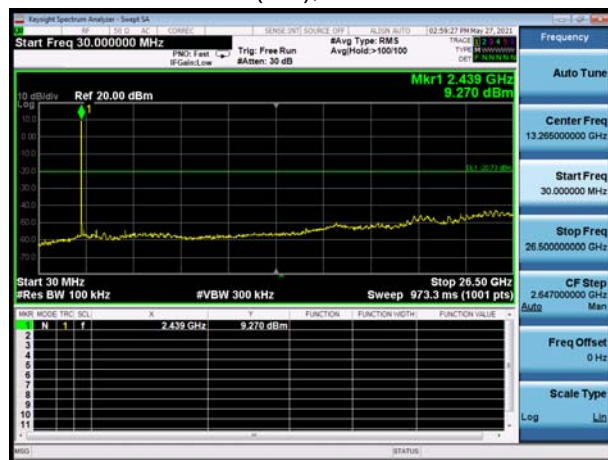


Bluetooth LE (2M), Channel No.: 19

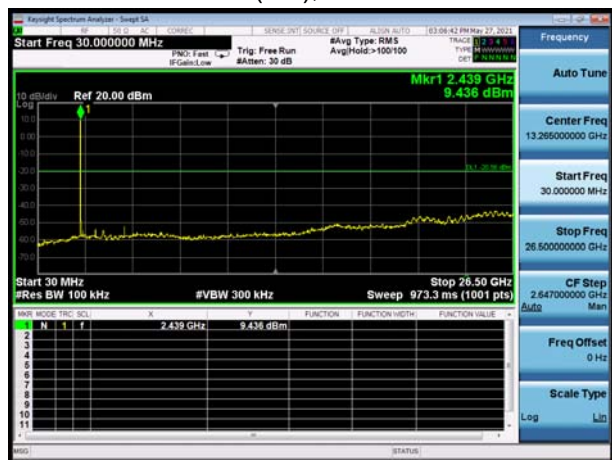

Bluetooth LE (1M), Channel No.: 39

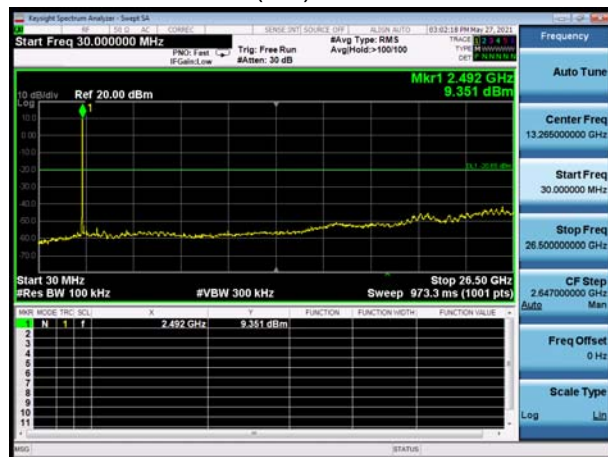

Bluetooth LE (2M), Channel No.: 39

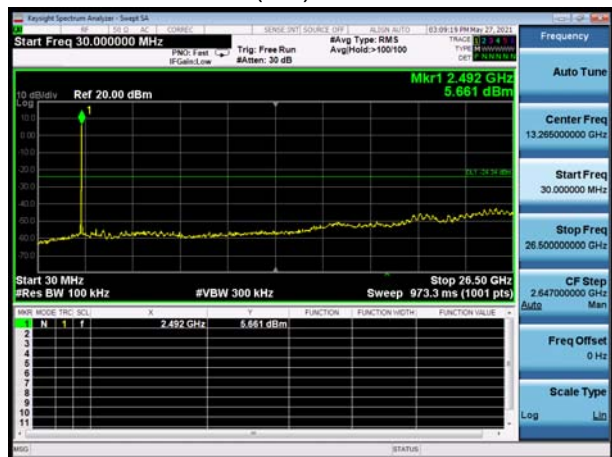

5.6. Unwanted Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

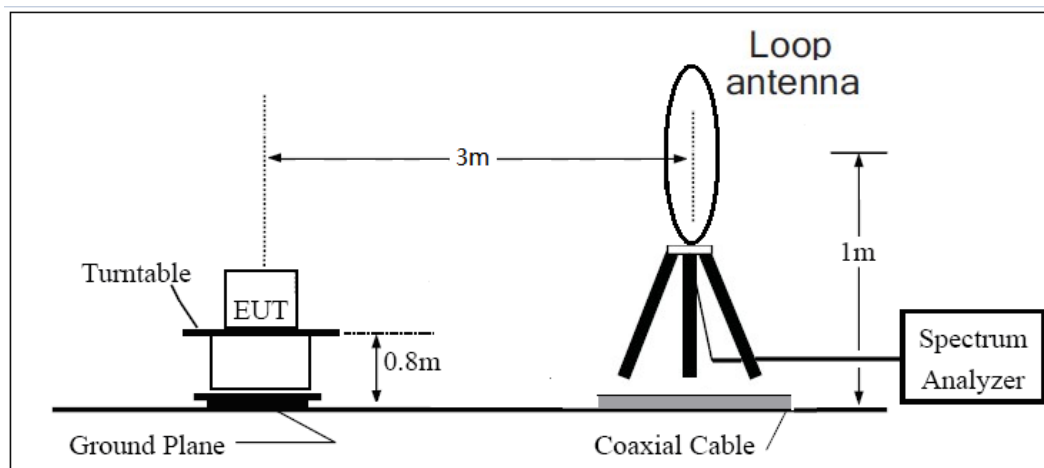

30MHz ~ 1GHz

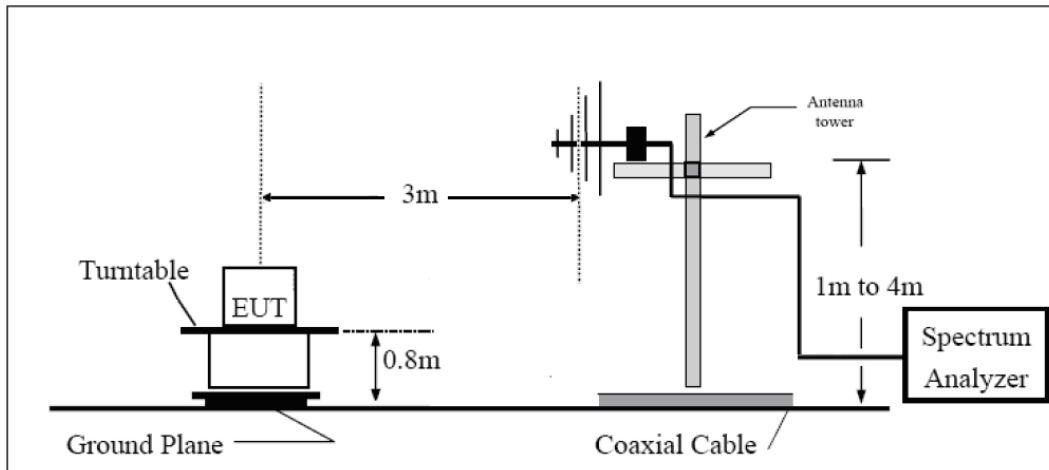

Above 1GHz

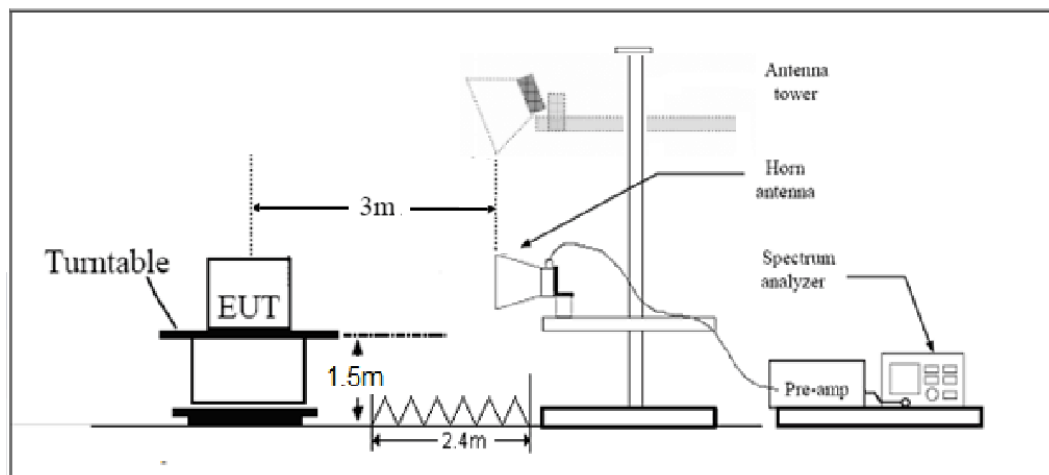

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that "In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))."

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46



Above960	500	54
----------	-----	----

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB


Test Results:

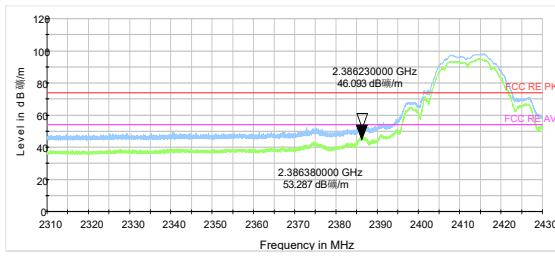


802.11b-Channel 1 Peak& Average

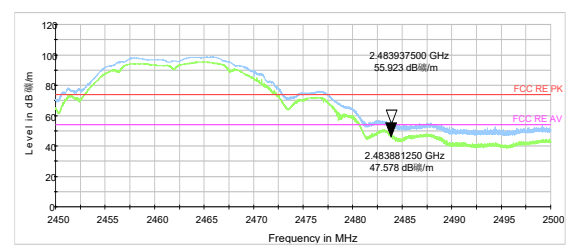


802.11b-Channel 11 Peak& Average

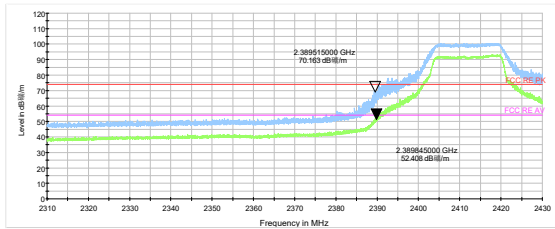


802.11g-Channel 1 Peak& Average

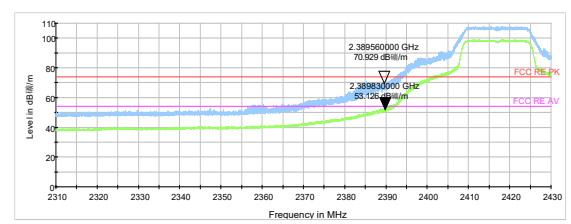


802.11g-Channel 2 Peak& Average

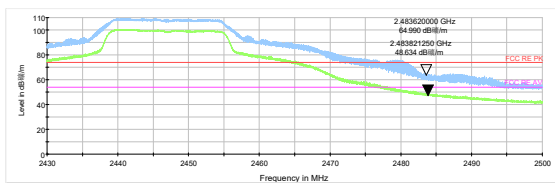


802.11g-Channel 8 Peak& Average

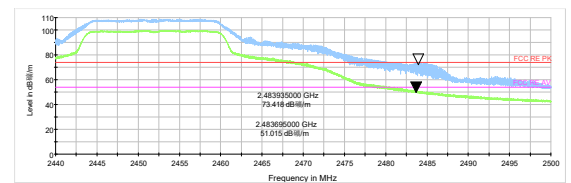


802.11g-Channel 9 Peak& Average

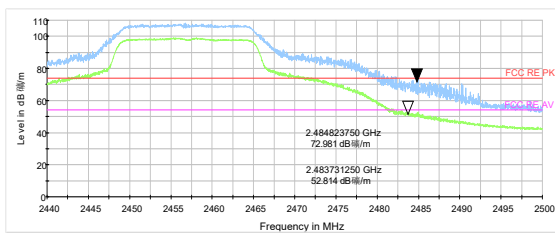


802.11g-Channel 10 Peak& Average

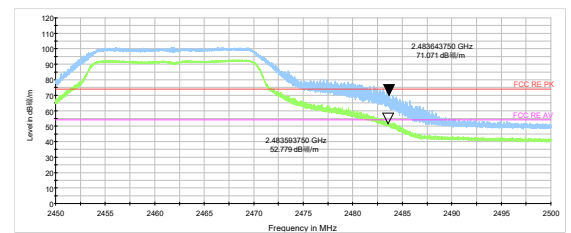


802.11g-Channel 11 Peak& Average

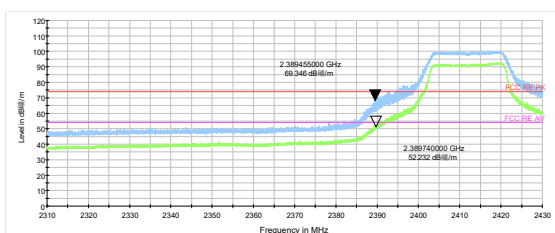


802.11n HT20 -Channel 1 Peak& Average

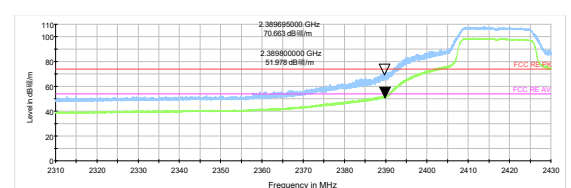


802.11n HT20 -Channel 2 Peak& Average

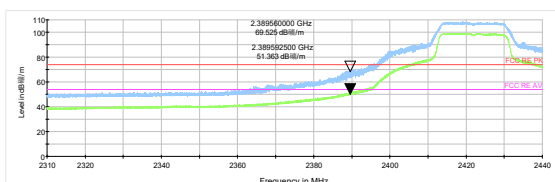


802.11n HT20 -Channel 3 Peak& Average

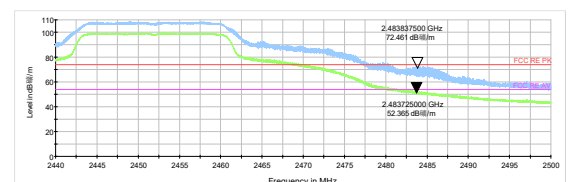


802.11n HT20 -Channel 9 Peak& Average

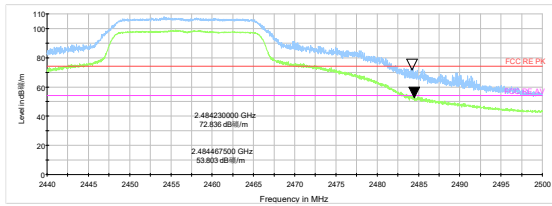


802.11n HT20 -Channel 10 Peak& Average

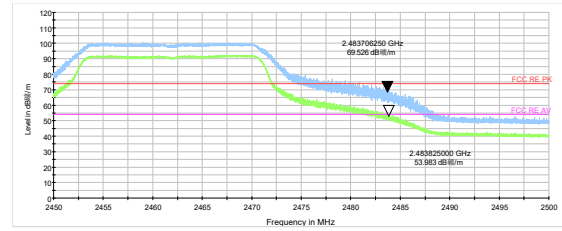


802.11n HT20 -Channel 11 Peak& Average

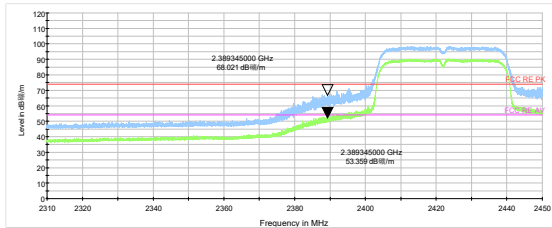


802.11n HT40 -Channel 3 Peak& Average

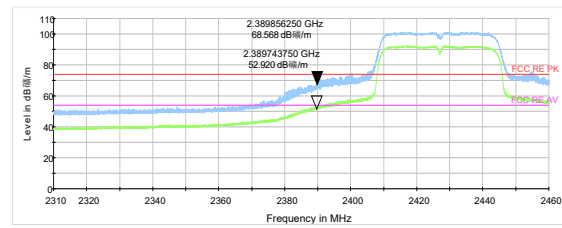


802.11n HT40 -Channel 4 Peak& Average

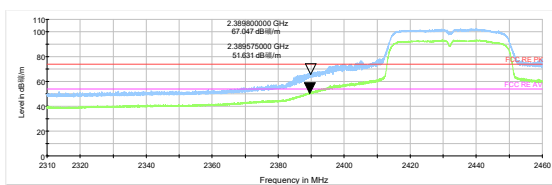


802.11n HT40 -Channel 5 Peak& Average

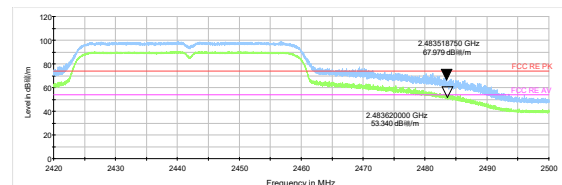

802.11n HT40 -Channel 7 Peak& Average

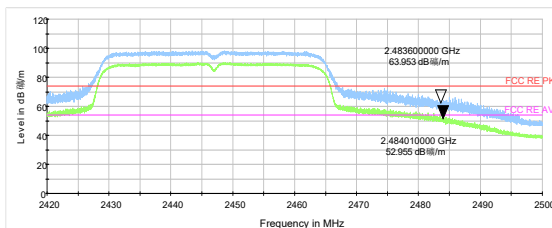


802.11n HT40 -Channel 8 Peak& Average

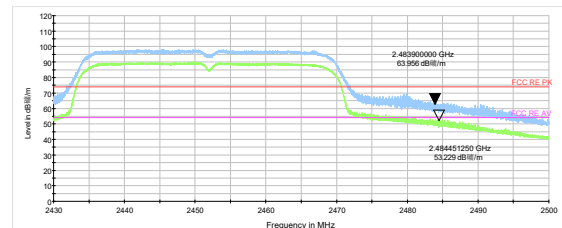


802.11n HT40 -Channel 9 Peak& Average

During the test, the preliminary test was performed in both data rate for BLE, 2Mbps was selected as the worst case. The test data of the worst-case condition was recorded in this report

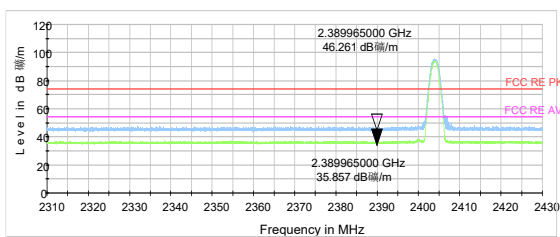

Bluetooth LE Channel 0 Peak& Average

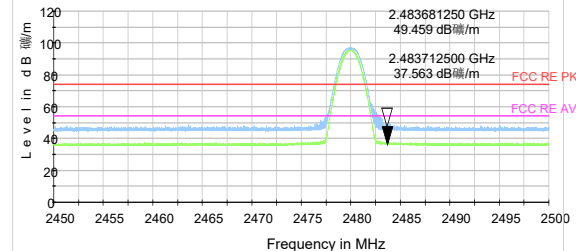

Bluetooth LE Channel 39 Peak& Average

Result of RE


Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz and 18GHz-26.5GHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11n (HT40) CH5 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Continuous TX mode:

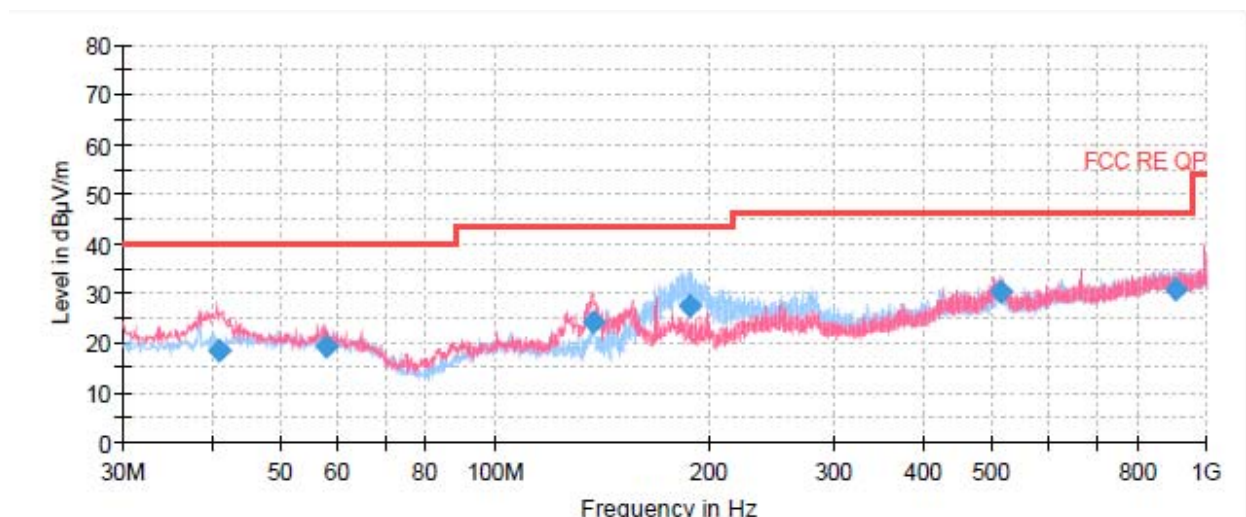


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
41.031250	18.44	115.0	V	96.0	13.7	21.56	40.00
57.966250	19.14	175.0	V	138.0	14.4	20.86	40.00
137.103750	24.14	100.0	V	105.0	9.4	19.36	43.50
187.302500	27.46	175.0	H	92.0	11.8	16.04	43.50
514.192500	30.25	100.0	V	193.0	19.7	15.75	46.00
905.461250	30.68	175.0	H	164.0	25.1	15.32	46.00

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak


802.11b CH1

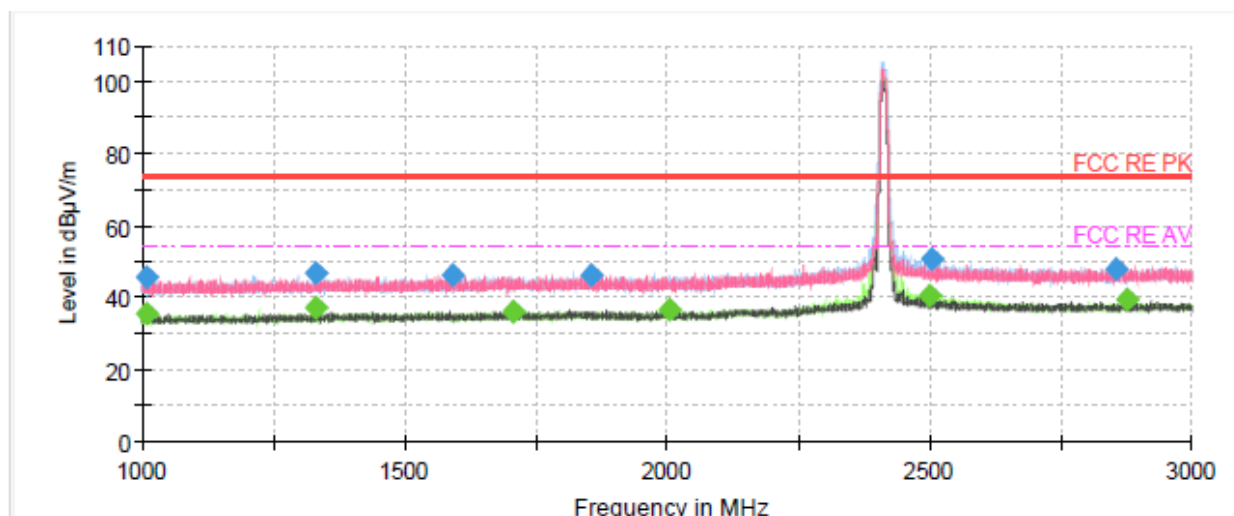

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1007.000000	45.57	---	74.00	28.43	200.0	V	0.0	-11.0
1007.000000	---	35.73	54.00	18.27	200.0	V	0.0	-11.0
1331.066667	47.07	---	74.00	26.93	100.0	V	176.0	-9.7
1332.600000	---	37.37	54.00	16.63	200.0	V	0.0	-9.7
1590.000000	46.08	---	74.00	27.92	200.0	V	7.0	-8.9
1707.466667	---	36.31	54.00	17.69	100.0	H	236.0	-8.6
1854.266667	46.30	---	74.00	27.70	100.0	H	26.0	-8.4
2003.466667	---	36.66	54.00	17.34	100.0	H	122.0	-8.2
2498.933333	---	40.46	54.00	13.54	100.0	H	248.0	-6.3
2503.066667	50.97	---	74.00	23.03	100.0	H	148.0	-6.3
2854.333333	47.92	---	74.00	26.08	200.0	H	104.0	-6.0
2876.066667	---	39.58	54.00	14.42	200.0	H	65.0	-6.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

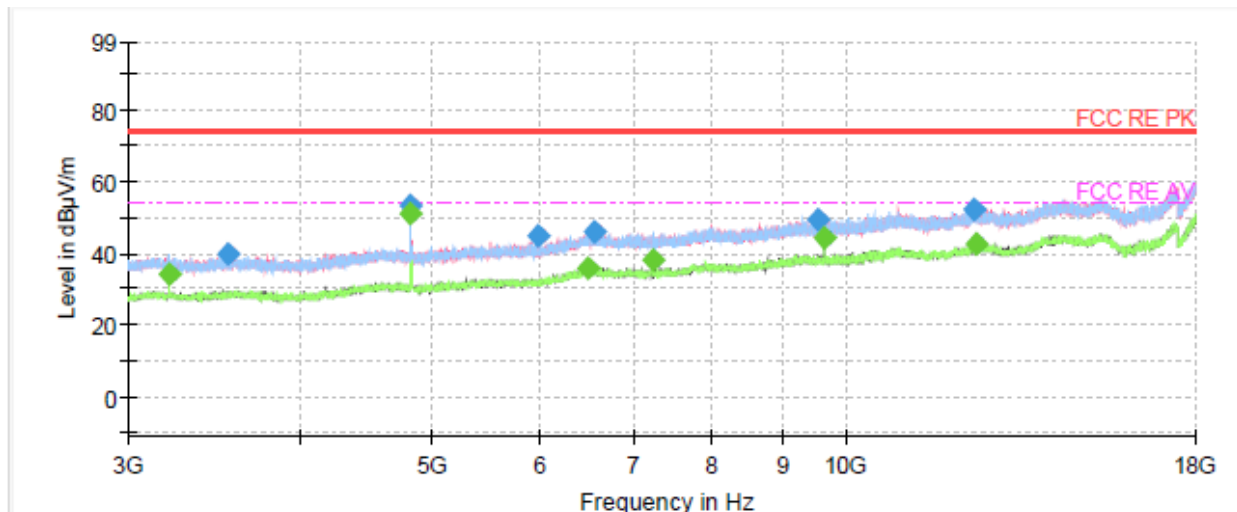


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
3215.500000	---	34.09	54.00	19.91	200.0	H	318.0	-15.1
3550.000000	39.95	---	74.00	34.05	200.0	H	202.0	-14.5
4823.500000	53.52	---	74.00	20.48	200.0	H	349.0	-10.7
4824.000000	---	50.97	54.00	3.03	200.0	H	349.0	-10.7
5971.500000	44.59	---	74.00	29.41	100.0	V	0.0	-7.0
6501.500000	---	35.78	54.00	18.22	200.0	V	0.0	-3.7
6575.000000	45.87	---	74.00	28.13	200.0	V	338.0	-3.6
7236.500000	---	38.33	54.00	15.67	200.0	H	2.0	-4.6
9549.000000	49.57	---	74.00	24.43	100.0	V	243.0	-2.5
9648.000000	---	44.16	54.00	9.84	100.0	V	70.0	-2.3
12396.500000	52.32	---	74.00	21.68	100.0	H	243.0	1.5
12451.500000	---	42.53	54.00	11.47	100.0	H	2.0	1.7

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11b CH6

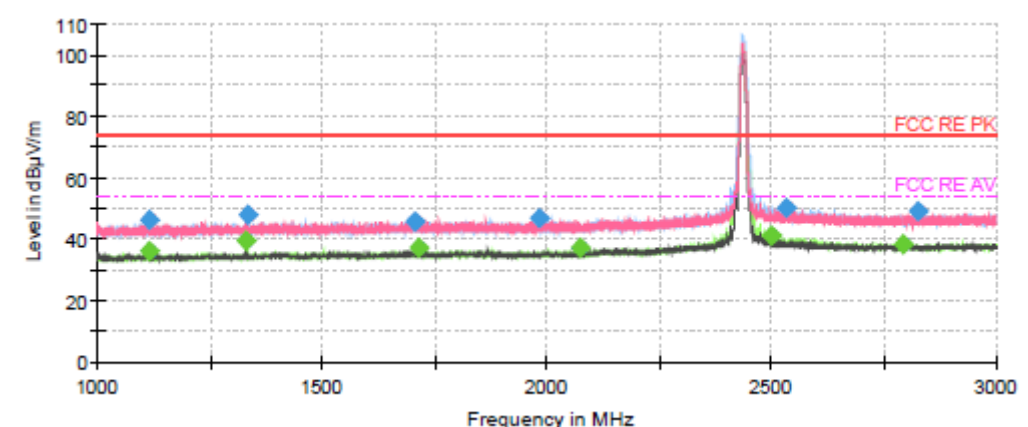


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1114.066667	45.99	---	74.00	28.01	100.0	V	9.0	-10.6
1114.133333	---	35.85	54.00	18.15	200.0	V	214.0	-10.6
1332.133333	---	39.51	54.00	14.49	200.0	H	0.0	-9.7
1332.666667	47.93	---	74.00	26.07	200.0	H	8.0	-9.7
1708.066667	45.85	---	74.00	28.15	100.0	V	0.0	-8.6
1715.666667	---	37.13	54.00	16.87	200.0	H	223.0	-8.6
1982.466667	46.62	---	74.00	27.38	100.0	H	354.0	-8.3
2073.800000	---	37.01	54.00	16.99	200.0	V	69.0	-8.0
2500.933333	---	41.04	54.00	12.96	200.0	H	170.0	-6.3
2534.333333	50.03	---	74.00	23.97	200.0	H	183.0	-6.3
2792.400000	---	38.37	54.00	15.63	100.0	H	252.0	-6.0
2825.733333	48.82	---	74.00	25.18	200.0	V	175.0	-6.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

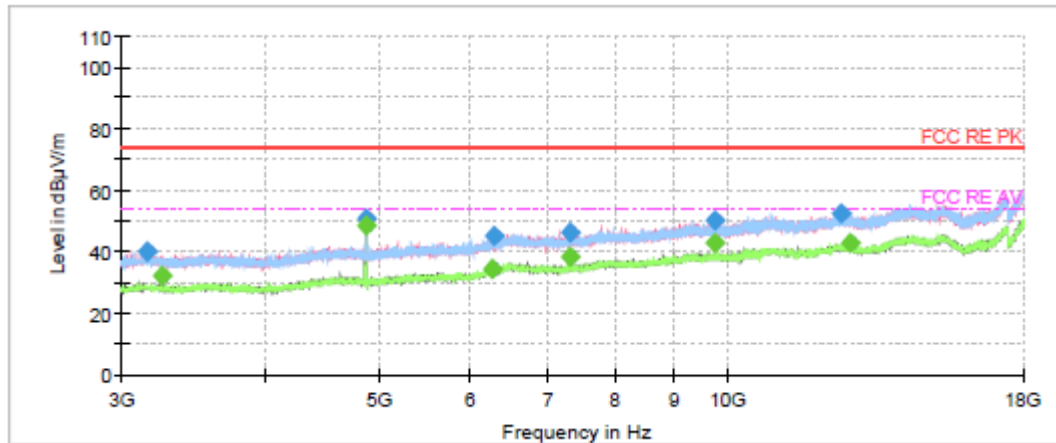


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
3163.500000	40.12	---	74.00	33.88	100.0	V	349.0	-15.3
3249.000000	---	32.40	54.00	21.60	100.0	V	244.0	-15.2
4873.500000	51.05	---	74.00	22.95	100.0	V	159.0	-10.7
4873.500000	---	48.53	54.00	5.47	100.0	V	159.0	-10.7
6268.000000	---	34.51	54.00	19.49	200.0	V	174.0	-5.3
6304.500000	45.14	---	74.00	28.86	100.0	V	159.0	-5.1
7310.000000	---	38.42	54.00	15.58	100.0	V	187.0	-4.4
7311.500000	46.40	---	74.00	27.60	100.0	H	0.0	-4.4
9744.500000	50.20	---	74.00	23.80	200.0	H	33.0	-2.4
9748.000000	---	43.12	54.00	10.88	100.0	V	201.0	-2.4
12522.500000	52.54	---	74.00	21.46	100.0	H	328.0	2.0
12785.000000	---	42.65	54.00	11.35	100.0	V	75.0	2.2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH11

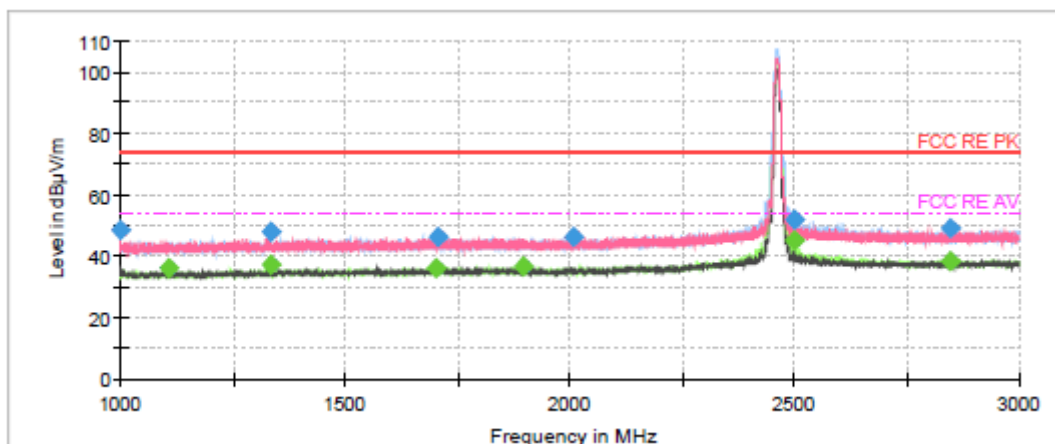

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1000.333333	48.48	---	74.00	25.52	200.0	V	343.0	-11.1
1107.866667	---	35.95	54.00	18.05	100.0	V	183.0	-10.6
1332.866667	---	37.33	54.00	16.67	100.0	H	0.0	-9.7
1333.666667	48.14	---	74.00	25.86	200.0	H	2.0	-9.7
1701.800000	---	36.28	54.00	17.72	200.0	V	349.0	-8.6
1705.466667	46.32	---	74.00	27.68	200.0	V	296.0	-8.6
1895.933333	---	36.68	54.00	17.32	100.0	H	0.0	-8.4
2006.466667	46.36	---	74.00	27.64	200.0	V	139.0	-8.2
2499.000000	---	45.01	54.00	8.99	100.0	H	164.0	-6.3
2499.400000	52.03	---	74.00	21.97	100.0	H	164.0	-6.3
2845.200000	---	38.22	54.00	15.78	100.0	H	350.0	-6.1
2848.733333	49.04	---	74.00	24.96	200.0	V	258.0	-6.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

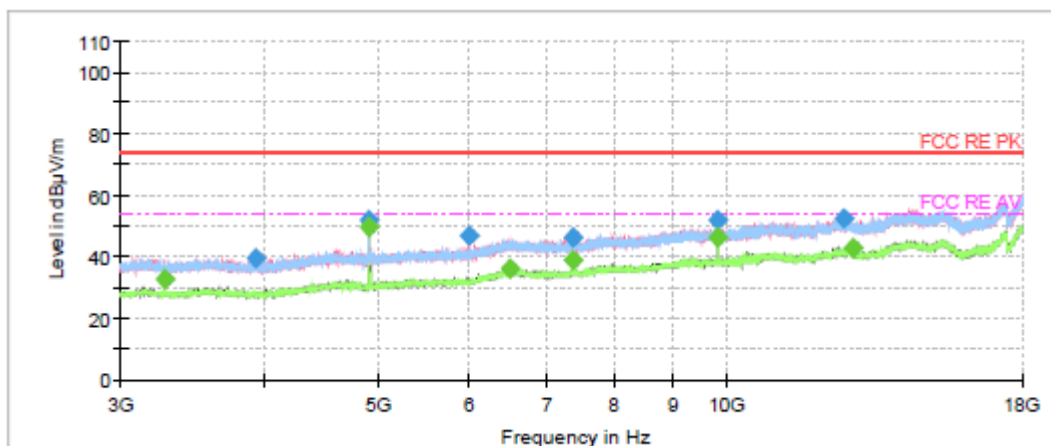


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
3282.500000	---	32.47	54.00	21.53	200.0	V	172.0	-15.0
3919.500000	39.28	---	74.00	34.72	100.0	H	0.0	-13.6
4924.000000	51.68	---	74.00	22.32	100.0	V	130.0	-10.6
4924.000000	---	49.62	54.00	4.38	100.0	V	130.0	-10.6
5998.000000	46.93	---	74.00	27.07	200.0	V	102.0	-6.9
6505.500000	---	36.36	54.00	17.64	100.0	H	0.0	-3.7
7386.500000	46.00	---	74.00	28.00	100.0	H	353.0	-4.3
7387.500000	---	38.89	54.00	15.11	100.0	V	200.0	-4.3
9847.500000	51.70	---	74.00	22.30	100.0	V	61.0	-1.8
9848.000000	---	46.08	54.00	7.92	100.0	V	61.0	-1.8
12644.000000	52.25	---	74.00	21.75	200.0	V	28.0	2.2
12848.500000	---	42.81	54.00	11.19	200.0	H	267.0	2.0

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH1

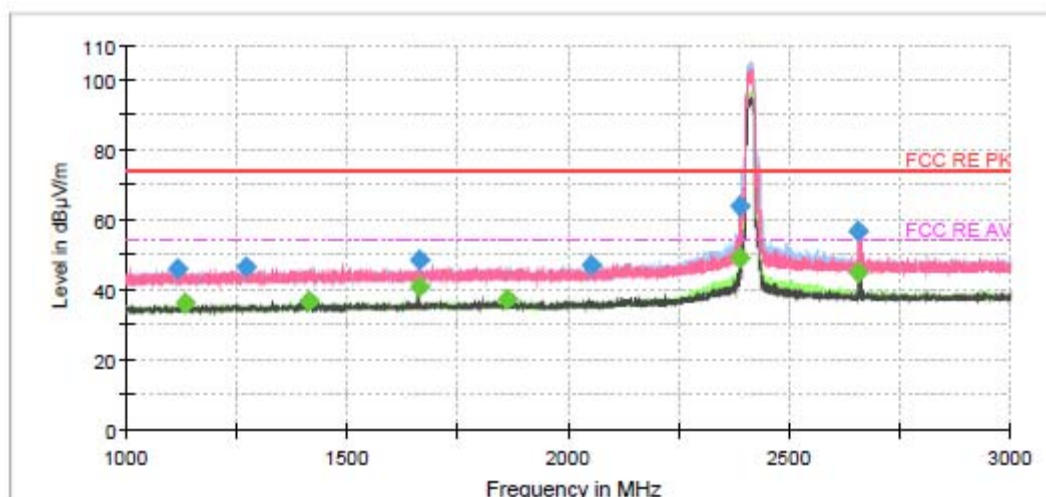


Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1115.800000	45.87	---	74.00	28.13	100.0	V	92.0	-10.6
1135.133333	---	36.55	54.00	17.45	100.0	V	132.0	-10.5
1270.600000	46.58	---	74.00	27.42	200.0	H	211.0	-9.9
1415.200000	---	36.77	54.00	17.23	100.0	H	359.0	-9.4
1661.733333	---	40.89	54.00	13.11	200.0	V	25.0	-8.8
1661.733333	48.80	---	74.00	25.20	200.0	V	25.0	-8.8
1862.533333	---	37.17	54.00	16.83	200.0	V	358.0	-8.4
2052.600000	47.10	---	74.00	26.90	100.0	V	0.0	-7.9
2388.800000	---	49.33	54.00	4.67	100.0	H	98.0	-6.5
2388.800000	64.13	---	74.00	9.87	100.0	H	98.0	-6.5
2654.933333	56.57	---	74.00	17.43	100.0	V	336.0	-6.1
2654.933333	---	45.17	54.00	8.83	100.0	V	336.0	-6.1

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

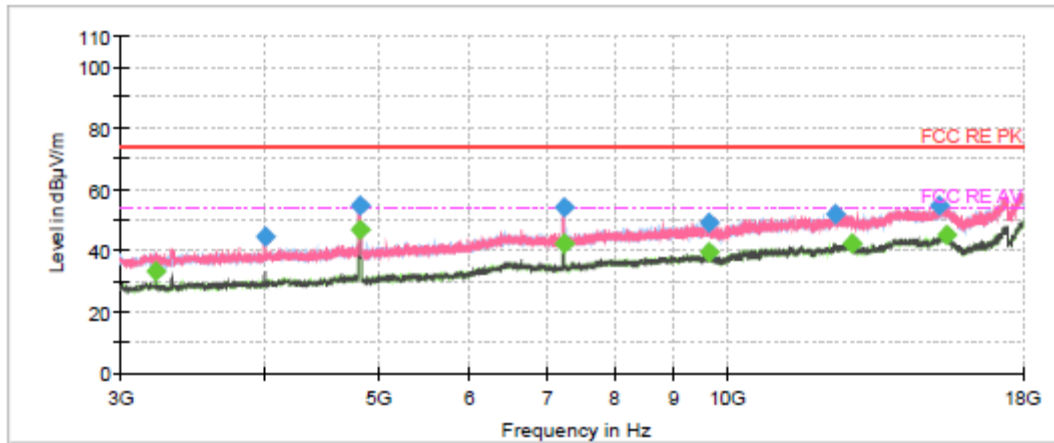

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
3215.500000	---	33.34	54.00	20.66	100.0	V	0.0	-15.1
3998.500000	44.83	---	74.00	29.17	200.0	V	348.0	-13.3
4825.500000	---	46.60	54.00	7.40	200.0	H	333.0	-10.7
4826.000000	54.58	---	74.00	19.42	100.0	H	312.0	-10.7
7233.000000	54.04	---	74.00	19.96	100.0	H	353.0	-4.6
7233.000000	---	42.12	54.00	11.88	100.0	H	353.0	-4.6
9641.000000	---	39.55	54.00	14.45	100.0	V	244.0	-2.3
9653.000000	49.08	---	74.00	24.92	100.0	V	215.0	-2.3
12387.000000	51.98	---	74.00	22.02	200.0	H	241.0	1.5
12807.000000	---	42.34	54.00	11.66	100.0	V	0.0	2.1
15255.500000	54.65	---	74.00	19.35	200.0	V	202.0	5.5
15475.000000	---	45.41	54.00	8.59	100.0	V	144.0	5.3

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)