

# FCC TEST REPORT

**REPORT NO. :** RF951013A07A

**MODEL NO. :** M975U

**RECEIVED :** Oct. 13, 2006

**TESTED :** Oct. 20 ~ Nov. 02, 2006

**ISSUED :** Nov. 06, 2006

**APPLICANT :** BEHAVIOR TECH COMPUTER CORP.

**ADDRESS :** 20F-B, No. 98, Sec. 1, Sintai 5th Rd., Sijhih City,  
Taipei County 22102, Taiwan (R.O.C.)

**ISSUED BY :** Advance Data Technology Corporation

**LAB ADDRESS :** No. 47, 14<sup>th</sup> Ling, Chia Pau Tsuen, Lin Kou  
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

**TEST LOCATION :** No. 19, Hwa Ya 2<sup>nd</sup> Rd., Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 31 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



## Table of Contents

1.	CERTIFICATION .....	3
2.	SUMMARY OF TEST RESULTS .....	4
2.1	MEASUREMENT UNCERTAINTY .....	4
3.	GENERAL INFORMATION .....	5
3.1	GENERAL DESCRIPTION OF EUT .....	5
3.2	DESCRIPTION OF TEST MODES .....	6
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	6
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	9
3.4	DESCRIPTION OF SUPPORT UNITS .....	9
4.	TEST TYPES AND RESULTS .....	10
4.1	CONDUCTED EMISSION MEASUREMENT .....	10
4.2	RADIATED EMISSION MEASUREMENT .....	19
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	19
4.2.2	TEST INSTRUMENTS .....	20
4.2.3	TEST PROCEDURES .....	21
4.2.4	DEVIATION FROM TEST STANDARD .....	21
4.2.5	TEST SETUP .....	22
4.2.6	EUT OPERATING CONDITIONS .....	22
4.2.7	TEST RESULTS .....	23
4.3	BAND EDGES MEASUREMENT .....	27
4.3.1	LIMITS OF BAND EDGES MEASUREMENT .....	27
4.3.2	TEST INSTRUMENTS .....	27
4.3.3	TEST PROCEDURE .....	27
4.3.4	DEVIATION FROM TEST STANDARD .....	27
4.3.5	EUT OPERATING CONDITION .....	27
4.3.6	TEST RESULTS .....	27
5.	INFORMATION ON THE TESTING LABORATORIES .....	30
APPENDIX-A	.....	A-1

## 1. CERTIFICATION

**PRODUCT :** Wireless Receiver  
**BRAND NAME :** HP  
**MODEL NO. :** M975U  
**APPLICANT :** BEHAVIOR TECH COMPUTER CORP.  
**TESTED :** Oct. 20 ~ Nov. 02, 2006  
**TEST SAMPLE :** ENGINEERING SAMPLE  
**STANDARDS :** FCC Part 15, Subpart C (Section 15.249)  
ANSI C63.4-2003

The above equipment have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Jessie Wang , **DATE:** Nov. 06, 2006

**TECHNICAL ACCEPTANCE**  
**RESPONSIBLE FOR RF :** Long Chen , **DATE:** Nov. 06, 2006

**APPROVED BY :** Gary Chang / Supervisor , **DATE:** Nov. 06, 2006

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.249)			
STANDARD PARAGRAPH	TEST TYPE	RESULT	REMARK
15.207	Conducted Emission Test	PASS	Minimum passing margin is -5.73dB at 0.179MHz
15.209 15.249 15.249 (d)	Radiated Emission Test Band Edge Measurement Limit: 50dB less than the peak value of fundamental frequency or meet radiated emission limit in section 15.209	PASS	Minimum passing margin is -4.15dB at 2410.00MHz

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.71 dB
	200MHz ~1000MHz	3.73 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>EUT</b>	Wireless Receiver
<b>MODEL NO.</b>	M975U
<b>FCC ID</b>	E5XRXM975U
<b>POWER SUPPLY</b>	5Vdc from host equipment
<b>MODULATION TYPE</b>	GFSK
<b>RADIO TECHNOLOGY</b>	DSSS
<b>FREQUENCY RANGE</b>	2410 ~ 2473 MHz
<b>NUMBER OF CHANNEL</b>	64
<b>ANTENNA TYPE</b>	Printed Antenna with -5.76 dBi gain
<b>DATA CABLE</b>	NA
<b>I/O PORT</b>	NA

**NOTE:**


1. The EUT is a Wireless Receiver
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

64 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	2410	17	2426	33	2442	49	2458
2	2411	18	2427	34	2443	50	2459
3	2412	19	2428	35	2444	51	2460
4	2413	20	2429	36	2445	52	2461
5	2414	21	2430	37	2446	53	2462
6	2415	22	2431	38	2447	54	2463
7	2416	23	2432	39	2448	55	2464
8	2417	24	2433	40	2449	56	2465
9	2418	25	2434	41	2450	57	2466
10	2419	26	2435	42	2451	58	2467
11	2420	27	2436	43	2452	59	2468
12	2421	28	2437	44	2453	60	2469
13	2422	29	2438	45	2454	61	2470
14	2423	30	2439	46	2455	62	2471
15	2424	31	2440	47	2456	63	2472
16	2425	32	2441	48	2457	64	2473

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

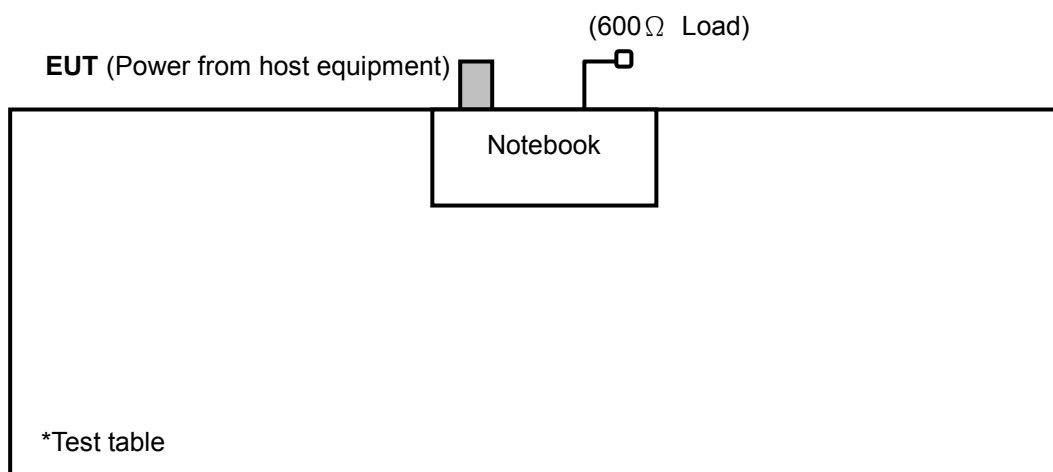

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

**RE<1G**: Radiated Emission below 1GHz

**RE≥1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

#### **Power Line Conducted Emission Test:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1 to 64	1, 26, 64	DSSS	GFSK

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1 to 64	1	DSSS	GFSK

#### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1 to 64	1, 26, 64	DSSS	GFSK

**BANDEDGE MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1 to 64	1, 64	DSSS	GFSK



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (Section 15.249)**  
**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MOEDL NO.	SERIAL NO.	FCC ID
1	HP compaq nx6125	HP	nx6215	s/n:CND5390CMP	NA
2	600 $\Omega$ LOAD	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

**NOTE:** All power cords of the above support units are non shielded (1.8m).

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Sep. 25, 2007
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2007
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 09, 2007
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 22, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 2.
  3. The VCCI Site Registration No. is C-2047.


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

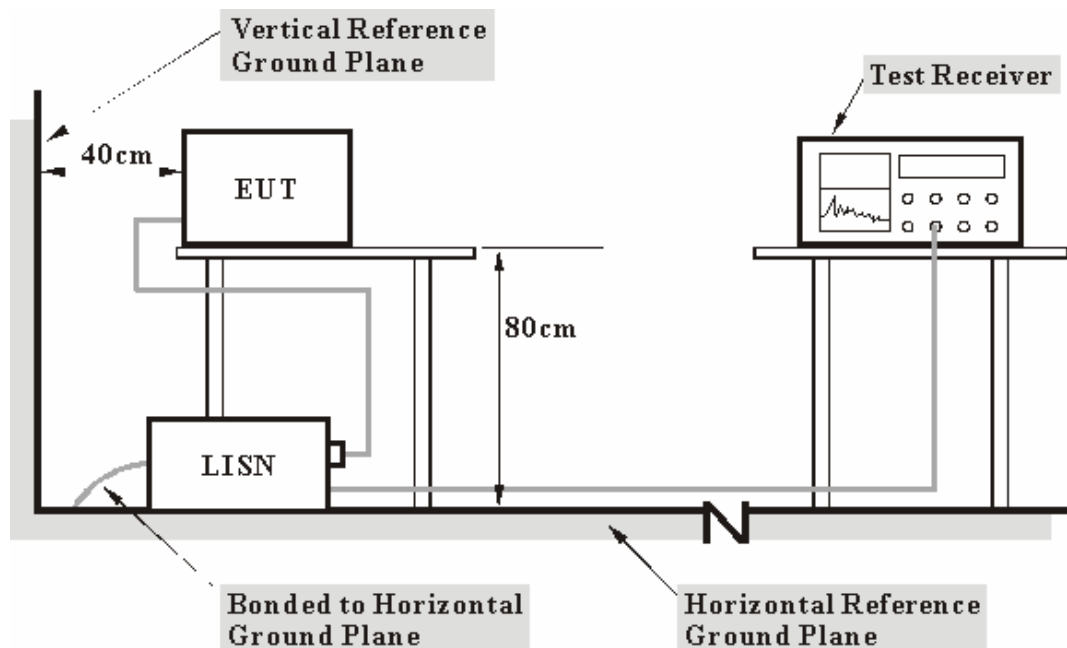

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Plugged the EUT to a notebook system and placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. Steps b ~ c were repeated.


#### 4.1.7 TEST RESULTS

##### CONDUCTED WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.179	0.10	58.72	41.10	58.82	41.20	64.55	54.55	-5.73	-13.35
2	0.209	0.10	54.58	41.00	54.68	41.10	63.26	53.26	-8.58	-12.16
3	0.273	0.10	49.56	-	49.66	-	61.04	51.04	-11.38	-
4	1.445	0.14	33.69	-	33.83	-	56.00	46.00	-22.17	-
5	2.941	0.28	28.97	-	29.25	-	56.00	46.00	-26.75	-
6	14.855	0.62	37.20	-	37.82	-	60.00	50.00	-22.18	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

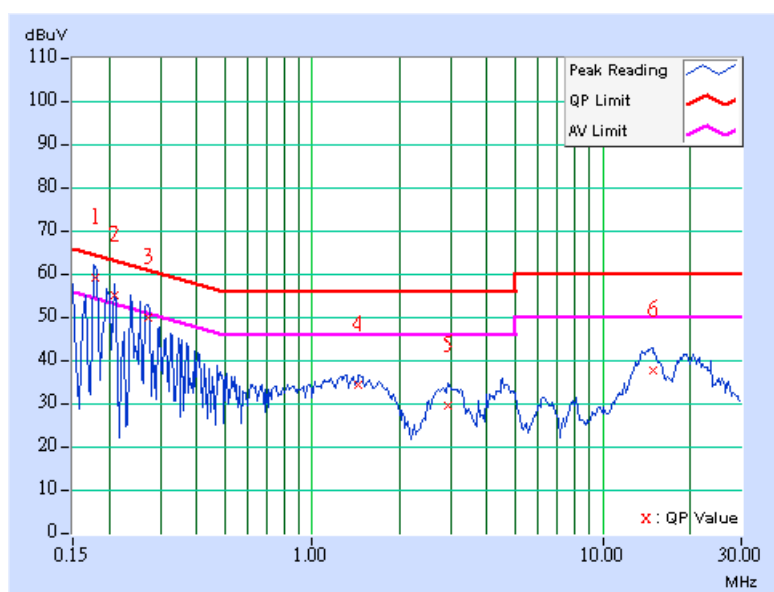

EUT TEST CONDITION		MEASUREMENT DETAIL	
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.180	0.10	56.11	39.75	56.21	39.85	64.50	54.50	-8.29	-14.65
2	0.199	0.10	53.54	-	53.64	-	63.64	53.64	-10.00	-
3	0.275	0.10	47.90	-	48.00	-	60.97	50.97	-12.97	-
4	1.883	0.20	28.08	-	28.28	-	56.00	46.00	-27.72	-
5	4.207	0.37	27.52	-	27.89	-	56.00	46.00	-28.11	-
6	14.199	0.60	36.50	-	37.10	-	60.00	50.00	-22.90	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

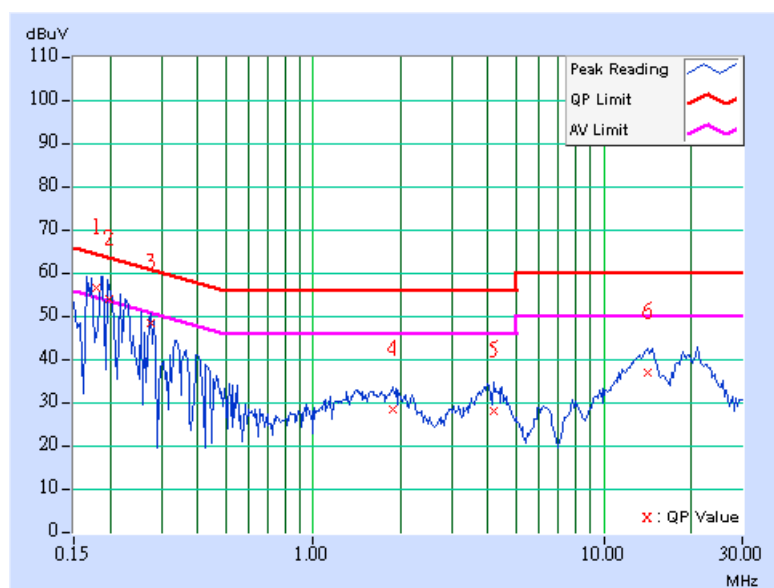

EUT TEST CONDITION		MEASUREMENT DETAIL	
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	PHASE	Line 1
CHANNEL	Channel 26	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	55.02	36.42	55.12	36.52	64.79	54.79	-9.67	-18.27
2	0.205	0.10	52.19	-	52.29	-	63.42	53.42	-11.13	-
3	0.263	0.10	45.56	-	45.66	-	61.33	51.33	-15.67	-
4	1.426	0.14	33.61	-	33.75	-	56.00	46.00	-22.25	-
5	3.102	0.29	29.69	-	29.98	-	56.00	46.00	-26.02	-
6	14.844	0.62	37.08	-	37.70	-	60.00	50.00	-22.30	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

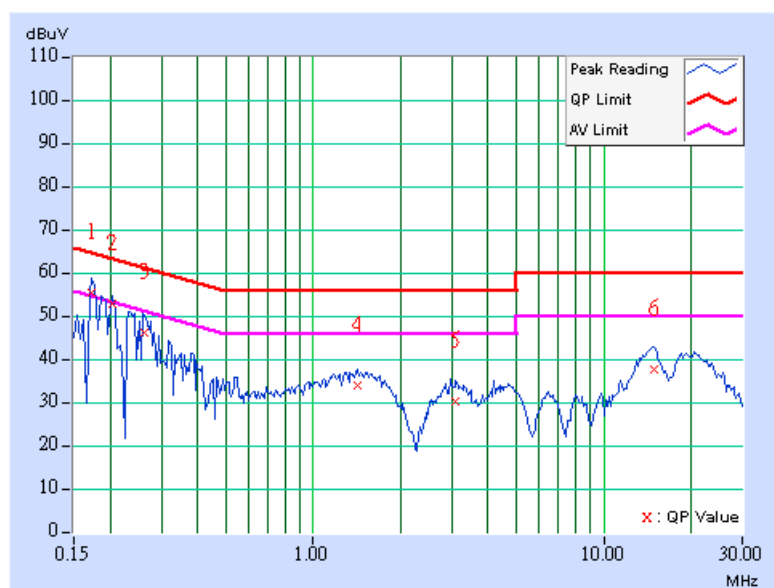

EUT TEST CONDITION		MEASUREMENT DETAIL	
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	PHASE	Line 2
CHANNEL	Channel 26	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	52.76	-	52.86	-	64.25	54.25	-11.39	-
2	0.205	0.10	52.17	-	52.27	-	63.42	53.42	-11.15	-
3	0.275	0.10	46.00	-	46.10	-	60.97	50.97	-14.87	-
4	1.746	0.20	29.98	-	30.18	-	56.00	46.00	-25.82	-
5	4.074	0.37	28.71	-	29.08	-	56.00	46.00	-26.92	-
6	14.570	0.62	36.09	-	36.71	-	60.00	50.00	-23.29	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

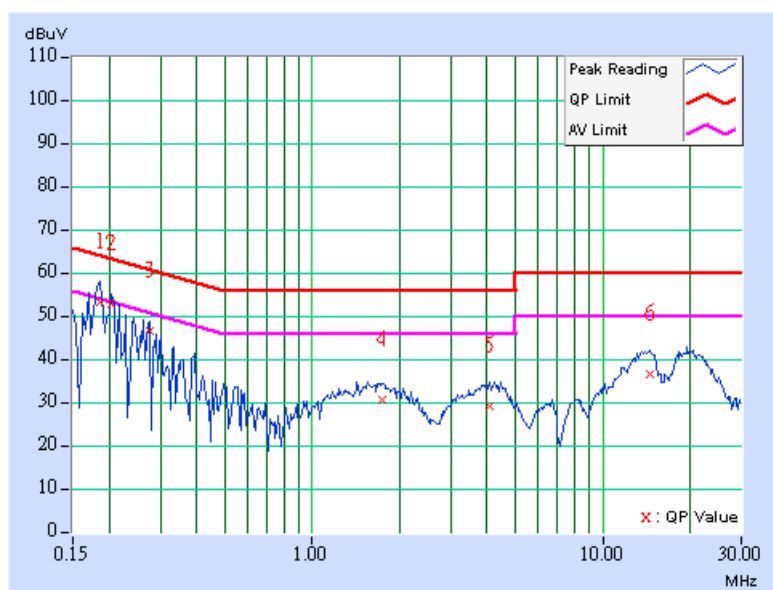




EUT TEST CONDITION		MEASUREMENT DETAIL	
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	PHASE	Line 1
CHANNEL	Channel 64	6dB BANDWIDTH	9 kHz
MODULATION TYPE	GFSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.175	0.10	55.74	36.78	55.84	36.88	64.74	54.74	-8.90	-17.86
2	0.213	0.10	52.19	-	52.29	-	63.10	53.10	-10.81	-
3	0.265	0.10	45.56	-	45.66	-	61.26	51.26	-15.60	-
4	1.426	0.14	34.58	-	34.72	-	56.00	46.00	-21.28	-
5	3.113	0.29	29.69	-	29.98	-	56.00	46.00	-26.02	-
6	14.845	0.62	37.74	-	38.36	-	60.00	50.00	-21.64	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

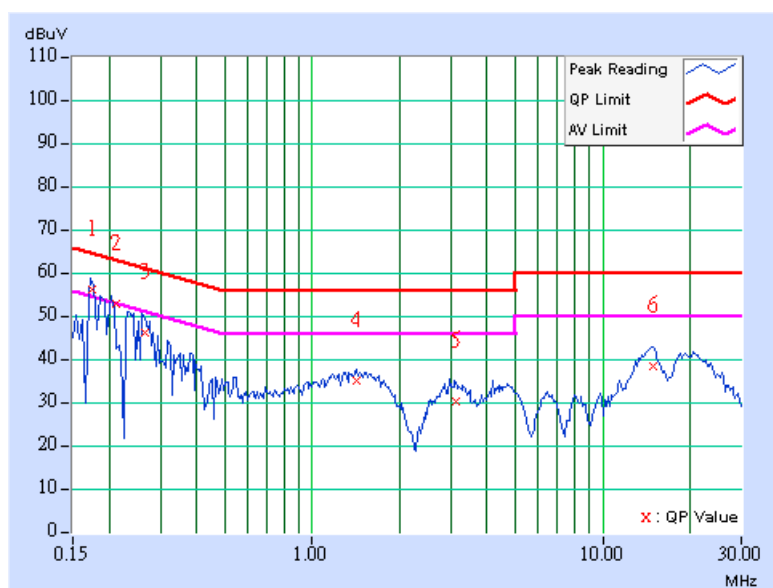



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209, 15.249 as following:

#### 15.209 Limit

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### 15.249 Limit

Fundamental Frequency	Field Strength of Fundamental (microvolts/meter)	Field Strength of Harmonics (microvolts/meter)
902 – 928 MHz	50	500
2400 – 2483.5 MHz	50	500
5725 -5875 MHz	50	500
24.0 – 24.25 GHz	250	2500

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 22, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100025	Dec. 05, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 31, 2007
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 08, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 19, 2007
Preamplifier Agilent	8447D	2944A10633	Oct. 26, 2007
Preamplifier Agilent	8449B	3008A01964	Oct. 26, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	214377/4	Dec. 13, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Dec. 13, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 3.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The VCCI Site Registration No. is R-237.
  5. The IC Site Registration No. is IC4924-3.

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

## 4.2.5 TEST SETUP

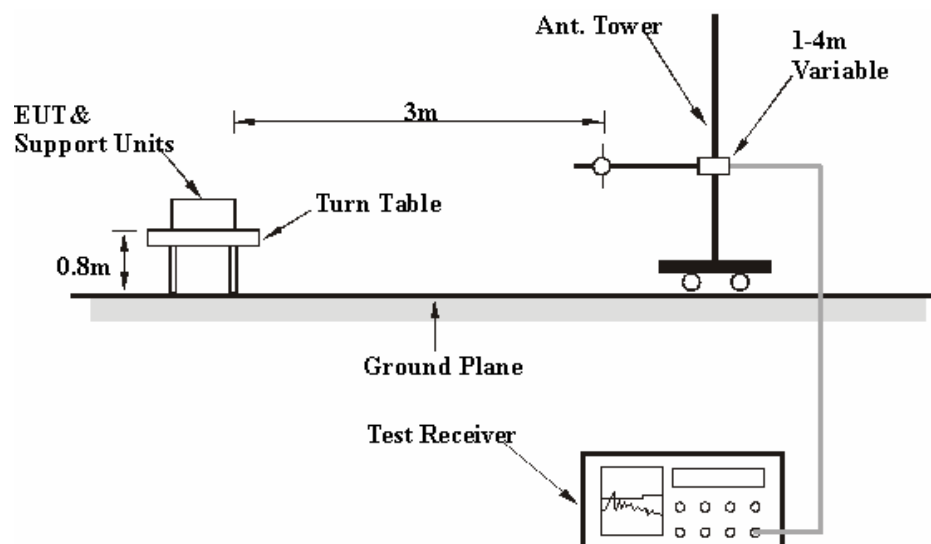

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

## 4.2.7 TEST RESULTS

### RADIATED WORST-CASE DATA: BELOW 1GHz

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	GFSK	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.66	31.30 QP	46.00	-14.70	1.00 H	91	17.83	13.47
2	333.25	26.26 QP	46.00	-19.74	1.00 H	100	10.23	16.02
3	422.67	26.84 QP	46.00	-19.16	1.00 H	82	8.41	18.44
4	463.49	30.60 QP	46.00	-15.40	1.50 H	52	11.00	19.61
5	665.65	34.07 QP	46.00	-11.93	1.25 H	46	10.47	23.60
6	733.69	33.17 QP	46.00	-12.83	1.00 H	88	8.18	24.99
7	865.87	33.42 QP	46.00	-12.58	1.00 H	76	6.56	26.87

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	107.76	25.63 QP	43.50	-17.87	1.50 V	250	14.49	11.14
2	249.66	31.85 QP	46.00	-14.15	1.00 V	85	18.38	13.47
3	333.25	26.28 QP	46.00	-19.72	1.00 V	79	10.26	16.02
4	465.43	30.85 QP	46.00	-15.15	1.50 V	13	11.22	19.63
5	729.80	33.27 QP	46.00	-12.73	1.00 V	91	8.39	24.88
6	865.87	35.18 QP	46.00	-10.82	1.50 V	91	8.31	26.87

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

### ABOVE 1GHz WORST-CASE DATA

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	GFSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	47.45 PK	74.00	-26.55	1.09 H	208	15.96	31.49
1	2390.00	40.32 AV	54.00	-13.68	1.09 H	208	8.83	31.49
2	*2410.00	90.26 PK	114.00	-23.74	1.07 H	197	58.68	31.58
<b>2</b>	<b>*2410.00</b>	<b>89.85 AV</b>	<b>94.00</b>	<b>-4.15</b>	<b>1.07 H</b>	<b>197</b>	<b>58.27</b>	<b>31.58</b>
3	4820.00	52.56 PK	74.00	-21.44	1.08 H	32	15.04	37.52
3	4820.00	42.75 AV	54.00	-11.25	1.08 H	32	5.23	37.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	41.98 PK	74.00	-32.02	1.18 V	315	10.49	31.49
1	2390.00	34.52 AV	54.00	-19.48	1.18 V	315	3.03	31.49
2	*2410.00	82.15 PK	114.00	-31.85	1.05 V	306	50.57	31.58
2	*2410.00	81.42 AV	94.00	-12.58	1.05 V	306	49.84	31.58
3	4820.00	52.58 PK	74.00	-21.42	1.05 V	16	15.06	37.52
3	4820.00	44.28 AV	54.00	-9.72	1.05 V	16	6.76	37.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency



EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 26	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	GFSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2435.00	89.67 PK	114.00	-24.33	1.08 H	198	57.98	31.69
1	*2435.00	89.26 AV	94.00	-4.74	1.08 H	198	57.57	31.69
2	4870.00	51.98 PK	74.00	-22.02	1.05 H	198	14.34	37.64
2	4870.00	42.23 AV	54.00	-11.77	1.05 H	198	4.59	37.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2435.00	81.26 PK	114.00	-32.74	1.05 V	325	49.57	31.69
1	*2435.00	80.52 AV	94.00	-13.48	1.05 V	325	48.83	31.69
2	4870.00	52.35 PK	74.00	-21.65	1.08 V	185	14.71	37.64
2	4870.00	42.51 AV	54.00	-11.49	1.08 V	185	4.87	37.64

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	GFSK	DETECTOR FUNCTION	Peak (PK) Average (AV)
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 69%RH, 991hPa
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2473.00	88.22 PK	114.00	-25.78	1.33 H	202	56.35	31.87
1	*2473.00	87.80 AV	94.00	-6.20	1.33 H	202	55.93	31.87
2	2483.50	45.35 PK	74.00	-28.65	1.30 H	215	13.44	31.91
2	2483.50	38.56 AV	54.00	-15.44	1.30 H	215	6.65	31.91
3	4946.00	51.01 PK	74.00	-22.99	1.21 H	10	13.21	37.80
3	4946.00	41.38 AV	54.00	-12.62	1.21 H	10	3.58	37.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2473.00	80.32 PK	114.00	-33.68	1.08 V	345	48.45	31.87
1	*2473.00	79.61 AV	94.00	-14.39	1.08 V	345	47.74	31.87
2	2483.50	40.58 PK	74.00	-33.42	1.15 V	309	8.67	31.91
2	2483.50	33.67 AV	54.00	-20.33	1.15 V	309	1.76	31.91
3	4946.00	51.30 PK	74.00	-22.70	1.01 V	21	13.50	37.80
3	4946.00	43.33 AV	54.00	-10.67	1.01 V	21	5.53	37.80

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency

### 4.3 BAND EDGES MEASUREMENT

#### 4.3.1 LIMITS OF BAND EDGES MEASUREMENT

Below -50dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

#### 4.3.4 DEVIATION FROM TEST STANDARD



No deviation.



#### 4.3.5 EUT OPERATING CONDITION

Same as Item 4.3.6.

#### 4.3.6 TEST RESULTS

The spectrum plots are attached on the following 4 images. D2 line indicates the highest level, and D1 line indicates the 50dB offset below D2. It shows compliance with the requirement in part 15.249 (d).

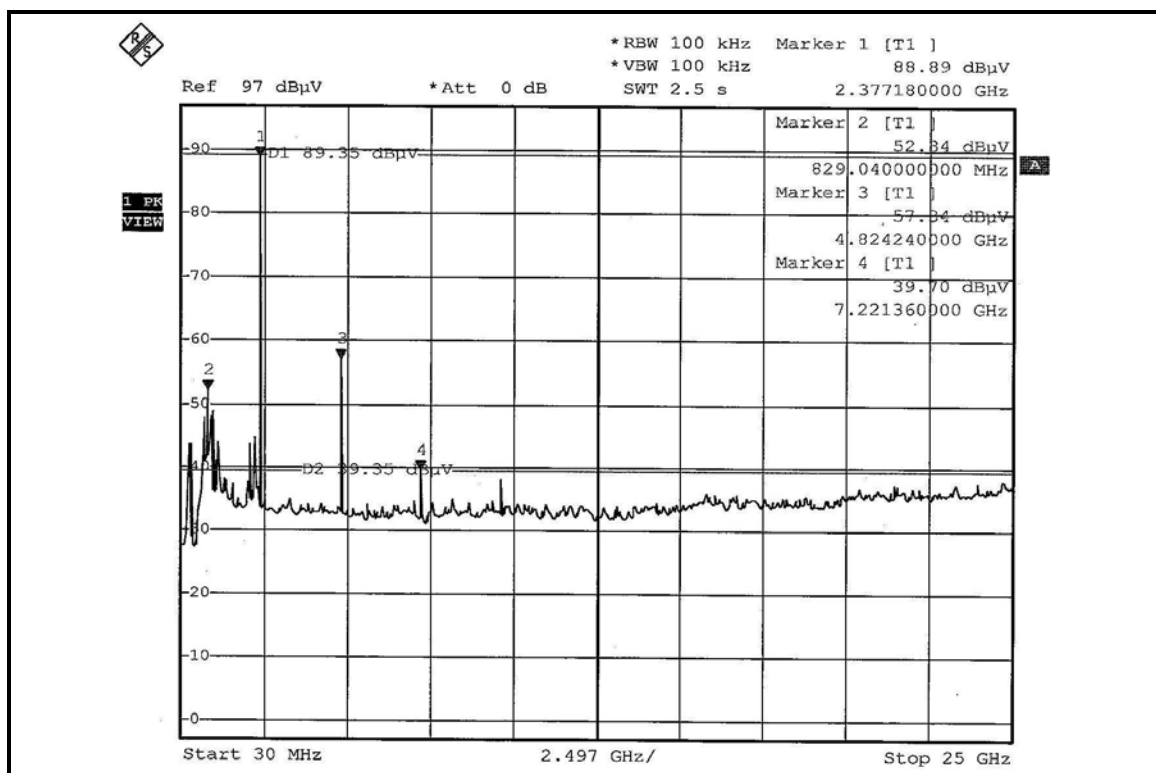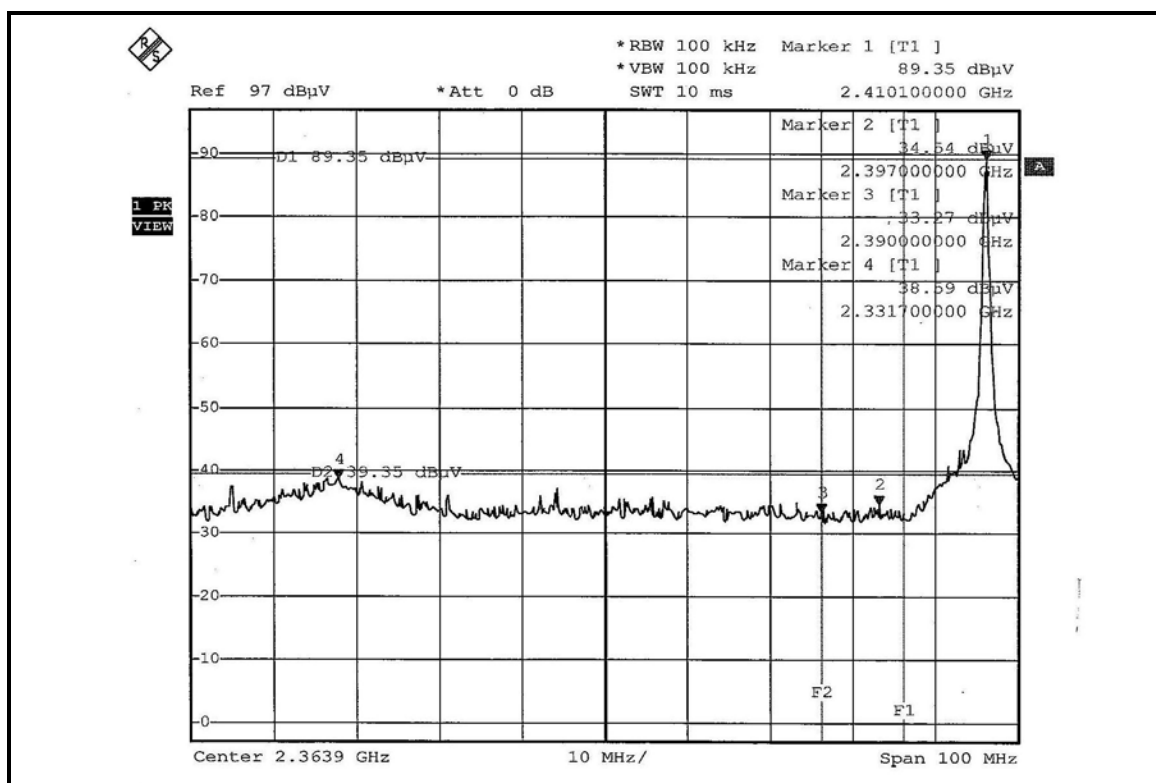

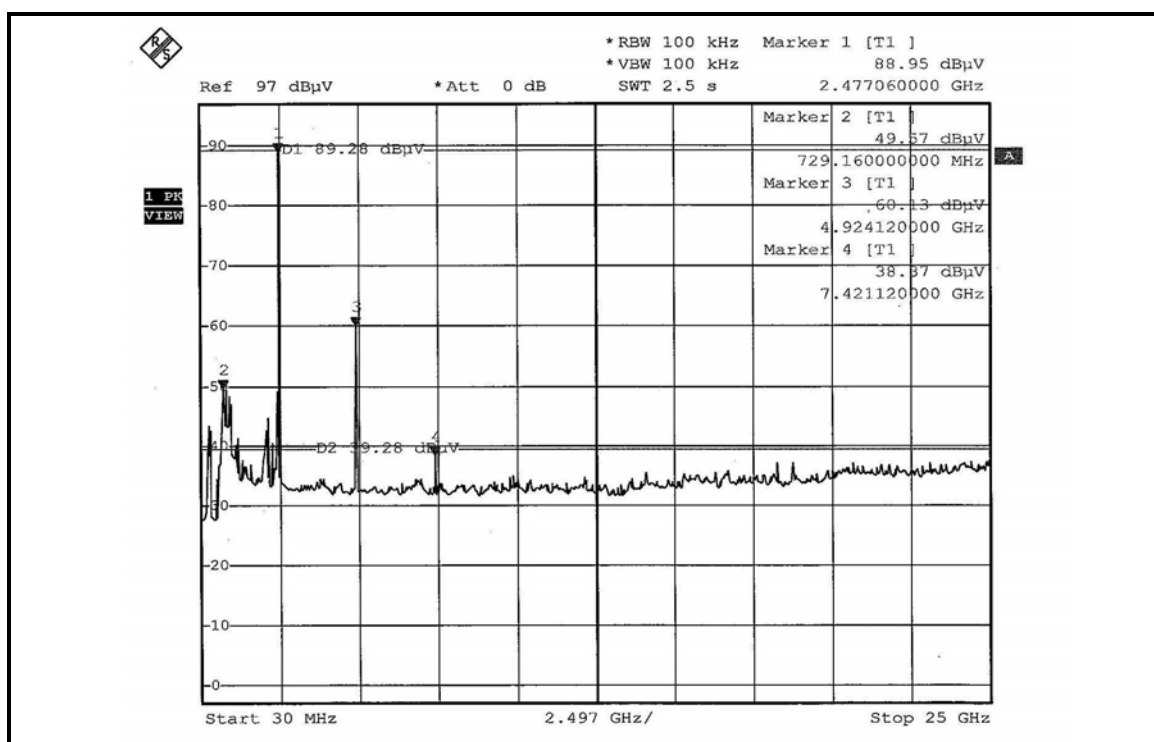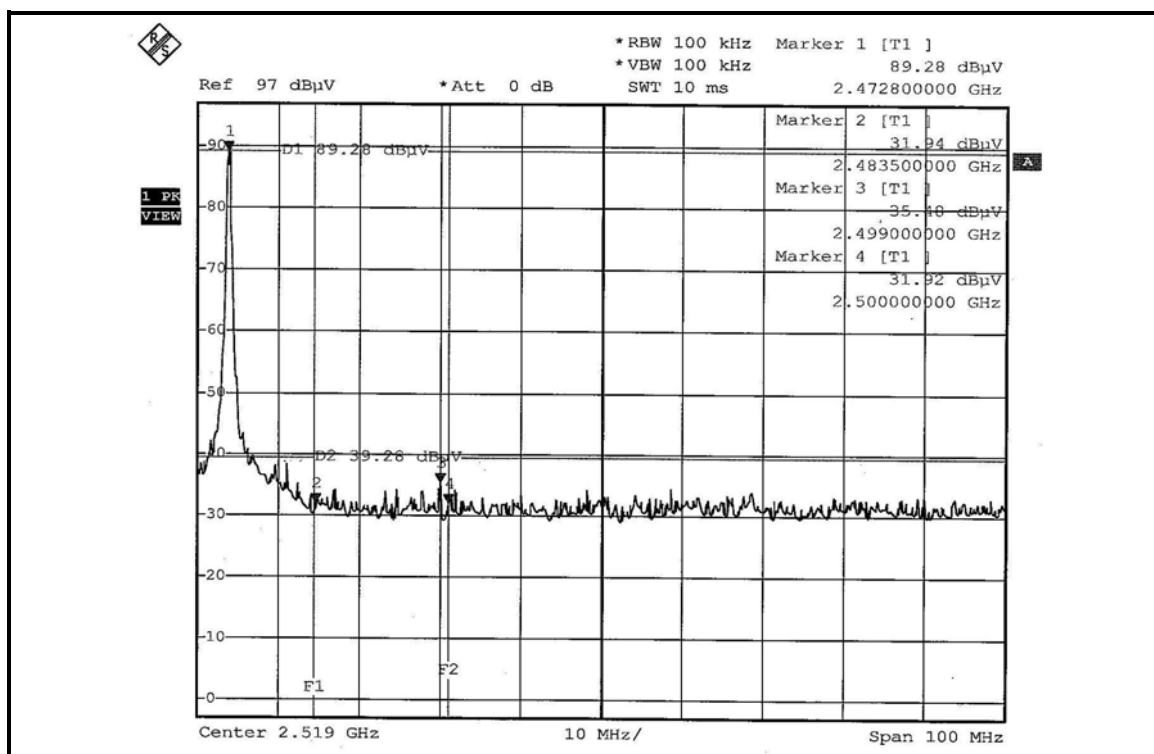

## 5. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, NCC
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

### **Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

### **Hsin Chu EMC/RF Lab**

Tel: 886-3-5935343

Fax: 886-3-5935342

### **Hwa Ya EMC/RF/Safety Telecom Lab**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also

## **APPENDIX-A**

### **MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.