

FCC - TEST REPORT

Report Number : **68.950.23.0580.01** Date of Issue: **2024-05-17**

Model : **DTX10, DT10, DT10-B, DT10-B3, DT10-U, DT20, DT20-B, DT30, DT40, DT50, DT60, DT70, DT80, DT90, DT100, D110, D110S, DT11, LTM2M, LTM2X, XTape 1, XTape 2, XTape 3, XTape 4, XTape 5, XTape 6**

Product Type : **Laser Distance Meter**

Applicant : **Shenzhen Mileseey Technology Co., Ltd.**

Address : **No.3601 Block A, Tanglang Town Plaza West, Fuguang
Community, Taoyuan Street, Nanshan District, 518500 Shenzhen,
PEOPLE'S REPUBLIC OF CHINA**

Manufacturer : **Shenzhen Mileseey Technology Co., Ltd.**

Address : **No.3601 Block A, Tanglang Town Plaza West, Fuguang
Community, Taoyuan Street, Nanshan District, 518500 Shenzhen,
PEOPLE'S REPUBLIC OF CHINA**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **31**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation chapter A-3.4.

1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups	8
7.1	Radiated test setups	8
7.2	Conducted RF test setups	8
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted Output Power	10
9.2	6 dB Bandwidth.....	12
9.3	Power spectral density.....	14
9.4	Spurious RF conducted emissions	16
9.5	Band edge testing.....	21
9.6	Spurious radiated emissions for transmitter	23
10	Test Equipment List.....	30
11	System Measurement Uncertainty	31

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

3 Description of the Equipment Under Test

Product:	Laser Distance Meter
Model No.:	DTX10, DT10, DT10-B, DT10-B3, DT10-U, DT20, DT20-B, DT30, DT40, DT50, DT60, DT70, DT80, DT90, DT100, D110, D110S, DT11, LTM2M, LTM2X, XTape 1, XTape 2, XTape 3, XTape 4, XTape 5, XTape 6
Model difference:	<p>All models are identical in technical construction including circuit diagram, PCB layout, components and component layout, the differences lies only in the color and marketing purpose of different models.</p> <p>So all the tests were applied on DTX10, other models deemed to fulfill the requirement without further testing.</p>
FCC ID:	2AEOGDTX10
Options and accessories:	NIL
Ratings:	7.3VDC, 2600mAh supplied by rechargeable Li-ion battery, Model: FL-260
RF Transmission Frequency:	2402MHz-2480MHz (for BLE-1Mbps)
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	0.2dBi
Description of the EUT:	The EUT is a Laser Distance Meter, supports BLE-1Mbps function, operates at 2402 – 2480MHz.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Test Site	Test Result			Test Environment
			Pass	Fail	N/A	
§15.207	Conducted emission AC power port	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	---
§15.247 (b) (3)	Conducted peak output power	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 23.2°C H: 48.3%
§15.247(a)(2)	6dB bandwidth	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 23.2°C H: 48.3%
§15.247(e)	Power spectral density	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 23.2°C H: 48.3%
§15.247(d)	Spurious RF conducted emissions	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 23.2°C H: 48.3%
§15.247(d)	Band edge	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 23.2°C H: 48.3%
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	T: 23.5°C H: 47.3%
§15.203	Antenna requirement	See note 2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--

Note 1: N/A=Not Applicable. The product was powered by a rechargeable Li-ion battery.

Note 2: The EUT use a PCB antenna, which gain of antenna is 0.2dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

Note 3: T=Temperature, H=Humidity

6 General Remarks

This submittal(s) (test report) is intended for FCC ID: 2AEOGDTX10 complies with Section 15.205, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

SUMMARY:

All tests according to the regulations cited on page 5 were:

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2023-06-13

Testing Start Date: 2023-06-13

Testing End Date: 2023-06-30

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch –

Reviewed by:


Prepared by:

Tested by:


John Zhi
Project Manager





Sanvin Zheng
Project Engineer


Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


9kHz - 30MHz

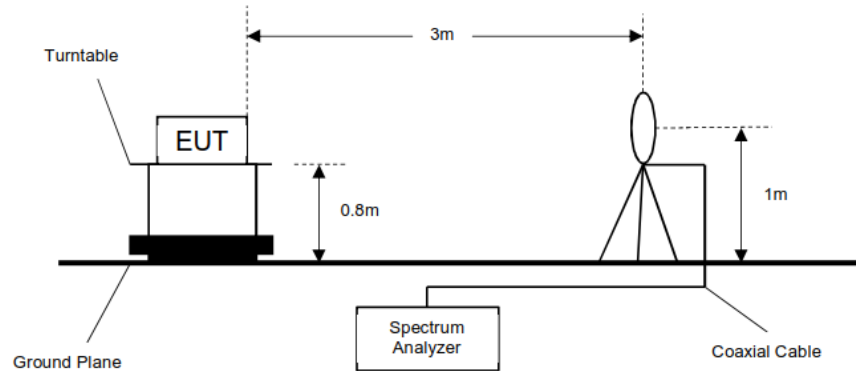


Below 1GHz

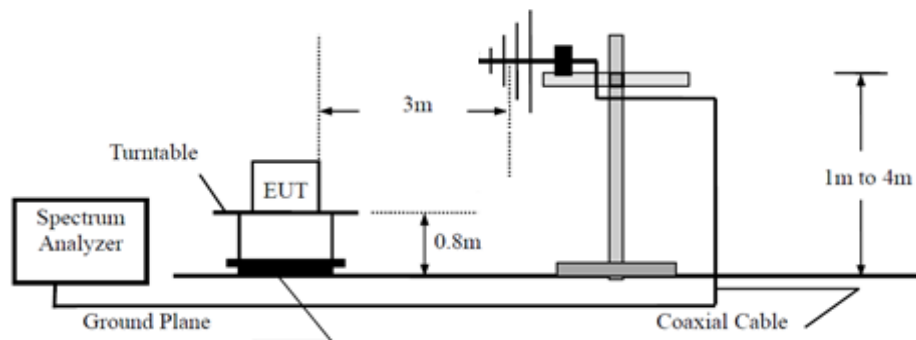

Above 1GHz

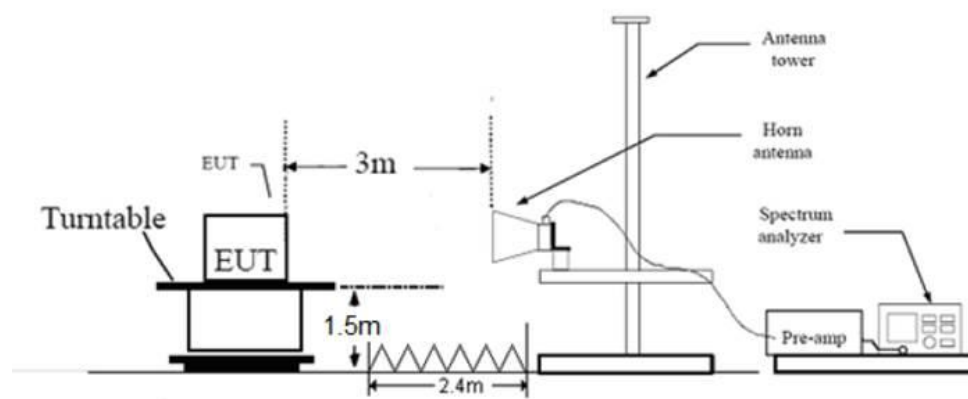

7.2 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	REMARK
Notebook	LENOVO	X220	---

Test software information:

Test Software Version	BK32xx RF Test_V1.8.2	
Modulation	Setting TX Power	Packet Type
GFSK	0	Pn9

The system was configured to non-hopping mode, testing channel 0, 19, 39.

9 Technical Requirement

9.1 Conducted Output Power

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test,
RBW > the 6dB bandwidth of the emission being measured, VBW \geq 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limit


According to §15.247 (b) (3), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30

Test Results


Test Mode	Antenna	Channel	Result [dBm]	Limit [dBm]	Verdict
BLE	Ant1	2402	-6.15	≤ 30	PASS
		2440	-6.14	≤ 30	PASS
		2480	-6.70	≤ 30	PASS

BLE_Ant1_2402

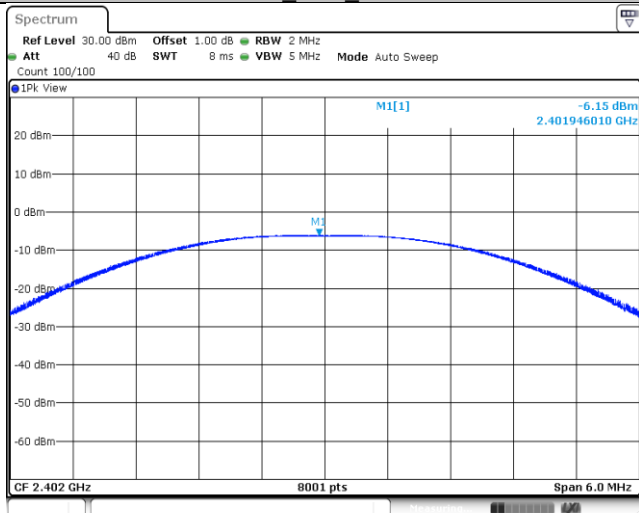


Date: 25 JUN 2023 11:24:27

BLE_Ant1_2440

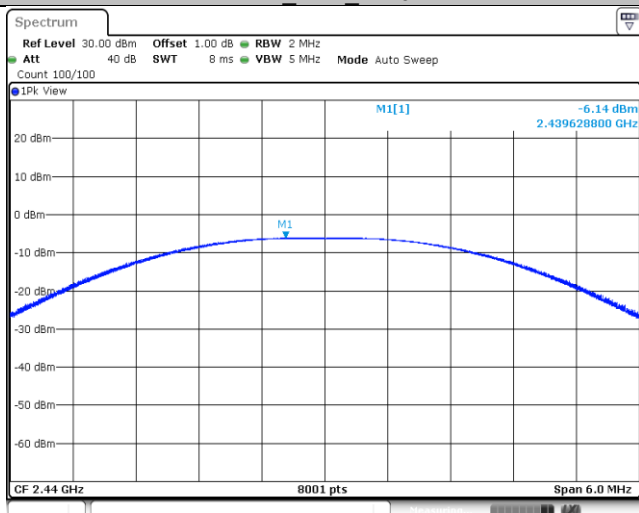

Date: 25 JUN 2023 11:25:58

BLE_Ant1_2480

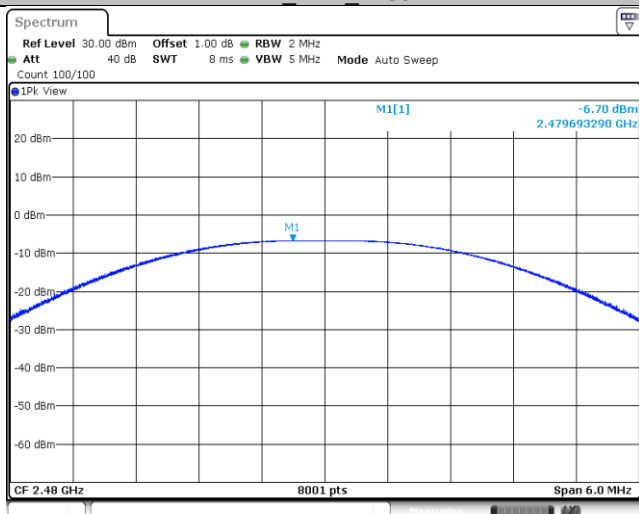

Date: 25 JUN 2023 11:27:27

9.2 6 dB Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=1% to 5% of the actual occupied, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit


6dB bandwidth Limit [kHz]

≥ 500

Test result for 6 dB Bandwidth


Test Mode	Antenna	Channel	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE	Ant1	2402	0.788	2401.588	2402.376	0.5	PASS
		2440	0.796	2439.588	2440.384	0.5	PASS
		2480	0.800	2479.584	2480.384	0.5	PASS

BLE_Ant1_2402

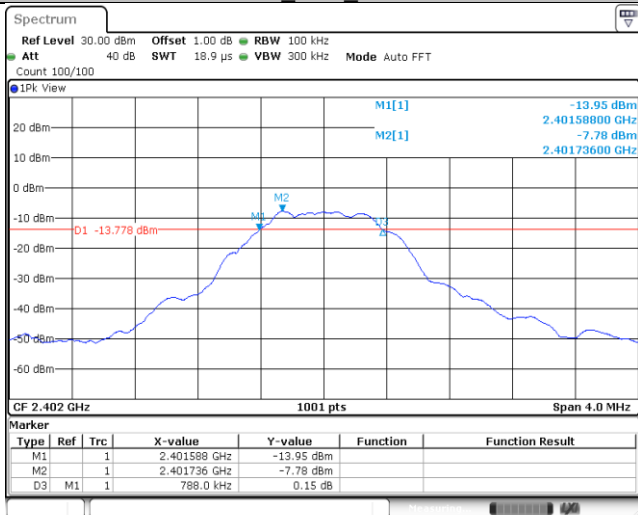


Date: 25 JUN 2023 11:24:09

BLE_Ant1_2440

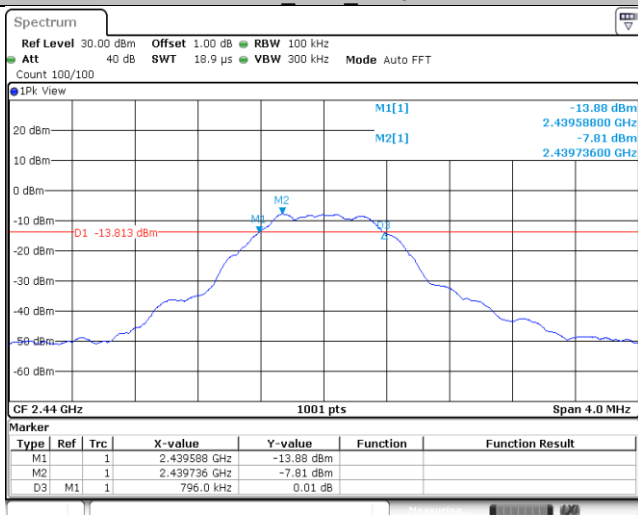

Date: 25 JUN 2023 11:25:41

BLE_Ant1_2480

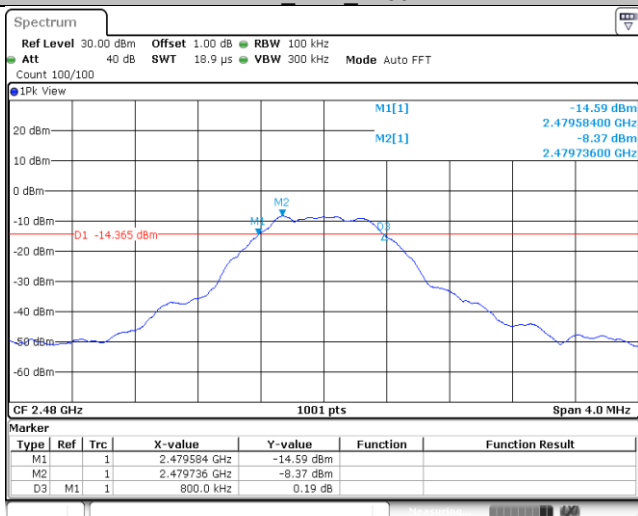

Date: 25 JUN 2023 11:27:10

9.3 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW \geq 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3kHz]

≤ 8

Test Results


Test Mode	Antenna	Channel	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE	Ant1	2402	-22.82	≤ 8	PASS
		2440	-22.60	≤ 8	PASS
		2480	-23.37	≤ 8	PASS

BLE_Ant1_2402

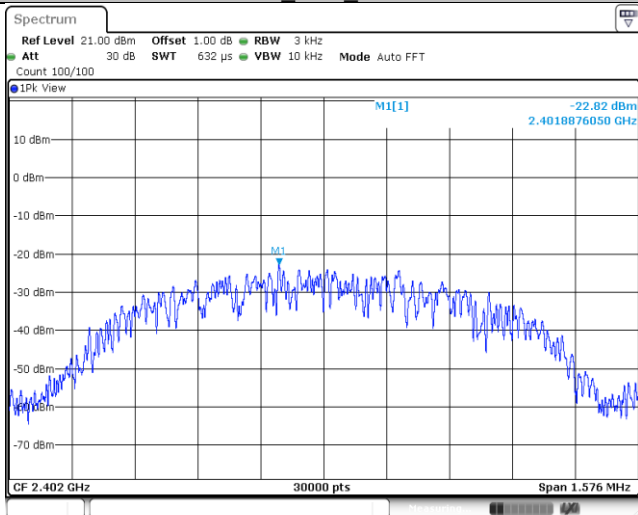


Date: 25 JUN 2023 11:24:32

BLE_Ant1_2440

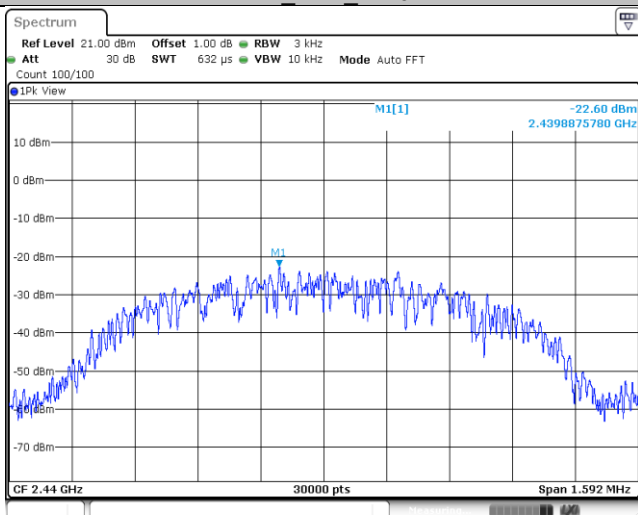

Date: 25 JUN 2023 11:26:04

BLE_Ant1_2480

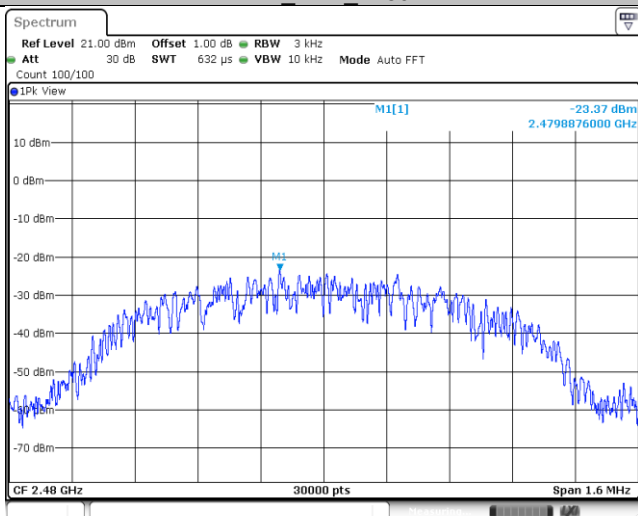

Date: 25 JUN 2023 11:27:33

9.4 Spurious RF conducted emissions

Test Method




1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.


Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test Result


Test Mode	Antenna	Channel	Freq. Range [MHz]	Ref. Level	Result [dBm]	Limit [dBm]	Verdict
BLE	Ant1	2402	Reference	-7.94	-7.94	---	PASS
			30~1000	30~1000	-68.16	<=-27.94	PASS
			1000~26500	1000~26500	-52.62	<=-27.94	PASS
		2440	Reference	-7.74	-7.74	---	PASS
			30~1000	30~1000	-68.4	<=-27.74	PASS
			1000~26500	1000~26500	-52.49	<=-27.74	PASS
		2480	Reference	-8.50	-8.50	---	PASS
			30~1000	30~1000	-68.05	<=-28.50	PASS
			1000~26500	1000~26500	-52.85	<=-28.50	PASS

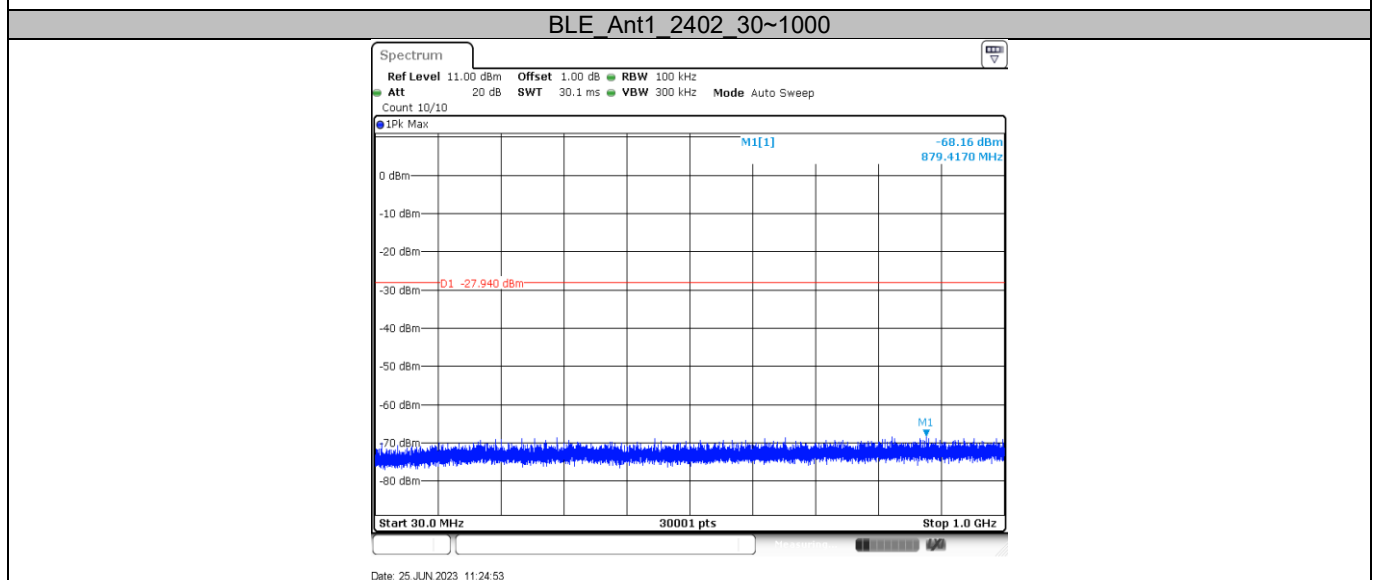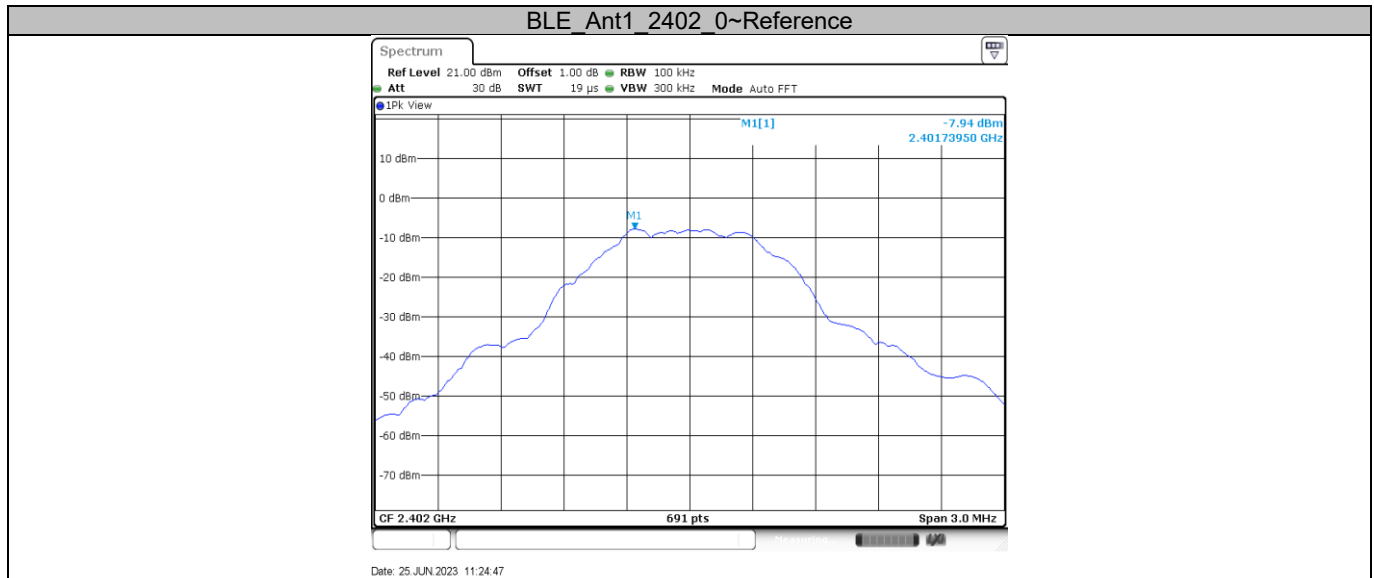

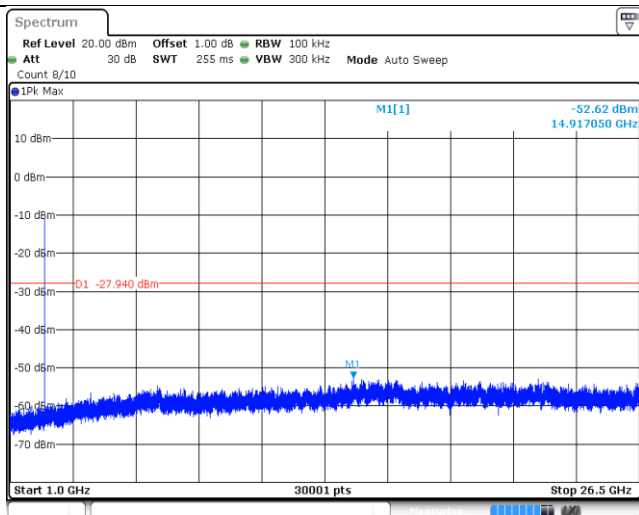


Date: 25 JUN 2023 11:25:01

BLE_Ant1_2440_0~Reference

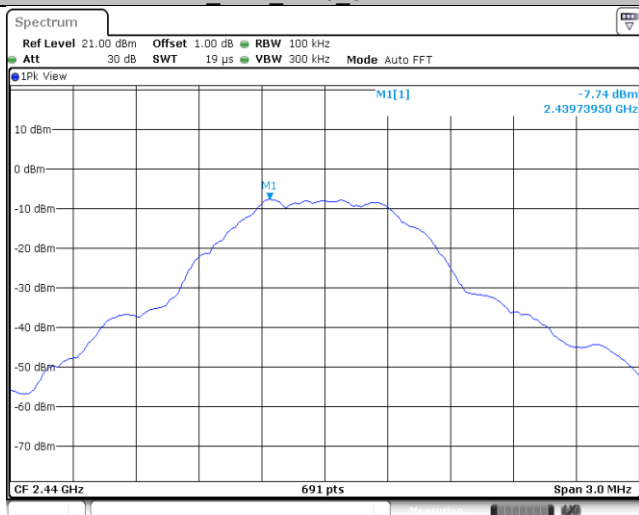


Date: 25 JUN 2023 11:26:10

BLE_Ant1_2440_30~1000

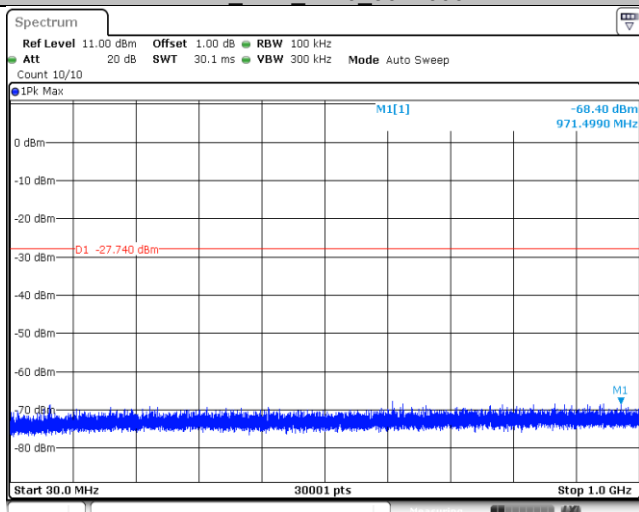


Date: 25 JUN 2023 11:26:16

BLE_Ant1_2440_1000~26500

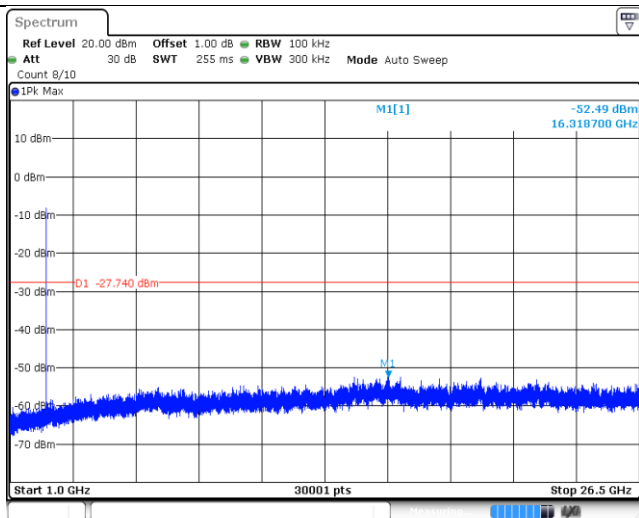


Date: 25 JUN 2023 11:26:23

BLE_Ant1_2480_0~Reference

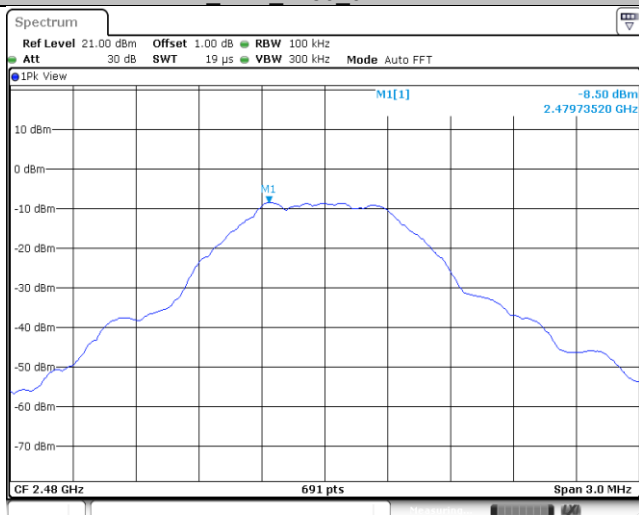


Date: 25 JUN 2023 11:27:47

BLE_Ant1_2480_30~1000

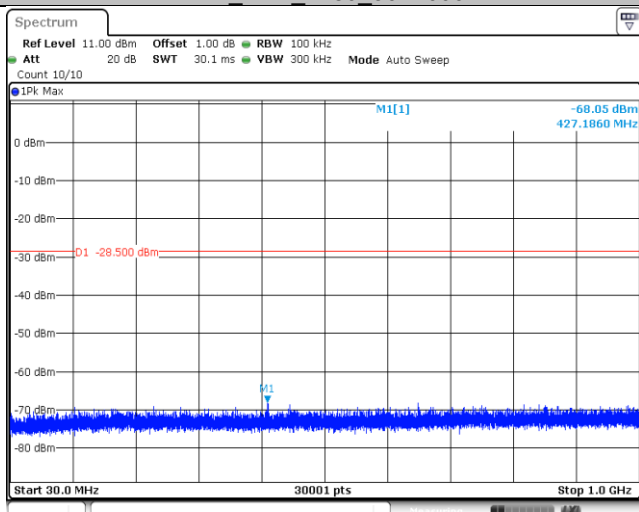

Date: 25 JUN 2023 11:27:53

BLE_Ant1_2480_1000~26500

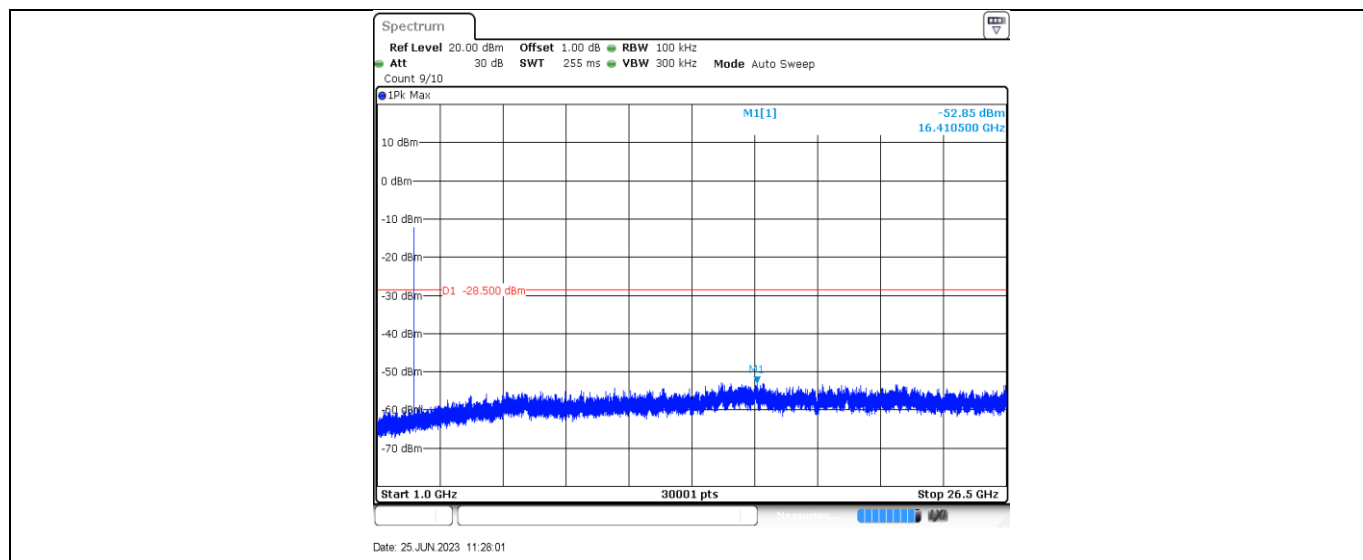

9.5 Band edge testing

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result

Test Mode	Antenna	Ch Name	Channel [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE	Ant1	Low	2402	-8.39	-57.11	≤ -28.39	PASS
		High	2480	-8.50	-57.71	≤ -28.50	PASS

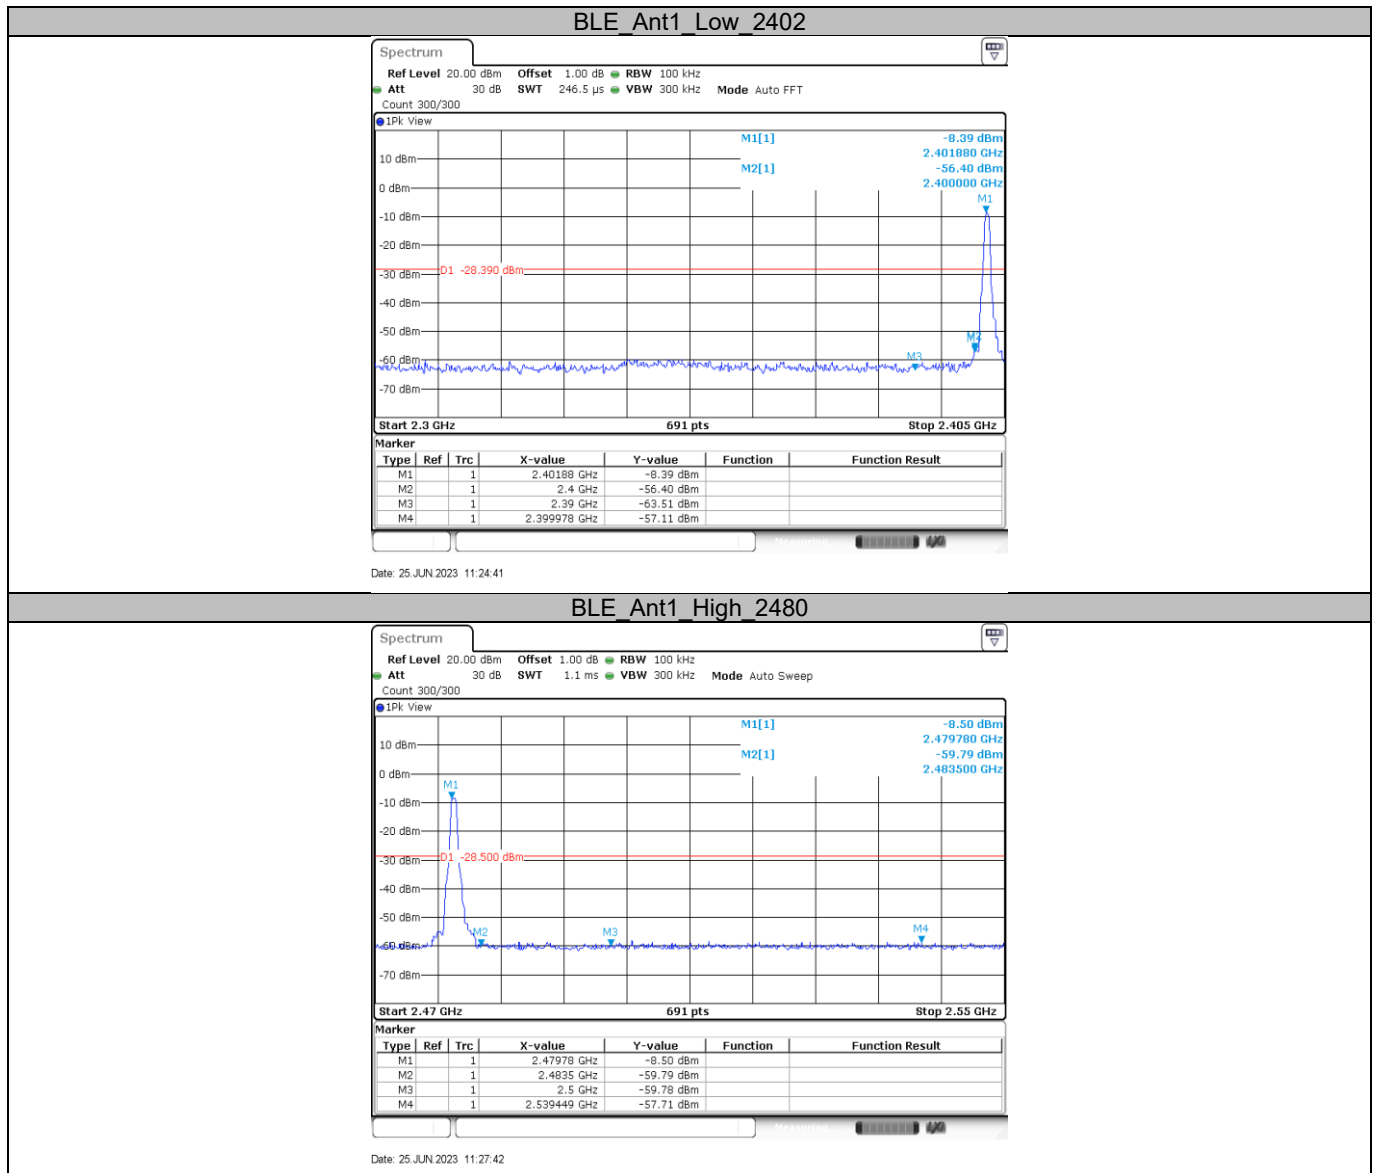

9.6 Spurious radiated emissions for transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 3) Procedures for average unwanted emissions measurements above 1000 MHz
 - a) RBW = 1MHz.
 - b) VBW \ [3 × RBW].
 - c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission(AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

Frequency MHz	Field Strength $\mu\text{V/m}$	Field Strength $\text{dB}\mu\text{V/m}$	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 300\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(300\text{m}/3\text{m})$ (Below 30MHz)


Note 2: Limit $3\text{m}(\text{dB}\mu\text{V/m}) = \text{Limit } 30\text{m}(\text{dB}\mu\text{V/m}) + 40\text{Log}(30\text{m}/3\text{m})$ (Below 30MHz)

Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

Emission below 1GHz

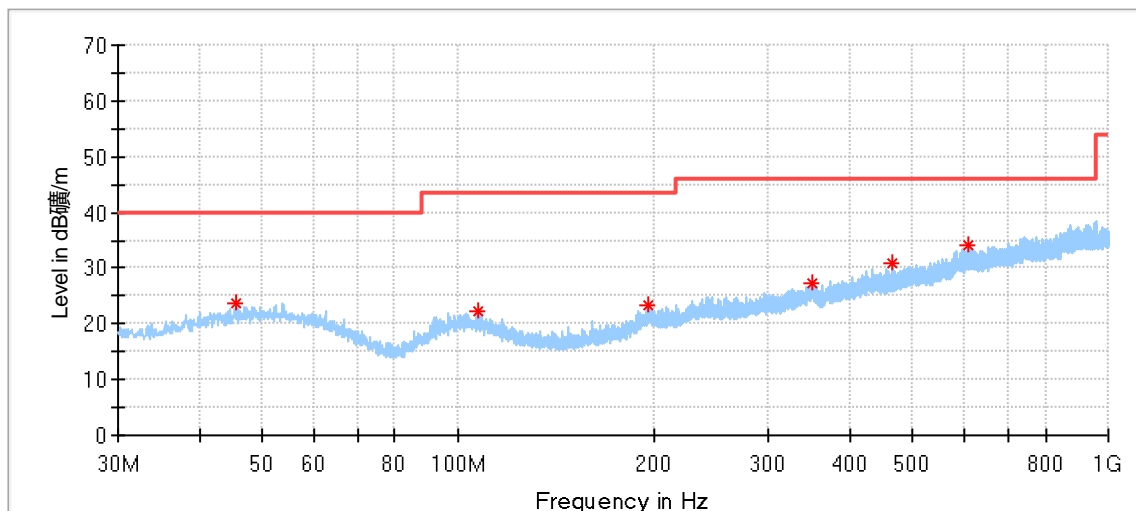


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.520000	23.53	40.00	16.47	200.0	H	219.0	17.78
107.600000	22.36	43.50	21.14	100.0	H	65.0	16.03
196.247222	23.39	43.50	20.11	100.0	H	220.0	16.54
349.399444	27.45	46.00	18.55	100.0	H	355.0	20.44
464.290556	30.79	46.00	15.21	100.0	H	334.0	21.87
607.419444	34.02	46.00	11.98	200.0	H	182.0	25.37

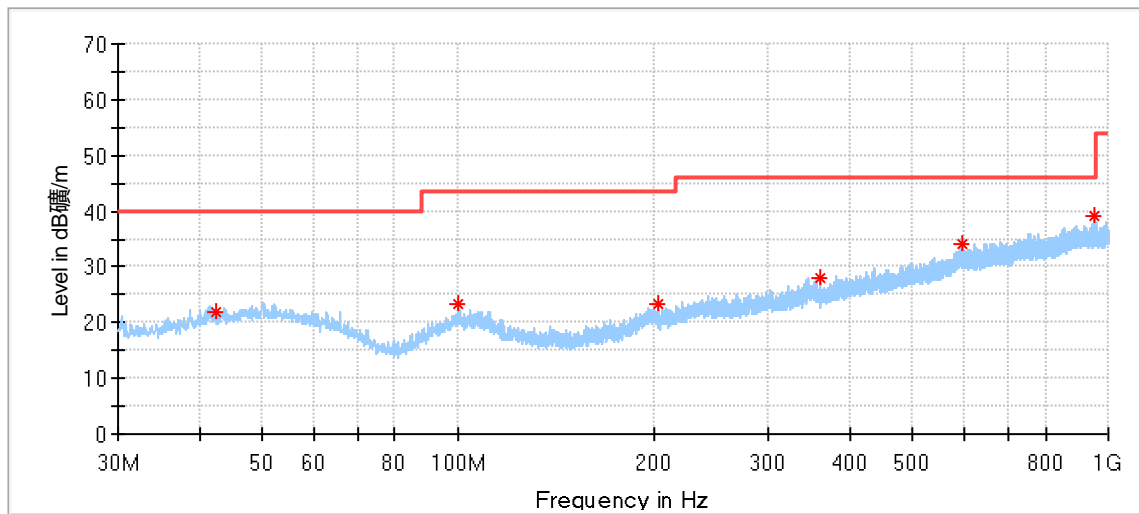


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.394444	22.06	40.00	17.94	200.0	V	356.0	17.10
99.786111	23.18	43.50	20.32	100.0	V	56.0	16.09
202.767778	23.21	43.50	20.29	100.0	V	271.0	15.93
360.716111	28.12	46.00	17.88	200.0	V	32.0	19.64
594.540000	34.24	46.00	11.76	200.0	V	195.0	25.08
953.332222	39.27	46.00	6.73	200.0	V	9.0	28.95

Emission above 1GHz

BLE_1Mbps_Low Channel: 2402MHz

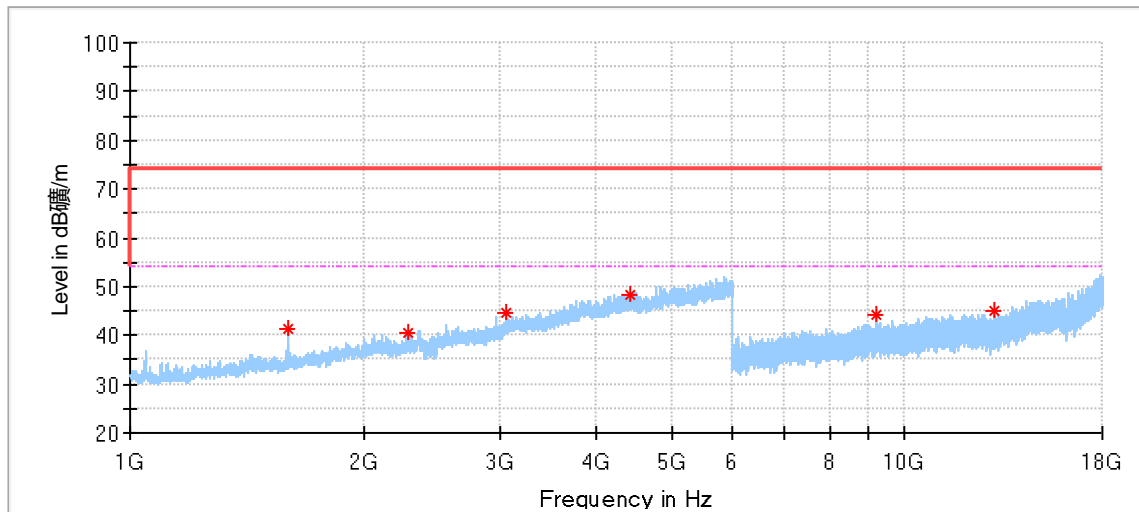


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1596.500000	41.15	74.00	32.85	150.0	H	80.0	-9.45
2292.500000	40.46	74.00	33.54	150.0	H	306.0	-5.53
3063.000000	44.66	74.00	29.34	150.0	H	19.0	-0.90
4411.000000	48.41	74.00	25.59	150.0	H	296.0	4.52
9192.000000	44.01	74.00	29.99	150.0	H	196.0	12.57
13028.500000	45.05	74.00	28.95	150.0	H	315.0	15.23

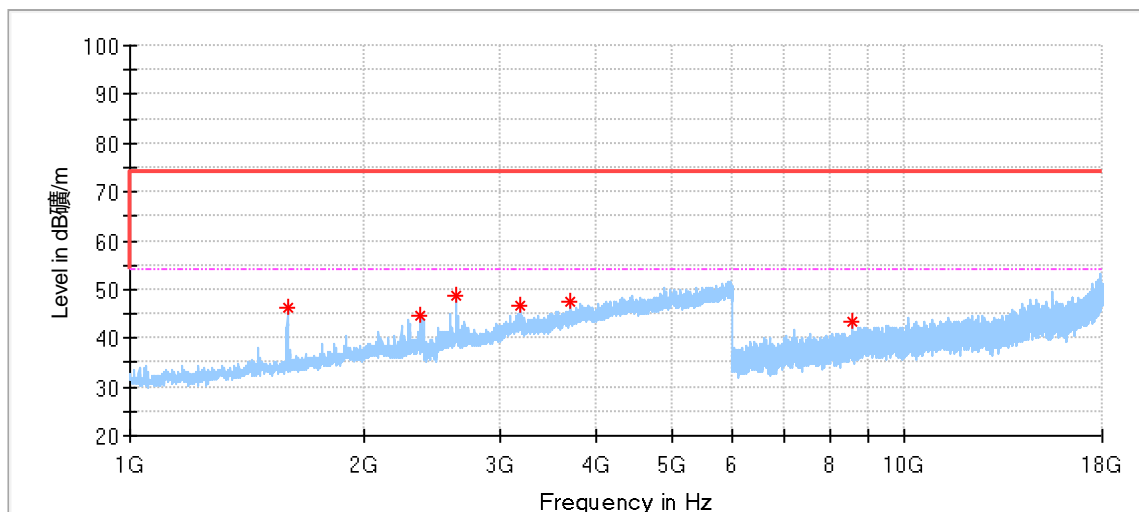


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1595.500000	46.33	74.00	27.67	150.0	V	235.0	-9.46
2366.000000	44.80	74.00	29.20	150.0	V	276.0	-4.92
2635.000000	48.85	74.00	25.15	150.0	V	317.0	-3.39
3189.000000	46.80	74.00	27.20	150.0	V	348.0	-0.35
3697.500000	47.39	74.00	26.61	150.0	V	256.0	1.76
8551.500000	43.53	74.00	30.47	150.0	V	4.0	11.26

BLE_1Mbps_Middle Channel: 2440MHz

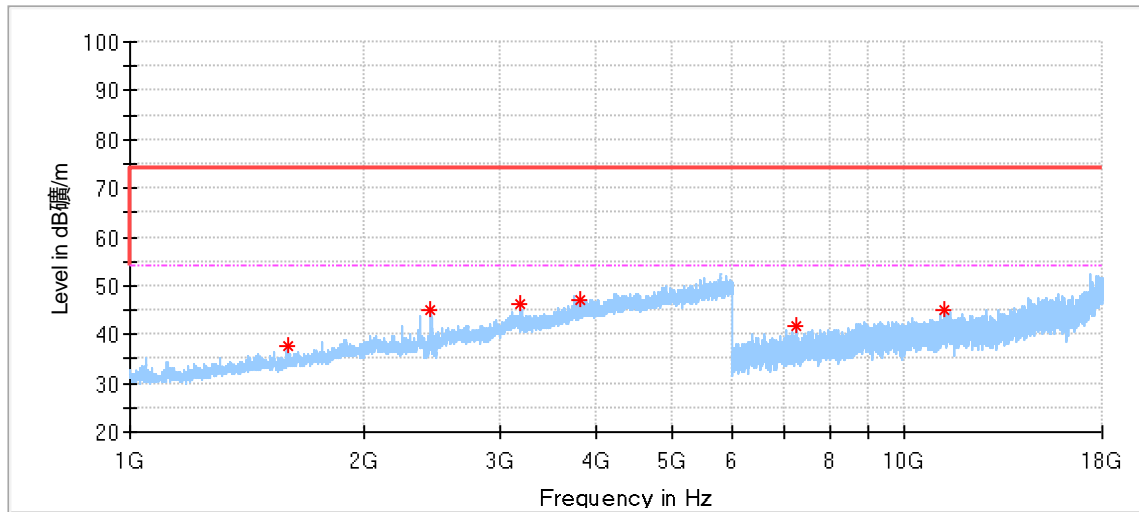


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1595.000000	37.64	74.00	36.36	150.0	H	203.0	-9.46
2447.000000	45.05	74.00	28.95	150.0	H	101.0	-4.41
3188.000000	46.09	74.00	27.91	150.0	H	275.0	-0.35
3822.500000	47.05	74.00	26.95	150.0	H	3.0	2.62
7233.500000	41.59	74.00	32.41	150.0	H	354.0	9.03
11258.500000	45.10	74.00	28.90	150.0	H	73.0	14.37

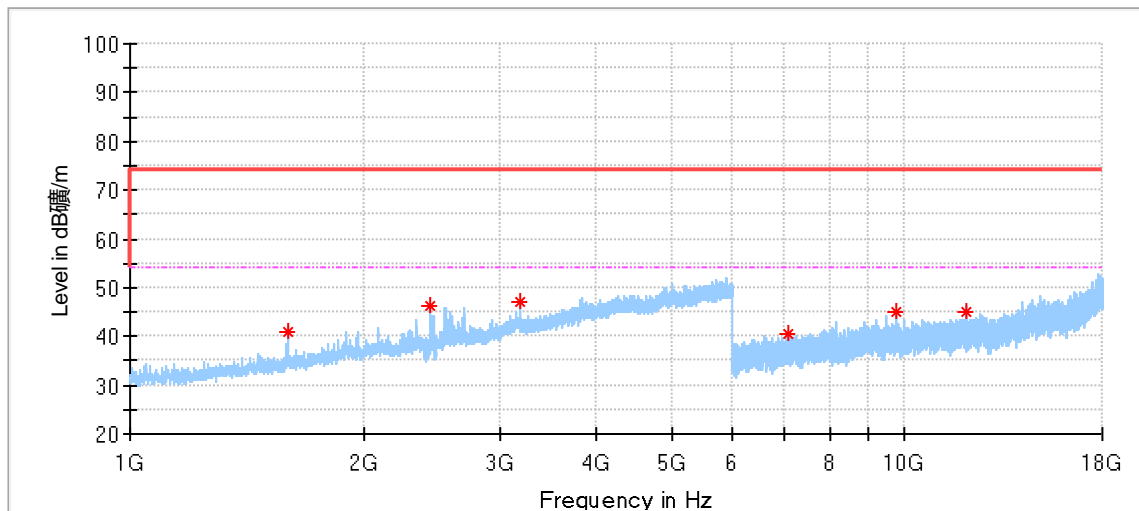


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1595.500000	40.84	74.00	33.16	150.0	V	234.0	-9.46
2446.000000	46.16	74.00	27.84	150.0	V	3.0	-4.42
3193.000000	47.26	74.00	26.74	150.0	V	0.0	-0.36
7062.500000	40.57	74.00	33.43	150.0	V	253.0	8.57
9781.500000	44.99	74.00	29.01	150.0	V	49.0	12.77
12000.000000	45.02	74.00	28.98	150.0	V	292.0	15.30

BLE_1Mbps_High Channel: 2480MHz

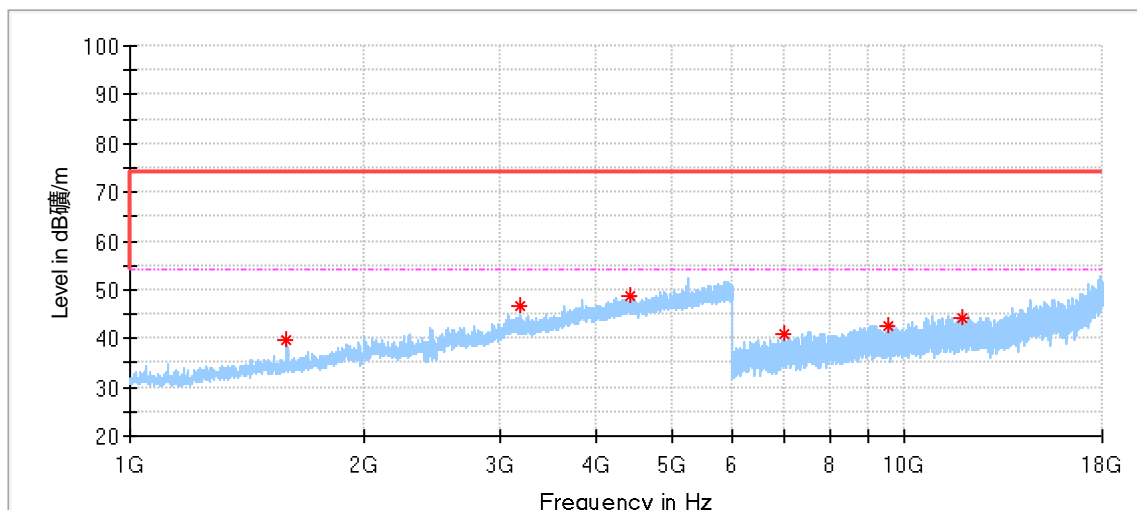

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1594.000000	39.65	74.00	34.35	150.0	H	162.0	-9.47
3189.500000	46.61	74.00	27.39	150.0	H	306.0	-0.35
4433.500000	48.68	74.00	25.32	150.0	H	316.0	4.50
6980.500000	40.73	74.00	33.27	150.0	H	27.0	8.30
9512.000000	42.65	74.00	31.35	150.0	H	4.0	12.83
11866.000000	44.01	74.00	29.99	150.0	H	275.0	14.94

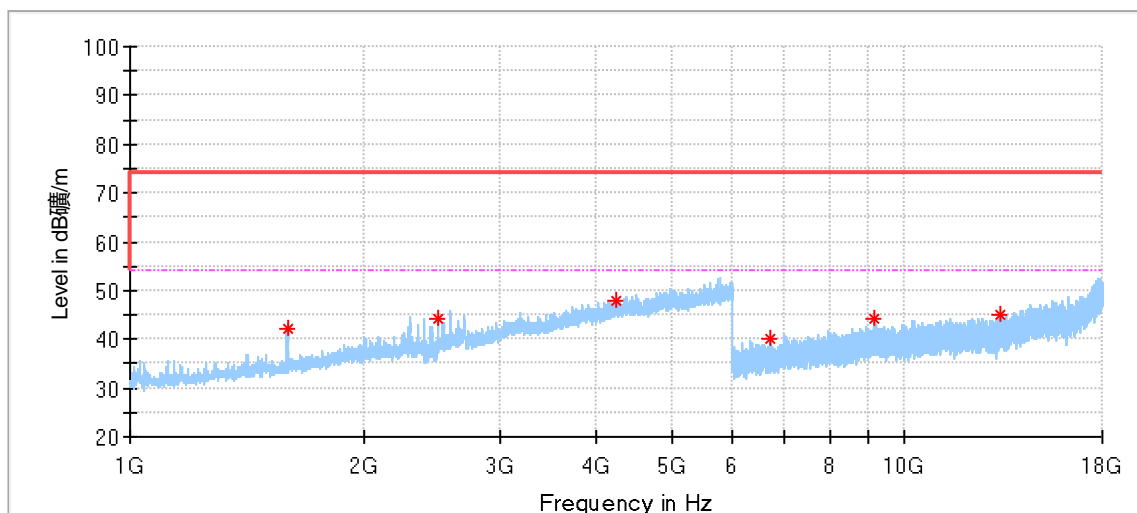

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1598.000000	41.96	74.00	32.04	150.0	V	162.0	-9.45
2496.500000	44.25	74.00	29.75	150.0	V	285.0	-4.46
4237.500000	48.03	74.00	25.97	150.0	V	193.0	4.00
6708.500000	39.96	74.00	34.04	150.0	V	70.0	7.79
9110.500000	44.37	74.00	29.63	150.0	V	196.0	12.39
13328.000000	45.01	74.00	28.99	150.0	V	112.0	15.50

Remark:

- (1) Data of measurement within frequency ranges 9kHz-30MHz and 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report,
- (2) MaxPeak= Reading Level + Correction Factor
- (3) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

Radiated Emission Test, SAC-3 #1

Description	Manufacturer	Model no.	Equipment ID	Serial no.	Cal interval (year)	Cal. due date
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2024-5-20
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2023-8-7
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test, SAC-3 #2

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2024-5-20
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2024-3-5
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2024-4-26
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2024-5-19
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2023-7-27
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2023-7-27
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2024-5-19
Cable	JUNFLON	MWX221	68-4-90-19-006-A20	----	----	----
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2024-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

RF Conducted Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	2024-5-19
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157W	68-4-93-14-003	101226/100929	2024-5-20
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	2025-10-15

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.70dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.63dB; Vertical: 4.78dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.38dB; Vertical: 5.38dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) above 18000MHz	Horizontal: 5.29dB; Vertical: 5.29dB
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB Frequency test involved: 0.6×10 ⁻⁸ or 1%

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.

--- END OF REPORT---