
文件名称: Cleaner S20上下水版-SMS-EN-2502	设计师:LBY	完成时间:2025/02/18
版本号: V1.0-2502	成品尺寸:140mm×200mm	
材质和工艺:封面 157g铜版纸+内页80g书写纸+1专+4C+封面过哑胶+骑马钉 PT 2034C		
更改内容:		
备注:蓝色线框不印刷,此页表格不印刷		



SwitchBot Floor Cleaning Robot S20 with Auto-Fill & Drain System User Manual



Please read this user manual carefully before using your device.

www.switch-bot.com v1.0-2502

Thank you for choosing SwitchBot!

This manual will guide you through a comprehensive understanding and guick installation of this product, and provide important information on product usage and maintenance to help you achieve the best product experience.

If you have any questions during use, please call the service hotline or contact the official email. SwitchBot technical support experts will answer your questions.

Setup and Troubleshooting: support.switch-bot.com Customer Support: support@switch-bot.com

Scannen Sie den QR-Code, um die deutsche Version unseres Benutzerhandbuchs zu erhalten. Scannez le code QR pour obtenir notre manuel d'utilisation en version française. Escanee el código QR para obtener la versión en español de nuestro manual de usuario. Scan de QR code voor de Nederlandse versie van onze gebruikershandleiding. Scansionate il codice QR per ottenere la versione italiana del nostro manuale d'uso. https://www.switch-bot.com/pages/switchbot-user-manual



User Manual



Scan the QR code to get started using your product.

Contents

Product Overview	Care and Maintenance
List of Components 01	Daily Maintenance (Robot) 12
LED Indicator Light Status 06	Daily Maintenance (Base Station) 21
Preparing for Use	Troubleshooting
Preparing for Use Setting Up the Base Station and Robot 06	Troubleshooting Common Issues 24

Instructions for Use


Mapping 10	
Starting Your Robot 10	
Switching Mode 11	
Pausing Your Robot 11	
Recharging 11	
Exchanging Water 11	
Hibernation 11	
Do Not Disturb Mode 11	
Child Lock 12	
Restoring to Factory Settings 12	
Jpgrading Firmware 12	

Warranty Disclaim Contact 8


Warranty & Support

/-		27
er	rs	28
<u>s</u>	Support	28

Robot Top View Product Overview List of Components Power Switch "l" - power on **Status Indicator** "**O**" - power off • White always on: Normal SwitchBo • Pulsing white: Charging 0 O Wall Follow Sensor • Flashing orange: Error or low battery LDS Laser Radar Bumper **Clean Button** • Press to start or pause cleaning Home Button Press to return to Base Station • • Mode Switch Button • Press to switch the cleaning mode Dust Inlet Auto-Drain Port Note: Press any button to stop the robot during cleaning or docking. Auto-Fill Port

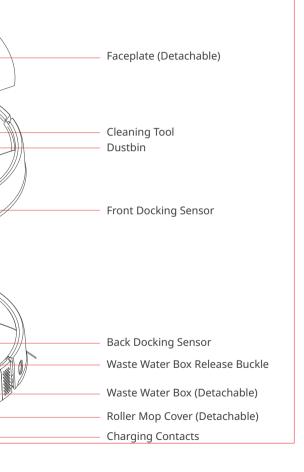



Robot Bottom View

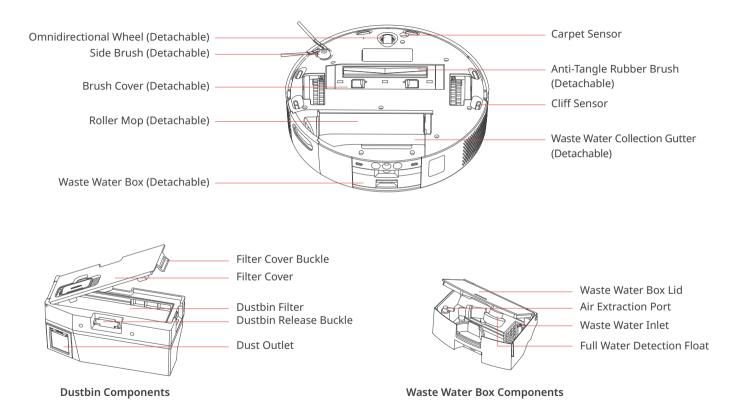

Base Sation

Front View

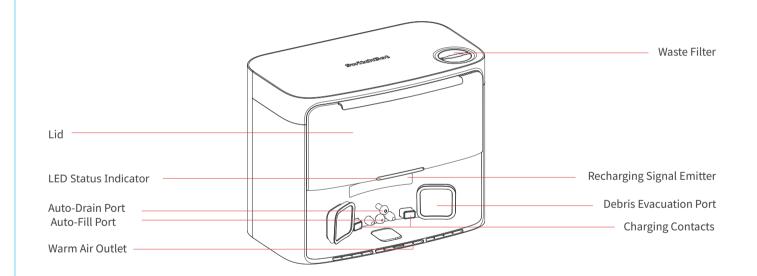

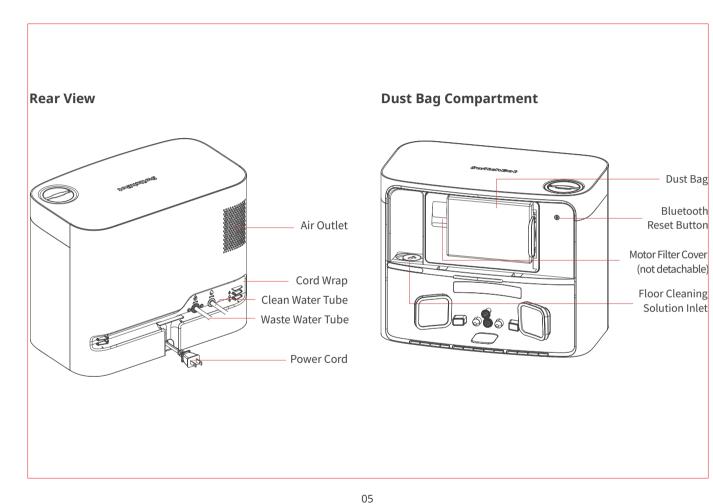

LED Indicator Light			
Device	Indicator Light Status	Description	
	On in white	Operating	
	Pulsates in white	Charging	
Robot	Flashes fast in white	Upgrading firmware or configuring network	
	Flashes fast in orange	Error	
	Flashes slowly in orange	Realigning	
	On in white	Powered on	
Base Station	Flashes in white	Bluetooth pairing, docking, or Base Station about to operate.	
	On in orange	Error	

Setting Up the Base Station and Robot

Ensure you have everything listed on our Quick Guide.

signal.

2 Plug the station's power cord into an outlet.


Preparing for Use

1. Unpack and check package contents.

\square

2. Place your Base Station at a proper position.

OChoose a suitable location for your station with a strong Wi-Fi



Output Content of the second secon and attach it to the ground in front of the station.



Please note

• Organize the power cord. If left on the ground, it may be dragged by the robot, causing the station to move or disconnect from power.

• Place the station on a level indoor surface, away from open flames, heat sources, water, narrow spaces, or areas where the robot may fall.

• Placing the station on non-hard surfaces (such as carpets, mats, etc.) poses a risk of tipping over, and the robot may not be able to leave its station properly. • Do not place the station under direct sunlight or block its signal emitter area with any objects, as this may prevent the robot from returning automatically. • Please follow the maintenance instructions for the station and avoid using wet cloths or rinsing it with water.

3. Connect the Base Station to your home's plumbing system.

① Scan the OR code to watch the installation video. Follow the step-by-step instructions to select the appropriate installation method and accessories, then connect the station to your home's plumbing system.


2 Once connected, open the water valve to check the tube connections. When using the water exchange function for the first time, carefully inspect for any leaks to ensure proper installation.



How to install S20 Base Station with Auto-Fill & Drain System


4. Set up your robot.

• Remove the foam strips on both sides of your robot. Install the Side Brush, then power on.





When you hear a clicking sound. it means the Side Brush has been properly installed.




2 Remove the faceplate and turn on the Power Switch. "I" means powering on, and "O" means powering off.



3 Dock your robot to the station. You will hear a sound prompt when docked successfully.

Tips: Dock your robot for 30 minutes of charging before initial use.



5. Add your robot to the SwitchBot app.

- Scan the OR code to download our app. Register an account or directly log in if you already have one.
- **2** Tap the "+" icon located at the right-hand corner of the home page, select Add Device.
- SFollow the instructions to add your robot.

You will need:

- A smartphone or tablet using Bluetooth 4.2 or later.
- The latest version of our app, downloadable via the Apple App Store or Google Play Store.
- A SwitchBot account, you can register via our app or sign in to your account directly if you already have one.




iOS and Android system requirements: https://support.switch-bot.com/hc/en-us/articles/12567397397271



6. Add Floor Cleaning Solution.

- **1** Open the dust compartment and locate the rubber seal on the left side.
- 2 Pour 150 ml (5 fl oz) of SwitchBot Floor Cleaning Solution into the station.



A Please note

• Please use the official SwitchBot cleaning solution, with each bottle containing 150 ml (5 fl oz.) and a cap volume of 6 ml (0.2 fl oz).

• Do not use non-official cleaning agents, as they may cause corrosion and device damage. • When using with a SwitchBot Humidifier, do not add cleaning solution, as it may damage the device.

Decluttering

Before starting the robot, please check the floor and clean up any scattered items such as wires, socks, slippers, children's toys, etc. to improve the efficiency of the robot.

Clear the floor of hard or sharp objects (e.g., nails, glass), and move away items that are fragile, valuable, or potentially dangerous to avoid being caught, tangled, or knocked over by the robot, causing personal or property damage.






Before cleaning, please use a physical barrier to avoid areas that are hanging in the air or low, ensuring the safety and smooth operation of your robot.

Open the doors of the rooms to be cleaned, arrange the furniture neatly, and try to clear the largest cleaning space.

be cleaned.

09



Please avoid standing in front of your robot, doorways, or narrow passages in case your robot cannot detect the area to

Instructions for Use

Mapping

Before starting mapping, ensure your robot is docked and charged. Follow the in-app instructions to begin fast mapping. Once mapping is complete, the robot will automatically return to the station and save the map.

Tip: When using for the first-time, short press the () button, and your robot will start mapping while cleaning.

Starting Your Robot

Control your robot via our app or press the (0) button on the robot to start. Your robot will plan cleaning routes based on saved maps. For first-time use, your robot will automatically work on the Vacuum mode.



Please note

- To facilitate the normal water exchange of the robot, please do not move the Base Station during the cleaning and mopping process. If there is a door hiding the station, please keep the door open
- If the battery is low, please charge it before starting the cleaning task.
- If the battery is insufficient during the cleaning process, the robot will automatically dock to charge.
- When the robot is set to clean carpets, it will automatically raise the Roller Mop. You can choose to bypass carpets in our app.

Switching Mode

You can adjust the cleaning suction power and mopping water volume in the app based on the floor's dirt level. Or short press the 킂 button on your robot to switch between default cleaning modes.

Please note

rollina.

In Vacuum mode, the Roller Mon

will automatically raise and stop



Pausing Your Robot

Stop your robot via the app or by press any button on the robot. When paused, resume the previous cleaning task via the app or by pressing the 🔘 button.

Recharging

- After finishing a cleaning task, your robot will automatically dock to the Base Station to charge.
- When in standby mode, your robot will dock and charge after pressing the 🙆 button.
- By default, your robot will automatically resume interrupted cleaning tasks (e.g., due to low battery or new commands). If the battery level drops during a task, the robot will dock to recharge and resume the task once the battery reaches above 80%.

Please note

If the robot does not find the Base Station, it will automatically return to the starting position. Please manually dock it for charging.

Exchanging Water

- During a mopping task, your robot will automatically dock to drain waste water and clean water.
- 2 After completing a mopping or cleaning task, your robot will dock to empty dust, exchange water, deep clean and dry its Roller Mop, then start a recharging session.

Hibernation

If your robot is not operated for more than 10 minutes, it will automatically enter hibernation. Press any button to wake it up.

Please note

The robot will not enter hibernation while charging.

Child Lock

Upgrading Firmware

Do Not Disturb Mode

- The default setting for this mode is from 22:00 to 08:00, and you can modify or disable this via our app.
- During the Do Not Disturb period, device button lights will stay off, and your robot will not automatically resume cleaning or play voice prompts.

You can use the Child Lock function in our app to lock the robot buttons. You can unlock it via our app.

Restoring to Factory Settings

Press and hold the 🔘 + 🙆 + 🖨 Switch buttons simultaneously for 6 seconds to restore the robot to factory settings.

In order to improve user experience, we will regularly release firmware updates to introduce new functions and solve any software defects that may occur during usage. When a new firmware version is available, we will send an upgrade notification to your account via our app. When upgrading, please make sure your product has sufficient battery or stay powered on and make sure your smartphone is within range to prevent interference.

You're advised to enable Automatic Upgrades via the Firmware & Battery page of our app.

Care and Maintenance


Daily Maintenance (Robot)

To keep your robot and station running at peak performance, perform the procedures on the following pages.

Part	Care Frequency	Replacement Frequency
Front Caster Wheel	Clean as needed	,
Dustbin	cican as needed	/
Anti-Tangle Rubber Brush		6 to 12 months
Waste Water Collection Gutter	Once	6 to 12 months
Roller Mop	every 2 weeks	1 to 3 months
Dustbin Filter		3 to 6 months
Side Brush		5 to 6 months
Brush Frame		
Waste Filter (Base Station)	Monthly	6 to 12 months
Waste Water Box		
LDS Laser Radar		
Wall Follow Sensor		
Front Docking Sensor		
Back Docking Sensor	1	
Infrared Obstacle	1	
Avoidance Sensor		
Carpet Sensor		
Cliff Sensor		/
Charging Contacts		/
Debris Evacuation Port	Monthly	
Water Inlet		
Dust Inlet (Base Station)	1	
Recharging Signal Emitter (Base Station)		


Charging Contacts (Base Station)		
Auto-Fill Port & Auto-Drain Port		
Moisture-proof Pad		
Diatom Mud Mat		3 to 6 months
Floor Cleaning Solution	/	Add once every 1 to 3 months
Dust Bag	/	Replace every 1 to 3 months


Cleaning tools needed



Waste Water Box

• Remove the Waste Water Box from the robot and open the lid.




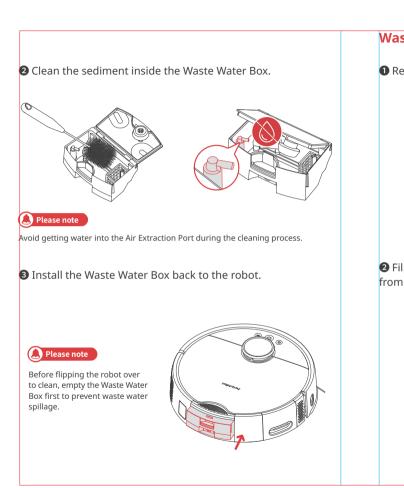

13

Waste Water Collection Gutter

1 Remove the Roller Mop from the robot.



Pilp the robot over, and lift the Waste Water Collection Gutter from its left end to remove.

