

TEST REPORT

Report No.: BCTC2103677008-2E

Applicant: mophie LLC

Product Name: mophie Universal Wireless Charging Hub

Model/Type Ref.: WRLS-CHG-HUB

Tested Date: 2021-03-26 to 2021-04-10

Issued Date: 2021-04-10


Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2ACWB-MOPHUB

Product Name: mophie Universal Wireless Charging Hub
Trademark: mophie
Model/Type Ref.: WRLS-CHG-HUB
Prepared For: mophie LLC
Address: 6244 Technology Ave. Kalamazoo, Michigan 49009 United States
Manufacturer: mophie LLC
Address: 6244 Technology Ave. Kalamazoo, Michigan 49009 United States
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2021-03-26
Sample tested Date: 2021-03-26 to 2021-04-10
Issue Date: 2021-04-10
Report No.: BCTC2103677008-2E
Test Standards FCC CFR 47 part1, 1.1307(b), 1.1310
Test Results PASS

Tested by:



Willem Wang/Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT


| Test Report Declaration | Page |
|--|-----------|
| 1. VERSION | 4 |
| 2. PRODUCT INFORMATION | 5 |
| 2.1 Product Information | 5 |
| 2.2 Support Equipment | 5 |
| 2.3 Test Mode | 5 |
| 2.4 Copy of marking plate | 6 |
| 3. TEST FACILITY AND TEST INSTRUMENT USED | 7 |
| 3.1 Test Facility | 7 |
| 3.2 Test Instrument Used | 7 |
| 4. METHOD OF MEASUREMENT | 8 |
| 4.1 Applicable Standard | 8 |
| 4.2 Block Diagram Of Test Setup | 8 |
| 4.3 Limit | 9 |
| 4.4 Test procedure | 9 |
| 4.5 Equipment Approval Considerations | 10 |
| 4.6 E and H field Strength | 11 |
| 5. PHOTOGRAPHS OF TEST SET-UP | 12 |

(Note: N/A means not applicable)

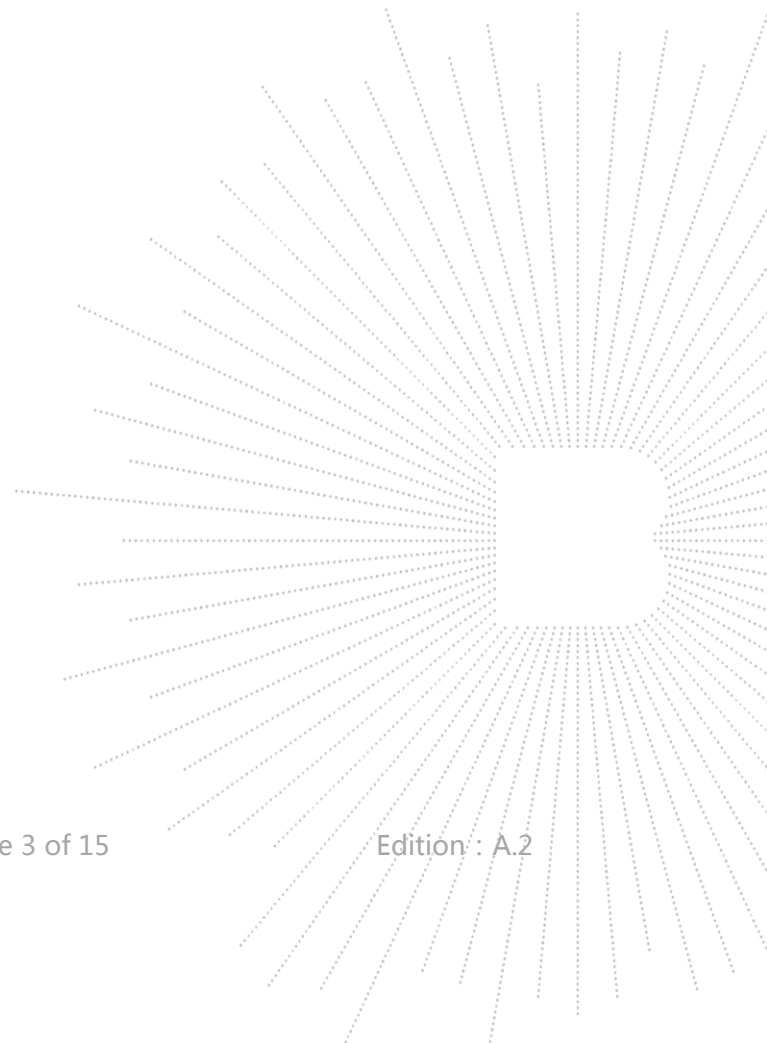

1. VERSION

| Report No. | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2103677008-2E | 2021-04-10 | Original | Valid |
| | | | |

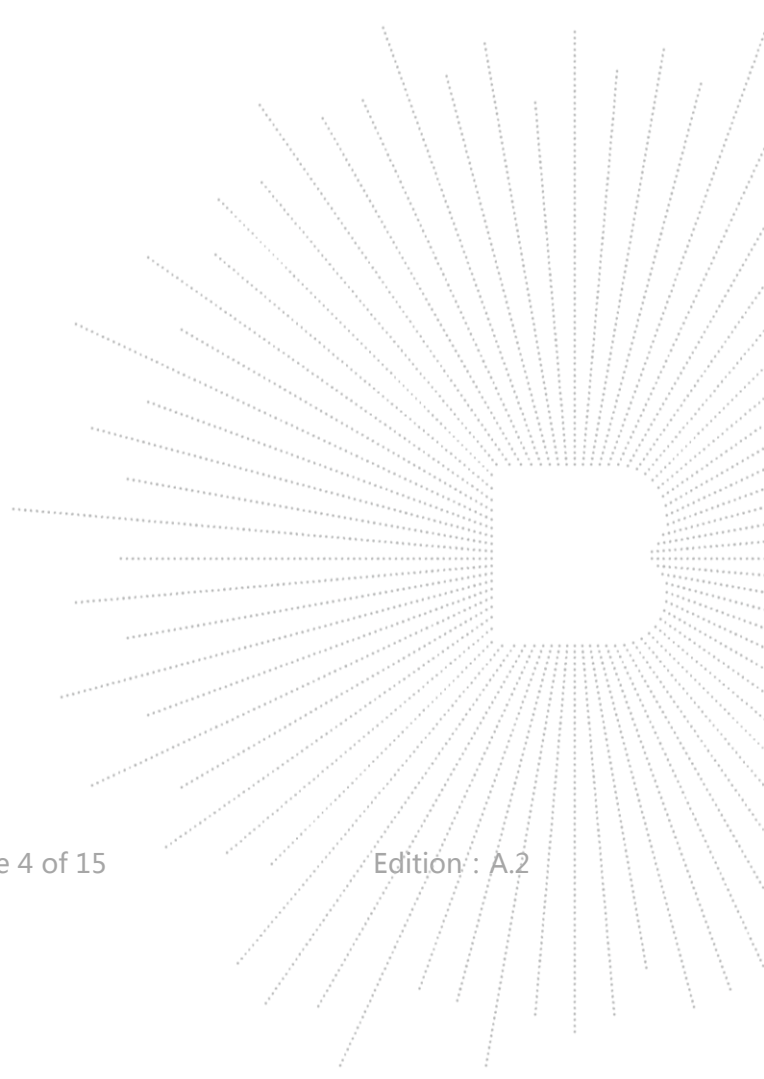

2. PRODUCT INFORMATION

2.1 Product Information

| | |
|-----------------------|--|
| Model/Type Ref.: | WRLS-CHG-HUB |
| Model differences: | N/A |
| Operation Frequency: | mophie Universal Wireless Charging Hub |
| Operation Frequency: | 115kHz-205kHz |
| Antenna installation: | Inductive loop coil antenna |
| Ratings: | Input: DC 15V 4A Output(Qi): 10W Max Output (USB-C): DC 5V 3A;DC 9V 2.22A; DC 12V 1.67A Output (USB-A1): DC 5V 3A;DC 9V 2A; DC 12V 1.5A Output (USB-A2): DC 5V 2.4A Output (USB-A1+ USB-A2): DC 5V 3A 15W |
| Adapter | Model No.: PYS-000215 Input: AC 100-240V 50/60Hz 1.6A Output: DC 15V 4A |
| Hardware Version: | V4 |
| Software Version: | V1 |

2.2 Support Equipment

| Device Type | Brand | Model | Series No. | Data Cable | Remark |
|--------------|--------|----------|------------|------------|-----------|
| Mobile phone | iphone | iphone8P | N/A | N/A | Auxiliary |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

2.3 Test Mode

| | |
|--------------|--------------|
| Test Modes 1 | Wireless 10W |
|--------------|--------------|

2.4 Copy of marking plate

mophie **Universal Wireless Charging Hub**

M/N: WRLS-CHG-HUB

Input: 15V \equiv 4A MAX Output (Qi): 10W Max

Output (USB-C): 5V \equiv 3A; 9V \equiv 2.22A; 12V \equiv 1.67A (PD20W)

Output (USB-A1): 5V \equiv 3A; 9V \equiv 2A; 12V \equiv 1.5A (QC18W)

Output (USB-A2): 5V \equiv 2.4A

Output (USB-A1+ USB-A2): 5V \equiv 3A 15W


FCC ID: 2ACWB-MOPHUB IC: 10465A-MOPHUB

© 2021 mophie inc. Made in China 110-08054-A

ZAGG Inc | 910 Legacy Center Way, Ste. 500 Midvale, Utah 84047

ZAGG International | 103 Shannon Industrial Estate, Shannon Co.

Clare, V14PH121, Ireland

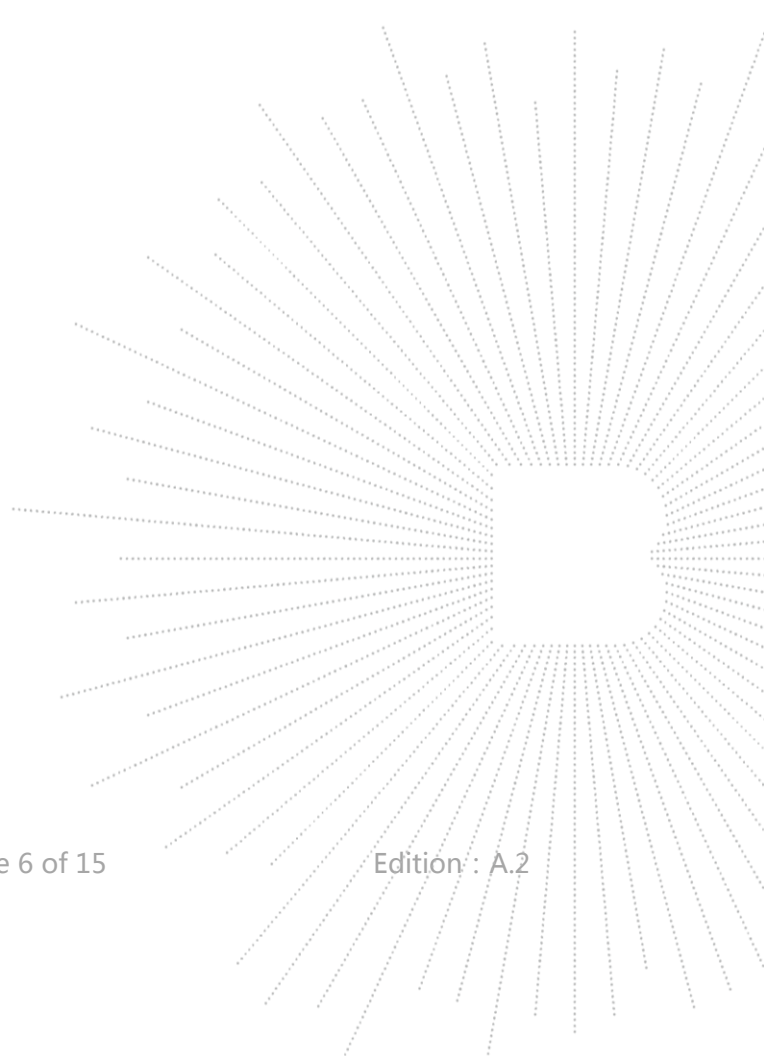

3. TEST FACILITY AND TEST INSTRUMENT USED

3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

3.2 Test Instrument Used


| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|--------------------------------------|--------------|-------------------------|----------------|---------------|---------------|
| Exposure Level Tester | Narda | ELT-400 | N-0231 | Jul. 15, 2020 | Jul. 14, 2021 |
| Electric and Magnetic Field Analyzer | Narda | EHP-200A | 170WX910 06 | Jul. 15, 2020 | Jul. 14, 2021 |
| Magnetic field probe 100cm2 | Narda | B-Field Probe 100cm2 | M0675 | Jul. 15, 2020 | Jul. 14, 2021 |
| 843 Chamber | ETS | 843 | 84301 | Aug. 27, 2020 | Aug. 26, 2023 |

4. METHOD OF MEASUREMENT

4.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

4.2 Block Diagram Of Test Setup

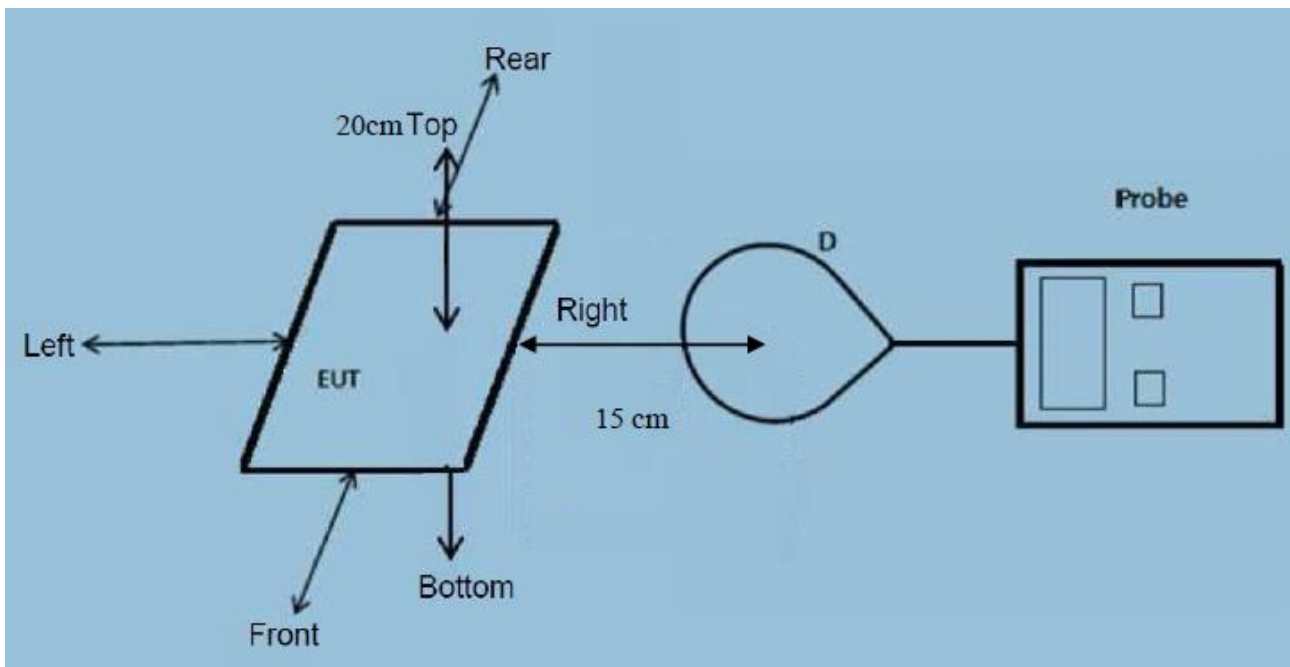

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device

4.3 Limit

| Limits for Occupational / Controlled Exposure | | | | |
|---|-----------------------------------|-----------------------------------|--|--|
| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
| 0.3-3.0 | 614 | 1.63 | (100)* | 6 |
| 3.0-30 | 1842 / f | 4.89 / f | (900 / f)* | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | | | F/300 | 6 |
| 1500-100,000 | | | 5 | 6 |

| Limits for General Population / Uncontrolled Exposure | | | | |
|---|-----------------------------------|-----------------------------------|--|--|
| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
| 0.3-1.34 | 614 | 1.63 | (100)* | 30 |
| 1.34-30 | 824/f | 2.19/f | (180 / f)* | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | | | F/1500 | 30 |
| 1500-100,000 | | | 1 | 30 |

4.4 Test procedure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.
- The turn table was rotated 360d degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.

4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115-205kHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 10W.

3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.

Yes, the transfer system includes only single primary and secondary coils.

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, the EUT is a mophie Universal Wireless Charging Hub

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.

4.6 E and H field Strength

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT


| Battery level | Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | 10% Limits Test (V/m) | Limits Test (V/m) |
|---------------|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 1% | 0.115-0.205 | 0.73 | 0.72 | 0.70 | 0.52 | 0.52 | 61.4 | 614 |
| 50% | 0.115-0.205 | 0.65 | 0.68 | 0.67 | 0.57 | 0.53 | 61.4 | 614 |
| 99% | 0.115-0.205 | 0.67 | 0.64 | 0.62 | 0.52 | 0.71 | 61.4 | 614 |

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

| Battery level | Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | 10% Limits Test (A/m) | Limits Test (A/m) |
|---------------|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 1% | 0.115-0.205 | 0.066 | 0.101 | 0.072 | 0.064 | 0.092 | 0.163 | 1.63 |
| 50% | 0.115-0.205 | 0.054 | 0.053 | 0.078 | 0.083 | 0.088 | 0.163 | 1.63 |
| 99% | 0.115-0.205 | 0.037 | 0.067 | 0.054 | 0.065 | 0.055 | 0.163 | 1.63 |

5. PHOTOGRAPHS OF TEST SET-UP

15cm

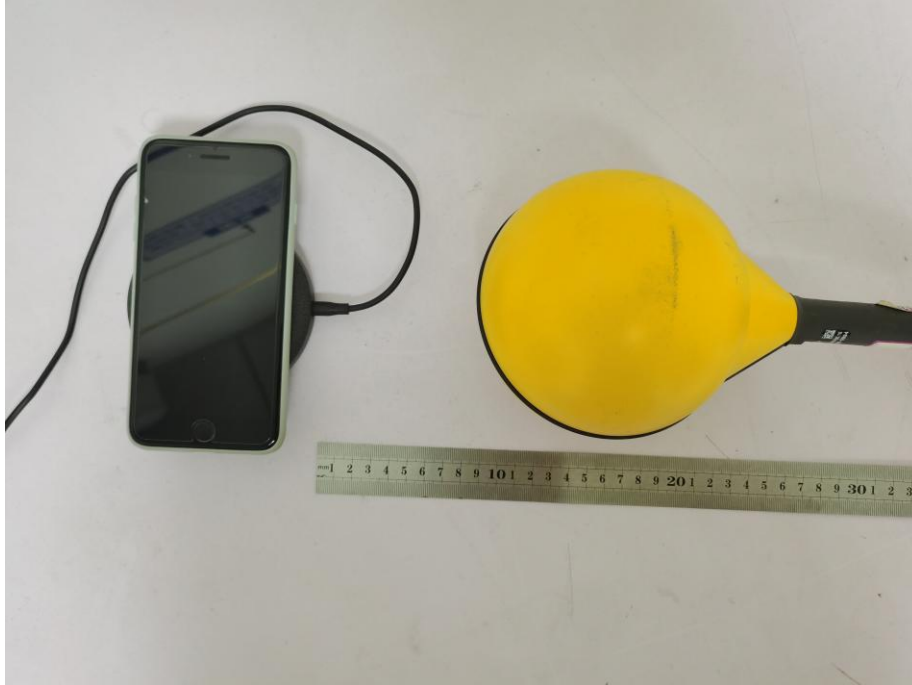

15cm




15cm



15cm



20cm

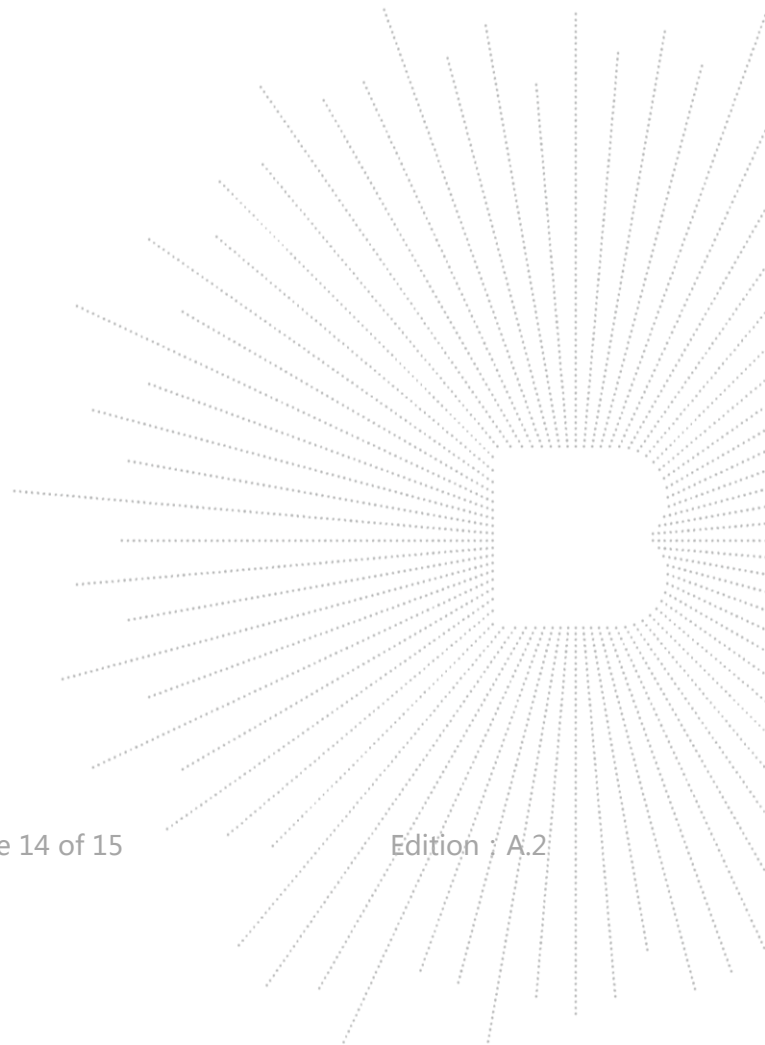

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P.C.: 518103

FAX : 0755-33229357

Website : <http://www.bctc-lab.com>

E-Mail : bctc@bctc-lab.com.cn

***** **END** *****