


QPSK_IoT Signal at Top

Chain 0


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz


Frequency Range : 9kHz~1GHz

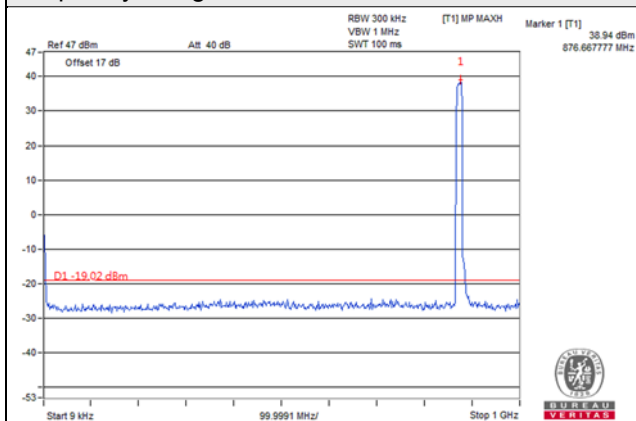

Frequency Range : 1GHz~10GHz

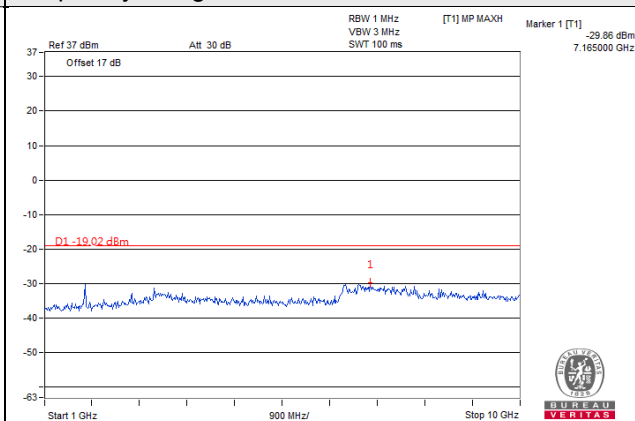


Frequency Range : 10GHz~26.5GHz

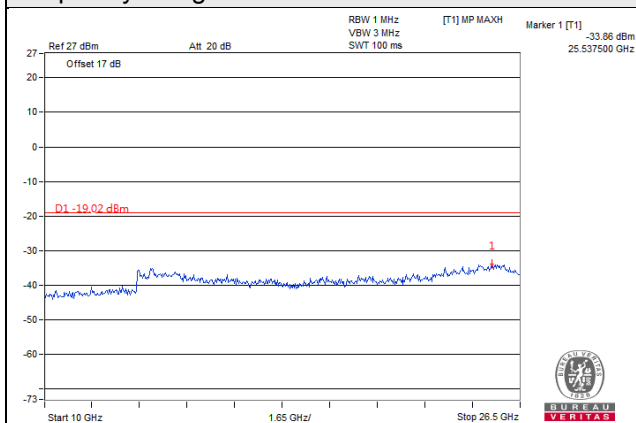


LTE Band 5, Channel Bandwidth 10MHz

881.5MHz


Frequency Range : 9kHz~1GHz

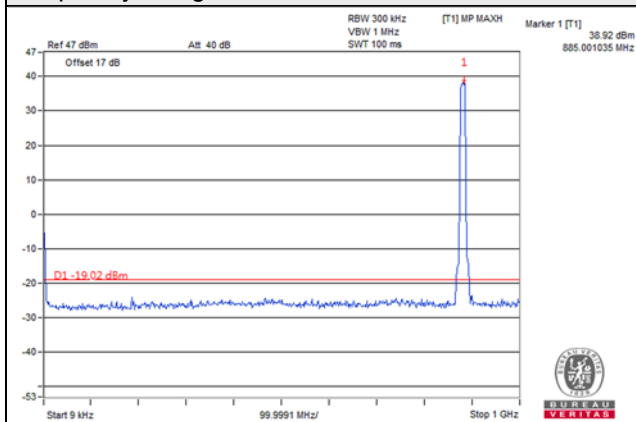

Frequency Range : 1GHz~10GHz

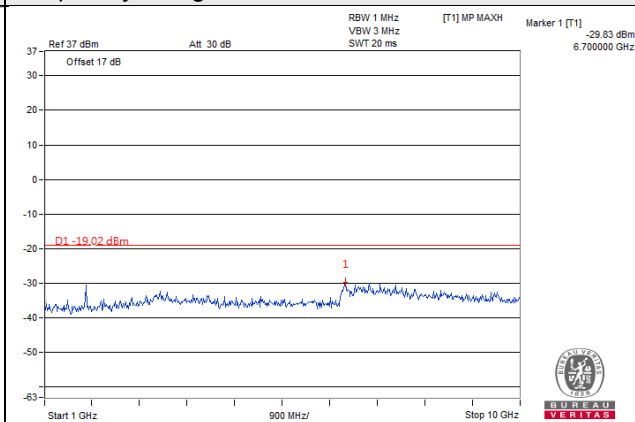


Frequency Range : 10GHz~26.5GHz

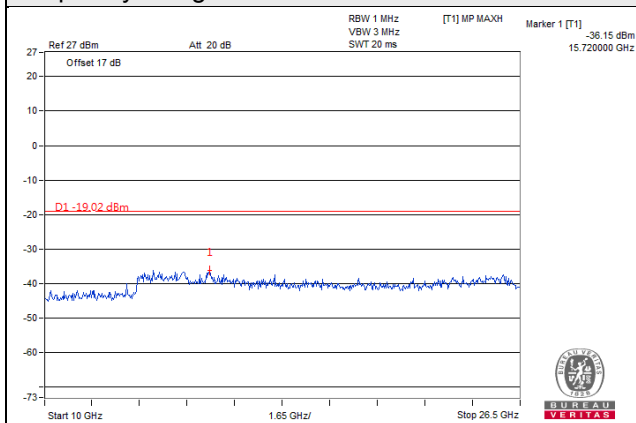


LTE Band 5, Channel Bandwidth 10MHz

889.0MHz


Frequency Range : 9kHz~1GHz

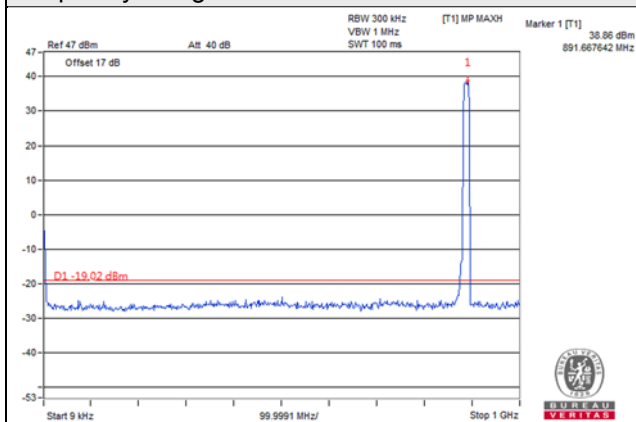

Frequency Range : 1GHz~10GHz

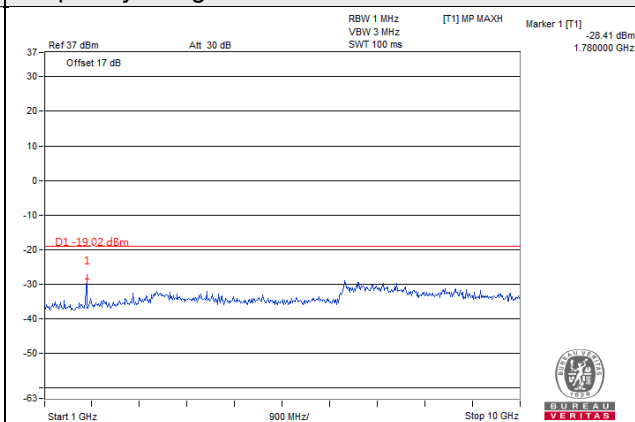

Frequency Range : 10GHz~26.5GHz

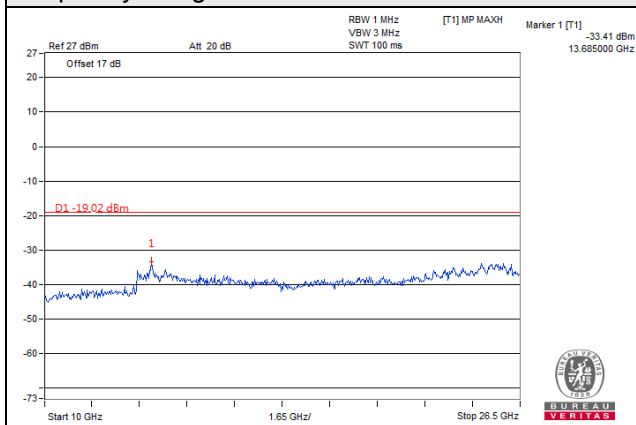


Chain 1


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz


Frequency Range : 9kHz~1GHz

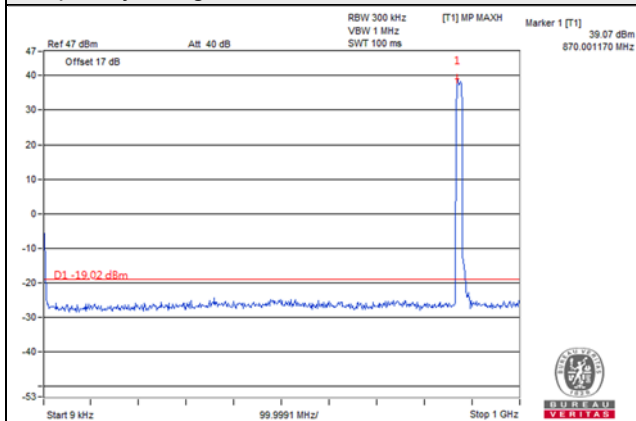

Frequency Range : 1GHz~10GHz

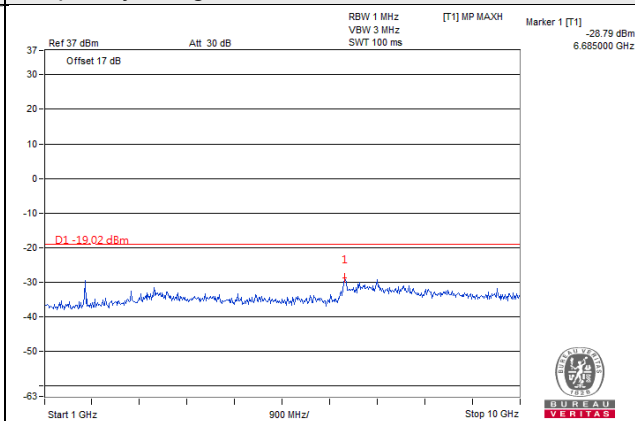


Frequency Range : 10GHz~26.5GHz

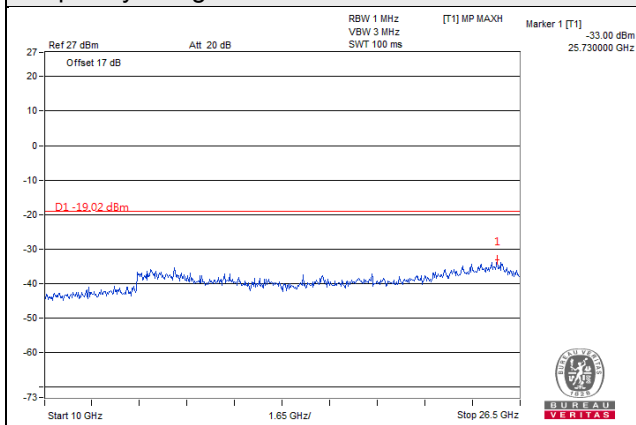


LTE Band 5, Channel Bandwidth 10MHz

881.5MHz


Frequency Range : 9kHz~1GHz

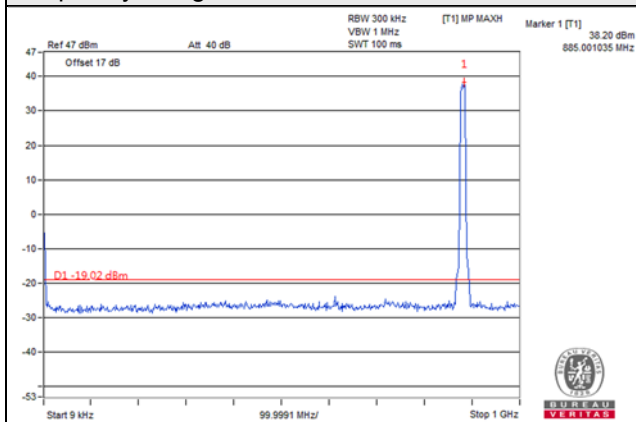

Frequency Range : 1GHz~10GHz

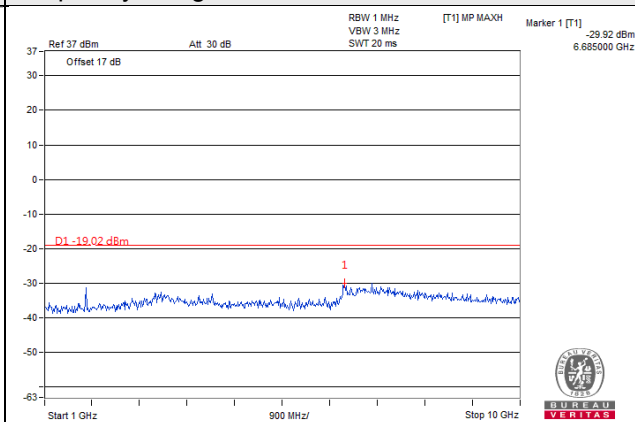


Frequency Range : 10GHz~26.5GHz

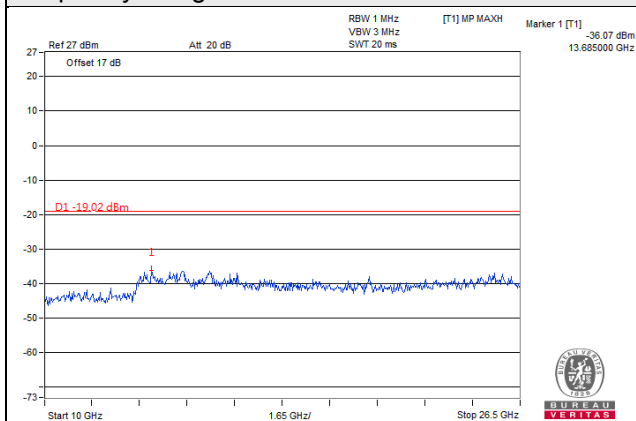


LTE Band 5, Channel Bandwidth 10MHz

889.0MHz


Frequency Range : 9kHz~1GHz

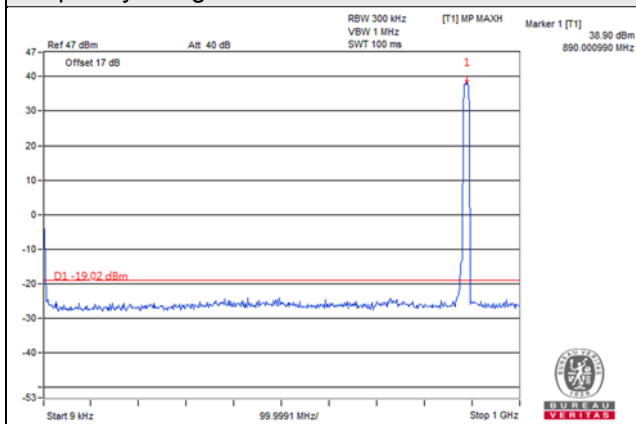

Frequency Range : 1GHz~10GHz

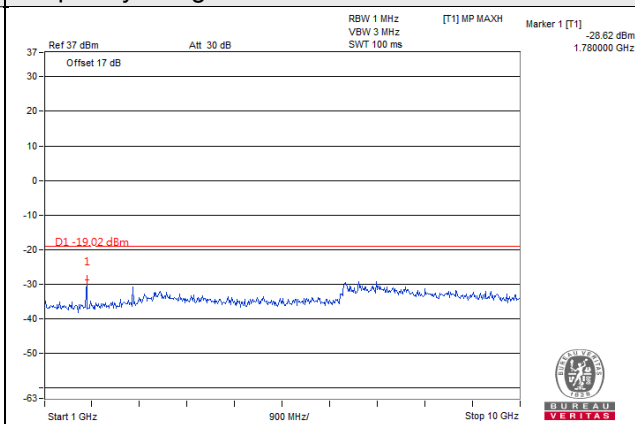

Frequency Range : 10GHz~26.5GHz

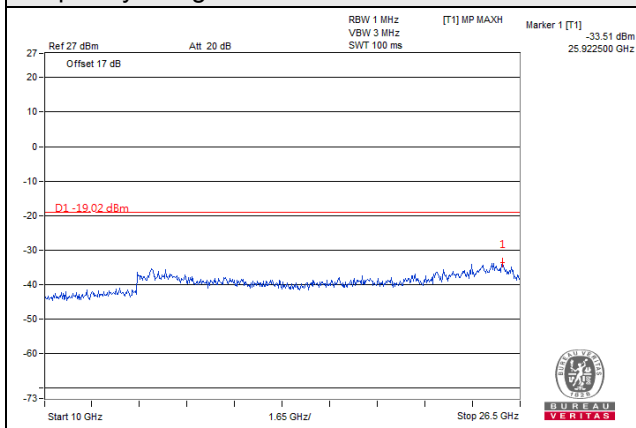


Chain 2


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz


Frequency Range : 9kHz~1GHz

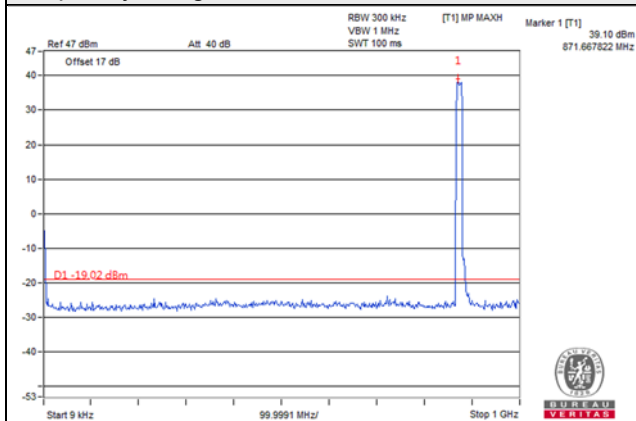

Frequency Range : 1GHz~10GHz

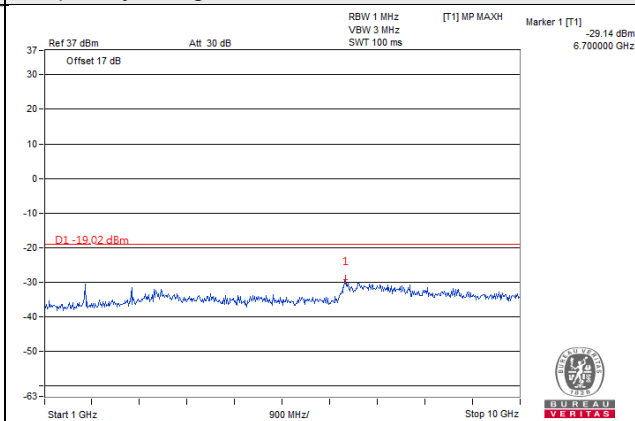


Frequency Range : 10GHz~26.5GHz

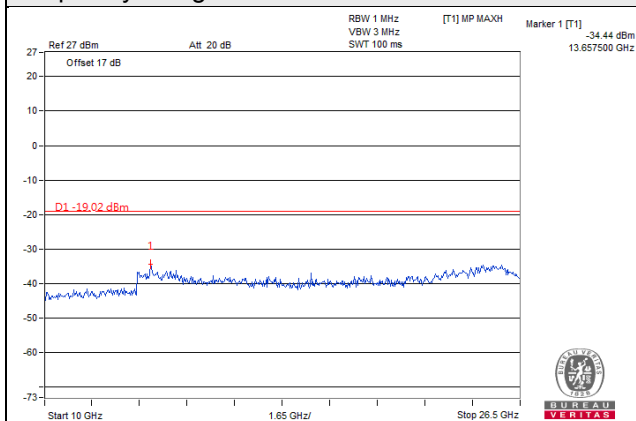


LTE Band 5, Channel Bandwidth 10MHz

881.5MHz


Frequency Range : 9kHz~1GHz

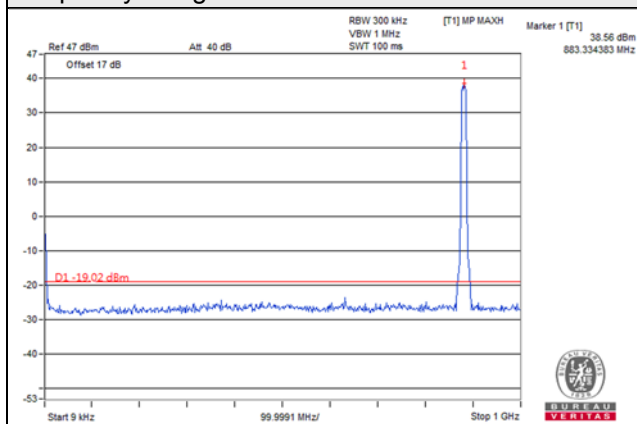

Frequency Range : 1GHz~10GHz

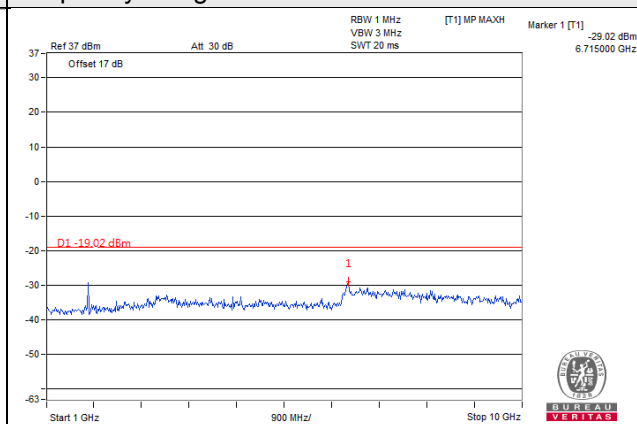


Frequency Range : 10GHz~26.5GHz

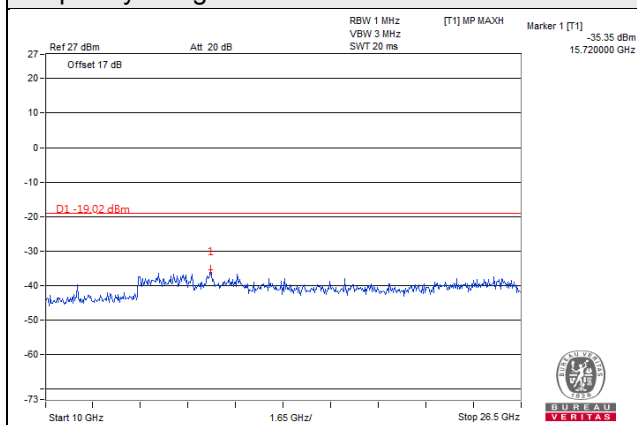


LTE Band 5, Channel Bandwidth 10MHz

889.0MHz


Frequency Range : 9kHz~1GHz

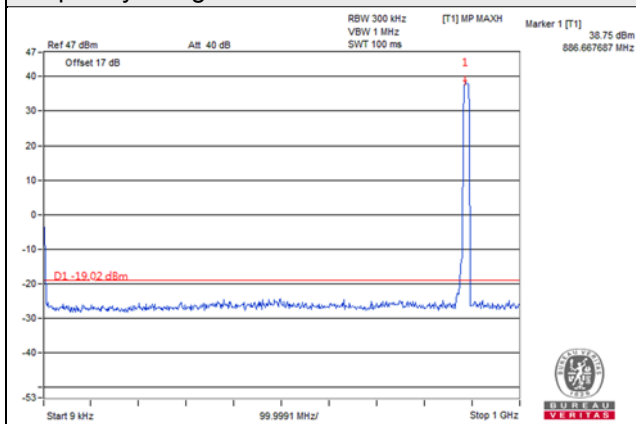

Frequency Range : 1GHz~10GHz

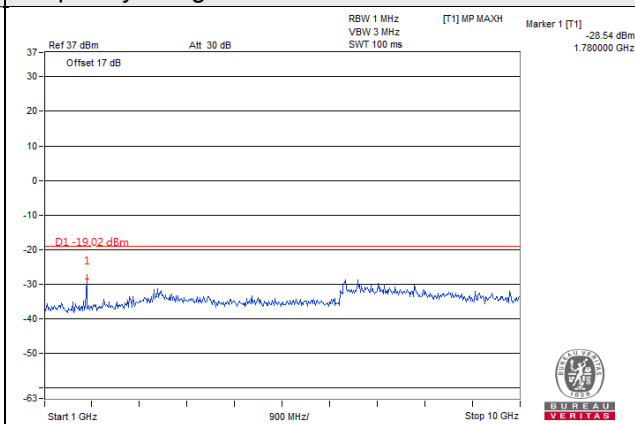

Frequency Range : 10GHz~26.5GHz

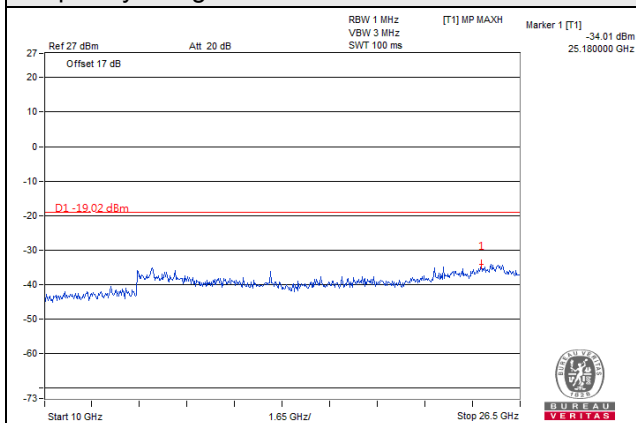


Chain 3


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz


Frequency Range : 9kHz~1GHz

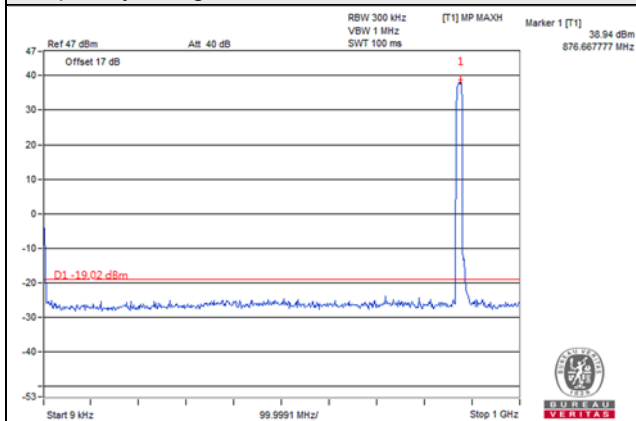

Frequency Range : 1GHz~10GHz

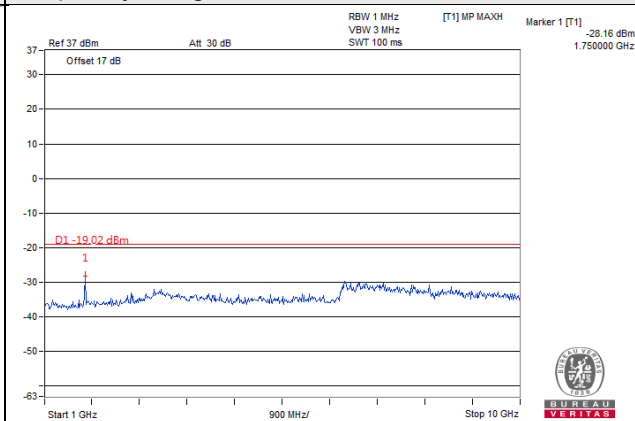


Frequency Range : 10GHz~26.5GHz

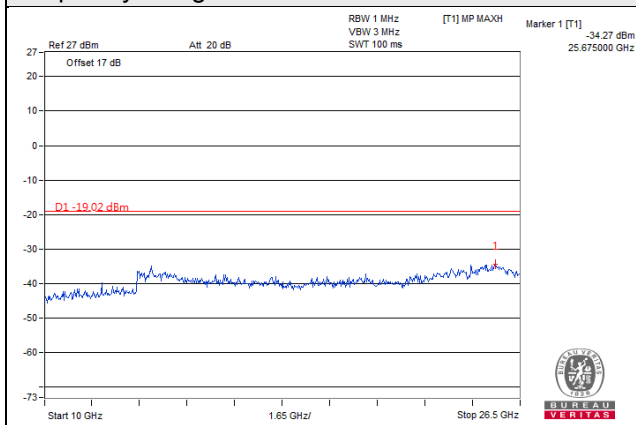


LTE Band 5, Channel Bandwidth 10MHz

881.5MHz


Frequency Range : 9kHz~1GHz

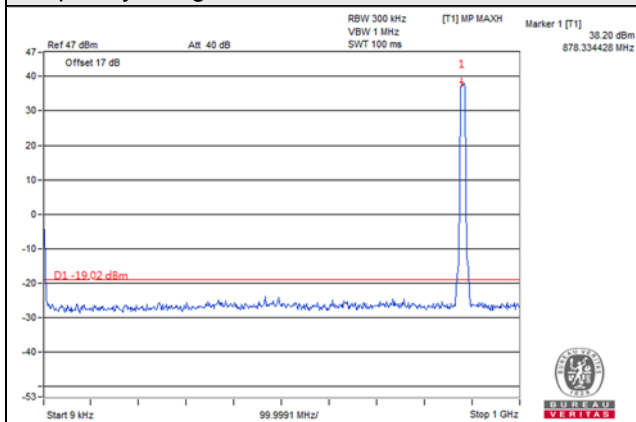

Frequency Range : 1GHz~10GHz

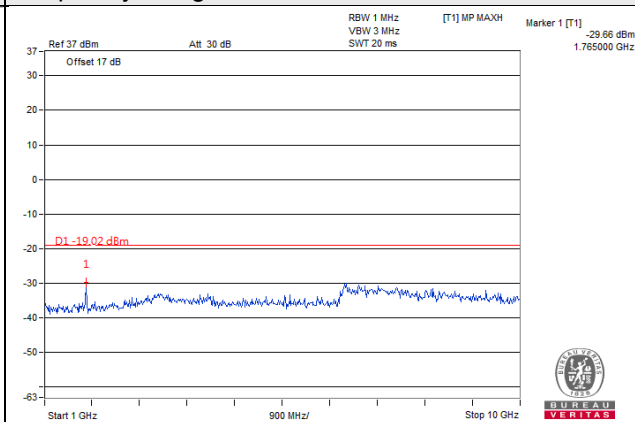


Frequency Range : 10GHz~26.5GHz

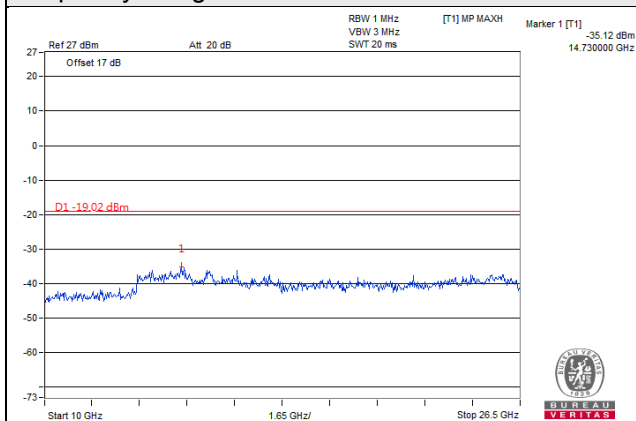


LTE Band 5, Channel Bandwidth 10MHz

889.0MHz


Frequency Range : 9kHz~1GHz

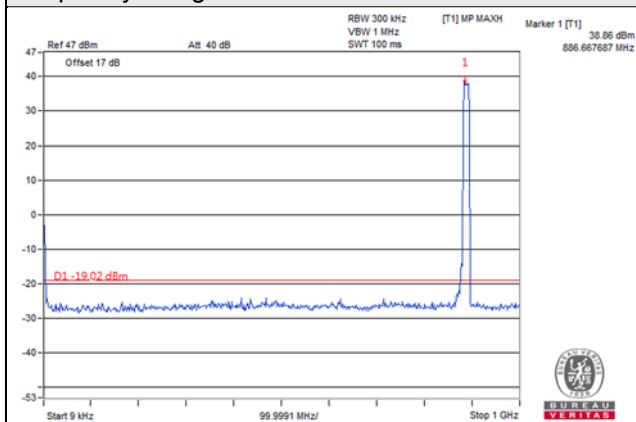

Frequency Range : 1GHz~10GHz

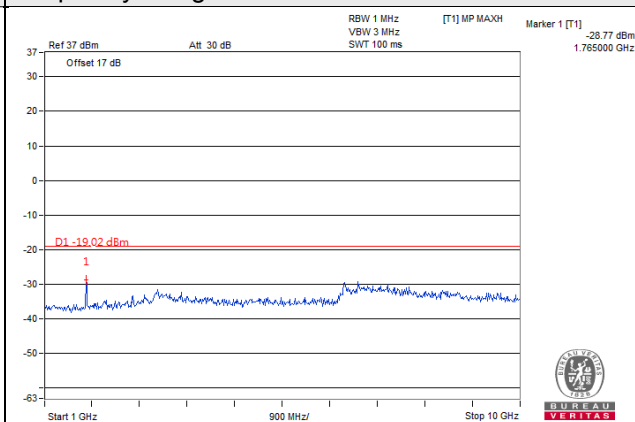

Frequency Range : 10GHz~26.5GHz

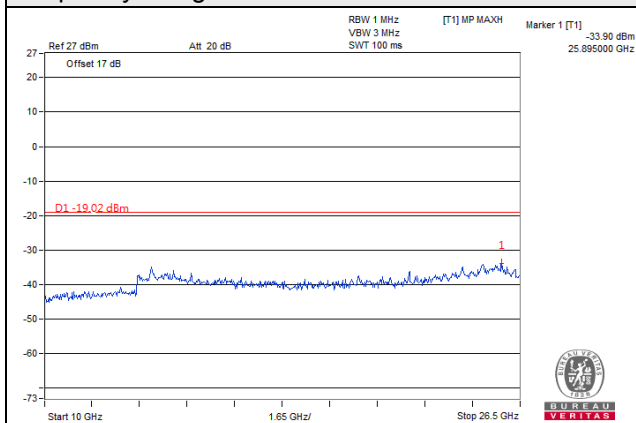


For NB-IoT In-Band: QPSK_IoT Signal at Bottom

Chain 0


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz

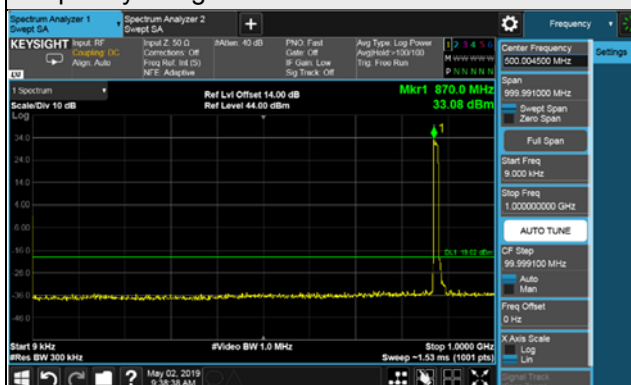


Frequency Range : 1GHz~10GHz

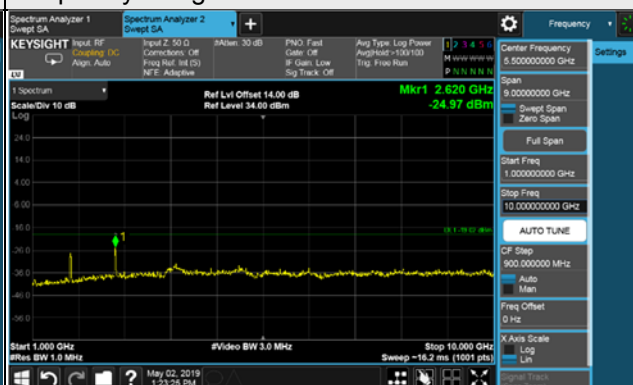


881.5MHz

Frequency Range : 9kHz~1GHz

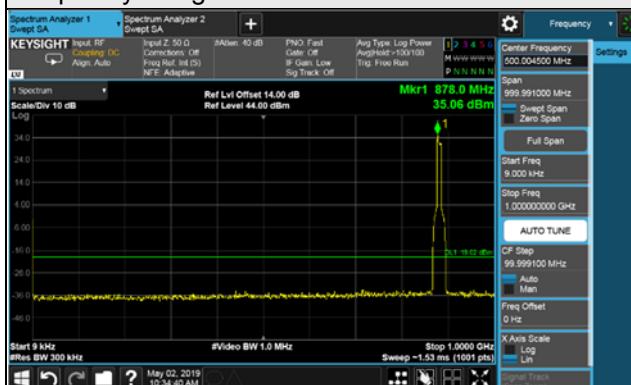


Frequency Range : 1GHz~10GHz

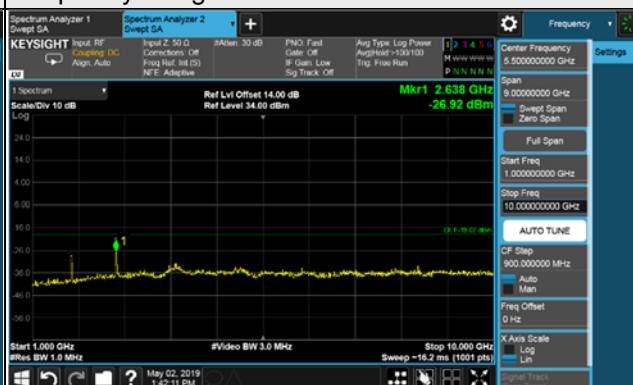


889.0MHz

Frequency Range : 9kHz~1GHz

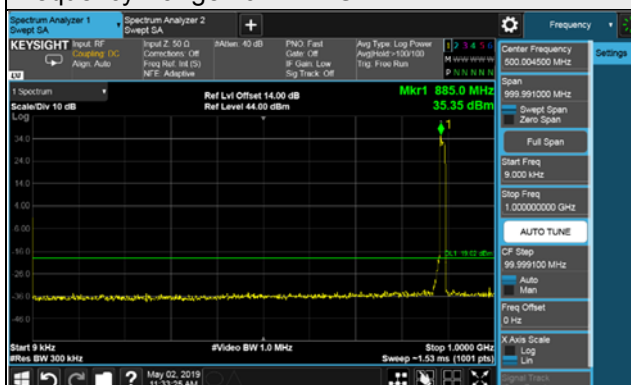

Frequency Range : 1GHz~10GHz

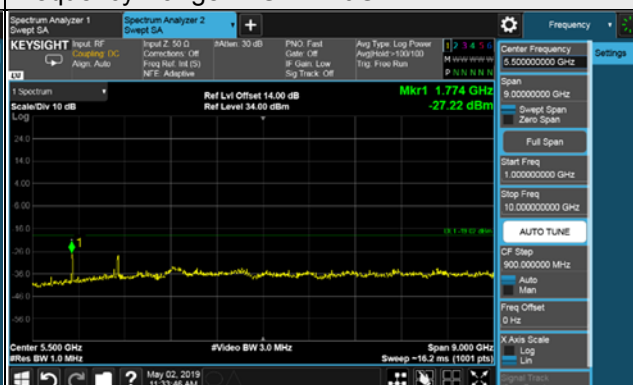

Chain 1


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz




Frequency Range : 1GHz~10GHz

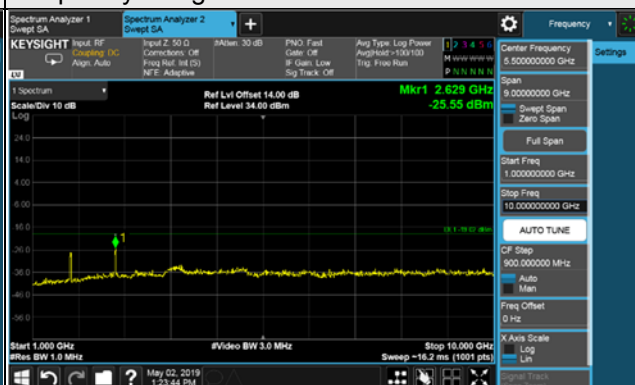


881.5MHz

Frequency Range : 9kHz~1GHz

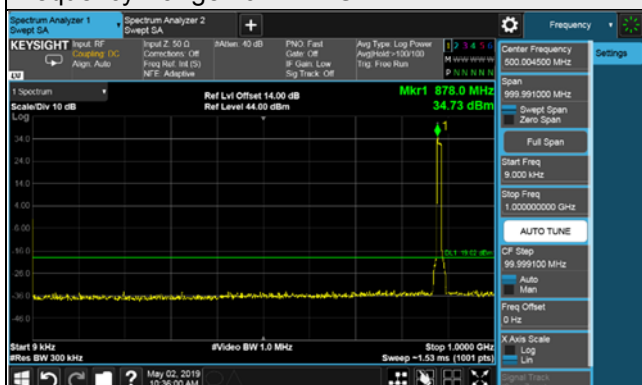


Frequency Range : 1GHz~10GHz

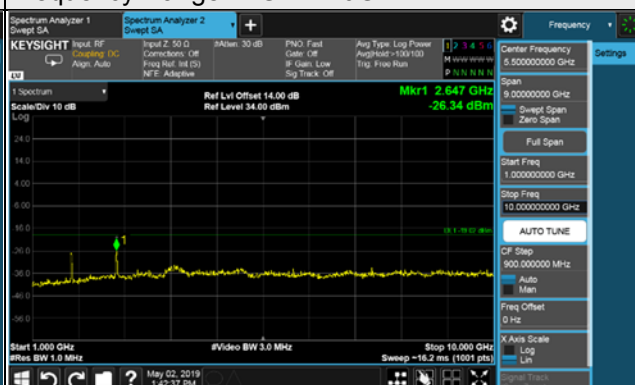


889.0MHz

Frequency Range : 9kHz~1GHz

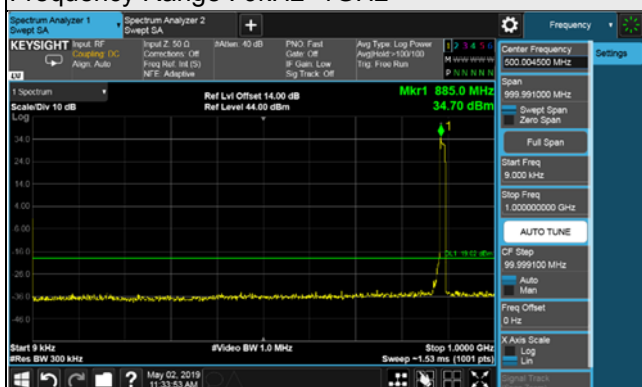

Frequency Range : 1GHz~10GHz

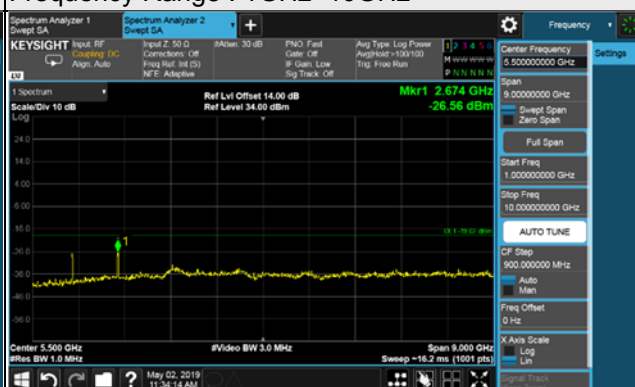


Chain 2


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz

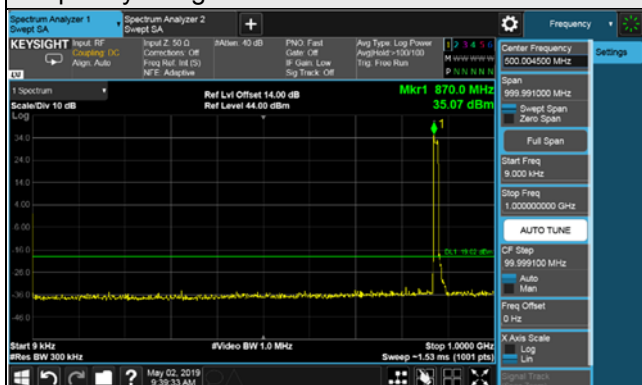


Frequency Range : 1GHz~10GHz

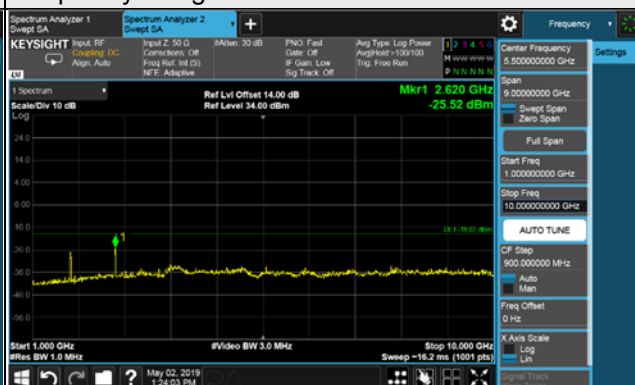

881.5MHz

Frequency Range : 9kHz~1GHz

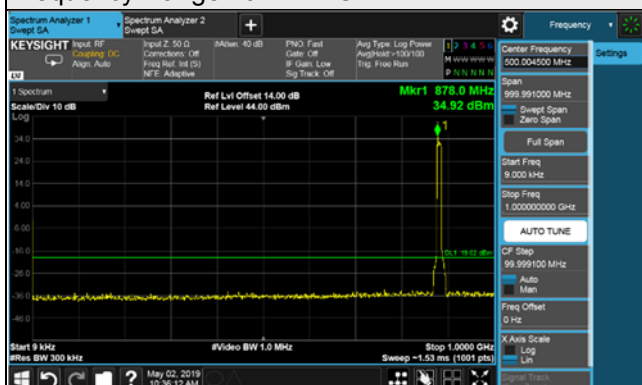


Frequency Range : 1GHz~10GHz




889.0MHz

Frequency Range : 9kHz~1GHz

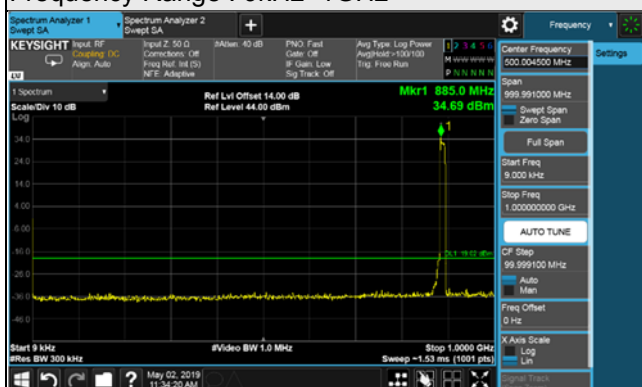

Frequency Range : 1GHz~10GHz

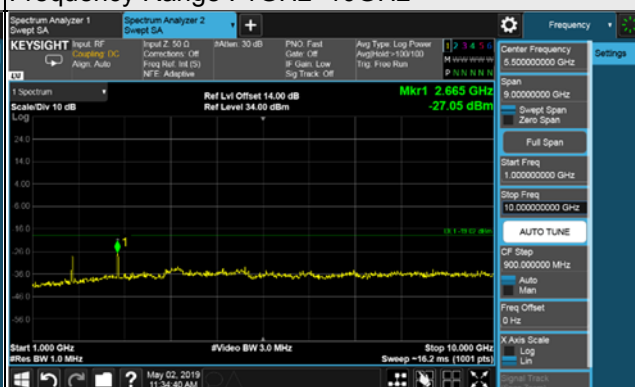


Chain 3


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz

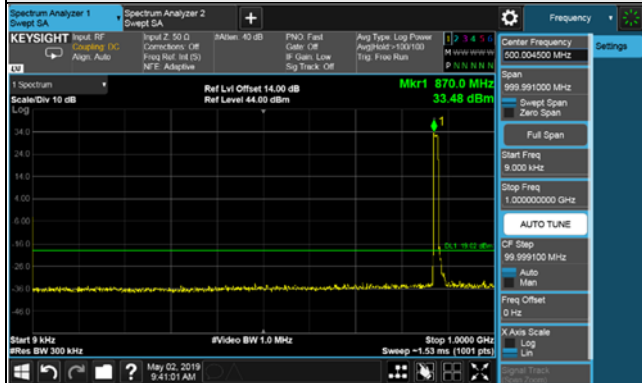


Frequency Range : 1GHz~10GHz

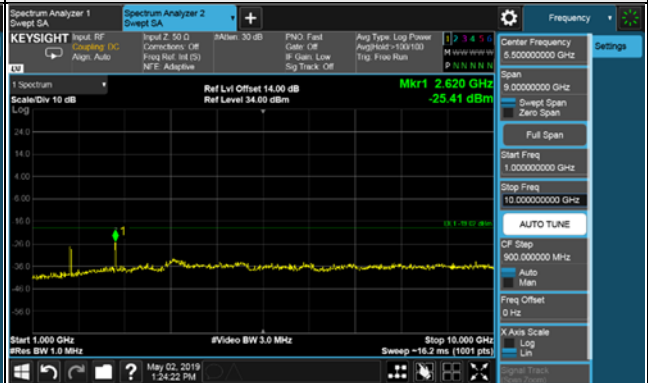


881.5MHz

Frequency Range : 9kHz~1GHz

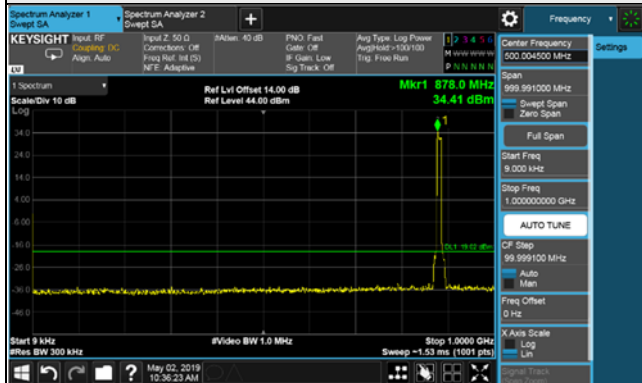


Frequency Range : 1GHz~10GHz

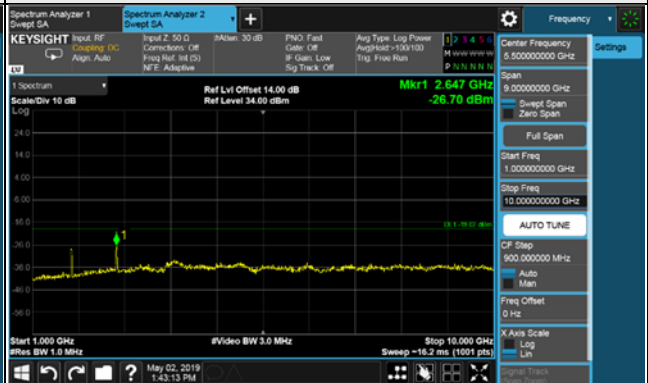


889.0MHz

Frequency Range : 9kHz~1GHz

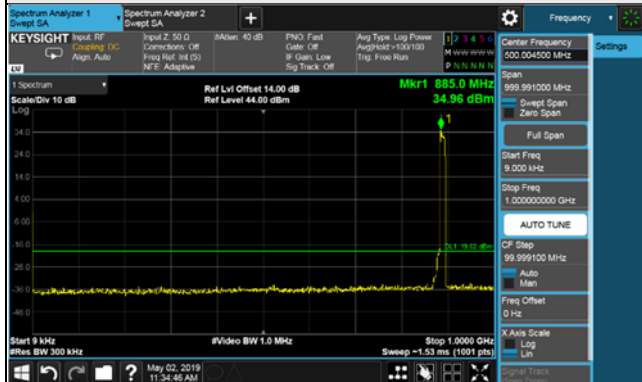

Frequency Range : 1GHz~10GHz

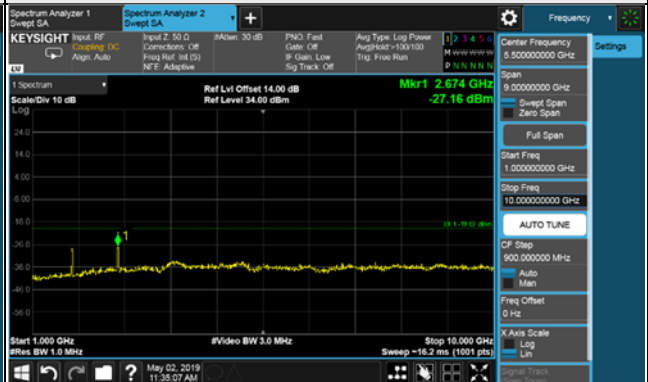


QPSK_IoT Signal at Top

Chain 0


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz

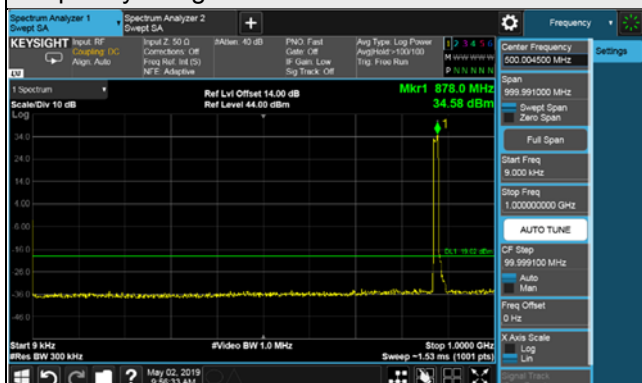


Frequency Range : 1GHz~10GHz

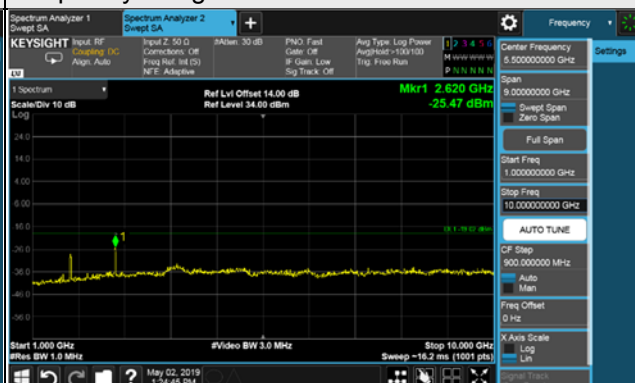


881.5MHz

Frequency Range : 9kHz~1GHz

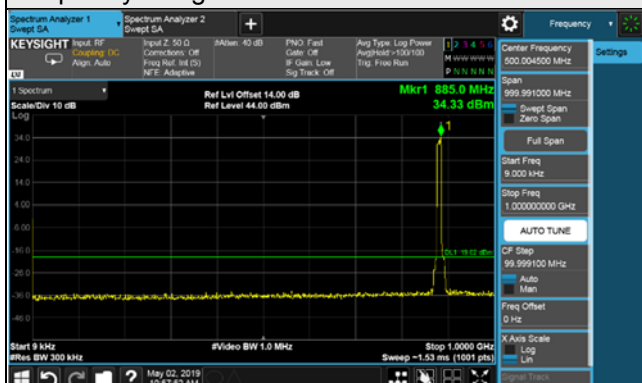


Frequency Range : 1GHz~10GHz

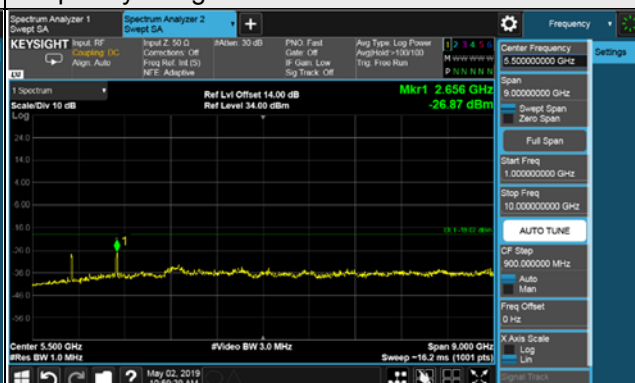


889.0MHz

Frequency Range : 9kHz~1GHz

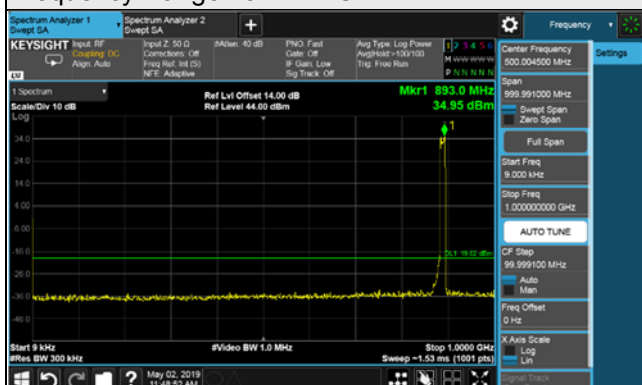

Frequency Range : 1GHz~10GHz

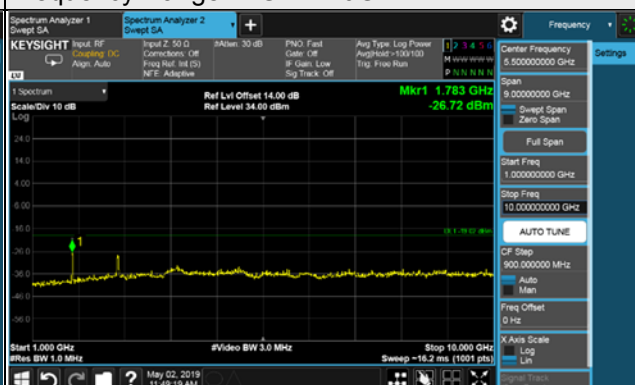


Chain 1


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz

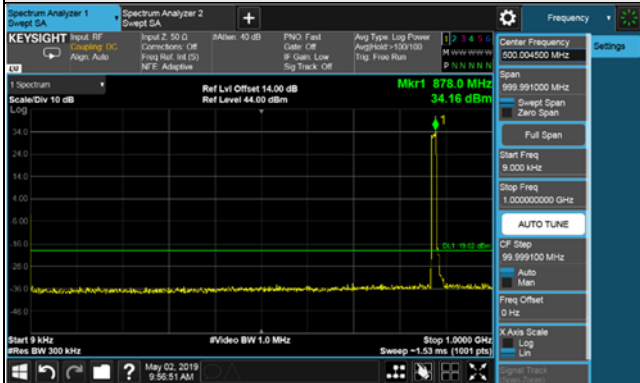


Frequency Range : 1GHz~10GHz

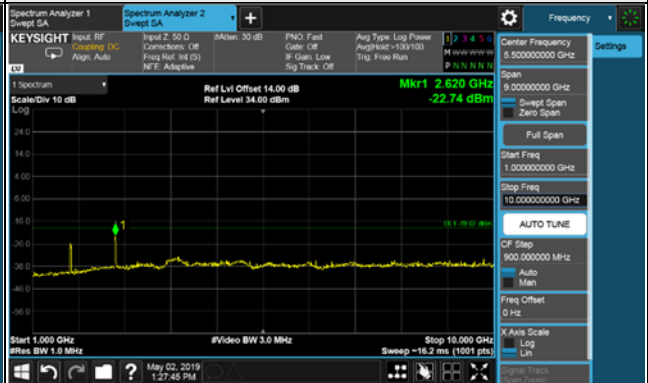


881.5MHz

Frequency Range : 9kHz~1GHz

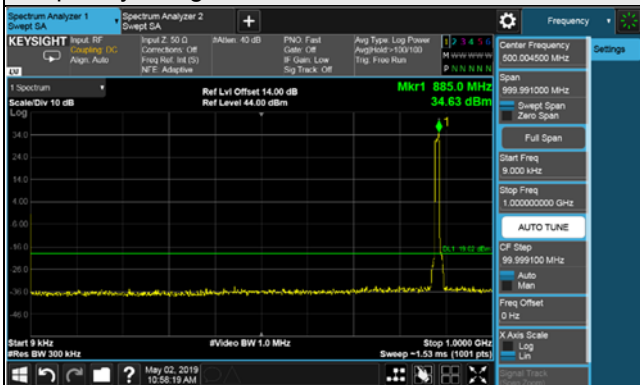


Frequency Range : 1GHz~10GHz

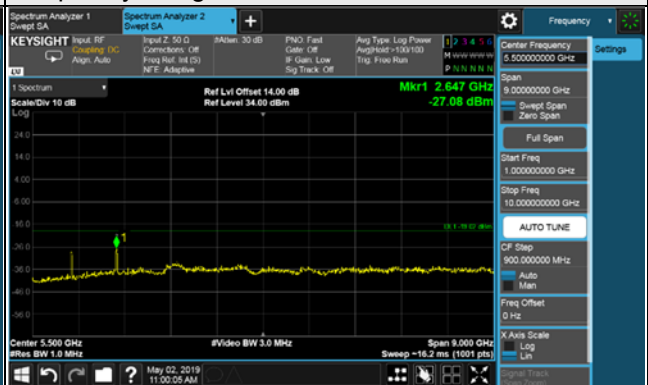


889.0MHz

Frequency Range : 9kHz~1GHz

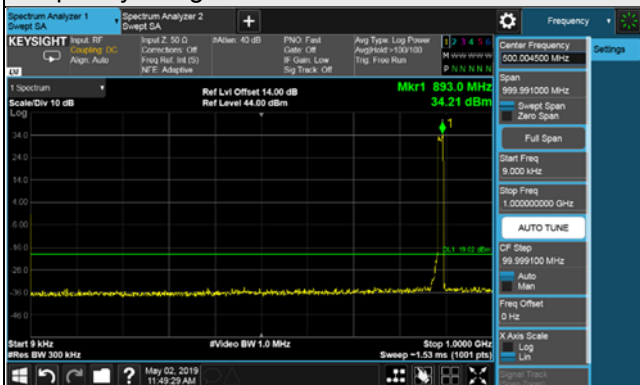

Frequency Range : 1GHz~10GHz

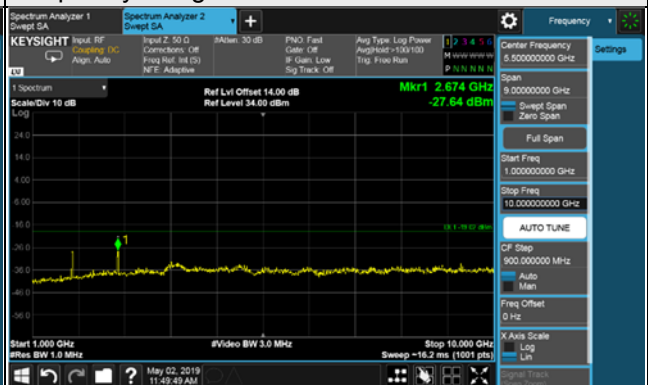


Chain 2


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz

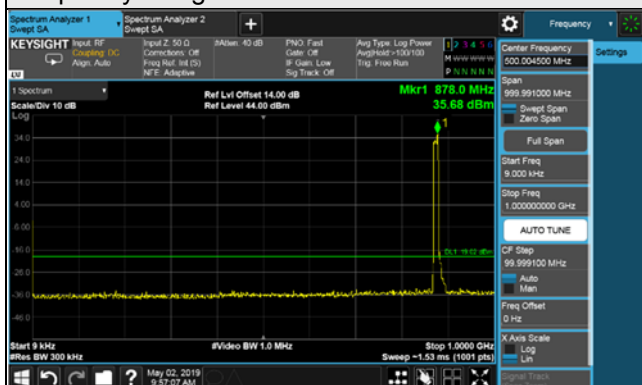


Frequency Range : 1GHz~10GHz

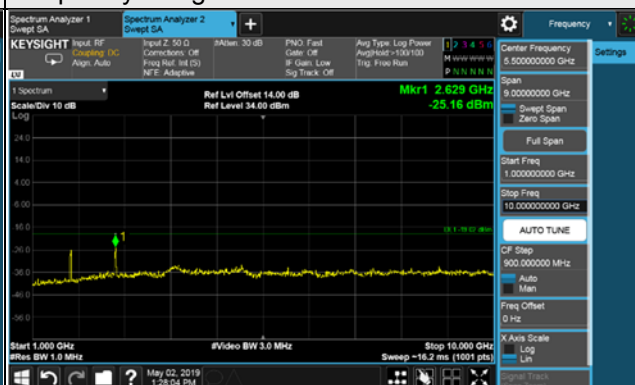


881.5MHz

Frequency Range : 9kHz~1GHz

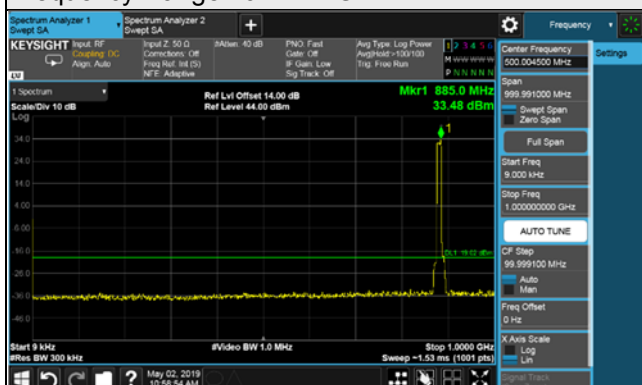


Frequency Range : 1GHz~10GHz

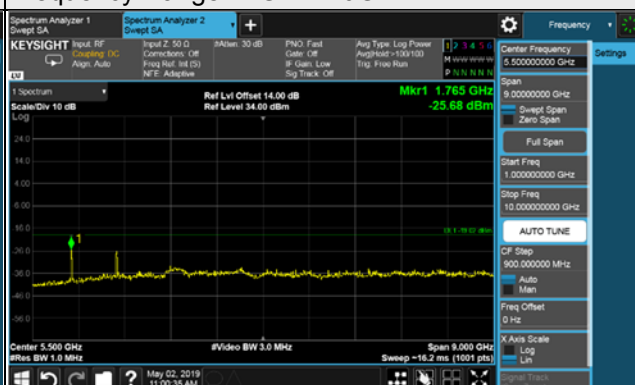

889.0MHz

Frequency Range : 9kHz~1GHz

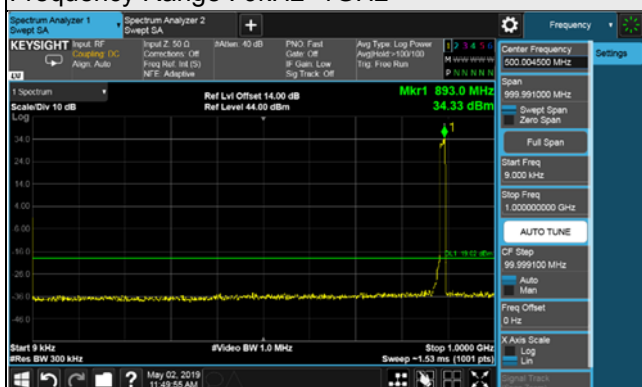

Frequency Range : 1GHz~10GHz




Chain 3


LTE Band 5, Channel Bandwidth 10MHz

874.0MHz

Frequency Range : 9kHz~1GHz

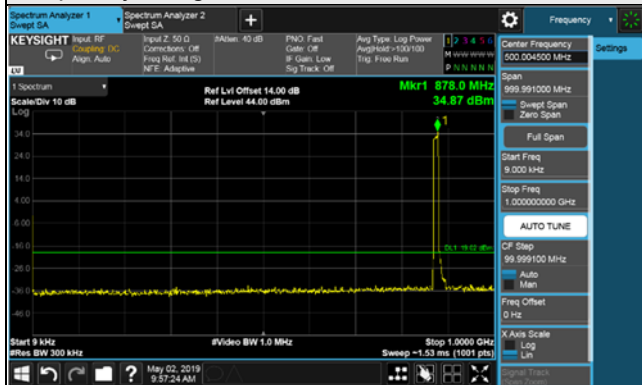


Frequency Range : 1GHz~10GHz

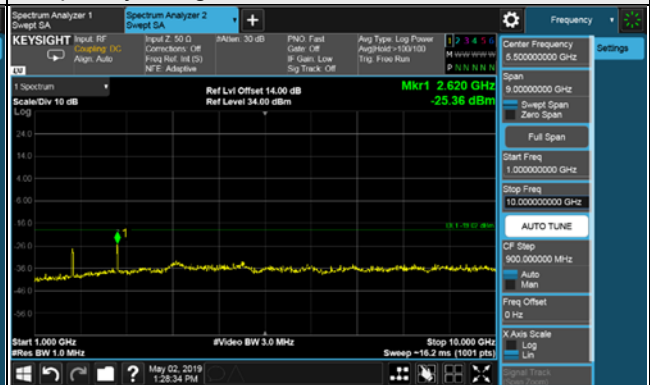


881.5MHz

Frequency Range : 9kHz~1GHz

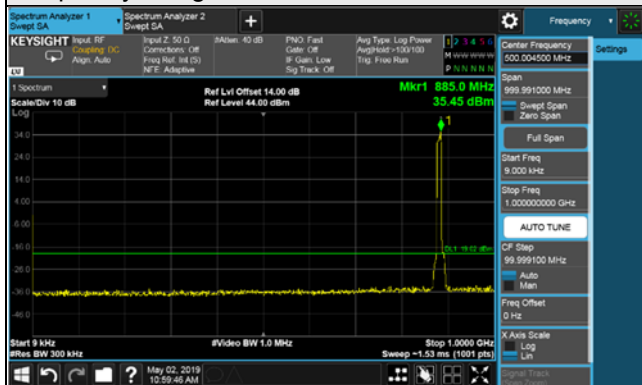


Frequency Range : 1GHz~10GHz

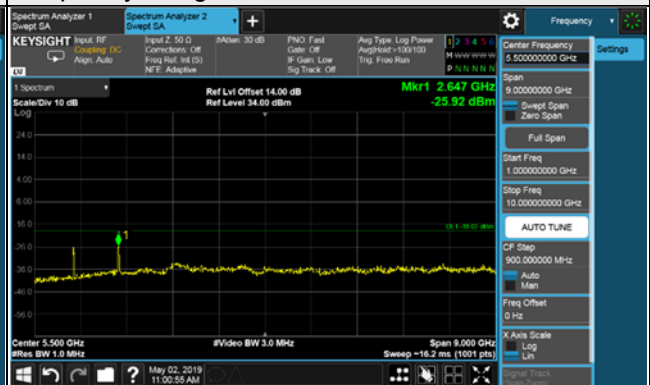


889.0MHz

Frequency Range : 9kHz~1GHz

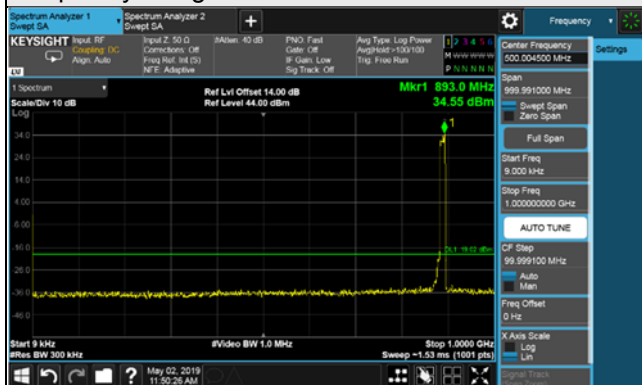

Frequency Range : 1GHz~10GHz

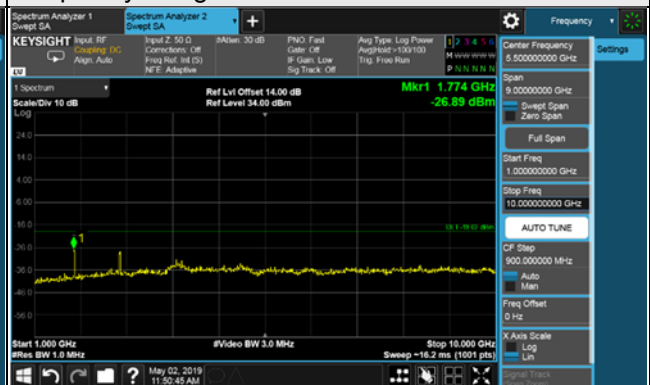

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

For Radiated Emission below or equal 1GHz

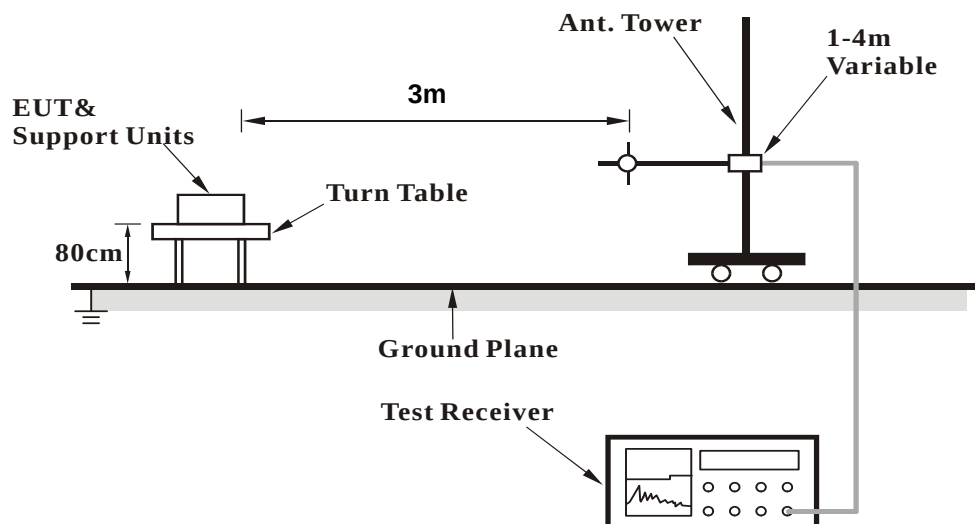

For Radiated Emission above 1GHz

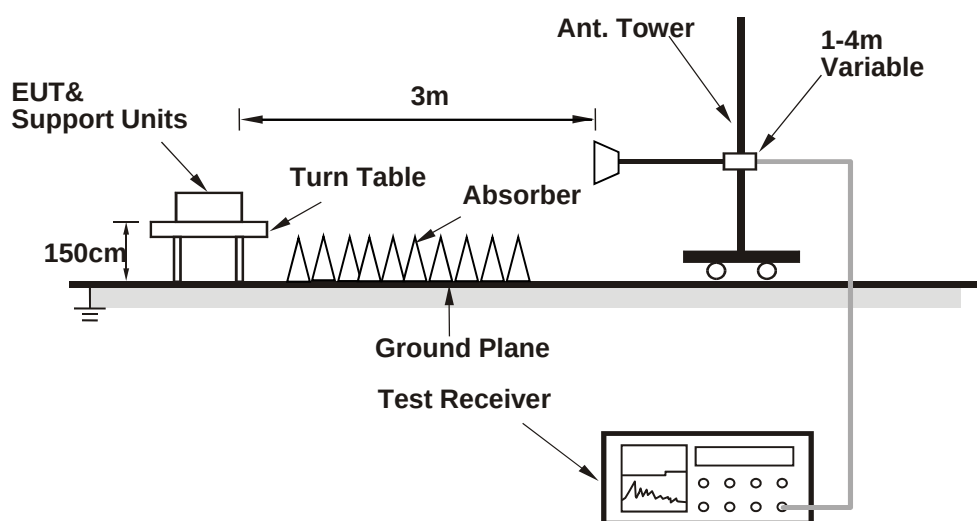

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


For NB-IoT Guard Band:

Channel Bandwidth: 10MHz

Mode	881.5MHz	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	35.82	-25.5	-8.2	-15.9	-24.1	-13.0	-11.1
2	67.83	-28.8	-36.6	-1.0	-37.6	-13.0	-24.6
3	135.73	-19.4	-24.3	-3.2	-27.5	-13.0	-14.5
4	202.66	-36.0	-44.0	-2.1	-46.1	-13.0	-33.1
5	630.43	-60.2	-63.9	3.6	-60.3	-13.0	-47.3
6	929.19	-60.7	-58.4	3.7	-54.7	-13.0	-41.7


Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

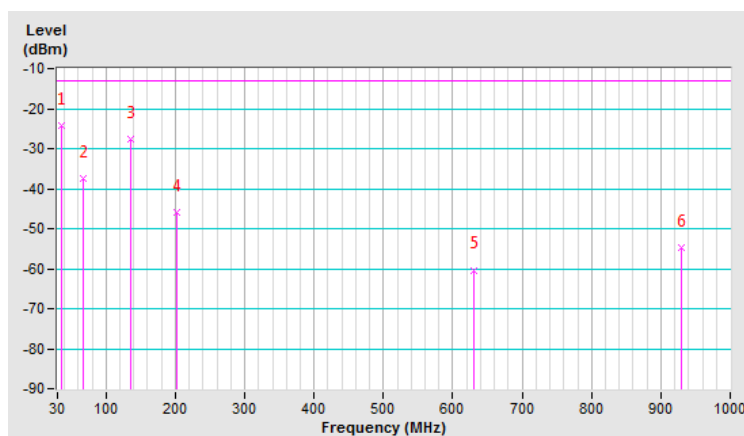

Mode	881.5MHz	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	36.79	-6.2	-2.7	-15.2	-17.9	-13.0	-4.9
2	84.32	-26.6	-34.2	0.4	-33.8	-13.0	-20.8
3	136.70	-20.0	-22.1	-3.2	-25.3	-13.0	-12.3
4	197.81	-34.0	-34.6	-2.4	-37.0	-13.0	-24.0
5	449.04	-56.2	-62.1	3.4	-58.7	-13.0	-45.7
6	713.85	-48.7	-48.2	3.5	-44.7	-13.0	-31.7

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

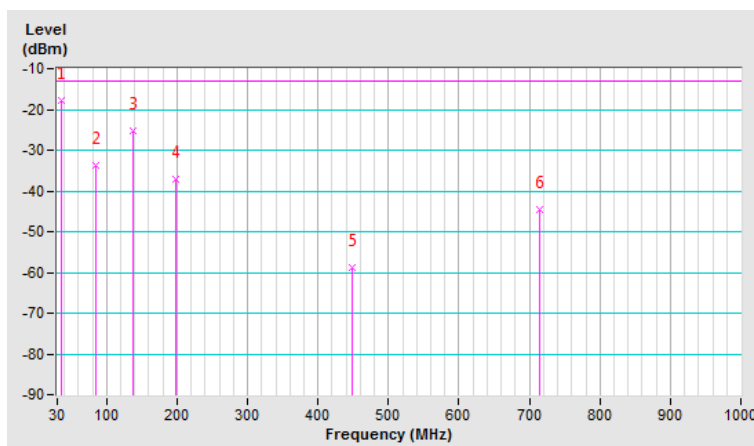


For NB-IoT In-Band:

Channel Bandwidth: 10MHz

Mode	881.5MHz	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-26.6	-10.8	-14.7	-25.5	-13.0	-12.5
2	48.43	-37.1	-30.5	-8.7	-39.2	-13.0	-26.2
3	82.38	-33.2	-41.2	0.4	-40.8	-13.0	-27.8
4	145.43	-23.8	-27.8	-3.1	-30.9	-13.0	-17.9
5	200.72	-36.8	-44.9	-2.3	-47.2	-13.0	-34.2
6	214.30	-43.2	-51.7	-2.0	-53.7	-13.0	-40.7


Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

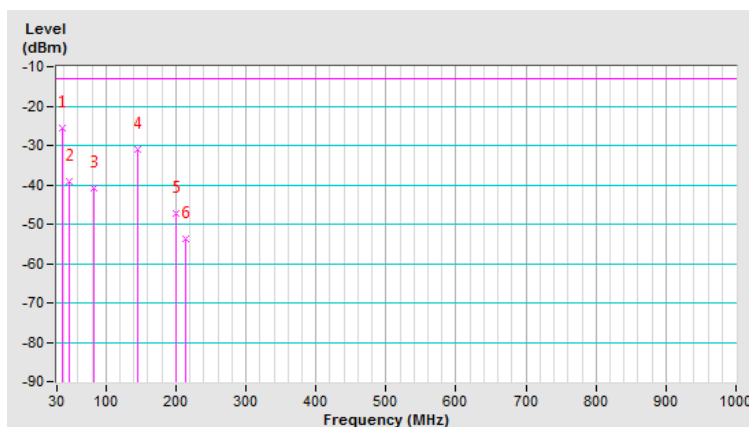

Mode	881.5MHz	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	37.76	-7.1	-4.0	-14.7	-18.7	-13.0	-5.7
2	81.41	-29.0	-36.3	0.5	-35.8	-13.0	-22.8
3	112.45	-23.2	-30.3	-2.5	-32.8	-13.0	-19.8
4	140.58	-21.8	-23.5	-3.0	-26.5	-13.0	-13.5
5	203.63	-35.6	-37.4	-2.1	-39.5	-13.0	-26.5
6	233.70	-38.8	-41.6	-1.7	-43.3	-13.0	-30.3

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

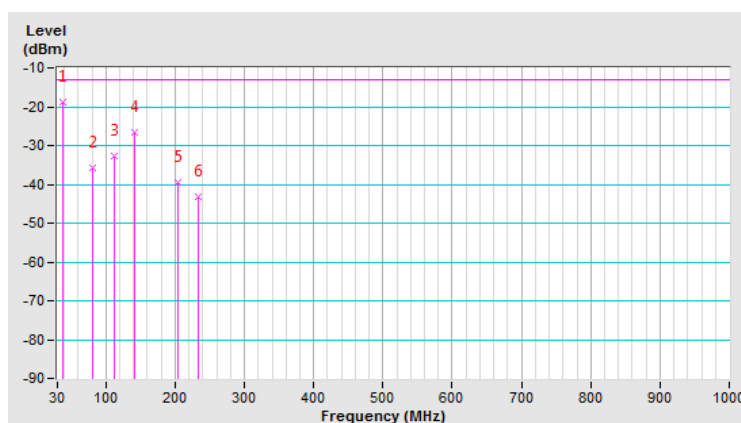

Above 1GHz

**For NB-IoT Guard Band:
QPSK_IoT Signal at Bottom**

Channel Bandwidth: 10MHz

Mode	874.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-56.8	-50.0	0.5	-49.5	-13.0	-36.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-57.4	-51.1	0.5	-50.6	-13.0	-37.6

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	881.5MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-55.8	-49.3	0.5	-48.8	-13.0	-35.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-56.6	-50.7	0.5	-50.2	-13.0	-37.2

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	889.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-56.2	-50.0	0.4	-49.6	-13.0	-36.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-57.5	-51.9	0.4	-51.5	-13.0	-38.5

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

QPSK_IoT Signal at Top

Channel Bandwidth: 10MHz

Mode	874.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-56.8	-50.0	0.5	-49.5	-13.0	-36.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-57.2	-51.0	0.5	-50.5	-13.0	-37.5

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	881.5MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-56.5	-50.0	0.5	-49.5	-13.0	-36.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-57.4	-51.5	0.5	-51.0	-13.0	-38.0

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	889.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-56.1	-49.9	0.4	-49.5	-13.0	-36.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-57.5	-51.9	0.4	-51.5	-13.0	-38.5

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

**For NB-IoT In-Band:
QPSK_IoT Signal at Bottom**

Channel Bandwidth: 10MHz

Mode	874.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-57.1	-50.4	0.5	-49.9	-13.0	-36.9
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-57.8	-51.5	0.5	-51.0	-13.0	-38.0

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	881.5MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-56.3	-49.9	0.5	-49.4	-13.0	-36.4
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-57.9	-52.0	0.5	-51.5	-13.0	-38.5

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	889.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-56.1	-49.9	0.4	-49.5	-13.0	-36.5
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-57.7	-52.1	0.4	-51.7	-13.0	-38.7

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

QPSK_IoT Signal at Top

Channel Bandwidth: 10MHz

Mode	874.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-56.5	-49.7	0.5	-49.2	-13.0	-36.2
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1748.00	-58.1	-51.9	0.5	-51.4	-13.0	-38.4

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	881.5MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-56.8	-50.3	0.5	-49.8	-13.0	-36.8
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1763.00	-58.2	-52.4	0.5	-51.9	-13.0	-38.9

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

Mode	889.0MHz	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Han Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-56.2	-50.0	0.4	-49.6	-13.0	-36.6
Antenna Polarity & Test Distance: Vertical at 3 M							
No.	Freq. (MHz)	Reading (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)
1	1778.00	-57.0	-51.4	0.4	-51.0	-13.0	-38.0

Remarks: ERP (dBm)= S.G Value (dBm) + Correction Factor (dB).

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---