



FCC RADIO TEST REPORT

FCC ID : BEJNT-15Z80T
Equipment : Notebook Computer
Brand Name : LG
Model Name : 15Z80T
Series Model Name : 15ZD80T, 15ZB80T, 15ZG80T, 15ZS80T,
15Z80T*(* can be 0 to 9 or A to Z or blank
denoting buyer request)
Applicant : LG Electronics USA, Inc.
111 Sylvan Avenue North Building
Englewood Cliffs, NJ 07632 United States
Manufacturer : LG ELECTRONICS INC.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jan. 08, 2025 and testing was performed from Jan. 21, 2025 to Mar. 07, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example	11
3 Test Result.....	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement	20
3.7 Antenna Requirements	22
4 List of Measuring Equipment	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4O0149-01C	01	Initial issue of report	Mar. 11, 2025
FR4O0149-01C	02	Revise Test Mode and Appendix C. This report is an updated version, replacing the report issued on Mar. 11, 2025.	Apr. 09, 2025
FR4O0149-01C	03	Revise Test Mode and Appendix C. This report is an updated version, replacing the report issued on Apr. 09, 2025.	Apr. 11, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Lucy Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11a/ax.	
Antenna Type WLAN <Main>: PIFA Antenna <Aux.>: PIFA Antenna	
Sample 1	EUT with INPAQ Antenna
Sample 2	EUT with Pulse Antenna
Integrated WLAN module	Brand Name: MediaTek Model Name: MT7922A12L

Antenna Information			
Antenna 1	Manufacturer	INPAQ	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Model number	DQ6WAPLEL33 (WA-P-LELE-02-018)	DQ6WAPLEL33 (WA-P-LELE-02-018)
	Peak gain (dBi)	Main Antenna: WLAN (2.4GHz): 2.88	Aux. Antenna: WLAN (2.4GHz): 2.79
Antenna 2	Manufacturer	Pulse	
	Antenna Type	PIFA Antenna	PIFA Antenna
	Model number	DQ602701000 (TQ27010)	DQ602701000 (TQ27010)
	Peak gain (dBi)	Main Antenna: WLAN (2.4GHz): 2.76	Aux. Antenna: WLAN (2.4GHz): 2.63

Remark:

1. All test items were performed with 15Z80T.
2. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.1.1 Antenna Directional Gain

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where G_1, G_2, \dots, G_N denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Chain 0	Chain 1	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4GHz	2.88	2.79	2.88	5.85	0.00	0.00

Calculation example:

If a device has two antenna, $G_{chain0} = 2.88$ dBi; $G_{chain1} = 2.79$ dBi

Directional gain of power measurement = $\max(2.88, 2.79) + 0 = 2.88$ dBi

Directional gain of PSD derived from formula which is

$10 \times \log \{ [10^{(2.88 \text{ dBi} / 20)} + 10^{(2.79 \text{ dBi} / 20)}]^2 / 2 \}$

= 5.85 dBi

Power and PSD limit reduction = Composite gain – 6 dBi, (min = 0)

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		

2.2 Test Mode

This device support 26/52/106/242/484-tone RU.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n mode is smaller than 802.11VHT mode, so all other conducted test is covered by 802.11VHT mode.

Full testing for nominal bandwidths (Full_RU).

Perform additional testing on Partial_RU modes for band edge, spurious emissions, output power and PSD.

The final test modes include the worst data rates for each modulation shown in the table below.


MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Remark: The conducted power level of each chain in MIMO mode is equal or higher than SISO mode.

Test Cases	
AC	Mode 1 :WLAN (2.4GHz) Tx + Earphone + USB HD + Monitor + Adapter for Sample 1
Conducted	1
Emission	Mode 2 Bluetooth Tx + Earphone + USB HD + Monitor + Adapter for Sample 1
Remark: <ol style="list-style-type: none"> The detailed Radiated test modes are shown in Appendix C. The worst case of Conducted Emission is mode 2; only the test data of it was reported. For Radiated Test Cases, the tests were performed with Sample 1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 	

2.3 Connection Diagram of Test System

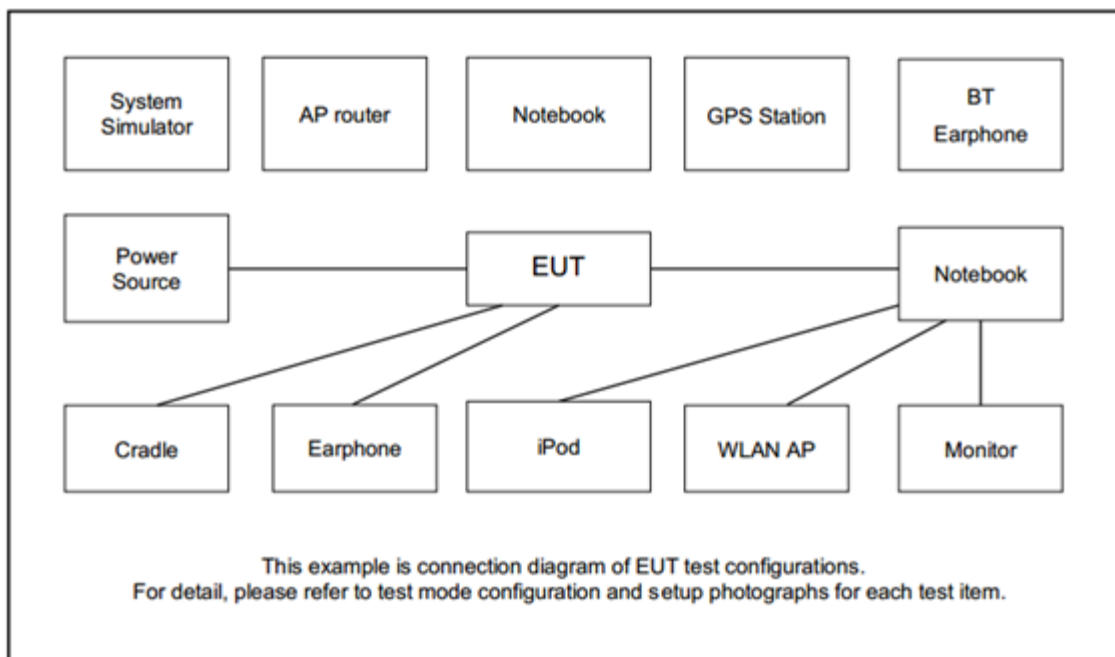

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LCD Monitor	Dell	ST2220LB	FCC DoC	N/A	Unshielded,1.8m
2.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded 1.8m	N/A
3.	Earphone	Sony	MH410C	N/A	Shielded,1.5m	N/A
4.	USB HD	ADATA	HV620S-1T	FCC DoC	Shielded,0.5m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “MT7922 QA 0.0.2.73” was installed in EUT which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

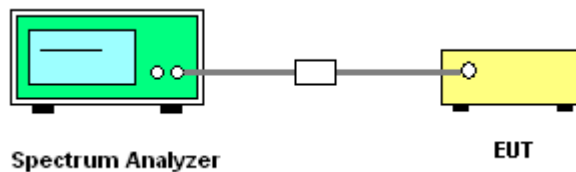

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

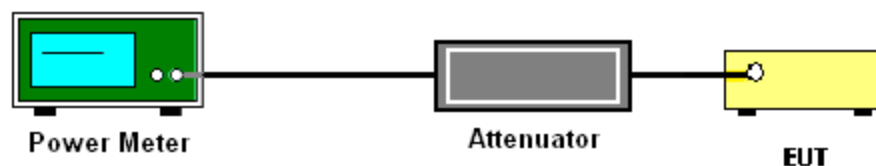

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit .

3.3.4 Test Setup

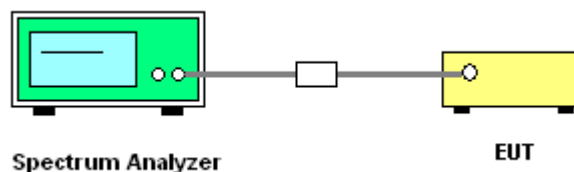

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

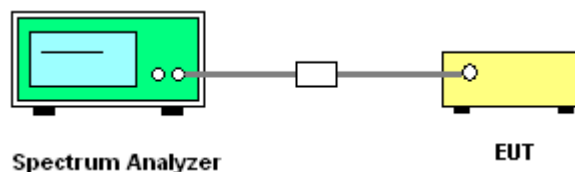

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

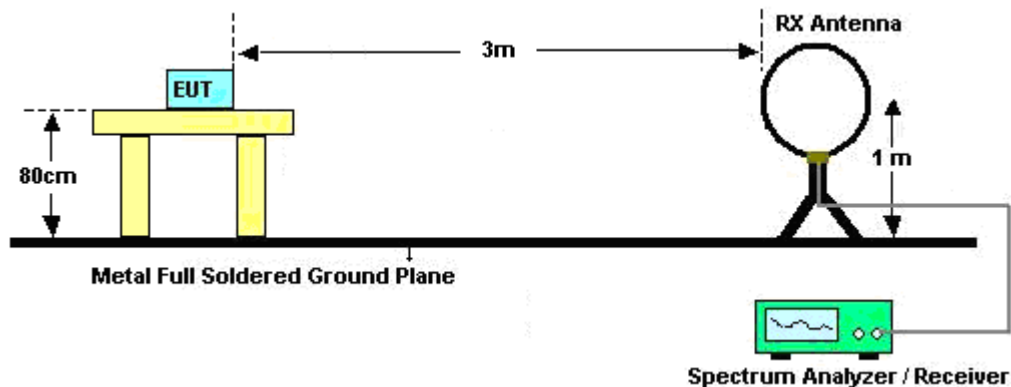


For radiated emissions from 30MHz to 1GHz

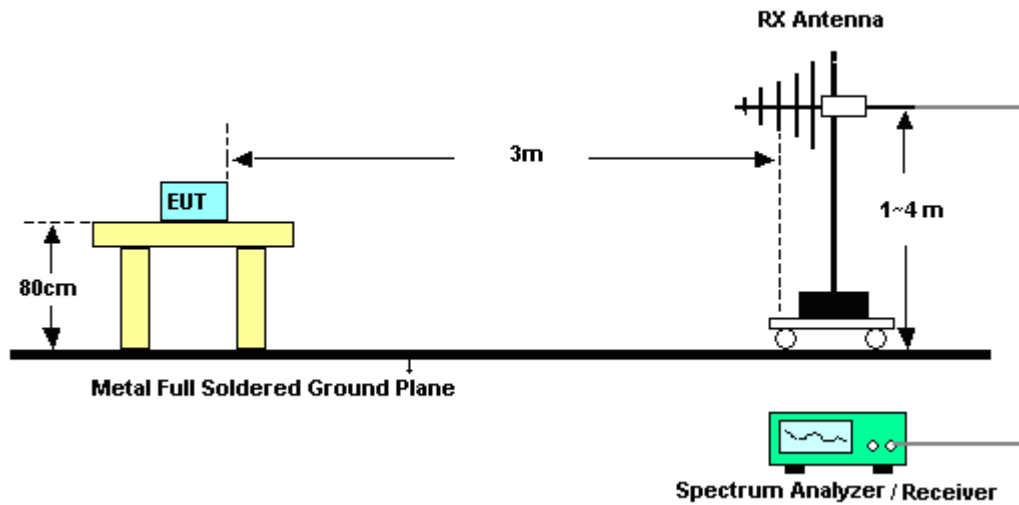

For radiated test from 1GHz to 18GHz

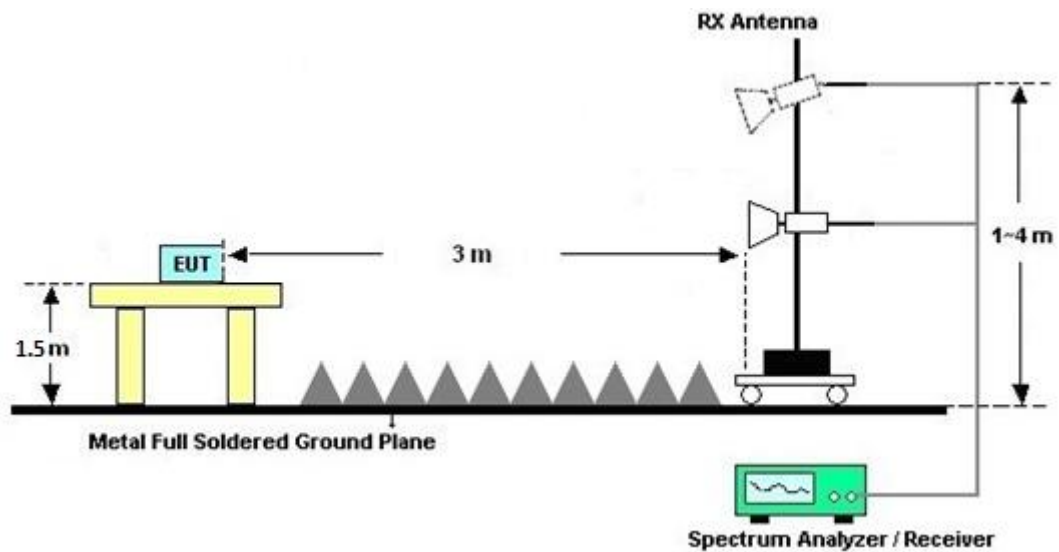

For radiated test above 18GHz

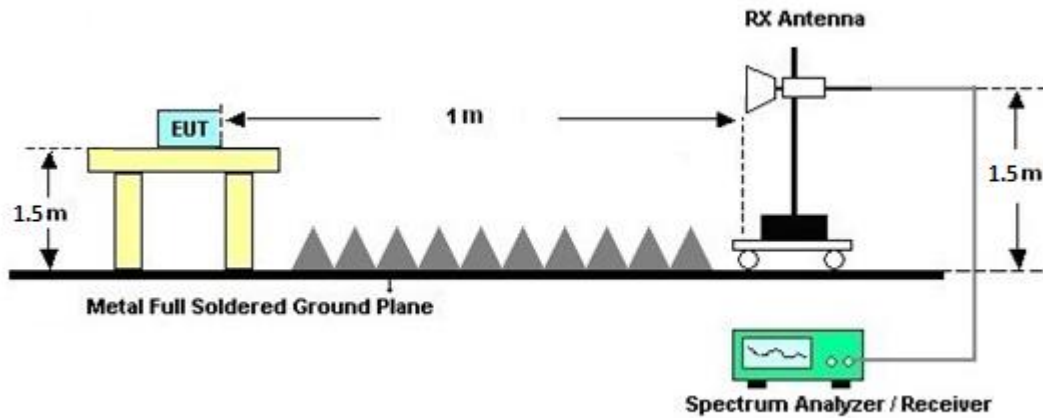

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

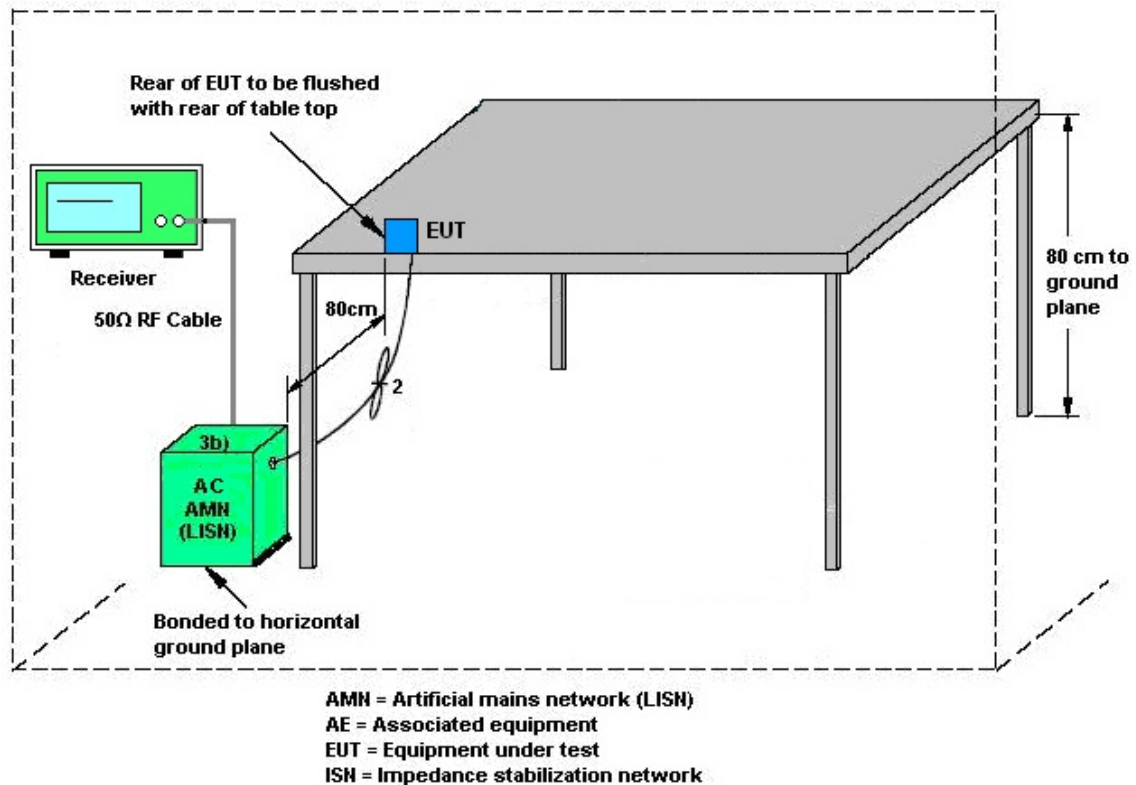

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 12, 2024	Feb. 07, 2025~Mar. 04, 2025	Apr. 11, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Feb. 07, 2025~Mar. 04, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Feb. 07, 2025~Mar. 04, 2025	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Feb. 07, 2025~Mar. 04, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Feb. 07, 2025~Mar. 04, 2025	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Jet-Pow er	JPA0118-55-303	1710001800055007	1GHz~18GHz	Jun. 13, 2024	Feb. 07, 2025~Mar. 04, 2025	Jun. 12, 2025	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Feb. 07, 2025~Mar. 04, 2025	May 26, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Feb. 07, 2025~Mar. 04, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Feb. 07, 2025~Mar. 04, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 07, 2025~Mar. 04, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 07, 2025~Mar. 04, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 07, 2025~Mar. 04, 2025	N/A	Radiation (03CH11-HY)
Softw are	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 07, 2025~Mar. 04, 2025	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	May 23, 2024	Feb. 07, 2025~Mar. 04, 2025	May 22, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 06, 2024	Feb. 07, 2025~Mar. 04, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Feb. 07, 2025~Mar. 04, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 06, 2024	Feb. 07, 2025~Mar. 04, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
Filter	Wainw right	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Feb. 07, 2025~Mar. 04, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainw right	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Feb. 07, 2025~Mar. 04, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Feb. 07, 2025~Mar. 04, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Jan. 21, 2025~Mar. 07, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO10 (NO:248)	10MHz~6GHz	Dec. 27, 2024	Jan. 21, 2025~Mar. 07, 2025	Dec. 26, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Aug. 14, 2024	Jan. 21, 2025~Mar. 07, 2025	Aug. 13, 2025	Conducted (TH05-HY)
Sw itch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Jan. 21, 2025~Mar. 07, 2025	May 19, 2025	Conducted (TH05-HY)
Softw are	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Jan. 21, 2025~Mar. 07, 2025	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Feb. 04, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Feb. 04, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	Feb. 04, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Feb. 04, 2025	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Feb. 04, 2025	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Feb. 04, 2025	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Feb. 04, 2025	Sep. 22, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 20, 2024	Feb. 04, 2025	Feb. 19, 2025	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Eason Huang	Temperature:	21~25	°C
Test Date:	2025/01/21~2025/03/07	Relative Humidity:	51~54	%

Remark: For Conducted Test Items, Ant. 1 means Chain 0 (Main) and Ant. 2 means Chain 1 (Aux.).

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	2	1	2412	12.55	12.70	8.05	8.51	0.50	Pass
11b	1Mbps	2	6	2437	12.57	12.56	8.06	7.56	0.50	Pass
11b	1Mbps	2	11	2462	12.57	12.56	8.04	8.03	0.50	Pass
11b	1Mbps	2	12	2467	12.57	12.54	8.05	8.04	0.50	Pass
11b	1Mbps	2	13	2472	12.62	12.56	8.04	8.52	0.50	Pass
11g	6Mbps	2	1	2412	17.22	17.10	16.29	15.72	0.50	Pass
11g	6Mbps	2	6	2437	17.15	19.88	15.76	15.70	0.50	Pass
11g	6Mbps	2	11	2462	17.17	17.19	15.80	15.91	0.50	Pass
11g	6Mbps	2	12	2467	17.37	17.19	16.26	16.31	0.50	Pass
11g	6Mbps	2	13	2472	17.20	17.02	16.28	16.31	0.50	Pass
VHT20	MCS0	2	1	2412	18.17	18.08	17.16	17.57	0.50	Pass
VHT20	MCS0	2	6	2437	20.42	18.67	17.55	17.52	0.50	Pass
VHT20	MCS0	2	11	2462	18.29	18.20	16.90	17.51	0.50	Pass
VHT20	MCS0	2	12	2467	18.23	18.14	17.28	16.92	0.50	Pass
VHT20	MCS0	2	13	2472	18.13	17.99	17.27	17.57	0.50	Pass
VHT40	MCS0	2	3	2422	36.95	36.81	35.08	35.10	0.50	Pass
VHT40	MCS0	2	6	2437	37.95	37.03	36.34	35.10	0.50	Pass
VHT40	MCS0	2	9	2452	37.02	36.26	35.08	33.80	0.50	Pass
VHT40	MCS0	2	10	2457	37.02	36.22	35.11	35.01	0.50	Pass
VHT40	MCS0	2	11	2462	37.03	36.31	35.12	35.04	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	20.70	20.90	23.81	30.00		2.88		26.69		36.00		Pass
11b	1Mbps	2	6	2437	20.30	20.50	23.41	30.00		2.88		26.29		36.00		Pass
11b	1Mbps	2	11	2462	19.70	19.90	22.81	30.00		2.88		25.69		36.00		Pass
11b	1Mbps	2	12	2467	18.30	18.40	21.36	30.00		2.88		24.24		36.00		Pass
11b	1Mbps	2	13	2472	16.20	16.50	19.36	30.00		2.88		22.24		36.00		Pass
11g	6Mbps	2	1	2412	17.00	17.30	20.16	30.00		2.88		23.04		36.00		Pass
11g	6Mbps	2	6	2437	20.40	20.60	23.51	30.00		2.88		26.39		36.00		Pass
11g	6Mbps	2	11	2462	17.20	17.30	20.26	30.00		2.88		23.14		36.00		Pass
11g	6Mbps	2	12	2467	15.00	15.20	18.11	30.00		2.88		20.99		36.00		Pass
11g	6Mbps	2	13	2472	11.90	12.00	14.96	30.00		2.88		17.84		36.00		Pass
HT20	MCS0	2	1	2412	16.90	17.30	20.11	30.00		2.88		22.99		36.00		Pass
HT20	MCS0	2	6	2437	19.70	19.90	22.81	30.00		2.88		25.69		36.00		Pass
HT20	MCS0	2	11	2462	17.00	17.20	20.11	30.00		2.88		22.99		36.00		Pass
HT20	MCS0	2	12	2467	13.40	13.60	16.51	30.00		2.88		19.39		36.00		Pass
HT20	MCS0	2	13	2472	9.50	9.70	12.61	30.00		2.88		15.49		36.00		Pass
HT40	MCS0	2	3	2422	15.40	15.70	18.56	30.00		2.88		21.44		36.00		Pass
HT40	MCS0	2	6	2437	16.90	17.10	20.01	30.00		2.88		22.89		36.00		Pass
HT40	MCS0	2	9	2452	15.70	15.90	18.81	30.00		2.88		21.69		36.00		Pass
HT40	MCS0	2	10	2457	12.70	13.00	15.86	30.00		2.88		18.74		36.00		Pass
HT40	MCS0	2	11	2462	9.70	9.90	12.81	30.00		2.88		15.69		36.00		Pass
VHT20	MCS0	2	1	2412	17.00	17.40	20.21	30.00		2.88		23.09		36.00		Pass
VHT20	MCS0	2	6	2437	19.80	20.00	22.91	30.00		2.88		25.79		36.00		Pass
VHT20	MCS0	2	11	2462	17.10	17.30	20.21	30.00		2.88		23.09		36.00		Pass
VHT20	MCS0	2	12	2467	13.50	13.70	16.61	30.00		2.88		19.49		36.00		Pass
VHT20	MCS0	2	13	2472	9.60	9.80	12.71	30.00		2.88		15.59		36.00		Pass
VHT40	MCS0	2	3	2422	15.50	15.80	18.66	30.00		2.88		21.54		36.00		Pass
VHT40	MCS0	2	6	2437	17.00	17.20	20.11	30.00		2.88		22.99		36.00		Pass
VHT40	MCS0	2	9	2452	15.80	16.00	18.91	30.00		2.88		21.79		36.00		Pass
VHT40	MCS0	2	10	2457	12.80	13.10	15.96	30.00		2.88		18.84		36.00		Pass
VHT40	MCS0	2	11	2462	9.80	10.00	12.91	30.00		2.88		15.79		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO												
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	-1.56	-1.17	1.84	5.85		8.00		Pass
11b	1Mbps	2	6	2437	-2.18	-2.09	0.92	5.85		8.00		Pass
11b	1Mbps	2	11	2462	-2.64	-2.89	0.37	5.85		8.00		Pass
11b	1Mbps	2	12	2467	-4.81	-4.41	-1.40	5.85		8.00		Pass
11b	1Mbps	2	13	2472	-6.96	-6.43	-3.42	5.85		8.00		Pass
11g	6Mbps	2	1	2412	-7.83	-7.14	-4.13	5.85		8.00		Pass
11g	6Mbps	2	6	2437	-5.21	-5.01	-2.00	5.85		8.00		Pass
11g	6Mbps	2	11	2462	-7.47	-7.50	-4.46	5.85		8.00		Pass
11g	6Mbps	2	12	2467	-10.73	-10.51	-7.50	5.85		8.00		Pass
11g	6Mbps	2	13	2472	-12.93	-12.92	-9.91	5.85		8.00		Pass
VHT20	MCS0	2	1	2412	-8.54	-8.39	-5.38	5.85		8.00		Pass
VHT20	MCS0	2	6	2437	-5.22	-5.40	-2.21	5.85		8.00		Pass
VHT20	MCS0	2	11	2462	-8.27	-8.50	-5.26	5.85		8.00		Pass
VHT20	MCS0	2	12	2467	-11.85	-11.17	-8.16	5.85		8.00		Pass
VHT20	MCS0	2	13	2472	-15.89	-15.89	-12.88	5.85		8.00		Pass
VHT40	MCS0	2	3	2422	-12.48	-12.46	-9.45	5.85		8.00		Pass
VHT40	MCS0	2	6	2437	-12.71	-12.01	-9.00	5.85		8.00		Pass
VHT40	MCS0	2	9	2452	-12.19	-13.42	-9.18	5.85		8.00		Pass
VHT40	MCS0	2	10	2457	-14.69	-14.85	-11.68	5.85		8.00		Pass
VHT40	MCS0	2	11	2462	-20.21	-19.13	-16.12	5.85		8.00		Pass

Note: Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant2	Ant1	Ant2		
HE20	MCS0	2	1	2412	Full	18.93	18.96	18.76	18.62	0.50	Pass
HE20	MCS0	2	6	2437	Full	19.62	19.33	18.87	18.32	0.50	Pass
HE20	MCS0	2	11	2462	Full	19.18	19.23	18.41	18.15	0.50	Pass
HE20	MCS0	2	12	2467	Full	18.88	18.93	18.25	18.44	0.50	Pass
HE20	MCS0	2	13	2472	Full	18.93	18.92	18.81	18.79	0.50	Pass
HE40	MCS0	2	3	2422	Full	37.96	38.54	37.04	37.98	0.50	Pass
HE40	MCS0	2	6	2437	Full	38.51	38.09	38.13	35.09	0.50	Pass
HE40	MCS0	2	9	2452	Full	38.04	38.09	35.58	36.35	0.50	Pass
HE40	MCS0	2	10	2457	Full	37.82	37.89	35.09	36.33	0.50	Pass
HE40	MCS0	2	11	2462	Full	38.00	37.99	37.13	36.36	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	17.10	17.70	20.42	30.00		2.88		23.30		36.00		Pass
HE20	MCS0	2	1	2412	26/0	14.10	16.50	18.47	30.00		2.88		21.35		36.00		Pass
HE20	MCS0	2	1	2412	106/53	16.00	17.70	19.94	30.00		2.88		22.82		36.00		Pass
HE20	MCS0	2	6	2437	Full	20.00	20.20	23.11	30.00		2.88		25.99		36.00		Pass
HE20	MCS0	2	6	2437	52/38	20.60	20.00	23.32	30.00		2.88		26.20		36.00		Pass
HE20	MCS0	2	11	2462	Full	17.40	18.00	20.72	30.00		2.88		23.60		36.00		Pass
HE20	MCS0	2	11	2462	26/8	16.60	16.20	19.41	30.00		2.88		22.29		36.00		Pass
HE20	MCS0	2	11	2462	106/54	17.50	17.20	20.36	30.00		2.88		23.24		36.00		Pass
HE20	MCS0	2	12	2467	Full	13.70	13.80	16.76	30.00		2.88		19.64		36.00		Pass
HE20	MCS0	2	12	2467	26/8	14.10	13.10	16.64	30.00		2.88		19.52		36.00		Pass
HE20	MCS0	2	12	2467	106/54	15.60	14.70	18.18	30.00		2.88		21.06		36.00		Pass
HE20	MCS0	2	13	2472	Full	10.00	10.00	13.01	30.00		2.88		15.89		36.00		Pass
HE20	MCS0	2	13	2472	26/8	11.10	11.30	14.21	30.00		2.88		17.09		36.00		Pass
HE20	MCS0	2	13	2472	106/54	11.50	11.60	14.56	30.00		2.88		17.44		36.00		Pass
HE40	MCS0	2	3	2422	Full	15.50	15.90	18.71	30.00		2.88		21.59		36.00		Pass
HE40	MCS0	2	6	2437	Full	17.10	17.40	20.26	30.00		2.88		23.14		36.00		Pass
HE40	MCS0	2	9	2452	Full	15.90	16.20	19.06	30.00		2.88		21.94		36.00		Pass
HE40	MCS0	2	10	2457	Full	13.40	13.40	16.41	30.00		2.88		19.29		36.00		Pass
HE40	MCS0	2	11	2462	Full	10.00	10.10	13.06	30.00		2.88		15.94		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band MIMO													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	-8.82	-8.66	-5.65	5.85		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-4.09	-2.02	0.99	5.85		8.00		Pass
HE20	MCS0	2	1	2412	106/53	-7.66	-5.72	-2.71	5.85		8.00		Pass
HE20	MCS0	2	6	2437	Full	-5.30	-5.89	-2.29	5.85		8.00		Pass
HE20	MCS0	2	6	2437	52/38	-0.39	-0.21	2.80	5.85		8.00		Pass
HE20	MCS0	2	11	2462	Full	-8.73	-8.57	-5.56	5.85		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-1.55	-1.14	1.87	5.85		8.00		Pass
HE20	MCS0	2	11	2462	106/54	-7.00	-6.95	-3.94	5.85		8.00		Pass
HE20	MCS0	2	12	2467	Full	-12.03	-12.35	-9.02	5.85		8.00		Pass
HE20	MCS0	2	12	2467	26/8	-2.81	-4.20	0.20	5.85		8.00		Pass
HE20	MCS0	2	12	2467	106/54	-7.36	-8.82	-4.35	5.85		8.00		Pass
HE20	MCS0	2	13	2472	Full	-15.65	-15.42	-12.41	5.85		8.00		Pass
HE20	MCS0	2	13	2472	26/8	-7.54	-7.28	-4.27	5.85		8.00		Pass
HE20	MCS0	2	13	2472	106/54	-12.47	-12.50	-9.46	5.85		8.00		Pass
HE40	MCS0	2	3	2422	Full	-11.63	-13.62	-8.62	5.85		8.00		Pass
HE40	MCS0	2	6	2437	Full	-13.29	-11.33	-8.32	5.85		8.00		Pass
HE40	MCS0	2	9	2452	Full	-11.72	-12.03	-8.71	5.85		8.00		Pass
HE40	MCS0	2	10	2457	Full	-15.20	-14.95	-11.94	5.85		8.00		Pass
HE40	MCS0	2	11	2462	Full	-18.75	-19.04	-15.74	5.85		8.00		Pass

Note: Measured power density (dBm) has offset with cable loss.


**6dB and 99% Occupied Bandwidth**

MIMO <Ant. 1+2>

<802.11b>

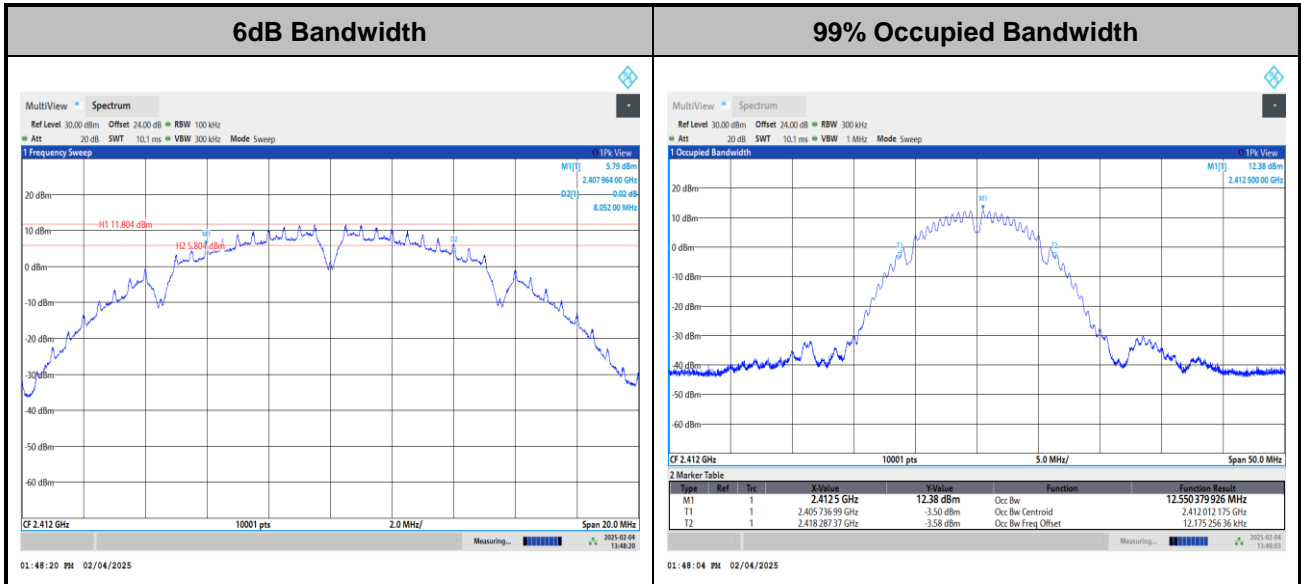


<802.11g>

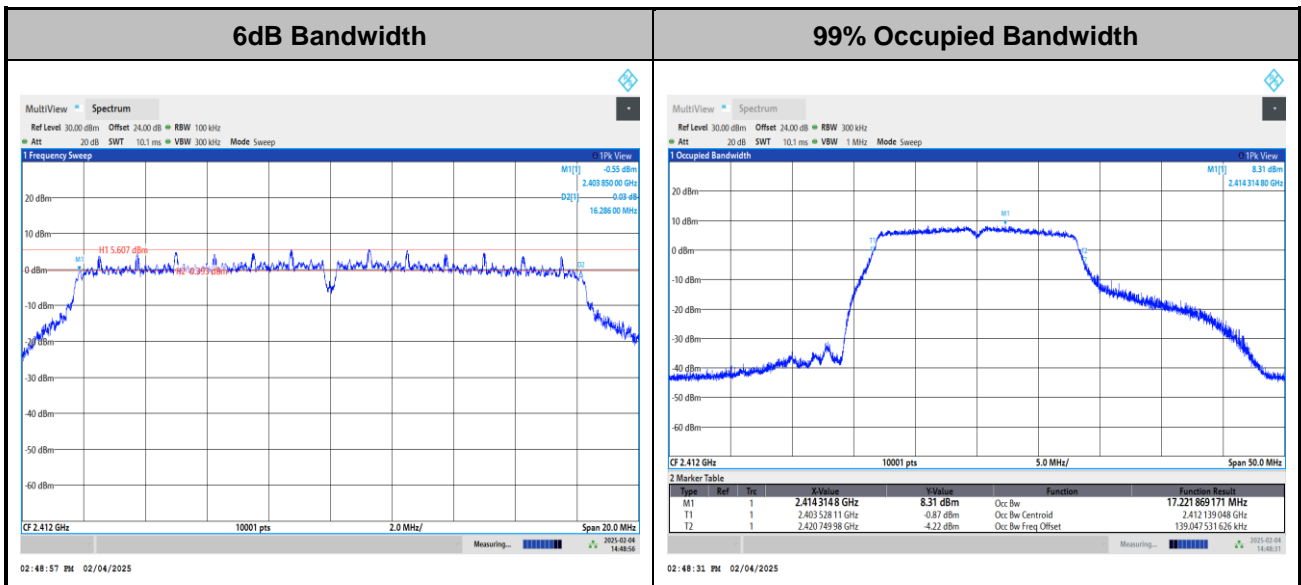




<802.11ac VHT20>

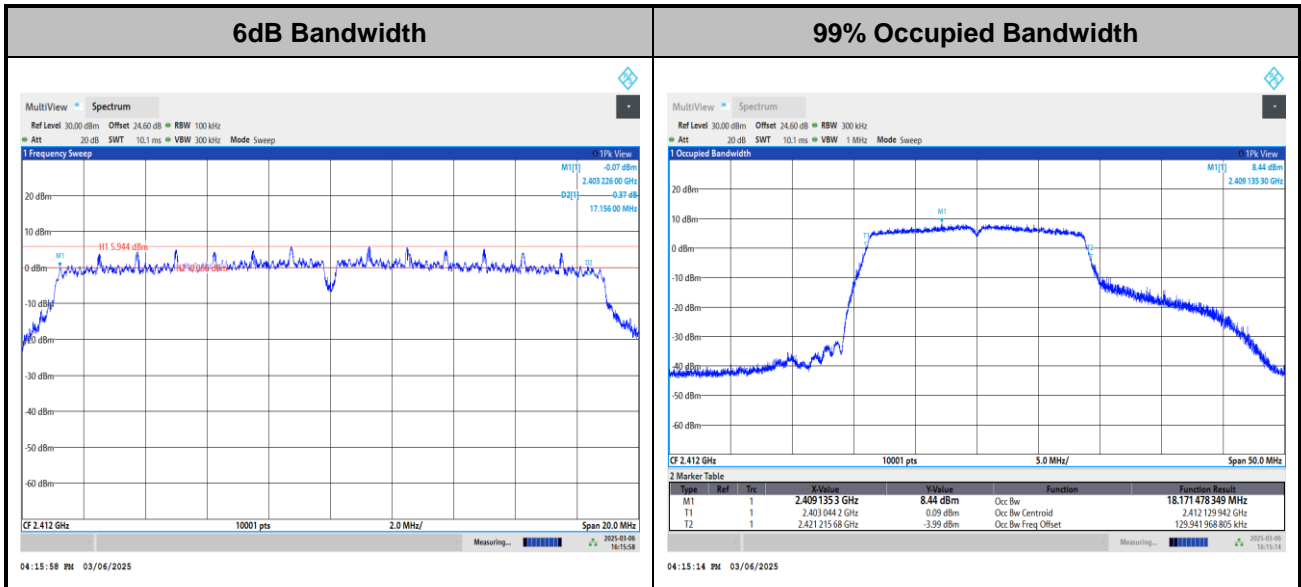

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT40>

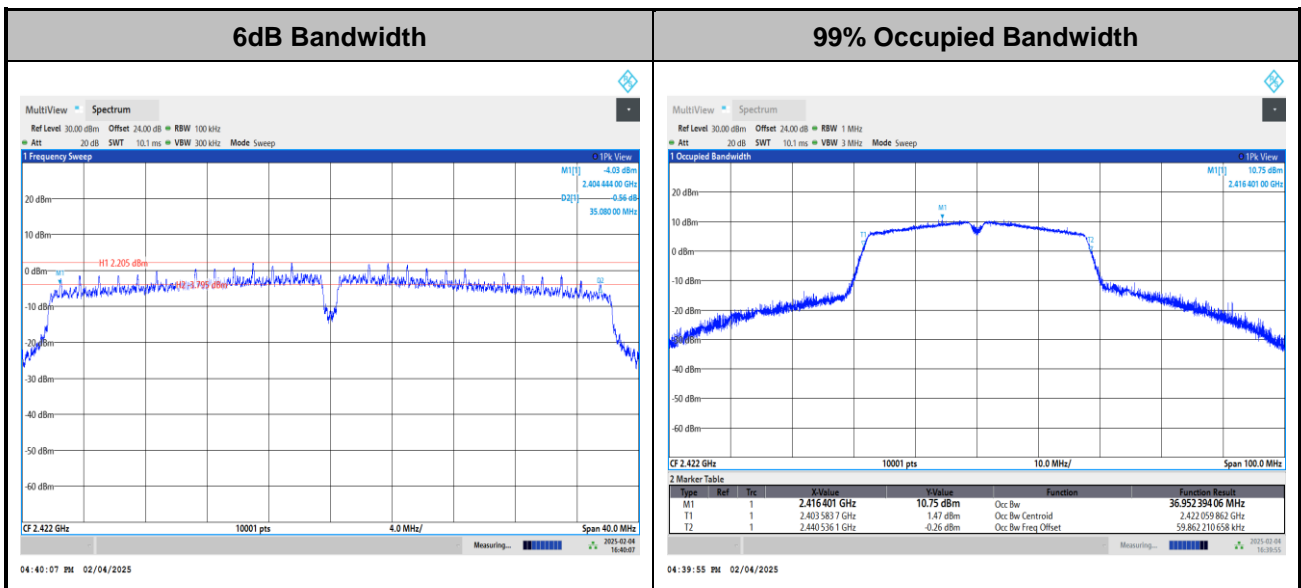

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE20>

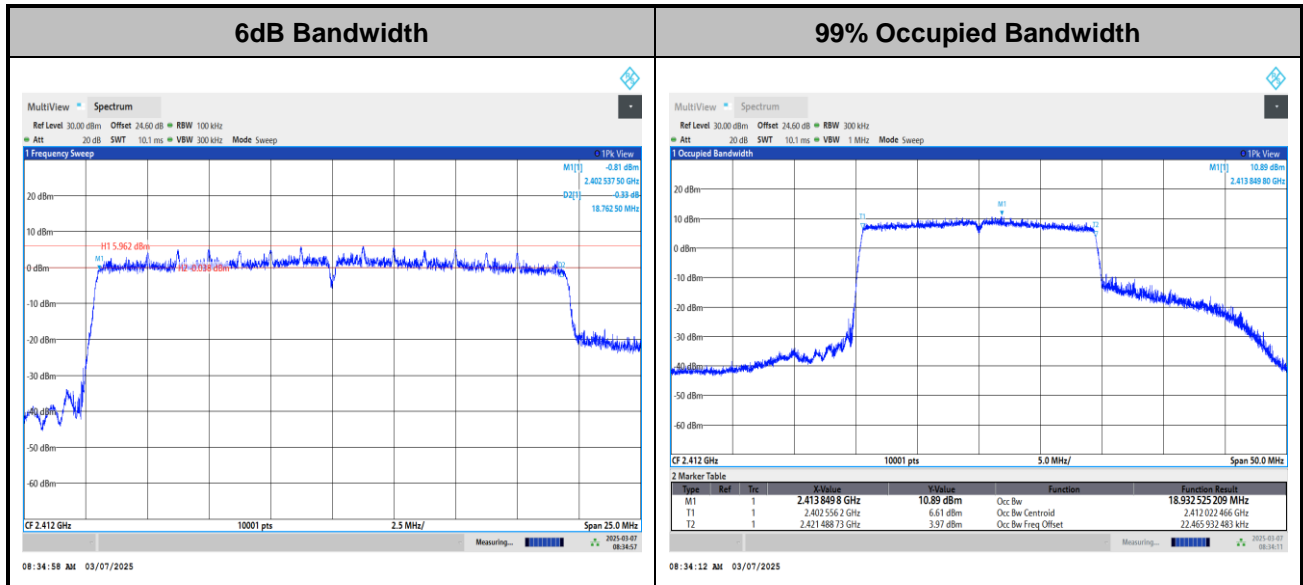

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE40>

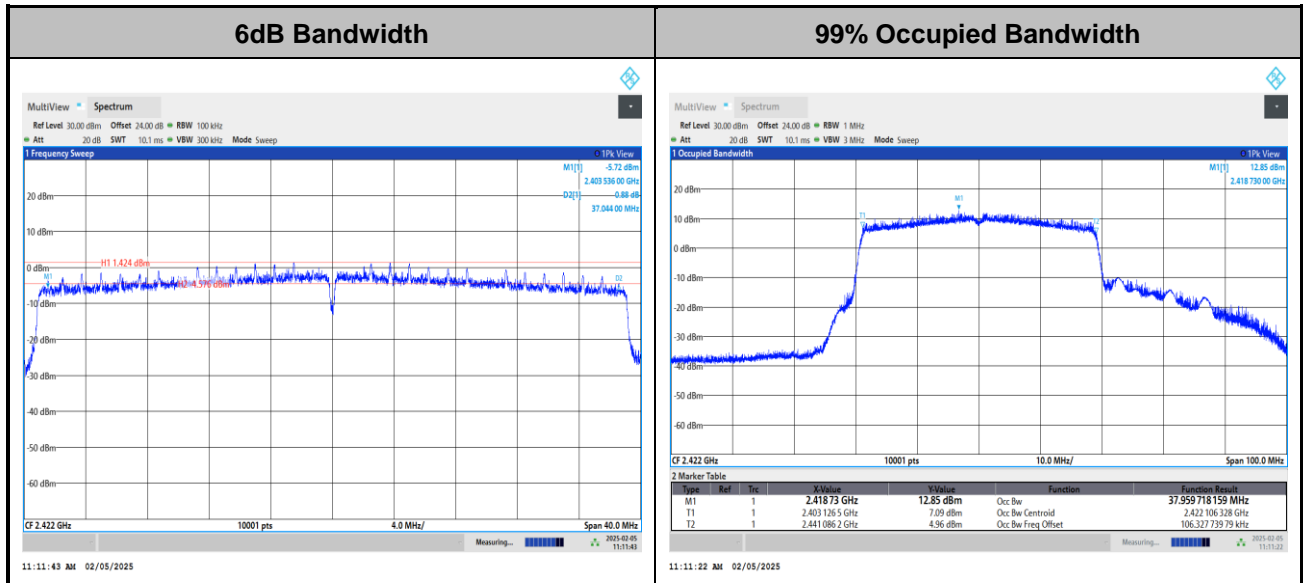



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Power Spectral Density(dBm/3kHz)**

<802.11b>

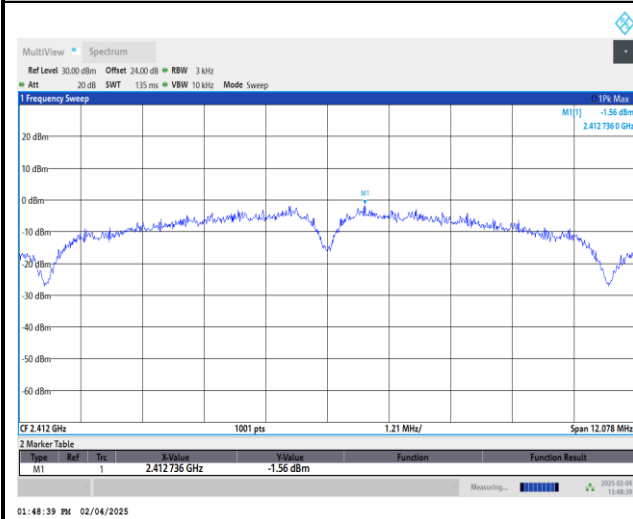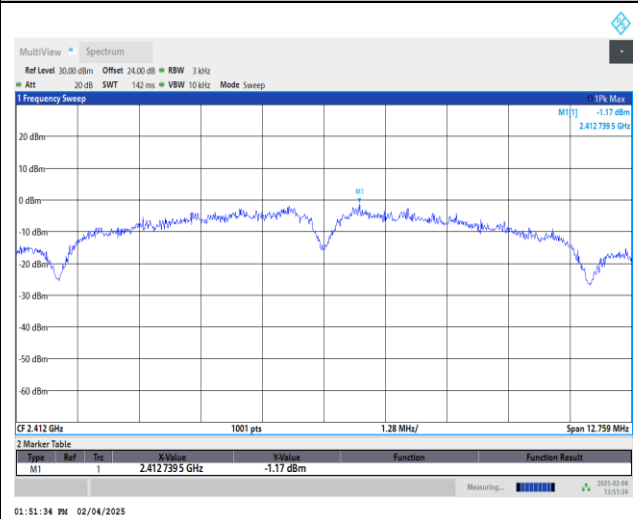Maximum Power Density Plot (dBm/3kHz)**MIMO Ant 1****MIMO Ant 2**

<802.11g>

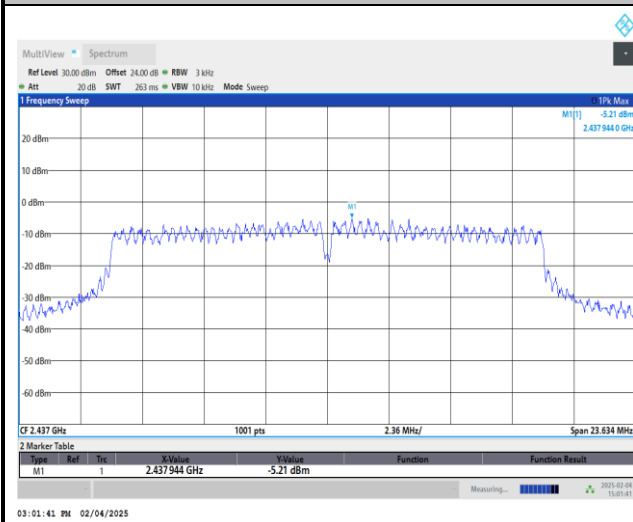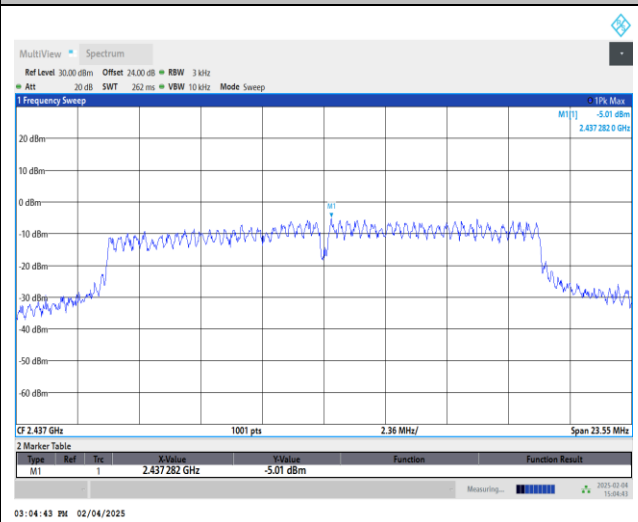
Maximum Power Density Plot (dBm/3kHz)**MIMO Ant 1****MIMO Ant 2**




<802.11ac VHT20>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

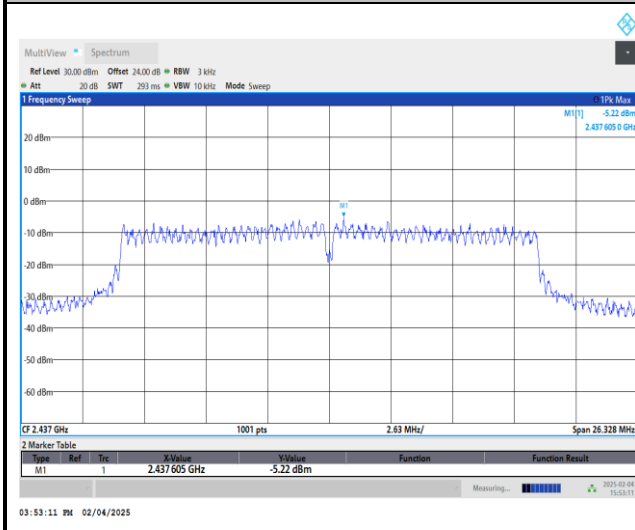


MIMO Ant 2

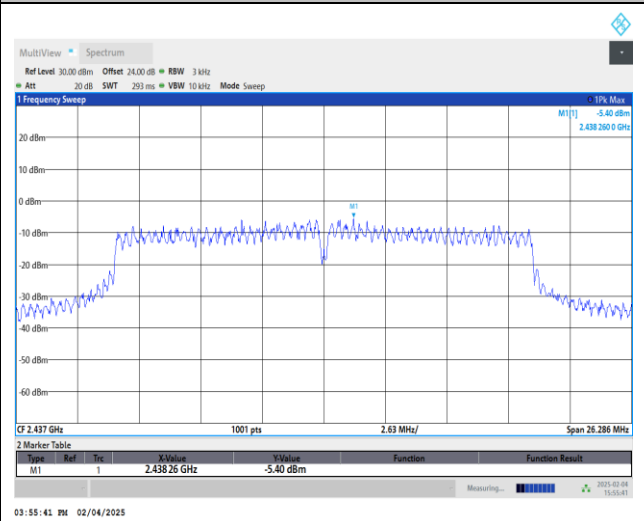


<802.11ac VHT40>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

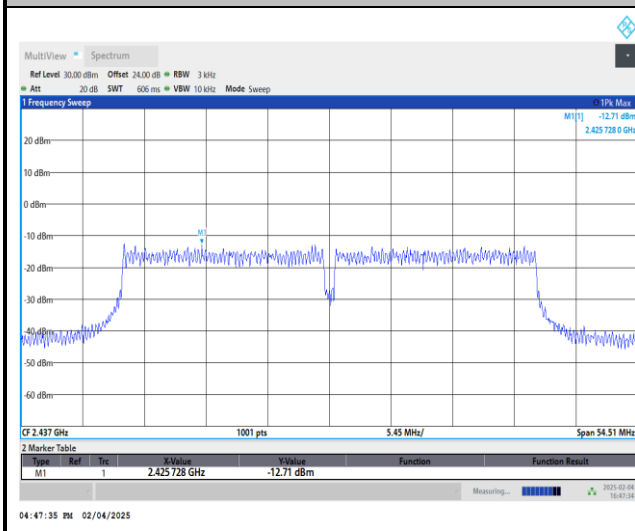

MIMO Ant 2

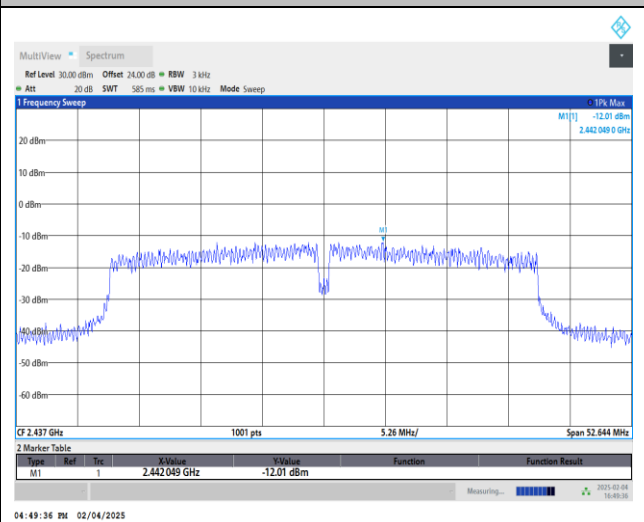





<802.11ax HE20>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

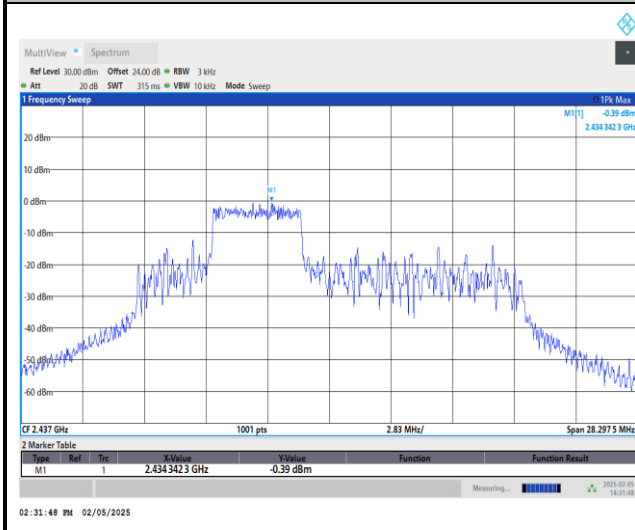


MIMO Ant 2

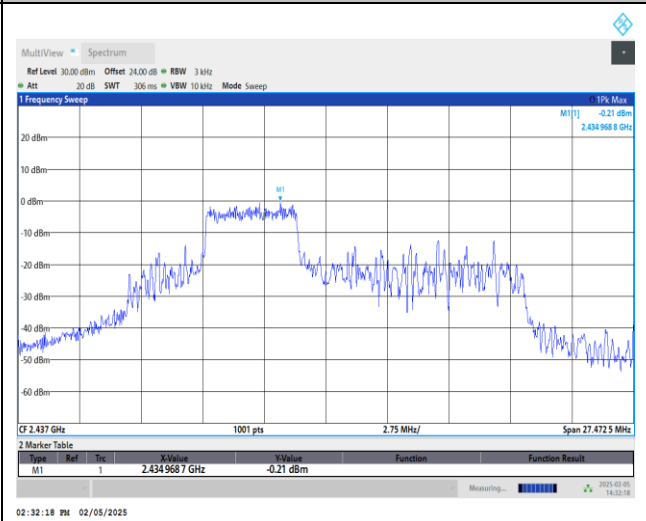


<802.11ax HE40>

Maximum Power Density Plot (dBm/3kHz)

MIMO Ant 1

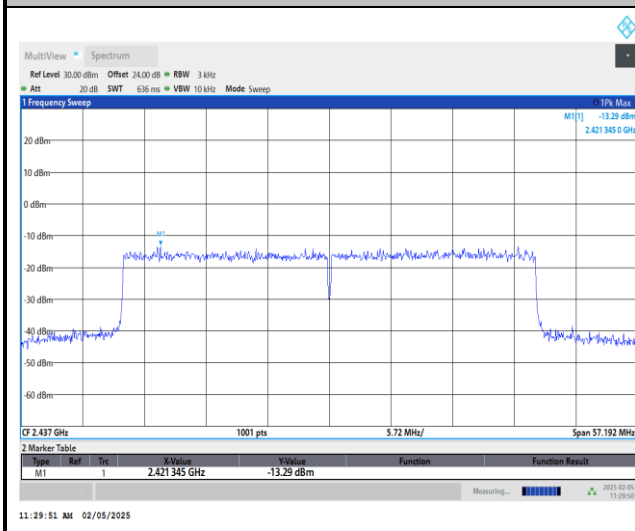

MIMO Ant 2




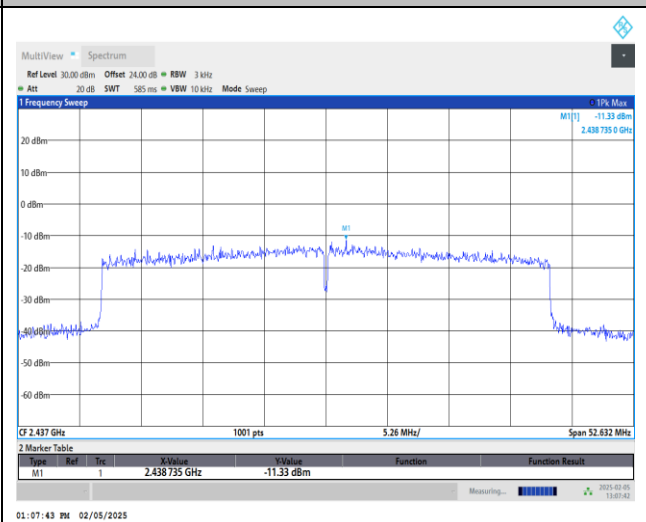


**Band Edges and Spurious Emission**

Number of TX = 2, Ant. 1 (Measured)

Test Mode : 802.11b

Test Channel : 01

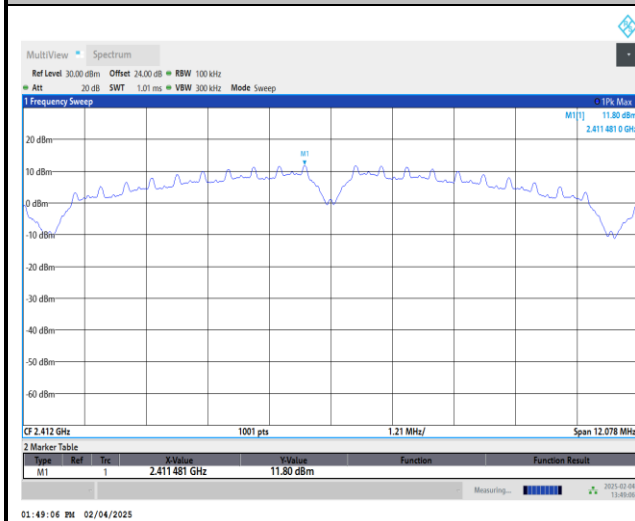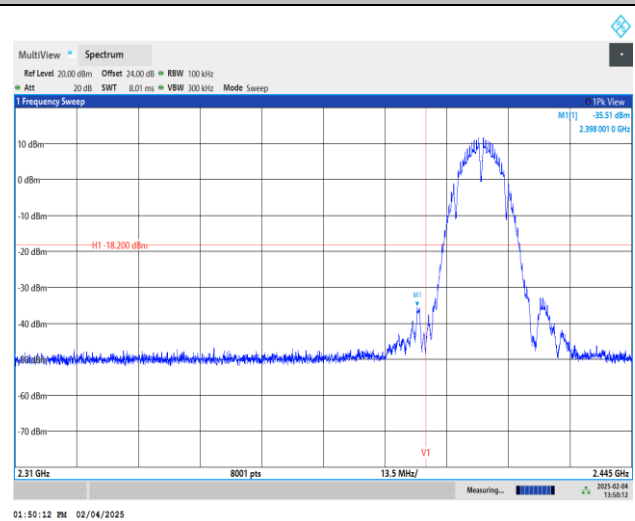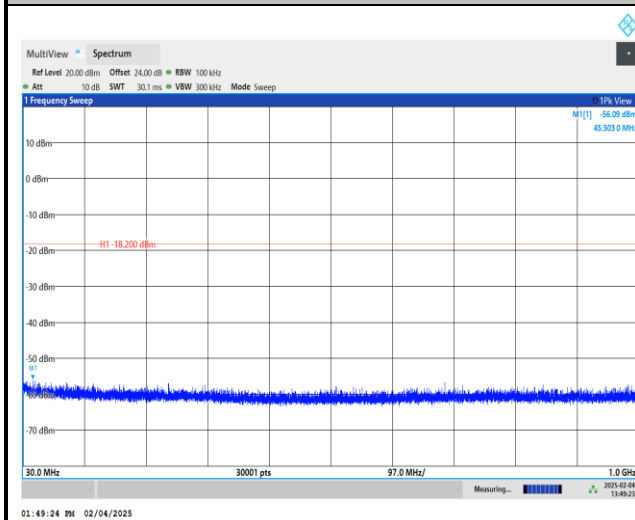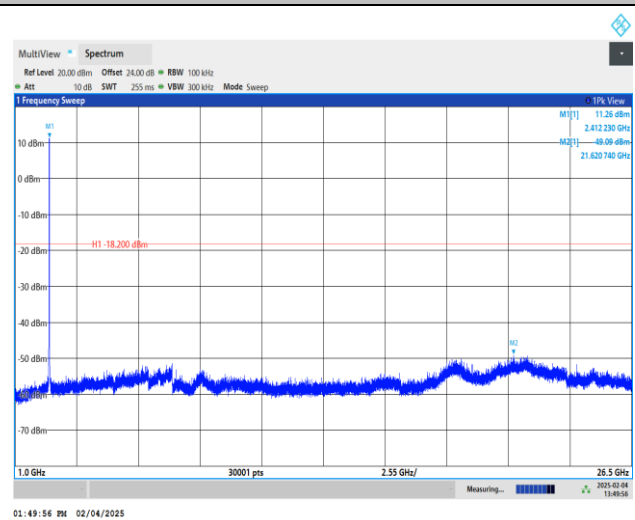
100kHz PSD reference Level**Channel 01 Plot****Spurious Emission 30MHz~1GHz****Spurious Emission 1GHz~26.5GHz**



Test Mode : 802.11b


Test Channel : 06

100kHz PSD reference Level

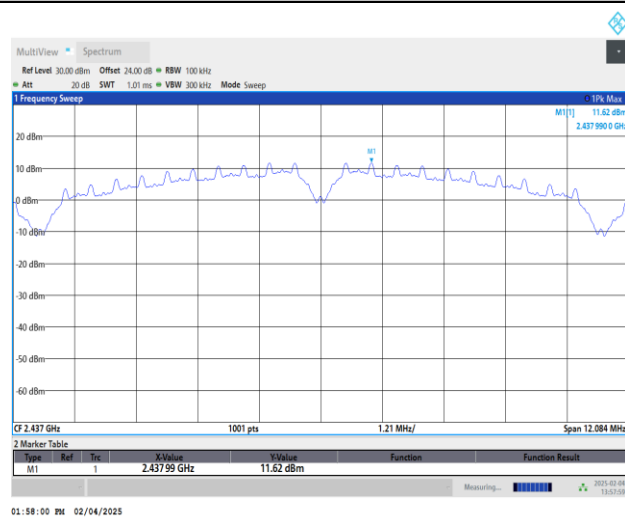


Channel 06 Plot

Spurious Emission 30MHz~1GHz

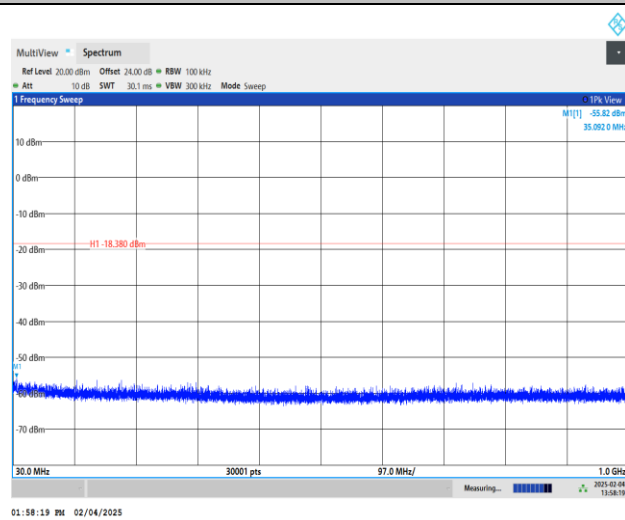

Spurious Emission 1GHz~26.5GHz

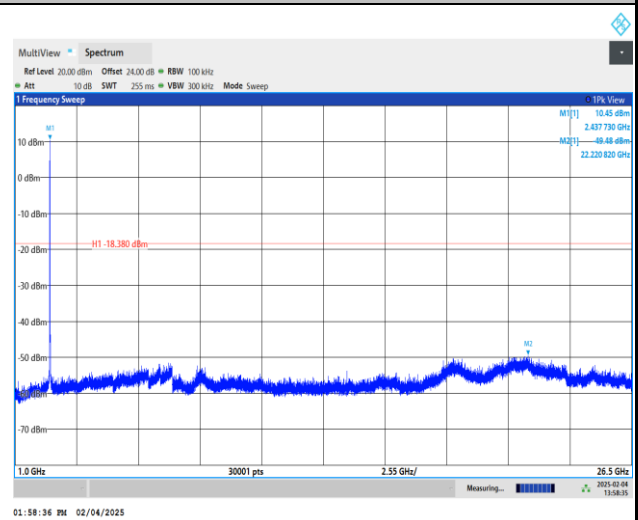





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

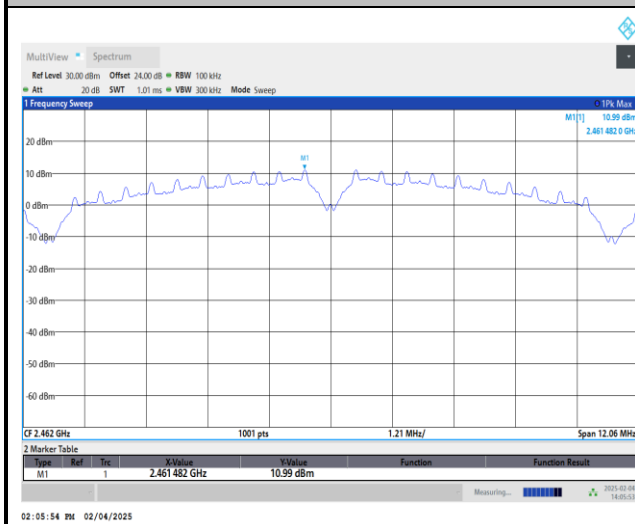


Channel 11 Plot

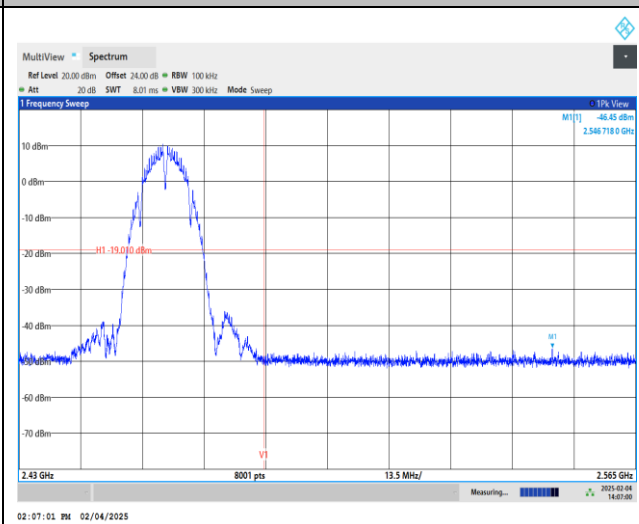

Spurious Emission 30MHz~1GHz

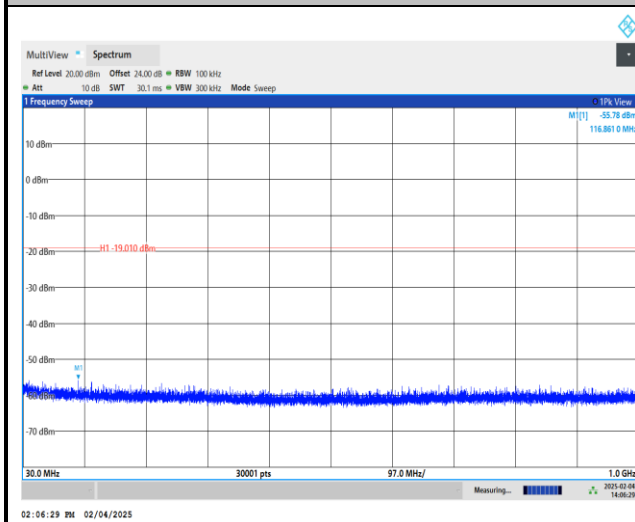

Spurious Emission 1GHz~26.5GHz

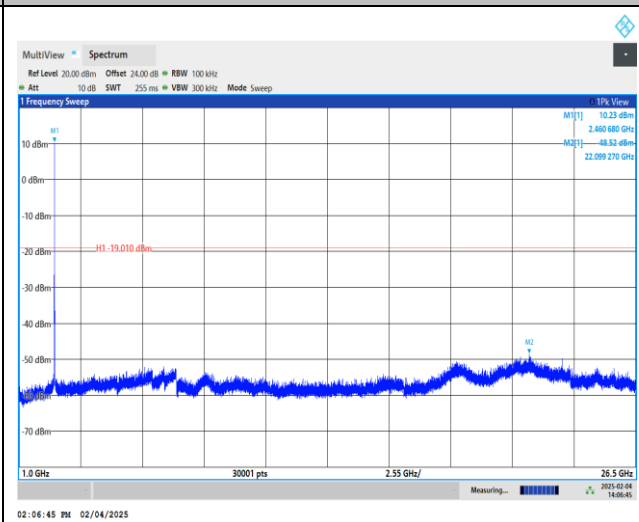





Test Mode : 802.11b

Test Channel : 12


100kHz PSD reference Level

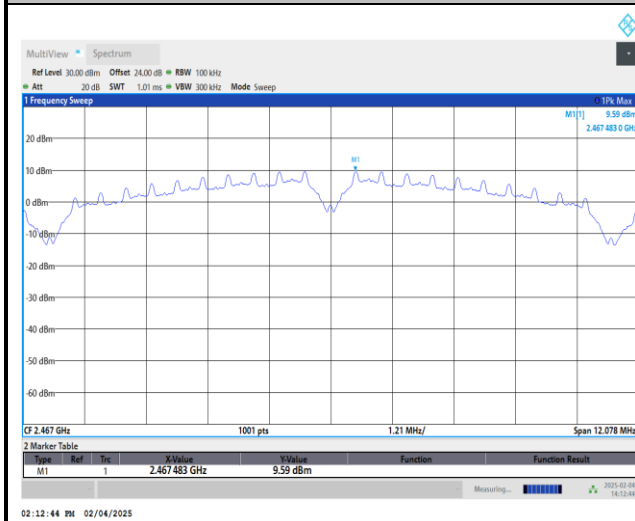


Channel 12 Plot

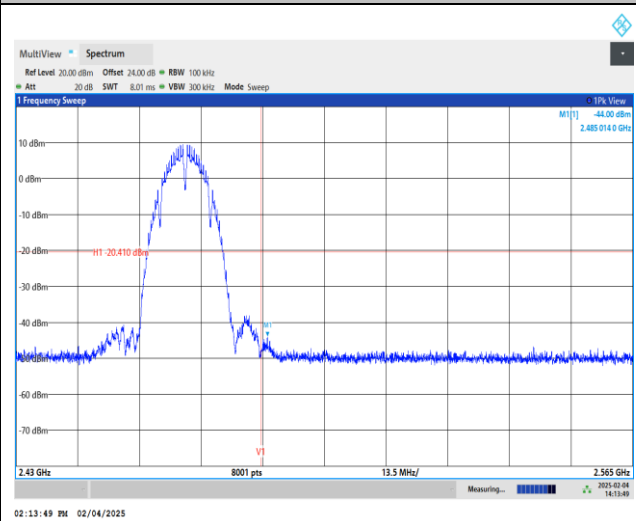

Spurious Emission 30MHz~1GHz

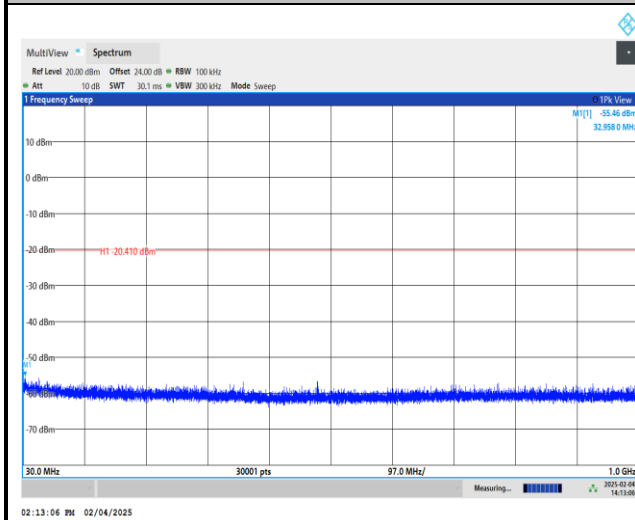

Spurious Emission 1GHz~26.5GHz

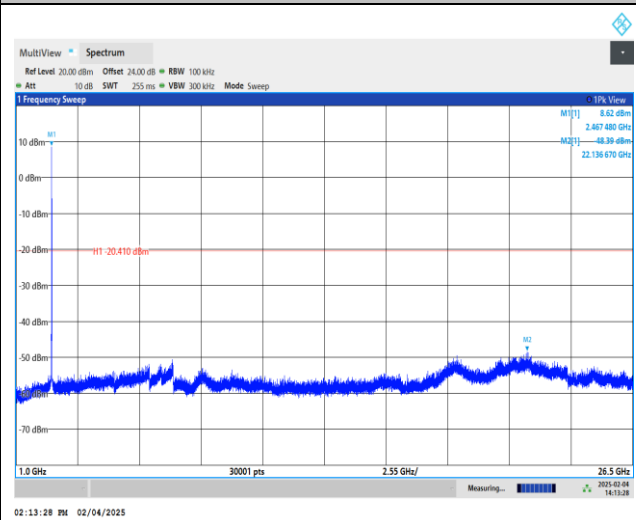





Test Mode : 802.11b

Test Channel : 13


100kHz PSD reference Level

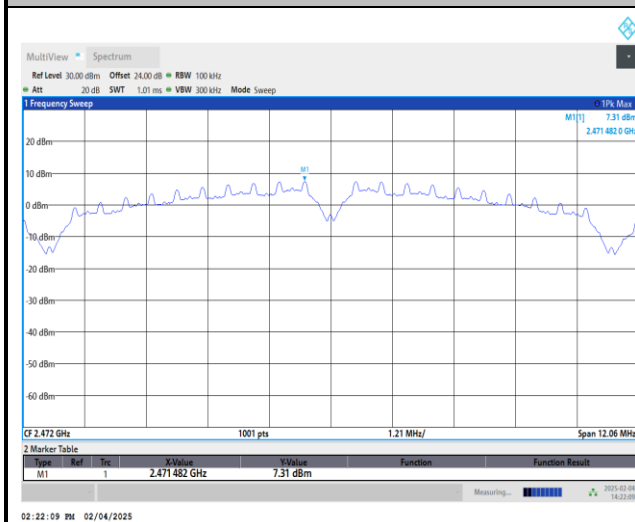


Channel 13 Plot

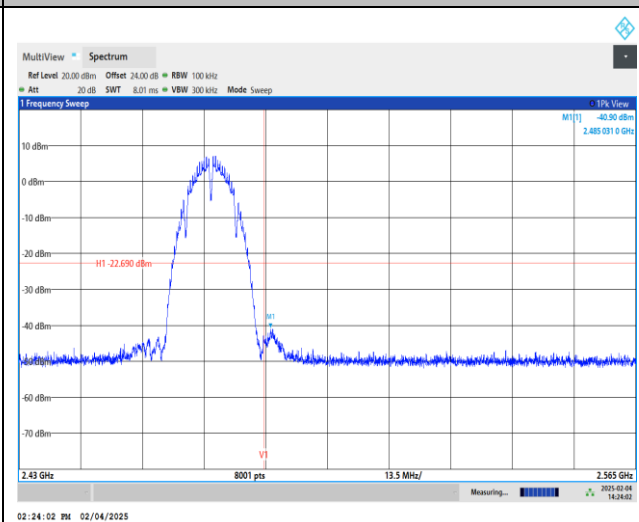

Spurious Emission 30MHz~1GHz

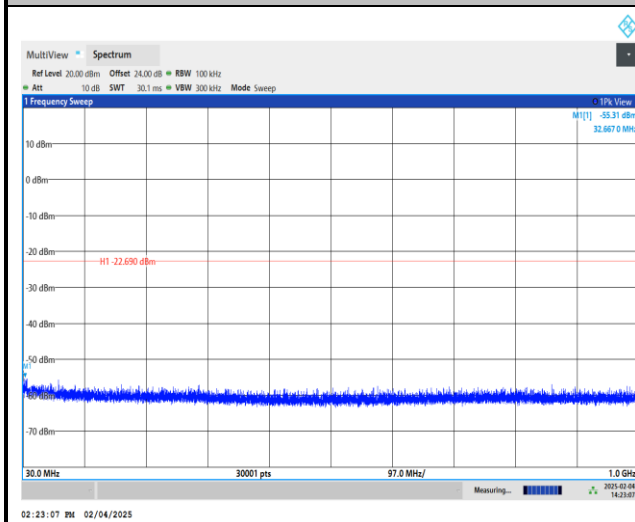

Spurious Emission 1GHz~26.5GHz

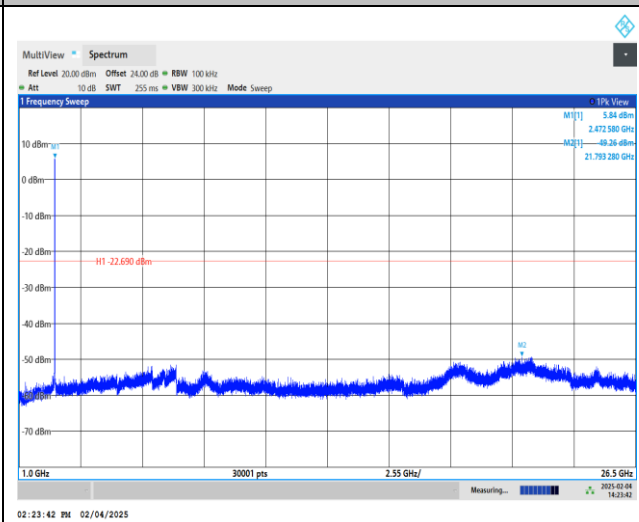





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

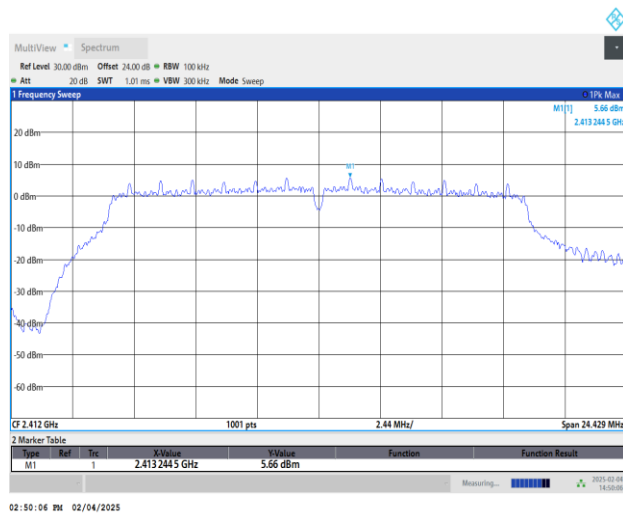


Channel 01 Plot

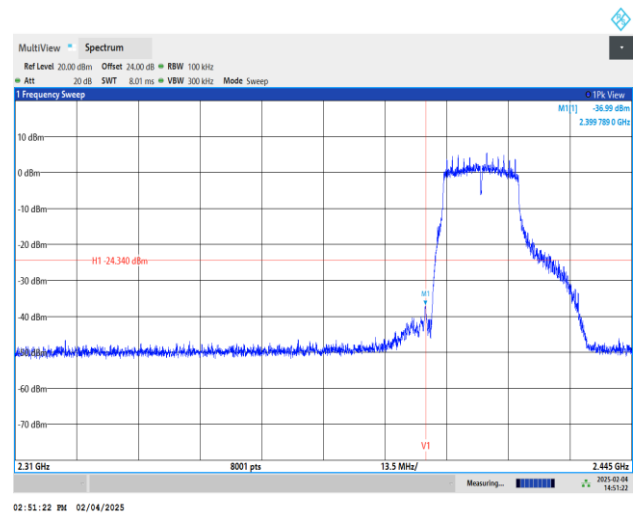

Spurious Emission 30MHz~1GHz

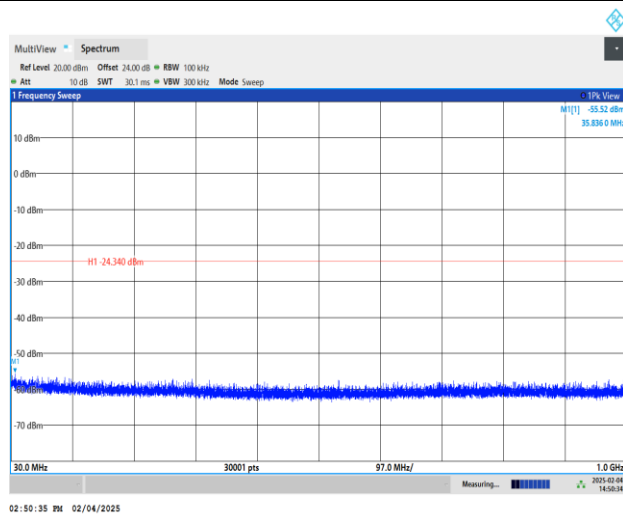

Spurious Emission 1GHz~26.5GHz

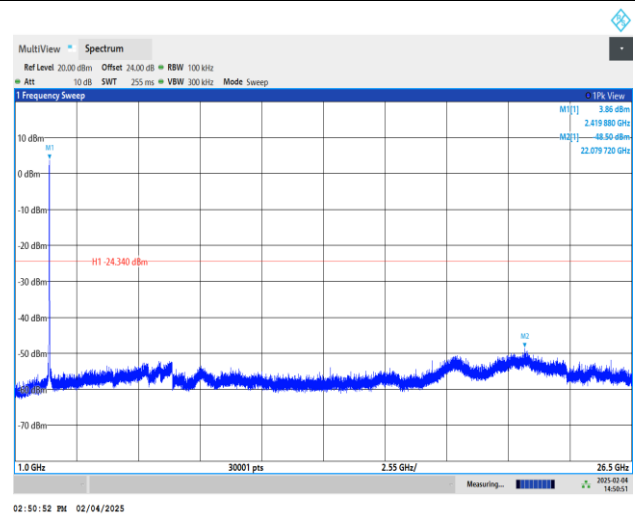




Test Mode : 802.11g


Test Channel : 06

100kHz PSD reference Level

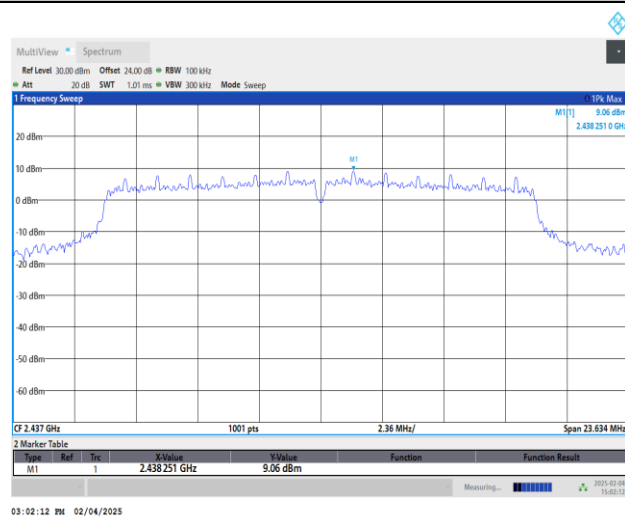


Channel 06 Plot

Spurious Emission 30MHz~1GHz

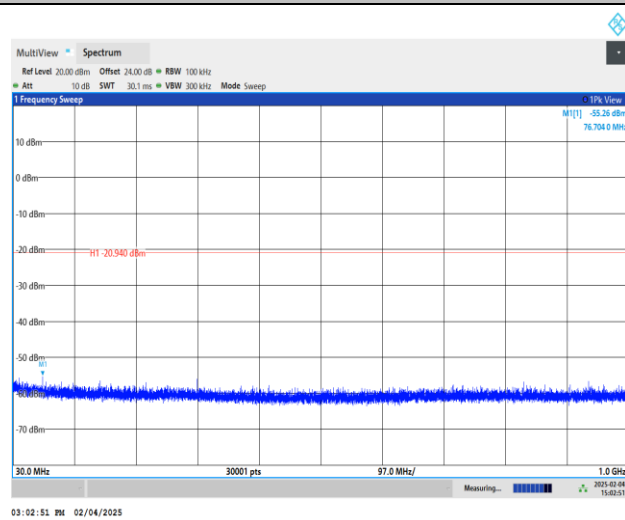

Spurious Emission 1GHz~26.5GHz

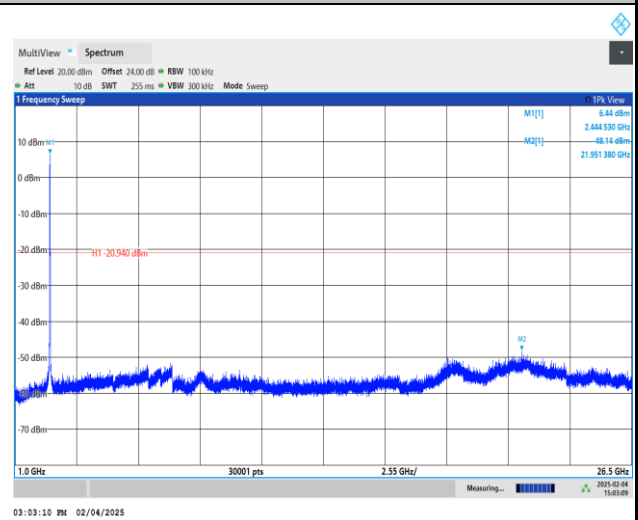





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

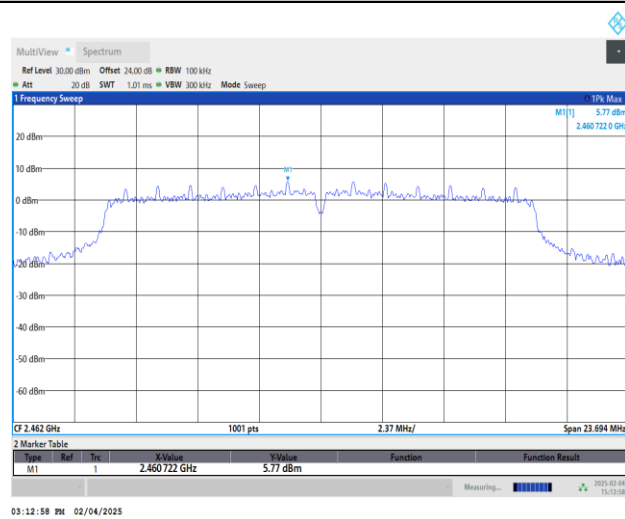


Channel 11 Plot

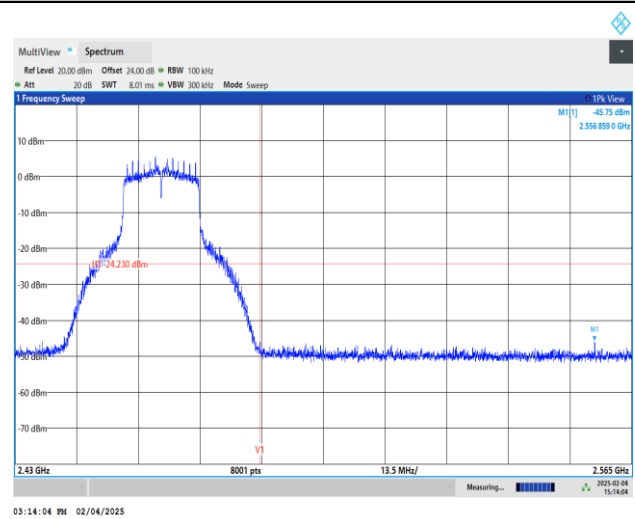

Spurious Emission 30MHz~1GHz

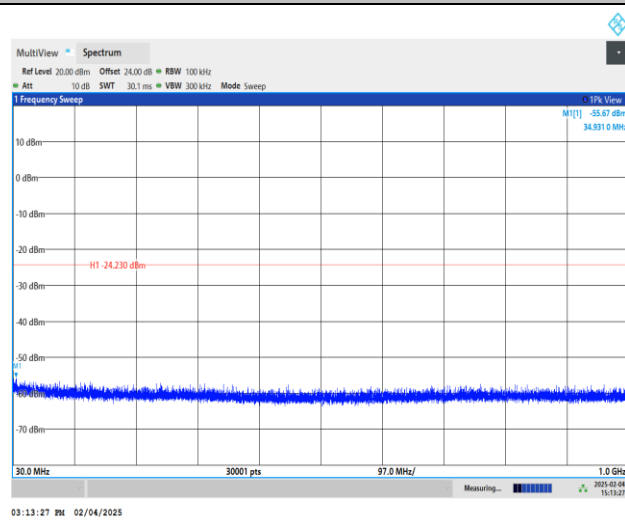

Spurious Emission 1GHz~26.5GHz

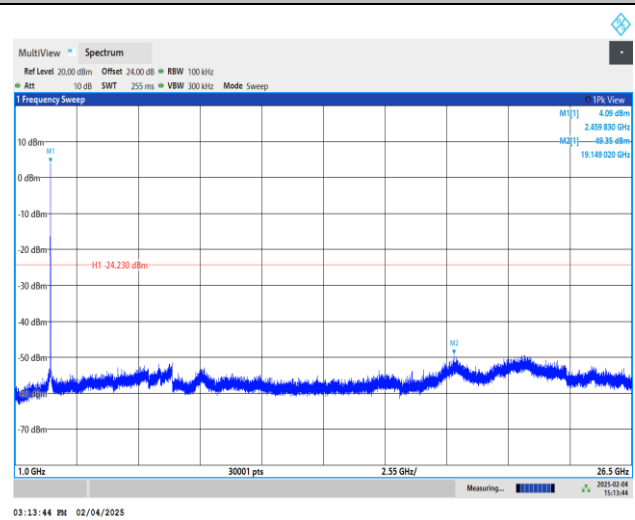





Test Mode : 802.11g

Test Channel : 12


100kHz PSD reference Level

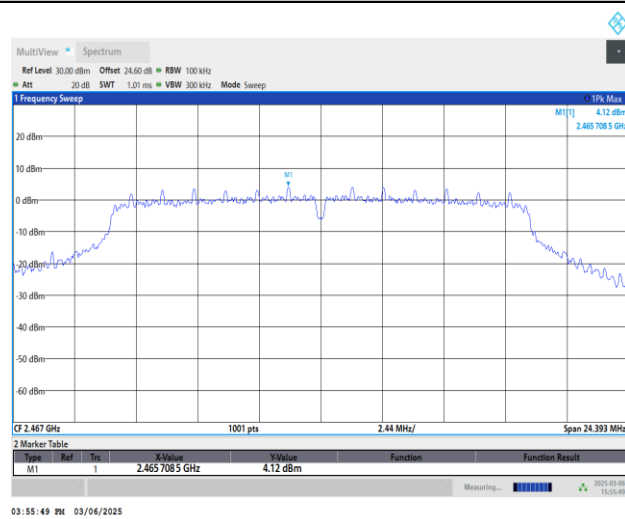


Channel 12 Plot

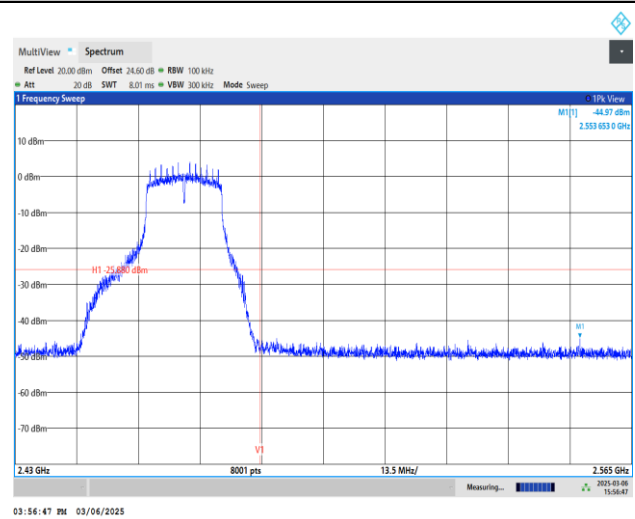

Spurious Emission 30MHz~1GHz

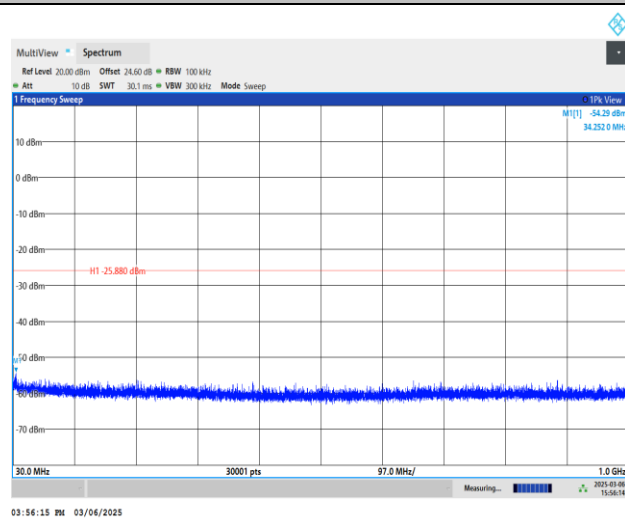

Spurious Emission 1GHz~26.5GHz

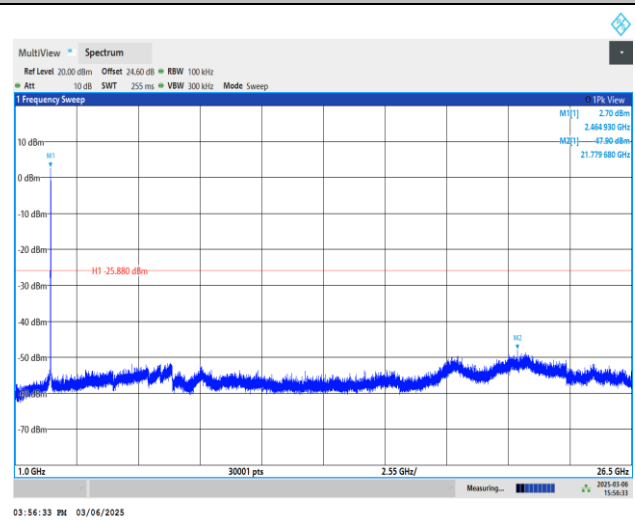





Test Mode : 802.11g

Test Channel : 13


100kHz PSD reference Level

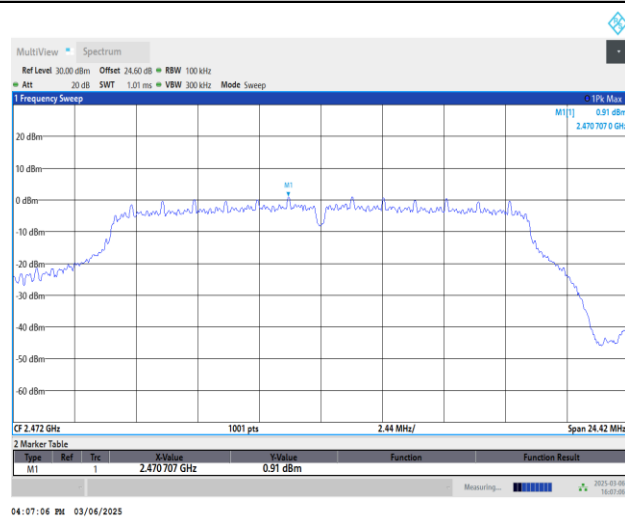


Channel 13 Plot

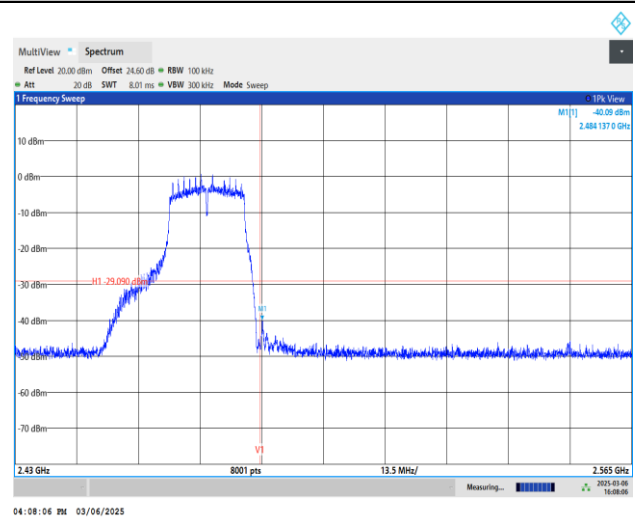

Spurious Emission 30MHz~1GHz

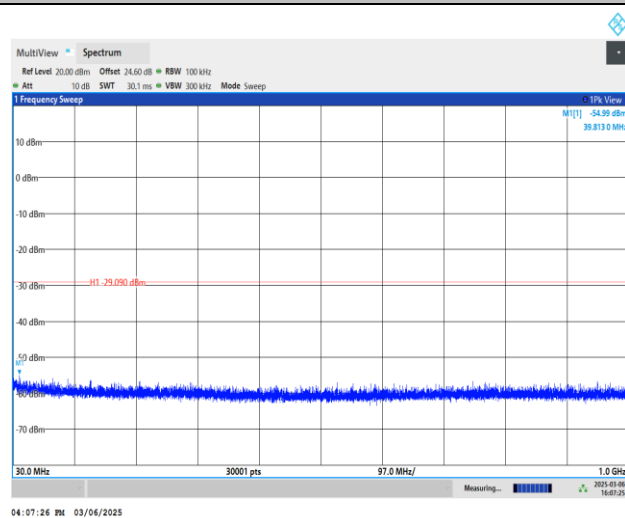

Spurious Emission 1GHz~26.5GHz

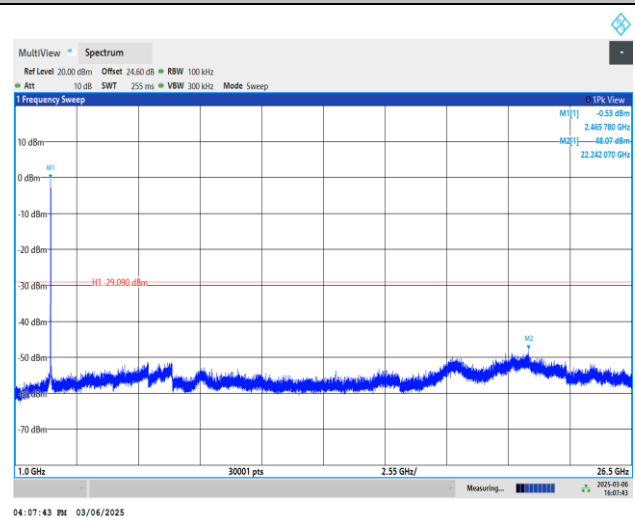





Test Mode : 802.11ac VHT20

Test Channel : 01


100kHz PSD reference Level

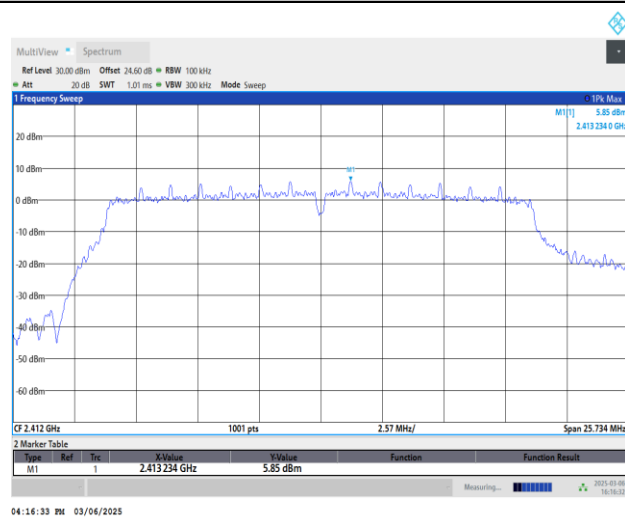


Channel 01 Plot

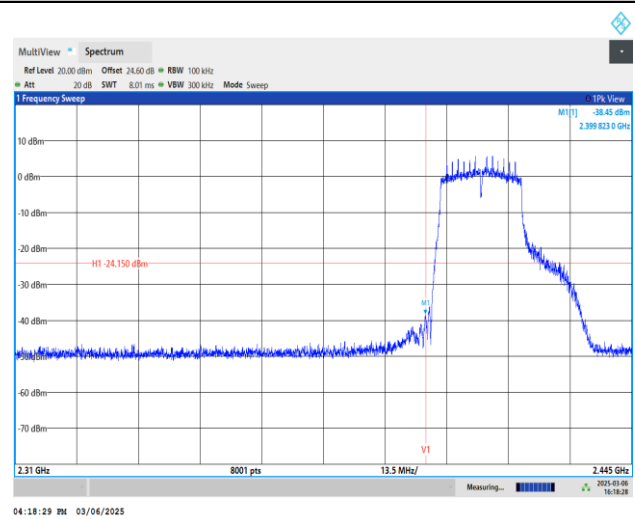

Spurious Emission 30MHz~1GHz

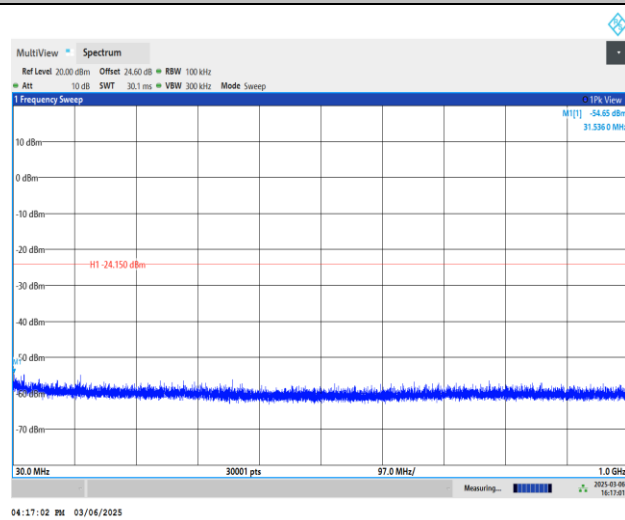

Spurious Emission 1GHz~26.5GHz

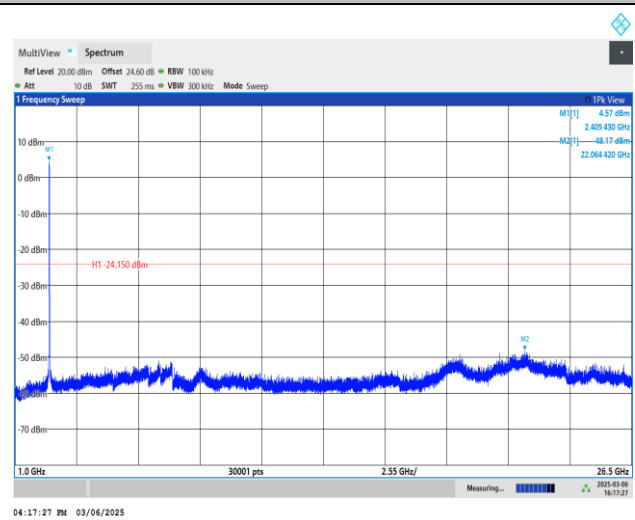




Test Mode : 802.11ac VHT20


Test Channel : 06

100kHz PSD reference Level

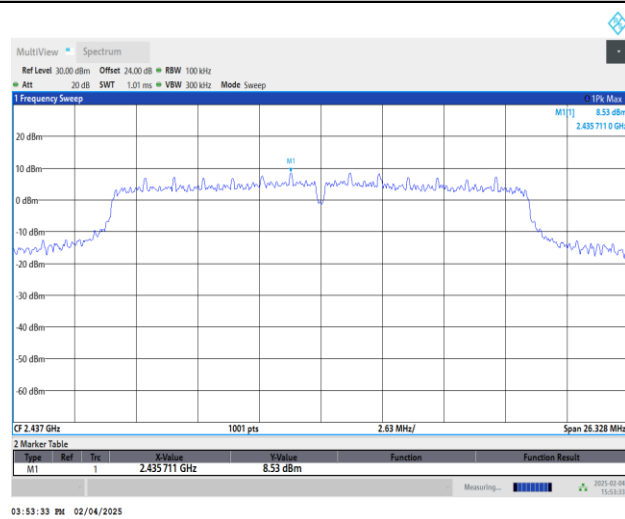


Channel 06 Plot

Spurious Emission 30MHz~1GHz

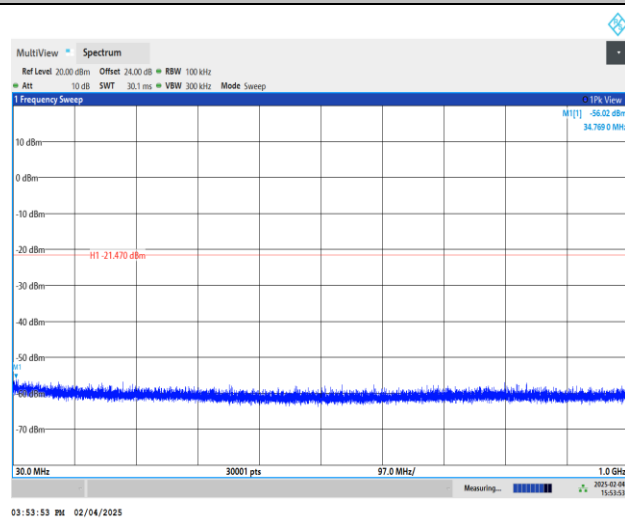

Spurious Emission 1GHz~26.5GHz

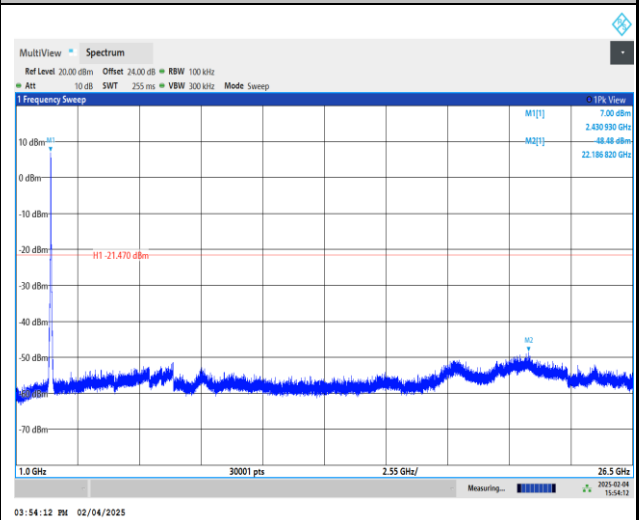





Test Mode : 802.11ac VHT20

Test Channel : 11


100kHz PSD reference Level

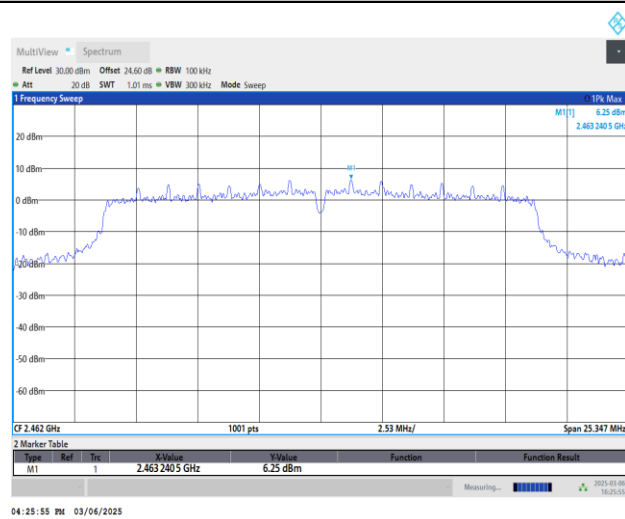


Channel 11 Plot

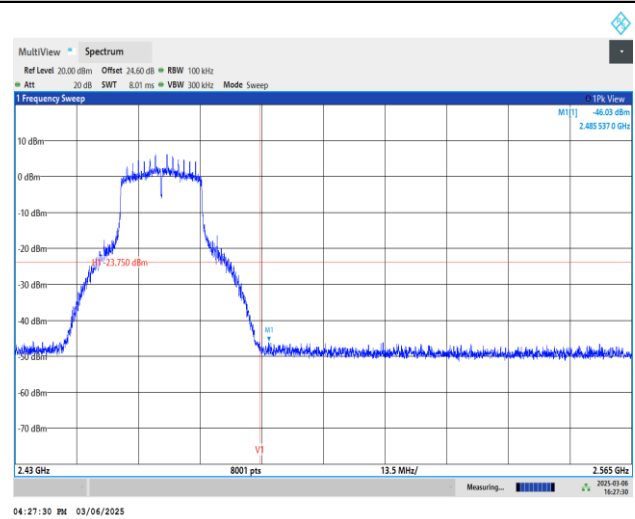

Spurious Emission 30MHz~1GHz

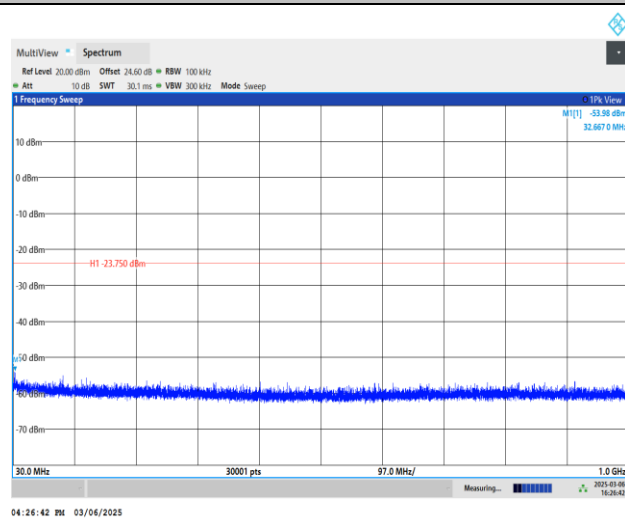

Spurious Emission 1GHz~26.5GHz

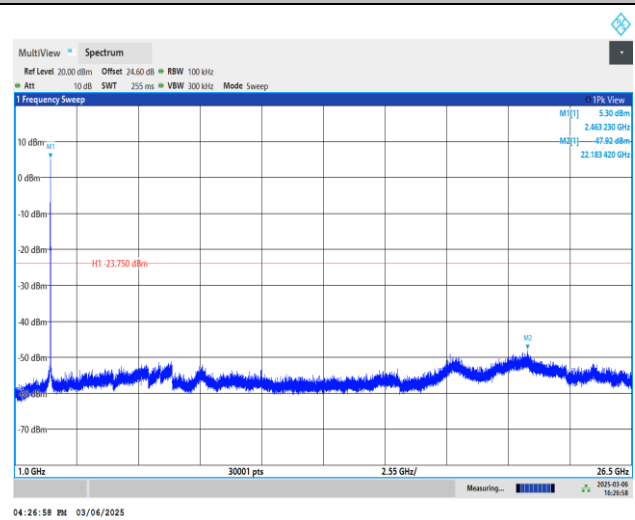





Test Mode : 802.11ac VHT20

Test Channel : 12


100kHz PSD reference Level

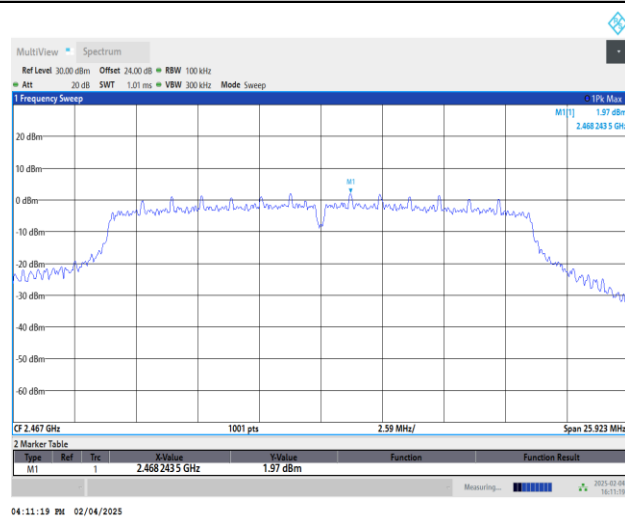


Channel 12 Plot

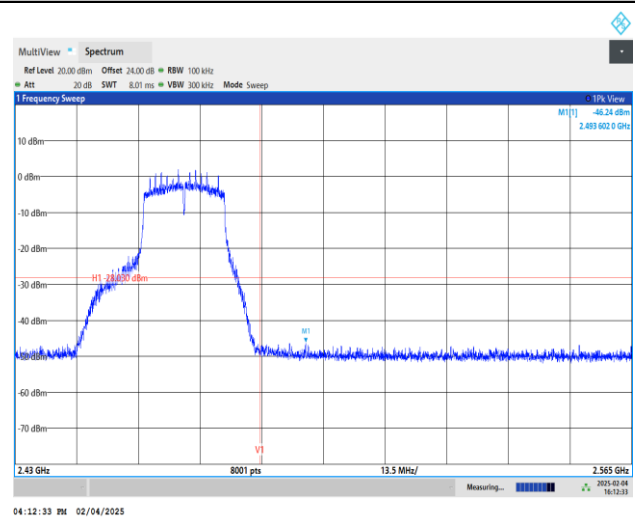

Spurious Emission 30MHz~1GHz

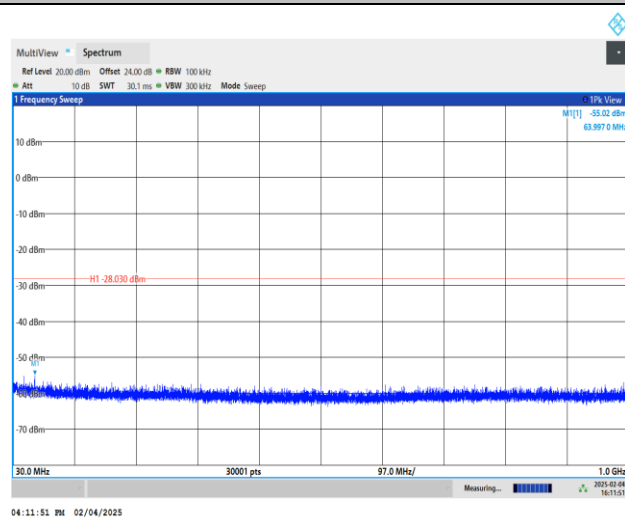

Spurious Emission 1GHz~26.5GHz

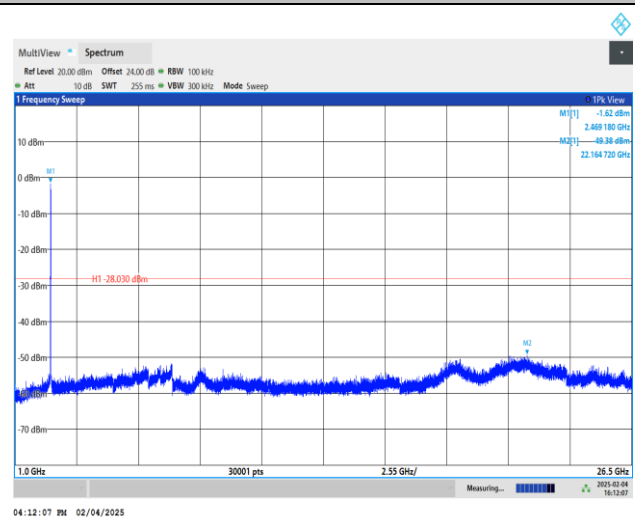





Test Mode : 802.11ac VHT20

Test Channel : 13


100kHz PSD reference Level

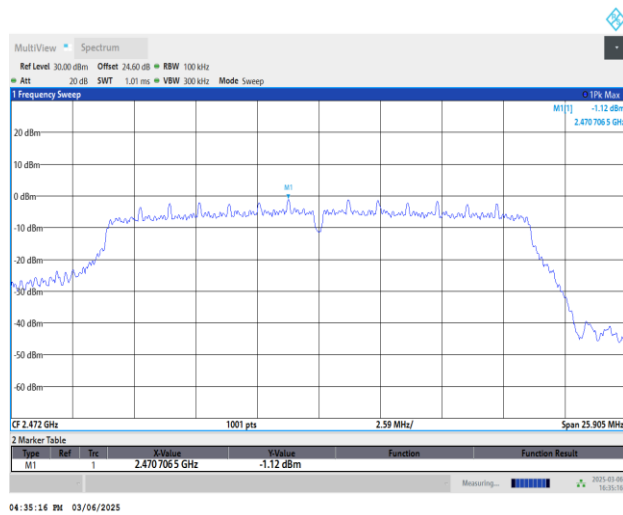


Channel 13 Plot

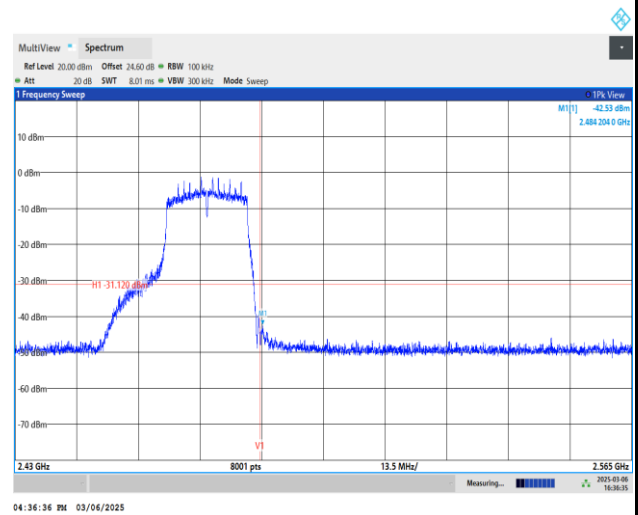

Spurious Emission 30MHz~1GHz

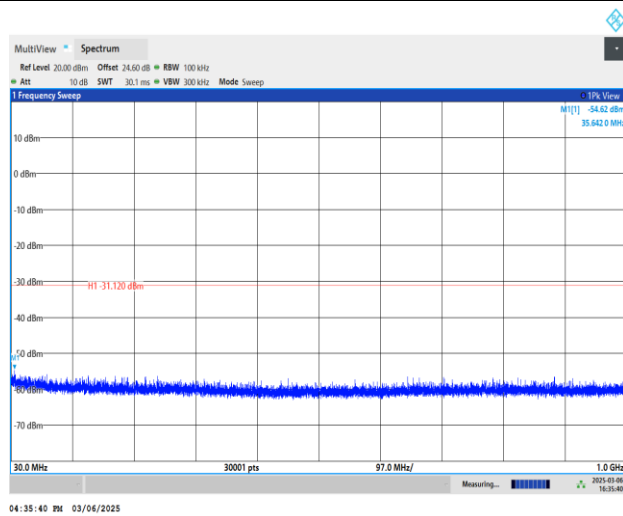

Spurious Emission 1GHz~26.5GHz

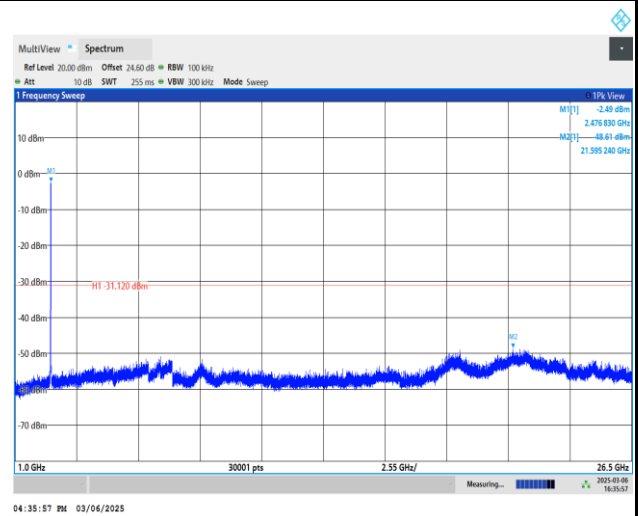





Test Mode : 802.11ac VHT40

Test Channel : 03


100kHz PSD reference Level

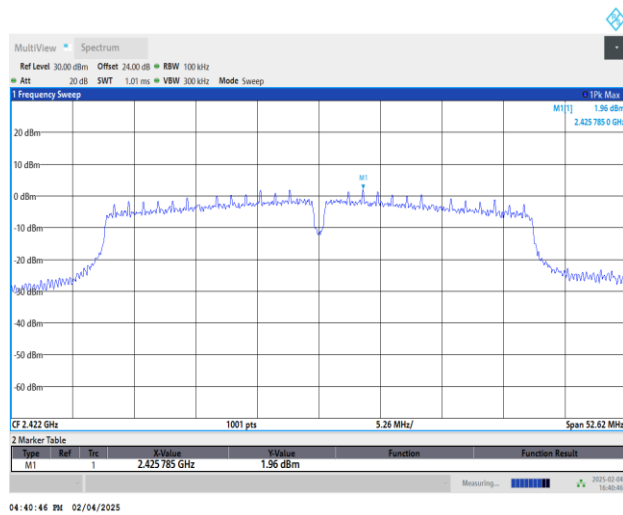


Channel 03 Plot

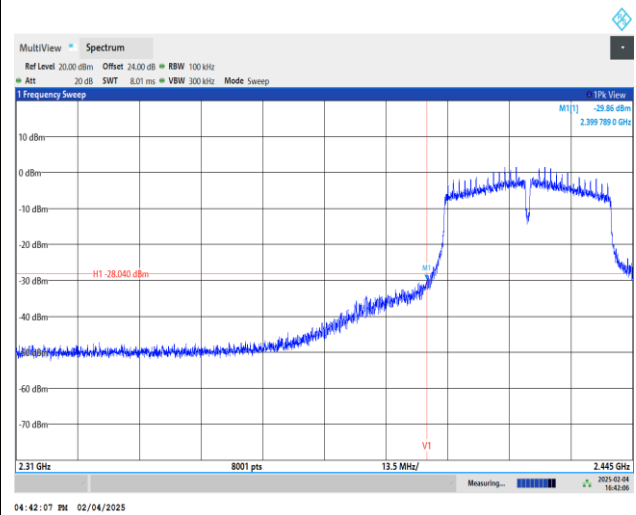

Spurious Emission 30MHz~1GHz

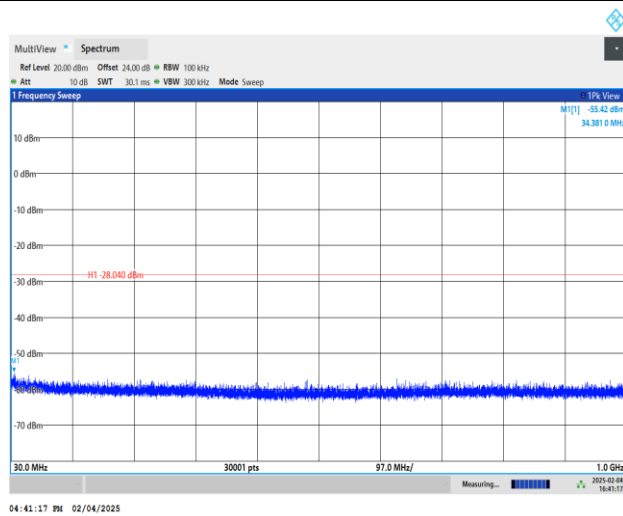

Spurious Emission 1GHz~26.5GHz

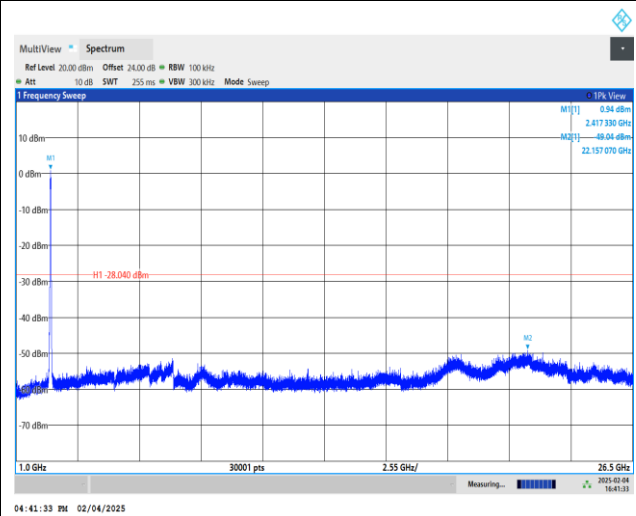




Test Mode : 802.11ac VHT40


Test Channel : 06

100kHz PSD reference Level

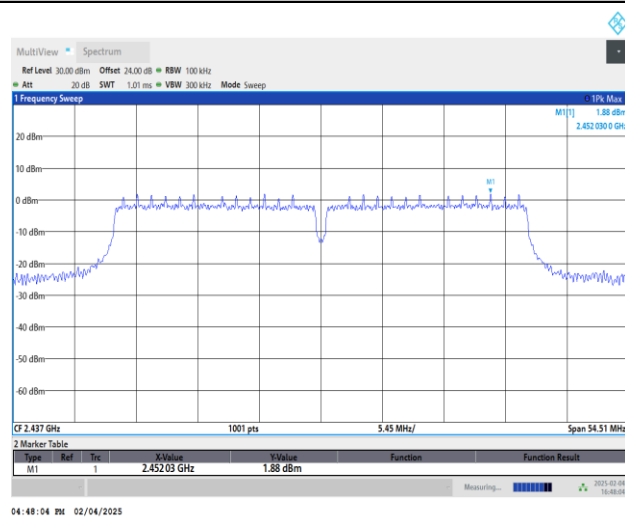


Channel 06 Plot

Spurious Emission 30MHz~1GHz

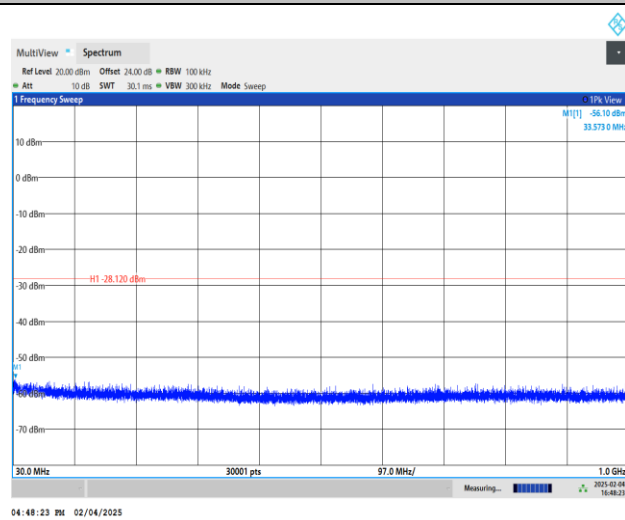

Spurious Emission 1GHz~26.5GHz

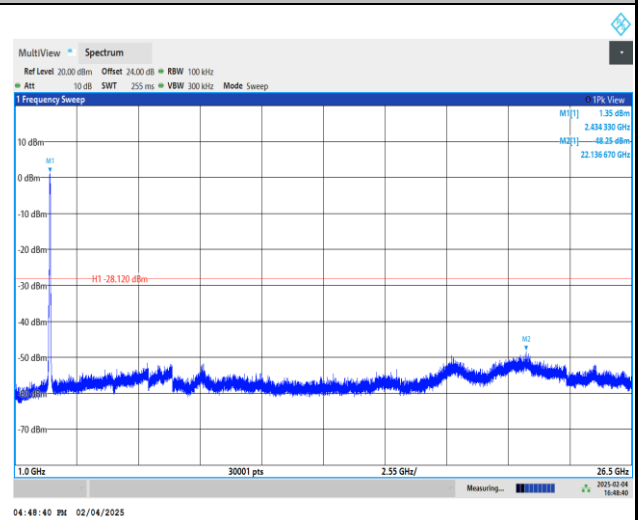





Test Mode : 802.11ac VHT40

Test Channel : 09


100kHz PSD reference Level

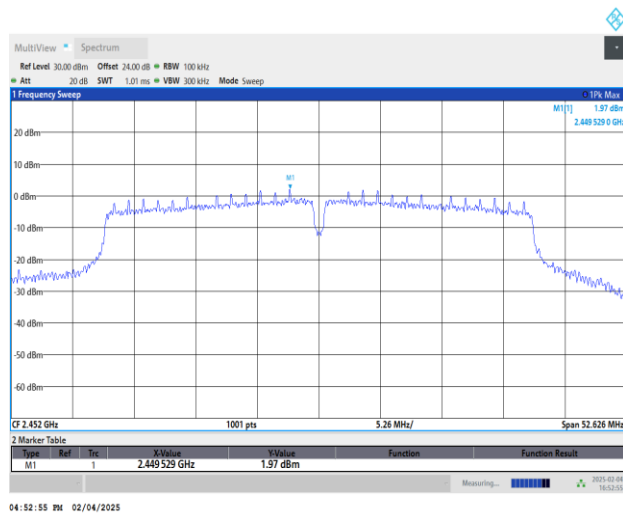

Channel 09 Plot

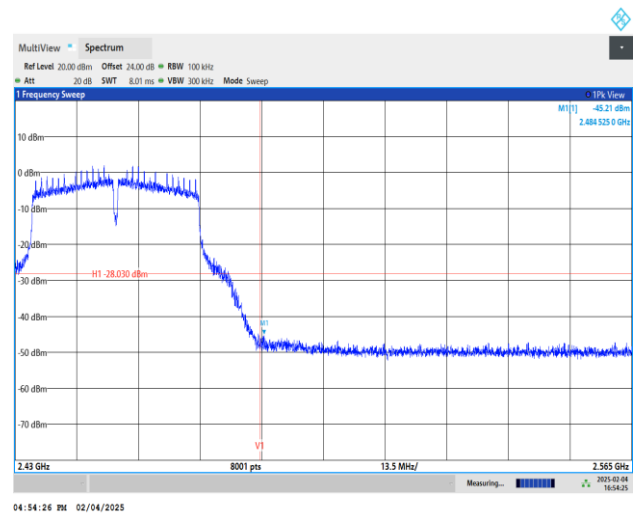

Spurious Emission 30MHz~1GHz

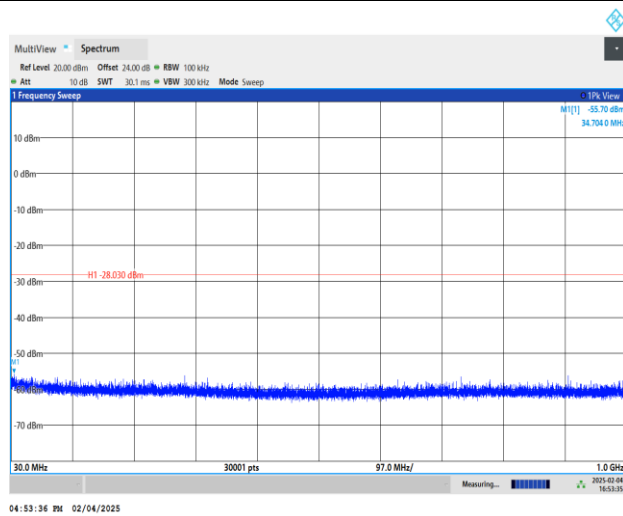

Spurious Emission 1GHz~26.5GHz

