

# EMC TEST REPORT



Report No.: 15070232-FCC-E1

Supersede Report No.: N/A

Applicant	SHENZHEN KINGSUN ENTERPRISES Co.,Ltd	
Product Name	Bluetooth Wrap Around Sports Headphones	
Model No.	DC-816	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2013, ANSI C63.4: 2009	
Test Date	April 02 to April 03, 2015	
Issue Date	April 14, 2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		
<i>Lili Xia</i>	<i>Chris You</i>	
LiLi Xia Test Engineer	Chris You Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15070232-FCC-E1
Page	3 of 25

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION .....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	8
6.1 AC POWER LINE CONDUCTED EMISSIONS .....	8
6.2 RADIATED EMISSIONS .....	12
ANNEX A. TEST INSTRUMENT .....	16
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....	17
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT .....	21
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	24
ANNEX E. DECLARATION OF SIMILARITY .....	25

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070232-FCC-E1	NONE	Original	April 14, 2015

## 2. Customer information

Applicant Name	SHENZHEN KINGSUN ENTERPRISES Co.,Ltd
Applicant Add	25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong, China
Manufacturer	SHENZHEN KINGSUN ENTERPRISES Co.,Ltd
Manufacturer Add	25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong, China

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

#### 4. Equipment under Test (EUT) Information

Description of EUT: Bluetooth Wrap Around Sports Headphones

Main Model: DC-816

Serial Model: N/A

Date EUT received: April 02, 2015

Test Date(s): April 02 to April 03, 2015

Equipment Category : JBP

Antenna Gain: Bluetooth: 0 dBi

Type of Modulation: Bluetooth: GFSK,  $\pi/4$ DQPSK, 8DPSK

RF Operating Frequency (ies): Bluetooth: 2402-2480 MHz

Number of Channels: Bluetooth: 79CH

Port: USB Port

Input Power: DC 5V(USB Port)  
Battery:  
Spec: 3.7V 200mAh  
Limited charger voltage: 5V

Trade Name : N/A

FCC ID: 2AAPKDC-816

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2009	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2009	Radiated Emissions	Compliance

### Measurement Uncertainty


Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-


## 6. Measurements, Examination And Derived Results

### 6.1 AC Power Line Conducted Emissions

Temperature	21°C
Relative Humidity	52%
Atmospheric Pressure	1003mbar
Test date :	April 02, 2015
Tested By :	LiLi Xia

#### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.															
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	
Frequency ranges (MHz)	Limit (dBµV)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

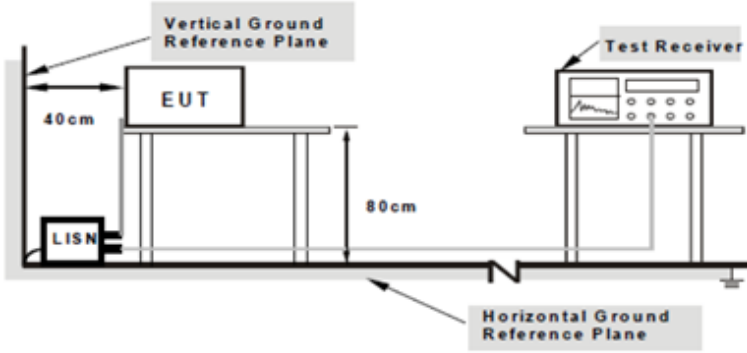Test Setup	 <p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	---

Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> </ol>
-----------	---




Test Report	15070232-FCC-E1
Page	9 of 25

	<p>3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</p> <p>4. All other supporting equipment were powered separately from another main supply.</p> <p>5. The EUT was switched on and allowed to warm up to its normal operating condition.</p> <p>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</p> <p>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</p> <p>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

**Test Mode:** USB Mode

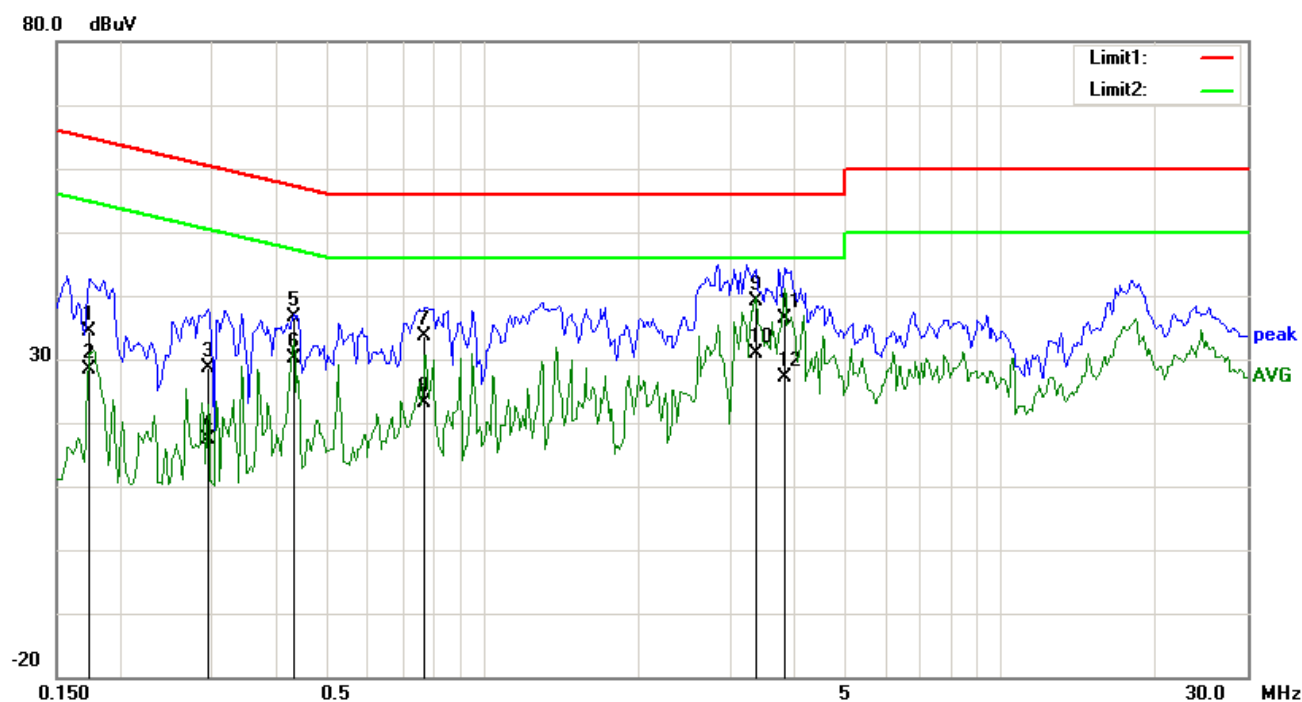


### Test Data

Phase Line Plot at 230Vac, 50Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)	
1	L1	0.1734	23.11	QP	11.29	34.40	64.80	-30.40	
2	L1	0.1734	17.16	AVG	11.29	28.45	54.80	-26.35	
3	L1	0.2945	17.30	QP	11.23	28.53	60.40	-31.87	
4	L1	0.2945	6.14	AVG	11.23	17.37	50.40	-33.03	
5	L1	0.4313	25.38	QP	11.17	36.55	57.23	-20.68	
6	L1	0.4313	18.89	AVG	11.17	30.06	47.23	-17.17	
7	L1	0.7750	22.61	QP	11.01	33.62	56.00	-22.38	
8	L1	0.7750	12.02	AVG	11.01	23.03	46.00	-22.97	
9	L1	3.3672	28.11	QP	10.90	39.01	56.00	-16.99	
10	L1	3.3672	20.07	AVG	10.90	30.97	46.00	-15.03	
11	L1	3.8359	25.53	QP	10.90	36.43	56.00	-19.57	
12	L1	3.8359	16.16	AVG	10.90	27.06	46.00	-18.94	

**Test Mode:** USB Mode

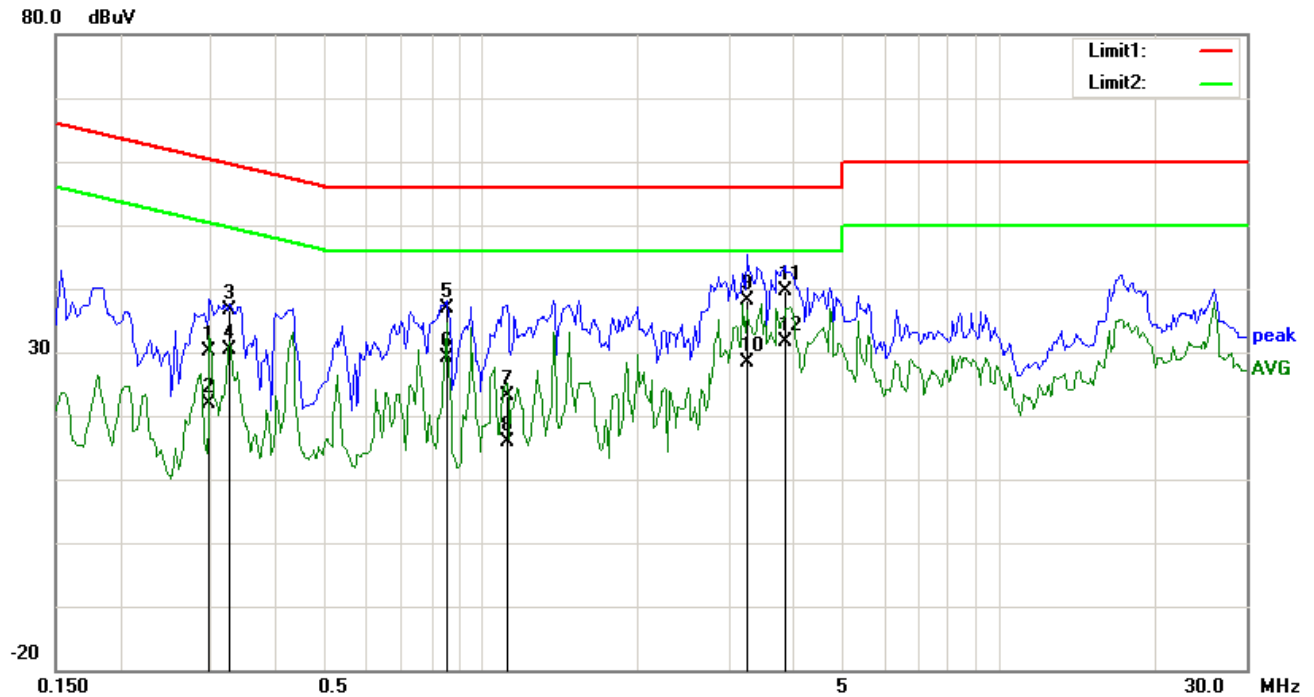

### Test Data


#### Phase Neutral Plot at 230Vac, 50Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)	
1	N	0.3023	35.19	QP	0.00	35.19	60.18	-24.99	
2	N	0.3023	19.08	AVG	0.00	19.08	50.18	-31.10	
3	N	0.3531	39.28	QP	0.00	39.28	58.89	-19.61	
4	N	0.3531	27.75	AVG	0.00	27.75	48.89	-21.14	
5	N	0.8531	34.66	QP	0.00	34.66	56.00	-21.34	
6	N	0.8531	22.34	AVG	0.00	22.34	46.00	-23.66	
7	N	2.9273	39.91	QP	0.00	39.91	56.00	-16.09	
8	N	2.9273	31.48	AVG	0.00	31.48	46.00	-14.52	
9	N	3.5273	38.01	QP	0.00	38.01	56.00	-17.99	
10	N	3.5273	28.97	AVG	0.00	28.97	46.00	-17.03	
11	N	17.6602	36.02	QP	0.00	36.02	60.00	-23.98	
12	N	17.6602	29.50	AVG	0.00	29.50	50.00	-20.50	

## 6.2 Radiated Emissions

Temperature	22°C
Relative Humidity	52%
Atmospheric Pressure	1003mbar
Test date :	April 03, 2015
Tested By :	LiLi Xia

### Requirement(s):

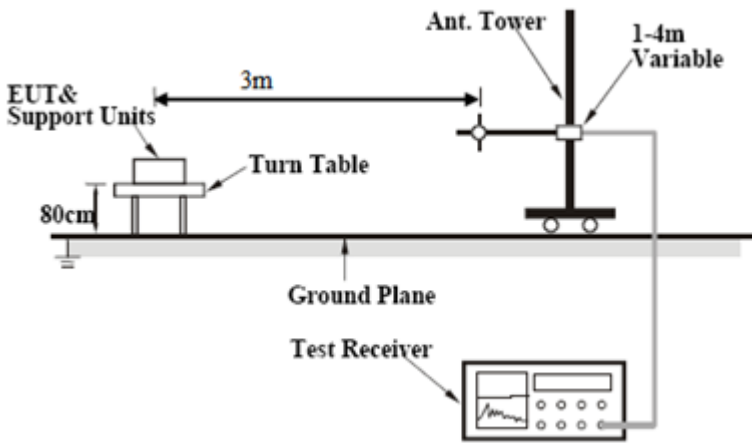Spec	Item	Requirement	Applicable										
47CFR§15.107(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<div><input checked="" type="checkbox"/></div>										
		<table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength (µV/m)									
		30 – 88		100									
		88 – 216		150									
		216 960		200									
Above 960	500												
Test Setup	<div></div>												
Procedure	<div><div>1.</div><div>The EUT was switched on and allowed to warm up to its normal operating condition.</div><div>2.</div><div>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:</div></div>												

Test Report	15070232-FCC-E1
Page	13 of 25

	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ■ 1 kHz (Duty cycle &lt; 98%) □ 10 Hz (Duty cycle &gt; 98%)</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

**Test Mode : USB Mode**

### Below 1GHz

80.0 dBuV/m

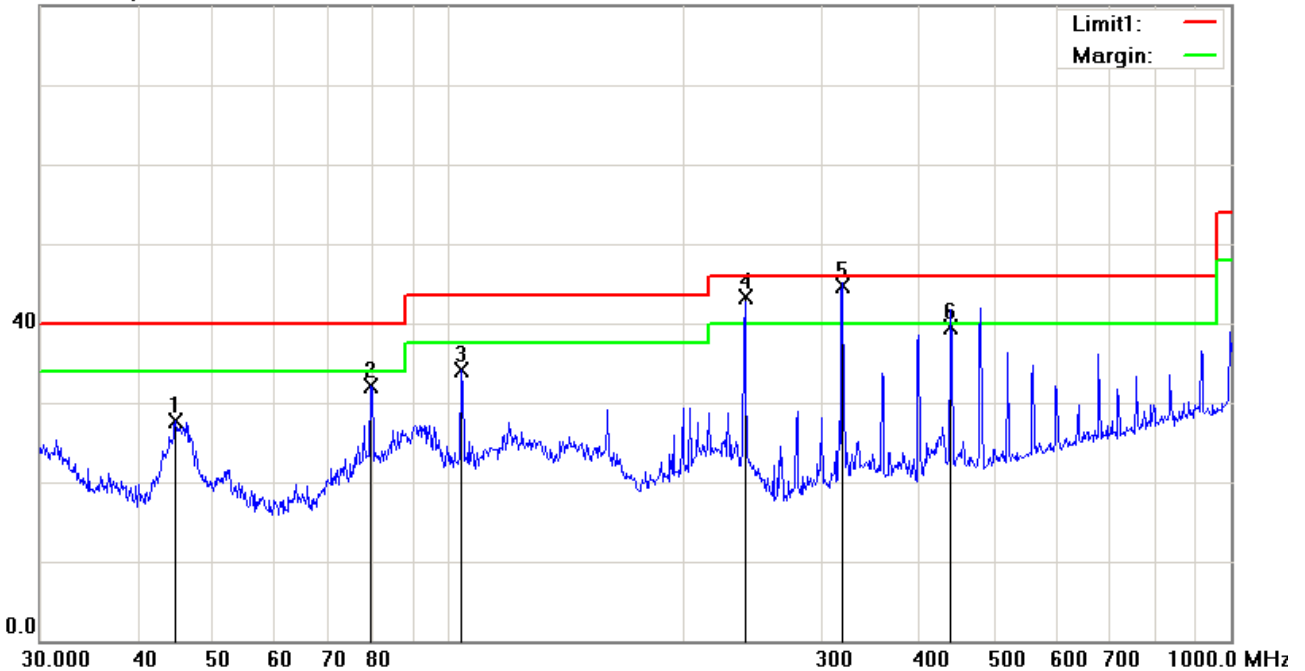

### Test Data


#### Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( )	Comment
1	H	44.7434	28.42	peak	-0.71	27.71	40.00	-12.29	200	184	
2	H	79.5209	45.79	peak	-13.77	32.02	40.00	-7.98	200	154	
3	H	103.8055	44.23	peak	-10.12	34.11	43.50	-9.39	200	135	
4	H	239.4602	52.30	QP	-9.09	43.21	46.00	-2.79	100	153	
5	H	319.5143	51.09	QP	-6.34	44.75	46.00	-1.25	100	141	
6	H	439.0450	42.87	QP	-3.35	39.52	46.00	-6.48	200	214	

### Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.

### Below 1GHz

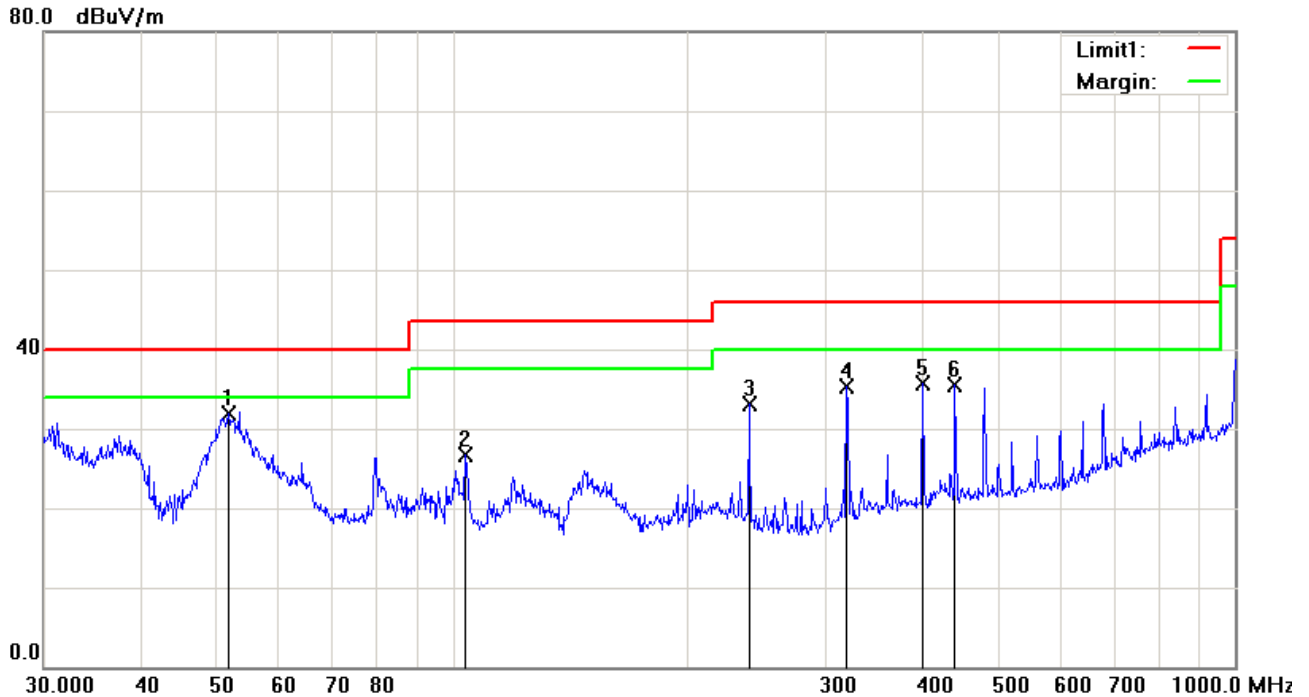

### Test Data

#### Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( )	
1	V	51.6616	46.07	peak	-14.09	31.98	40.00	-8.02	100	165	
2	V	103.8055	37.69	peak	-10.99	26.70	43.50	-16.80	200	243	
3	V	239.1473	40.36	peak	-7.31	33.05	46.00	-12.95	100	90	
4	V	318.8170	41.42	peak	-6.11	35.31	46.00	-10.69	200	280	
5	V	399.0302	39.51	peak	-3.82	35.69	46.00	-10.31	200	74	
6	V	438.6554	38.91	peak	-3.32	35.59	46.00	-10.41	100	338	

### Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.


## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted Emissions</b>					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	10/04/2015	10/04/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>



## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo

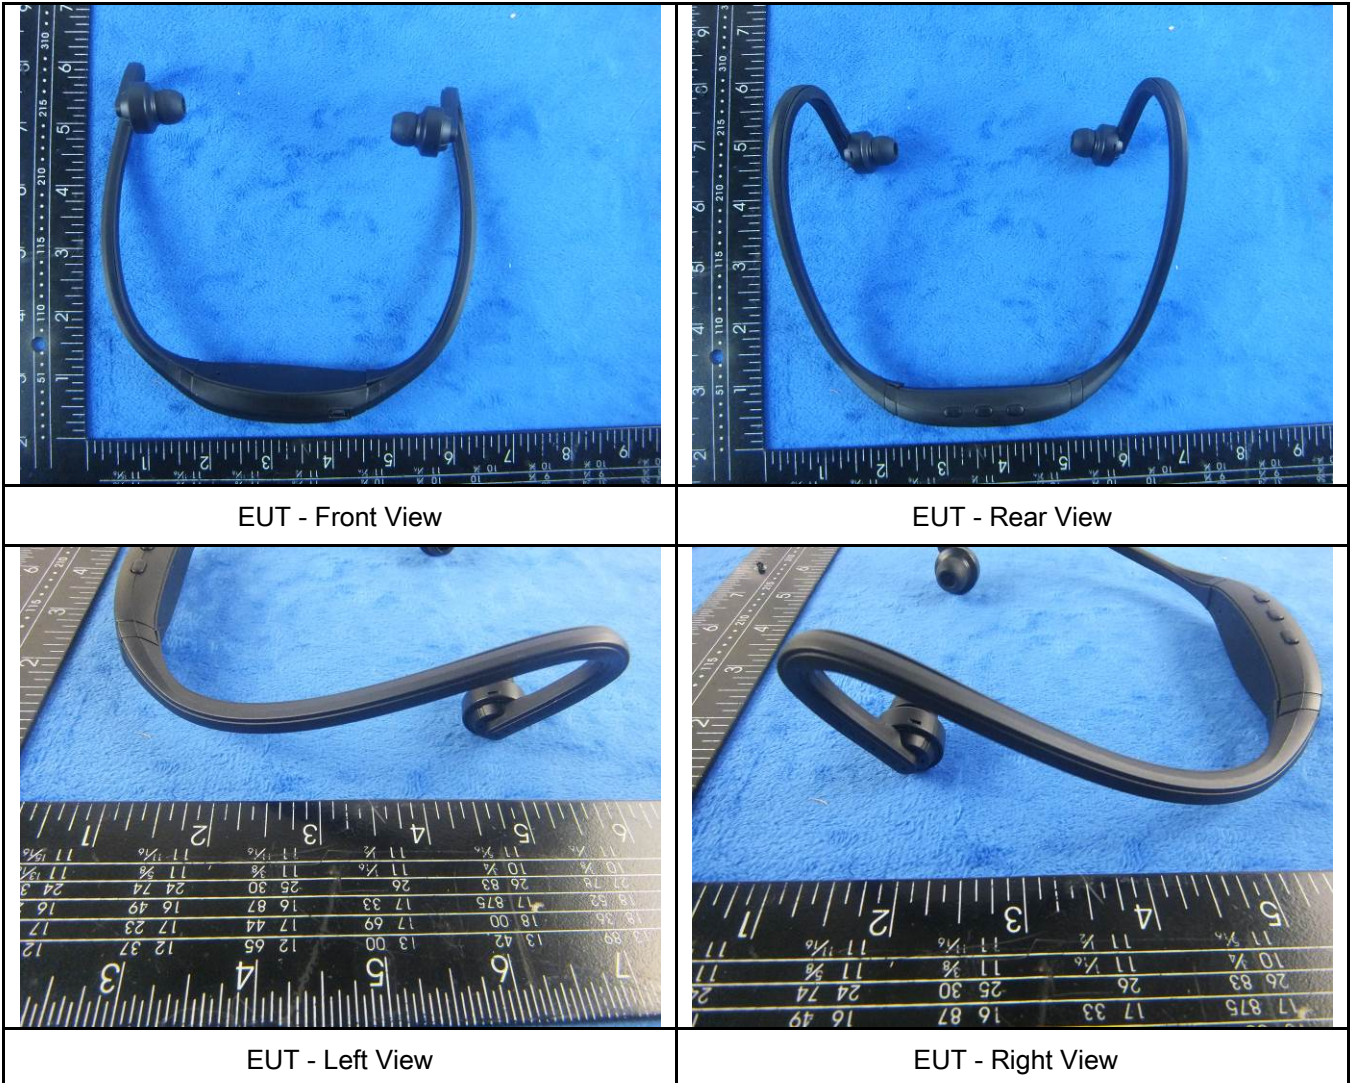




EUT - Top View




EUT - Bottom View




**Annex B.ii. Photograph: EUT Internal Photo**

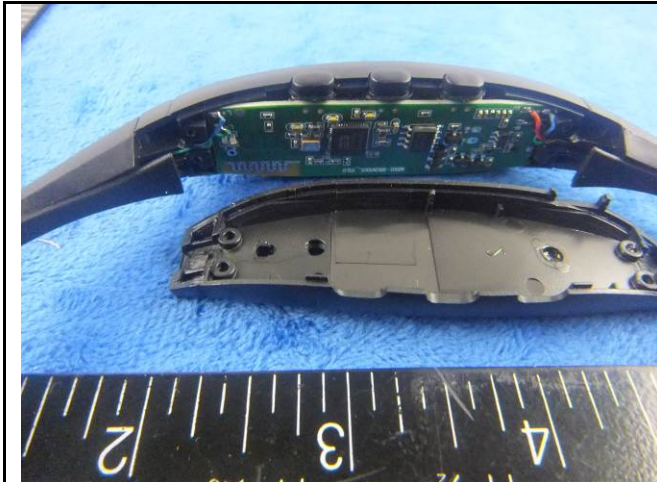


Cover Off - Top View

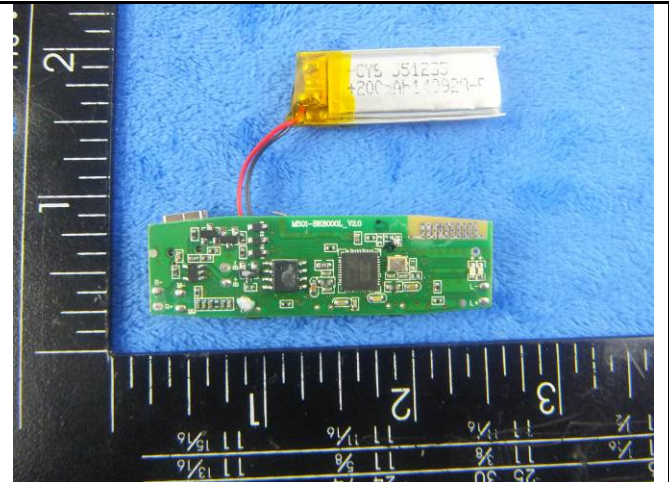

Mainboard - Front View

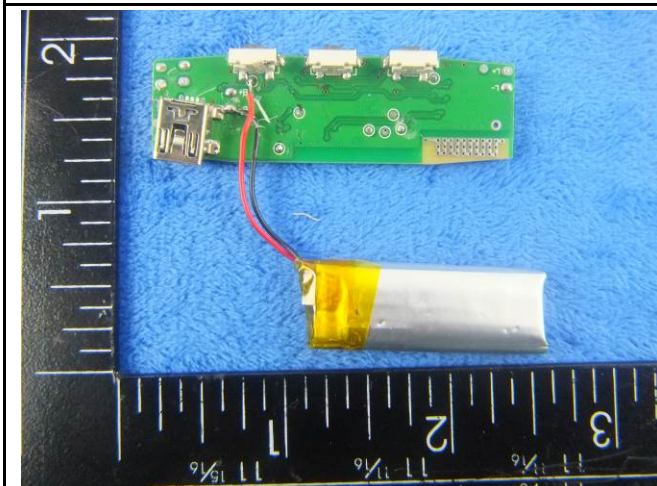

Mainboard - Rear View

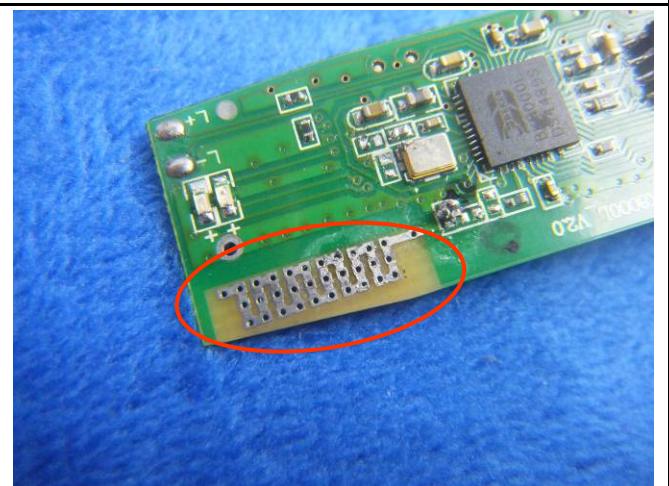

BT Antenna View


**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View

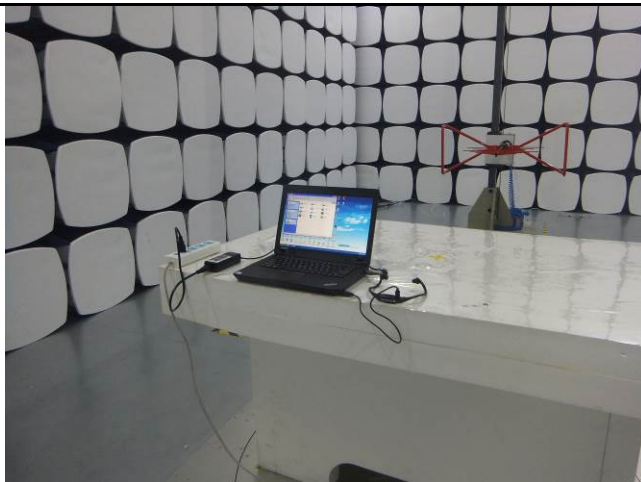

Radiated Spurious Emissions Test Setup Below 1GHz

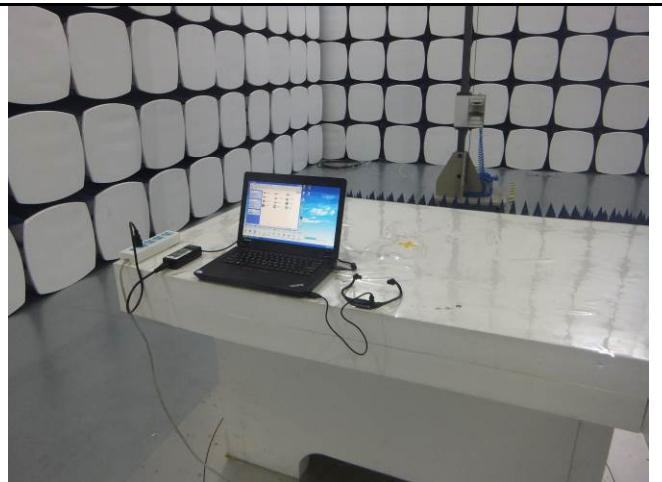


Radiated Spurious Emissions Test Setup Above  
1GHz


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

#### Block Configuration Diagram for Conducted Emissions

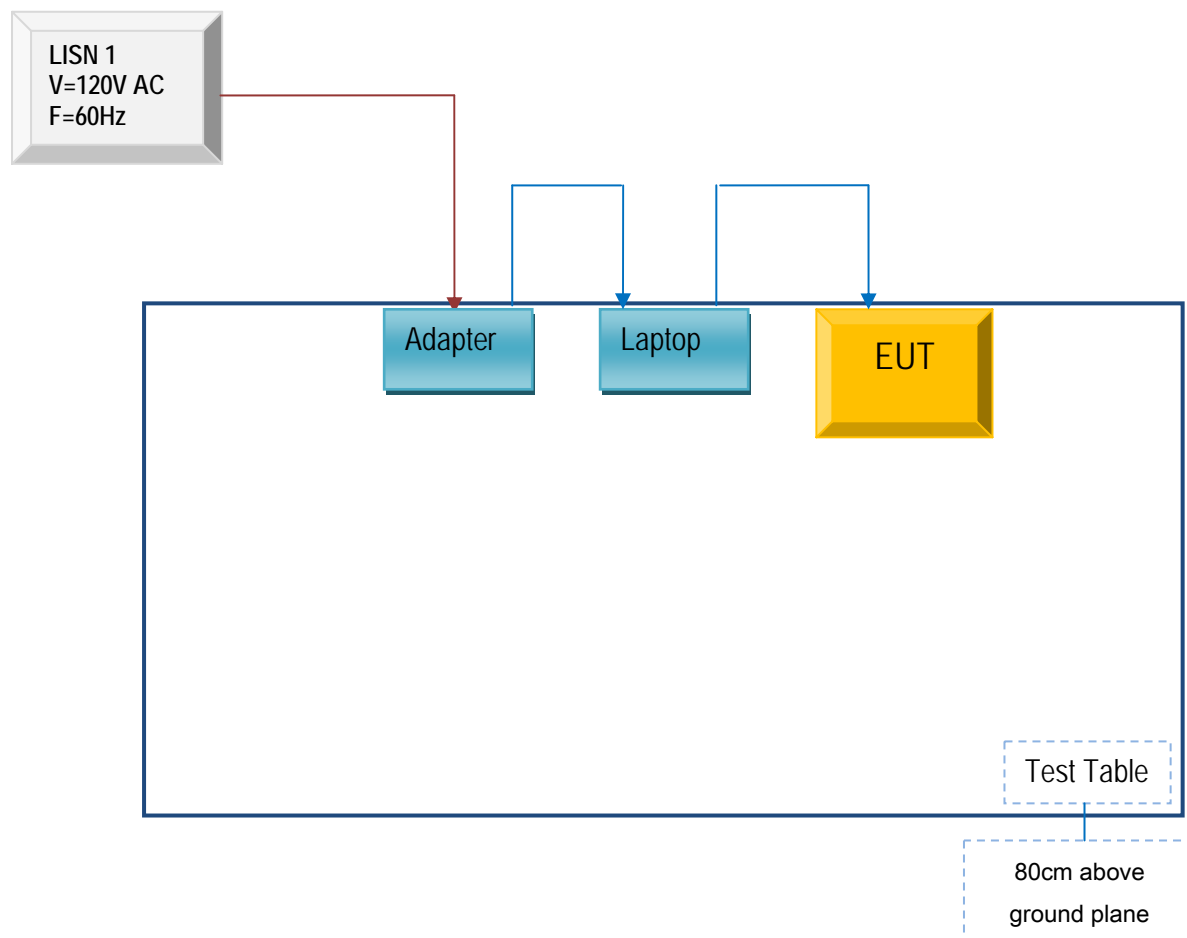

## Block Configuration Diagram for Radiated Emissions

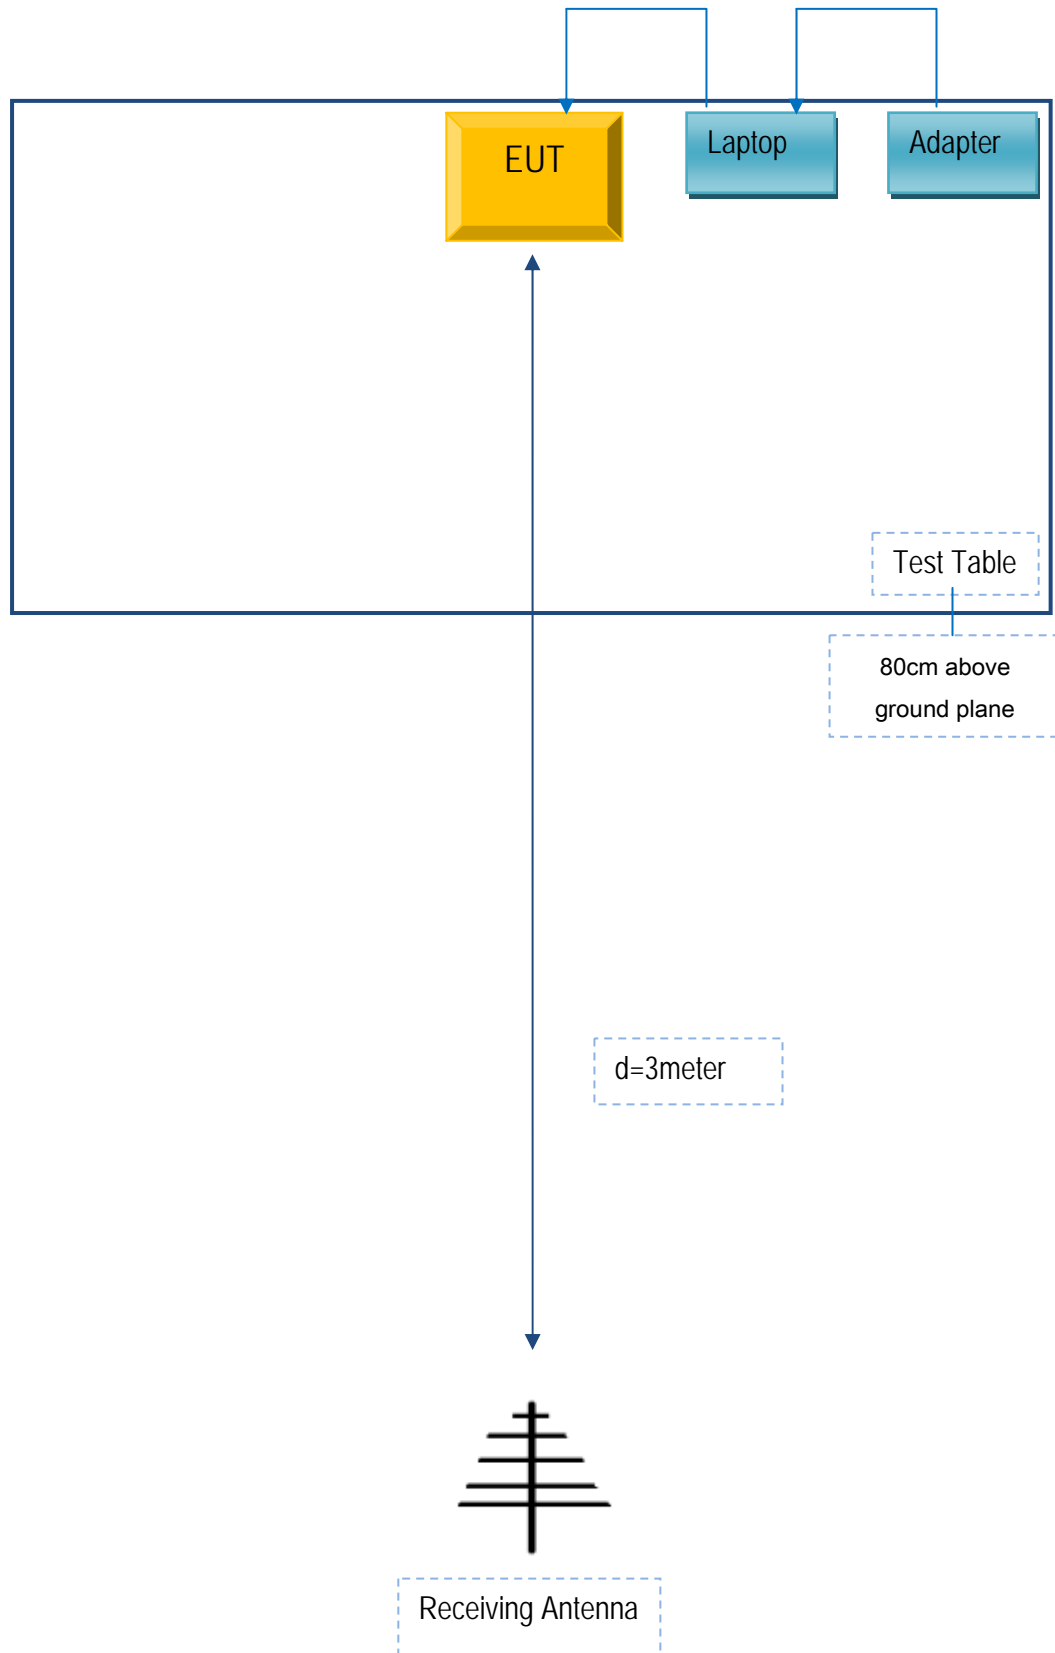

Test Report	15070232-FCC-E1
Page	23 of 25

## **Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
Lenovo	Lenovo Laptop	E40& 0579A52	N/A	N/A

Test Report	15070232-FCC-E1
Page	24 of 25

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment



Test Report	15070232-FCC-E1
Page	25 of 25

## Annex E. DECLARATION OF SIMILARITY

N/A