


NOTES: (UNLESS OTHERWISE SPECIFIED)

1.
- BLACK GRAPHICS AND TYPE ON 2 MIL MYLAR WITH PRESSURE SENSITIVE PERMANENT ADHESIVE FOR USE ON ABS PLASTIC, 1 MIL CLEAR MYLAR OVERLAY.

2.
- COLOR PER ANSI Z535.1.


REVISIONS				
GCO	REV	DESCRIPTION	DATE	APPROVAL
-	01	ISSUED FOR REVIEW	3/3/20	
	02	UPDATED FCC ID AND IC NUMBERS	5/19/20	

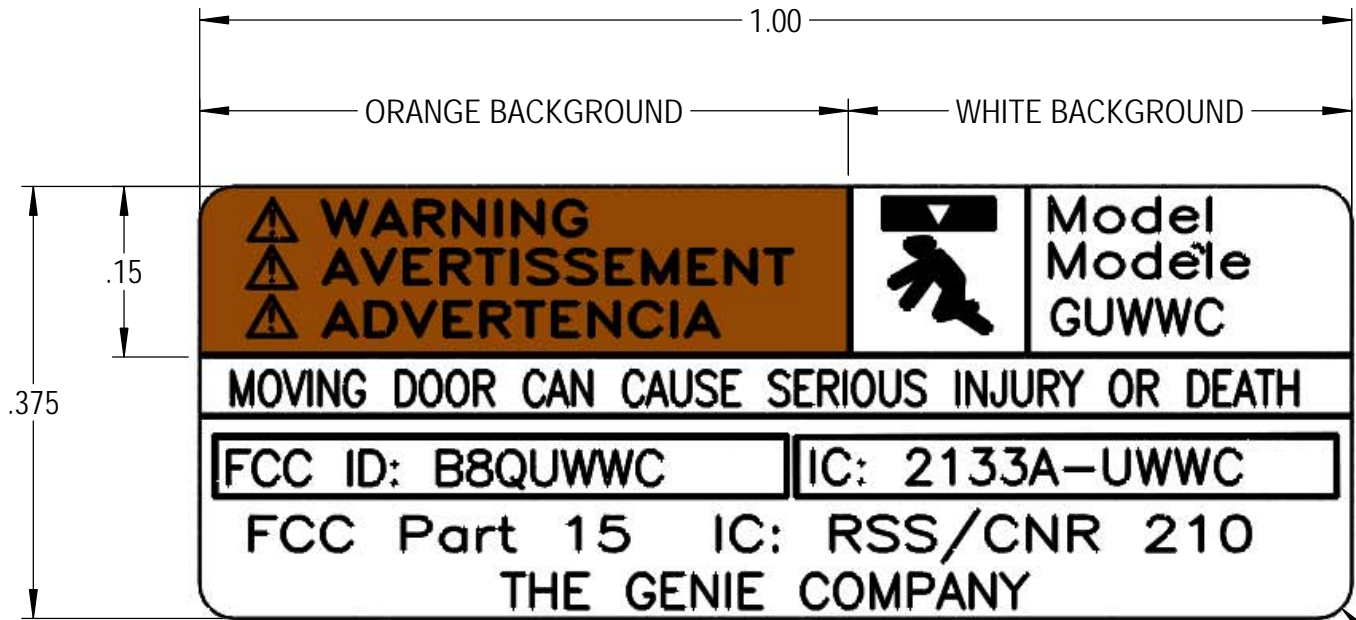

P/N 41405-A



SCALE 1:1

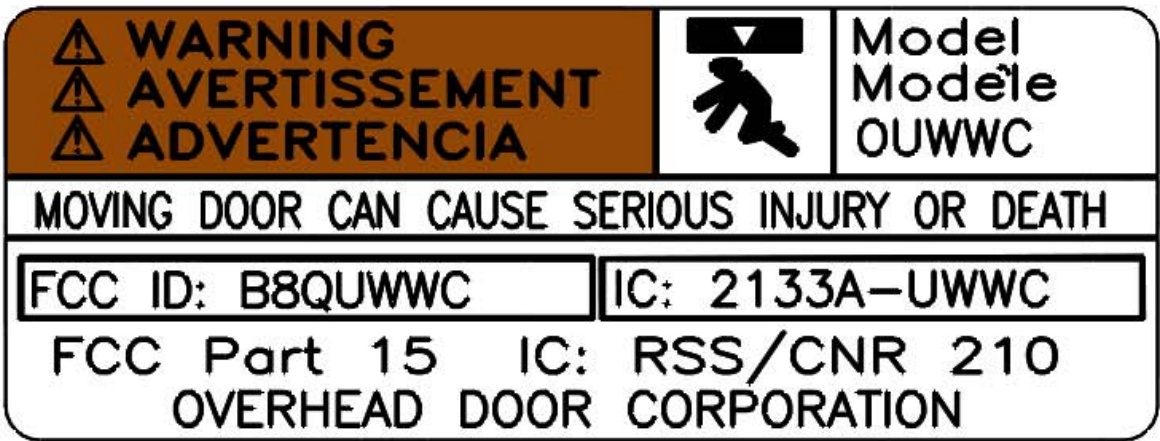


P/N 41405-B



SCALE 1:1

PLOTTED: -

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION, INCLUDING ITS AFFILIATED SUBSIDIARIES AND AFFILIATES. THIS DRAWING INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. DISCLOSURE OF ANY DRAWING OR INFORMATION IS INTENDED NOT TO AND SHALL NOT OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.	UNLESS OTHERWISE SPECIFIED		APPROVALS		DATE		 A SUBSIDIARY OF OVERHEAD DOOR CORPORATION MT. HOPE, OHIO	
	INTERPRET DIMS & TOLS PER ASME Y14.5M ALL DIMS ARE IN INCHES DO NOT SCALE DIMENSIONS AND SPECIFICATIONS CIRCLED WITH SYMBOL 'C' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.	<u>TOLERANCES:</u> .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR = ±1° <u>HOLES:</u> < Ø.251 = ±.003 Ø.251-Ø.500 = ±.003 > Ø.500 = ±.003 ALL GEOMETRY GOVERNED BY 3D CAD DATABASE: 41405	DRAWN	DANP	12/1/2017			
			CHECKED	-	-			
			APPROVED	-	-			
			MATERIAL					
			FINISH					
			SIZE		DWG NO.			
			B		41405			
			SCALE 8:1		SHEET 1 OF 1			

